

Document Title		Specification of MCU Driver
Document Owner		AUTOSAR
Document Responsibility		AUTOSAR
Document Identification No		031
Document Status		Final
Part of AUTOSAR Standard		Classic Platform
Part of Standard Release		4.4.0

Document Change History			
Date	Release	Changed by	Change Description
2018-10-31	4.4.0	AUTOSAR Release Management	<ul style="list-style-type: none">• Debugging support was removed• Introduced support for Multicore distribution
2017-12-08	4.3.1	AUTOSAR Release Management	<ul style="list-style-type: none">• Introduced new configuration parameter – McuRamSectionWriteSize• Changed reentrancy of API Mcu_SetMode to Reentrant
2016-11-30	4.3.0	AUTOSAR Release Management	<ul style="list-style-type: none">• Removed chapter "Variants"• Cleaned up unresolved references in traceability
2015-07-31	4.2.2	AUTOSAR Release Management	<ul style="list-style-type: none">• Minor change regarding DET renaming and extension Incorporation• Clarifications regarding configuration class of symbolicNameValue parameters
2014-10-31	4.2.1	AUTOSAR Release Management	<ul style="list-style-type: none">• Removed requirements for NULL pointer checking as redundant with BSW General.• Specified pass/fail criteria for extended production errors
2014-03-31	4.1.3	AUTOSAR Release Management	<ul style="list-style-type: none">• Requirement Traceability Table revised• Correction of requirement tag (Mcu_00146)

Document Change History			
Date	Release	Changed by	Change Description
2013-10-31	4.1.2	AUTOSAR Release Management	<ul style="list-style-type: none"> • Mcu_GetResetReason and Mcu_GetResetRawValue return the same value if called multiple times • RAM sector multiplicity corrected • McuClockSettingId and McuMode range corrected • Editorial changes • Removed chapter(s) on change documentation
2013-03-15	4.1.1	AUTOSAR Administration	<ul style="list-style-type: none"> • Adaptation of the Document due to the SWS General Release • Scope Fields in all configuration parameters (chapter 10) changed as Local -> impact only this module or ECU impact several modules • Autosar Memory mapping abstraction split for each BSW • Split Production Errors in “Pure” Production Errors and Extended Production Errors • Changed signature of Api Mcu_DistributePIIClock
2011-12-22	4.0.3	AUTOSAR Administration	<ul style="list-style-type: none"> • Mcu_SetMode assumes that all interrupts are disabled prior the call
2010-09-30	3.1.5	AUTOSAR Administration	<ul style="list-style-type: none"> • Corrected SWS_Mcu_00210 • Removed SWS_Mcu_00225. • Rephrased SWS_Mcu_00125 and SWS_Mcu_00011 • Added Chapter 12

Document Change History			
Date	Release	Changed by	Change Description
2010-02-02	3.1.4	AUTOSAR Administration	<ul style="list-style-type: none">• Lots requirements rephrased to make them atomic.• Debugging Concept inserted.• Insertion of a new service (Api) to read the Status after the reset. (Affected also SRS R4.0)• Insertion new configuration parameters to enable/disable PLL Apis.• Introduction of a new container to publish all the different resets that Micro Controller support.• Legal disclaimer revised
2008-08-13	3.1.1	AUTOSAR Administration	<ul style="list-style-type: none">• Legal disclaimer revised
2007-12-21	3.0.1	AUTOSAR Administration	<ul style="list-style-type: none">• Table formatting corrected
2007-01-24	2.1.15	AUTOSAR Administration	<ul style="list-style-type: none">• Wakeup concept clarified (resulted in removal of wakeup functionality and sequence diagrams in the MCU SWS). As per the concept agreed within the Startup / Wakeup Taskforce.• Obsolete function Dem_ReportErrorEvent() removed.• Technical Office Improvements: wording improvements.• Re-wording of requirements for clarification• Document meta information extended• Small layout adaptations made

Document Change History			
Date	Release	Changed by	Change Description
2007-11-28	2.1.14	AUTOSAR Administration	<ul style="list-style-type: none"> • Update to section REF _Ref158095428 \r \h : Inclusion of new file structure • Sections REF _Ref158095455 \r \h , REF _Ref158095460 \r \h , REF _Ref158095466 \r \h : Removal of 'const' from API type definition. • Section REF _Ref158095487 \r \h , REF _Ref158095489 \r \h , 10.2.5: Description detail amended • Section REF _Ref158095487 \r \h : Default value (0x0) for MCU_POWER_ON_RESET removed. • Section REF _Ref158095530 \r \h : Description updated to include reference to new pre-processor switch McuPerformResetApi. • Section 10.2.2: Introduction of pre-processor switch McuPerformResetApi • Section 10.2.3: Multiplicity of sub-container Mcu Clock Setting Configuration changed to 1. • Legal disclaimer revised • Release Notes added • "Advice for users" revised • "Revision Information" added
2006-05-16	2.0	AUTOSAR Administration	<ul style="list-style-type: none"> • Document structure adapted to common Release 2.0 SWS Template. • Major changes in chapter 10 • Structure of document changed partly • Other changes see chapter 11
2005-05-31	1.0	AUTOSAR Administration	<ul style="list-style-type: none"> • Initial Release

Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

Table of Contents

1	Introduction and functional overview	8
2	Acronyms and abbreviations	9
3	Related documentation.....	10
3.1	Input documents.....	10
3.2	Related specification	10
4	Constraints and assumptions	12
4.1	Limitations	12
4.2	Applicability to car domains	12
5	Dependencies to other modules	13
5.1	Start-up code	13
5.2	File structure.....	14
5.2.1	Code file structure.....	14
6	Requirements traceability	15
7	Functional specification	16
7.1	General Behavior.....	16
7.1.1	Background and Rationale.....	16
7.1.2	Requirements.....	16
7.2	Error classification	17
7.2.1	Development Errors	17
7.2.2	Runtime Errors.....	17
7.2.3	Transient Faults	18
7.2.4	Production Errors	18
7.2.5	Extended Production Errors (for Release 4.1.1)	18
7.3	Error detection	18
7.4	Error notification	18
8	API specification	20
8.1	Imported types.....	20
8.2	Type definitions	20
8.2.1	Mcu_ConfigType.....	20
8.2.2	Mcu_PIIStatusType	21
8.2.3	Mcu_ClockType	21
8.2.4	Mcu_ResetType	22
8.2.5	Mcu_RawResetType	22
8.2.6	Mcu_ModeType	23
8.2.7	Mcu_RamSectionType	23
8.2.8	Mcu_RamStateType	23
8.3	Function definitions.....	24
8.3.1	Mcu_Init	24
8.3.2	Mcu_InitRamSection	25
8.3.3	Mcu_InitClock	25
8.3.4	Mcu_DistributePIIClock	26
8.3.5	Mcu_GetPIIStatus	27

8.3.6	Mcu_GetResetReason.....	28
8.3.7	Mcu_GetResetRawValue.....	28
8.3.8	Mcu_PerformReset	29
8.3.9	Mcu_SetMode.....	30
8.3.10	Mcu_GetVersionInfo.....	31
8.3.11	Mcu_GetRamState	31
8.4	Call-back Notifications	32
8.5	Scheduled Functions	32
8.6	Expected Interfaces.....	32
8.6.1	Mandatory Interfaces	32
8.6.2	Optional Interfaces.....	32
8.7	API parameter checking	32
9	Sequence diagrams	34
9.1	Example Sequence for MCU initialization services	34
9.2	Mcu_GetResetReason	35
9.3	Mcu_GetResetRawValue	35
9.4	Mcu_PerformReset.....	36
10	Configuration specification.....	37
10.1	How to read this chapter	37
10.2	Containers and configuration parameters	37
10.2.1	Mcu	37
10.2.2	McuGeneralConfiguration.....	38
10.2.3	McuGeneralConfiguration.....	40
10.2.4	McuClockSettingConfig	42
10.2.5	McuModuleConfiguration.....	43
10.2.6	McuClockSettingConfig	44
10.2.7	McuDemEventParameterRefs	45
10.2.8	McuModeSettingConf	46
10.2.9	McuRamSectorSettingConf	46
10.2.10	McuClockReferencePoint	47
10.2.11	McuPublishedInformation	48
10.2.12	McuResetReasonConf.....	48
10.3	Published Information.....	49

1 Introduction and functional overview

This specification describes the functionality and API for a MCU [Microcontroller Unit] driver. The MCU driver provides services for basic microcontroller initialization, power down functionality, reset and microcontroller specific functions required by other MCAL software modules. The initialization services allow a flexible and application related MCU initialization in addition to the start-up code (see figure below). The start-up code is very MCU specific. The provided start-up code description in this document is for guidance and implies functionality which has to be taken into account before standardized MCU initialization is able to start.

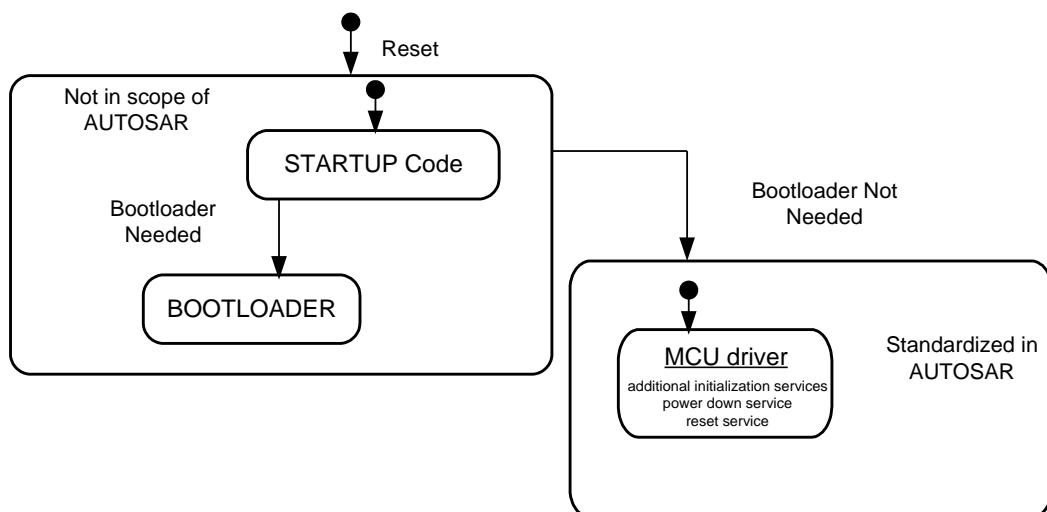


Figure 1: Scope of the MCU Driver Specification

The MCU driver accesses the microcontroller hardware directly and is located in the Microcontroller Abstraction Layer (MCAL).

MCU driver Features:

- Initialization of MCU clock, PLL, clock prescalers and MCU clock distribution
- Initialization of RAM sections
- Activation of μ C reduced power modes
- Activation of a μ C reset
- Provides a service to get the reset reason from hardware

2 Acronyms and abbreviations

Abbreviation / Acronym:	Description:
uC	Microcontroller
MCU	Micro Controller Unit
SFR	Special Function Register (MCU register)
DEM	Diagnostic Event Manager
DET	Default Error Tracer

Table 1: Acronyms and Abbreviations

3 Related documentation

3.1 Input documents

- [1] List of Basic Software Modules,
AUTOSAR_TR_BSWModuleList.pdf
- [2] Layered Software Architecture,
AUTOSAR_EXP_LayeredSoftwareArchitecture.pdf
- [3] General Requirements on Basic Software Modules,
AUTOSAR_SRS_BSWGeneral.pdf
- [4] Specification of Default Error Tracer,
AUTOSAR_SWS_DefaultErrorTracer.pdf
- [5] Specification of ECU Configuration,
AUTOSAR_TPS_ECUConfiguration.pdf
- [6] Specification of Diagnostic Event Manager,
AUTOSAR_SWS_DiagnosticEventManager.pdf
- [7] Specification of ECU State Manager,
AUTOSAR_SWS_ECUStateManager.pdf
- [8] General Requirements on SPAL,
AUTOSAR_SRS_SPALGeneral.pdf
- [9] Requirements on MCU driver,
AUTOSAR_SRS_MCUDriver.pdf
- [10] Specification of Standard Types,
AUTOSAR_SWS_StandardTypes.pdf
- [11] Basic Software Module Description Template,
AUTOSAR_TPS_BSWModuleDescriptionTemplate.pdf
- [12] General Specification of Basic Software Modules
AUTOSAR_SWS_BSWGeneral.pdf

3.2 Related specification

AUTOSAR provides a General Specification on Basic Software modules [12] (SWS BSW General), which is also valid for MCU Driver.

Thus, the specification SWS BSW General shall be considered as additional and required specification for MCU Driver.

4 Constraints and assumptions

4.1 Limitations

In general the activation and configuration of MCU reduced power mode is not mandatory within AUTOSAR standardization.

Enabling/disabling of the ECU or uC power supply is not the task of the MCU driver. This is to be handled by the upper layer.

All requirements coming from MCAL Multicore Distribution concept are marked as DRAFT in SWS and RS documents.

4.2 Applicability to car domains

No restrictions

5 Dependencies to other modules

5.1 Start-up code

Before the MCU driver can be initialized, a basic initialization of the MCU has to be executed. This MCU specific initialization is typically executed in a start-up code.

The start-up code of the MCU shall be executed after power up and any kind of microcontroller reset. It shall perform very basic and microcontroller specific start-up initialization and shall be kept short because the MCU clock and PLL are not yet initialized. The start-up code shall cover MCU specific initialization which is not part of other MCU services or other MCAL drivers. The following description summarizes the basic functionality to be included in the start-up code. It is listed for guidance because some functionality might not be supported in all MCU's.

The start-up code shall initialize the base addresses for interrupt and trap vector tables. These base addresses are provided as configuration parameters or linker/locator setting.

The start-up code shall initialize the interrupt stack pointer if an interrupt stack is supported by the MCU. The interrupt stack pointer base address and the stack size are provided as configuration parameter or linker/locator setting

The start-up code shall initialize the user stack pointer. The user stack pointer base address and the stack size are provided as configuration parameter or linker/locator setting.

If the MCU supports context save operation, the start-up code shall initialize the memory which is used for context save operation. The maximum amount of consecutive context save operations is provided as configuration parameter or linker/locator setting.

The start-up code shall ensure that the MCU internal watchdog shall not be serviced until the watchdog is initialized from the MCAL watchdog driver. This can be done for example by increasing the watchdog service time.

If the MCU supports cache memory for data and/or code, it shall be initialized and enabled in the start-up code.

The start-up code shall initialize MCU specific features with respect to internal memory as, for example, memory protection.

If external memory is used, the memory shall be initialized in the start-up code. The start-up code shall be prepared to support different memory configurations depending on code location. Different configuration options shall be taken into account for code execution from external/internal memory.

The settings of the different memories shall be provided to the start-up code as configuration parameters.

In the start-up code a default initialization of the MCU clock system shall be performed including global clock prescalers.

The start-up code shall enable protection mechanisms for special function registers (SFR's) if supported by the MCU.

The start-up code shall initialize all necessary write once registers or registers common to several drivers where one write, rather than repeated writes, to the register is required or highly desirable.

The start-up code shall initialize a minimum amount of RAM in order to allow proper execution of the MCU driver services and the caller of these services.

Note: The start-up code is ECU and MCU dependant. Details of the specification shall be described in the design specification of the MCU.

5.2 File structure

5.2.1 Code file structure

Note: The code file structure shall not be defined within this specification.

6 Requirements traceability

Requirement	Description	Satisfied by
BSW13701	-	SWS_Mcu_00207
SRS_BSW_00101	The Basic Software Module shall be able to initialize variables and hardware in a separate initialization function	SWS_Mcu_00026
SRS_BSW_00327	Error values naming convention	SWS_Mcu_00012
SRS_BSW_00337	Classification of development errors	SWS_Mcu_00012
SRS_BSW_00406	A static status variable denoting if a BSW module is initialized shall be initialized with value 0 before any APIs of the BSW module is called	SWS_Mcu_00026

7 Functional specification

7.1 General Behavior

7.1.1 Background and Rationale

The MCU driver provides MCU services for Clock and RAM initialization. In the MCU configuration set, the MCU specific settings for the Clock (i.e. PLL setting) and RAM (i.e. section base address and size) shall be configured.

7.1.2 Requirements

7.1.2.1 Reset

[SWS_Mcu_00055]: [The MCU module shall provide a service to provide software triggering of a hardware reset.] ()

Note: Only an authorized user shall be able to call this reset service function.

[SWS_Mcu_00052]: [The MCU module shall provide services to get the reset reason of the last reset if the hardware supports such a feature.] ()

Note: In an ECU, there are several sources which can cause a reset. Depending on the reset reason, several application scenarios might be necessary after re-initialization of the MCU.

7.1.2.2 Clock

[SWS_Mcu_00248]: [Mcu shall provide a service to enable and set the MCU clock. (i.e. Cpu clock, Peripheral Clock, Prescalers, Multipliers have to be configured in the MCU)] ()

Note: All the available peripheral clocks have to be made available to the other BSW modules via the McuClockReferencePoint container.

7.1.2.3 MCU Mode service

[SWS_Mcu_00164]: [The MCU module shall provide a service to activate MCU reduced power modes.] ()

The service, which activates the reduced power mode, shall allow access to power modes available in the uC hardware.

[SWS_Mcu_00165]: [The number of modes and the configuration is MCU dependent and shall be configured in the configuration set of the MCU module.] ()

Note: The activation of MCU reduced power modes might influence the PLL, the internal oscillator, the CPU clock, uC peripheral clock and the power supply for core and peripherals.

In typical operation, MCU reduced power mode will be entered and exited frequently during ECU runtime. In this case, wake-up is performed when it is activated in one of the MCAL modules.

The upper layer is responsible for activating MCU normal operation (condition before execution of MCU power mode) or to switch off uC power supply.

For some MCU mode configuration, the MCU is able to wake up only via hardware reset.

7.2 Error classification

7.2.1 Development Errors

[SWS_Mcu_00012]: [The following errors and exceptions shall be detectable by the MCU module depending on its build version (development/production mode):

Type or error	Relevance	Related error code	Value
API service called with wrong parameter	Development	MCU_E_PARAM_CONFIG MCU_E_PARAM_CLOCK MCU_E_PARAM_MODE MCU_E_PARAM_RAMSECTION MCU_E_PLL_NOT_LOCKED MCU_E_UNINIT MCU_E_PARAM_POINTER MCU_E_INIT_FAILED	0x0A 0x0B 0x0C 0x0D 0x0E 0x0F 0x10 0x11

Table 2: Error Classification

] (SRS_BSW_00327, SRS_BSW_00337)

7.2.2 Runtime Errors

There are no runtime errors.

7.2.3 Transient Faults

There are no transient faults.

7.2.4 Production Errors

This module does not specify any production errors.

7.2.5 Extended Production Errors (for Release 4.1.1)

Type or error	Related error code	Value
Clock source failure	MCU_E_CLOCK_FAILURE	Assigned by DEM

[SWS_Mcu_00053]: [If clock failure notification is enabled in the configuration set and a clock source failure error occurs, the error code `MCU_E_CLOCK_FAILURE` shall be reported. (See also [SWS_Mcu_00051](#)).] ()

7.2.5.1 `MCU_E_CLOCK_FAILURE`

Error Name:	MCU_E_CLOCK_FAILURE	
Short Description:	Clock source failure.	
Long Description:	If clock failure notification is enabled in the configuration set and a clock source failure error occurs, the error code <code>MCU_E_CLOCK_FAILURE</code> shall be reported.	
Detection Criteria:	Fail	See SWS_Mcu_00257 .
	Pass	See SWS_Mcu_00258 .
Secondary Parameters:	The condition under which the FAIL or PASS detection is active: Clock failure notification is enabled in the configuration set.	
Time Required:	Not applicable.	
Monitor Frequency	continuous	

[[SWS_Mcu_00257](#)][Fail criteria for `MCU_E_CLOCK_FAILURE`: a clock source failure occurs] ()

[[SWS_Mcu_00258](#)][Pass criteria for `MCU_E_CLOCK_FAILURE`: no clock source failure occurs] ()

7.3 Error detection

For details refer to the chapters 7.2 “Error classification” & 7.3 “Error Detection” in [SWS_BSWGeneral](#).

7.4 Error notification

[SWS_Mcu_00051]: [The MCU driver follows the standardized AUTOSAR concept to report production errors. The provided callback routines are specified in the Diagnostic Event Manager (DEM) specification (see 6).] ()

[SWS_Mcu_00226]: [Production Errors shall not be used as the return value of the called function.] ()

8 API specification

8.1 Imported types

In this chapter all types included from the following modules are listed:

[SWS_Mcu_00152] [

Module	Header File	Imported Type
Dem	Rte_Dem_Type.h	Dem_EventIdType
	Rte_Dem_Type.h	Dem_EventStatusType
Std_Types	StandardTypes.h	Std_ReturnType
	StandardTypes.h	Std_VersionInfoType

] ()

8.2 Type definitions

8.2.1 Mcu_ConfigType

[SWS_Mcu_00249] [

Name:	Mcu_ConfigType	
Type:	Structure	
Range:	Hardware dependent structure	A structure to hold the MCU driver configuration.
Description:	A pointer to such a structure is provided to the MCU initialization routines for configuration.	
Available via:	Mcu.h	

] ()

[SWS_Mcu_00131]: [The structure Mcu_ConfigType is an external data structure (i.e. implementation specific) and shall contain the initialization data for the MCU module. It shall contain:

- MCU dependent properties
- Reset Configuration
- Definition of MCU modes
- Definition of Clock settings
- Definition of RAM sections

] ()

[SWS_Mcu_00054]: [The structure Mcu_ConfigType shall provide a configurable (enable/disable) clock failure notification if the MCU provides an interrupt for such detection.] ()

If the clock failure is detected with other HW mechanisms e.g., the generation of a trap, this notification shall be disabled and the failure reporting shall be done outside the MCU driver.

[SWS_Mcu_00035]: [The definitions for each MCU mode within the structure

`Mcu_ConfigType` shall contain: (depending on MCU)

- MCU specific properties
- Change of CPU clock
- Change of Peripheral clock
- Change of PLL settings
- Change of MCU power supply] ()

[SWS_Mcu_00031]: [The definitions for each Clock setting within the structure

`Mcu_ConfigType` shall contain:

- MCU specific properties as, e.g., clock safety features and special clock distribution settings
- PLL settings /start lock options
- Internal oscillator setting] ()

[SWS_Mcu_00030]: [The definitions for each RAM section within the structure

`Mcu_ConfigType` shall contain:

- RAM section base address
- Section size
- Data pre-setting to be initialized
- RAM write size] ()

Usage of linker symbols instead of scalar values is allowed.

8.2.2 Mcu_PlIStatusType

[SWS_Mcu_00250]: [

Name:	<code>Mcu_PlIStatusType</code>	
Type:	Enumeration	
Range:	<code>MCU_PLL_LOCKED</code>	--PLL is locked
	<code>MCU_PLL_UNLOCKED</code>	--PLL is unlocked
	<code>MCU_PLL_STATUS_UNDEFINED</code>	--PLL Status is unknown
Description:	This is a status value returned by the function <code>Mcu_GetPlIStatus</code> of the MCU module.	
Available via:	<code>Mcu.h</code>	

] ()

[SWS_Mcu_00230]: [The type `Mcu_PlIStatusType` is the type of the return value of the function `Mcu_GetPlIStatus`.] ()

[SWS_Mcu_00231]: [The type of `Mcu_PlIStatusType` is an enumeration with the following values: `MCU_PLL_LOCKED`, `MCU_PLL_UNLOCKED`, `MCU_PLL_STATUS_UNDEFINED`.] ()

8.2.3 Mcu_ClockType

[SWS_Mcu_00251]: [

Name:	<code>Mcu_ClockType</code>
Type:	<code>uint</code>

Range:	0..<number of clock settings>- 1	-- The range is dependent on the number of different clock settings provided in the configuration structure. The type shall be chosen depending on MCU platform for best performance.
Description:	Specifies the identification (ID) for a clock setting, which is configured in the configuration structure	
Available via:	Mcu.h	

] ()

[SWS_Mcu_00232]: [The type Mcu_ClockType defines the identification (ID) for clock setting configured via the configuration structure.] ()

[SWS_Mcu_00233]: [The type shall be uint8, uint16 or uint32, depending on uC platform.] ()

8.2.4 Mcu_ResetType

[SWS_Mcu_00252] [

Name:	Mcu_ResetType	
Type:	Enumeration	
Range:	MCU_POWER_ON_RESET	-- Power On Reset (default)
	MCU_WATCHDOG_RESET	-- Internal Watchdog Timer Reset
	MCU_SW_RESET	-- Software Reset
	MCU_RESET_UNDEFINED	-- Reset is undefined
Description:	This is the type of the reset enumerator containing the subset of reset types. It is not required that all reset types are supported by hardware.	
Available via:	Mcu.h	

] ()

[SWS_Mcu_00234]: [The type Mcu_ResetType, represents the different reset that a specified MCU can have.] ()

[SWS_Mcu_00134]: [The MCU module shall provide at least the values MCU_POWER_ON_RESET and MCU_RESET_UNDEFINED for the enumeration Mcu_ResetType.] ()

Note: Additional reset types of Mcu_ResetType may be added depending on MCU.

8.2.5 Mcu_RawResetType

[SWS_Mcu_00253] [

Name:	Mcu_RawResetType	
Type:	uint	
Range:	MCU dependent	-- The type shall be chosen depending on MCU platform for register value
Description:	This type specifies the reset reason in raw register format read from a reset status register.	
Available via:	Mcu.h	

] ()

[SWS_Mcu_00235]: [The type Mcu_RawResetType specifies the reset reason in raw register format, read from a reset status register.] ()

[SWS_Mcu_00236]: [The type shall be uint8, uint16 or uint32 based on best performance.] ()

8.2.6 Mcu_ModeType

[SWS_Mcu_00254] [

Name:	Mcu_ModeType	
Type:	uint	
Range:	0..<number of MCU modes>-1	-- The range is dependent on the number of MCU modes provided in the configuration structure. The type shall be chosen depending on MCU platform for best performance.
Description:	This type specifies the identification (ID) for a MCU mode, which is configured in the configuration structure.	
Available via:	Mcu.h	

] ()

[SWS_Mcu_00237]: [The Mcu_ModeType specifies the identification (ID) for a MCU mode, configured via configuration structure.] ()

[SWS_Mcu_00238]: [The type shall be uint8, uint16 or uint32.] ()

8.2.7 Mcu_RamSectionType

[SWS_Mcu_00255] [

Name:	Mcu_RamSectionType	
Type:	uint	
Range:	0..< number of RAM sections>-1	-- The range is dependent on the number of RAM sections provided in the configuration structure. The type shall be chosen depending on MCU platform for best performance.
Description:	This type specifies the identification (ID) for a RAM section, which is configured in the configuration structure.	
Available via:	Mcu.h	

] ()

[SWS_Mcu_00239]: [The Mcu_RamSectionType specifies the identification (ID) for a RAM section, configured via the configuration structure.] ()

[SWS_Mcu_00240]: [The type shall be uint8, uint16 or uint32, based on best performance.] ()

8.2.8 Mcu_RamStateType

[SWS_Mcu_00256] [

Name:	Mcu_RamStateType	
Type:	Enumeration	
Range:	MCU_RAMSTATE_INVALID	-- Ram content is not valid or unknown (default).
	MCU_RAMSTATE_VALID	-- Ram content is valid:

Description:	This is the Ram State data type returned by the function Mcu_GetRamState of the Mcu module. It is not required that all RAM state types are supported by the hardware.
Available via:	Mcu.h

] ()

8.3 Function definitions

This is a list of functions provided for upper layer modules.

8.3.1 Mcu_Init

[SWS_Mcu_00153]:

Service name:	Mcu_Init
Syntax:	void Mcu_Init(const Mcu_ConfigType* ConfigPtr)
Service ID[hex]:	0x00
Sync/Async:	Synchronous
Reentrancy:	Non Reentrant
Parameters (in):	ConfigPtr Pointer to MCU driver configuration set.
Parameters (inout):	None
Parameters (out):	None
Return value:	None
Description:	This service initializes the MCU driver.
Available via:	Mcu.h

] ()

[SWS_Mcu_00026]: [The function Mcu_Init shall initialize the MCU module, i.e. make the configuration settings for power down, clock and RAM sections visible within the MCU module.] (SRS_BSW_00101, SRS_BSW_00406)

Note: After the execution of the function Mcu_Init, the configuration data are accessible and can be used by the MCU module functions as, e.g., Mcu_InitRamSection.

The MCU module's implementer shall apply the following rules regarding initialization of controller registers within the function Mcu_Init:

1. **[SWS_Mcu_00116]:** [If the hardware allows for only one usage of the register, the driver module implementing that functionality is responsible for initializing the register.] ()
2. **[SWS_Mcu_00244]:** [If the register can affect several hardware modules and if it is an I/O register, it shall be initialised by the PORT driver.] ()
3. **[SWS_Mcu_00245]:** [If the register can affect several hardware modules and if it is not an I/O register, it shall be initialised by this MCU driver.] ()
4. **[SWS_Mcu_00246]:** [One-time writable registers that require initialisation directly after reset shall be initialised by the startup code.] ()

5. [SWS_Mcu_00247]: [All other registers not mentioned before shall be initialised by the start-up code.] ()

Note: The term 'Hardware Module' refers to internal modules of the MCU and not to a BSW module.

8.3.2 Mcu_InitRamSection

[SWS_Mcu_00154] [

Service name:	Mcu_InitRamSection
Syntax:	Std_ReturnType Mcu_InitRamSection(Mcu_RamSectionType RamSection)
Service ID[hex]:	0x01
Sync/Async:	Synchronous
Reentrancy:	Non Reentrant
Parameters (in):	RamSection Selects RAM memory section provided in configuration set
Parameters (inout):	None
Parameters (out):	None
Return value:	Std_ReturnType E_OK: command has been accepted E_NOT_OK: command has not been accepted e.g. due to parameter error
Description:	This service initializes the RAM section wise.
Available via:	Mcu.h

] ()

[SWS_Mcu_00011]: [The function Mcu_InitRamSection shall fill the memory from address McuRamSectionBaseAddress up to address McuRamSectionBaseAddress + McuRamSectionSize-1 with the byte-value contained in McuRamDefaultValue and by writing at once a number of bytes defined by McuRamSectionWriteSize, where McuRamSectionBaseAddress, McuRamSectionSize, McuRamDefaultValue and McuRamSectionWriteSize are the values of the configuration parameters for each RamSection (see SWS_Mcu_00030).] ()

[SWS_Mcu_00136]: [The MCU module's environment shall call the function Mcu_InitRamSection only after the MCU module has been initialized using the function Mcu_Init.] ()

8.3.3 Mcu_InitClock

[SWS_Mcu_00155] [

Service name:	Mcu_InitClock
Syntax:	Std_ReturnType Mcu_InitClock(Mcu_ClockType ClockSetting)
Service ID[hex]:	0x02
Sync/Async:	Synchronous
Reentrancy:	Non Reentrant

Parameters (in):	ClockSetting	Clock setting
Parameters (inout):	None	
Parameters (out):	None	
Return value:	Std_ReturnType	E_OK: Command has been accepted E_NOT_OK: Command has not been accepted
Description:	This service initializes the PLL and other MCU specific clock options.	
Available via:	Mcu.h	

] ()

[SWS_Mcu_00137]: [The function `Mcu_InitClock` shall initialize the PLL and other MCU specific clock options. The clock configuration parameters are provided via the configuration structure.] ()

[SWS_Mcu_00138]: [The function `Mcu_InitClock` shall start the PLL lock procedure (if PLL shall be initialized) and shall return without waiting until the PLL is locked.] ()

[SWS_Mcu_00139]: [The MCU module's environment shall only call the function `Mcu_InitClock` after the MCU module has been initialized using the function `Mcu_Init`.] ()

[SWS_Mcu_00210]: [The function `Mcu_InitClock` shall be disabled if the parameter `McuInitClock` is set to FALSE. Instead this function is available if the former parameter is set to TRUE (see also **ECUC_Mcu_00118** :).] ()

8.3.4 Mcu_DistributePllClock

[SWS_Mcu_00156]: [

Service name:	Mcu_DistributePllClock	
Syntax:	Std_ReturnType Mcu_DistributePllClock(void)	
Service ID[hex]:	0x03	
Sync/Async:	Synchronous	
Reentrancy:	Non Reentrant	
Parameters (in):	None	
Parameters (inout):	None	
Parameters (out):	None	
Return value:	Std_ReturnType	E_OK: Command has been accepted E_NOT_OK: Command has not been accepted
Description:	This service activates the PLL clock to the MCU clock distribution.	
Available via:	Mcu.h	

] ()

[SWS_Mcu_00140]: [The function `Mcu_DistributePllClock` shall activate the PLL clock to the MCU clock distribution.] ()

[SWS_Mcu_00141]: [The function `Mcu_DistributePllClock` shall remove the current clock source (for example internal oscillator clock) from MCU clock distribution.] ()

The MCU module's environment shall only call the function `Mcu_DistributePllClock` after the status of the PLL has been detected as locked by the function `Mcu_GetPllStatus`.

[SWS_Mcu_00056]: [The function `Mcu_DistributePllClock` shall return without affecting the MCU hardware if the PLL clock has been automatically activated by the MCU hardware.] ()

[SWS_Mcu_00142]: [If the function `Mcu_DistributePllClock` is called before PLL has locked, this function shall return `E_NOT_OK` immediately, without any further action.] ()

[SWS_Mcu_00205]: [The function `Mcu_DistributePllClock` shall be available if the pre-compile parameter `McuNoPll` is set to FALSE. Otherwise, this API has to be disabled (see also **ECUC_Mcu_00180** :).] ()

8.3.5 `Mcu_GetPllStatus`

[SWS_Mcu_00157]: [

Service name:	<code>Mcu_GetPllStatus</code>
Syntax:	<code>Mcu_PllStatusType Mcu_GetPllStatus(</code> <code>void</code> <code>)</code>
Service ID[hex]:	0x04
Sync/Async:	Synchronous
Reentrancy:	Reentrant
Parameters (in):	None
Parameters (inout):	None
Parameters (out):	None
Return value:	<code>Mcu_PllStatusType</code> <code>PLL Status</code>
Description:	This service provides the lock status of the PLL.
Available via:	<code>Mcu.h</code>

] ()

[SWS_Mcu_00008]: [The function `Mcu_GetPllStatus` shall return the lock status of the PLL.] ()

[SWS_Mcu_00132]: [The function `Mcu_GetPllStatus` shall return `MCU_PLL_STATUS_UNDEFINED` if this function is called prior to calling of the function `Mcu_Init`.] ()

[SWS_Mcu_00206]: [The function `Mcu_GetPllStatus` shall also return `MCU_PLL_STATUS_UNDEFINED` if the pre-compile parameter `McuNoPll` is set to `TRUE` (see also **ECUC_Mcu_00180** :).] ()

8.3.6 Mcu_GetResetReason

[SWS_Mcu_00158] [

Service name:	<code>Mcu_GetResetReason</code>
Syntax:	<code>Mcu_ResetType Mcu_GetResetReason(void)</code>
Service ID[hex]:	0x05
Sync/Async:	Synchronous
Reentrancy:	Reentrant
Parameters (in):	None
Parameters (inout):	None
Parameters (out):	None
Return value:	<code>Mcu_ResetType</code>
Description:	The service reads the reset type from the hardware, if supported.
Available via:	<code>Mcu.h</code>

] ()

[SWS_Mcu_00005]: [The function `Mcu_GetResetReason` shall read the reset reason from the hardware and return this reason if supported by the hardware. If the hardware does not support the hardware detection of the reset reason, the return value from the function `Mcu_GetResetReason` shall always be `MCU_POWER_ON_RESET`.] ()

[SWS_Mcu_00133]: [The function `Mcu_GetResetReason` shall return `MCU_RESET_UNDEFINED` if this function is called prior to calling of the function `Mcu_Init`, and if supported by the hardware.] ()

The User should ensure that the reset reason is cleared once it has been read out to avoid multiple reset reasons.

Note: In case of multiple calls to this function the return value should always be the same.

8.3.7 Mcu_GetResetRawValue

[SWS_Mcu_00159] [

Service name:	<code>Mcu_GetResetRawValue</code>
Syntax:	<code>Mcu_RawResetType Mcu_GetResetRawValue(void)</code>

)
Service ID[hex]:	0x06
Sync/Async:	Synchronous
Reentrancy:	Reentrant
Parameters (in):	None
Parameters (inout):	None
Parameters (out):	None
Return value:	Mcu_RawResetType
	Reset raw value
Description:	The service reads the reset type from the hardware register, if supported.
Available via:	Mcu.h

] ()

[SWS_Mcu_00135]: [The function Mcu_GetResetRawValue shall return an implementation specific value which does not correspond to a valid value of the reset status register and is not equal to 0 if this function is called prior to calling of the function Mcu_Init, and if supported by the hardware.] ()

[SWS_Mcu_00006]: [The function Mcu_GetResetRawValue shall read the reset raw value from the hardware register if the hardware supports this. If the hardware does not have a reset status register, the return value shall be 0x0.] ()

The User should ensure that the reset reason is cleared once it has been read out to avoid multiple reset reasons.

Note: In case of multiple calls to this function the return value should always be the same.

8.3.8 Mcu_PerformReset

[SWS_Mcu_00160]: [

Service name:	Mcu_PerformReset
Syntax:	void Mcu_PerformReset(void)
Service ID[hex]:	0x07
Sync/Async:	Synchronous
Reentrancy:	Non Reentrant
Parameters (in):	None
Parameters (inout):	None
Parameters (out):	None
Return value:	None
Description:	The service performs a microcontroller reset.
Available via:	Mcu.h

] ()

[SWS_Mcu_00143]: [The function Mcu_PerformReset shall perform a microcontroller reset by using the hardware feature of the microcontroller.] ()

[SWS_Mcu_00144]: [The function `Mcu_PerformReset` shall perform the reset type which is configured in the configuration set.] ()

[SWS_Mcu_00145]: [The MCU module's environment shall only call the function `Mcu_PerformReset` after the MCU module has been initialized by the function `Mcu_Init`.] ()

[SWS_Mcu_00146]: [The function `Mcu_PerformReset` is only available if the pre-compile parameter `McuPerformResetApi` is set to TRUE. If set to FALSE, the function `Mcu_PerformReset` is not applicable. (see Section 10.2.2).] ()

8.3.9 Mcu_SetMode

[SWS_Mcu_00161]: [

Service name:	<code>Mcu_SetMode</code>
Syntax:	<code>void Mcu_SetMode(</code> <code>Mcu_ModeType McuMode</code> <code>)</code>
Service ID[hex]:	0x08
Sync/Async:	Synchronous
Reentrancy:	Reentrant
Parameters (in):	<code>McuMode</code> Set different MCU power modes configured in the configuration set
Parameters (inout):	None
Parameters (out):	None
Return value:	None
Description:	This service activates the MCU power modes.
Available via:	<code>Mcu.h</code>

] ()

[SWS_Mcu_00147]: [The function `Mcu_SetMode` shall set the MCU power mode. In case of CPU power down mode, the function `Mcu_SetMode` returns after it has performed a wake-up.] ()

[SWS_Mcu_00148]: [The MCU module's environment shall only call the function `Mcu_SetMode` after the MCU module has been initialized by the function `Mcu_Init`.] ()

Note: The environment of the function `Mcu_SetMode` has to ensure that the ECU is ready for reduced power mode activation.

Note: The API `Mcu_SetMode` assumes that all interrupts are disabled prior the call of the API by the calling instance. The implementation has to take care that no wakeup interrupt event is lost. This could be achieved by a check whether pending wakeup interrupts already have occurred even if `Mcu_SetMode` has not set the controller to power down mode yet.

8.3.10 Mcu_GetVersionInfo

[SWS_Mcu_00162] [

Service name:	Mcu_GetVersionInfo
Syntax:	void Mcu_GetVersionInfo(Std_VersionInfoType* versioninfo)
Service ID[hex]:	0x09
Sync/Async:	Synchronous
Reentrancy:	Reentrant
Parameters (in):	None
Parameters (inout):	None
Parameters (out):	versioninfo Pointer to where to store the version information of this module.
Return value:	None
Description:	This service returns the version information of this module.
Available via:	Mcu.h

] ()

8.3.11 Mcu_GetRamState

[SWS_Mcu_00207] [

Service name:	Mcu_GetRamState
Syntax:	Mcu_RamStateType Mcu_GetRamState(void)
Service ID[hex]:	0x0a
Sync/Async:	Synchronous
Reentrancy:	Reentrant
Parameters (in):	None
Parameters (inout):	None
Parameters (out):	None
Return value:	Mcu_RamStateType Status of the Ram Content
Description:	This service provides the actual status of the microcontroller Ram. (if supported)
Available via:	Mcu.h

] (BSW13701)

Note: Some microcontrollers offer the functionality to check if the Ram Status is valid after a reset. The function `Mcu_GetRamState` can be used for this reason.

[SWS_Mcu_00208]: [The MCU module's environment shall call this function only if the MCU module has been already initialized using the function `MCU_Init`.]

()

[SWS_Mcu_00209]: [The function `Mcu_GetRamState` shall be available to the user if the pre-compile parameter `McuGetRamStateApi` is set to TRUE. Instead, if the former parameter is set to FALSE, this function shall be disabled (e.g. the hardware does not support this functionality).] ()

8.4 Call-back Notifications

There are no callback notifications for the MCU driver. The callback notifications are implemented in another module (ICU driver and/or complex drivers).

8.5 Scheduled Functions

There are no scheduled functions within the MCU driver.

8.6 Expected Interfaces

In this chapter all interfaces required from other modules are listed.

8.6.1 Mandatory Interfaces

[SWS_Mcu_00166] [

<i>API function</i>	<i>Header File</i>	<i>Description</i>
Dem_SetEventStatus	Dem.h	Called by SW-Cs or BSW modules to report monitor status information to the Dem. BSW modules calling Dem_SetEventStatus can safely ignore the return value.

] ()

8.6.2 Optional Interfaces

This chapter defines all interfaces, which are required to fulfil an optional functionality of the module.

[SWS_Mcu_00163] [

<i>API function</i>	<i>Header File</i>	<i>Description</i>
Det_ReportError	Det.h	Service to report development errors.

] ()

8.7 API parameter checking

[SWS_Mcu_00017]: [If the development error detection is enabled for the MCU module, the MCU functions shall check the following API parameters, report detected errors to the Default Error Tracer and reject with return value `E_NOT_OK` in case the function has a standard return type.] ()

[SWS_Mcu_00019]: [`ClockSetting` shall be within the settings defined in the configuration data structure. Related error value: `MCU_E_PARAM_CLOCK`] ()

[SWS_Mcu_00020]: [`McuMode` shall be within the modes defined in the configuration data structure. Related error value: `MCU_E_PARAM_MODE`] ()

[SWS_Mcu_00021]: [RamSection shall be within the sections defined in the configuration data structure. Related error value: MCU_E_PARAM_RAMSECTION] ()

[SWS_Mcu_00122]: [A error shall be reported if the status of the PLL is detected as not locked with the function `Mcu_DistributePllClock()`. The DET error reporting shall be used. Related error value: MCU_E_PLL_NOT_LOCKED.] ()

[SWS_Mcu_00125]: [If development error detection is enabled and if any other function (except `Mcu_GetVersionInfo`) of the MCU module is called before `Mcu_Init` function, the error code `MCU_E_UNINIT` shall be reported to the DET.] ()

9 Sequence diagrams

9.1 Example Sequence for MCU initialization services

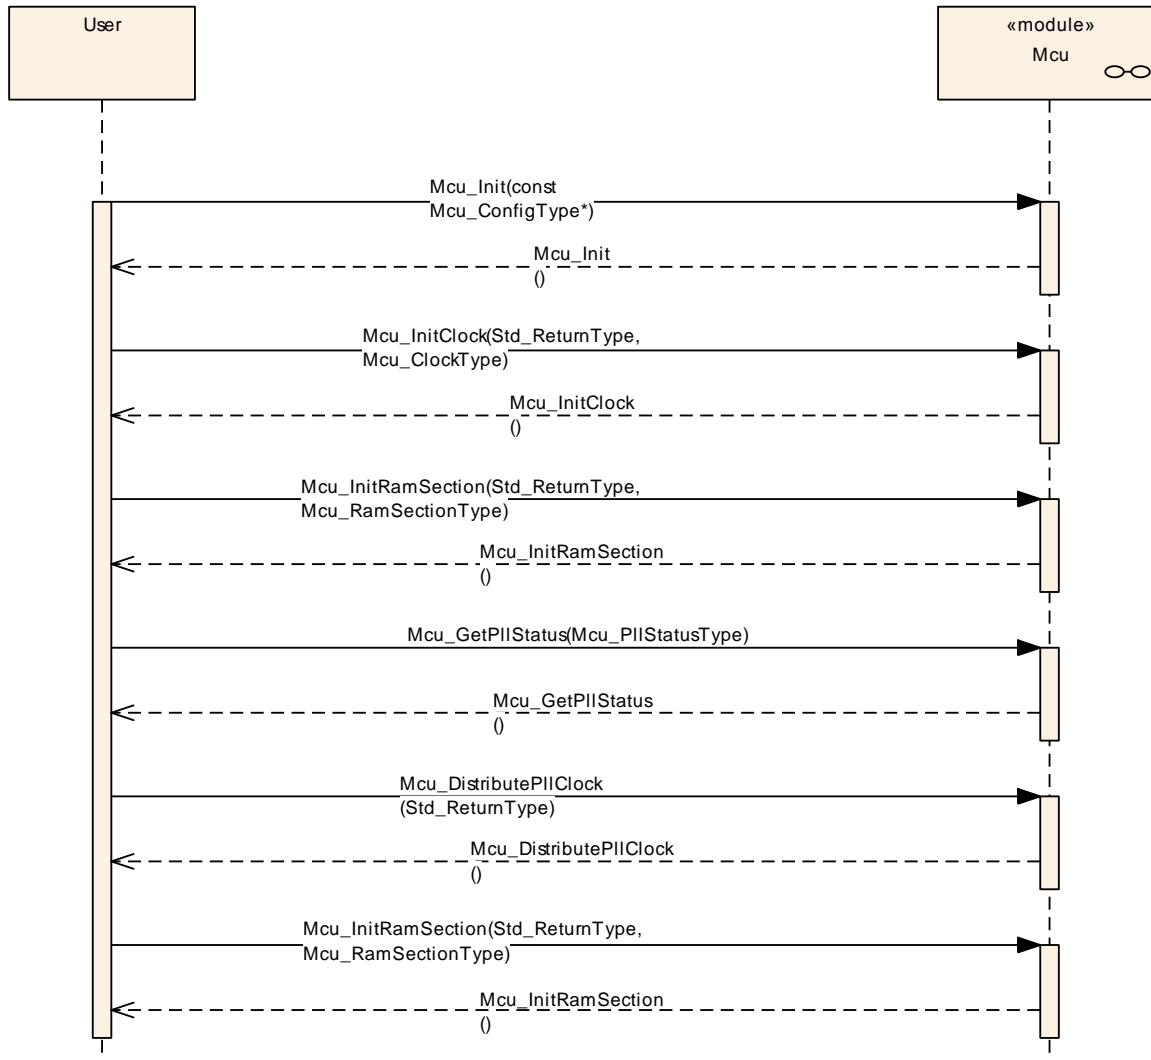


Figure 3: Sequence Diagram – MCU Initialisation

The order of services is just an example and might differ depending on the user. `Mcu_Init` shall be executed first after power-up. The user takes care that the PLL is locked by executing `Mcu_GetPIIStatus`.

9.2 Mcu_GetResetReason

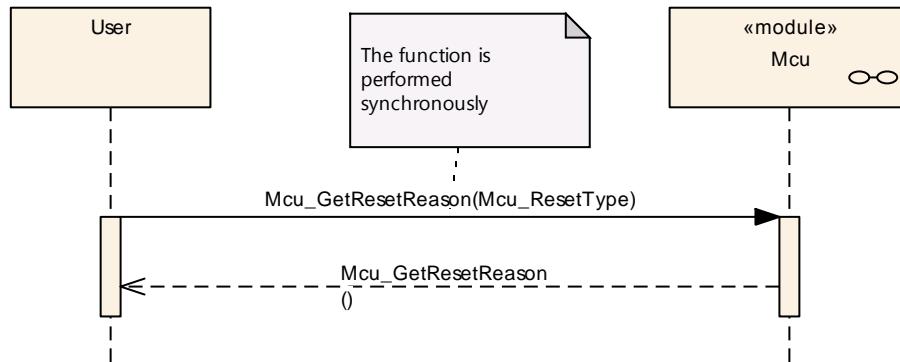


Figure 7: Sequence Diagram – MCU_GetResetReason

9.3 Mcu_GetResetRawValue

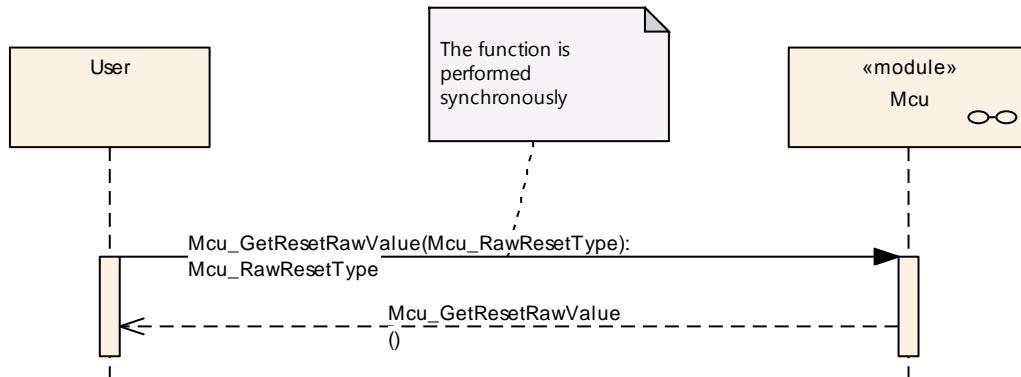


Figure 8: Sequence Diagram – Mcu_GetResetRawValue

9.4 Mcu_PerformReset

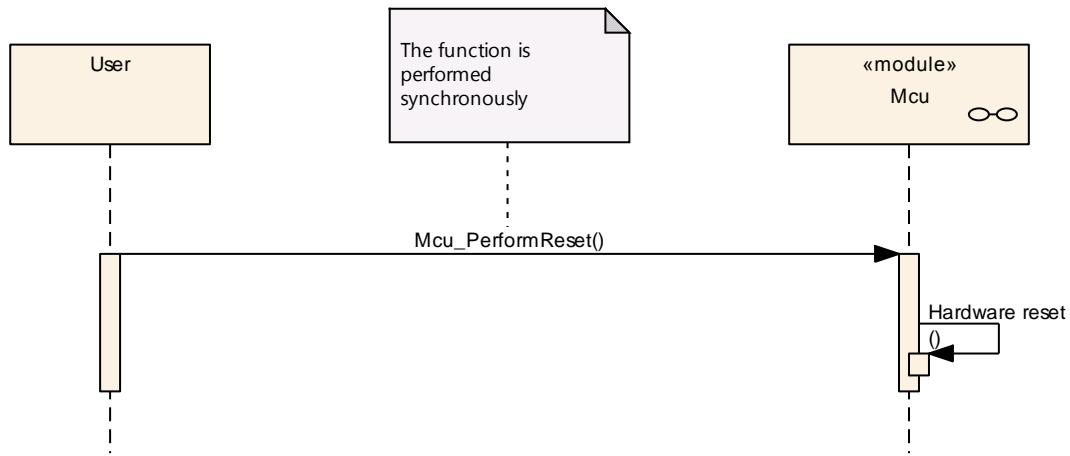


Figure 9: Sequence Diagram – Mcu_PerformReset

10 Configuration specification

In general, this chapter defines configuration parameters and their clustering into containers. In order to support the specification Chapter 10.1 describes fundamentals. It also specifies a template (table) you shall use for the parameter specification. We intend to leave Chapter 10.1 in the specification to guarantee comprehension.

Chapter 10.2 specifies the structure (containers) and the parameters of the module MCU.

Chapter 10.3 specifies published information of the module MCU.

10.1 How to read this chapter

For details refer to the chapter 10.1 “Introduction to configuration specification” in *SWS_BSWGeneral*.

10.2 Containers and configuration parameters

The following chapters summarize all configuration parameters. The detailed meanings of the parameters describe Chapters 7 and Chapter 8.

[SWS_Mcu_00126]: [The initialization function of this module shall always have a pointer as a parameter, even though for VARIANT-PRE-COMPILe no configuration set shall be given. Instead a NULL pointer shall be passed to the initialization function.] ()

[SWS_Mcu_00259]: DRAFT [The MCU Driver module shall reject configurations with partition mappings which are not supported by the implementation.] ()

[SWS_Mcu_CONSTR_00001]: DRAFT [The module will operate as an independent instance in each of the partitions, means the called API will only target the partition it is called in.] ()

10.2.1 Mcu

SWS Item	ECUC_Mcu_00189 :	
Module Name	Mcu	
Module Description	Configuration of the Mcu (Microcontroller Unit) module.	
Post-Build Variant Support	true	
Supported Config Variants	VARIANT-POST-BUILD, VARIANT-PRE-COMPILe	

Included Containers		
Container Name	Multiplicity	Scope / Dependency
McuGeneralConfiguration	1	This container contains the configuration (parameters) of the MCU driver.

McuModuleConfiguration	1	This container contains the configuration (parameters) of the MCU driver
McuPublishedInformation	1	Container holding all MCU specific published information parameters

10.2.2 McuGeneralConfiguration

SWS Item	ECUC_Mcu_00118 :
Container Name	McuGeneralConfiguration
Description	This container contains the configuration (parameters) of the MCU driver.
Configuration Parameters	

SWS Item	ECUC_Mcu_00166 :		
Name	McuDevErrorDetect		
Parent Container	McuGeneralConfiguration		
Description	Switches the development error detection and notification on or off. <ul style="list-style-type: none"> • true: detection and notification is enabled. • false: detection and notification is disabled. 		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00181 :		
Name	McuGetRamStateApi		
Parent Container	McuGeneralConfiguration		
Description	Pre-processor switch to enable/disable the API Mcu_GetRamState. (e.g. If the H/W does not support the functionality, this parameter can be used to disable the Api).		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00182 :		
Name	McuInitClock		
Parent Container	McuGeneralConfiguration		
Description	If this parameter is set to FALSE, the clock initialization has to be disabled from the MCU driver. This concept applies when there are some write once clock registers and a bootloader is present. If this parameter is set to TRUE, the MCU driver is responsible of the clock initialization.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	true		

Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00180 :		
Name	McuNoPll		
Parent Container	McuGeneralConfiguration		
Description	This parameter shall be set True, if the H/W does not have a PLL or the PLL circuitry is enabled after the power on without S/W intervention. In this case MCU_DistributePllClock has to be disabled and MCU_GetPllStatus has to return MCU_PLL_STATUS_UNDEFINED. Otherwise this parameters has to be set False		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	true		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00167 :		
Name	McuPerformResetApi		
Parent Container	McuGeneralConfiguration		
Description	Pre-processor switch to enable / disable the use of the function Mcu_PerformReset()		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00168 :		
Name	McuVersionInfoApi		
Parent Container	McuGeneralConfiguration		
Description	Pre-processor switch to enable / disable the API to read out the modules version information.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00191 :		
Name	McuEcucPartitionRef		
Parent Container	McuGeneralConfiguration		
Description	Maps the MCU driver to zero or multiple ECUC partition to make the driver API available in this partition.		

	Tags: atp.Status=draft		
Multiplicity	0..*		
Type	Reference to [EcucPartition]		
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: ECU		

No Included Containers

10.2.3 McuGeneralConfiguration

SWS Item	ECUC_Mcu_00118 :		
Container Name	McuGeneralConfiguration		
Description	This container contains the configuration (parameters) of the MCU driver.		
Configuration Parameters			

SWS Item	ECUC_Mcu_00166 :		
Name	McuDevErrorDetect		
Parent Container	McuGeneralConfiguration		
Description	Switches the development error detection and notification on or off. <ul style="list-style-type: none"> • true: detection and notification is enabled. • false: detection and notification is disabled. 		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00181 :		
Name	McuGetRamStateApi		
Parent Container	McuGeneralConfiguration		
Description	Pre-processor switch to enable/disable the API Mcu_GetRamState. (e.g. If the H/W does not support the functionality, this parameter can be used to disable the Api).		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	

Scope / Dependency	scope: local		
SWS Item	ECUC_Mcu_00182 :		
Name	McuInitClock		
Parent Container	McuGeneralConfiguration		
Description	If this parameter is set to FALSE, the clock initialization has to be disabled from the MCU driver. This concept applies when there are some write once clock registers and a bootloader is present. If this parameter is set to TRUE, the MCU driver is responsible of the clock initialization.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	true		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00180 :		
Name	McuNoPll		
Parent Container	McuGeneralConfiguration		
Description	This parameter shall be set True, if the H/W does not have a PLL or the PLL circuitry is enabled after the power on without S/W intervention. In this case MCU_DistributePllClock has to be disabled and MCU_GetPllStatus has to return MCU_PLL_STATUS_UNDEFINED. Otherwise this parameters has to be set False		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	true		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00167 :		
Name	McuPerformResetApi		
Parent Container	McuGeneralConfiguration		
Description	Pre-processor switch to enable / disable the use of the function Mcu_PerformReset()		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00168 :		
Name	McuVersionInfoApi		
Parent Container	McuGeneralConfiguration		
Description	Pre-processor switch to enable / disable the API to read out the modules version information.		
Multiplicity	1		
Type	EcucBooleanParamDef		

Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00191 :		
Name	McuEcucPartitionRef		
Parent Container	McuGeneralConfiguration		
Description	Maps the MCU driver to zero or multiple ECUC partition to make the driver API available in this partition.		
Tags:	atp.Status=draft		
Multiplicity	0..*		
Type	Reference to [EcucPartition]		
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: ECU		

No Included Containers

10.2.4 McuClockSettingConfig

SWS Item	ECUC_Mcu_00124 :		
Container Name	McuClockSettingConfig		
Description	This container contains the configuration (parameters) for the Clock settings of the MCU. Please see MCU031 for more information on the MCU clock settings.		
Configuration Parameters			

SWS Item	ECUC_Mcu_00183 :		
Name	McuClockSettingId		
Parent Container	McuClockSettingConfig		
Description	The Id of this McuClockSettingConfig to be used as argument for the API call "Mcu_InitClock".		
Multiplicity	1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 255		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

Included Containers

Container Name	Multiplicity	Scope / Dependency
McuClockReferencePoint	1..*	This container defines a reference point in the Mcu Clock tree. It defines the frequency which then can be used by other modules as an input value. Lower multiplicity is 1, as even in the simplest case (only one frequency is used), there is one frequency to be defined.

10.2.5 McuModuleConfiguration

SWS Item	ECUC_Mcu_00119 :	
Container Name	McuModuleConfiguration	
Description	This container contains the configuration (parameters) of the MCU driver	
Configuration Parameters		

SWS Item	ECUC_Mcu_00170 :	
Name	McuClockSrcFailureNotification	
Parent Container	McuModuleConfiguration	
Description	Enables/Disables clock failure notification. In case this feature is not supported by HW the setting should be disabled.	
Multiplicity	1	
Type	EcucEnumerationParamDef	
Range	DISABLED	--
	ENABLED	--
Post-Build Variant Value	true	
Value Configuration Class	Pre-compile time	X VARIANT-PRE-COMPIL
	Link time	--
	Post-build time	X VARIANT-POST-BUILD
Scope / Dependency	scope: local	

SWS Item	ECUC_Mcu_00171 :	
Name	McuNumberOfMcuModes	
Parent Container	McuModuleConfiguration	
Description	This parameter shall represent the number of Modes available for the MCU. calculationFormula = Number of configured McuModeSettingConf	
Multiplicity	1	
Type	EcucIntegerParamDef	
Range	1 .. 255	
Default value	--	
Post-Build Variant Value	true	
Value Configuration Class	Pre-compile time	X VARIANT-PRE-COMPIL
	Link time	--
	Post-build time	X VARIANT-POST-BUILD
Scope / Dependency	scope: local	

SWS Item	ECUC_Mcu_00172 :	
Name	McuRamSectors	
Parent Container	McuModuleConfiguration	
Description	This parameter shall represent the number of RAM sectors available for the MCU. calculationFormula = Number of configured McuRamSectorSettingConf	
Multiplicity	1	

Type	EcucIntegerParamDef		
Range	0 .. 4294967295		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	--	
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00173 :		
Name	McuResetSetting		
Parent Container	McuModuleConfiguration		
Description	This parameter relates to the MCU specific reset configuration. This applies to the function Mcu_PerformReset, which performs a microcontroller reset using the hardware feature of the microcontroller.		
Multiplicity	0..1		
Type	EcucIntegerParamDef		
Range	1 .. 255		
Default value	--		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

Included Containers			
Container Name	Multiplicity	Scope / Dependency	
McuClockSettingConfig	1..*	This container contains the configuration (parameters) for the Clock settings of the MCU. Please see MCU031 for more information on the MCU clock settings.	
McuDemEventParameterRefs	0..1	Container for the references to DemEventParameter elements which shall be invoked using the API Dem_SetEventStatus in case the corresponding error occurs. The EventId is taken from the referenced DemEventParameter's DemEventId symbolic value. The standardized errors are provided in this container and can be extended by vendor-specific error references.	
McuModeSettingConf	1..*	This container contains the configuration (parameters) for the Mode setting of the MCU. Please see MCU035 for more information on the MCU mode settings.	
McuRamSectorSettingConf	0..*	This container contains the configuration (parameters) for the RAM Sector setting. Please see MCU030 for more information on RAM sector settings.	

10.2.6 McuClockSettingConfig

SWS Item	ECUC_Mcu_00124 :		
Container Name	McuClockSettingConfig		
Description	This container contains the configuration (parameters) for the Clock settings of the MCU. Please see MCU031 for more information on the		

	MCU clock settings.
Configuration Parameters	

SWS Item	ECUC_Mcu_00183 :		
Name	McuClockSettingId		
Parent Container	McuClockSettingConfig		
Description	The Id of this McuClockSettingConfig to be used as argument for the API call "Mcu_InitClock".		
Multiplicity	1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 255		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

Included Containers			
Container Name	Multiplicity	Scope / Dependency	
McuClockReferencePoint	1..*	This container defines a reference point in the Mcu Clock tree. It defines the frequency which then can be used by other modules as an input value. Lower multiplicity is 1, as even in the simplest case (only one frequency is used), there is one frequency to be defined.	

10.2.7 McuDemandEventParameterRefs

SWS Item	ECUC_Mcu_00187 :		
Container Name	McuDemandEventParameterRefs		
Description	Container for the references to DemEventParameter elements which shall be invoked using the API Dem_SetEventStatus in case the corresponding error occurs. The EventId is taken from the referenced DemEventParameter's DemEventId symbolic value. The standardized errors are provided in this container and can be extended by vendor-specific error references.		
Configuration Parameters			

SWS Item	ECUC_Mcu_00188 :		
Name	MCU_E_CLOCK_FAILURE		
Parent Container	McuDemandEventParameterRefs		
Description	Reference to configured DEM event to report "Clock source failure".		
Multiplicity	0..1		
Type	Symbolic name reference to [DemEventParameter]		
Post-Build Variant			
Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

dependency: Dem

No Included Containers

10.2.8 McuModeSettingConf

SWS Item	ECUC_Mcu_00123 :
Container Name	McuModeSettingConf
Description	This container contains the configuration (parameters) for the Mode setting of the MCU. Please see MCU035 for more information on the MCU mode settings.

Configuration Parameters

SWS Item	ECUC_Mcu_00176 :									
Name	McuMode									
Parent Container	McuModeSettingConf									
Description	The parameter represents the MCU Mode settings.									
Multiplicity	1									
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)									
Range	0 .. 255									
Default value	--									
Post-Build Variant Value	false									
Value Configuration Class	<table border="1"> <tr> <td><i>Pre-compile time</i></td> <td>X</td> <td>All Variants</td> </tr> <tr> <td><i>Link time</i></td> <td>--</td> <td></td> </tr> <tr> <td><i>Post-build time</i></td> <td>--</td> <td></td> </tr> </table>	<i>Pre-compile time</i>	X	All Variants	<i>Link time</i>	--		<i>Post-build time</i>	--	
<i>Pre-compile time</i>	X	All Variants								
<i>Link time</i>	--									
<i>Post-build time</i>	--									
Scope / Dependency	scope: local									

No Included Containers

10.2.9 McuRamSectorSettingConf

SWS Item	ECUC_Mcu_00120 :
Container Name	McuRamSectorSettingConf
Description	This container contains the configuration (parameters) for the RAM Sector setting. Please see MCU030 for more information on RAM sec-tor settings.

Configuration Parameters

SWS Item	ECUC_Mcu_00177 :									
Name	McuRamDefaultValue									
Parent Container	McuRamSectorSettingConf									
Description	This parameter shall represent the Data pre-setting to be initialized									
Multiplicity	1									
Type	EcucIntegerParamDef									
Range	0 .. 255									
Default value	--									
Post-Build Variant Value	true									
Value Configuration Class	<table border="1"> <tr> <td><i>Pre-compile time</i></td> <td>X</td> <td>VARIANT-PRE-COMPIL</td> </tr> <tr> <td><i>Link time</i></td> <td>--</td> <td></td> </tr> <tr> <td><i>Post-build time</i></td> <td>X</td> <td>VARIANT-POST-BUILD</td> </tr> </table>	<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL	<i>Link time</i>	--		<i>Post-build time</i>	X	VARIANT-POST-BUILD
<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL								
<i>Link time</i>	--									
<i>Post-build time</i>	X	VARIANT-POST-BUILD								
Scope / Dependency	scope: local									

SWS Item	ECUC_Mcu_00178 :
-----------------	------------------

Name	McuRamSectionBaseAddress		
Parent Container	McuRamSectorSettingConf		
Description	This parameter shall represent the MCU RAM section base address		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 4294967295		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	--	
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00179 :		
Name	McuRamSectionSize		
Parent Container	McuRamSectorSettingConf		
Description	This parameter represents the MCU RAM Section size in bytes.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 4294967295		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	--	
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	ECUC_Mcu_00190 :		
Name	McuRamSectionWriteSize		
Parent Container	McuRamSectorSettingConf		
Description	This parameter shall define the size in bytes of data which can be written into RAM at once.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 4294967295		
Default value	8		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	--	
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.2.10 McuClockReferencePoint

SWS Item	ECUC_Mcu_00174 :		
Container Name	McuClockReferencePoint		
Description	This container defines a reference point in the Mcu Clock tree. It defines the frequency which then can be used by other modules as an input value. Lower multiplicity is 1, as even in the simplest case (only one frequency is used), there is one frequency to be defined.		
Configuration Parameters			

SWS Item	ECUC_Mcu_00175 :		
Name	McuClockReferencePointFrequency		
Parent Container	McuClockReferencePoint		
Description	This is the frequency for the specific instance of the McuClockReferencePoint container. It shall be given in Hz.		
Multiplicity	1		
Type	EcucFloatParamDef		
Range	[0 .. INF]		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	--	
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

No Included Containers

10.2.11 McuPublishedInformation

SWS Item	ECUC_Mcu_00184 :		
Container Name	McuPublishedInformation		
Description	Container holding all MCU specific published information parameters		
Configuration Parameters			

Included Containers

Container Name	Multiplicity	Scope / Dependency
McuResetReasonConf	1..*	This container contains the configuration for the different type of reset reason that can be retrieved from Mcu_GetResetReason Api.

10.2.12 McuResetReasonConf

SWS Item	ECUC_Mcu_00185 :		
Container Name	McuResetReasonConf		
Description	This container contains the configuration for the different type of reset reason that can be retrieved from Mcu_GetResetReason Api.		
Configuration Parameters			

SWS Item	ECUC_Mcu_00186 :		
Name	McuResetReason		
Parent Container	McuResetReasonConf		
Description	The parameter represents the different type of reset that a Micro supports. This parameter is referenced by the parameter EcumResetReason in the ECU State manager module.		
Multiplicity	1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 255		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Published Information	X	All Variants
Scope / Dependency	scope: ECU		

No Included Containers

10.3 Published Information

For details refer to the chapter 10.3 “Published Information” in *SWS_BSWGeneral*.