

Document Title	Specification of Diagnostic Log and Trace
Document Owner	AUTOSAR
Document Responsibility	AUTOSAR
Document Identification No	351

Document Status	published
Part of AUTOSAR Standard	Classic Platform
Part of Standard Release	R20-11

Document Change History			
Date	Release	Changed by	Change Description
2020-11-30	R20-11	AUTOSAR Release Management	<ul style="list-style-type: none">Added subcontainer and definition for parameter DltLogLevelThreshold and for DltGeneralNvRAMSupport.Assigned new ID for Imported Types because of duplicated IDMinor corrections and bugfixesEditorial changes
2019-11-28	R19-11	AUTOSAR Release Management	<ul style="list-style-type: none">No content changesChanged Document Status from Final to published
2018-10-31	4.4.0	AUTOSAR Release Management	<ul style="list-style-type: none">Tracing to RS LogAndTraceInteraction DLT <> DEM removedMinor corrections
2017-12-08	4.3.1	AUTOSAR Release Management	<ul style="list-style-type: none">Introduced use of StbMAdded APIs regarding Rx data pathRemoved redundant itemsEditorial changes
2016-11-30	4.3.0	AUTOSAR Release Management	<ul style="list-style-type: none">Major rework of the SWS DltDlt Protocol moved to PRS Dlt Protocol specificationRemoved interaction with DCM
2015-07-31	4.2.2	AUTOSAR Release Management	<ul style="list-style-type: none">Minor corrections
2014-10-31	4.2.1	AUTOSAR Release Management	<ul style="list-style-type: none">Changed requirements: SWS_Dlt_00515, SWS_Dlt_00516, SWS_Dlt_00332, SWS_Dlt_0028

Document Change History			
Date	Release	Changed by	Change Description
2014-03-31	4.1.3	AUTOSAR Release Management	<ul style="list-style-type: none">• Changed SWS_Dlt_00477
2013-10-31	4.1.2	AUTOSAR Release Management	<ul style="list-style-type: none">• Minor corrections• Editorial changes• Removed chapter(s) on change documentation
2013-03-15	4.1.1	AUTOSAR Administration	<ul style="list-style-type: none">• Modeling of Services: introduction of formal descriptions of service interfaces• Reworked according to the new SWS_BSWGeneral
2011-12-22	4.0.3	AUTOSAR Administration	<ul style="list-style-type: none">• Added Dlt control messages for getting values of modifiable parameters• Modification and update of Dem and Dcm interfaces• Added FIBEX example for non verbose transmission mode
2010-09-30	3.1.5	AUTOSAR Administration	<ul style="list-style-type: none">• Bug fixes and extension of Dlt control message specification• Update of communication with Dem (Dem_GetEventFreezeFrameData)• Update of interface to Dcm (Dlt_ReadData)
2010-02-02	3.1.4	AUTOSAR Administration	<ul style="list-style-type: none">• Initial Release

Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

Table of Contents

1	Introduction and functional overview	7
2	Acronyms and abbreviations.....	8
2.1	Term and definition	8
3	Related documentation	10
3.1	Input documents	10
3.2	Related standards and norms	10
3.3	Related specification.....	10
4	Constraints and assumptions.....	11
4.1	Limitations	11
4.2	Applicability to car domains	11
5	Dependencies to other modules	12
5.1	RTE	12
5.2	PDU Router.....	12
5.3	NvM.....	12
5.4	GPT	12
5.5	StbM.....	12
5.6	DET	12
5.7	DEM	12
6	Requirements traceability	13
7	Functional specification.....	14
7.1	Dlt specification.....	14
7.1.1	Dlt commands.....	14
7.1.2	Dlt interaction with software components	15
7.1.3	VFB trace.....	18
7.1.4	Log messages from DEM	20
7.1.5	Log messages from DET.....	20
7.1.6	Recommendation for generation of Message IDs	21
7.1.7	Startup behavior	21
7.1.8	Persistent storage of configuration.....	22
7.1.9	Sending of Log and Trace Messages	23
7.1.10	Receiving of Dlt commands.....	30
7.1.11	Sending of Dlt commands	34
7.2	Error classification	35
7.2.1	Development errors.....	35
7.2.2	Runtime errors.....	35
7.2.3	Transient faults	36
7.2.4	Production errors	36
7.2.5	Extended production errors	36
8	API specification.....	37
8.1	Imported types	37
8.2	Type definitions.....	37

8.2.1	Dlt_ConfigType	37
8.2.2	Dlt_MessageType.....	38
8.2.3	Dlt_MessageIDType	38
8.2.4	Dlt_MessageNetworkTraceInfoType	39
8.3	Function definitions	39
8.3.1	Dlt_Init.....	39
8.3.2	Dlt_GetVersionInfo	40
8.3.3	Dlt_SendTraceMessage	41
8.3.4	Dlt_SendLogMessage	41
8.3.5	Dlt_RegisterContext	42
8.3.6	Dlt_UnregisterContext	43
8.3.7	Dlt_DetForwardErrorTrace	44
8.3.8	Dlt_SetLogLevel	45
8.3.9	Dlt_SetTraceStatus	46
8.3.10	Dlt_GetLogInfo	46
8.3.11	Dlt_GetDefaultLogLevel	47
8.3.12	Dlt_StoreConfiguration	48
8.3.13	Dlt_ResetToFactoryDefault	49
8.3.14	Dlt_SetMessageFiltering	50
8.3.15	Dlt_SetDefaultLogLevel.....	50
8.3.16	Dlt_SetDefaultTraceStatus	51
8.3.17	Dlt_GetDefaultTraceStatus	52
8.3.18	Dlt_GetLogChannelNames	53
8.3.19	Dlt_GetTraceStatus	53
8.3.20	Dlt_SetLogChannelAssignment	54
8.3.21	Dlt_SetLogChannelThreshold	55
8.3.22	Dlt_GetLogChannelThreshold.....	56
8.3.23	Dlt.InjectCall_<SESSION>	56
8.4	Call-back notifications	57
8.4.1	Dlt_RxIndication	57
8.4.2	Dlt_TriggerTransmit	58
8.4.3	Dlt_TxConfirmation	59
8.4.4	Dlt_TpTxConfirmation	60
8.4.5	Dlt_CopyTxData	60
8.4.6	Dlt_StartOfReception.....	62
8.4.7	Dlt_TpRxIndication	63
8.4.8	Dlt_CopyRxData	63
8.5	Scheduled functions	65
8.5.1	Dlt_TxFunction	65
8.6	Expected interfaces	66
8.6.1	Mandatory interfaces	66
8.6.2	Optional interfaces	67
8.7	Client-Server-Interfaces	68
8.7.1	DltControlService.....	68
8.7.2	InjectionCallback	77
8.7.3	LogTraceSessionControl	79
8.7.4	DltSwcMessageService.....	81
8.8	Implementation Data Types	85
8.8.1	Dlt_ApplicationIDType	85
8.8.2	Dlt_ContextIDType	85

8.8.3	Dlt_SessionIDType	85
8.8.4	Dlt_LogInfoType	86
8.8.5	Dlt_ContextIDInfoType	86
8.8.6	Dlt_ApplicationIDInfoType	87
8.8.7	Dlt_MessageOptionsType	88
8.8.8	Dlt_MessageLogInfoType	88
8.8.9	Dlt_MessageLogLevelType	89
8.8.10	Dlt_MessageTraceType	90
8.8.11	Dlt_MessageArgumentCount	90
8.8.12	Dlt_MessageTraceInfoType	92
8.8.13	Dlt_LogChannelNameType	92
8.8.14	Dlt_AssignmentOperation	93
8.9	Ports	94
8.9.1	Dlt_ControlService_{SW-C}	94
8.9.2	Dlt.InjectCallback_{SW-C}	94
8.9.3	Dlt.SessionControlCallback_{SW-C}	94
8.9.4	Dlt.SwcMessageService_{SW-C}	95
9	Sequence diagrams	96
9.1	Dlt initialization	96
9.2	Overview of Dlt message transmission on one LogChannel	97
9.3	SetLogLevelFilter	99
9.4	Buffer overflow indication	100
10	Configuration specification	102
10.1	Containers and configuration parameters	102
10.1.1	Dlt	103
10.1.2	DltGeneral	103
10.1.3	DltSwc	108
10.1.4	DltSwcContext	111
10.1.5	DltConfigSet	112
10.1.6	DltProtocol	113
10.1.7	DltEculd	115
10.1.8	DltEculdCalloutChoice	116
10.1.9	DltEculdValueChoice	116
10.1.10	DltLogLevelSetting	117
10.1.11	DltLogLevelThreshold	118
10.1.12	DltLogChannelAssignment	119
10.1.13	DltTraceStatusSetting	120
10.1.14	DltTraceStatusAssignment	121
10.1.15	DltLogOutput	121
10.1.16	DltLogChannel	122
10.1.17	DltTxPdu	126
10.1.18	DltRxPdu	128
10.2	Published Information	130

1 Introduction and functional overview

This specification describes the functionality and the configuration of the AUTOSAR Basic Software module Dlt.

It receives log information from DET, DEM, SW-Cs, or trace information of the RTE. The Dlt module transmits this data via communication busses to make this information visible outside the ECU.

For this purpose, the Dlt module defines the API to send and receive dedicated log/trace information on the bus.

In addition, the NvM module can be optionally used to store an updated filter setting of the Dlt module persistently. This enables the ECU to transmit log/trace information with the desired level without the need of an explicit setup request coming from the communication bus (via a logging tool) at every ECU startup.

The Dlt module is located on top of the PduR and below the RTE.

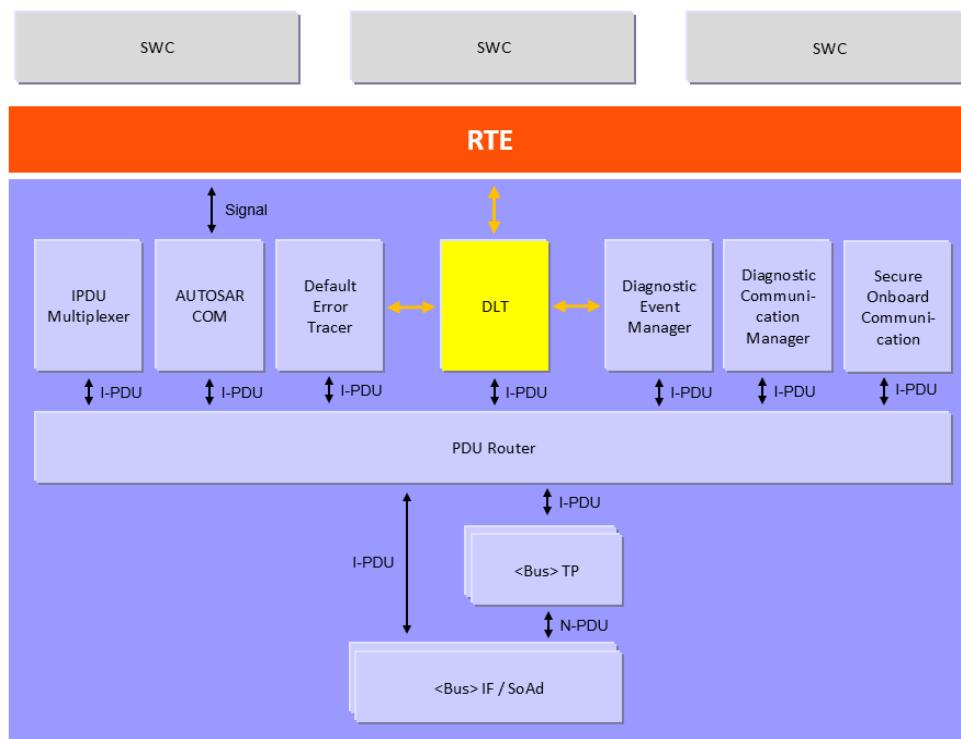


Figure 1 – Location of the Dlt module

Please note:

The Dlt Message Format, the available Dlt Commands, and the Dlt protocol (to communicate with an external logging and tracing tool) are defined in a separate document. Please refer to the Dlt Protocol Specification [1] for further information.

2 Acronyms and abbreviations

Abbreviation / Acronym:	Description:
APID	Application ID
CTID	Context ID
Dlt	Diagnostic Log and Trace
MCNT	Message Counter
MSBF	Most Significant Byte First
MSBI	Message Bus Info
MSCI	Message Control Info
MSLI	Message Log Info
MSTP	Message Type
MSTI	Message Trace Info
NOAR	Number of Arguments
STMS	Timestamp
UEH	Use Extended Header
VERB	Verbose
VERS	Version Number
WEID	With ECU ID
WSID	With Session ID
WTMS	With Timestamp

2.1 Term and definition

Term	Description:
Log and trace message	A log and trace message contains all data and options to describe a log and trace event in a software. A log and trace message consists of a header and payload.
Dlt User	A Dlt User represents the source of a generated Dlt message. The possible users are SW-Cs, RTE (for VFB traces), DEM, or DET.
Log Message	A Log Message contains debug information like state changes or value changes.
Trace Message	A Trace messages contains information, which has passed via the VFB.
ECU ID	ECU ID is the name of an ECU, composed by four 8-bit ASCII characters (e.g., ABS0 or COMB).
Session	A session is a logical entity of source of log or trace messages. If an application / SW-C is instantiated several times, each instance gets a globally unique session ID with respect to the application / context ID. It is possible for an application / SWC to have several simultaneous log or trace sessions, if it has several ports opened to Dlt. Since Session ID is not specified in AUTOSAR for SW-Cs, the port defined argument values shall be used for this number.
Session ID	Session ID is the identification number of a log or trace session.
Application ID	Application ID is an abbreviation of an application / SW-C. It identifies the

	application / SW-C a log and trace message originates from. The Application ID is composed by four 8-bit ASCII characters.
Context ID	Context ID is a user defined identifier to group Log and Trace Messages generated by an application / SW-C. The following rules apply: <ul style="list-style-type: none">• Each ApplicationID can own several Context IDs.• Context IDs are grouped by Application IDs.• Context IDs shall be unique within an Application ID.• The source of a log and trace message is identified using the tuple “ApplicationID” and “ContextId”. Four 8-bit ASCII characters compose the ContextId.
Message ID	Message ID is the identifier to characterize the information, which is transported by the message itself. A Message ID identifies a kind of log or trace message uniquely. It can be used for identifying the source (in source code) of a message and it can be used for characterizing the payload of a message. A Message ID is statically fixed at development or configuration time.
Log level	A log level defines a classification for the severity grade of a Log Message.
Trace status	The trace status provides information, if a trace message should be send.
Log Channel	A physical communication bus, which is used to transmit Dlt messages.
External client	The external client is a tool to control, monitor, and store log / trace messages provided by ECUs using the Dlt module.

3 Related documentation

3.1 Input documents

- [1] DLT Protocol Specification
PRS_DLTProtocol.pdf
- [2] AUTOSAR Layered Software Architecture
AUTOSAR_EXP_LayeredSoftwareArchitecture.pdf
- [3] AUTOSAR General Requirements on Basic Software Modules
AUTOSAR_SRS_BSWGeneral.pdf
- [4] AUTOSAR Specification of RTE
AUTOSAR_SWS_RTE.pdf
- [5] AUTOSAR Specification of PDU Router
AUTOSAR_SWS_PDURouter.pdf
- [6] AUTOSAR Specification of NVRAM Manager
AUTOSAR_SWS_NVRAMManager.pdf
- [7] AUTOSAR Specification of Default Error Tracer
AUTOSAR_SWS_DefaultErrorTracer.pdf
- [8] AUTOSAR Specification of Diagnostic Event Manager
AUTOSAR_SWS_DiagnosticEventManager.pdf
- [9] AUTOSAR Specification of GPT Driver
AUTOSAR_SWS_GPTDriver.pdf

3.2 Related standards and norms

- IEC 7498-1 The Basic Model, IEC Norm, 1994

3.3 Related specification

AUTOSAR provides a General Specification on Basic Software (SWS BSW General) which is also valid for Dlt.

Thus, the specification SWS BSW General shall be considered as additional required specification for the Dlt module.

4 Constraints and assumptions

4.1 Limitations

VFB Tracing: Currently, VFB Trace only supports the non-verbose mode. I.e., the Dlt module will send out the arguments in a raw format, simply doing a memory copy of the arguments to the trace message.

Note:

Currently, the Dlt data type model does NOT support arbitrarily nested complex data types, which AUTOSAR does. So there is no generic way to transform arguments given to the VFB Trace hook functions into Dlt data types needed for the verbose mode.

Also an ASAM Fibex description cannot be generated by the Dlt module as the in-memory representation might not be compliant to the SWCD data type description of the arguments.

4.2 Applicability to car domains

This basic software module can be used for all car domains.

5 Dependencies to other modules

5.1 RTE

The RTE (including the VFB and the BSW Scheduler) is used to interact with SW-Cs to generate Log and Trace messages and to call the Dlt module's Tx function cyclically.

5.2 PDU Router

In order to transmit Dlt messages on the communication bus, the Dlt module interacts with the PDU Router.

5.3 NvM

In order to load and store altered configurations like filter settings and/or Log Channel assignments, the NvM module can optionally be used.

5.4 GPT

In order to derive a time stamp, the GPT module can be used for this purpose.

5.5 StbM

In order to get a synchronized time value (Local Time Base derived from Global Time Base) in standard/extended format., the StbM module can be used for this purpose.

5.6 DET

In order to be able to report default errors and to forward DET errors to the communication bus, the Dlt module has to interact with the DET module. However, the interaction with DET is optional.

5.7 DEM

In order to be able to report development errors and to transmit DEM events on the communication bus, the Dlt module has to interact with the DEM module using a CDD and/or a SW-C. No standardized interaction between DEM and DLT is available.

6 Requirements traceability

Requirement	Description	Satisfied by
RS_LT_00003	Applications shall have the possibility to send log or trace messages to the LT module.	SWS_Dlt_00241, SWS_Dlt_00243
RS_LT_00004	The LT shall provide the actual set of log levels and the trace status to an Application.	SWS_Dlt_00252, SWS_Dlt_00254
RS_LT_00006	Trace events from errors generated by BSW and Applications shall be forwarded to the LT module.	SWS_Dlt_00430, SWS_Dlt_00432
RS_LT_00008	RTE shall provide an interface for LT to trace RTE/VFB calls.	SWS_Dlt_00284
RS_LT_00009	The LT shall implement an interface to trace the RTE/VFB.	SWS_Dlt_00276, SWS_Dlt_00277, SWS_Dlt_00285
RS_LT_00032	A protocol shall be implemented to be able to set and query the trace status and log levels of log and trace sources of each ECU.	SWS_Dlt_00643
RS_LT_00033	A list of all log and trace sources of an ECU shall be accessible from the external client.	SWS_Dlt_00021, SWS_Dlt_00245, SWS_Dlt_00769
RS_LT_00034	LT shall support a generic API for communicating over a LT communication module.	SWS_Dlt_00516
RS_LT_00036	The LT shall provide a buffer for storing log and trace messages before initialization.	SWS_Dlt_00003
RS_LT_00038	A mechanism shall be implemented to be able to set the trace status and log levels of registered Application IDs and context IDs of each Application.	SWS_Dlt_00252, SWS_Dlt_00254
RS_LT_00039	The LT shall provide the possibility to store configuration data in a persistent way.	SWS_Dlt_00078, SWS_Dlt_00453
SRS_BSW_00101	The Basic Software Module shall be able to initialize variables and hardware in a separate initialization function	SWS_Dlt_00239
SRS_BSW_00344	BSW Modules shall support link-time configuration	SWS_Dlt_00239
SRS_BSW_00358	The return type of init() functions implemented by AUTOSAR Basic Software Modules shall be void	SWS_Dlt_00239
SRS_BSW_00402	Each module shall provide version information	SWS_Dlt_00271
SRS_BSW_00404	BSW Modules shall support post-build configuration	SWS_Dlt_00239
SRS_BSW_00405	BSW Modules shall support multiple configuration sets	SWS_Dlt_00239
SRS_BSW_00407	Each BSW module shall provide a function to read out the version information of a dedicated module implementation	SWS_Dlt_00239
SRS_BSW_00414	Init functions shall have a pointer to a configuration structure as single parameter	SWS_Dlt_00239, SWS_Dlt_00437

7 Functional specification

7.1 Dlt specification

The following chapters describe the AUTOSAR specific data and control paths the Dlt module needs for the interaction with SW-Cs, PduR, and an external client (logging tool).

7.1.1 Dlt commands

The Dlt Protocol specifies all sorts of Dlt Commands which are identified by unique Service IDs. The Dlt Commands are used to modify the behavior of the Dlt module at runtime, e.g., fetching information about the current Dlt configuration or altering filter settings.

[SWS_Dlt_00643] [The AUTOSAR Dlt module shall support the following Dlt Commands identified by the following Services IDs:

Service ID	Dlt Command Name	Description
0x01	SetLogLevel	Set the Log Level
0x02	SetTraceStatus	Enable/Disable Trace Messages
0x03	GetLogInfo	Return the LogLevel for registered SW-Cs
0x04	GetDefaultLogLevel	Return the Log Level for wildcards
0x05	StoreConfiguration	Store the current configuration non-volatile
0x06	ResetToFactoryDefault	Set the configuration back to default
0x0A	SetMessageFiltering	Enable/Disable the Dlt filters
0x11	SetDefaultLogLevel	Set the LogLevel for wildcards
0x12	SetDefaultTraceStatus	Enable/Disable Trace Messages for wildcards
0x15	GetDefaultTraceStatus	Get the current TraceLevel for wildcards
0x17	GetLogChannelNames	Return the name(s) of the LogChannel(s)
0x1F	GetTraceStatus	Get the current trace status (on/off)
0x20	SetLogChannelAssignment	Add/ Remove the given LogChannel as output path
0x21	SetLogChannelThreshold	Set the filter threshold for the given LogChannel
0x22	GetLogChannelThreshold	Get the filter threshold for the given LogChannel
0x23	BufferOverflowNotification	Indication of a buffer overflow within the DLT module
0x24	SyncTimeStamp	Reports synchronized absolute time

] (RS_LT_00032)

Note:

The layouts of the defined Dlt Commands, which can be received via Dlt Control Messages, are defined in the Dlt Protocol Specification [1].

7.1.2 Dlt interaction with software components

The Dlt module offers interfaces SW-Cs can use for sending Log and Trace Messages.

Optionally, SW-Cs can provide a port for notifications on log level threshold and trace status changes, which are provided by the Dlt module separately for every tuple of ApplicationId/ContextId. These notifications can be used to avoid already the generation of Log and Trace Messages by the SW-Cs, instead of having them to be filtered out later on by the Dlt module.

Since the Dlt module supports multiple instances of SW-Cs, which use the same tuples of ApplicationId/ContextId, an additional SessionId parameter allows distinguishing log/trace messages from different instances of the same SW-C.

To separate those SW-Cs technically from each other and to avoid that SW-Cs have to use unique SessionIds in calls to SendLogMessage/SendTraceMessage (details, see next chapters), the Dlt module provides a dedicated P-Port per configured SW-C (see configuration parameter `DltSwc`) where the SessionId is managed as a port-defined-argument.

If a configured SW-C is marked as being interested in notifications on log level and trace state changes, the Dlt module also provides a corresponding R-Port to notify the respective SW-C.

The information, which SW-C is responsible for which ApplicationId/ContextId tuples, is configured for the SW-C and/or updated by the SW-C during runtime with a call to RegisterContext and UnregisterContext respectively.

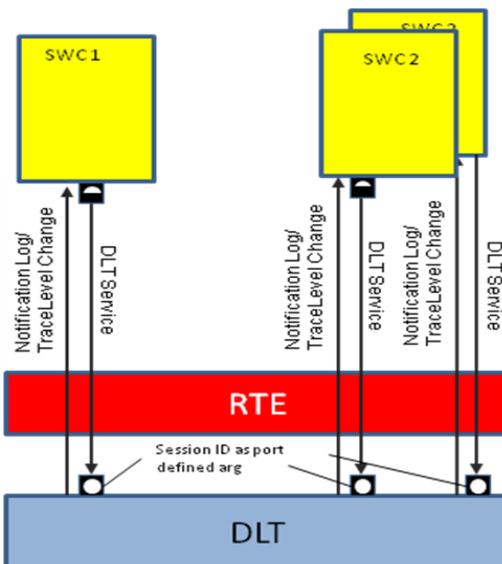


Figure 2 - Interaction with SW-C (Port configuration)

[SWS_Dlt_00644] [The Dlt module shall provide a P-Port typed by interface `DltService` (see chapter 8), for each configured SW-C (see configuration container `DltSwc`).] ()

[SWS_Dlt_00645] [The P-Port typed by interface has `SessionId` as a port-defined argument.] ()

[SWS_Dlt_00646] [The Dlt module shall provide an R-Port typed by interface `LogTraceSessionControl` (see chapter 8), for each configured SW-C (see configuration container `DltSwc`), where the configuration parameter `DltSwcSupportLogLevelAndTraceStatusChangeNotification` is set to `TRUE`.] ()

[SWS_Dlt_00647] [The `ApplicationId/ContextId` tuples for which the SW-C is responsible for and therefore needs to be notified in case of log level or trace state changes shall be deduced from configuration parameter `DltSwcContext`.] ()

7.1.2.1 Registering ApplicationIDs and ContextIds to Dlt

The Dlt module is able to inform SW-Cs about a log level change. For this purpose, they have to register at the Dlt module, using a tuple of `ApplicationId/ContextId` at runtime.

Note:

Because the developing of SW-C is not object of this specification, the Dlt module has to collect this information at runtime.

[SWS_Dlt_00765] [The Dlt module shall remember all tuples of `ApplicationIDs` and `ContextIDs` of the SW-Cs, which register to the Dlt module.] ()

[SWS_Dlt_00766] [The Dlt module shall manage a log level and a trace state for every tuple of `ContextId` and `ApplicationID`.] ()

Note:

In addition, a dynamic registration supports the possibility for the Dlt module to see which SW-C/runnable is active and which not. This is essential to know which SW-C to inform in case of a log level or trace status change.

When a SW-C is calling the `Dlt_RegisterContext` method of the `DLTService` interface, a port defined argument value is provided (`SessionID`) to the Dlt module. The value of this port defined argument corresponds to `LogTraceSessionControl` interface of the SW-C/runnable for providing information about the changing of a log level to the SW-C/runnable.

[SWS_Dlt_00021] [The Dlt module shall remember the relation between the registered tuple of ApplicationId/ContextId, and the port interface where this tuple is registered.] (RS_LT_00033)

[SWS_Dlt_00768] [If the parameter `DltGeneralRegisterContextNotification` is set to TRUE, every time `Dlt_RegisterContext` is called, the Dlt module shall send the Dlt Control Message `GetLogInfo` containing the provided ApplicationId/ContextId.] ()

7.1.2.2 Unregistering ApplicationIDs and ContextIds to Dlt

In case a SW-C is going to be stopped, it should unregister itself. This information can be used to inform an external client (e.g. a logging device) about the current SW-C status.

[SWS_Dlt_00773] [The Dlt module shall delete all tuples of ApplicationIDs and ContextIDs of the SW-Cs which unregister to the Dlt module from the list of registered applications.] ()

Note:

For these tuples, the Dlt module will not try to notify the corresponding SWC any more about LogLevel changes.

[SWS_Dlt_00774] [If the parameter `DltGeneralRegisterContextNotification` is set to TRUE, every time `Dlt_UnregisterContext` is called, the Dlt module shall send the Dlt Control Message `GetLogInfo` containing the provided ApplicationId/ContextId with parameter “status” set to 5.] ()

7.1.2.3 Using port defined argument values for the definition of SessionIds

For every function call of `Dlt_SendLogMessage`, `Dlt_SendTraceMessage`, `Dlt_RegisterContext` and `Dlt_UnregisterContext`, a port defined argument value needs to be provided.

[SWS_Dlt_00022] [Port defined argument values shall be used by the Dlt module as SessionIds.] ()

Note:

A session is the part of a SW-C for which a log level monitor is responsible. For each log level monitor the same SessionId (port defined argument value) shall be used.

[SWS_Dlt_00023] [The port defined argument value corresponds to the defined

SessionID. The value shall start at 0x1000 (for BSW modules the module ID is taken).] ()

[SWS_DLt_00332] [Each port of a SW-C connected to the DLt module shall have a unique SessionId as port defined argument. The range of SessionIds shall be continuous.] ()

7.1.3 VFB trace

The VFB trace is specified in the RTE. The meaning of VFB trace is an implicit (system inherent) forwarding of SW-C communication data (which flows over the RTE) to the DLt module. Trace means in this case that no explicit call by the SW-C is made to forward this data to DLt. This section describes the interaction of the RTE with the DLt module to record a VFB trace and the internal control of the trace data.

7.1.3.1 Interfaces provided by DLt for VFB traces

In case the DLt module is used as a VFB trace client, the RTE has to be configured accordingly. This means that the RTE configuration parameter `RteVfbTraceClientPrefix` has to be configured with value "DLt".

The configuration, whether VFB tracing is enabled at all and which traceable events are supported/activated, is solely configured in the RTE module.

From its configuration, the RTE generator then updates in Generation Phase the RTEs Basic Software Module Description with `BswModuleEntries` for each configured VFB trace hook function. Those `BswModuleEntries` exactly describe the expected function prototype the configured trace clients have to provide:

- The expected function name is defined by the shortname.
- The rest of the expected signature is defined by the contained arguments.

The DLt module has to provide the implementation for all `BswModuleEntries`, which are referenced by the attribute `outgoingCallback` of the `BswModuleDescription` of the RTE, whose shortname start with "Rte_DLt".

[SWS_DLt_00284] [The DLt module shall be compliant to the VFB trace described in the AUTOSAR_RTE_SWS.] (RS_LT_00008)

[SWS_DLt_00276] [The DLt module shall provide the possibility to trace all kinds of trace events described in the SWS RTE.] (RS_LT_00009)

[SWS_DLt_00027] [The DLt module shall provide the implementation of the hook functions for every configured event given by an `BswModuleEntry`, which owns a shortname starting with "Rte_DLt" provided by the `BswModuleDefinition` of the RTE.] ()

[SWS_Dlt_00335] [The prototype of this hook function is to be taken from the BswModuleEntry of the BSWModulDescription of the RTE.] ()

7.1.3.2 Generating hook functions

[SWS_Dlt_00285] [Because the interface Dlt_SendTraceMessage is a SW-C interface, an internal function which is equivalent to Dlt_SendTraceMessage shall be implemented to be called by the generated hook functions.] (RS_LT_00009)

[SWS_Dlt_00277] [In the hook function the internal representation of Dlt_SendTraceMessage shall be called. This call shall be in non-verbose mode.] (RS_LT_00009)

[SWS_Dlt_00278] [The payload for this hook function call shall be filled with the arguments provided by the hook function. All data transported with the arguments shall be provided.] ()

[SWS_Dlt_00632] [The argument data shall be written in raw format to the payload.] ()

[SWS_Dlt_00279] [Every hook function shall get its own ContextId. In some cases some events can be bundled to the same ContextId. This shall mostly be done if a very large number of signals is traced.] ()

[SWS_Dlt_00337] [The ApplicationID shall be "VFBT".] ()

[SWS_Dlt_00484] [The Message Type (MSTP) entry in the generated trace message shall be set to DLT_TYPE_APP_TRACE, the Message Trace Info (MSTI) entry in this case shall be set to DLT_TRACE_VFB.] ()

[SWS_Dlt_00280] [Because non-verbose mode is used, a unique Message ID as defined in [SWS_Dlt_00031] shall be used for each call to Dlt_SendTraceMessage.] ()

Note:

The description for the Message ID-payload shall be generated and provided. This description can be generated from the SW-C description file, were the interface is described.

[SWS_Dlt_00281] [In each hook function the trace status of the ContextId shall be checked.] ()

```
if (vfb_actual_trace_status_ContextXY) {
    <internal_Dlt_SendTraceMessage>(...);
}
```

Figure 3 Requirement for hook function to check the trace status of the ContextId before call of Dlt_SendTraceMessage (vfb_actual_trace_status_ContextXY is a freely named variable to hold the actual trace status for a specific ContextId)

[SWS_Dlt_00282] [Dlt shall use for every VFB trace hook function an own ContextId and thus handle for every VFB trace ContextId a separate trace status. This can be done with a separate variable.] ()

[SWS_Dlt_00283] [A separate function shall be implemented to modify the trace status of VFB trace hook functions. This function shall be harmonized with the SW-C LogTraceSessionControl interface.] ()

7.1.4 Log messages from DEM

[SWS_Dlt_00377] [The ApplicationID, ContextId and Message ID of a Log Message sent for a DEM event shall have the following values:

ApplicationID	=	“DEM”
ContextId	=	“STD0”
MessageID	=	0x00000001

] ()

7.1.5 Log messages from DET

SW-Cs and BSW modules can report errors to the DET module. Such errors can be forwarded to the Dlt module as messages with a suitable content using the Dlt_DetForwardErrorTrace.

Note:

All parameters from the DET function Det_ReportError are forwarded to the Dlt function Dlt_DetForwardErrorTrace by the DET fan-out capability.

[SWS_Dlt_00430] [The Dlt module shall provide the Dlt_DetForwardErrorTrace function for the fan-out capability of DET.]
(RS_LT_00006)

[SWS_Dlt_00376] [The ApplicationID, ContextId and MessageID of the Log Message send by DET shall have the following values:

ApplicationID	=	“DET”
ContextId	=	“STD”

```
MessageID      = 0x00000002
LogLevel       = "Error"
```

```
] ()
```

7.1.6 Recommendation for generation of Message IDs

The payload of non-verbose messages contains the Message ID. The Message ID shall be unique for an ECU. The problem is that Message IDs are provided by a SW-C (the user of Dlt) and at the point in time when coding of the log and trace message calls are done there is no instance to guarantee the uniqueness of used Message IDs.

A possible solution is to map all Log Messages in a virtual memory segment and then use the memory address as Message ID. Another solution is to have an authoring tool that is responsible for the uniqueness of the Message IDs.

In addition, it could be possible to fix Message ID values during the post build process, so uniqueness for the ECU can be guaranteed.

It is important to provide for every Message ID a description for the associated message.

[SWS_Dlt_00031] [MessageIDs used for DEM (0x00000001) and DET (0x00000002), and Trace Messages (0x00000003) are reserved and therefore not usable for SW-Cs.] ()

7.1.7 Startup behavior

The Dlt module specifies several configuration parameters, which can be reconfigured during runtime via API calls or via Dlt control messages.

This means, that those configuration parameters respectively data structures, which are based on them, have to be loaded into runtime variables during the startup of the Dlt module.

In addition, it might happen that SW-Cs and/or BSW modules are already generating log and trace data even though the Dlt module itself has not been initialized yet. For this scenario, the Dlt module offers the possibility to buffer even this data until the Dlt module is initialized.

The described functionalities result in the requirements below:

[SWS_Dlt_00003] [The Dlt module shall be able to buffer data coming from calls to `Dlt_SendLogMessage` and/or `Dlt_SendTraceMessage` even if the Dlt module has not been initialized yet.] (RS_LT_00036)

[SWS_Dlt_00648] [When the `Dlt_Init` is called, the optional timer `DltGeneralStartUpDelayTimer` shall be started if configured.] ()

[SWS_DLt_00649] 「If the parameter `DltGeneralNvRAMSupport` is disabled, static Dlt module configuration shall be used for initialization.」()

[SWS_DLt_00005] 「As soon as the Dlt module is initialized by `Dlt_Init` and the optional timer `DltGeneralStartUpDelayTimer` has expired, all the log and trace data, which has been buffered meanwhile, shall be processed as described in section “7.3.6. Sending of Log and Trace Messages”.」()

7.1.8 Persistent storage of configuration

The Dlt module offers the possibility to store configuration data in the NVRamManager module. Therefore, it is recommended to call the `Dlt_Init` function only after the NVRamManager module has been initialized.

The persistency functionality of the Dlt module supports the non-volatile saving of configuration values, which are modifiable during runtime.

The idea is to allow to customize the logging configuration during runtime and to assure that this configuration is recovered after an ECU reset or restart.

[SWS_DLt_00451] 「If the parameter `DltGeneralNvRAMSupport` is set to TRUE, non-volatile memory blocks shall be used by the Dlt module to store the current Dlt configuration persistently.」()

[SWS_DLt_00449] 「If the parameter `DltGeneralNvRAMSupport` is set to TRUE, the Dlt module has to verify the validity of the non-volatile blocks used.」()

[SWS_DLt_00350] 「If the parameter `DltGeneralNvRAMSupport` is set to TRUE, the stored Dlt configuration shall be used as initial values.」()

Note:

Initial values in this case are the initial values for the persistent stored values for the first startup of the ECU.

[SWS_DLt_00078] 「Storing the current configuration to NvRAM shall only be done if the parameter `DltGeneralNvRAMSupport` is enabled and the storing has been explicitly requested by the Dlt Command “StoreConfiguration”.」(RS_LT_00039)

Note:

To store the current configuration to NvRAM, the API `NvM_WriteBlock` is used.

7.1.9 Sending of Log and Trace Messages

The Dlt data path describes the flow a Dlt Log and Trace Message takes from the source to the sink. The source can be either a SW-C or a BSW module, whereas the PDU Router is representing the sink.

The following figure provides an overview of the separate steps to send a Dlt message on the communication bus:

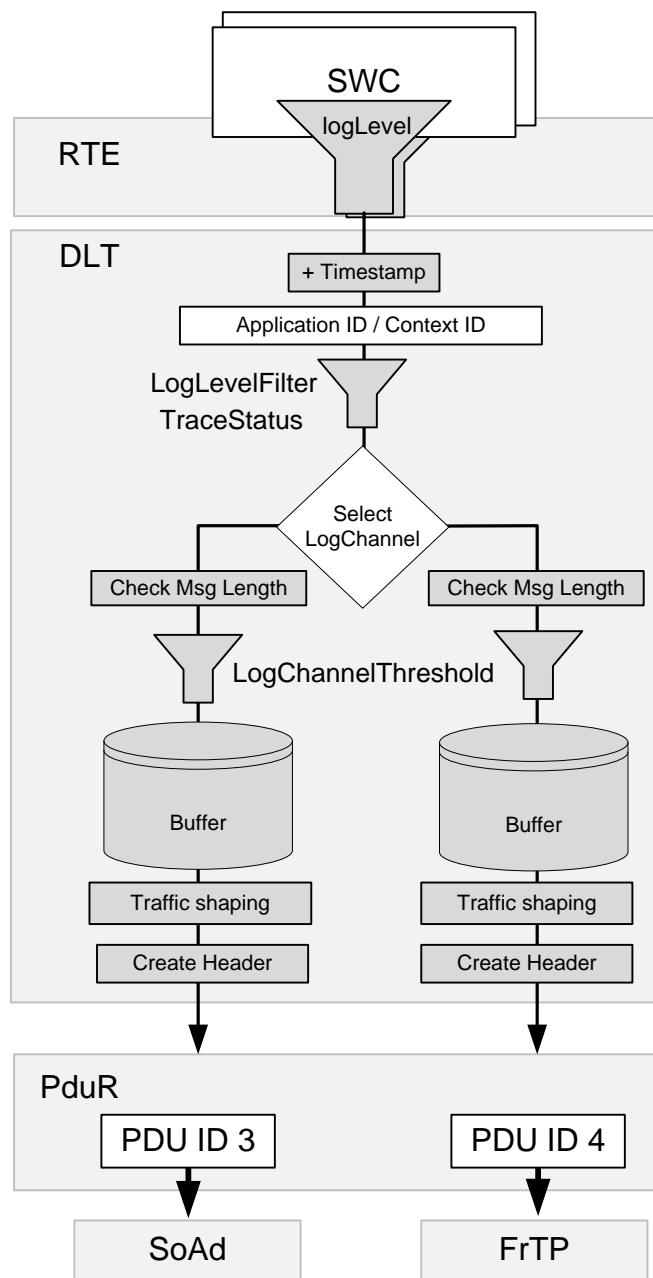


Figure 3 – Example Tx Data Path

[SWS_Dlt_00650] [The following steps describe the logical order, in the context of calls to `Dlt_SendLogMessage` or `Dlt_SendTraceMessage`:

1. Generate timestamp (see 7.1.9.1)
2. Filter message (see 7.1.9.2)
3. Select target LogChannel(s) (see 7.1.9.3)
4. Check Message length (see 7.1.9.4)
5. Apply the current LogChannel threshold (see 7.1.9.5)
6. Copy Dlt message to LogChannel specific buffer (see 7.1.9.6)

] ()

Note:

Because of optimizations in an implementation, the order might be changed. For instance, a typical optimization could be, that the Dlt header, which is created by Dlt module for each Dlt message, is NOT saved to the LogChannel specific buffer per Dlt message, but is created on-the-fly directly before sending the message to PduR.

[SWS_Dlt_00651] [The following steps have to be taken deferred/decoupled from the context of calls to `Dlt_SendLogMessage` or `Dlt_SendTraceMessage`:

7. Send Dlt message to PduR according to TrafficShaping settings. (see 7.1.9.7)
8. Create Dlt Header according to header settings (see 7.1.9.8)
9. Remove the Dlt message from the LogChannel specific buffer (see 7.1.9.9)

] ()

7.1.9.1 Generating the timestamp

Depending of the current configuration, a timestamp may be added to the Dlt message.

[SWS_Dlt_00652] [Only if the parameter `DltHeaderUseTimestamp` is set to TRUE, the Dlt module shall fetch a timestamp.] ()

[SWS_Dlt_00653] [If the parameter `DltHeaderUseTimestamp` is set to TRUE, but the Dlt module cannot fetch a timestamp for any reason, the timestamp shall be set to 0x00000000.] ()

[SWS_Dlt_00654] [If the parameter `DltHeaderUseTimestamp` is set to TRUE and `DltGeneralGptChannelRef` is configured, the Dlt module shall call the API `Gpt_GetTimeElapsed()` with the configured channel reference (see `DltGeneralGptChannelRef`) to fetch the elapsed time.] ()

[SWS_Dlt_00655] [If the parameter `DltHeaderUseTimestamp` is set to TRUE and `DltGeneralStbMTimeBaseRef` is configured, the Dlt module shall call the API `StbM_GetCurrentTime()` with the configured time base reference (see `DltGeneralStbMTimeBaseRef`) to fetch the current synchronized time and calculate the elapsed time.] ()

7.1.9.2 Message filtering

Message filtering means to accept or discard an incoming log or trace message based on the ApplicationId/ContextId tuple, which is assigned to that message.

Filtering differs slightly between Log Messages (`Dlt_SendLogMessage`) and trace messages (`Dlt_SendTraceMessage`).

[SWS_Dlt_00656] [For Dlt Log Messages, the highest LogLevel Threshold shall be defined as “Verbose”.] ()

[SWS_Dlt_00657] [For Dlt Log Messages, the lowest LogLevel Threshold shall be defined as “Filter off”.] ()

Note:

The `Dlt_MessageLogLevelType` defines all possible Log Message filter levels .

[SWS_Dlt_00658] [For Log Message filtering the Dlt internally manages LogLevel threshold to ApplicationId/ContextId tuple mappings (see configuration parameter `DltLogLevelThreshold`).] ()

[SWS_Dlt_00659] [For trace message filtering the Dlt internally manages trace activation state to ApplicationId/ContextId tuple mappings (see configuration parameter `DltTraceStatusAssignment`).] ()

Note:

The matching algorithm for finding the proper mapping element (containing a threshold log level value in the Log Message case respectively containing a trace activation state in the trace message case) is identical for Log Messages and trace messages.

[SWS_Dlt_00661] [The Dlt module shall find a matching mapping element (log level threshold respectively trace activation state) for the ApplicationId/ContextId tuple contained in a `Dlt_SendLogMessage` or `Dlt_SendTraceMessage` call. To do so, the following steps shall be performed:

1. Check whether a mapping element exists, where ApplicationId/ContextId tuple of mapping element equals to the ApplicationId/ContextId tuple of the log/trace message. If such a mapping element exists, the matching mapping element is found.
2. In case no match has been found in step 1, check whether a mapping element exists, where the ApplicationID equals the ApplicationID of the log/trace message and the ContextId of mapping element equals wildcard (value 0x00000000). If such a mapping element exists, the matching mapping element is found.

3. In case no match has been found in step 1 and 2, the matching mapping element is the current DefaultLogLevelThreshold respectively the current DefaultTraceStatus.

] ()

[SWS_Dlt_00662] [In the Dlt_SendLogMessage case, the found mapping element is a log level threshold. If the log level value of the Log Message is numerically higher than this log level threshold, the Log Message is not further processed and E_OK is returned.] ()

[SWS_Dlt_00663] [In the Dlt_SendTraceMessage case, the found mapping element is a trace activation state. If the value of the trace activation state is FALSE, the message is not further processed and E_OK is returned.] ()

7.1.9.3 Select target LogChannel

In this step, the Dlt module identifies on which LogChannel(s) the log or trace message will be transmitted.

[SWS_Dlt_00664] [For LogChannel selection the Dlt module manages LogChannel to ApplicationId/ContextId tuple mappings. (see configuration parameter DltLogChannelAssignmentSwcContextRef).] ()

Note:

There can be several LogChannels configured for a given ApplicationId/ContextId tuple contained in a Dlt_SendLogMessage or Dlt_SendTraceMessage call.

[SWS_Dlt_00665] [To find the matching LogChannels for the ApplicationId/ContextId tuple contained in a Dlt_SendLogMessage or Dlt_SendTraceMessage call, the Dlt module shall do the following steps:

1. From all mapping elements, where ApplicationId/ContextId tuple of mapping element equals to the ApplicationId/ContextId tuple of the log/trace message, the LogChannel shall be added to the list of output LogChannels.
2. From all mapping elements, where ApplicationID of mapping element equals to the ApplicationID of the log/trace message AND the ContextId of mapping element equals wildcard (value 0x00000000), the LogChannel shall be added to the list of output LogChannels.
3. If the list of output LogChannels is still empty after step 1 and 2. The default LogChannel (see configuration parameter DltDefaultLogChannelRef) shall be added to the list of output LogChannels.

] ()

7.1.9.4 Check message length

[SWS_Dlt_00666] [If the Dlt message length including the required Dlt headers exceeds the configured value given by `DltLogChannelMaxMessageLength` for all assigned LogChannels, discard this Dlt message and return `DLT_E_MSG_TOO_LARGE`.] ()

Note:

If the message is short enough for at least one assigned LogChannel, continue to process this message for all LogChannels where the message is short enough.

7.1.9.5 Apply LogChannel LogLevelThreshold

In this step, the Dlt module decides, individually for each identified log and trace channel, whether the current log or trace message may pass or not.

[SWS_Dlt_00667] [Log messages with a log level numerically higher than the configured value of LogChannel threshold for the identified LogChannel shall be discarded and `E_OK` shall be returned. This shall be done on each LogChannel from the list of output LogChannels for the Log Message, considering [SWS_Dlt_00665].] ()

[SWS_Dlt_00668] [Trace messages shall be filtered out, when the config parameter `DltTraceStatus` is FALSE for the identified LogChannel. That means they do not proceed to the next processing step and `E_OK` is returned.] ()

7.1.9.6 Copying Dlt message to the LogChannel buffer

In this step the Dlt module copies the Dlt message to all buffers of the LogChannels, which the Dlt message is assigned to.

[SWS_Dlt_00669] [The Dlt module shall copy the log/trace message which has passed the message filters to all assigned target LogChannel buffers where the Dlt message length is not larger than `DltLogChannelMaxMessageLength` of the respective LogChannel.] ()

[SWS_Dlt_00670] [If there was not enough space to copy the complete message to any of the assigned LogChannel's buffer, `DLT_E_NO_BUFFER` shall be returned and the Dlt log and trace message shall be discarded.

In addition, check each assigned buffer whether it was already full before, i.e., check Dlt internal flags to store a buffer overflow event:

- If the buffer overflow flag is currently not set for this buffer:
 - Set the buffer overflow flag to indicate the occurrence of a buffer overflow
 - The Dlt log and trace message shall be discarded
- If the buffer overflow flag for this buffer was already set for this buffer:
 - The Dlt log and trace message shall be discarded

- Send Dlt Control Message(s) “BufferOverflowNotification” according to the configuration. Please refer to chapter 7.1.11.1.

] ()

Note:

The cyclicly called `Dlt_TxFunction` checks the status of the buffer overflow flag and the debounce time for sending buffer overflow notifications. This function also sets back the flag cyclically according to a buffer overflow notification.

[SWS_Dlt_00671] [If a new message has been copied successfully to the assigned LogChannel's buffer, the message counter shall be increased by 1. This message counter value shall be stored for the Dlt message.] ()

Note:

When the Dlt message is going to be transmitted, this message counter value will be written into the Message Counter Field (MCNT).

[SWS_Dlt_00672] [If a new message has been copied successfully to at least one LogChannel buffer, `DLT_OK` shall be returned.] ()

7.1.9.7 Sending messages from LogChannel Buffer

[SWS_Dlt_00780] [The sending of Dlt messages via the PduR API shall be decoupled from the `Dlt_SendLogMessage` and `Dlt_SendTraceMessage` API call.] ()

Note:

The decoupling is done because of the following reasons:

1. Shortening runtime of calls from the SW-Cs/BSWs which trigger log/trace messages, to reduce blocking time.
2. In case traffic shaping functionality is enabled, the transmissions have to be processed by an asynchronous cyclic BSW entity anyway.
3. In case retry feature is enabled a decoupled BSW entity, which cares for retries, is needed anyway.

[SWS_Dlt_00673] [The Dlt module shall transmit Dlt messages collected in the LogChannel specific buffer from the context of the `Dlt_TxFunction` function.] ()

[SWS_Dlt_00674] [The Dlt Message Header shall be assembled before `PduR_DltTransmit` is called.] ()

Note:

For details regarding the assembling of the Dlt Message Header, please refer to the next section.

[SWS_Dlt_00675] [The Dlt module shall use the `PduR_DltTransmit` function to send the Dlt message with the configured TxPdulId.] ()

[SWS_Dlt_00677] [The Dlt module shall monitor a transmit counter for each Dlt message in a LogChannel specific buffer. Each time it calls `PduR_DltTransmit` for a Dlt message in the buffer, it shall increment the transmit counter.] ()

7.1.9.8 Create Dlt message header

Assembling the Dlt Header

[SWS_Dlt_00678] [The UEH bit shall be set to ‘1’ if the parameters `DltUseExtHeaderInNonVerbMode` is set to TRUE. Otherwise, the UEH bit shall be set to ‘0’.] ()

[SWS_Dlt_00679] [The MSBF bit shall be set to ‘1’ if the current platform is BIGENDIAN.] ()

[SWS_Dlt_00680] [The MSBF bit shall be set to ‘0’ if the current platform is LITTLEENDIAN.] ()

[SWS_Dlt_00681] [The WEID bit shall be set to ‘1’ if the parameter `DltHeaderUseEcuid` is set to TRUE. Else, the WEID bit shall be set to ‘0’.] ()

[SWS_Dlt_00682] [The WSID bit shall be set to ‘1’ if the parameter `DltHeaderUseSessionID` is set to TRUE. Else, the WSID bit shall be set to ‘0’.] ()

[SWS_Dlt_00683] [The WTMS bit shall be set to ‘1’ if the parameter `DltHeaderUseTimestamp` is set to TRUE. Else, the WTMS bit shall be set to ‘0’.] ()

[SWS_Dlt_00684] [The VERS bits shall always be set to “001”.] ()

[SWS_Dlt_00685] [The MCNT field shall be set to the stored value of this Dlt message when it is copied to the LogChannel’s buffer.] ()

[SWS_Dlt_00686] [The optional ECU field shall only exist if `DltHeaderUseEcuid` is set to TRUE.] ()

[SWS_Dlt_00687] [The optional ECU field shall be set to the value configured in `DltEcuidValue`. If the configured ECU ID is shorter than 4 byte, the remaining bytes shall be set to 0x00.] ()

[SWS_Dlt_00688] [The optional SEID field shall be set to the value configured via `DltSwcSessionId` and shall only exist if `DltHeaderUseSessionID` is set to TRUE.] ()

[SWS_Dlt_00689] [The optional TMSP field shall contain the derived timestamp if `DltHeaderUseTimestamp` is set to TRUE.] ()

[SWS_Dlt_00690] [The LEN field shall be set to the overall length of the finally assembled Dlt Data Message, which shall be the sum of the length of the Header, the length of the optional Extended Header, and the length of the Payload.]()

Assembling the Dlt Extended Header

[SWS_Dlt_00691] [If the parameter `DltUseExtHeaderInNonVerbMode` is set to TRUE, the Dlt Extended Header has to be generated for Dlt Data Messages:]()

[SWS_Dlt_00692] [The VERB bit shall be set to '1' if the parameter `DltUseVerboseMode` is set to TRUE. Else, the VERB bit shall be set to '0'.]()

[SWS_Dlt_00693] [The MSTP field shall be set to 0x0 if the Dlt message has to be assembled due to the API call `Dlt_SendLogMessage`.]()

[SWS_Dlt_00694] [The MSTP field shall be set to 0x1 if the Dlt message has to be assembled due to the API call `Dlt_SendTraceMessage`.]()

[SWS_Dlt_00695] [The MTIN field shall be set accordingly to the `Dlt_MessageLogInfoTyp` value, which has been passed by the API `Dlt_SendLogMessage`.]()

[SWS_Dlt_00696] [The MTIN field shall be set accordingly to the `Dlt_MessageTraceInfoType` value, which has been passed by the API `Dlt_SendTraceMessage`.]()

7.1.9.9 Removing messages from LogChannel buffer

[SWS_Dlt_00697] [A Dlt message, for which `PduR_DltTransmit` has been called, shall be removed from the LogChannel specific buffer in the following cases:

- `PduR_DltTransmit` has returned with `E_NOT_OK`,
- A positive TX confirmation for this TxPduld has been received, or
- A negative TX confirmation for this TxPduld has been received and the transmit counter of the Dlt message is greater than the configured `DltLogChannelMaxNumOfRetries`.

]()

7.1.10 Receiving of Dlt commands

The Dlt module can receive Dlt commands via the Rx Data Path and/or via dedicated API calls (see chapter 8). These Dlt commands can be used to control the Dlt module.

[SWS_Dlt_00698] [The Dlt module shall ignore all received Dlt control messages via the Rx Data Path in case the parameter `DltGeneralRxDataPathSupport` is set to FALSE.]()

Note:

In case the Rx Data Path is disabled, the Dlt client can be controlled via the optional control APIs defined in chapter 8.

[SWS_Dlt_00699] [If `DltGeneralRxDataPathSupport` is set to TRUE, the Dlt module shall process received Dlt control messages.] ()

[SWS_Dlt_00700] [If a received Dlt command has been executed successfully, "OK" shall be returned.] ()

7.1.10.1 SetLogLevel

[SWS_Dlt_00701] [If the Dlt command "SetLogLevel" is requested, the new LogLevel shall be stored for the received tuple of `ApplicationId/ContextId`.] ()

[SWS_Dlt_00702] [If the Dlt command "SetLogLevel" is requested, but the received tuple of `ApplicationId/ContextId` is unknown, the Dlt command shall be answered with "ERROR".] ()

7.1.10.2 SetTraceStatus

[SWS_Dlt_00703] [If the Dlt command "SetTraceStatus" is requested, the new trace status shall be stored for the received tuple of `ApplicationId/ContextId`.] ()

[SWS_Dlt_00704] [If the Dlt command "SetTraceStatus" is requested, but the addressed tuple of `ApplicationId/ContextId` is unknown, the Dlt command shall be answered with "ERROR".] ()

7.1.10.3 GetLogInfo

[SWS_Dlt_00705] [If the Dlt command "GetLogInfo" is requested, the requested LogInfo shall be returned.] ()

[SWS_Dlt_00706] [If the Dlt command "GetLogInfo" is requested, but the addressed tuple of `ApplicationId/ContextId` is unknown, the Dlt command shall be answered with "ERROR".] ()

7.1.10.4 GetDefaultLogLevel

[SWS_Dlt_00708] [If the Dlt command "GetDefaultLogLevel" is requested, the current value of the parameter `DltDefaultLogLevel` shall be returned.] ()

7.1.10.5 StoreConfiguration

[SWS_Dlt_00709] [If the Dlt command “StoreConfiguration” is requested and the configuration parameter `DltGeneralNvRAMSupport` is set to TRUE, the following steps shall be performed:

- Call `NvM_WriteBlock` to store the current configuration of the `LogChannelAssignment`, `LogChannelThreshold`, and the `LogLevelFilter`.
 - If `NvM_WriteBlock` returned with `E_OK`, the Dlt command “StoreConfiguration” shall return with “OK”.
 - If `NvM_WriteBlock` returned with something else than `E_OK`, the Dlt command “StoreConfiguration” shall return with “ERROR”.

] ()

[SWS_Dlt_00710] [If the Dlt command “StoreConfiguration” is requested and the configuration parameter `DltGeneralNvRAMSupport` is set to FALSE, the Dlt command “StoreConfiguration” shall return “NOT_SUPPORTED”.] ()

7.1.10.6 RestoreToFactoryDefault

[SWS_Dlt_00711] [If the Dlt command “RestoreToFactoryDefault” is requested and if the parameter `DltGeneralNvRAMSupport` is set to FALSE, reset the following runtime parameters to the values stored in the Dlt module’s static configuration:

- `DltDefaultLogLevel`
- `DltThreshold`
- `DltDefaultTraceStatus`
- `DltLogChannelThreshold`
- `DltDefaultLogChannelRef`

] ()

[SWS_Dlt_00712] [If the Dlt command “RestoreToFactoryDefault” is requested and if the parameter `DltGeneralNvRAMSupport` is set to TRUE, delete the stored configuration of the NvM by calling `NvM_EraseNvBlock` and reset the following runtime parameters to the values stored in the Dlt module’s static configuration:

- `DltDefaultLogLevel`
- `DltThreshold`
- `DltDefaultTraceStatus`
- `DltLogChannelThreshold`
- `DltDefaultLogChannelRef`

] ()

[SWS_Dlt_00713] [If the Dlt command “RestoreToFactoryDefault” is requested and if the parameter `DltGeneralNvRAMSupport` is set to FALSE, “OK” shall be returned if the Dlt module reset the current configuration values to the default configuration successfully.] ()

[SWS_Dlt_00714] [If the Dlt command “RestoreToFactoryDefault” is requested and the parameter `DltGeneralNvRAMSupport` is set to TRUE, response with “ERROR”]

- if the Dlt module could not reset the current configuration to the static default configuration or
- if the stored configuration of the NvM could not be deleted.] ()

7.1.10.7 SetMessageFiltering

[SWS_Dlt_00775] [If the Dlt command “SetMessageFiltering” is requested, all the Dlt filters shall be enabled/disabled as requested, and the Dlt command shall be answered with “OK”.] ()

7.1.10.8 SetDefaultLogLevel

[SWS_Dlt_00715] [If the Dlt command “SetDefaultLogLevel” is requested, the parameter `DltDefaultLogLevel` shall be updated to the received new `LogLevel`.] ()

7.1.10.9 SetDefaultTraceStatus

[SWS_Dlt_00716] [If the Dlt command “SetDefaultTraceStatus” is requested, the parameter `DltDefaultTraceStatus` shall be updated to the received new `TraceStatus`.] ()

7.1.10.10 GetDefaultTraceStatus

[SWS_Dlt_00717] [If the Dlt command “GetDefaultTraceStatus” is requested, the current value of the parameter `DltDefaultTraceStatus` shall be returned.] ()

7.1.10.11 GetLogChannelNames

[SWS_Dlt_00718] [If the Dlt command “GetLogChannelNames” is requested, the number of configured LogChannels and requested number of LogChannel names given by the parameter `DltLogChannelName` shall be returned.] ()

7.1.10.12 GetTraceStatus

[SWS_Dlt_00719] [If the Dlt Command “GetTraceStatus” is requested, the `TraceStatus` shall be returned for the received tuple of `ApplicationId/ContextId`.] ()

7.1.10.13 SetLogChannelAssignment

[SWS_Dlt_00720] [If the Dlt command “SetLogChannelAssignment” is requested with parameter `addRemoveOp` set to `DLT_ASSIGN_ADD`, add the tuple of `ApplicationId/ContextId` to the LogChannel with the name provided by the

parameter `logChannelName`. The Dlt command shall return “OK” even if the tuple was already assigned to the requested LogChannel before. J ()

[SWS_Dlt_00721] [If the Dlt command “SetLogChannelAssignment” is requested with parameter `addRemoveOp` set to `DLT_ASSIGN_REMOVE`, remove the tuple of `ApplicationId/ContextId` from the LogChannel with the name provided by the parameter `logChannelName`. The Dlt command shall return “OK” even if the tuple was not assigned to the requested LogChannel before. J ()

Note:

If a tuple of `ApplicationId/ContextId` is not assigned explicitly to any specific LogChannel (any more), the mandatory default LogChannel (see `DltDefaultLogChannelRef`) will be used for transmission.

[SWS_Dlt_00722] [If the Dlt command “SetLogChannelAssignment” is requested with an unknown tuple of `ApplicationId/ContextId` or an unknown LogChannel name, the Dlt command shall return “ERROR”. J ()

7.1.10.14 SetLogChannelThreshold

[SWS_Dlt_00723] [If the Dlt command “SetLogChannelThreshold” is requested, the `LogChannelThreshold` of the addressed LogChannel shall be set to the value received by the parameter `newThreshold`. J ()

[SWS_Dlt_00724] [If the Dlt command “SetLogChannelThreshold” is requested and the `logChannelName` and/or the `newThreshold` is unknown, the Dlt command shall return “ERROR”. J ()

7.1.10.15 GetLogChannelThreshold

[SWS_Dlt_00725] [If the Dlt command “GetLogChannelThreshold” is requested, the `LogChannelThreshold` of the addressed LogChannel shall be returned. J ()

[SWS_Dlt_00726] [If the Dlt command “GetLogChannelThreshold” is requested and the `logChannelName` or the `newThreshold` is unknown, the Dlt command shall return “ERROR”. J ()

7.1.11 Sending of Dlt commands

Typically, the Dlt module receives Dlt commands generated by a Dlt logging tool, which are answered by the Dlt module. Only two Dlt commands are triggered for sending by the Dlt module itself:

- `GetLogInfo` (only in case one or more SW-Cs register/unregister themselves)
- `BufferOverflowNotification` (in case of a buffer overflow)

7.1.11.1 BufferOverflowNotification

The buffer overflow notification is used to inform the Dlt Logging tool about the loss of Dlt messages. The amount of BufferOverflowNotifications on the bus can be limited/debounced by configuration. This notification contains a counter which indicates the amount of lost Dlt messages since the last BufferOverflowNotification.

[SWS_Dlt_00776] [If the Dlt module detects a buffer overflow, it shall send a Dlt command “BufferOverflowNotification” cyclically (see DltLogChannelBufferOverflowTimer) as long as the buffer is still full.] ()

[SWS_Dlt_00777] [The parameter overflowCounter of the Dlt control message “BufferOverflowNotification” shall be set to the number of lost Dlt messages since the last transmission of the “BufferOverflowNotification”.] ()

7.2 Error classification

7.2.1 Development errors

[SWS_Dlt_00727] [

Type of error	Related error code	Error value
API service called with wrong parameter	DLT_E_PARAM	0x01
Null pointer has been passed as an argument	DLT_E_PARAM_POINTER	0x02
Initialization failed	DLT_E_INIT_FAILED	0x03
Registration failed	DLT_E_REGISTRATION	0x04

]()

7.2.2 Runtime errors

[SWS_Dlt_00728] [

Type of error	Related error code	Error value
Message could not be sent	DLT_E_SKIPPED_TRANSMISSION	0x05
A deprecated parameter with a value different to 0 for a Dlt command has been received	DLT_E_DEPRECATED_PARAMETER	0x06
Multiple Control Requests at the same time	DLT_E_MULTIPLE_REQUESTS	0x07

]()

7.2.3 Transient faults

There are no transient faults.

7.2.4 Production errors

There are no production errors.

7.2.5 Extended production errors

There are no extended production errors.

8 API specification

8.1 Imported types

In this section all types imported from the following modules are listed:

The following types are imported from the specified modules:

[SWS_DLt_00781][

<i>Module</i>	<i>Header File</i>	<i>Imported Type</i>
ComStack_Types	ComStack_Types.h	BufReq_ReturnType
	ComStack_Types.h	PduldType
	ComStack_Types.h	PduInfoType
	ComStack_Types.h	PduLengthType
	ComStack_Types.h	RetryInfoType
	ComStack_Types.h	TpDataStateType
Gpt	Gpt.h	Gpt_ChannelType
	Gpt.h	Gpt_ValueType
NvM	Rte_NvM_Type.h	NvM_BlockIdType
StbM	Rte_StbM_Type.h	StbM_SynchronizedTimeBaseType
	Rte_StbM_Type.h	StbM_TimeBaseStatusType
	Rte_StbM_Type.h	StbM_TimeStampExtendedType
	Rte_StbM_Type.h	StbM_TimeStampType
	Rte_StbM_Type.h	StbM_UserDataType
Std	Std_Types.h	Std_ReturnType
	Std_Types.h	Std_VersionInfoType

]()

8.2 Type definitions

8.2.1 DLt_ConfigType

[SWS_DLt_00437][

Name	Dlt_ConfigType				
Kind	Structure				
Elements	implementation specific				
	Type	--			
	Comment	The content of the initialization data structure is implementation specific			
Description	This is the type of the data structure containing the initialization data for Dlt.				
Available via	Dlt.h				

] (SRS_BSW_00414)

8.2.2 Dlt_MessageType

[SWS_Dlt_00224] [

Name	Dlt_MessageType		
Kind	Enumeration		
Range	DLT_TYPE_LOG	0x00	A log message
	DLT_TYPE_APP_TRACE	0x01	A trace message
	DLT_TYPE_NW_TRACE	0x02	A message forwarded from a communication bus (like CAN, FlexRay)
	DLT_TYPE_CONTROL	0x03	A message for internal use/control sent between Dlt module and external client.
Description	This type describes the type of the message.		
Available via	Dlt.h		

]()

8.2.3 Dlt_MessageIDType

[SWS_Dlt_00228] [

Name	Dlt_MessageIDType		
Kind	Array	Element type	uint8
Size	4 Elements		
Description	Contains the unique MessageID for a message. This is only relevant in non-verbose mode.		
Available via	Dlt.h		

]()

8.2.4 Dlt_MessageNetworkTraceInfoType

[SWS_Dlt_00233][

Name	Dlt_MessageNetworkTraceInfoType		
Kind	Enumeration		
Range	DLT_NW_TRACE_IPC	0x01	Inter process communication
	DLT_NW_TRACE_CAN	0x02	CAN communication
	DLT_NW_TRACE_FLEXRAY	0x03	Flexray communication
	DLT_NW_TRACE_MOST	0x04	MOST communication
	DLT_NW_TRACE_ETHERNET	0x05	Ethernet communication
	DLT_NW_TRACE_SOMEIP	0x06	SOME/IP communication
Description	This type describes transported type of a Dlt BUSMESSAGE.		
Available via	Dlt.h		

]()

8.3 Function definitions

This is a list of functions provided for upper layer modules.

8.3.1 Dlt_Init

[SWS_Dlt_00239][

Service Name	Dlt_Init	
Syntax	<pre>void Dlt_Init (const Dlt_ConfigType* config)</pre>	
Service ID [hex]	0x01	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	config	Pointer to a DLT configuration structure

Parameters (inout)	None
Parameters (out)	None
Return value	None
Description	Dlt is using the NVRamManager and is to be initialized very late in the ECU startup phase. The Dlt_Init() function should be called after the NVRamManager is initialized.
Available via	Dlt.h

](SRS_BSW_00344, SRS_BSW_00404, SRS_BSW_00405, SRS_BSW_00101, SRS_BSW_00407, SRS_BSW_00358, SRS_BSW_00414)

[SWS_Dlt_00453] [If the parameter DltGeneralNvRAMSupport is set to TRUE, the Dlt module shall use the API NvM_ReadBlock of the NVRAM module for restoring the values from persistent storage for the variables required by [SWS_Dlt_00239] in the Dlt_Init function.] (RS_LT_00039)

8.3.2 Dlt_GetVersionInfo

[SWS_Dlt_00271] [

Service Name	Dlt_GetVersionInfo	
Syntax	<pre>void Dlt_GetVersionInfo (Std_VersionInfoType* versioninfo)</pre>	
Service ID [hex]	0x02	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	versioninfo	Pointer to where to store the version information of this module.
Return value	None	
Description	Returns the version information of this module.	
Available via	Dlt.h	

](SRS_BSW_00402)

8.3.3 Dlt_SendTraceMessage

[SWS_Dlt_00243][

Service Name	Dlt_SendTraceMessage				
Syntax	<pre>Std_ReturnType Dlt_SendTraceMessage (Dlt_SessionIDType sessionId, const Dlt_MessageTraceInfoType* traceInfo, const uint8* traceData, uint16 traceDataLength)</pre>				
Service ID [hex]	0x04				
Sync/Async	Synchronous				
Reentrancy	Reentrant				
Parameters (in)	sessionId	Number of the module (Module ID within BSW, Port defined argument value within SW-C)			
	traceInfo	Structure containing the relevant information for filtering the message.			
	traceData	Buffer containing the parameters to be traced. The contents of this pointer represents the payload of the Trace Message to be sent.			
	traceData Length	Length of the data buffer traceData			
Parameters (inout)	None				
Parameters (out)	None				
Return value	Std_ReturnType	E_OK: The required operation succeeded. DLT_E_MSG_TOO_LARGE: The message is too large for all assigned LogChannels. DLT_E_NO_BUFFER: Not enough buffer available, the Dlt message cannot be buffered for at least one LogChannel. DLT_E_UNKNOWN_SESSION_ID: The provided session id is unknown.			
Description	The service represents the interface to be used by basic software modules or by software components to trace parameters.				
Available via	Dlt.h				

] (RS_LT_00003)]

8.3.4 Dlt_SendLogMessage

[SWS_Dlt_00241][

Service Name	Dlt_SendLogMessage
---------------------	--------------------

Syntax	<pre>Std_ReturnType Dlt_SendLogMessage (Dlt_SessionIDType sessionId, const Dlt_MessageLogInfoType* logInfo, const uint8* logData, uint16 logDataLength)</pre>				
Service ID [hex]	0x03				
Sync/Async	Synchronous				
Reentrancy	Reentrant				
Parameters (in)	sessionId	For SW-C this is not visible (Port defined argument value), for BSW-modules it is the module number			
	logInfo	Structure containing the relevant information for filtering the message.			
	logData	Buffer containing the parameters to be logged. The contents of this pointer represents the payload of the Log Message to be sent.			
	logData Length	Length of the data buffer logData.			
Parameters (inout)	None				
Parameters (out)	None				
Return value	Std_ReturnType	DLT_OK: The required operation succeeded. DLT_E_MSG_TOO_LARGE: The message is too large for all assigned LogChannels DLT_E_NO_BUFFER: The LogMessage could not be buffered at any assigned LogChannel DLT_E_UNKNOWN_SESSION_ID: The provided session id is unknown.			
Description	The service represents the interface to be used by basic software modules or by software component to send Log Messages.				
Available via	Dlt.h				

J(RS_LT_00003)

8.3.5 Dlt_RegisterContext

[SWS_Dlt_00245][

Service Name	Dlt_RegisterContext
Syntax	<pre>Std_ReturnType Dlt_RegisterContext (Dlt_SessionIDType sessionId, Dlt_ApplicationIDType appId, Dlt_ContextIDType contextId,</pre>

	<pre>const uint8* appDescription, uint8 lenAppDescription, const uint8* contextDescription, uint8 lenContextDescription)</pre>	
Service ID [hex]	0x05	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	sessionId	number of the module (Module ID within BSW, Port defined argument value within SW-C)
	applId	the ApplicationId
	contextId	the ContextId
	appDescription	Points to description string for the provided ApplicationId. At maximum 255 characters are interpreted.
	lenAppDescription	The length of the description for the ApplicationId string (number of characters of description string).
	contextDescription	Points to description string for the provided context. At maximum 255 characters are interpreted.
	lenContext Description	The length of the description string (number of characters of description string).
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: The required operation succeeded. DLT_E_CONTEXT_ALREADY_REG: The software module context has already registered. DLT_E_UNKNOWN_SESSION_ID: The provided session id is unknown.
Description	The service has to be called when a software module wants to use services offered by DLT software component for a specific context. If a ContextId is being registered for an already registered ApplicationId then appDescription can be NULL and len_appDescription zero.	
Available via	Dlt.h	

J(RS_LT_00033)

8.3.6 Dlt_UnregisterContext

[SWS_Dlt_00769][

Service Name	Dlt_UnregisterContext	
Syntax	<pre>Std_ReturnType Dlt_UnregisterContext (Dlt_SessionIDType sessionId, Dlt_ApplicationIDType appId, Dlt_ContextIDType contextId)</pre>	
Service ID [hex]	0x16	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	sessionId	number of the module (Module ID within BSW, Port defined argument value within SW-C)
	appId	the ApplicationId
	contextId	the ContextId
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: The required operation succeeded. DLT_E_CONTEXT_NOT_YET_REG: The software module context has not registered before. DLT_E_UNKNOWN_SESSION_ID: The provided session id is unknown.
Description	The service has to be called when a software module is going to be stopped.	
Available via	Dlt.h	

J(RS_LT_00033)

8.3.7 Dlt_DetForwardErrorTrace

[SWS_Dlt_00432][

Service Name	Dlt_DetForwardErrorTrace
Syntax	<pre>void Dlt_DetForwardErrorTrace (uint16 moduleId, uint8 instanceId, uint8 apiId, uint8 errorId)</pre>
Service ID [hex]	0x07
Sync/Async	Synchronous

Reentrancy	Non Reentrant	
Parameters (in)	module Id	Module ID of calling module.
	instance Id	The identifier of the index based instance of a module, starting from 0. If the module is a single instance module it shall pass 0 as the instanceId.
	apId	ID of API service in which error is detected (defined in SWS of calling module)
	errorId	ID of detected development error (defined in SWS of calling module).
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	Service to forward error reports from Det to Dlt.	
Available via	Dlt_Det.h	

J(RS_LT_00006)

8.3.8 Dlt_SetLogLevel

[SWS_Dlt_00252][

Service Name	Dlt_SetLogLevel	
Syntax	<pre>Std_ReturnType Dlt_SetLogLevel (Dlt_ApplicationIDType appId, Dlt_ContextIDType contextId, Dlt_MessageLogLevelType newLogLevel)</pre>	
Service ID [hex]	0x08	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	appId	ID of the SW-C
	contextId	ID of the context
	newLogLevel	new log level to set
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: LogLevel could not be changed

Description	This service is used to change the LogLevel for the given tuple of ApplicationID/ ContextID.
Available via	Dlt.h

J(RS_LT_00004, RS_LT_00038)

8.3.9 Dlt_SetTraceStatus

[SWS_Dlt_00254][

Service Name	Dlt_SetTraceStatus	
Syntax	<pre>Std_ReturnType Dlt_SetTraceStatus (Dlt_ApplicationIDType appId, Dlt_ContextIDType contextId, boolean newTraceStatus)</pre>	
Service ID [hex]	0x09	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	appId	ID of the SW-C
	contextId	ID of the context
	newTraceStatus	New trace status
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: Trace status could not be changed
Description	The service Dlt_SetTraceStatus sets the trace status for a specific tuple of ApplicationID and ContextID.	
Available via	Dlt.h	

J(RS_LT_00004, RS_LT_00038)

8.3.10 Dlt_GetLogInfo

[SWS_Dlt_00732]

Service Name	Dlt_GetLogInfo				
Syntax	<pre>Std_ReturnType Dlt_GetLogInfo (uint8 options, Dlt_ApplicationIDType appId, Dlt_ContextIDType contextId, uint8* status, Dlt_LogInfoType* logInfo)</pre>				
Service ID [hex]	0x0a				
Sync/Async	Synchronous				
Reentrancy	Non Reentrant				
Parameters (in)	options	Used to filter the response in respect to the ApplicationId, Context Id and Trace Status information			
	appId	Representation of the ApplicationId			
	contextId	Representation of the ContextId			
Parameters (inout)	None				
Parameters (out)	status	--			
	logInfo	Details about the returned Application IDs			
Return value	Std_Return-Type	E_OK: No error occurred E_NOT_OK: LogInfo could not be returned			
Description	Called to request information about registered ApplicationIds, their ContextIds and the corresponding log level.				
Available via	Dlt.h				

]()

8.3.11 Dlt_GetDefaultLogLevel

[SWS_Dlt_00733]

Service Name	Dlt_GetDefaultLogLevel		
Syntax	<pre>Std_ReturnType Dlt_GetDefaultLogLevel (Dlt_MessageLogLevelType* defaultLogLevel)</pre>		
Service ID [hex]	0x18		
Sync/Async	Synchronous		
Reentrancy	Non Reentrant		

Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	defaultLogLevel	Returns the stored LogLevel setting
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: The default LogLevel could not be returned
Description	Returns the Default Log Level currently used by the Dlt module. The returned Log Level might differ from the one which is stored non volatile.	
Available via	Dlt.h	

]()

[SWS_Dlt_00734] [A call to `Dlt_GetDefaultLogLevel` shall return with `E_NOT_OK` if the Dlt module cannot return the current value of the parameter `DltDefaultLogLevel`.] ()

[SWS_Dlt_00735] [A call to `Dlt_GetDefaultLogLevel` shall return with `E_NOT_OK` if the Dlt module cannot return the current value of the parameter `DltDefaultLogLevel`.] ()

8.3.12 Dlt_StoreConfiguration

[SWS_Dlt_00736] [

Service Name	Dlt_StoreConfiguration	
Syntax	<pre>Std_ReturnType Dlt_StoreConfiguration (void)</pre>	
Service ID [hex]	0x1a	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: The configuration could not be stored DLT_E_NOT_SUPPORTED: Service is not supported

Description	Copies the current Dlt configuration to NvRAM by calling NvM_WriteBlock().
Available via	Dlt.h

]()

[SWS_Dlt_00737] [If the parameter `DltGeneralNvRAMSupport` is set to FALSE, a call to `Dlt_StoreConfiguration` shall return with `DLT_NOT_SUPPORTED`.] ()

[SWS_Dlt_00729] [If the parameter `DltGeneralNvRAMSupport` is set to TRUE, a call to `Dlt_StoreConfiguration` shall return with `DLT_E_ERROR` in case the call to `NvM_WriteBlock` returned with `E_NOT_OK`.] ()

[SWS_Dlt_00738] [If the parameter `DltGeneralNvRAMSupport` is set to TRUE, a call to `Dlt_StoreConfiguration` shall return with `DLT_OK` in case the call to `NvM_WriteBlock` returned with `E_OK`.] ()

8.3.13 Dlt_ResetToFactoryDefault

[SWS_Dlt_00739] [

Service Name	Dlt_ResetToFactoryDefault	
Syntax	<pre>Std_ReturnType Dlt_ResetToFactoryDefault (void)</pre>	
Service ID [hex]	0x06	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Configuration has been reset successfully E_NOT_OK: Configuration has not been reset
Description	The service <code>Dlt_ResetToFactoryDefault</code> sets the <code>LogLevel</code> and <code>TraceStatus</code> back to the persistently stored default values. If the feature NvMRAM support is enabled, all stored Dlt values in the NvM are deleted.	
Available via	Dlt.h	

]()

8.3.14 Dlt_SetMessageFiltering

[SWS_Dlt_00770][

Service Name	Dlt_SetMessageFiltering				
Syntax	Std_ReturnType Dlt_SetMessageFiltering (boolean status)				
Service ID [hex]	0x1b				
Sync/Async	Synchronous				
Reentrancy	Non Reentrant				
Parameters (in)	status	TRUE: enable message filtering FALSE: disable message filtering			
Parameters (inout)	None				
Parameters (out)	None				
Return value	Std_Return-Type	E_OK: No error occurred E_NOT_OK: Setting of message filtering failed			
Description	Switches on/off the message filtering functionality of the Dlt module.				
Available via	Dlt.h				

]()

8.3.15 Dlt_SetDefaultLogLevel

[SWS_Dlt_00740][

Service Name	Dlt_SetDefaultLogLevel		
Syntax	Std_ReturnType Dlt_SetDefaultLogLevel (Dlt_MessageLogLevelType newLogLevel)		
Service ID [hex]	0x11		

Sync/Async	Synchronous				
Reentrancy	Reentrant				
Parameters (in)	newLogLevel	sets the new filter value			
Parameters (inout)	None				
Parameters (out)	None				
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: Default LogLevel could not be set			
Description	Called to modify the pass through range for Log Messages for all not explicit set ContextIds.				
Available via	Dlt.h				

]()

[SWS_Dlt_00741] [If a call to Dlt_SetDefaultLogLevel successfully set the addressed LogChannel to the requested LogLevel, it shall return with E_OK.] ()

[SWS_Dlt_00742] [If a call to Dlt_SetDefaultLogLevel could not set the addressed LogChannel to the requested LogLevel, it shall return with E_NOT_OK.] ()

8.3.16 Dlt_SetDefaultTraceStatus

[SWS_Dlt_00743] [

Service Name	Dlt_SetDefaultTraceStatus				
Syntax	<pre>Std_ReturnType Dlt_SetDefaultTraceStatus (boolean newTraceStatus, Dlt_LogChannelNameType logChannelName)</pre>				
Service ID [hex]	0x12				
Sync/Async	Synchronous				
Reentrancy	Reentrant				
Parameters (in)	newTraceStatus	enabling/disabling of Trace messages			
	logChannelName	Name of the addressed LogChannel			
Parameters (inout)	None				
Parameters (out)	None				
Return value	Std_ReturnType	E_OK: No error occurred			

	E_NOT_OK: Default Trace Status could not be set
Description	Called to enable or disable trace messages for all not explicitly set ContextIds.
Available via	Dlt.h

]()

[SWS_Dlt_00744] If a call to Dlt_SetDefaultTraceStatus successfully set the addressed LogChannel to the requested new TraceStatus, it shall return with E_OK.
]()

[SWS_Dlt_00745] If a call to Dlt_SetDefaultTraceStatus could not set the addressed LogChannel to the requested TraceStatus, it shall return with E_NOT_OK.
]()

8.3.17 Dlt_GetDefaultTraceStatus

[SWS_Dlt_00746]

Service Name	Dlt_GetDefaultTraceStatus	
Syntax	<pre>Std_ReturnType Dlt_GetDefaultTraceStatus (Dlt_LogChannelNameType logChannelName, boolean* traceStatus)</pre>	
Service ID [hex]	0x19	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	logChannelName	Name of the addressed LogChannel
Parameters (inout)	None	
Parameters (out)	traceStatus	current trace status (enabled/disabled)
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: Default Trace Status could not be returned
Description	Returns the current Trace Status of the addressed LogChannel.	
Available via	Dlt.h	

]()

[SWS_Dlt_00747] If a call to Dlt_GetDefaultTraceStatus returned the current Trace Status of the requested LogChannel, it shall return with E_OK.]()

[SWS_Dlt_00748] [If a call to Dlt_GetDefaultTraceStatus could not return the addressed TraceStatus of the addressed LogChannel, it shall return with E_NOT_OK.] ()

8.3.18 Dlt_GetLogChannelNames

[SWS_Dlt_00749] [

Service Name	Dlt_GetLogChannelNames	
Syntax	<pre>Std_ReturnType Dlt_GetLogChannelNames (uint8* numberofLogChannels, Dlt_LogChannelNameType* logChannelNames)</pre>	
Service ID [hex]	0x17	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	None	
Parameters (inout)	numberofLog Channels	Contains the number of requested LogChannels names. On Return it holds the number of configured LogChannels
Parameters (out)	logChannelNames	Returns a list of configured LogChannel names
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: LogChannelNames could not be returned
Description	The caller provides the number of logChannelNames to be returned. The function returns the requested amount of LogChannelNames and updates numberofLog Channels as the outgoing information on how many LogChannels are actually configured.	
Available via	Dlt.h	

]()

8.3.19 Dlt_GetTraceStatus

[SWS_Dlt_00750] [

Service Name	Dlt_GetTraceStatus
Syntax	Std_ReturnType Dlt_GetTraceStatus (

	Dlt_ApplicationIDType appId, Dlt_ContextIDType contextId, boolean* traceStatus)	
Service ID [hex]	0x1f	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	appId	ApplicationId
	contextId	ContextId
Parameters (inout)	None	
Parameters (out)	traceStatus	current Trace Status of the tuple ApplicationId/ContextId
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: TraceStatus could not be returned
Description	Returns the current Trace Status for a given tuple ApplicationId/ContextId.	
Available via	Dlt.h	

]()

8.3.20 Dlt_SetLogChannelAssignment

[SWS_Dlt_00751][

Service Name	Dlt_SetLogChannelAssignment	
Syntax	Std_ReturnType Dlt_SetLogChannelAssignment (Dlt_ApplicationIDType appId, Dlt_ContextIDType contextId, Dlt_LogChannelNameType logChannelName, Dlt_AssignmentOperation addRemoveOp)	
Service ID [hex]	0x20	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	appId	ID of the addressed application / SW-C
	contextId	ID of the addressed context
	logChannelName	Name of the addressed LogChannel

	addRemove Op	Operation to add/remove the addressed tuple ApplicationId/ContextId to/from the addressed LogChannel					
Parameters (inout)	None						
Parameters (out)	None						
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: LogChannel assignment failed					
Description	Adds/removes the addressed tuple ApplicationId/ContextId to/from the addressed LogChannel.						
Available via	Dlt.h						

]()

8.3.21 Dlt_SetLogChannelThreshold

[SWS_Dlt_00752][

Service Name	Dlt_SetLogChannelThreshold				
Syntax	Std_ReturnType Dlt_SetLogChannelThreshold (Dlt_LogChannelNameType logChannelName, Dlt_MessageLogLevelType newThreshold, boolean newTraceStatus)				
Service ID [hex]	0x21				
Sync/Async	Synchronous				
Reentrancy	Reentrant for different LogChannelNames				
Parameters (in)	logChannelName	Name of the addressed LogChannel			
	newThreshold	Threshold for LogMessages			
	newTraceStatus	TRUE: enable TraceMessages FALSE: disable Trace Messages			
Parameters (inout)	None				
Parameters (out)	None				
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: Setting of LogChannelThreshold failed			
Description	Sets the filter threshold for the given LogChannel.				
Available via	Dlt.h				

]()

8.3.22 Dlt_GetLogChannelThreshold

[SWS_Dlt_00753][

Service Name	Dlt_GetLogChannelThreshold	
Syntax	<pre>Std_ReturnType Dlt_GetLogChannelThreshold (Dlt_LogChannelNameType logChannelName, Dlt_MessageLogLevelType* logChannelThreshold, boolean* traceStatus)</pre>	
Service ID [hex]	0x22	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different LogChannelNames	
Parameters (in)	logChannelName	Addressed LogChannel name
Parameters (inout)	None	
Parameters (out)	logChannelThreshold	Current LogChannelThreshold
	traceStatus	Current TraceStatus. TRUE: TraceMessages enabled. FALSE: TraceMessages disabled.
Return value	Std_ReturnType	E_OK: No error occurred E_NOT_OK: LogChannelThreshold could not be returned
Description	Returns the filter threshold for the given LogChannel.	
Available via	Dlt.h	

]()

8.3.23 Dlt.InjectCall_<SESSION>

[SWS_Dlt_00259][

Service Name	Dlt.InjectCall_<SESSION>
Syntax	<pre>void Dlt.InjectCall_<SESSION> (Dlt_ApplicationIDType appId,</pre>

	<pre>Dlt_ContextIDType contextId, uint32 serviceId, uint32 dataLength, const uint8* data)</pre>	
Service ID [hex]	0x14	
Sync/Async	Asynchronous	
Reentrancy	Non Reentrant	
Parameters (in)	appId	the Application ID
	contextId	the Context ID
	serviceId	the service ID for the injection (user defined)
	dataLength	length of the data puffer provided
	data	pointer to data puffer with data belonging to the injection (service ID). The contents of the data is user defined
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	Callback is called by Dlt to inject a function call in the SW-C. The behaviour triggered by this function should depend on the service_id also the interpretation of the user data. Both are specific to the application.	
Available via	Dlt.h	

]()

8.4 Call-back notifications

This is a list of functions provided for other modules. The function prototypes of the callback functions shall be provided in the file Dlt_Cbk.h .

8.4.1 Dlt_RxIndication

[SWS_Dlt_00272][

Service Name	Dlt_RxIndication
Syntax	<pre>void Dlt_RxIndication (PduIdType RxPduId,</pre>

	const PduInfoType* PduInfoPtr)	
Service ID [hex]	0x42	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different Pdulds. Non reentrant for the same Pduld.	
Parameters (in)	RxPdu Id	ID of the received PDU.
	Pdu InfoPtr	Contains the length (SduLength) of the received PDU, a pointer to a buffer (SduDataPtr) containing the PDU, and the MetaData related to this PDU.
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	Indication of a received PDU from a lower layer communication interface module.	
Available via	Dlt.h	

]()

8.4.2 Dlt_TriggerTransmit

[SWS_Dlt_00754]]

Service Name	Dlt_TriggerTransmit	
Syntax	Std_ReturnType Dlt_TriggerTransmit (PduIdType TxPduId, PduInfoType* PduInfoPtr)	
Service ID [hex]	0x41	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different Pdulds. Non reentrant for the same Pduld.	
Parameters (in)	TxPduld	ID of the SDU that is requested to be transmitted.
Parameters	PduInfoPtr	Contains a pointer to a buffer (SduDataPtr) to where the SDU data shall

(inout)		be copied, and the available buffer size in SduLengh. On return, the service will indicate the length of the copied SDU data in SduLength.
Parameters (out)		None
Return value	Std_ReturnType	E_OK: SDU has been copied and SduLength indicates the number of copied bytes. E_NOT_OK: No SDU data has been copied. PduInfoPtr must not be used since it may contain a NULL pointer or point to invalid data.
Description		Within this API, the upper layer module (called module) shall check whether the available data fits into the buffer size reported by PduInfoPtr->SduLength. If it fits, it shall copy its data into the buffer provided by PduInfoPtr->SduDataPtr and update the length of the actual copied data in PduInfoPtr->SduLength. If not, it returns E_NOT_OK without changing PduInfoPtr.
Available via		Dlt.h

]()

[SWS_Dlt_00755] [If development error detection is enabled for this module, the module shall check all parameters for being valid. If the check fails, the function shall raise a development error and return.] ()

8.4.3 Dlt_TxConfirmation

[SWS_Dlt_00273] [

Service Name	Dlt_TxConfirmation	
Syntax	<pre>void Dlt_TxConfirmation (PduIdType TxPduId, Std_ReturnType result)</pre>	
Service ID [hex]	0x40	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different Pdulds. Non reentrant for the same Pduld.	
Parameters (in)	TxPduld	ID of the PDU that has been transmitted.
	result	E_OK: The PDU was transmitted. E_NOT_OK: Transmission of the PDU failed.
Parameters (inout)	None	
Parameters (out)	None	

Return value	None
Description	The lower layer communication interface module confirms the transmission of a PDU, or the failure to transmit a PDU.
Available via	Dlt.h

]()

8.4.4 Dlt_TpTxConfirmation

[SWS_Dlt_00756][

Service Name	Dlt_TpTxConfirmation	
Syntax	<pre>void Dlt_TpTxConfirmation (PduIdType id, Std_ReturnType result)</pre>	
Service ID [hex]	0x48	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	id	Identification of the transmitted I-PDU.
	result	Result of the transmission of the I-PDU.
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	This function is called after the I-PDU has been transmitted on its network, the result indicates whether the transmission was successful or not.	
Available via	Dlt.h	

]()

8.4.5 Dlt_CopyTxData

[SWS_Dlt_00516][

Service Name	Dlt_CopyTxData
Syntax	BufReq_ReturnType Dlt_CopyTxData (

	<pre>PduIdType id, const PduInfoType* info, const RetryInfoType* retry, PduLengthType* availableDataPtr)</pre>	
Service ID [hex]	0x43	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	id	Identification of the transmitted I-PDU.
	info	Provides the destination buffer (SduDataPtr) and the number of bytes to be copied (SduLength). If not enough transmit data is available, no data is copied by the upper layer module and BUFREQ_E_BUSY is returned. The lower layer module may retry the call. An SduLength of 0 can be used to indicate state changes in the retry parameter or to query the current amount of available data in the upper layer module. In this case, the SduDataPtr may be a NULL_PTR.
	retry	This parameter is used to acknowledge transmitted data or to retransmit data after transmission problems. If the retry parameter is a NULL_PTR, it indicates that the transmit data can be removed from the buffer immediately after it has been copied. Otherwise, the retry parameter must point to a valid RetryInfoType element. If TpDataState indicates TP_CONFPENDING, the previously copied data must remain in the TP buffer to be available for error recovery. TP_DATACONF indicates that all data that has been copied before this call is confirmed and can be removed from the TP buffer. Data copied by this API call is excluded and will be confirmed later. TP_DATARETRY indicates that this API call shall copy previously copied data in order to recover from an error. In this case TxTpDataCnt specifies the offset in bytes from the current data copy position.
Parameters (inout)	None	
Parameters (out)	available DataPtr	Indicates the remaining number of bytes that are available in the upper layer module's Tx buffer. availableDataPtr can be used by TP modules that support dynamic payload lengths (e.g. FrlsoTp) to determine the size of the following CFs.
Return value	BufReq_-Return-Type	BUFREQ_OK: Data has been copied to the transmit buffer completely as requested. BUFREQ_E_BUSY: Request could not be fulfilled, because the required amount of Tx data is not available. The lower layer module may retry this call later on. No data has been copied. BUFREQ_E_NOT_OK: Data has not been copied. Request failed.
Description	This function is called to acquire the transmit data of an I-PDU segment (N-PDU). Each call to this function provides the next part of the I-PDU data unless retry->TpDataState is TP_DATARETRY. In this case the function restarts to copy the data beginning at the offset from the current position indicated by retry->TxTpDataCnt. The size of the remaining data is written to the position indicated by availableDataPtr.	
Available	Dlt.h	

<i>via</i>	
------------	--

J(RS_LT_00034)

8.4.6 Dlt_StartOfReception

[SWS_Dlt_91006][

Service Name	Dlt_StartOfReception	
Syntax	<pre>BufReq_ReturnType Dlt_StartOfReception (PduIdType id, const PduInfoType* info, PduLengthType TpSduLength, PduLengthType* bufferSizePtr)</pre>	
Service ID [hex]	0x46	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	id	Identification of the I-PDU.
	info	Pointer to a PduInfoType structure containing the payload data (without protocol information) and payload length of the first frame or single frame of a transport protocol I-PDU reception, and the MetaData related to this PDU. If neither first/single frame data nor MetaData are available, this parameter is set to NULL_PTR.
	TpSdu Length	Total length of the N-SDU to be received.
Parameters (inout)	None	
Parameters (out)	bufferSizePtr	Available receive buffer in the receiving module. This parameter will be used to compute the Block Size (BS) in the transport protocol module.
Return value	BufReq_Return-Type	<p>BUFREQ_OK: Connection has been accepted. bufferSizePtr indicates the available receive buffer; reception is continued. If no buffer of the requested size is available, a receive buffer size of 0 shall be indicated by bufferSizePtr.</p> <p>BUFREQ_E_NOT_OK: Connection has been rejected; reception is aborted. bufferSizePtr remains unchanged.</p> <p>BUFREQ_E_OVFL: No buffer of the required length can be provided; reception is aborted. bufferSizePtr remains unchanged.</p>
Description	<p>This function is called at the start of receiving an N-SDU. The N-SDU might be fragmented into multiple N-PDUs (FF with one or more following CFs) or might consist of a single N-PDU (SF). The service shall provide the currently available maximum buffer size when invoked with TpSduLength equal to 0.</p>	

Available via	Dlt.h
----------------------	-------

]()

8.4.7 Dlt_TpRxIndication

[SWS_Dlt_91007][

Service Name	Dlt_TpRxIndication	
Syntax	<pre>void Dlt_TpRxIndication (PduIdType id, Std_ReturnType result)</pre>	
Service ID [hex]	0x45	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	id	Identification of the received I-PDU.
	result	Result of the reception.
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	Called after an I-PDU has been received via the TP API, the result indicates whether the transmission was successful or not.	
Available via	Dlt.h	

]()

8.4.8 Dlt_CopyRxData

[SWS_Dlt_91008][

Service Name	Dlt_CopyRxData
Syntax	<pre>BufReq_ReturnType Dlt_CopyRxData (PduIdType id, const PduInfoType* info, PduLengthType* bufferSizePtr)</pre>

Service ID [hex]	0x44	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	id	Identification of the received I-PDU.
	info	Provides the source buffer (SduDataPtr) and the number of bytes to be copied (SduLength). An SduLength of 0 can be used to query the current amount of available buffer in the upper layer module. In this case, the SduDataPtr may be a NULL_PTR.
Parameters (inout)	None	
Parameters (out)	bufferSizePtr	Available receive buffer after data has been copied.
Return value	BufReq_-Return-Type	BUFREQ_OK: Data copied successfully BUFREQ_E_NOT_OK: Data was not copied because an error occurred.
Description	This function is called to provide the received data of an I-PDU segment (N-PDU) to the upper layer. Each call to this function provides the next part of the I-PDU data. The size of the remaining buffer is written to the position indicated by bufferSizePtr.	
Available via	Dlt.h	

]()

8.5 Scheduled functions

8.5.1 Dlt_TxFunction

[SWS_Dlt_91005] [

Service Name	Dlt_TxFunction
Syntax	<pre>void Dlt_TxFunction (void)</pre>
Service ID [hex]	0x80
Description	--
Available via	SchM_Dlt.h

]()

[SWS_Dlt_00758] [If the configuration parameter

DltGeneralTrafficShapingSupport is set to TRUE, the Dlt messages shall be transmitted with the maximum bandwidth per LogChannel as configured using the parameter DltLogChannelTrafficShapingBandwidth.]()

[SWS_Dlt_00759] [If the configuration parameter

DltGeneralTrafficShapingSupport is set to FALSE, all buffered Dlt messages shall be transmitted at once.]()

[SWS_Dlt_00760] [The Dlt_TxFunction shall check the status of the flag, which indicates that a BufferOverflow occurred:

- If a buffer overflow occurred, the Dlt command “BufferOverflowNotification” shall be sent only once, until the overflow flag is cleared again.
- After a time interval given by the parameter DltLogChannelBufferOverflowTimer, the buffer overflow flag shall be cleared.

This shall be done for every configured LogChannel separately.]()

[SWS_Dlt_00761] [If a Dlt message could not be sent, every time the

Dlt_TxFunction is called, it shall retry to send this message one time. This shall be done for every message separately and taking care to not exceed the amount of retries given by DltLogChannelMaxNumOfRetries.]()

8.6 Expected interfaces

In this section all external interfaces required from other modules are listed.

8.6.1 Mandatory interfaces

This section defines all external interfaces which are required to fulfill the core functionality of the module.

The module relies on the following interfaces:

[SWS_Dlt_00762]

<i>API Function</i>	<i>Header File</i>	<i>Description</i>
PduR_DltTransmit	PduR_Dlt.h	Requests transmission of a PDU.

]()

8.6.2 Optional interfaces

This section defines all external interfaces which are required to fulfill an optional functionality of the module.

The module relies on the following optional interfaces:

[SWS_Dlt_00763]

<i>API Function</i>	<i>Header File</i>	<i>Description</i>
Det_ReportError	Det.h	Service to report development errors.
Gpt_Enable-Notification	Gpt.h	Enables the interrupt notification for a channel (relevant in normal mode).
Gpt_StartTimer	Gpt.h	Starts a timer channel.
NvM_EraseNv-Block	NvM.h	Service to erase a NV block.
NvM_ReadBlock	NvM.h	Service to copy the data of the NV block to its corresponding RAM block.
NvM_WriteBlock	NvM.h	Service to copy the data of the RAM block to its corresponding NV block.
StbM_Get-CurrentTime	StbM.h	Returns a time value (Local Time Base derived from Global Time Base) in standard format. Note: This API shall be called with locked interrupts / within an Exclusive Area to prevent interruption (i.e., the risk that the time stamp is outdated on return of the function call).
StbM_Get-CurrentTime-Extended	StbM.h	Returns a time value (Local Time Base derived from Global Time Base) in extended format. Note: This API shall be called with locked interrupts / within an Exclusive Area to prevent interruption (i.e., the risk that the time stamp is outdated on return of the function call).

]()

8.7 Client-Server-Interfaces

8.7.1 DltControlService

[SWS_Dlt_00772][

Name	DltControlService		
Comment	--		
IsService	true		
Variation	--		
Possible Errors	0	E_OK	Operation successful
	7	DLT_E_NOT_SUPPORTED	Service is not supported
	9	DLT_E_ERROR	--

Operation	GetDefaultLogLevel		
Comment	--		
Variation	--		
Parameters	defaultLoglevel		
	Type	Dlt_MessageLogLevelType	
	Direction	OUT	
	Comment	--	
	Variation	--	
Possible Errors	E_OK DLT_E_ERROR		

Operation	GetDefaultTraceStatus		
Comment	--		
Variation	--		
Parameters	logChannelName		
	Type	Dlt_LogChannelNameType	
	Direction	IN	

	Comment	--
	Variation	--
traceStatus		
	Type	boolean
	Direction	OUT
	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_ERROR	

	Operation	GetLogChannelNames
	Comment	--
	Variation	--
Parameters	numberOfLogChannels	
	Type	uint8
	Direction	INOUT
	Comment	--
	Variation	--
logChannelNames		
	Type	Dlt_LogChannelNameType*
	Direction	OUT
	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_ERROR	

	Operation	GetLogChannelThreshold
	Comment	--
	Variation	--
Parameters	logChannelName	
	Type	Dlt_LogChannelNameType
	Direction	IN
	Comment	--

	Variation	--
logChannelThreshold		
	Type	Dlt_MessageLogLevelType
	Direction	OUT
	Comment	--
	Variation	--
traceStatusPtr		
	Type	boolean
	Direction	OUT
	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_ERROR	

	Operation	GetLogInfo
	Comment	--
	Variation	--
Parameters		options
		Type
		uint8
		Direction
		IN
		Comment
		--
		Variation
		--
		applId
		Type
		Dlt_ApplicationIDType
		Direction
		IN
		Comment
		--
		Variation
		--
		contextId
		Type

	status
	Type uint8
	Direction OUT
	Comment --
	Variation --
	logInfo
	Type Dlt_LogInfoType
	Direction OUT
	Comment --
	Variation --
Possible Errors	E_OK DLT_E_ERROR

Operation	GetTraceStatus
Comment	--
Variation	--
Parameters	applId
	Type Dlt_ApplicationIDType
	Direction IN
	Comment --
	Variation --
	contextId
	Type Dlt_ContextIDType
	Direction IN
	Comment --
	Variation --
traceStatus	traceStatus
	Type boolean
	Direction OUT
	Comment --
	Variation --
Possible Errors	E_OK

	DLT_E_ERROR
--	-------------

Operation	ResetToFactoryDefault
Comment	--
Variation	--
Possible Errors	E_OK DLT_E_ERROR

Operation	SetDefaultLogLevel	
Comment	--	
Variation	--	
Parameters	newDefaultLogLevel	
	Type	Dlt_MessageLogLevelType
	Direction	IN
	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_ERROR	

Operation	SetDefaultTraceStatus	
Comment	--	
Variation	--	
Parameters	newTraceStatus	
	Type	boolean
	Direction	IN
	Comment	--
	Variation	--
logChannel	logChannel	
	Type	uint8
	Direction	IN
	Comment	--
	Variation	--
Possible Errors	E_OK	

	DLT_E_ERROR
Operation	SetLogChannelAssignment
Comment	--
Variation	--
Parameters	appId
	Type Dlt_ApplicationIDType
	Direction IN
	Comment --
	Variation --
	contextId
	Type Dlt_ContextIDType
	Direction IN
	Comment --
	Variation --
logChannelName	
	Type Dlt_LogChannelNameType
	Direction IN
	Comment --
	Variation --
	addRemoveOp
	Type Dlt_AssignmentOperation
	Direction IN
	Comment --
	Variation --
Possible Errors	E_OK DLT_E_ERROR

Operation	SetLogChannelThreshold
Comment	--
Variation	--
Parameters	logChannelName

	Type	Dlt_LogChannelNameType
	Direction	IN
	Comment	--
	Variation	--
newLogLevelThreshold		
	Type	Dlt_MessageLogLevelType
	Direction	IN
	Comment	--
	Variation	--
newTraceStatus		
	Type	boolean
	Direction	IN
	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_ERROR	

	Operation	SetLogLevel
	Comment	--
	Variation	--
		applId
	Type	Dlt_ApplicationIDType
	Direction	IN
	Comment	--
	Variation	--
Parameters		contextId
	Type	Dlt_ContextIDType
	Direction	IN
	Comment	--
	Variation	--
	newLogLevel	
	Type	Dlt_MessageLogLevelType

	Direction	IN
	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_ERROR	

Operation	SetMessageFiltering	
Comment	--	
Variation	--	
	status	
Parameters	Type	boolean
	Direction	IN
	Comment	--
	Variation	--
	E_OK DLT_E_ERROR	

Operation	SetTraceStatus	
Comment	--	
Variation	--	
	applId	
Parameters	Type	Dlt_ApplicationIDType
	Direction	IN
	Comment	--
	Variation	--
	contextId	
	Type	Dlt_ContextIDType
	Direction	IN
	Comment	--
	Variation	--
	newTraceStatus	
	Type	boolean
	Direction	IN

	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_ERROR	

Operation	StoreConfiguration
Comment	--
Variation	--
Possible Errors	E_OK DLT_E_NOT_SUPPORTED DLT_E_ERROR

])

8.7.2 InjectionCallback

[SWS_Dlt_00498][

Name	InjectionCallback		
Comment	--		
IsService	true		
Variation	--		
Possible Errors	0	E_OK	Operation successful
	1	E_NOT_OK	Operation failed

Operation	InjectCall	
Comment	--	
Variation	--	
Parameters	applId	
	Type	Dlt_ApplicationIDType
	Direction	IN
	Comment	--
	Variation	--
	contextId	
	Type	Dlt_ContextIDType
	Direction	IN
	Comment	--
	Variation	--
serviceld	serviceld	
	Type	uint32
	Direction	IN
	Comment	--
	Variation	--
dataLength	dataLength	
	Type	uint32
	Direction	IN

	Comment	--
	Variation	--
	data	
	Type	uint8*
	Direction	IN
	Comment	--
	Variation	--
Possible Errors	E_OK E_NOT_OK	

])()

8.7.3 LogTraceSessionControl

[SWS_Dlt_00496][

Name	LogTraceSessionControl		
Comment	--		
IsService	true		
Variation	--		
Possible Errors	0	E_OK	Operation successful
	1	E_NOT_OK	Operation failed

Operation	LogLevelChangedNotification		
Comment	--		
Variation	--		
Parameters	appId		
	Type	Dlt_ApplicationIDType	
	Direction	IN	
	Comment	--	
	Variation	--	
	contextId		
	Type	Dlt_ContextIDType	
	Direction	IN	
	Comment	--	
	Variation	--	
logLevel			
	Type	Dlt_MessageLogLevelType	
	Direction	IN	
	Comment	--	
	Variation	--	
Possible Errors	E_OK		

Operation	TraceStatusChangedNotification
------------------	--------------------------------

Comment	--
Variation	--
Parameters	applId
	Type Dlt_ApplicationIDType
	Direction IN
	Comment --
	Variation --
	contextId
	Type Dlt_ContextIDType
	Direction IN
	Comment --
	Variation --
newTraceStatus	
Type boolean	
Direction IN	
Comment --	
Variation --	
Possible Errors	E_OK

]()

8.7.4 DltSwcMessageService

[SWS_Dlt_00495][

Name	DltSwcMessageService	
Comment	--	
IsService	true	
Variation	--	
Possible Errors	0	E_OK Operation successful
	2	DLT_E_MSG_TOO_LARGE The message is too big for the internal Dlt buffer.
	3	DLT_E_CONTEXT_ALREADY_REG The software module context has already registered.
	4	DLT_E_UNKNOWN_SESSION_ID The provided session id is unknown.
	5	DLT_E_NO_BUFFER Buffer overflow.
	6	DLT_E_CONTEXT_NOT_YET_REG The software module context has not registered before.
	9	DLT_E_ERROR --

Operation	RegisterContext	
Comment	--	
Variation	--	
Parameters	appId	
	Type	Dlt_ApplicationIDType
	Direction	IN
	Comment	--
	Variation	--
	contextId	
	Type	Dlt_ContextIDType
	Direction	IN
	Comment	--
	Variation	--
	appDescription	

	Type	uint8[]
	Direction	IN
	Comment	--
	Variation	--
lenAppDescription		
	Type	uint8
	Direction	IN
	Comment	--
	Variation	--
contextDescription		
	Type	uint8[]
	Direction	IN
	Comment	--
	Variation	--
lenContextDescription		
	Type	uint8
	Direction	IN
	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_CONTEXT_ALREADY_REG DLT_E_UNKNOWN_SESSION_ID	

Operation	SendLogMessage	
Comment	--	
Variation	--	
Parameters	logInfo	
	Type	Dlt_MessageLogInfoType
	Direction	IN
	Comment	--
	Variation	--
logData		

	Type	uint8[]
	Direction	IN
	Comment	--
	Variation	--
logDataLength		
	Type	uint16
	Direction	IN
	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_MSG_TOO_LARGE DLT_E_UNKNOWN_SESSION_ID DLT_E_NO_BUFFER	

	Operation	SendTraceMessage
	Comment	--
	Variation	--
Parameters	traceInfo	
	Type	Dlt_MessageTraceInfoType
	Direction	IN
	Comment	--
	Variation	--
	traceData	
	Type	uint8[]
	Direction	IN
	Comment	--
	Variation	--
traceDataLength		
	Type	uint16
	Direction	IN
	Comment	--
	Variation	--
Possible Errors	E_OK	

	DLT_E_MSG_TOO_LARGE DLT_E_UNKNOWN_SESSION_ID DLT_E_NO_BUFFER
--	--

Operation	UnregisterContext	
Comment	--	
Variation	--	
Parameters	appId	
	Type	Dlt_ApplicationIDType
	Direction	IN
	Comment	--
	Variation	--
	contextId	
	Type	Dlt_ContextIDType
	Direction	IN
	Comment	--
	Variation	--
Possible Errors	E_OK DLT_E_UNKNOWN_SESSION_ID DLT_E_CONTEXT_NOT_YET_REG	

]()

8.8 Implementation Data Types

8.8.1 Dlt_ApplicationIDType

[SWS_Dlt_00226][

Name	Dlt_ApplicationIDType		
Kind	Array	Element type	uint8
Size	4 Elements		
Description	This type describes the ApplicationId. 0x00000000 means the so-called wildcard.		
Variation	--		
Available via	Rte_Dlt_Type.h		

]()

8.8.2 Dlt_ContextIDType

[SWS_Dlt_00227][

Name	Dlt_ContextIDType		
Kind	Array	Element type	uint8
Size	4 Elements		
Description	This type describes the ContextId. 0x00000000 means the so-called wildcard.		
Variation	--		
Available via	Rte_Dlt_Type.h		

]()

8.8.3 Dlt_SessionIDType

[SWS_Dlt_00225][

Name	Dlt_SessionIDType
Kind	Type
Derived from	uint32
Description	This type identifies the session.
Variation	--

Available via	Rte_Dlt_Type.h
----------------------	----------------

]()

8.8.4 Dlt_LogInfoType

[SWS_Dlt_91002][

Name	Dlt_LogInfoType	
Kind	Structure	
Elements	appIdCount	
	Type	uint16
	Comment	Number of AppIds
	appIdInfo	
	Type	Array of Dlt_ApplicationIdInfoType
	Size	
	Comment	Details of Application
Description	--	
Variation	--	
Available via	Rte_Dlt_Type.h	

]()

8.8.5 Dlt_ContextIdInfoType

[SWS_Dlt_91003][

Name	Dlt_ContextIdInfoType	
Kind	Structure	
Elements	contextId	
	Type	Dlt_ContextIDType
	Comment	the ContextId
	logLevel	
	Type	Dlt_MessageLogLevelType
	Comment	the log message filter level

	traceStatus
Type	uint8
Comment	0: off 1: on
lenContextDescription	
Type	uint16
Comment	Length of Context Description
contextDesc	
Type	Array of uint8
Size	
Comment	Context Description
Description	Context Information
Variation	--
Available via	Rte_Dlt_Type.h

]()

8.8.6 Dlt_ApplicationIdInfoType

[SWS_Dlt_91004][

Name	Dlt_ApplicationIdInfoType
Kind	Structure
Elements	appId
	Type Dlt_ApplicationIDType
	Comment Application ID
	contextIdCount
	Type uint16
	Comment Length of contextInfoList
	contextInfoList
	Type Array of Dlt_ContextIdInfoType
	Size
	Comment List of Context information
appDescLen	

	Type	uint16
	Comment	Length of Application Description
	appDesc	
	Type	Array of uint8
	Size	
	Comment	Application Description
Description	Information about Applications	
Variation	--	
Available via	Rte_Dlt_Type.h	

]()

8.8.7 Dlt_MessageOptionsType

[SWS_Dlt_00229][

Name	Dlt_MessageOptionsType		
Kind	Type		
Derived from	uint8		
Range	verbose_mode	--	Bit 0: If set Verbose mode is used (yet not relevant)
	message_type	--	Bit 1-3 Dlt_MessageTypeType: determines type of msg (log,trace,...)
Description	Bitfield		
Variation	--		
Available via	Rte_Dlt_Type.h		

]()

8.8.8 Dlt_MessageLogInfoType

[SWS_Dlt_00236][

Name	Dlt_MessageLogInfoType	
Kind	Structure	
Elements	argCount	
	Type	Dlt_MessageArgumentCount

	Comment	--
	logLevel	
	Type	Dlt_MessageLogLevelType
	Comment	--
	options	
	Type	Dlt_MessageOptionsType
	Comment	--
	contextId	
	Type	Dlt_ContextIDType
	Comment	--
	appId	
	Type	Dlt_ApplicationIDType
	Comment	--
Description	--	
Variation	--	
Available via	Rte_Dlt_Type.h	

]()

8.8.9 Dlt_MessageLogLevelType

[SWS_Dlt_00230][

Name	Dlt_MessageLogLevelType		
Kind	Enumeration		
Range	DLT_LOG_OFF	0x00	Turn off logging
	DLT_LOG_FATAL	0x01	Fatal system error
	DLT_LOG_ERROR	0x02	Errors occurring in a SW-C with impact to correct functionality
	DLT_LOG_WARN	0x03	Log messages where a incorrect behavior can not be ensured
	DLT_LOG_INFO	0x04	Log messages providing information for better understanding of the internal behavior of a software

	DLT_LOG_DEBUG	0x05	Log messages, which are usable only for debugging of a software
	DLT_LOG_VERBOSE	0x06	Log messages with the highest communicative level, here all possible states, information and everything else can be logged
Description	This type describes the log level for each log message.		
Variation	--		
Available via	Rte_Dlt_Type.h		

]()

8.8.10 Dlt_MessageTraceType

[SWS_Dlt_00231][

Name	Dlt_MessageTraceType		
Kind	Enumeration		
Range	DLT_TRACE_VARIABLE	0x01	For tracing the value of a variable
	DLT_TRACE_FUNCTION_IN	0x02	For tracing the calling of a function
	DLT_TRACE_FUNCTION_OUT	0x03	For tracing the returning of a function
	DLT_TRACE_STATE	0x04	For tracing a state of a state machine
	DLT_TRACE_VFB	0x05	For tracing RTE Events
Description	This type describes labels for trace messages.		
Variation	--		
Available via	Rte_Dlt_Type.h		

]()

8.8.11 Dlt_MessageArgumentCount

[SWS_Dlt_00235][

Name	Dlt_MessageArgumentCount		
Kind	Type		
Derived from	uint16		
Description	This type describes the count of arguments provided to a message.		
Variation	--		
Available via	Rte_Dlt_Type.h		

]()

8.8.12 Dlt_MessageTraceInfoType

[SWS_Dlt_00237][

Name	Dlt_MessageTraceInfoType	
Kind	Structure	
Elements	traceInfo	
	Type	Dlt_MessageTraceType
	Comment	--
	options	
	Type	Dlt_MessageOptionsType
	Comment	--
	context	
	Type	Dlt_ContextIDType
	Comment	--
	appId	
	Type	Dlt_ApplicationIDType
	Comment	--
Description	--	
Variation	--	
Available via	Rte_Dlt_Type.h	

]()

8.8.13 Dlt_LogChannelNameType

[SWS_Dlt_00232][

Name	Dlt_LogChannelNameType		
Kind	Array	Element type	uint8
Size	4 Elements		
Description	This type describes the LogChannel name.		
Variation	--		
Available via	Rte_Dlt_Type.h		

]()

8.8.14 Dlt_AssignmentOperation

[SWS_Dlt_00730][

Name	Dlt_AssignmentOperation		
Kind	Enumeration		
Range	DLT_ASSIGN_ADD	0x01	Adding a LogChannel assignment
	DLT_ASSIGN_REMOVE	0x02	Removing a LogChannel assignment
Description	Adding or removing a LogChannel assignment for the given tuple of ApplicationId/ ContextId.		
Variation	--		
Available via	Rte_Dlt_Type.h		

]()

8.9 Ports

8.9.1 Dlt_ControlService_{SW-C}

[SWS_Dlt_00499][

Name	ControlService_{SW-C}		
Kind	ProvidedPort	Interface	DltControlService
Description	Through this port SW-Cs can control log settings and other configurationitems of DLT.		
Variation	SW-C = {ecuc(Dlt/DltSwc.SHORT-NAME)}		

]()

8.9.2 Dlt_InjectCallback_{SW-C}

[SWS_Dlt_00778][

Name	InjectCallback_{SW-C}		
Kind	RequiredPort	Interface	InjectionCallback
Description	Callback Port to registered Application, which processes Injection.		
Variation	SW-C = {ecuc(Dlt/DltSwc.SHORT-NAME)}		

]()

8.9.3 Dlt_SessionControlCallback_{SW-C}

[SWS_Dlt_00779][

Name	SessionControlCallback_{SW-C}		
Kind	RequiredPort	Interface	LogTraceSessionControl
Description	Port used by Dlt to notify registered SW-C about LogLevel/TraceLevel Changes.		
Variation	SW-C = {ecuc(Dlt/DltSwc.SHORT-NAME)}		

]()

8.9.4 Dlt_SwcMessageService_{SW-C}

[SWS_Dlt_91001][

Name	SwcMessageService_{SW-C}		
Kind	ProvidedPort	Interface	DltSwcMessageService
Description	Through this port SW-Cs can register/unregister their contexts and send out log and trace messages.		
Port Defined Argument Value(s)	Type	Dlt_SessionIDType	
	Value	{ecuc(Dlt/DltSwc/DltSwcSessionId.value)}	
Variation	SW-C = {ecuc(Dlt/DltSwc.SHORT-NAME)}		

]()

9 Sequence diagrams

9.1 Dlt initialization

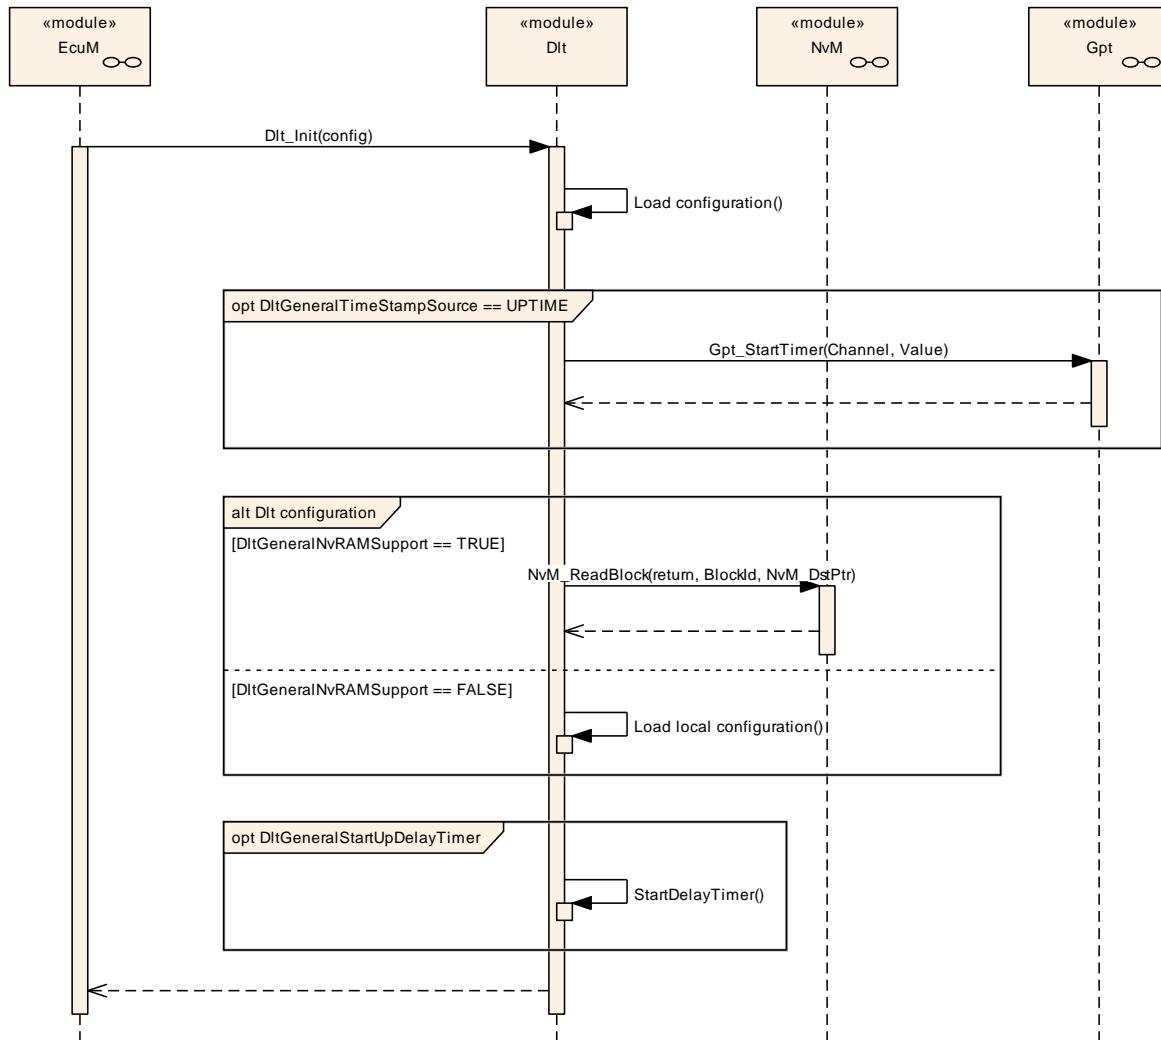
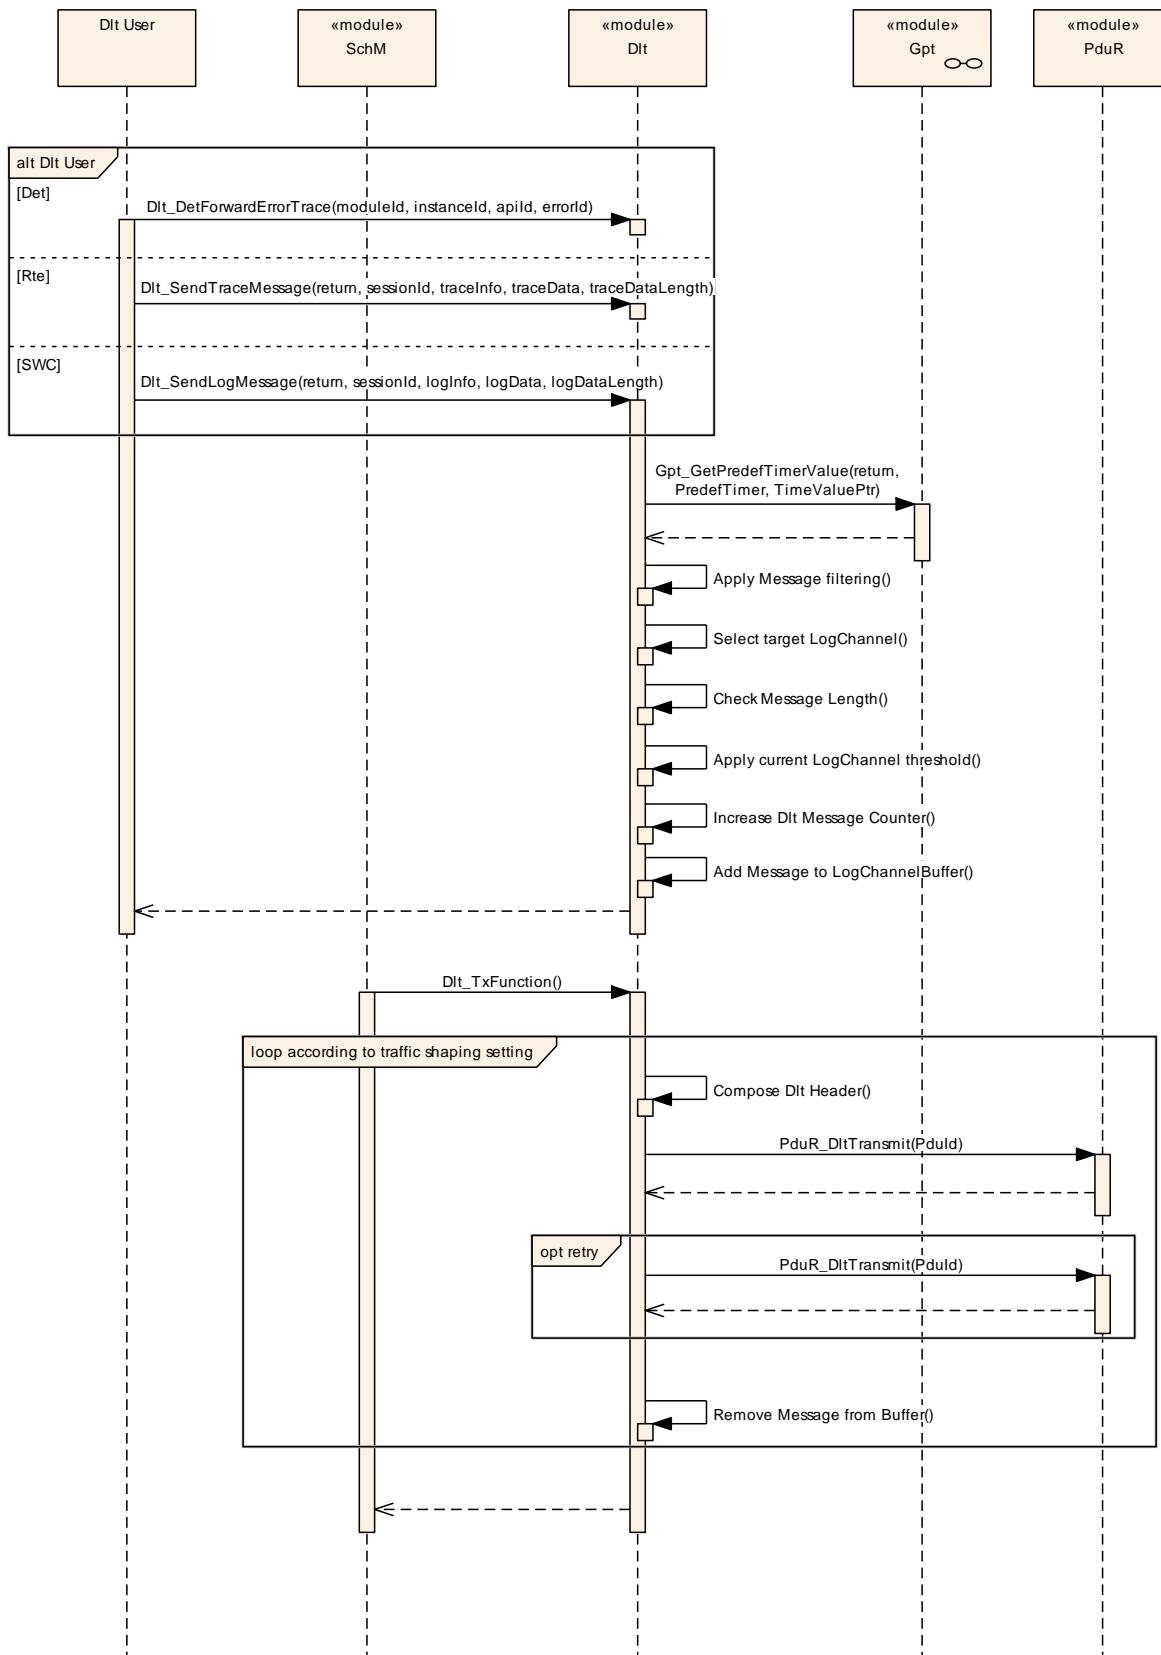


Figure 9-1: Dlt initialization

9.2 Overview of Dlt message transmission on one LogChannel


Figure 9-2: Overview of Dlt message transmission on one LogChannel

9.3 SetLogLevelFilter

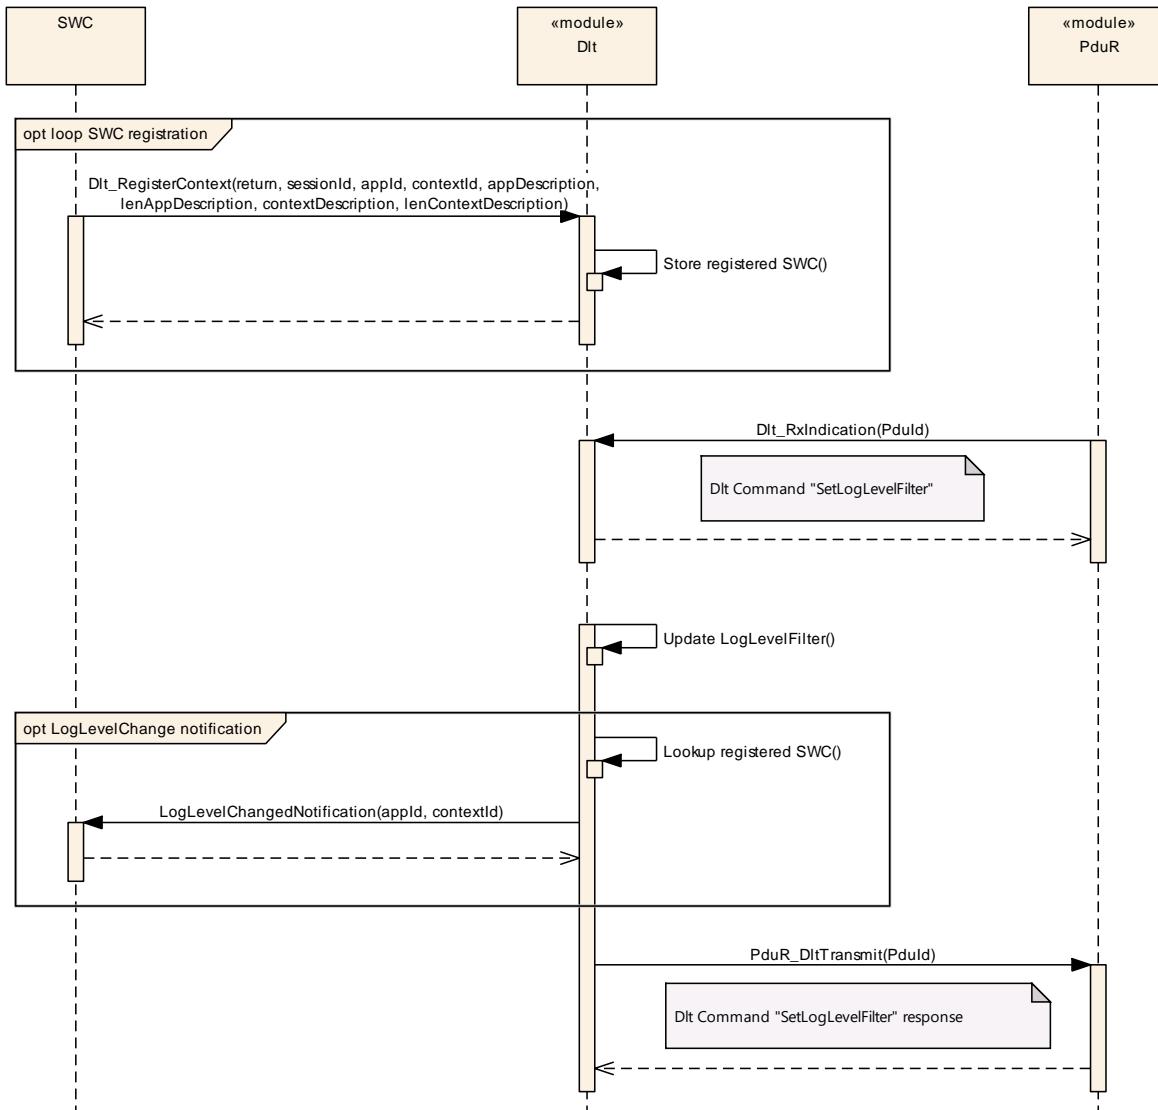
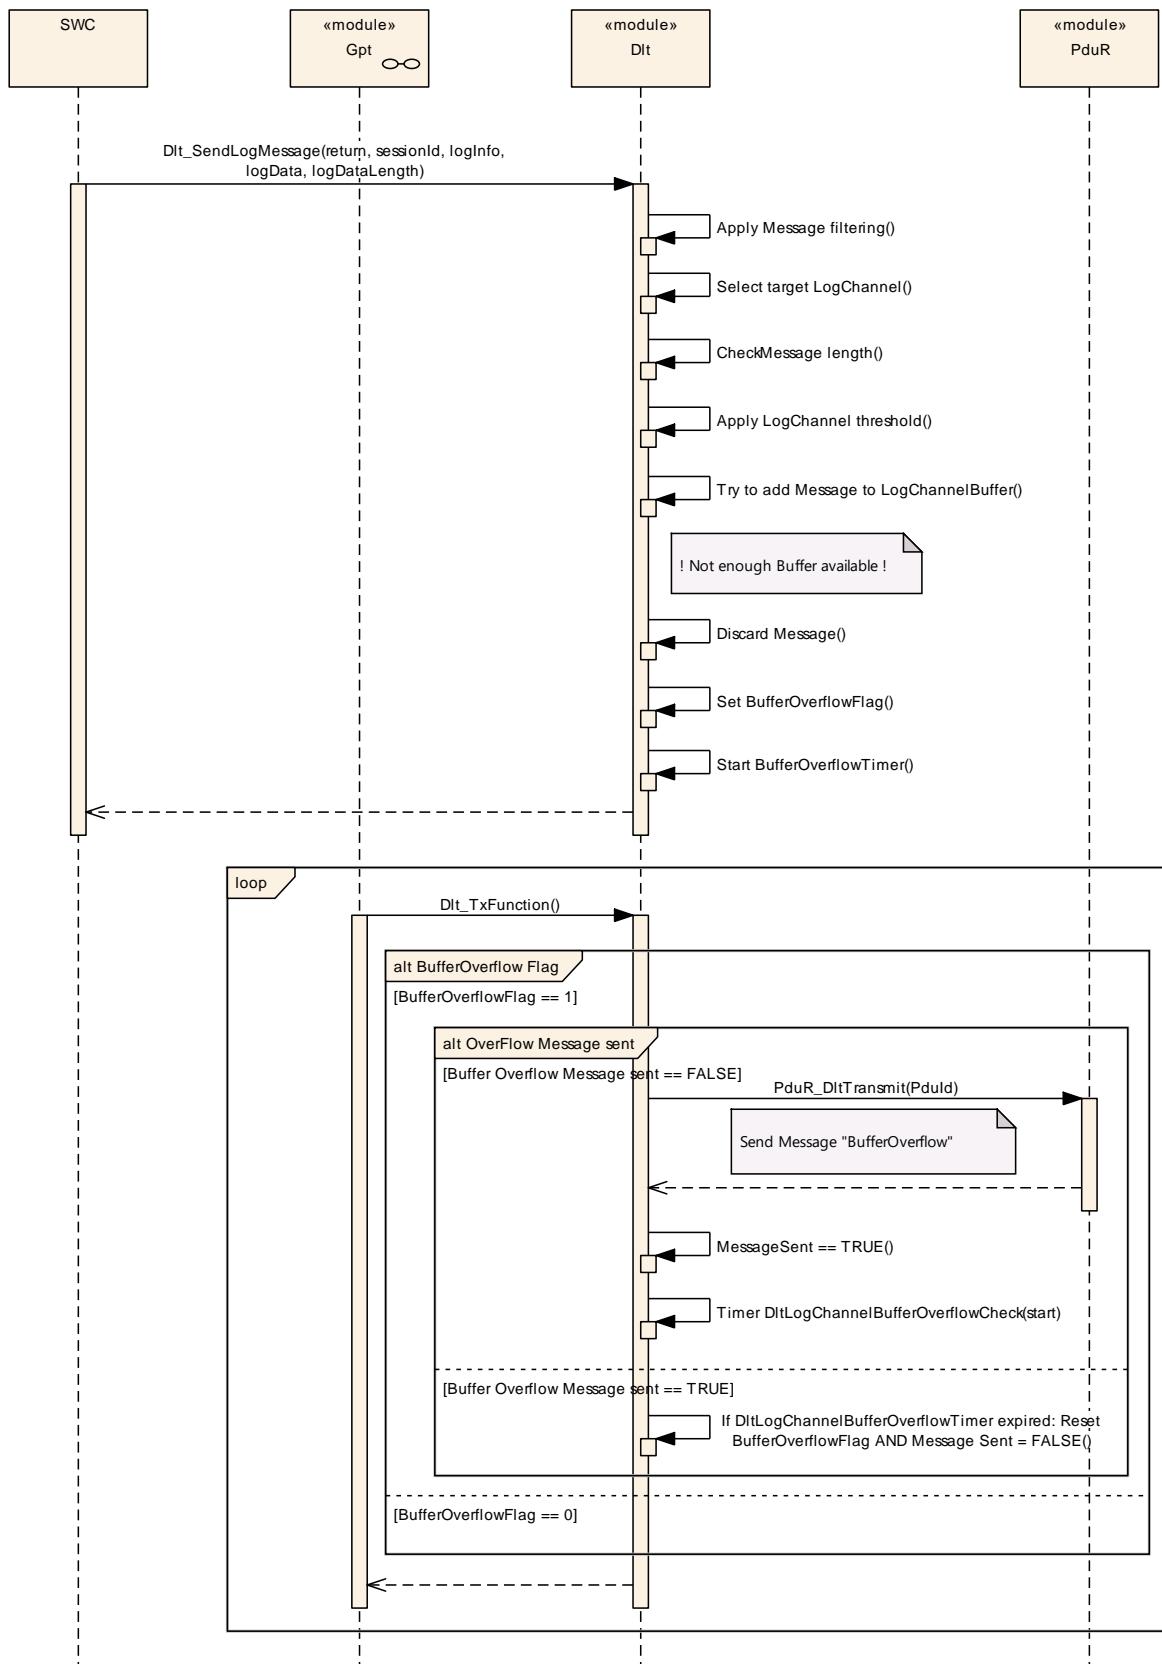


Figure 9-3: SetLogLevelFilter

9.4 Buffer overflow indication


Figure 9-4: Buffer overflow indication

10 Configuration specification

Chapter 10.1 specifies the structure (containers) and the parameters of the module Dlt.

Chapter 10.2 specifies additionally published information of the module Dlt.


10.1 Containers and configuration parameters

The following chapters summarize all configuration parameters. The detailed meanings of the parameters describe chapters 0 and chapter 8.

10.1.1 Dlt

SWS Item	ECUC_Dlt_00800 :
Module Name	Dlt
Module Description	--
Post-Build Variant Support	true
Supported Config Variants	VARIANT-LINK-TIME, VARIANT-POST-BUILD, VARIANT-PRE-COMPILE

Included Containers		
Container Name	Multiplicity	Scope / Dependency
DltConfigSet	1	This container lists all the global Dlt functionalities that can be enabled or disabled at pre-compile time to optimize resource consumption.
DltGeneral	1	This container lists all the global Dlt functionalities that can be enabled or disabled at pre-compile time to optimize resource consumption.
DltSwc	0..*	Contains necessary configuration parameters of the AUTOSAR Dlt module to interact with SWCs.

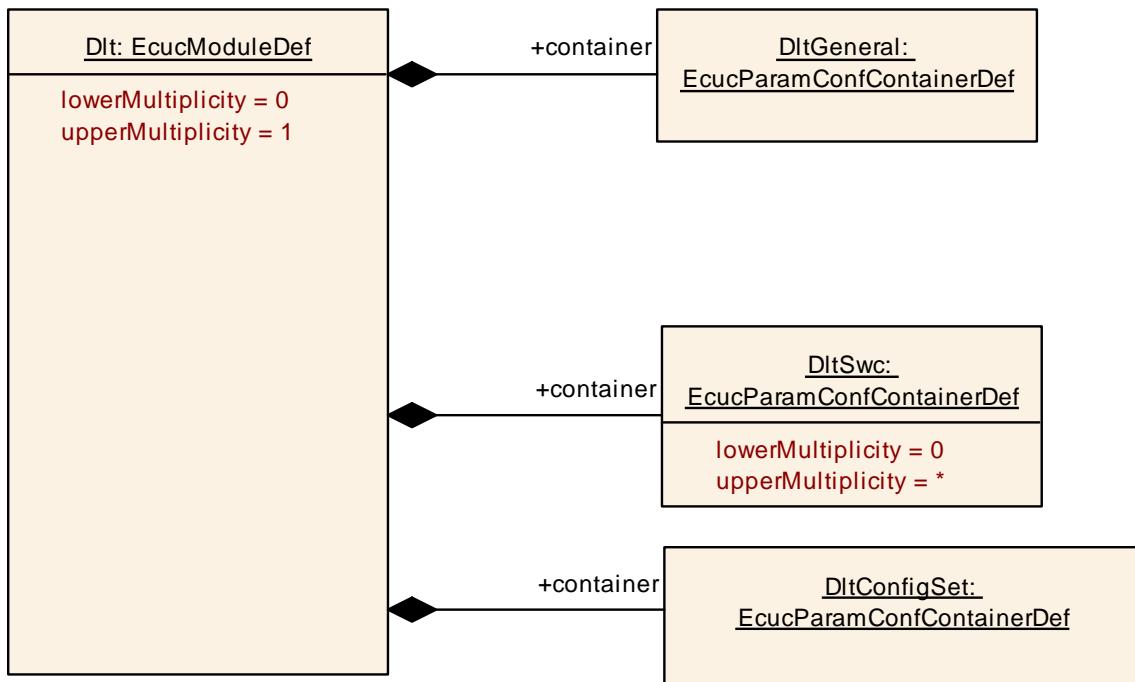

10.1.2 DltGeneral

SWS Item	ECUC_Dlt_00809 :
Container Name	DltGeneral

Parent Container	Dlt
Description	This container lists all the global Dlt functionalities that can be enabled or disabled at pre-compile time to optimize resource consumption.
Configuration Parameters	

SWS Item	ECUC_Dlt_00840 :		
Name	DltGeneralDevErrorDetect		
Parent Container	DltGeneral		
Description	If the Default Error Tracer (Det) shall be used, this parameter shall be set to TRUE. Otherwise, it shall be set to FALSE.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00847 :		
Name	DltGeneralInjectionSupport		
Parent Container	DltGeneral		
Description	Enables or disables the Dlt Injection feature.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00915 :		
Name	DltGeneralNvRAMSupport		
Parent Container	DltGeneral		
Description	Enables or disables the Dlt NvRAM Support feature.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00846 :		
Name	DltGeneralRegisterContextNotification		
Parent Container	DltGeneral		
Description	If this parameter is set to TRUE, a Dlt Control Message is sent every time a SWC registeres and/or de-registers at/from the Dlt Module. Else, this notification is not sent.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants

	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00848 :		
Name	DltGeneralRxDataPathSupport		
Parent Container	DltGeneral		
Description	Enables or disables the Rx Data Path to control the Dlt module.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Scope / Dependency	scope: local dependency: At least one RxPdu needs to be configured if DltGeneralRxDataPathSupport = TRUE		

SWS Item	ECUC_Dlt_00897 :		
Name	DltGeneralStartUpDelayTimer		
Parent Container	DltGeneral		
Description	Configurable delay in s of starting the transmission of Log and Trace messages after the Dlt module has been initialized.		
Multiplicity	0..1		
Type	EcucFloatParamDef		
Range	[0.001 .. 10]		
Default value	--		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Value Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00850 :		
Name	DltGeneralTimeStampSupport		
Parent Container	DltGeneral		
Description	If a Time Stamp shall be added to the Dlt messages, this configuration parameter shall be set to TRUE. Otherwise, it shall be set to FALSE.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00849 :		
Name	DltGeneralTrafficShapingSupport		

Parent Container	DltGeneral		
Description	Enables or disables the TrafficShaping feature to limit the maximum bandwidth for Dlt messages. If enabled, the maximum bandwidth can be configured per LogChannel.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	true		
Post-Build Variant Value	false		
Value Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00844 :		
Name	DltGeneralVersionInfoApi		
Parent Container	DltGeneral		
Description	Pre-processor switch for enabling Version Info API support. <ul style="list-style-type: none"> • True: version information API activated • False: version information API deactivated 		
Multiplicity	0..1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Multiplicity	Variant	false	
Post-Build Variant Value	false		
Multiplicity Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Value Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Scope / Dependency	scope: local		


SWS Item	ECUC_Dlt_00905 :		
Name	DltGeneralGptChannelRef		
Parent Container	DltGeneral		
Description	If TimeStampSupport is used the Dlt module shall fetch the time from the Gpt module by calling Gpt_GetTimeElapsed with the here referenced GptChannel. The tick duration can be deduced from the GptChannelTickFrequency parameter of the GptChannelConfiguration container. This is necessary to calculate the microsecond resolution timestamp output in the Dlt message. A GPT timer shall be used which starts with value 0 at ECU start-up according to the PRS Dlt Protocol Specification.		
Multiplicity	0..1		
Type	Symbolic name reference to [GptChannelConfiguration]		
Post-Build Variant Multiplicity	Variant	false	
Post-Build Variant Value	false		
Multiplicity Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	
Value Configuration Class	<i>Pre-compile time</i>	X	All Variants
	<i>Link time</i>	--	
	<i>Post-build time</i>	--	

Scope / Dependency	scope: local dependency: DltGeneralTimeStampSupport is set to TRUE and DltGeneralStbMTimeBaseRef is not configured.
---------------------------	--

SWS Item	ECUC_Dlt_00845 :		
Name	DltGeneralNvRamRef		
Parent Container	DltGeneral		
Description	If the Dlt module shall be able to store modified parameters during runtime persistently, this reference shall be set and shall point to the NvmBlock.		
Multiplicity	0..1		
Type	Symbolic name reference to [NvMBlockDescriptor]		
Post-Build Variant Multiplicity	Variant	false	
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00914 :		
Name	DltGeneralStbMTimeBaseRef		
Parent Container	DltGeneral		
Description	If TimeStampSupport is used the Dlt module shall fetch the time from the StbM module by calling StbM_GetCurrentTime with the here referenced StbMSynchronizedTimeBase.		
Multiplicity	0..1		
Type	Symbolic name reference to [StbMSynchronizedTimeBase]		
Post-Build Variant Multiplicity	Variant	false	
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: local dependency: DltGeneralTimeStampSupport is set to TRUE and DltGeneralGptChannelRef is not configured		

No Included Containers

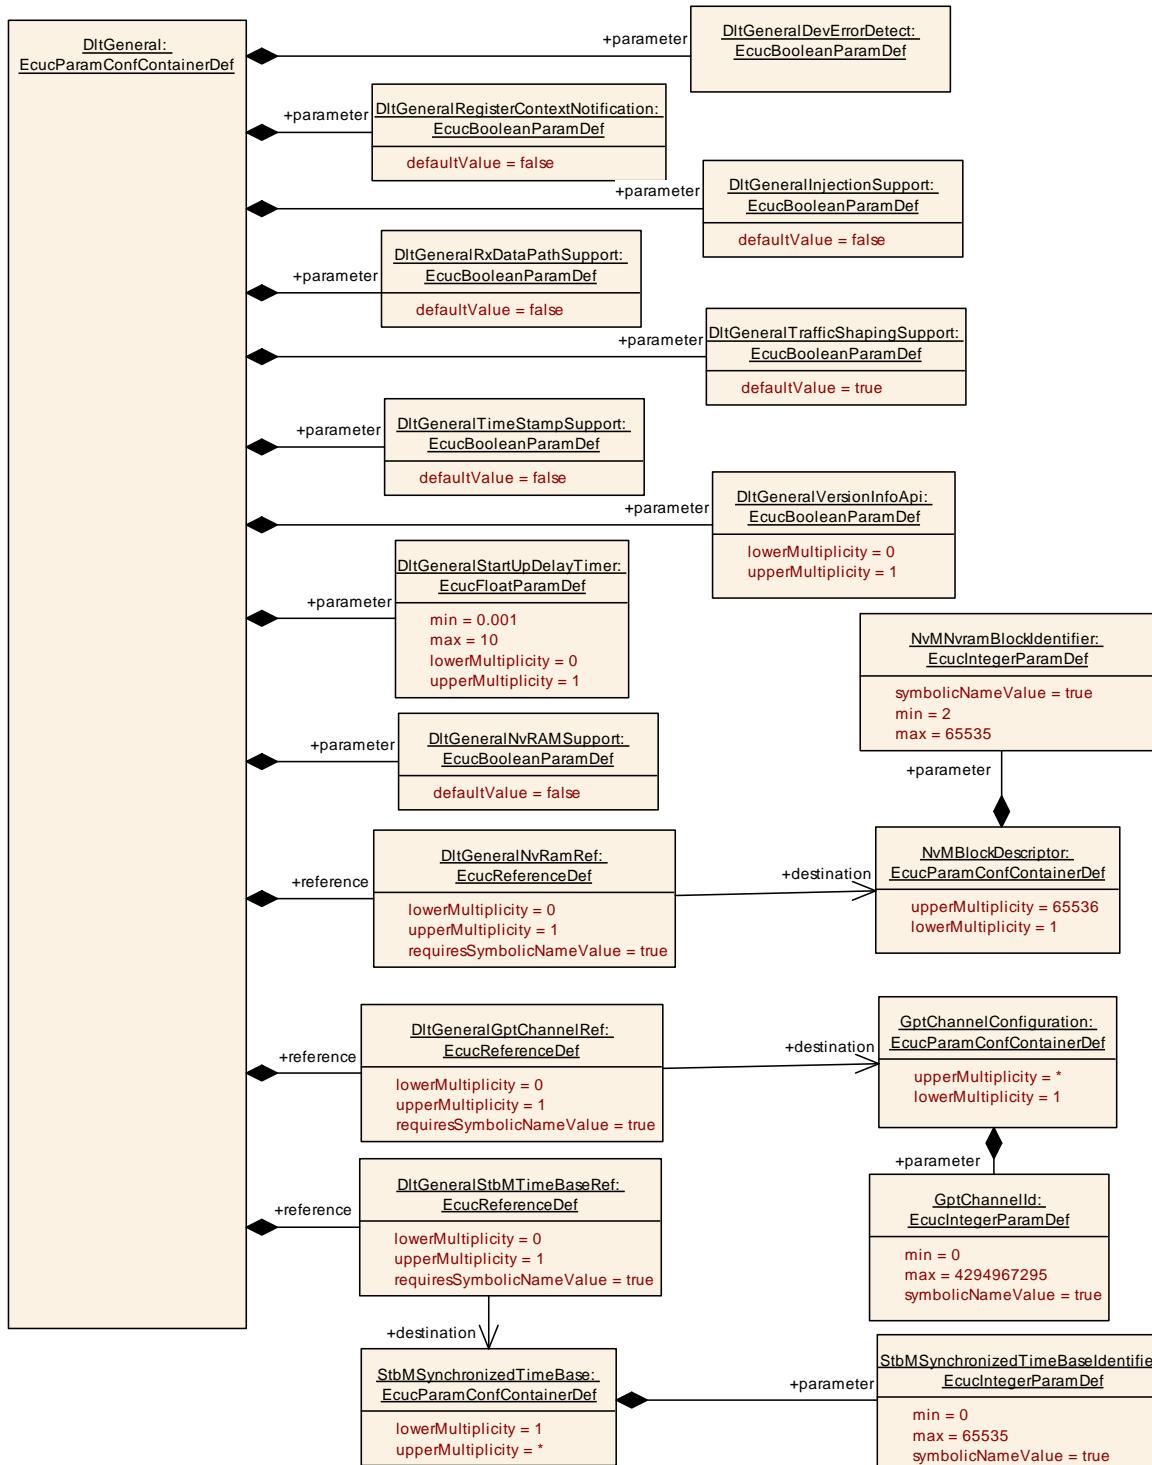

10.1.3 DltSwc

SWS Item	ECUC_Dlt_00856 :
----------	------------------

Container Name	DltSwc		
Parent Container	Dlt		
Description	Contains necessary configuration parameters of the AUTOSAR Dlt module to interact with SWCs.		
Post-Build Variant	true		
Multiplicity Configuration Class			
<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL	
<i>Link time</i>	X	VARIANT-LINK-TIME	
<i>Post-build time</i>	X	VARIANT-POST-BUILD	
Configuration Parameters			

SWS Item	ECUC_Dlt_00852 :		
Name	DltSwcSessionId		
Parent Container	DltSwc		
Description	An ECU wide unique ID to identify the port a SWC (instance) uses.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 18446744073709551615		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class			
<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL	
<i>Link time</i>	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD	
<i>Post-build time</i>	--		
Scope / Dependency	scope: local		


SWS Item	ECUC_Dlt_00853 :		
Name	DltSwcSupportLogLevelAndTraceStatusChangeNotification		
Parent Container	DltSwc		
Description	Flag indicating, whether Dlt has to provide a R-Port for the notification of the SWC about LogLevel or TraceStatus changes.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class			
<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL	
<i>Link time</i>	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD	
<i>Post-build time</i>	--		
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00909 :		
Name	MaxSwcLogMessageLength		
Parent Container	DltSwc		
Description	Defines the maximum allowed length (uint16) for LogMessages. The upper limit for the range of this parameter is currently defined by the range of the data type. The actual upper limit for the range of this parameter is identical to the maximum length of all configured Dlt log or trace messages, which is known when all log or trace messages are configured.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	8 .. 65535		
Default value	--		
Post-Build Variant Value	false		

Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	--	
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00910 :		
Name	MaxSwcTraceMessageLength		
Parent Container	DltSwc		
Description	Defines the maximum allowed length (uint16) for TraceMessages. The upper limit for the range of this parameter is currently defined by the range of the data type. The actual upper limit for the range of this parameter is identical to the maximum length of all configured Dlt log or trace messages, which is known when all log or trace messages are configured.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	8 .. 65535		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	--	
Scope / Dependency	scope: local		

Included Containers			
Container Name	Multiplicity	Scope / Dependency	
DltSwcContext	0..*	This container contains the configuration of ApplicationId / ContextId pairs which are supported by this SWC.	

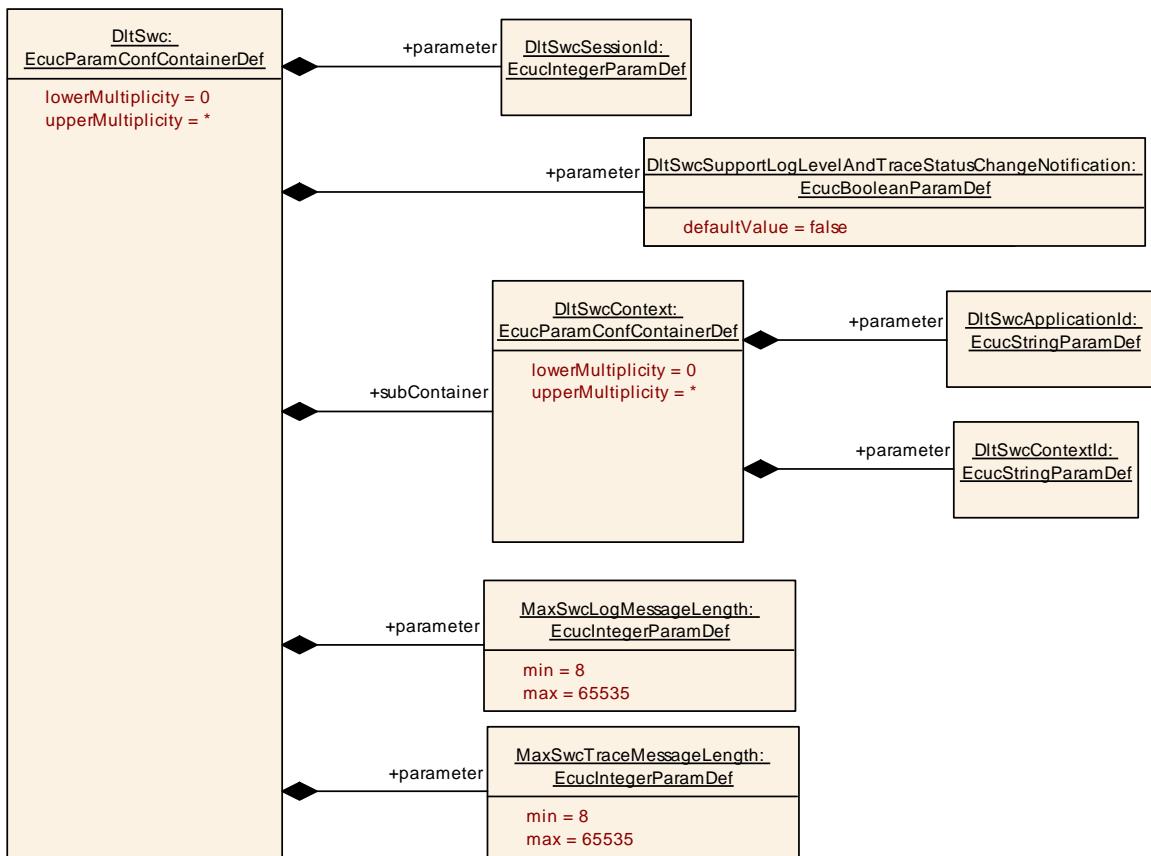

10.1.4 DltSwcContext

SWS Item	ECUC_Dlt_00854 :		
Container Name	DltSwcContext		
Parent Container	DltSwc		
Description	This container contains the configuration of ApplicationId / ContextId pairs which are supported by this SWC.		
Post-Build Variant	true		
Multiplicity Configuration Class	<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL
	<i>Link time</i>	X	VARIANT-LINK-TIME
	<i>Post-build time</i>	X	VARIANT-POST-BUILD
Configuration Parameters			

SWS Item	ECUC_Dlt_00858 :		
Name	DltSwcApplicationId		
Parent Container	DltSwcContext		
Description	Abbreviation for the SWC (4 characters)		
Multiplicity	1		
Type	EcucStringParamDef		
Default value	--		
maxLength	--		
minLength	--		
regularExpression	--		

Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		


SWS Item	ECUC_Dlt_00859 :		
Name	DltSwcContextId		
Parent Container	DltSwcContext		
Description	Abbreviation for the ContextId (4 characters)		
Multiplicity	1		
Type	EcucStringParamDef		
Default value	--		
maxLength	--		
minLength	--		
regularExpression	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.1.5 DltConfigSet

SWS Item	ECUC_Dlt_00842 :		
Container Name	DltConfigSet		
Parent Container	Dlt		
Description	This container lists all the global Dlt functionalities that can be enabled or disabled at pre-compile time to optimize resource consumption.		
Configuration Parameters			

Included Containers		
Container Name	Multiplicity	Scope / Dependency
DltLogLevelSetting	1	Contains settings for thresholds.
DltLogOutput	1	Contains settings for log/trace message output
DltProtocol	1	Configuration parameters for handling the specific protocol variants.
DltRxPdu	0..*	Contains the Pdu IDs to be used for Dlt control messages reception.
DltTraceStatusSetting	1	Contains settings for trace status

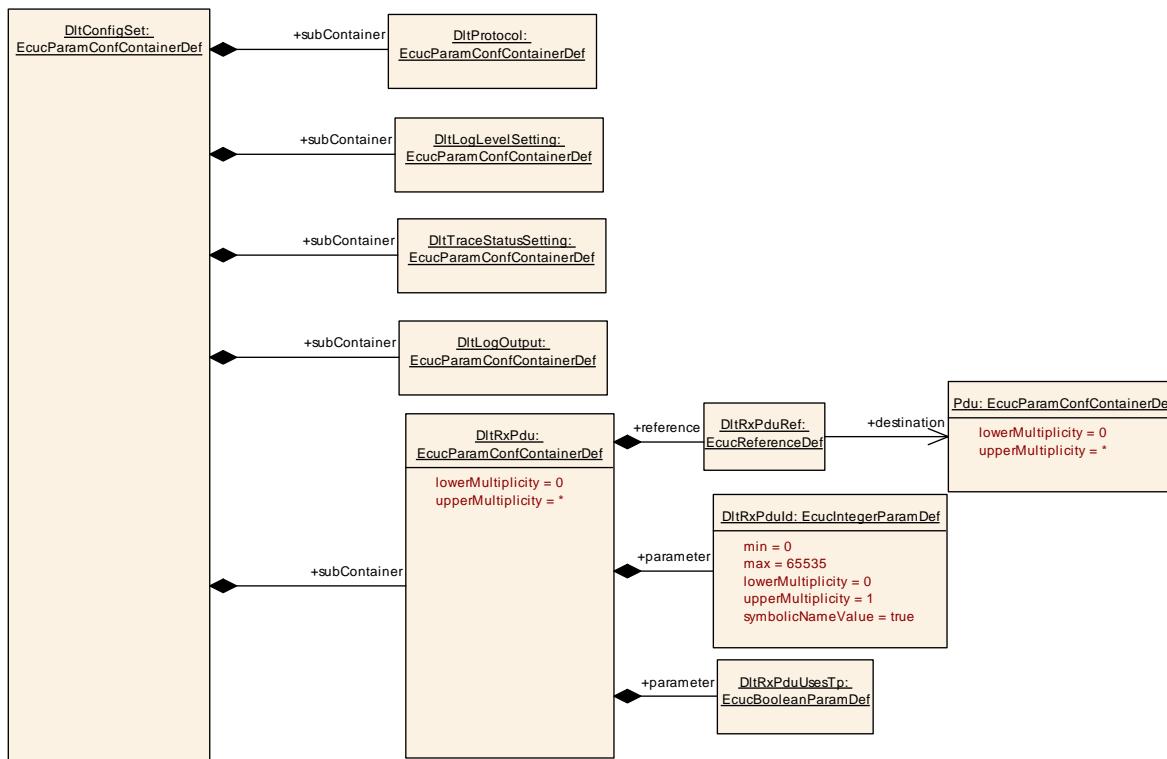

10.1.6 DltProtocol

SWS Item	ECUC_Dlt_00832 :
Container Name	DltProtocol
Parent Container	DltConfigSet
Description	Configuration parameters for handling the specific protocol variants.
Configuration Parameters	

SWS Item	ECUC_Dlt_00811 :		
Name	DltHeaderUseEculd		
Parent Container	DltProtocol		
Description	Corresponds to field WEID (With ECU ID). If set ECU ID shall be placed in the header, else not. If DltGeneralNvRAMSupport is enabled the value of the parameter defined here is also the initial value for the corresponding NvRam entry. If DltGeneralNvRAMSupport is not set, Link-Time or Post-Build configuration shall be used.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00813 :		
Name	DltHeaderUseSessionID		
Parent Container	DltProtocol		

Description	Corresponds to field WSID (with Session ID). If set the Session ID shall be placed in the header, else not. If DltGeneralNvRAMSupport is enabled the value of the parameter defined here is also the initial value for the corresponding NvRam entry. If DltGeneralNvRAMSupport is not set, Link-Time or Post-Build configuration shall be used.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		


SWS Item	ECUC_Dlt_00814 :		
Name	DltHeaderUseTimestamp		
Parent Container	DltProtocol		
Description	Corresponds to field WTMS (With Timestamp). If set the timestamp shall be placed in the header, else not. If DltGeneralNvRAMSupport is enabled the value of the parameter defined here is also the initial value for the corresponding NvRam entry. If DltGeneralNvRAMSupport is not set, Link-Time or Post-Build configuration shall be used.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU dependency: Can only be true if DltImplementTimestamp is true.		

SWS Item	ECUC_Dlt_00812 :		
Name	DltUseExHeaderInNonVerbMode		
Parent Container	DltProtocol		
Description	Non Verbose messages (opposed to verbose messages) do not need an extended header. If this flag is set to true the extended header shall also be used for non verbose messages. If DltGeneralNvRAMSupport is enabled the value of the parameter defined here is also the initial value for the corresponding NvRam entry. If DltGeneralNvRAMSupport is not set, Link-Time or Post-Build configuration shall be used.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00911 :		
Name	DltUseVerboseMode		
Parent Container	DltProtocol		
Description	If this flag is set to TRUE, the payload shall be transmitted in verbose		

	mode, else the payload shall be transmitted in none-verbose mode.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

Included Containers			
Container Name	Multiplicity	Scope / Dependency	
DltEculd	1	This is a choice container to choose between a Eculd value or a callout to get the Eculd.	

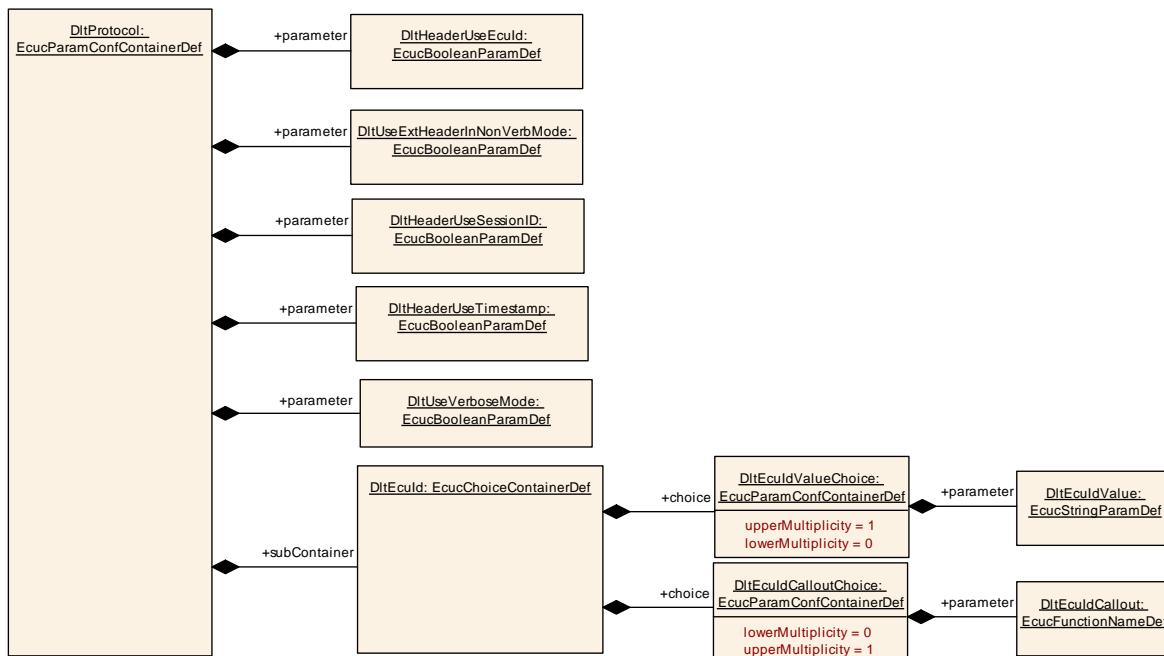

10.1.7 DltEculd

SWS Item	ECUC_Dlt_00860 :		
Choice container Name	DltEculd		
Parent Container	DltProtocol		
Description	This is a choice container to choose between a Eculd value or a callout to get the Eculd.		

Container Choices			
Container Name	Multiplicity	Scope / Dependency	
DltEculdCalloutChoice	0..1	Eculd via user defined callout.	

DltEculdValueChoice	0.1	Eculd value configuration
---------------------	-----	---------------------------

10.1.8 DltEculdCalloutChoice

SWS Item	ECUC_Dlt_00902 :	
Container Name	DltEculdCalloutChoice	
Parent Container	DltEculd	
Description	Eculd via user defined callout.	
Post-Build Variant Multiplicity	Variant false	
Configuration Parameters		

SWS Item	ECUC_Dlt_00862 :	
Name	DltEculdCallout	
Parent Container	DltEculdCalloutChoice	
Description	If this choice is used the Eculd shall be fetched by calling the here configured callout function.	
Multiplicity	1	
Type	EcucFunctionNameDef	
Default value	--	
maxLength	--	
minLength	--	
regularExpression	--	
Post-Build Variant Value	false	
Value Configuration Class	Pre-compile time	X All Variants
	Link time	--
	Post-build time	--
Scope / Dependency	scope: ECU	

No Included Containers

10.1.9 DltEculdValueChoice

SWS Item	ECUC_Dlt_00901 :	
Container Name	DltEculdValueChoice	
Parent Container	DltEculd	
Description	Eculd value configuration	
Post-Build Variant Multiplicity	Variant false	
Configuration Parameters		

SWS Item	ECUC_Dlt_00861 :	
Name	DltEculdValue	
Parent Container	DltEculdValueChoice	
Description	If this choice is used the Eculd shall be taken from the configured string. This is the name of the ECU for use within the Dlt protocol. If you want to use a number representation type this as character.	
Multiplicity	1	
Type	EcucStringParamDef	

Default value	--									
maxLength	--									
minLength	--									
regularExpression	--									
Post-Build Variant Value	false									
Value Configuration Class	<table border="1"> <tr> <td>Pre-compile time</td> <td>X</td> <td>All Variants</td> </tr> <tr> <td>Link time</td> <td>--</td> <td></td> </tr> <tr> <td>Post-build time</td> <td>--</td> <td></td> </tr> </table>	Pre-compile time	X	All Variants	Link time	--		Post-build time	--	
Pre-compile time	X	All Variants								
Link time	--									
Post-build time	--									
Scope / Dependency	scope: ECU									

No Included Containers

10.1.10 DltLogLevelSetting


SWS Item	ECUC_Dlt_00863 :
Container Name	DltLogLevelSetting
Parent Container	DltConfigSet
Description	Contains settings for thresholds.
Configuration Parameters	

SWS Item	ECUC_Dlt_00864 :	
Name	DltDefaultLogLevel	
Parent Container	DltLogLevelSetting	
Description	This is the effective log level used in case no filter matches the given ApplicationId and ContextId. This can be seen as a fall-through filter definition with wildcard for ApplicationId and ContextId, which will be used, when no other filter matches.	
Multiplicity	1	
Type	EcucEnumerationParamDef	
Range	DLT_LOG_DEBUG	--
	DLT_LOG_ERROR	--
	DLT_LOG_FATAL	--
	DLT_LOG_INFO	--
	DLT_LOG_OFF	--
	DLT_LOG_VERBOSE	--
	DLT_LOG_WARN	--
Post-Build Variant Value	true	
Value Configuration Class	Pre-compile time	X VARIANT-PRE-COMPILE
	Link time	X VARIANT-LINK-TIME
	Post-build time	X VARIANT-POST-BUILD
Scope Dependency	scope: ECU	

Included Containers
Container Name
DltLogLevelThreshold

Multiplicity Scope / Dependency

DltLogLevelThreshold 0..* This container contains a preconfiguration of ApplicationId / ContextId pairs and their assigned LogLevel threshold.

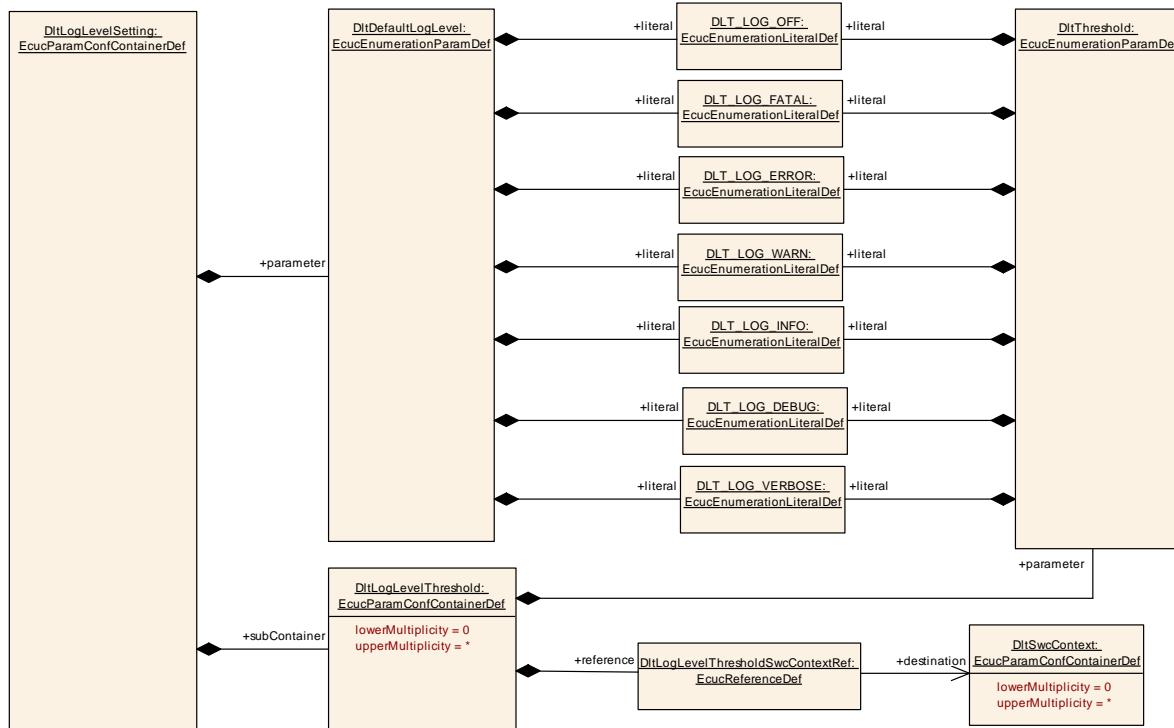

10.1.11 DltLogLevelThreshold

SWS Item	ECUC_Dlt_00865 :		
Container Name	DltLogLevelThreshold		
Parent Container	DltLogLevelSetting		
Description	This container contains a preconfiguration of ApplicationId / ContextId pairs and their assigned LogLevel threshold.		
Post-Build Variant	true		
Multiplicity	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Configuration Parameters			

SWS Item	ECUC_Dlt_00866 :		
Name	DltThreshold		
Parent Container	DltLogLevelThreshold		
Description	LogLevel Threshold		
Multiplicity	1		
Type	EcucEnumerationParamDef		
Range	DLT_LOG_DEBUG	--	
	DLT_LOG_ERROR	--	
	DLT_LOG_FATAL	--	
	DLT_LOG_INFO	--	
	DLT_LOG_OFF	--	
	DLT_LOG_VERBOSE	--	
	DLT_LOG_WARN	--	
Post-Build Variant	true		
Value			

Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00894 :		
Name	DltLogLevelThresholdSwcContextRef		
Parent Container	DltLogLevelThreshold		
Description	Reference to an ApplicationId/ContextId pair to which a LogLevel threshold is assigned.		
Multiplicity	1		
Type	Reference to [DltSwcContext]		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency			

No Included Containers

10.1.12 DltLogChannelAssignment

SWS Item	ECUC_Dlt_00887 :		
Container Name	DltLogChannelAssignment		
Parent Container	DltLogOutput		
Description	This container contains a preconfiguration of ApplicationId / ContextId pairs and their assigned log channel.		
Post-Build Variant Multiplicity	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Configuration Parameters			

SWS Item	ECUC_Dlt_00896 :		
Name	DltLogChannelAssignmentSwcContextRef		
Parent Container	DltLogChannelAssignment		
Description	Reference to an ApplicationId/ContextId pair that is assigned to a DltLogChannel.		
Multiplicity	1		
Type	Reference to [DltSwcContext]		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency			

SWS Item	ECUC_Dlt_00888 :		
Name	DltLogChannelRef		
Parent Container	DltLogChannelAssignment		
Description	Reference to a DltLogChannel that is assigned to an ApplicationId / ContextId pair.		

Multiplicity	1		
Type	Reference to [DltLogChannel]		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency			


No Included Containers

10.1.13 DltTraceStatusSetting

SWS Item	ECUC_Dlt_00869 :		
Container Name	DltTraceStatusSetting		
Parent Container	DltConfigSet		
Description	Contains settings for trace status		
Configuration Parameters			

SWS Item	ECUC_Dlt_00870 :		
Name	DltDefaultTraceStatus		
Parent Container	DltTraceStatusSetting		
Description	This is the effective trace status used in case no filter matches the given ApplicationId and ContextId. This can be seen as a fall-through filter definition with wildcard for ApplicationId and ContextId, which will be used, when no other filter matches.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

Included Containers		
Container Name	Multiplicity	Scope / Dependency
DltTraceStatusAssignment	0..*	This container contains a preconfiguration of ApplicationId / ContextId pairs and their assigned trace status.

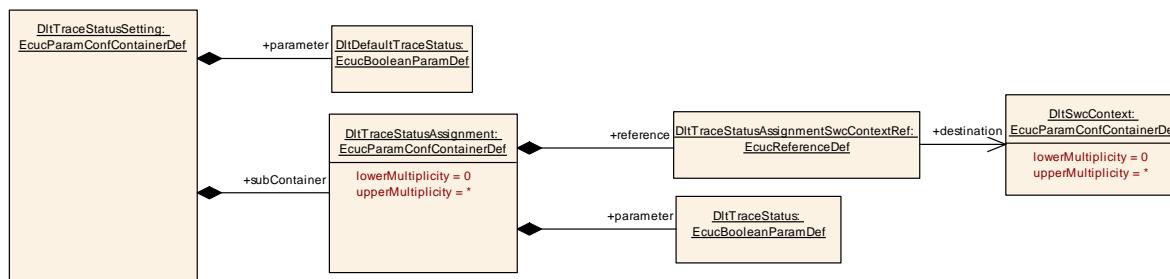

10.1.14 DltTraceStatusAssignment

SWS Item	ECUC_Dlt_00871 :		
Container Name	DltTraceStatusAssignment		
Parent Container	DltTraceStatusSetting		
Description	This container contains a preconfiguration of ApplicationId / ContextId pairs and their assigned trace status.		
Post-Build Variant Multiplicity	Variant	true	
Multiplicity Class	Configuration	Pre-compile time	X VARIANT-PRE-COMPILE
		Link time	X VARIANT-LINK-TIME
		Post-build time	X VARIANT-POST-BUILD
Configuration Parameters			

SWS Item	ECUC_Dlt_00874 :		
Name	DltTraceStatus		
Parent Container	DltTraceStatusAssignment		
Description	Trace status for the given ApplicationId/ContextId tuple.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Configuration	Pre-compile time	X VARIANT-PRE-COMPILE
		Link time	X VARIANT-LINK-TIME
		Post-build time	X VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00895 :		
Name	DltTraceStatusAssignmentSwcContextRef		
Parent Container	DltTraceStatusAssignment		
Description	Reference to an ApplicationId/ContextId pair to which a DltTraceStatus is assigned.		
Multiplicity	1		
Type	Reference to [DltSwcContext]		
Post-Build Variant Value	true		
Value Configuration Class	Configuration	Pre-compile time	X VARIANT-PRE-COMPILE
		Link time	X VARIANT-LINK-TIME
		Post-build time	X VARIANT-POST-BUILD
Scope / Dependency			

No Included Containers

10.1.15 DltLogOutput


SWS Item	ECUC_Dlt_00875 :		
Container Name	DltLogOutput		
Parent Container	DltConfigSet		
Description	Contains settings for log/trace message output		

Configuration Parameters

SWS Item	ECUC_Dlt_00889 :		
Name	DltDefaultLogChannelRef		
Parent Container	DltLogOutput		
Description	Reference to the default log channel, which has to be used for a log/trace output, if no other match has been found.		
Multiplicity	1		
Type	Reference to [DltLogChannel]		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency			

Included Containers

Container Name	Multiplicity	Scope / Dependency
DltLogChannel	1..*	Contains settings for log/trace message output
DltLogChannelAssignment	0..*	This container contains a preconfiguration of ApplicationId / ContextId pairs and their assigned log channel.

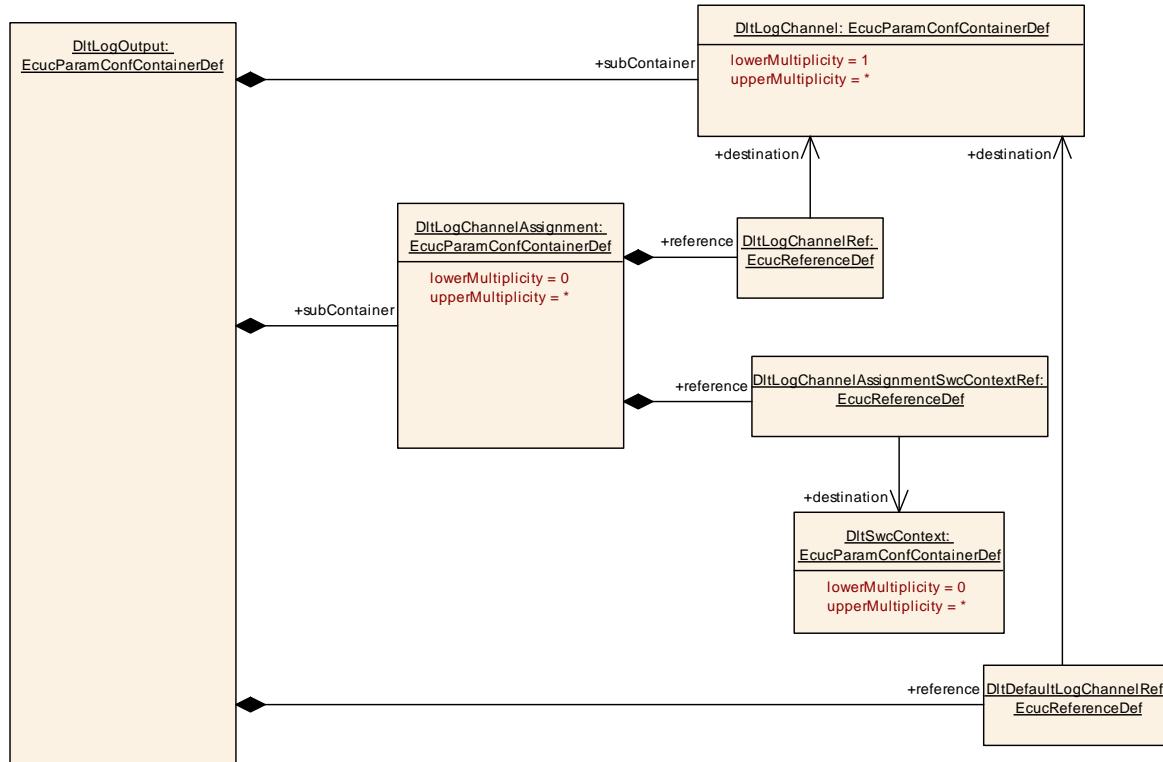

10.1.16 DltLogChannel

SWS Item	ECUC_Dlt_00876 :
-----------------	------------------

Container Name	DltLogChannel
Parent Container	DltLogOutput
Description	Contains settings for log/trace message output
Configuration Parameters	

SWS Item	ECUC_Dlt_00886 :		
Name	DltLogChannelBufferOverflowTimer		
Parent Container	DltLogChannel		
Description	Specifies the cycle time in seconds for resetting the buffer overflow flag in case a buffer overflow occurred.		
Multiplicity	1		
Type	EcucFloatParamDef		
Range	[0.001 .. 1]		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00881 :		
Name	DltLogChannelBufferSize		
Parent Container	DltLogChannel		
Description	Buffer size in bytes for the LogChannel specific message buffer.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 4294967295		
Default value	--		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	--	
	Post-build time	--	
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00877 :		
Name	DltLogChannelId		
Parent Container	DltLogChannel		
Description	This is the 4 ASCII character long name of the log channel as used in the Dlt control messages as parameter name Dlt_interface		
Multiplicity	1		
Type	EcucStringParamDef		
Default value	--		
maxLength	--		
minLength	--		
regularExpression	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00882 :		
Name	DltLogChannelMaxMessageLength		
Parent Container	DltLogChannel		
Description	The maximum length of a Dlt log or trace message.		
Multiplicity	1		

Type	EcucIntegerParamDef		
Range	8 .. 65535		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILe, VARIANT-POST-BUILD
	Link time	X	VARIANT-LINK-TIME
	Post-build time	--	
Scope / Dependency	scope: ECU		

SWS Item	ECUC_DLt_00884 :		
Name	DLtLogChannelMaxNumOfRetries		
Parent Container	DLtLogChannel		
Description	The maximum amount of retries for sending a DLt log or trace message.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 255		
Default value	0		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILe
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_DLt_00878 :		
Name	DLtLogChannelThreshold		
Parent Container	DLtLogChannel		
Description	LogLevel Threshold		
Multiplicity	1		
Type	EcucEnumerationParamDef		
Range	DLT_LOG_DEBUG	--	
	DLT_LOG_ERROR	--	
	DLT_LOG_FATAL	--	
	DLT_LOG_INFO	--	
	DLT_LOG_OFF	--	
	DLT_LOG_VERBOSE	--	
	DLT_LOG_WARN	--	
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILe
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		


SWS Item	ECUC_DLt_00883 :			
Name	DLtLogChannelTrafficShapingBandwidth			
Parent Container	DLtLogChannel			
Description	Set the maximum possible bandwidth in bit/s.			
Multiplicity	0..1			
Type	EcucIntegerParamDef			
Range	0 ..	18446744073709551615		
Default value	--			
Post-Build Variant Multiplicity	true			

Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE, VARIANT-POST-BUILD
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local dependency: DltGeneralTrafficShapingSupport enabled		

SWS Item	ECUC_Dlt_00885 :		
Name	DltLogChannelTransmitCycle		
Parent Container	DltLogChannel		
Description	Specifies the cycle time in seconds of the transmit functionality of this log channel.		
Multiplicity	1		
Type	EcucFloatParamDef		
Range	[0.001 .. 1]		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00879 :		
Name	DltLogTraceStatusFlag		
Parent Container	DltLogChannel		
Description	Parameter to turn on/off on this LogChannel completely.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency			

Included Containers			
Container Name	Multiplicity	Scope / Dependency	
DltTxPdu	1	Contains the configuration parameters of the AUTOSAR Dlt module's Tx Pdus.	

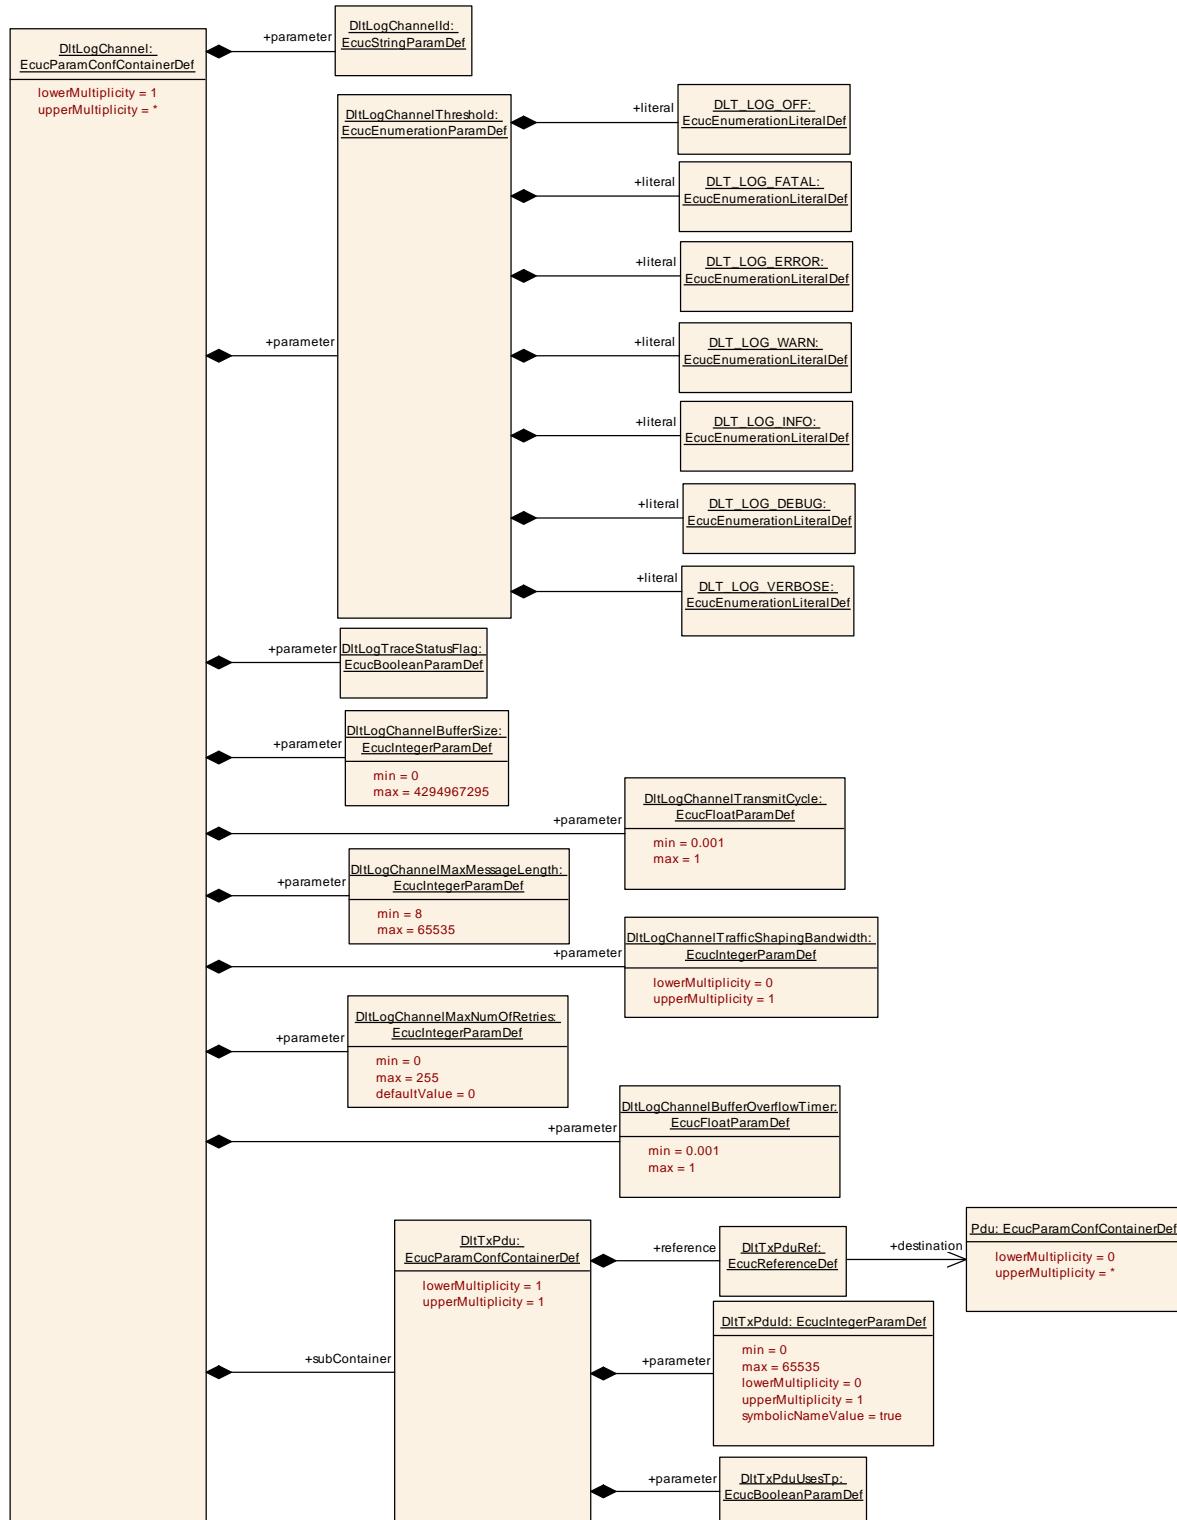

10.1.17 DltTxPdu

SWS Item	ECUC_Dlt_00907 :
Container Name	DltTxPdu

Parent Container	DltLogChannel
Description	Contains the configuration parameters of the AUTOSAR Dlt module's Tx Pdus.
Configuration Parameters	

SWS Item	ECUC_Dlt_00893 :		
Name	DltTxPdulId		
Parent Container	DltTxPdu		
Description	The numerical value used as the ID of this I-PDU. This handle Id is used for the APIs calls Dlt_TxConfirmation, Dlt_TriggerTransmit, Dlt_TriggerIPDUSend or Dlt_TriggerIPDUSendWithMetaData, Dlt_CopyTxData and Dlt_TpTxConfirmation to transmit respectively confirm transmissions of I-PDUs.		
Multiplicity	0..1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 65535		
Default value	--		
Post-Build Variant Multiplicity	Variant	true	
Post-Build Variant Value	true		
Multiplicity Configuration Class	<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL
	<i>Link time</i>	X	VARIANT-LINK-TIME
	<i>Post-build time</i>	X	VARIANT-POST-BUILD
Value Configuration Class	<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL
	<i>Link time</i>	X	VARIANT-LINK-TIME
	<i>Post-build time</i>	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00913 :		
Name	DltTxPduUsesTp		
Parent Container	DltTxPdu		
Description	If set to TRUE, the PDU is transmitted using the TP API. If FALSE, the IF API is used.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL
	<i>Link time</i>	X	VARIANT-LINK-TIME
	<i>Post-build time</i>	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00892 :		
Name	DltTxPduRef		
Parent Container	DltTxPdu		
Description	Reference to the "global" Pdu structure to allow harmonization of handle IDs in the COM-Stack.		
Multiplicity	1		
Type	Reference to [Pdu]		
Post-Build Variant Value	true		
Value Configuration Class	<i>Pre-compile time</i>	X	VARIANT-PRE-COMPIL
	<i>Link time</i>	X	VARIANT-LINK-TIME
	<i>Post-build time</i>	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers
10.1.18 DltRxPdu

SWS Item	ECUC_Dlt_00900 :		
Container Name	DltRxPdu		
Parent Container	DltConfigSet		
Description	Contains the Pdu IDs to be used for Dlt control messages reception.		
Post-Build Variant Multiplicity	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Configuration Parameters			

SWS Item	ECUC_Dlt_00899 :		
Name	DltRxPduld		
Parent Container	DltRxPdu		
Description	The numerical value used as the ID of this I-PDU. The DltRxPduld is required by the API calls Dlt_RxIndication, Dlt_TpRxIndication, Dlt_StartOfReception and Dlt_CopyRxData to receive I-PDUs from the PduR.		
Multiplicity	0..1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 65535		
Default value	--		
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: ECU		

SWS Item	ECUC_Dlt_00912 :		
Name	DltRxPduUsesTp		
Parent Container	DltRxPdu		
Description	If set to TRUE, the PDU is received using the TP API. If FALSE, the IF API is used.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	--		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	ECUC_Dlt_00898 :		
Name	DltRxPduRef		

Parent Container	DltRxPdu		
Description	Reference to the "global" Pdu structure to allow harmonization of handle IDs in the COM-Stack.		
Multiplicity	1		
Type	Reference to [Pdu]		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPIL
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.2 Published Information

Published information contains data defined by the implementer of the SW module that does not change when the module is adapted (i.e. configured) to the actual HW/SW environment. It thus contains version and manufacturer information.

Additional module-specific published parameters are listed below if applicable.