

<b>Document Title</b>	Specification of Standard Types
<b>Document Owner</b>	AUTOSAR
<b>Document Responsibility</b>	AUTOSAR
<b>Document Identification No</b>	49

<b>Document Status</b>	published
<b>Part of AUTOSAR Standard</b>	Classic Platform
<b>Part of Standard Release</b>	R21-11

<b>Document Change History</b>			
<b>Date</b>	<b>Release</b>	<b>Changed by</b>	<b>Description</b>
2021-11-25	R21-11	AUTOSAR Release Management	<ul style="list-style-type: none"> <li>Added SWS_Std_00031 (NULL_PTR)</li> <li>Editorial Changes</li> </ul>
2020-11-30	R20-11	AUTOSAR Release Management	<ul style="list-style-type: none"> <li>Fixed Design issues with E2E communication protection for methods</li> <li>Added TransformerError and TransformerForward</li> <li>Fixed missing Type definitions</li> <li>Editorial Changes</li> </ul>
2019-11-28	R19-11	AUTOSAR Release Management	<ul style="list-style-type: none"> <li>Added chapter Std_TransformerError</li> <li>Editorial changes</li> <li>Changed Document Status from Final to published</li> </ul>
2018-10-31	4.4.0	AUTOSAR Release Management	<ul style="list-style-type: none"> <li>Header File Cleanup (no impact on behavior)</li> </ul>
2017-12-08	4.3.1	AUTOSAR Release Management	<ul style="list-style-type: none"> <li>Updated OSEK reference (editorial)</li> </ul>
2016-11-30	4.3.0	AUTOSAR Release Management	<ul style="list-style-type: none"> <li>Corrected editorial traceability issues</li> </ul>
2015-07-31	4.2.2	AUTOSAR Release Management	<ul style="list-style-type: none"> <li>Harmonized traceability</li> </ul>

2014-10-31	4.2.1	AUTOSAR Release Management	<ul style="list-style-type: none"> <li>• Editorial changes</li> </ul>
2013-10-31	4.1.2	AUTOSAR Release Management	<ul style="list-style-type: none"> <li>• Editorial changes</li> <li>• Removed chapter(s) on change documentation</li> </ul>
2013-03-15	4.1.1	AUTOSAR Administration	<ul style="list-style-type: none"> <li>• Harmonized requirements according to SWS_General</li> </ul>
2011-12-22	4.0.3	AUTOSAR Administration	<ul style="list-style-type: none"> <li>• Update of SWS documents for new traceability mechanism</li> </ul>
2010-02-02	3.1.4	AUTOSAR Administration	<ul style="list-style-type: none"> <li>• Removed instanceID from StdVersionType</li> <li>• Concretized the published parameters to have the prefix STD_TYPES</li> <li>• Legal disclaimer revised</li> </ul>
2008-08-13	3.1.1	AUTOSAR Administration	<ul style="list-style-type: none"> <li>• Legal disclaimer revised</li> </ul>
2007-12-21	3.0.1	AUTOSAR Administration	<ul style="list-style-type: none"> <li>• Add Module ID for Complex Drivers</li> <li>• Document meta information extended</li> <li>• Small layout adaptations made</li> </ul>
2007-01-24	2.1.15	AUTOSAR Administration	<ul style="list-style-type: none"> <li>• "Advice for users" revised</li> <li>• "Revision Information" added</li> </ul>
2006-11-28-01	2.1.1	AUTOSAR Administration	<ul style="list-style-type: none"> <li>• Changed definition of Standard_ReturnType to match the RTE definition.</li> <li>• A complete overview of definitions and values has been performed to match the requirements in the SRS General.</li> </ul>
2006-05-16	2.0	AUTOSAR Administration	<ul style="list-style-type: none"> <li>• Initial Release</li> </ul>

## **Disclaimer**

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

## Table of Contents

1	Introduction and functional overview	6
2	Acronyms and abbreviations	6
3	Related documentation	6
3.1	Input documents & related standards and norms	6
3.2	Related specification	7
4	Constraints and assumptions	7
4.1	Limitations	7
4.2	Applicability to car domains	7
5	Software Architecture	7
5.1	Dependencies to other modules	7
5.2	File structure	7
5.2.1	Communication related BSW modules	8
6	Requirements Tracing	8
7	Functional specification	15
7.1	General issues	15
7.2	Error Classification	16
7.2.1	Development Errors	16
7.2.2	Runtime Errors	16
7.2.3	Transient Faults	16
7.2.4	Production Errors	16
7.2.5	Extended Production Errors	16
8	API specification	16
8.1	Type definitions	16
8.1.1	Std_ReturnType	16
8.1.2	Std_VersionInfoType	17
8.1.3	Std_TransformerError	18
8.1.4	Std_TransformerForward	20
8.1.5	Std_MessageTypeType	21
8.1.6	Std_MessageResultType	21
8.1.7	Std_ExtractProtocolHeaderFieldsType	22
8.2	Symbol definitions	23
8.2.1	E_OK, E_NOT_OK	23
8.2.2	STD_HIGH, STD_LOW	23
8.2.3	STD_ACTIVE, STD_IDLE	23
8.2.4	STD_ON, STD_OFF	24
8.2.5	NULL_PTR	24
8.3	Function definitions	24

9	Sequence diagrams	25
10	Configuration specification	25
A	Not applicable requirements	25

## 1 Introduction and functional overview

This document specifies the AUTOSAR standard types header file. It contains all types that are used across several modules of the basic software and that are platform and compiler independent.

It is strongly recommended that those standard types files are unique within the AUTOSAR community to guarantee unique types and to avoid types changes when changing from supplier A to B.

## 2 Acronyms and abbreviations

Acronyms and abbreviations that have a local scope are not contained in the AUTOSAR glossary. These must appear in a local glossary.

Acronym:	Description:
API	Application Programming Interface
OSEK/VDX	Offene Systeme und deren Schnittstellen fuer die Elektronik im Kraftfahrzeug

Abreviation:	Description:
STD	Standard

## 3 Related documentation

### 3.1 Input documents & related standards and norms

- [1] General Requirements on Basic Software Modules  
AUTOSAR\_SRS\_BSWGeneral
- [2] General Requirements on SPAL  
AUTOSAR\_SRS\_SPALGeneral
- [3] Specification of RTE Software  
AUTOSAR\_SWS\_RTE
- [4] Requirements on Basic Software Module Description Template  
AUTOSAR\_RS\_BSWModuleDescriptionTemplate
- [5] List of Basic Software Modules  
AUTOSAR\_TR\_BSWModuleList
- [6] ISO 17356-3: Road vehicles – Open interface for embedded automotive applications – Part 3: OSEK/VDX Operating System (OS)

## 3.2 Related specification

AUTOSAR provides a General Specification on Basic Software modules [1, SWS BSW General], which is also valid for Standard Types.

Thus, the specification SWS BSW General shall be considered as additional and required specification for Standard Types.

Further specification:

[2, SRS SPALGeneral] [3, SWS RTE] [4, RS BSW General] [5, TR BSW General] [6, OSEK/VDX Operating System] [ISO/IEC 9899:1990]

# 4 Constraints and assumptions

## 4.1 Limitations

No limitations.

## 4.2 Applicability to car domains

Many symbols defined in this specification (like OK, NOT\_OK, ON, OFF) are already defined and used within legacy software. These conflicts ('redefinition of existing symbol') are expected, but neglected, because of the following reasons:

1. AUTOSAR has to maintain network compatibility with legacy ECUs, but no software architecture compatibility with legacy software. Many types are defined and used exactly in the same way that legacy software does. Legacy software can keep on using the symbols, only the definitions have to be removed and taken from this file instead.

# 5 Software Architecture

## 5.1 Dependencies to other modules

## 5.2 File structure

The include structures differ between BSW modules which are part of the COM-stack and other modules. BSW modules which is considered part of the COM stack shall include the ComStackTypes.h other modules shall include StandardTypes.h

### 5.2.1 Communication related BSW modules

[SWS\_Std\_00030] [The include file structure shall be as follows:

- ComStackTypes.h shall include StandardTypes.h
- Communication related basic software modules shall include ComStackTypes.h

]([SRS\\_BSW\\_00024](#))

## 6 Requirements Tracing

The following tables reference the requirements specified in SRS BSW General [1] and links to the fulfillment of these. Please note that if column “Satisfied by” is empty for a specific requirement this means that this requirement is not fulfilled by this document.

Requirement	Description	Satisfied by
[SRS_BSW_00004]	All Basic SW Modules shall perform a pre-processor check of the versions of all imported include files	<a href="#">[SWS_Std_00015]</a> <a href="#">[SWS_Std_91003]</a>
[SRS_BSW_00005]	Modules of the $\mu$ C Abstraction Layer (MCAL) may not have hard coded horizontal interfaces	<a href="#">[SWS_Std_00999]</a>
[SRS_BSW_00006]	The source code of software modules above the $\mu$ C Abstraction Layer (MCAL) shall not be processor and compiler dependent.	<a href="#">[SWS_Std_00999]</a>
[SRS_BSW_00007]	All Basic SW Modules written in C language shall conform to the MISRA C 2012 Standard.	<a href="#">[SWS_Std_00999]</a>
[SRS_BSW_00009]	All Basic SW Modules shall be documented according to a common standard.	<a href="#">[SWS_Std_00999]</a>
[SRS_BSW_00010]	The memory consumption of all Basic SW Modules shall be documented for a defined configuration for all supported platforms.	<a href="#">[SWS_Std_00999]</a>
[SRS_BSW_00024]	No description	<a href="#">[SWS_Std_00030]</a>
[SRS_BSW_00059]	No description	<a href="#">[SWS_Std_00014]</a>
[SRS_BSW_00101]	The Basic Software Module shall be able to initialize variables and hardware in a separate initialization function	<a href="#">[SWS_Std_00999]</a>
[SRS_BSW_00158]	No description	<a href="#">[SWS_Std_00999]</a>
[SRS_BSW_00159]	All modules of the AUTOSAR Basic Software shall support a tool based configuration	<a href="#">[SWS_Std_00999]</a>



Requirement	Description	Satisfied by
[SRS_BSW_00160]	Configuration files of AUTOSAR Basic SW module shall be readable for human beings	[SWS_Std_00999]
[SRS_BSW_00161]	The AUTOSAR Basic Software shall provide a microcontroller abstraction layer which provides a standardized interface to higher software layers	[SWS_Std_00004] [SWS_Std_00999]
[SRS_BSW_00162]	The AUTOSAR Basic Software shall provide a hardware abstraction layer	[SWS_Std_00999]
[SRS_BSW_00164]	The Implementation of interrupt service routines shall be done by the Operating System, complex drivers or modules	[SWS_Std_00999]
[SRS_BSW_00167]	All AUTOSAR Basic Software Modules shall provide configuration rules and constraints to enable plausibility checks	[SWS_Std_00999]
[SRS_BSW_00168]	SW components shall be tested by a function defined in a common API in the Basis-SW	[SWS_Std_00999]
[SRS_BSW_00170]	The AUTOSAR SW Components shall provide information about their dependency from faults, signal qualities, driver demands	[SWS_Std_00999]
[SRS_BSW_00171]	Optional functionality of a Basic-SW component that is not required in the ECU shall be configurable at pre-compile-time	[SWS_Std_00999]
[SRS_BSW_00172]	The scheduling strategy that is built inside the Basic Software Modules shall be compatible with the strategy used in the system	[SWS_Std_00999]
[SRS_BSW_00300]	All AUTOSAR Basic Software Modules shall be identified by an unambiguous name	[SWS_Std_00999]
[SRS_BSW_00301]	All AUTOSAR Basic Software Modules shall only import the necessary information	[SWS_Std_00999]
[SRS_BSW_00302]	All AUTOSAR Basic Software Modules shall only export information needed by other modules	[SWS_Std_00999]
[SRS_BSW_00304]	All AUTOSAR Basic Software Modules shall use only AUTOSAR data types instead of native C data types	[SWS_Std_00999]
[SRS_BSW_00305]	Data types naming convention	[SWS_Std_00017] [SWS_Std_00019] [SWS_Std_00999] [SWS_Std_91001] [SWS_Std_91002]

Requirement	Description	Satisfied by
[SRS_BSW_00306]	AUTOSAR Basic Software Modules shall be compiler and platform independent	[SWS_Std_00999]
[SRS_BSW_00307]	Global variables naming convention	[SWS_Std_00999]
[SRS_BSW_00308]	AUTOSAR Basic Software Modules shall not define global data in their header files, but in the C file	[SWS_Std_00999]
[SRS_BSW_00309]	All AUTOSAR Basic Software Modules shall indicate all global data with read-only purposes by explicitly assigning the const keyword	[SWS_Std_00999]
[SRS_BSW_00310]	API naming convention	[SWS_Std_00999]
[SRS_BSW_00312]	Shared code shall be reentrant	[SWS_Std_00999]
[SRS_BSW_00314]	All internal driver modules shall separate the interrupt frame definition from the service routine	[SWS_Std_00999]
[SRS_BSW_00321]	The version numbers of AUTOSAR Basic Software Modules shall be enumerated according specific rules	[SWS_Std_00999]
[SRS_BSW_00323]	All AUTOSAR Basic Software Modules shall check passed API parameters for validity	[SWS_Std_00999]
[SRS_BSW_00325]	The runtime of interrupt service routines and functions that are running in interrupt context shall be kept short	[SWS_Std_00999]
[SRS_BSW_00327]	Error values naming convention	[SWS_Std_00999]
[SRS_BSW_00330]	It shall be allowed to use macros instead of functions where source code is used and runtime is critical	[SWS_Std_00999]
[SRS_BSW_00331]	All Basic Software Modules shall strictly separate error and status information	[SWS_Std_00999]
[SRS_BSW_00333]	For each callback function it shall be specified if it is called from interrupt context or not	[SWS_Std_00999]
[SRS_BSW_00334]	All Basic Software Modules shall provide an XML file that contains the meta data	[SWS_Std_00999]
[SRS_BSW_00335]	Status values naming convention	[SWS_Std_00999]
[SRS_BSW_00336]	Basic SW module shall be able to shutdown	[SWS_Std_00999]
[SRS_BSW_00337]	Classification of development errors	[SWS_Std_00999]
[SRS_BSW_00339]	Reporting of production relevant error status	[SWS_Std_00999]

Requirement	Description	Satisfied by
[SRS_BSW_00341]	Module documentation shall contain all needed informations	[SWS_Std_00999]
[SRS_BSW_00342]	It shall be possible to create an AUTOSAR ECU out of modules provided as source code and modules provided as object code, even mixed	[SWS_Std_00999]
[SRS_BSW_00343]	The unit of time for specification and configuration of Basic SW modules shall be preferably in physical time unit	[SWS_Std_00999]
[SRS_BSW_00344]	BSW Modules shall support link-time configuration	[SWS_Std_00999]
[SRS_BSW_00345]	BSW Modules shall support pre-compile configuration	[SWS_Std_00999]
[SRS_BSW_00346]	All AUTOSAR Basic Software Modules shall provide at least a basic set of module files	[SWS_Std_00999]
[SRS_BSW_00347]	A Naming separation of different instances of BSW drivers shall be in place	[SWS_Std_00999]
[SRS_BSW_00348]	All AUTOSAR standard types and constants shall be placed and organized in a standard type header file	[SWS_Std_00007] [SWS_Std_00010] [SWS_Std_00013]
[SRS_BSW_00350]	All AUTOSAR Basic Software Modules shall allow the enabling/disabling of detection and reporting of development errors.	[SWS_Std_00999]
[SRS_BSW_00353]	All integer type definitions of target and compiler specific scope shall be placed and organized in a single type header	[SWS_Std_00999]
[SRS_BSW_00357]	For success/failure of an API call a standard return type shall be defined	[SWS_Std_00005] [SWS_Std_00006] [SWS_Std_00011]
[SRS_BSW_00358]	The return type of init() functions implemented by AUTOSAR Basic Software Modules shall be void	[SWS_Std_00999]
[SRS_BSW_00359]	All AUTOSAR Basic Software Modules callback functions shall avoid return types other than void if possible	[SWS_Std_00999]
[SRS_BSW_00360]	AUTOSAR Basic Software Modules callback functions are allowed to have parameters	[SWS_Std_00999]
[SRS_BSW_00361]	All mappings of not standardized keywords of compiler specific scope shall be placed and organized in a compiler specific type and keyword header	[SWS_Std_00999]

Requirement	Description	Satisfied by
[SRS_BSW_00369]	All AUTOSAR Basic Software Modules shall not return specific development error codes via the API	[SWS_Std_00999]
[SRS_BSW_00371]	No description	[SWS_Std_00999]
[SRS_BSW_00373]	The main processing function of each AUTOSAR Basic Software Module shall be named according the defined convention	[SWS_Std_00999]
[SRS_BSW_00374]	All Basic Software Modules shall provide a readable module vendor identification	[SWS_Std_00999]
[SRS_BSW_00375]	Basic Software Modules shall report wake-up reasons	[SWS_Std_00999]
[SRS_BSW_00377]	A Basic Software Module can return a module specific types	[SWS_Std_00999]
[SRS_BSW_00378]	AUTOSAR shall provide a boolean type	[SWS_Std_00999]
[SRS_BSW_00379]	All software modules shall provide a module identifier in the header file and in the module XML description file.	[SWS_Std_00999]
[SRS_BSW_00380]	Configuration parameters being stored in memory shall be placed into separate c-files	[SWS_Std_00999]
[SRS_BSW_00381]	No description	[SWS_Std_00999]
[SRS_BSW_00383]	The Basic Software Module specifications shall specify which other configuration files from other modules they use at least in the description	[SWS_Std_00999]
[SRS_BSW_00385]	List possible error notifications	[SWS_Std_00999]
[SRS_BSW_00386]	The BSW shall specify the configuration for detecting an error	[SWS_Std_00999]
[SRS_BSW_00388]	Containers shall be used to group configuration parameters that are defined for the same object	[SWS_Std_00999]
[SRS_BSW_00389]	Containers shall have names	[SWS_Std_00999]
[SRS_BSW_00390]	Parameter content shall be unique within the module	[SWS_Std_00999]
[SRS_BSW_00392]	Parameters shall have a type	[SWS_Std_00999]
[SRS_BSW_00393]	Parameters shall have a range	[SWS_Std_00999]
[SRS_BSW_00394]	The Basic Software Module specifications shall specify the scope of the configuration parameters	[SWS_Std_00999]
[SRS_BSW_00395]	The Basic Software Module specifications shall list all configuration parameter dependencies	[SWS_Std_00999]

Requirement	Description	Satisfied by
[SRS_BSW_00396]	The Basic Software Module specifications shall specify the supported configuration classes for changing values and multiplicities for each parameter/container	[SWS_Std_00999]
[SRS_BSW_00397]	The configuration parameters in pre-compile time are fixed before compilation starts	[SWS_Std_00999]
[SRS_BSW_00398]	The link-time configuration is achieved on object code basis in the stage after compiling and before linking	[SWS_Std_00999]
[SRS_BSW_00399]	Parameter-sets shall be located in a separate segment and shall be loaded after the code	[SWS_Std_00999]
[SRS_BSW_00400]	Parameter shall be selected from multiple sets of parameters after code has been loaded and started	[SWS_Std_00999]
[SRS_BSW_00401]	Documentation of multiple instances of configuration parameters shall be available	[SWS_Std_00999]
[SRS_BSW_00404]	BSW Modules shall support post-build configuration	[SWS_Std_00999]
[SRS_BSW_00405]	BSW Modules shall support multiple configuration sets	[SWS_Std_00999]
[SRS_BSW_00406]	A static status variable denoting if a BSW module is initialized shall be initialized with value 0 before any APIs of the BSW module is called	[SWS_Std_00999]
[SRS_BSW_00407]	Each BSW module shall provide a function to read out the version information of a dedicated module implementation	[SWS_Std_00999]
[SRS_BSW_00408]	All AUTOSAR Basic Software Modules configuration parameters shall be named according to a specific naming rule	[SWS_Std_00999]
[SRS_BSW_00409]	All production code error ID symbols are defined by the Dem module and shall be retrieved by the other BSW modules from Dem configuration	[SWS_Std_00999]
[SRS_BSW_00410]	Compiler switches shall have defined values	[SWS_Std_00999]
[SRS_BSW_00411]	All AUTOSAR Basic Software Modules shall apply a naming rule for enabling/disabling the existence of the API	[SWS_Std_00999]
[SRS_BSW_00412]	No description	[SWS_Std_00999]

Requirement	Description	Satisfied by
[SRS_BSW_00413]	An index-based accessing of the instances of BSW modules shall be done	[SWS_Std_00999]
[SRS_BSW_00414]	Init functions shall have a pointer to a configuration structure as single parameter	[SWS_Std_00999]
[SRS_BSW_00415]	Interfaces which are provided exclusively for one module shall be separated into a dedicated header file	[SWS_Std_00999]
[SRS_BSW_00416]	The sequence of modules to be initialized shall be configurable	[SWS_Std_00999]
[SRS_BSW_00417]	Software which is not part of the SW-C shall report error events only after the DEM is fully operational.	[SWS_Std_00999]
[SRS_BSW_00419]	If a pre-compile time configuration parameter is implemented as "const" it should be placed into a separate c-file	[SWS_Std_00999]
[SRS_BSW_00422]	Pre-de-bouncing of error status information is done within the DEM	[SWS_Std_00999]
[SRS_BSW_00423]	BSW modules with AUTOSAR interfaces shall be describable with the means of the SW-C Template	[SWS_Std_00999]
[SRS_BSW_00424]	BSW module main processing functions shall not be allowed to enter a wait state	[SWS_Std_00999]
[SRS_BSW_00425]	The BSW module description template shall provide means to model the defined trigger conditions of schedulable objects	[SWS_Std_00999]
[SRS_BSW_00426]	BSW Modules shall ensure data consistency of data which is shared between BSW modules	[SWS_Std_00999]
[SRS_BSW_00427]	ISR functions shall be defined and documented in the BSW module description template	[SWS_Std_00999]
[SRS_BSW_00428]	A BSW module shall state if its main processing function(s) has to be executed in a specific order or sequence	[SWS_Std_00999]
[SRS_BSW_00429]	Access to OS is restricted	[SWS_Std_00999]
[SRS_BSW_00432]	Modules should have separate main processing functions for read/receive and write/transmit data path	[SWS_Std_00999]
[SRS_BSW_00433]	Main processing functions are only allowed to be called from task bodies provided by the BSW Scheduler	[SWS_Std_00999]

Requirement	Description	Satisfied by
[SRS_BSW_00441]	Naming convention for type, macro and function	[SWS_Std_00011]
[SRS_BSW_00452]	Classification of runtime errors	[SWS_Std_00999]
[SRS_BSW_00458]	Classification of production errors	[SWS_Std_00999]
[SRS_BSW_00466]	Classification of extended production errors	[SWS_Std_00999]
[SRS_BSW_00473]	Classification of transient faults	[SWS_Std_00999]
[SRS_BSW_00480]	NullPointer Errors shall follow a naming rule	[SWS_Std_00031]
[SRS_Xfrm_00002]	A transformer shall provide fixed interfaces	[SWS_Std_00027] [SWS_Std_00028] [SWS_Std_00029]
[SRS_Xfrm_00004]	A transformer shall support error handling	[SWS_Std_00021] [SWS_Std_00022] [SWS_Std_00024] [SWS_Std_00025]
[SRS_Xfrm_00008]	A transformer shall specify its output format	[SWS_Std_00022] [SWS_Std_00023]
[SRS_Xfrm_00009]	A fixed set of transformer classes shall exist	[SWS_Std_00023]
[SRS_Xfrm_00010]	Each transformer class shall provide a fixed set of abstract errors	[SWS_Std_00024]
[SRS_Xfrm_00011]	A transformer shall belong to a specific transformer class	[SWS_Std_00026]

## 7 Functional specification

### 7.1 General issues

[SWS\_Std\_00004] [It is not allowed to add any project or supplier specific extension to this file. Any extension invalidates the AUTOSAR conformity.] ([SRS\\_BSW\\_00161](#))

[SWS\_Std\_00014] [The standard types header file shall be protected against multiple inclusion:

```

1 #ifndef STD_TYPES_H
2
3 #define STD_TYPES_H
4
5 ..
6
7 /*
8
9 * Contents of file
10
11 */
12
13 ..
14
15 #endif /* STD_TYPES_H */
    
```

] ([SRS\\_BSW\\_00059](#))

## 7.2 Error Classification

The section "Error Handling" of the document "General Specification of Basic Software Modules" describes the error handling of the Basic Software in detail. Above all, it constitutes a classification scheme consisting of five error types which may occur in BSW modules.

Based on this foundation, the following section specifies particular errors arranged in the respective subsections below.

### 7.2.1 Development Errors

There are no development errors.

### 7.2.2 Runtime Errors

There are no runtime errors.

### 7.2.3 Transient Faults

There are no transient faults.

### 7.2.4 Production Errors

There are no production errors.

### 7.2.5 Extended Production Errors

There are no extended production errors.

## 8 API specification

### 8.1 Type definitions

#### 8.1.1 Std\_ReturnType

[SWS\_Std\_00005] [



<b>Name</b>	Std_ReturnType		
<b>Kind</b>	Type		
<b>Derived from</b>	uint8		
<b>Range</b>	E_OK	0	see 8.2.1, SWS_Std_00006
	E_NOT_OK	1	see 8.2.1, SWS_Std_00006
	0x02-0x3F	2	Available to user specific errors
<b>Description</b>	<p>This type can be used as standard API return type which is shared between the RTE and the BSW modules. It shall be defined as follows:</p> <pre>typedef uint8 Std_ReturnType;</pre>		
<b>Available via</b>	Std_Types.h		

|(SRS\_BSW\_00357)

**[SWS\_Std\_00011]** [The Std\_ReturnType shall normally be used with value E\_OK or E\_NOT\_OK. If those return values are not sufficient user specific values can be defined by using the 6 least specific bits.

For the naming of the user defined values the module prefix shall be used as requested in SRS\_BSW\_00441

Layout of the Std\_ReturnType shall be as stated in the RTE specification. Bit 7 and Bit 8 are reserved and defined by the RTE specification.

|(SRS\_BSW\_00357, SRS\_BSW\_00441)

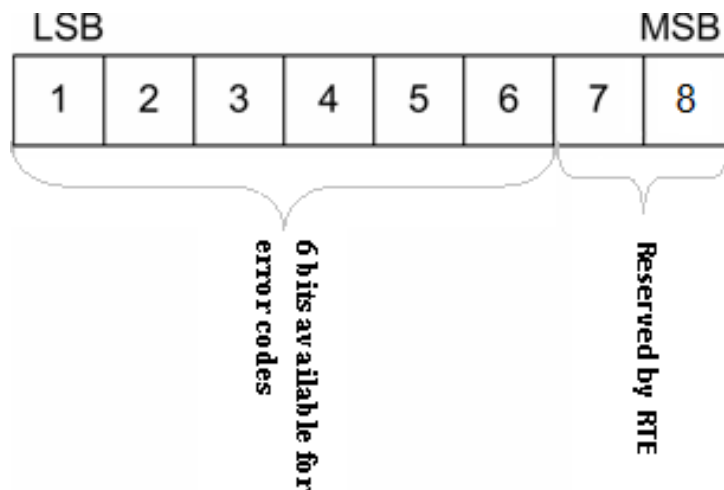


Figure 8.1: Layout of Std\_Return\_Type

### 8.1.2 Std\_VersionInfoType

**[SWS\_Std\_00015]** [

<b>Name</b>	Std_VersionInfoType	
<b>Kind</b>	Structure	
<b>Elements</b>	vendorID	
	<b>Type</b>	uint16
	<b>Comment</b>	–
	moduleID	
	<b>Type</b>	uint16
	<b>Comment</b>	–
	sw_major_version	
	<b>Type</b>	uint8
	<b>Comment</b>	–
	sw_minor_version	
	<b>Type</b>	uint8
	<b>Comment</b>	–
sw_patch_version		
<b>Type</b>	uint8	
<b>Comment</b>	–	
<b>Description</b>	This type shall be used to request the version of a BSW module using the <Module name>_GetVersionInfo() function.	
<b>Available via</b>	Std_Types.h	

]([SRS\\_BSW\\_00004](#))

### 8.1.3 Std\_TransformerError

The data type Std\_TransformerError is a struct which contains the error code and the transformer class to which the error belongs.

The data type Std\_TransformerError shall be defined as follows:

[[SWS\\_Std\\_00021](#)] [

<b>Name</b>	Std_TransformerError	
<b>Kind</b>	Structure	
<b>Elements</b>	errorCode	
	<b>Type</b>	<a href="#">Std_TransformerErrorCode</a>
	<b>Comment</b>	The specific meaning of the values of Std_TransformerErrorCode is to be seen for the specific transformer chain for which the data type represents the transformer error.
	transformerClass	
	<b>Type</b>	<a href="#">Std_TransformerClass</a>
	<b>Comment</b>	–
<b>Description</b>	Std_TransformerError represents a transformer error in the context of a certain transformer chain.	
<b>Available via</b>	Std_Types.h	

]([SRS\\_Xfrm\\_00004](#))

The values are specified for each transformer class in [26, ASWS Transformer General].

**[SWS\_Std\_00022]** [

<b>Name</b>	Std_TransformerErrorCode		
<b>Kind</b>	Type		
<b>Derived from</b>	uint8		
<b>Range</b>	-	-	The values are specified for each transformer class in ASWS_TransformerGeneral.
<b>Description</b>	The type of the Std_TransformerError.		
<b>Available via</b>	Std_Types.h		

]([SRS\\_Xfrm\\_00004](#), [SRS\\_Xfrm\\_00008](#))

The Std\_TransformerClass represents the transformer class in which the error occurred.

**[SWS\_Std\_00023]** [The underlying data type of the type Std\_TransformerClass shall be uint8.]([SRS\\_Xfrm\\_00009](#), [SRS\\_Xfrm\\_00008](#))

The type Std\_TransformerClass shall be an enumeration with the following elements where each element represents a transformer class:

**[SWS\_Std\_00024]** [

<b>Name</b>	Std_TransformerClass		
<b>Kind</b>	Type		
<b>Derived from</b>	uint8		
<b>Range</b>	STD_TRANSFORMER_UNSPECIFIED	0x00	Transformer of an unspecified transformer class.
	STD_TRANSFORMER_SERIALIZER	0x01	Transformer of a serializer class.
	STD_TRANSFORMER_SAFETY	0x02	Transformer of a safety class.
	STD_TRANSFORMER_SECURITY	0x03	Transformer of a security class.
	STD_TRANSFORMER_CUSTOM	0xFF	Transformer of a custom class not standardized by AUTOSAR.
<b>Description</b>	-		
<b>Available via</b>	Std_Types.h		

]([SRS\\_Xfrm\\_00004](#), [SRS\\_Xfrm\\_00010](#))

**[SWS\_Std\_00025]** [The transformer class STD\_TRANSFORMER\_UNSPECIFIED shall be used if no transformer error occurred.]([SRS\\_Xfrm\\_00004](#))

**[SWS\_Std\_00026]** [The mapping from transformerClass of TransformationTechnology to value of data type Std\_TransformerClass shall be:

- transformerClass serializer - STD\_TRANSFORMER\_SERIALIZER
- transformerClass safety - STD\_TRANSFORMER\_SAFETY

- transformerClass security - STD\_TRANSFORMER\_SECURITY
- transformerClass custom - STD\_TRANSFORMER\_CUSTOM

](SRS\_Xfrm\_00011)

### 8.1.4 Std\_TransformerForward

The data type Std\_TransformerForward is a struct which contains the forwarded status and the transformer class to which the forwarded status applies.

The data type Std\_TransformerForward shall be defined as follows:

[SWS\_Std\_00027]{DRAFT} [

<b>Name</b>	Std_TransformerForward (draft)	
<b>Kind</b>	Structure	
<b>Elements</b>	errorCode	
	<b>Type</b>	Std_TransformerForwardCode
	<b>Comment</b>	–
	transformerClass	
	<b>Type</b>	Std_TransformerClass
	<b>Comment</b>	–
<b>Description</b>	– <b>Tags:</b> atp.Status=draft	
<b>Available via</b>	Std_Types.h	

](SRS\_Xfrm\_00002) The Std\_TransformerForward represents a forwarded transformer status in the context of a certain transformer chain. The specific meaning of the values of Std\_TransformerForward are always to be seen for the specific transformer chain for which the data type represents the transformer status.

[SWS\_Std\_00028]{DRAFT} [

A safety transformer shall handle the forwarded status according to table 8.1.

](SRS\_Xfrm\_00002)

Error Name	Error Code	Description
E_OK	0x00	No specific error to be injected
E_SAFETY_INVALID_REP	0x01	Repeat the last used sequence number.
E_SAFETY_INVALID_CRC	0x03	Generate a deliberately wrong CRC.
E_SAFETY_INVALID_SEQ	0x02	Use a wrong sequence number.

**Table 8.1: Safety Transformer Error Codes**

The underlying data type of the type Std\_TransformerForwardCode shall be uint8:

[SWS\_Std\_00029]{DRAFT} [

<b>Name</b>	Std_TransformerForwardCode (draft)		
<b>Kind</b>	Type		
<b>Derived from</b>	uint8		
<b>Range</b>	E_OK	0x00	–
	E_SAFETY_INVALID_REP	0x01	–
	E_SAFETY_INVALID_SEQ	0x02	–
	E_SAFETY_INVALID_CRC	0x03	–
<b>Description</b>	– <b>Tags:</b> atp.Status=draft		
<b>Available via</b>	Std_Types.h		

]([SRS\\_Xfrm\\_00002](#))

### 8.1.5 Std\_MessageTypeType

[SWS\_Std\_91001] [

<b>Name</b>	Std_MessageTypeType		
<b>Kind</b>	Type		
<b>Derived from</b>	uint8		
<b>Range</b>	STD_MESSAGE_TYPE_REQUEST	0x00	Message type for a request message
	STD_MESSAGE_TYPE_RESPONSE	0x01	Message type for a response message
	0x02-0x3F	0x02	reserved for future message type
<b>Description</b>	This type is used to encode the different type of messages. - Currently this encoding is limited to the distinction between requests and responses in C/S communication.		
<b>Available via</b>	Std_Types.h		

]([SRS\\_BSW\\_00305](#))

[SWS\_Std\_00017] [The Std\_MessageTypeType shall be used to encode the different types of messages exchanged in AUTOSAR. - Currently this encoding is limited to the distinction between requests and responses in C/S communication.] ([SRS\\_BSW\\_00305](#))

Note: In future AUTOSAR release, the literals for this type may be extended with additional message types.

### 8.1.6 Std\_MessageResultType

[SWS\_Std\_91002] [

<b>Name</b>	Std_MessageResultType		
<b>Kind</b>	Type		
<b>Derived from</b>	uint8		
<b>Range</b>	STD_MESSAGERESULT_OK	0x00	STD_MESSAGERESULT_OK
	STD_MESSAGERESULT_ERROR	0x01	Messageresult for an ERROR response
	0x02-0x3F	0x02	reserved for future message results
<b>Description</b>	This type is used to encode different types of results for response messages. - Currently this encoding is limited to the distinction between OK and ERROR responses.		
<b>Available via</b>	Std_Types.h		

]([SRS\\_BSW\\_00305](#))

**[SWS\_Std\_00019]** [The Std\_MessageResultType shall be used to encode the different types of results for response messages. - Currently this encoding is limited to the distinction between OK and ERROR responses.]([SRS\\_BSW\\_00305](#))

Note: In future AUTOSAR release, the literals for this type may be extended with additional result types.

### 8.1.7 Std\_ExtractProtocolHeaderFieldsType

**[SWS\_Std\_91003]** [

<b>Name</b>	Std_ExtractProtocolHeaderFieldsType		
<b>Kind</b>	Function Pointer		
<b>Syntax</b>	<pre>Std_ReturnType (*Std_ExtractProtocolHeaderFieldsType) (     const uint8* buffer,     uint32 bufferLength,     Std_MessageType* messageType,     Std_MessageResultType* messageResult )</pre>		
<b>Parameters (in)</b>	buffer	Buffer allocated by the RTE, where the transformed data has to be stored by the transformer	
	bufferLength	Length of the buffer	
<b>Parameters (inout)</b>	None		
<b>Parameters (out)</b>	messageType	Canonical representation of the message type (extracted from the transformers protocol header).	
	messageResult	Canonical representation of the message result type (extracted from the transformers protocol header).	
<b>Return value</b>	<a href="#">Std_ReturnType</a>	-	
<b>Description</b>	Type for the function pointer to extract the relevant protocol header fields of the message and the type of the message result of a transformer. - At the time being, this is limited to the types used for C/S communication (i.e., REQUEST and RESPONSE and OK and ERROR).		
<b>Available via</b>	Std_Types.h		

]([SRS\\_BSW\\_00004](#))

## 8.2 Symbol definitions

### 8.2.1 E\_OK, E\_NOT\_OK

[SWS\_Std\_00006] [

<b>Name</b>	E_OK, E_NOT_OK		
<b>Kind</b>	Enumeration		
<b>Range</b>	E_OK	0x00u	--
	E_NOT_OK	0x01u	--
<b>Description</b>	<p>Because E_OK is already defined within OSEK, the symbol E_OK has to be shared. To avoid name clashes and redefinition problems, the symbols have to be defined in the following way (approved within implementation):</p> <pre>#ifndef STATUSTYPEDEFINED #define STATUSTYPEDEFINED #define E_OK 0x00u  typedef unsigned char StatusType; /* OSEK compliance */ #endif  #define E_NOT_OK 0x01u</pre>		
<b>Available via</b>	Std_Types.h		

]([SRS\\_BSW\\_00357](#))

### 8.2.2 STD\_HIGH, STD\_LOW

[SWS\_Std\_00007] [

<b>Name</b>	STD_HIGH, STD_LOW		
<b>Kind</b>	Enumeration		
<b>Range</b>	STD_LOW	0x00u	--
	STD_HIGH	0x01u	--
<b>Description</b>	<p>The symbols STD_HIGH and STD_LOW shall be defined as follows:</p> <pre>#define STD_HIGH 0x01u /* Physical state 5V or 3.3V */ #define STD_LOW 0x00u /* Physical state 0V */</pre>		
<b>Available via</b>	Std_Types.h		

]([SRS\\_BSW\\_00348](#))

### 8.2.3 STD\_ACTIVE, STD\_IDLE

[SWS\_Std\_00013] [

<b>Name</b>	STD_ACTIVE, STD_IDLE		
<b>Kind</b>	Enumeration		



△

<b>Range</b>	STD_IDLE	0x00u	–
	STD_ACTIVE	0x01u	–
<b>Description</b>	The symbols STD_ACTIVE and STD_IDLE shall be defined as follows: #define STD_ACTIVE 0x01u /* Logical state active */ #define STD_IDLE 0x00u /* Logical state idle */		
<b>Available via</b>	Std_Types.h		

](SRS\_BSW\_00348)

## 8.2.4 STD\_ON, STD\_OFF

[SWS\_Std\_00010] [

<b>Name</b>	STD_ON, STD_OFF		
<b>Kind</b>	Enumeration		
<b>Range</b>	STD_OFF	0x00u	–
	STD_ON	0x01u	–
<b>Description</b>	The symbols STD_ON and STD_OFF shall be defined as follows: #define STD_ON 0x01u #define STD_OFF 0x00u		
<b>Available via</b>	Std_Types.h		

](SRS\_BSW\_00348)

## 8.2.5 NULL\_PTR

[SWS\_Std\_00031] [

<b>Define</b>	NULL_PTR	
<b>Range</b>	void pointer	((void *)0)
<b>Description</b>	The compiler abstraction shall provide the NULL_PTR define with a void pointer to zero definition.	

](SRS\_BSW\_00480)

## 8.3 Function definitions

Not applicable.



## 9 Sequence diagrams

Not applicable.

## 10 Configuration specification

Not applicable.

## A Not applicable requirements

**[SWS\_Std\_00999]** [These requirements are not applicable to this specification.]  
([SRS\\_BSW\\_00300](#), [SRS\\_BSW\\_00301](#), [SRS\\_BSW\\_00302](#), [SRS\\_BSW\\_00304](#),  
[SRS\\_BSW\\_00305](#), [SRS\\_BSW\\_00306](#), [SRS\\_BSW\\_00307](#), [SRS\\_BSW\\_00308](#), [SRS\\_](#)  
[BSW\\_00309](#), [SRS\\_BSW\\_00310](#), [SRS\\_BSW\\_00312](#), [SRS\\_BSW\\_00314](#), [SRS\\_](#)  
[BSW\\_00321](#), [SRS\\_BSW\\_00325](#), [SRS\\_BSW\\_00327](#), [SRS\\_BSW\\_00330](#), [SRS\\_](#)  
[BSW\\_00331](#), [SRS\\_BSW\\_00333](#), [SRS\\_BSW\\_00334](#), [SRS\\_BSW\\_00335](#), [SRS\\_](#)  
[BSW\\_00342](#), [SRS\\_BSW\\_00343](#), [SRS\\_BSW\\_00341](#), [SRS\\_BSW\\_00346](#), [SRS\\_](#)  
[BSW\\_00347](#), [SRS\\_BSW\\_00350](#), [SRS\\_BSW\\_00353](#), [SRS\\_BSW\\_00358](#), [SRS\\_](#)  
[BSW\\_00359](#), [SRS\\_BSW\\_00360](#), [SRS\\_BSW\\_00361](#), [SRS\\_BSW\\_00371](#), [SRS\\_](#)  
[BSW\\_00373](#), [SRS\\_BSW\\_00374](#), [SRS\\_BSW\\_00377](#), [SRS\\_BSW\\_00378](#), [SRS\\_](#)  
[BSW\\_00379](#), [SRS\\_BSW\\_00401](#), [SRS\\_BSW\\_00408](#), [SRS\\_BSW\\_00410](#), [SRS\\_](#)  
[BSW\\_00411](#), [SRS\\_BSW\\_00413](#), [SRS\\_BSW\\_00414](#), [SRS\\_BSW\\_00415](#), [SRS\\_](#)  
[BSW\\_00005](#), [SRS\\_BSW\\_00006](#), [SRS\\_BSW\\_00007](#), [SRS\\_BSW\\_00009](#), [SRS\\_](#)  
[BSW\\_00010](#), [SRS\\_BSW\\_00158](#), [SRS\\_BSW\\_00160](#), [SRS\\_BSW\\_00161](#), [SRS\\_](#)  
[BSW\\_00162](#), [SRS\\_BSW\\_00164](#), [SRS\\_BSW\\_00172](#), [SRS\\_BSW\\_00344](#), [SRS\\_](#)  
[BSW\\_00404](#), [SRS\\_BSW\\_00405](#), [SRS\\_BSW\\_00345](#), [SRS\\_BSW\\_00159](#), [SRS\\_](#)  
[BSW\\_00167](#), [SRS\\_BSW\\_00171](#), [SRS\\_BSW\\_00170](#), [SRS\\_BSW\\_00380](#), [SRS\\_](#)  
[BSW\\_00419](#), [SRS\\_BSW\\_00381](#), [SRS\\_BSW\\_00412](#), [SRS\\_BSW\\_00383](#), [SRS\\_](#)  
[BSW\\_00388](#), [SRS\\_BSW\\_00389](#), [SRS\\_BSW\\_00390](#), [SRS\\_BSW\\_00392](#), [SRS\\_](#)  
[BSW\\_00393](#), [SRS\\_BSW\\_00394](#), [SRS\\_BSW\\_00395](#), [SRS\\_BSW\\_00396](#), [SRS\\_](#)  
[BSW\\_00397](#), [SRS\\_BSW\\_00398](#), [SRS\\_BSW\\_00399](#), [SRS\\_BSW\\_00400](#), [SRS\\_](#)  
[BSW\\_00375](#), [SRS\\_BSW\\_00101](#), [SRS\\_BSW\\_00416](#), [SRS\\_BSW\\_00406](#), [SRS\\_](#)  
[BSW\\_00168](#), [SRS\\_BSW\\_00407](#), [SRS\\_BSW\\_00423](#), [SRS\\_BSW\\_00424](#), [SRS\\_](#)  
[BSW\\_00425](#), [SRS\\_BSW\\_00426](#), [SRS\\_BSW\\_00427](#), [SRS\\_BSW\\_00428](#), [SRS\\_](#)  
[BSW\\_00429](#), [SRS\\_BSW\\_00432](#), [SRS\\_BSW\\_00433](#), [SRS\\_BSW\\_00336](#), [SRS\\_](#)  
[BSW\\_00337](#), [SRS\\_BSW\\_00369](#), [SRS\\_BSW\\_00339](#), [SRS\\_BSW\\_00422](#), [SRS\\_](#)  
[BSW\\_00417](#), [SRS\\_BSW\\_00323](#), [SRS\\_BSW\\_00409](#), [SRS\\_BSW\\_00385](#), [SRS\\_](#)  
[BSW\\_00386](#), [SRS\\_BSW\\_00452](#), [SRS\\_BSW\\_00473](#), [SRS\\_BSW\\_00458](#), [SRS\\_](#)  
[BSW\\_00466](#))