

Document Title	Specification of TTCAN Interface
Document Owner	AUTOSAR
Document Responsibility	AUTOSAR
Document Identification No	433

Document Status	published
Part of AUTOSAR Standard	Classic Platform
Part of Standard Release	R21-11

Document Change History			
Date	Release	Changed by	Description
2021-11-25	R21-11	AUTOSAR Release Management	<ul style="list-style-type: none"> • No content changes
2020-11-30	R20-11	AUTOSAR Release Management	<ul style="list-style-type: none"> • No content changes
2019-11-28	R19-11	AUTOSAR Release Management	<ul style="list-style-type: none"> • No content changes • Changed Document Status from Final to published
2018-10-31	4.4.0	AUTOSAR Release Management	<ul style="list-style-type: none"> • Header File Cleanup
2017-12-08	4.3.1	AUTOSAR Release Management	<ul style="list-style-type: none"> • Replace Can_ReturnType with Std_ReturnType overlay • Editorial changes
2016-11-30	4.3.0	AUTOSAR Release Management	<ul style="list-style-type: none"> • Remove CCMSM • Dem API update • Editorial changes
2015-07-31	4.2.2	AUTOSAR Release Management	<ul style="list-style-type: none"> • Fixed error section • Editorial changes
2014-10-31	4.2.1	AUTOSAR Release Management	<ul style="list-style-type: none"> • Improved extended production error description • Updated disclaimer • Editorial changes

2014-03-31	4.1.3	AUTOSAR Release Management	<ul style="list-style-type: none"> Adapted description of exported TTCAN EcuC containers Editorial changes
2013-10-31	4.1.2	AUTOSAR Release Management	<ul style="list-style-type: none"> Editorial changes
2013-03-15	4.1.1	AUTOSAR Administration	<ul style="list-style-type: none"> Updated scope of parameters Formal update for traceability analysis Aligned to General Documents Adapted Production Error Specification
2011-12-22	4.0.3	AUTOSAR Administration	<ul style="list-style-type: none"> Updated <code><User_TriggerTransmit></code> function with generated artifact from ComStack harmonization Described behaviour of negative return value of <code><User_TriggerTransmit></code>
2010-02-02	3.1.4	AUTOSAR Administration	<ul style="list-style-type: none"> Initial Release

Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

Table of Contents

1	Introduction and functional overview	7
2	Acronyms and Abbreviations	9
3	Related documentation	11
3.1	Input documents & related standards and norms	11
3.2	Related specification	11
4	Constraints and assumptions	12
5	Dependencies to other modules	13
5.1	Additional TTCAN specific dependencies to other modules	13
5.1.1	AUTOSAR Operating System	13
5.1.2	AUTOSAR PDU router	13
5.1.3	Upper Protocol Layers	13
5.1.4	TTCAN Driver	13
6	Requirements Tracing	14
7	Functional specification	16
7.1	General Functionality	16
7.2	TTCAN Interface State Machine	16
7.3	TTCAN Job List	16
7.4	TTCAN Job List Execution Function	17
7.5	Data communication via TTCAN	18
7.6	TTCAN Controller mode	19
7.7	Error classification	19
7.7.1	Development Errors	19
7.7.2	Runtime Errors	20
7.7.3	Transient Faults	20
7.7.4	Production Errors	20
7.7.5	Extended Production Errors	20
8	API specification	21
8.1	Imported types	21
8.2	Type definitions	21
8.2.1	CanIf_TTTimeType	21
8.2.2	CanIf_TTMasterSlaveModeType	22
8.2.3	CanIf_TTSyncModeEnumType	22
8.2.4	CanIf_TTMasterStateType	23
8.2.5	CanIf_TTErrorLevelEnumType	23
8.2.6	CanIf_TTErrorLevelType	23
8.2.7	CanIf_TTSevereErrorEnumType	24
8.2.8	CanIf_TTTimeSourceType	24
8.2.9	CanIf_TTEventEnumType	25

8.2.10	Canlf_TTTimingErrorIRQType	25
8.3	Function definitions	25
8.3.1	Canlf_TTGetControllerTime	25
8.3.2	Canlf_TTGetMasterState	26
8.3.3	Canlf_TTGetNTUActual	27
8.3.4	Canlf_TTGetErrorLevel	28
8.3.5	Canlf_TTSetNextIsGap	29
8.3.6	Canlf_TTSetEndOfGap	30
8.3.7	Canlf_TTSetTimeCommand	31
8.3.8	Canlf_TTGlobalTimePreset	31
8.3.9	Canlf_TTSetExtClockSyncCommand	32
8.3.10	Canlf_TTSetNTUAdjust	33
8.4	Optional Function definitions	34
8.4.1	Canlf_TTJobListExec_<Controller>	34
8.4.2	Canlf_TTGetSyncQuality	34
8.4.3	Canlf_TTSetTimeMark	35
8.4.4	Canlf_TTCancelTimeMark	36
8.4.5	Canlf_TTAckTimeMark	37
8.4.6	Canlf_TTEnableTimeMarkIRQ	38
8.4.7	Canlf_TTDisableTimeMarkIRQ	38
8.4.8	Canlf_TTGetTimeMarkIRQStatus	39
8.5	Scheduled Functions	40
8.6	Callback Notifications	40
8.6.1	Canlf_TTApplWatchdogError	40
8.6.2	Canlf_TTTimingError	41
8.6.3	Canlf_TTSevereError	42
8.6.4	Canlf_TTGap	43
8.6.5	Canlf_TTStartOfCycle	43
8.6.6	Canlf_TTTimeDisc	44
8.6.7	Canlf_TTMasterStateChange	45
8.7	Expected interfaces	45
8.7.1	Mandatory interfaces	45
8.7.2	Optional Interfaces	46
8.7.3	Configurable Interfaces	47
8.7.3.1	<User_TriggerTransmit>	47
9	Sequence diagrams	49
9.1	Transmission with JobList (TriggerTransmit with decoupled buffer access)	49
9.2	Reception with Joblist	50
9.3	Job List Execution Function	51
10	Configuration specification	52
10.1	Containers and configuration parameters	52
10.1.1	CanlfTTGeneral	52
10.1.2	CanlfTTDemEventParameterRefs	54
10.1.3	CanlfTTTxFrameTriggering	55
10.1.4	CanlfTTRxFrameTriggering	56

10.2 Published information 58
A Not applicable requirements 59

1 Introduction and functional overview

This specification describes the functionality, API and the configuration for the AUTOSAR Basic Software module TTCAN Interface (called "TtcanIf" in this document).

The base for this document is [1, ISO 11898-4]. It is assumed that the reader is familiar with this specification. This document will not describe TTCAN functionality again.

TtcanIf is located in the communication hardware abstraction under the communication service layers (i.e. TTCAN State Manager, TTCAN Network Management, TTCAN Transport Protocol, PDU Router). It represents the interface to the services of the TTCAN Driver for the upper communication layers.

TtcanIf is an extension of the [2, CAN Interface module (CanIf)] so this document shall only provide information and specifications which differ from CanIf.

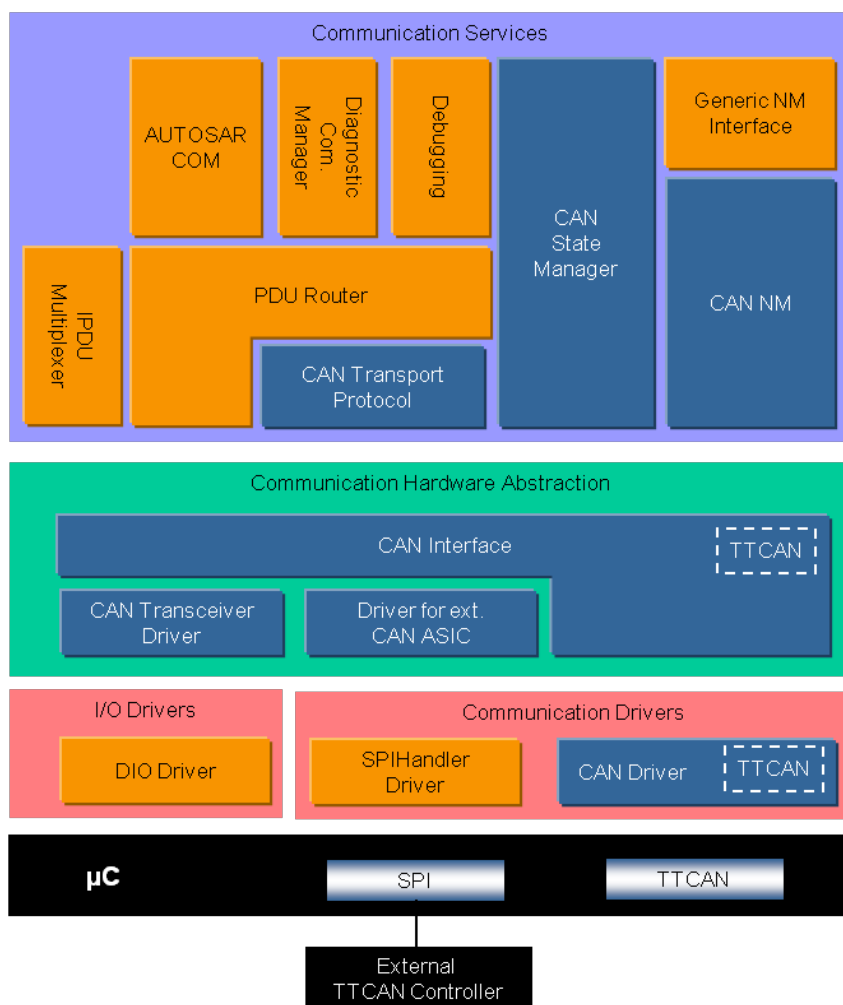


Figure 1.1: AUTOSAR TTCAN Layer Model (see [3])

Messages, which are configured for [Exclusive Time Windows](#), will be transmitted periodically with every [Tx_Trigger](#) configured for this message ([Continuous Transmission](#)).

Messages, which are configured for [Arbitrating Time Windows](#), will be transmitted only once per Transmit Request ([Single Shot](#)).

[TtcanIf](#) consists of all TTCAN hardware independent tasks, which belong to the TTCAN communication device drivers of the corresponding ECU. This functionality is implemented once in [TtcanIf](#), so that underlying TTCAN device drivers only focus on access and control of the corresponding specific TTCAN hardware device.

[TtcanIf](#) fulfils main control flow and data flow requirements of the PDU Router and upper layer communication modules of the AUTOSAR COM stack: transmit request processing, transmit confirmation / receive indication / error notification and start / stop of a [TTCAN Controller](#) and thus waking up / participating on a network. Its data processing and notification API is based on CAN [L-PDUs](#), whereas the APIs for control and mode handling provide a [TTCAN Controller](#) related view.

In case of transmit requests [TtcanIf](#) completes the [L-PDU](#) transmission with corresponding parameters and relays the CAN [L-PDU](#) via the appropriate [TTCAN Driver](#) to the [TTCAN Controller](#). At reception [TtcanIf](#) distributes the received [L-PDUs](#) to the upper layer. The assignment between receive [L-PDU](#) and upper layer is statically configured. At transmit confirmation [TtcanIf](#) is responsible for the notification of upper layers about successful transmission.

[TtcanIf](#) provides TTCAN communication abstracted access to the lower layer services for control and supervision of the TTCAN network. [TtcanIf](#) forwards the status change requests from the CAN State Manager downwards to the lower layer TTCAN device drivers, and upwards the lower layer events are forwarded by [TtcanIf](#) to e.g. the corresponding NM module.

2 Acronyms and Abbreviations

The glossary below includes acronyms and abbreviations relevant to `TtcanIf` that are not included in the [4, AUTOSAR glossary].

Abbreviation / Acronym:	Description:
"at system configuration time"	static configuration parameters stored in <code>TtcanIf</code> ; may be defined after compilation of the code of <code>TtcanIf</code> , but have to be defined before the first execution of <code>TtcanIf</code> code.
Arbitrating Time Window	See [1, ISO 11898-4]
Basic Cycle	See [1, ISO 11898-4]
BSW	Basic Software
CanIf	CAN Interface
Communication Job	A TTCAN Communication Job defines the specific communication operation and the assigned execution time.
Continuous Transmission	Contrary to <code>Single Shot</code> a message will be transmitted cyclically even without a new transmit request.
Controller	A (TTCAN-)Controller is a CPU on-chip or external standalone hardware device. One Controller is connected to one physical channel.
Cycle Time	See [1, ISO 11898-4]
Dem	Diagnostic Event Manager
DLC	Data Length Code (part of <code>L-PDU</code> that describes the SDU length)
DLL	Data Link Layer
EcuM	ECU Manager
Exclusive Time Window	See [1, ISO 11898-4]
Gap	See [1, ISO 11898-4]
Global Time	See [1, ISO 11898-4]
Hardware Object	A CAN hardware object is defined as a PDU buffer inside the CAN RAM of the CAN hardware unit / <code>CAN Controller</code> .
ISR	Interrupt Service Routine
JLEF	(TTCAN) Job List Execution Function
Job List	A TTCAN Job List is a list of (maybe different) Communication Jobs sorted according to their respective execution start time.
L-PDU	Protocol Data Unit for the <code>Data Link Layer (DLL)</code>
Local Time	See [1, ISO 11898-4]
Matrix Cycle	See [1, ISO 11898-4]
MCAL	Microcontroller Abstraction Layer
NTU	See [1, ISO 11898-4]
OS	(AUTOSAR) Operating System
PduR	PDU Router
Reference Message	See [1, ISO 11898-4]
SDU	Service Data Unit
Single Shot	A message will be transmitted only once contrary to <code>Continuous Transmission</code> .
System Matrix	See [1, ISO 11898-4]
Time Gap	See [1, ISO 11898-4]
Time Master	See [1, ISO 11898-4]
Time Window	See [1, ISO 11898-4]
Transmission Column	See [1, ISO 11898-4]
TtcanDrv	CAN Driver module with enabled TTCAN functionality
TtcanIf	CAN Interface module with enabled TTCAN functionality
CanNm	CAN Network Management

CanSM	CAN State Manager
CanTp	CAN Transport Protocol
TX	Transmission or transmit
Tx_Trigger	See [1, ISO 11898-4]
UL	Upper layer

3 Related documentation

All documents of the referenced CAN Interface document [2] are also valid for this document.

3.1 Input documents & related standards and norms

References

- [1] ISO 11898-4:2004 - Road vehicles - Controller area network (CAN) - Part 4: Time-triggered communication
- [2] Specification of CAN Interface
AUTOSAR_SWS_CANInterface
- [3] Layered Software Architecture
AUTOSAR_EXP_LayeredSoftwareArchitecture
- [4] Glossary
AUTOSAR_TR_Glossary
- [5] General Specification of Basic Software Modules
AUTOSAR_SWS_BSWGeneral

3.2 Related specification

AUTOSAR provides a General Specification on Basic Software modules [5, SWS BSW General], which is also valid for TTCAN Interface.

Thus, the specification SWS BSW General shall be considered as additional and required specification for [TtcanIf](#).

4 Constraints and assumptions

The constraints and assumptions of [TtcanIf](#) are the same as for [CanIf](#) [2].

5 Dependencies to other modules

5.1 Additional TTCAN specific dependencies to other modules

This section describes the relations to other modules within the AUTOSAR basic software architecture. It contains brief descriptions of configuration information and services, which are additionally required by `TtcanIf` from other modules. The dependencies described in the referenced `CanIf` [2] also apply for `TtcanIf`.

5.1.1 AUTOSAR Operating System

It's possible to use dedicated `Job List Execution Functions` (JLEF) for each `TTCAN Controller`.

Whether the optional JLEF runs in a task concept or in an `ISR` is implementation specific. Refer to [section 7.3](#).

5.1.2 AUTOSAR PDU router

Additional to the data access through `CanIf`, as described in [2], `TtcanIf` can call a JLEF synchronously to the `TTCAN Local Time`. This shall ensure the request for data to be sent occur synchronously to the `TTCAN Local Time`. Within the JLEF `TtcanIf` calls the callback function `<UL_TriggerTransmit>` of `PduR` in order to start the copy operation of PDU data. Additionally the JLEF can be used to read out received data synchronously to the `TTCAN Local Time`.

5.1.3 Upper Protocol Layers

Inside the AUTOSAR BSW architecture the `Upper Layers` (UL) of `TtcanIf` are represented by the `PduR`, `CanNm`, `CanTp`, `CanSM`, and `EcuM`.

If the respective upper layer BSW module does not operate synchronously to the `TTCAN Local Time`, all occurrences are asynchronous to the code execution of this BSW module.

5.1.4 TTCAN Driver

`TtcanIf` provides additional notification services used by `TtcanDrv` (refer to [section 8.5](#)).

6 Requirements Tracing

Requirement	Description	Satisfied by
[SRS_BSW_00337]	Classification of development errors	[SWS_TtCanIf_00007] [SWS_TtCanIf_00008] [SWS_TtCanIf_00145]
[SRS_Can_01121]	CAN Interface shall be the interface layer between the underlying CAN Driver(s) and CAN transceiver Driver(s) and Upper Layers	[SWS_TtCanIf_00065] [SWS_TtCanIf_00067] [SWS_TtCanIf_00069] [SWS_TtCanIf_00070] [SWS_TtCanIf_00072] [SWS_TtCanIf_00073] [SWS_TtCanIf_00074] [SWS_TtCanIf_00075] [SWS_TtCanIf_00076] [SWS_TtCanIf_00077] [SWS_TtCanIf_00080] [SWS_TtCanIf_00082] [SWS_TtCanIf_00083] [SWS_TtCanIf_00084] [SWS_TtCanIf_00085] [SWS_TtCanIf_00086] [SWS_TtCanIf_00087] [SWS_TtCanIf_00101] [SWS_TtCanIf_00102] [SWS_TtCanIf_00103] [SWS_TtCanIf_00104] [SWS_TtCanIf_00105] [SWS_TtCanIf_00106] [SWS_TtCanIf_00107] [SWS_TtCanIf_00108] [SWS_TtCanIf_00109] [SWS_TtCanIf_00110] [SWS_TtCanIf_00112] [SWS_TtCanIf_00113] [SWS_TtCanIf_00114] [SWS_TtCanIf_00115] [SWS_TtCanIf_00116] [SWS_TtCanIf_00117] [SWS_TtCanIf_00119]
[SRS_Can_01131]	The CAN Interface module shall provide the possibility to have polling and callback notification mechanism in parallel	[SWS_TtCanIf_00089] [SWS_TtCanIf_00090] [SWS_TtCanIf_00091] [SWS_TtCanIf_00092] [SWS_TtCanIf_00093] [SWS_TtCanIf_00094]
[SRS_TtCan_41010]	A Job List shall be configurable.	[SWS_TtCanIf_00002] [SWS_TtCanIf_00141] [SWS_TtCanIf_00143]

<p>[SRS_TtCan_41011]</p>	<p>If a Job List is available (see SRS_TtCan_41010) it shall be executed by a separate Job List Execution Function.</p>	<p>[SWS_TtCanIf_00004] [SWS_TtCanIf_00006] [SWS_TtCanIf_00007] [SWS_TtCanIf_00032] [SWS_TtCanIf_00033] [SWS_TtCanIf_00079] [SWS_TtCanIf_00145]</p>
<p>[SRS_TtCan_41013]</p>	<p>An occurred severe error (S3) shall be processed as a BusOff (see SRS_Can_01029 of CAN SRS)</p>	<p>[SWS_TtCanIf_00120] [SWS_TtCanIf_00121] [SWS_TtCanIf_00122]</p>

7 Functional specification

7.1 General Functionality

Time-triggered CAN is a higher level protocol layer additional to the CAN protocol itself, which remains unchanged within the time-triggered communication.

This functional specification only provide specifications, which are additional to the CAN stack, to realize the mode Time Triggered CAN (TTCAN). Nevertheless the implementation shall provide the Standard CAN mode anyway.

7.2 TTCAN Interface State Machine

`TtcanIf` use the same states as `CanIf`.

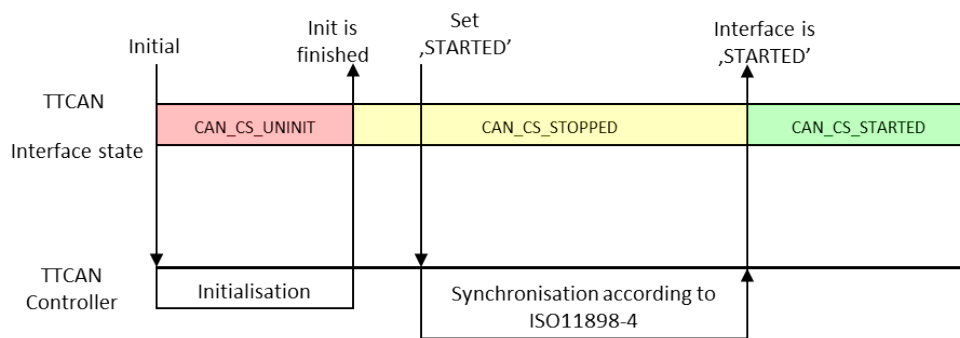


Figure 7.1: Exemplary Startup of TTCAN

7.3 TTCAN Job List

A `TTCAN Job List` is a list of `Communication Jobs` sorted according to their respective execution start time.

The `TTCAN Job List` shall be used if a synchronized copy operation into the `Controller` is required and/or a synchronized readout of the `Controller` (optional feature) shall be realized. Otherwise the normal CAN procedure without a `Job List` can be used.

[SWS_TtCanIf_00002] [The Copy Operation into/from the `TTCAN Controller` shall be scheduled within a `Job List`.] ([SRS_TtCan_41010](#))

[SWS_TtCanIf_00143] [For each `Controller` that is controlled by `TtcanIf` one dedicated `Job List` and one dedicated `JLEF` (refer to [section 7.3](#)) shall be used. It's possible to mixture both variants, with and without the usage of a `Job List`.] ([SRS_TtCan_41010](#))

7.4 TTCAN Job List Execution Function

[SWS_TtCanIf_00004] [If a **Job List** is used, the **TTCAN Job List Execution Function (JLEF)** shall execute the **Communication Jobs** of the **Job List** synchronously to the Controller time (i.e. at well-defined points in time).] (*SRS_TtCan_41011*)

The execution of **JLEF** is implementation specific.

[SWS_TtCanIf_00006] [The API names of the **JLEF** shall obey the following pattern:

- `CanIf_TTJobListExec_0()` for Controller # 0
- `CanIf_TTJobListExec_1()` for Controller # 1
- `CanIf_TTJobListExec_2()` for Controller # 2
- `CanIf_TTJobListExec_3()` for Controller # 3
- ... and so on, if more than 4 **Controllers** are supported.

] (*SRS_TtCan_41011*)

[SWS_TtCanIf_00007] [If the **JLEF** lost synchronisation to the **Local Time** of the **TTCAN Controller** then the function `Dem_SetEventStatus(CANIF_TT_E_JLE_SYNC, DEM_EVENT_STATUS_FAILED)` shall be called.] (*SRS_TtCan_41011*, *SRS_BSW_00337*)

[SWS_TtCanIf_00145] [If the **JLEF** was executed successfully, then the function `Dem_SetEventStatus(CANIF_TT_E_JLE_SYNC, DEM_EVENT_STATUS_PASSED)` shall be called.] (*SRS_TtCan_41011*, *SRS_BSW_00337*)

Exemplary the **JLEF** performs the following steps:

1. Retrieve the cycle time of the Controller by calling `Can_TTGetControllerTime()`.
 - If the cycle time cannot be retrieved
 - (a) Call `Dem_SetEventStatus(CANIF_TT_E_JLE_SYNC, DEM_EVENT_STATUS_FAILED)`
 - (b) Terminate the execution of **JLEF**.
 - Otherwise, the **JLEF** continues with step 2.
2. Check whether the **JLEF** was called by start of new Basic cycle.
 - If it is false, continue with step 3.
 - Otherwise check whether the next job is scheduled for this Basic cycle.
 - If it is `TRUE`, set the interrupt timer to the next job's start time in order to invoke the **JLEF** again and terminate the execution of **JLEF**
 - Otherwise terminate execution of **JLEF**.

3. If the cycle Time delay compared to the job start time is larger than a maximum delay (configuration parameter `CanIfTTMaxIsrDelay`), the execution of the `Job List` is considered to be asynchronous to the local time and thus the following actions are performed:
 - (a) Call `Dem_SetEventStatus(CANIF_TT_E_JLE_SYNC, DEM_EVENT_STATUS_FAILED)`
 - (b) Add some 'safety margin' (i.e. some timespan which takes jitter into account)
 - (c) Search the `Job List` for the subsequent job, i.e. that job with an invocation time greater than the current `Local Time` + safety margin.
 - (d) Search for the next `Job List` entry, which is valid for the current `Basic Cycle`. If the end of the `Job List` is reached, wrap around to the next `Basic Cycle` and continue the search for that respective `Basic Cycle`.
 - (e) If the next job is scheduled for this `Basic Cycle`:
 - Schedule next job, exemplary by using the time mark interrupt
 - Otherwise disable timer interrupt
 - (f) Terminate the execution of `JLEF`.Otherwise, the `JLEF` continues with step 4.
4. Retrieve the sorted list of Communication Operations of the current Job pointed to by the current job pointer and execute the retrieved communication operations in the configured order.
5. Search for the next `Job List` entry, which is valid for the current `Basic Cycle`. If the end of the `Job List` is reached, wrap around to the next `Basic Cycle` and continue the search for that respective `Basic Cycle`.
6. If the next job is scheduled for this Basic cycle set the interrupt timer to this job's start time Otherwise disable timer interrupt
7. Call `Dem_SetEventStatus(CANIF_TT_E_JLE_SYNC, DEM_EVENT_STATUS_PASSED)`
8. Terminate the execution of `JLEF`.

7.5 Data communication via TTCAN

TTCAN is a deterministic time driven communication system. Each datum that should be transmitted or received has to be scheduled *at system configuration time*.

A detailed description of Synchronization, Transmission Triggering, Reception Triggering, Initialization and Failure handling can be found in [1, ISO 11898-4].

Additional TTCAN specific requirements:

[SWS_TtCanIf_00141] [If a `Job List` is configured for a Tx L-PDU (see `CanIfTTJobList`), a function call of `CanIf_Transmit()` (see `SWS_CanIf_00318`) shall not directly call `Can_Write()`. The information that a call of `CanIf_Transmit()` occurred has to be buffered within `TtcanIf` until the data is transmitted by the `Job List`.](*SRS_TtCan_41010*)

Note: The kind of buffering the information of `[SWS_TtCanIf_00141]` is implementation specific.

Rationale for `[SWS_TtCanIf_00141]`: A `Job List` needs to be configured for `HW Objects` which transmit in `BasicCAN` mode, where one `HW Object` can be used to serve different time slots within the TTCAN system matrix. In this case a `Job List` has to take care, which message is available in the `HW Object` at the correct time. A `Can_Write()` call directly after `CanIf_Transmit()` can violate this.

7.6 TTCAN Controller mode

This chapter corresponds to the chapter "CAN Controller mode" of the [2, CAN Interface SWS].

[SWS_TtCanIf_00120] [If a `CanIf Controller mode state machine` is either in state `CAN_CS_STARTED`, `CAN_CS_STOPPED` or `CAN_CS_SLEEP` when function `CanIf_TTSevereError()` is called, then `CanIf` shall call the function `CanSM_ControllerBusOff()` for the CAN Network assigned to parameter `Controller` of `CanIf_TTSevereError()`.](*SRS_TtCan_41013*)

[SWS_TtCanIf_00121] [If a `CanIf Controller mode state machine` is in state `CAN_CS_STARTED` when the function `CanIf_TTSevereError(ControllerId, CanIf_TTSevereError)` is called with parameter `ControllerId` referencing that `CanIf Controller mode state machine`, then `CanIf` shall call `Can_SetControllerMode(Controller, CAN_CS_STOPPED)` and `CanIf` shall call `CanSM_ControllerBusOff(ControllerId)` of `CanSM`.](*SRS_TtCan_41013*)

These APIs are mapped to a `BusOff` API of `CanSM`, because, they indicate a severe error of the `TTCAN Controller`. The handling and recovery of such an error is equal to `BusOff`.

7.7 Error classification

7.7.1 Development Errors

There are no development errors.

7.7.2 Runtime Errors

There are no runtime errors.

7.7.3 Transient Faults

There are no transient faults.

7.7.4 Production Errors

There are no production errors.

7.7.5 Extended Production Errors

[SWS_TtCanIf_00008] [Extended Production Errors of [TtcanIf](#) are defined in [7.1.](#)] ([SRS_BSW_00337](#))

Error Name:	CANIF_TT_E_JLE_SYNC	
Short Description:	Lost Synchronization	
Long Description:	Job List Execution Function lost synchronization to the TTCAN Local Time .	
Detection Criteria:	Fail	If the JLEF lost synchronization to the Local Time of the TTCAN Controller (see [SWS_TtCanIf_00007]), e.g.: <ul style="list-style-type: none"> • If the cycle time cannot be retrieved • If the cycle time delay compared to the job start time is larger than a maximum delay
	Pass	JLEF was executed without synchronization loss
Secondary Parameters:	-	
Time Required:	depends on cause (e.g. CanIfTTMaxIsrDelay)	
Monitor Frequency:	continuous (see [SWS_TtCanIf_00007])	

Table 7.1: Definition of Extended Production Errors

8 API specification

In the following sections, the TTCAN specific APIs and types are described.

8.1 Imported types

Additional TTCAN specific imported types

[SWS_TtCanIf_00124] [

<i>Module</i>	<i>Header File</i>	<i>Imported Type</i>
Can	Can_GeneralTypes.h	Can_IdType
	Ttcan.h	Can_TTErrorLevelEnumType
	Ttcan.h	Can_TTErrorLevelType
	Ttcan.h	Can_TTMasterSlaveModeType
	Ttcan.h	Can_TTMasterStateType
	Ttcan.h	Can_TTSyncModeEnumType
	Ttcan.h	Can_TTTURType
	Ttcan.h	Can_TTTimeSourceType
	Ttcan.h	Can_TTTimeType
ComStack_Types	ComStack_Types.h	PduIdType
	ComStack_Types.h	PduInfoType
	ComStack_Types.h	PduLengthType
Dem	Rte_Dem_Type.h	Dem_EventIdType
	Rte_Dem_Type.h	Dem_EventStatusType
Std	Std_Types.h	Std_ReturnType

]()

Note: PduIdType is missing as of ComStack_Types.

8.2 Type definitions

Additional TTCAN specific type definitions

8.2.1 CanIf_TTTimeType

[SWS_TtCanIf_00059] [

Name	CanIf_TTTimeType
Kind	Type
Derived from	uint16
Description	16 bit value representing time values of TTCAN, e.g. cycle, local or global time
Available via	TtcanIf.h

]()

8.2.2 CanIf_TTMasterSlaveModeType

[SWS_TtCanIf_00096] [

Name	CanIf_TTMasterSlaveModeType		
Kind	Enumeration		
Range	CANIF_TT_BACKUP_MASTER	–	Master-Slave Mode: Backup master
	CANIF_TT_CURRENT_MASTER	–	Master-Slave Mode: Current master
	CANIF_TT_MASTER_OFF	–	Master-Slave Mode: Master off
	CANIF_TT_SLAVE	–	Master-Slave Mode: Slave
Description	Master-Slave Mode		
Available via	TtcanIf.h		

]()

8.2.3 CanIf_TTSyncModeEnumType

[SWS_TtCanIf_00097] [

Name	CanIf_TTSyncModeEnumType		
Kind	Enumeration		
Range	CANIF_TT_IN_GAP	–	Sync mode: In_Gap
	CANIF_TT_IN_SCHEDULE	–	Sync mode: In_Schedule
	CANIF_TT_SYNC_OFF	–	Sync mode: Sync_Off
	CANIF_TT_SYNCHRONIZING	–	Sync mode: Synchronizing
Description	Sync mode		
Available via	TtcanIf.h		

]()

8.2.4 CanIf_TTMasterStateType

[SWS_TtCanIf_00060] [

Name	CanIf_TTMasterStateType		
Kind	Structure		
Elements	masterSlaveMode		
	Type	CanIf_TTMasterSlaveModeType	
	Comment	–	
	refTriggerOffset		
	Type	uint8	
	Comment	current value of ref trigger offset	
	syncMode		
	Type	CanIf_TTSyncModeEnumType	
Comment	–		
Description	Master state type including sync mode, master-slave mode and current ref trigger offset		
Available via	TtcanIf.h		

]()

8.2.5 CanIf_TTErrorLevelEnumType

[SWS_TtCanIf_00098] [

Name	CanIf_TTErrorLevelEnumType		
Kind	Enumeration		
Range	CANIF_TT_ERROR_S0	–	Error level S0: No Error
	CANIF_TT_ERROR_S1	–	Error level S1: Warning
	CANIF_TT_ERROR_S2	–	Error level S2: Error
	CANIF_TT_ERROR_S3	–	Error level S3: Fatal Error
Description	Error level (S0-S3)		
Available via	TtcanIf.h		

]()

8.2.6 CanIf_TTErrorLevelType

[SWS_TtCanIf_00061] [

Name	CanIf_TTErrorLevelType		
Kind	Structure		
Elements	errorLevel		
	Type	CanIf_TTErrorLevelEnumType	



△

	Comment	Error Level (S0-S3)
	maxMessageStatusCount	
	Type	uint8
	Comment	Max value of message status count (0-7)
	minMessageStatusCount	
	Type	uint8
	Comment	Min value of message status count (0-7)
Description	TTCAN error level including min and max values of message status count	
Available via	Ttcanlf.h	

]()

8.2.7 CanIf_TTSevereErrorEnumType

[SWS_TtCanlf_00137] [

Name	CanIf_TTSevereErrorEnumType		
Kind	Enumeration		
Range	CANIF_TT_CONFIG_ERROR	–	Event: see ISO11898-4
	CANIF_TT_WATCH_TRIGGER_REACHED	–	Event: Watch Trigger reached
	CANIF_TT_APPL_WATCHDOG	–	Event: see ISO 11898-4
Description	Event that causes a severe error		
Available via	Ttcanlf.h		

]()

8.2.8 CanIf_TTTimeSourceType

[SWS_TtCanlf_00063] [

Name	CanIf_TTTimeSourceType		
Kind	Enumeration		
Range	CANIF_TT_CYCLE_TIME	–	Time source: Cycle Time
	CANIF_TT_GLOBAL_TIME	–	Time source: Global Time
	CANIF_TT_LOCAL_TIME	–	Time source: Local Time
	CANIF_TT_UNDEFINED	–	Time source: Undefined
Description	Time source of time values in TTCAN		
Available via	Ttcanlf.h		

]()

8.2.9 CanIf_TTEventEnumType

[SWS_TtCanIf_00099] [

Name	CanIf_TTEventEnumType		
Kind	Enumeration		
Range	CANIF_TT_ERROR_LEVEL_CHANGED	–	Event: Error Level changed
	CANIF_TT_INIT_WATCH_TRIGGER	–	Event: Init Watch Trigger reached
	CANIF_TT_NO_ERROR	–	No error
	CANIF_TT_SYNC_FAILED	–	Event: Sync failed
	CANIF_TT_TX_OVERFLOW	–	Event: Tx Overflow
	CANIF_TT_TX_UNDERFLOW	–	Event: Tx Underflow
Description	Event that causes a Timing/Error IRQ		
Available via	TtcanIf.h		

]()

8.2.10 CanIf_TTTimingErrorIRQType

[SWS_TtCanIf_00064] [

Name	CanIf_TTTimingErrorIRQType		
Kind	Structure		
Elements	errorLevel		
	Type	CanIf_TTErrorLevelType	
	Comment	Current error level	
	event		
	Type	CanIf_TTEventEnumType	
	Comment	Event that caused the IRQ	
Description	Combines all events that are reported by CanIf_TTTimingError (event indication and error level)		
Available via	TtcanIf.h		

]()

8.3 Function definitions

Additional TTCAN specific function definitions

8.3.1 CanIf_TTGetControllerTime

[SWS_TtCanIf_00065] [

Service Name	CanIf_TTGetControllerTime	
Syntax	<pre>Std_ReturnType CanIf_TTGetControllerTime (uint8 ControllerId, CanIf_TTTimeType* CanIf_TTGlobalTime, CanIf_TTTimeType* CanIf_TTLocalTime, CanIf_TTTimeType* CanIf_TTCycleTime, uint8* CanIf_TTCycleCount)</pre>	
Service ID [hex]	0x33	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Controller from which the time information shall be retrieved
Parameters (inout)	None	
Parameters (out)	CanIf_TTGlobalTime	Address to store return value: Global time
	CanIf_TTLocalTime	Address to store return value: Local time
	CanIf_TTCycleTime	Address to store return value: Cycle time
	CanIf_TTCycleCount	Address to store return value: Cycle count value
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Gets the current values for the global, local and cycle time and the cycle count of the controller	
Available via	TtcanIf.h	

]([SRS_Can_01121](#))

[SWS_TtCanIf_00101] [The function `CanIf_TTGetControllerTime()` shall call `Can_TTGetControllerTime(Controller, Can_TTGlobalTime, Can_TTLocalTime, Can_TTCycleTime, Can_TTCycleCount)`.]([SRS_Can_01121](#))

[SWS_TtCanIf_00010] [If parameter `Controller` of `CanIf_TTGetControllerTime()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTGetControllerTime()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]([SRS_Can_01121](#))

[SWS_TtCanIf_00011] [Caveats of `CanIf_TTGetControllerTime()`: `TtcanIf` has to be initialized before this API service may be called.]([SRS_Can_01121](#))

[SWS_TtCanIf_00066] [If development error detection for `TtcanIf` is enabled: The function `CanIf_TTGetControllerTime()` shall raise the error `CANIF_E_PARAM_POINTER` and shall return `E_NOT_OK` if one of the parameter `CanIf_TTCycleCount`, `CanIf_TTGlobalTime`, `CanIf_TTLocalTime` and `CanIf_TTCycleTime` is a NULL pointer.]([SRS_Can_01121](#))

8.3.2 CanIf_TTGetMasterState

[SWS_TtCanIf_00067] [

Service Name	CanIf_TTGetMasterState	
Syntax	<pre>Std_ReturnType CanIf_TTGetMasterState (uint8 ControllerId, CanIf_TTMasterStateType* CanIf_TTMasterState)</pre>	
Service ID [hex]	0x34	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	CanIf_TTMasterState	Address to store return value: Master state
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Gets the master state. The master state includes the sync mode (sync_off, synchronizing, in_gap, in_schedule) the master-slave mode (master_off, slave, backup_master, current_master) and the current value for ref trigger offset.	
Available via	TtcanIf.h	

]([SRS_Can_01121](#))

[SWS_TtCanIf_00102] [The function `CanIf_TTGetMasterState()` shall call `Can_TTGetMasterState(Controller, Can_TTMasterState)`.]([SRS_Can_01121](#))

[SWS_TtCanIf_00012] [If parameter `Controller` of `CanIf_TTGetMasterState()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTGetMasterState()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.](`()`)

[SWS_TtCanIf_00013] [Caveats of `CanIf_TTGetMasterState()`: `TtcanIf` has to be initialized before this API service may be called.](`()`)

[SWS_TtCanIf_00068] [If development error detection for `TtcanIf` is enabled: The function `CanIf_TTGetMasterState()` shall raise the error `CAN_E_PARAM_POINTER` and shall return `E_NOT_OK` if the parameter `CanIf_TTMasterState` is a NULL pointer.](`()`)

8.3.3 CanIf_TTGetNTUActual

[SWS_TtCanIf_00069] [

Service Name	CanIf_TTGetNTUActual
---------------------	----------------------





Syntax	Std_ReturnType CanIf_TTGetNTUActual (uint8 ControllerId, float32 CanIf_TTNTUAct)	
Service ID [hex]	0x35	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	CanIf_TTNTUAct	Address to store return value: Actual value of NTU. Value is given in microseconds
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Gets the actual value of NTU (network time unit). Together with the local oscillator period, the actual value of NTU can be derived from the actual value of TUR.	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00103] [The function `CanIf_TTGetNTUActual()` shall call `Can_TTGetNTUActual(Controller, Can_TTTURAct)`.](SRS_Can_01121)

[SWS_TtCanIf_00014] [If parameter `Controller` of `CanIf_TTGetNTUActual()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals `ON`), the function `CanIf_TTGetNTUActual()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.](/)

[SWS_TtCanIf_00015] [Caveats of `CanIf_TTGetNTUActual()`: `TtcanIf` has to be initialized before this API service may be called.](/)

8.3.4 CanIf_TTGetErrorLevel

[SWS_TtCanIf_00070] [

Service Name	CanIf_TTGetErrorLevel	
Syntax	Std_ReturnType CanIf_TTGetErrorLevel (uint8 ControllerId, CanIf_TTErrorLevelType* CanIf_TTErrorLevel)	
Service ID [hex]	0x36	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller from which the error level shall be retrieved
Parameters (inout)	None	



△

Parameters (out)	CanIf_TTErrorLevel	Address to store return value: Error level
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Gets the error level. This includes the severity of the error level (S0-S3) and the minimum and maximum value of the message status count.	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00104] [The function `CanIf_TTGetErrorLevel()` shall call `CanIf_TTGetErrorLevel(Controller, CanIf_TTErrorLevel)`.](SRS_Can_01121)

[SWS_TtCanIf_00016] [If parameter `Controller` of `CanIf_TTGetErrorLevel()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTGetErrorLevel()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.](/)

[SWS_TtCanIf_00017] [Caveats of `CanIf_TTGetErrorLevel()`: `TtcanIf` has to be initialized before this API service may be called.](/)

[SWS_TtCanIf_00071] [If development error detection for `TtcanIf` is enabled: The function `CanIf_TTGetErrorLevel()` shall raise the error `CAN_E_PARAM_POINTER` and shall return `E_NOT_OK` if the parameter `CanIf_TTErrorLevel` is a NULL pointer.](/)

8.3.5 CanIf_TTSetNextIsGap

[SWS_TtCanIf_00072] [

Service Name	CanIf_TTSetNextIsGap	
Syntax	Std_ReturnType CanIf_TTSetNextIsGap (uint8 ControllerId)	
Service ID [hex]	0x37	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Sets the "Next_is_Gap" bit.	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00105] [The function `CanIf_TTSetNextIsGap()` shall call `Can_TTSetNextIsGap(Controller)`.]([SRS_Can_01121](#))

[SWS_TtCanIf_00018] [If parameter `Controller` of `CanIf_TTSetNextIsGap()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTSetNextIsGap()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]([SRS_Can_01121](#))

[SWS_TtCanIf_00019] [Caveats of `CanIf_TTSetNextIsGap()`: `TtcanIf` has to be initialized before this API service may be called.]([SRS_Can_01121](#))

8.3.6 CanIf_TTSetEndOfGap

[SWS_TtCanIf_00073] [

Service Name	CanIf_TTSetEndOfGap	
Syntax	<pre>Std_ReturnType CanIf_TTSetEndOfGap (uint8 ControllerId)</pre>	
Service ID [hex]	0x38	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Signals the end of a gap.	
Available via	TtcanIf.h	

]([SRS_Can_01121](#))

[SWS_TtCanIf_00106] [The function `CanIf_TTSetEndOfGap()` shall call `Can_TTSetNextIsGap(Controller)`.]([SRS_Can_01121](#))

[SWS_TtCanIf_00020] [If parameter `Controller` of `CanIf_TTSetEndOfGap()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTSetEndOfGap()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]([SRS_Can_01121](#))

[SWS_TtCanIf_00021] [Caveats of `CanIf_TTSetEndOfGap()`: `TtcanIf` has to be initialized before this API service may be called.]([SRS_Can_01121](#))

8.3.7 CanIf_TTSetTimeCommand

[SWS_TtCanIf_00074] [

Service Name	CanIf_TTSetTimeCommand	
Syntax	Std_ReturnType CanIf_TTSetTimeCommand (uint8 ControllerId)	
Service ID [hex]	0x39	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Adjusts the global time at the beginning of the next basic cycle by the amount of "global time preset"	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00107] [The function `CanIf_TTSetTimeCommand()` shall call `Can_TTSetTimeCommand(Controller)`.](SRS_Can_01121)

[SWS_TtCanIf_00022] [If parameter `Controller` of `CanIf_TTSetTimeCommand()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTSetTimeCommand()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.](/)

[SWS_TtCanIf_00023] [Caveats of `CanIf_TTSetTimeCommand()`: `TtcanIf` has to be initialized before this API service may be called.](/)

8.3.8 CanIf_TTGlobalTimePreset

[SWS_TtCanIf_00075] [

Service Name	CanIf_TTGlobalTimePreset	
Syntax	Std_ReturnType CanIf_TTGlobalTimePreset (uint8 ControllerId, CanIf_TTTimeType CanIf_TTGlobalTimePreset)	
Service ID [hex]	0x3a	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	





Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
	CanIf_TTGlobalTimePreset	New value for "global time preset"
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Sets the value of "global time preset".	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00108] [The function `CanIf_TTGlobalTimePreset()` shall call `Can_TTGlobalTimePreset(Controller, Can_TTGlobalTimePreset)`.]

(SRS_Can_01121)

[SWS_TtCanIf_00024] [If parameter `Controller` of `CanIf_TTGlobalTimePreset()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTGlobalTimePreset()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

[SWS_TtCanIf_00025] [Caveats of `CanIf_TTGlobalTimePreset()`: `TtcanIf` has to be initialized before this API service may be called.]()

8.3.9 CanIf_TTSetExtClockSyncCommand

[SWS_TtCanIf_00076] [

Service Name	CanIf_TTSetExtClockSyncCommand	
Syntax	Std_ReturnType CanIf_TTSetExtClockSyncCommand (uint8 ControllerId)	
Service ID [hex]	0x3b	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Adjusts the NTU (network time unit) according to the value given by "NTU adjust". Together with the local oscillator period, "TUR adjust" can be derived from "NTU adjust".	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00109] [The function `CanIf_TTSetExtClockSyncCommand()` shall call `Can_TTSetExtClockSyncCommand(Controller)`.] ([SRS_Can_01121](#))

[SWS_TtCanIf_00026] [If parameter `Controller` of `CanIf_TTSetExtClockSyncCommand()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals `ON`), the function `CanIf_TTSetExtClockSyncCommand()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the `DET` module.] ()

[SWS_TtCanIf_00027] [Caveats of `CanIf_TTSetExtClockSyncCommand()`: `TtcanIf` has to be initialized before this API service may be called.] ()

8.3.10 CanIf_TTSetNTUAdjust

[SWS_TtCanIf_00077] [

Service Name	CanIf_TTSetNTUAdjust	
Syntax	<pre>Std_ReturnType CanIf_TTSetNTUAdjust (uint8 ControllerId, float32 CanIf_TTNTUAdjust)</pre>	
Service ID [hex]	0x3c	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
	CanIf_TTNTUAdjust	New value for "NTU adjust". Value is given in microseconds.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
	Description	
Sets the value of "NTU adjust". Together with the local oscillator period, "TUR adjust" can be derived from "NTU adjust".		
Available via	TtcanIf.h	

] ([SRS_Can_01121](#))

[SWS_TtCanIf_00110] [The function `CanIf_TTSetNTUAdjust()` shall call `Can_TTSetNTUAdjust(Controller, Can_TTNTUAdjust)`.] ([SRS_Can_01121](#))

[SWS_TtCanIf_00028] [If parameter `Controller` of `CanIf_TTSetNTUAdjust()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals `ON`), the function `CanIf_TTSetNTUAdjust()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the `DET` module.] ()

[SWS_TtCanIf_00029] [Caveats of `CanIf_TTSetNTUAdjust()`: `TtcanIf` has to be initialized before this API service may be called.] ()

8.4 Optional Function definitions

Additional optional TTCAN specific function definitions

8.4.1 CanIf_TTJobListExec_<Controller>

[SWS_TtCanIf_00079] [

Service Name	CanIf_TTJobListExec_<Controller>
Syntax	void CanIf_TTJobListExec_<Controller> (void)
Service ID [hex]	0x50
Sync/Async	Synchronous
Reentrancy	Non Reentrant
Parameters (in)	None
Parameters (inout)	None
Parameters (out)	None
Return value	None
Description	Processes the job list of the TTCAN controller <Controller>.
Available via	TtcanIf.h

]([SRS_TtCan_41011](#))

[SWS_TtCanIf_00032] [The function CanIf_TTJobListExec_<Controller>() shall exist once per [TTCAN Controller](#), which use a [Job List](#).]([SRS_TtCan_41011](#))

[SWS_TtCanIf_00033] [The function name of each instance of CanIf_TTJobListExec_<Controller>() shall contain the index of the respective [TTCAN Controller](#).]([SRS_TtCan_41011](#))

[SWS_TtCanIf_00034] [Caveats of CanIf_TTJobListExec_<Controller>(): TtcanIf has to be initialized before this API service may be called.]([SRS_TtCan_41011](#))

For each [TTCAN Controller](#) (identified by index `Controller`), the execution of CanIf_TTJobListExec_<Controller>() can either run in a regular OS task or it is registered in the [AUTOSAR OS](#) as [ISR](#), triggered by the [TTCAN Controller](#).

8.4.2 CanIf_TTGetSyncQuality

[SWS_TtCanIf_00080] [

Service Name	CanIf_TTGetSyncQuality	
Syntax	<pre>Std_ReturnType CanIf_TTGetSyncQuality (uint8 ControllerId, boolean* CanIf_TTClockSpeed, boolean* CanIf_TTGlobalTimePhase)</pre>	
Service ID [hex]	0x47	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	CanIf_TTClockSpeed	Address to store return value: True if the synchronization deviation is smaller than the "Synchronization deviation limit"
	CanIf_TTGlobalTimePhase	Address to store return value: True if the the global time is in phase with the time master.
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Gets the synchronization quality.	
Available via	TtcanIf.h	

]([SRS_Can_01121](#))

[SWS_TtCanIf_00112] [The function [CanIf_TTGetSyncQuality\(\)](#) shall call [Can_TTGetSyncQuality\(Controller, Can_TTClockSpeed, Can_TTGlobalTimePhase\)](#).]([SRS_Can_01121](#))

[SWS_TtCanIf_00035] [If parameter [Controller](#) of [CanIf_TTGetSyncQuality\(\)](#) has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function [CanIf_TTGetSyncQuality\(\)](#) shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]([SRS_Can_01121](#))

[SWS_TtCanIf_00036] [Caveats of [CanIf_TTGetSyncQuality\(\)](#): `TtcanIf` has to be initialized before this API service may be called.]([SRS_Can_01121](#))

[SWS_TtCanIf_00081] [If development error detection for `TtcanIf` is enabled: The function [CanIf_TTGetSyncQuality\(\)](#) shall raise the error `CAN_E_PARAM_POINTER` and shall return `E_NOT_OK` if one of the parameter `CanIf_ClockSpeed` and `CanIf_GlobalTimePhase` is a NULL pointer.]([SRS_Can_01121](#))

8.4.3 CanIf_TTSetTimeMark

[SWS_TtCanIf_00082] [

Service Name	CanIf_TTSetTimeMark	
Syntax	<pre>Std_ReturnType CanIf_TTSetTimeMark (uint8 ControllerId, CanIf_TTTimeType CanIf_TTTimeMark, CanIf_TTTimeSourceType CanIf_TTTimeSource)</pre>	
Service ID [hex]	0x48	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
	CanIf_TTTimeMark	Gives the value of the time mark to be set.
	CanIf_TTTimeSource	Defines the time source for the time mark to be set.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Sets a new value for the time mark for the given time source.	
Available via	TtcanIf.h	

]([SRS_Can_01121](#))

[SWS_TtCanIf_00113] [The function [CanIf_TTSetTimeMark\(\)](#) shall call `Can_TTSetTimeMark(Controller, Can_TTTimeMark, Can_TTTimeSource)`.]
([SRS_Can_01121](#))

[SWS_TtCanIf_00037] [If parameter `Controller` of [CanIf_TTSetTimeMark\(\)](#) has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function [CanIf_TTSetTimeMark\(\)](#) shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

[SWS_TtCanIf_00038] [Caveats of [CanIf_TTSetTimeMark\(\)](#): `TtcanIf` has to be initialized before this API service may be called.]()

8.4.4 CanIf_TTCancelTimeMark

[SWS_TtCanIf_00083] [

Service Name	CanIf_TTCancelTimeMark	
Syntax	<pre>Std_ReturnType CanIf_TTCancelTimeMark (uint8 ControllerId)</pre>	
Service ID [hex]	0x49	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	





Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Cancels the time mark.	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00114] [The function `CanIf_TTCancelTimeMark()` shall call `Can_TTCancelTimeMark(Controller)`.](SRS_Can_01121)

[SWS_TtCanIf_00039] [If parameter `Controller` of `CanIf_TTCancelTimeMark()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTCancelTimeMark()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.](/)

[SWS_TtCanIf_00040] [Caveats of `CanIf_TTCancelTimeMark()`: `TtcanIf` has to be initialized before this API service may be called.](/)

8.4.5 CanIf_TTAckTimeMark

[SWS_TtCanIf_00084] [

Service Name	CanIf_TTAckTimeMark	
Syntax	Std_ReturnType CanIf_TTAckTimeMark (uint8 ControllerId)	
Service ID [hex]	0x4a	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Acknowledges the time mark interrupt by resetting the flag in the interrupt vector register.	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00115] [The function `CanIf_TTAckTimeMark()` shall call `Can_TTAckTimeMark(Controller)`.](SRS_Can_01121)

[SWS_TtCanIf_00041] [If parameter `Controller` of `CanIf_TTackTimeMark()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTackTimeMark()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

[SWS_TtCanIf_00042] [Caveats of `CanIf_TTackTimeMark()`: `TtcanIf` has to be initialized before this API service may be called.]()

8.4.6 CanIf_TTEnableTimeMarkIRQ

[SWS_TtCanIf_00085] [

Service Name	CanIf_TTEnableTimeMarkIRQ	
Syntax	Std_ReturnType CanIf_TTEnableTimeMarkIRQ (uint8 ControllerId)	
Service ID [hex]	0x4b	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Enables the time mark interrupt.	
Available via	TtcanIf.h	

] ([SRS_Can_01121](#))

[SWS_TtCanIf_00116] [The function `CanIf_TTEnableTimeMarkIRQ()` shall call `Can_TTEnableTimeMarkIRQ(Controller)`.] ([SRS_Can_01121](#))

[SWS_TtCanIf_00043] [If parameter `Controller` of `CanIf_TTEnableTimeMarkIRQ()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTEnableTimeMarkIRQ()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

[SWS_TtCanIf_00044] [Caveats of `CanIf_TTEnableTimeMarkIRQ()`: `TtcanIf` has to be initialized before this API service may be called.]()

8.4.7 CanIf_TTDisableTimeMarkIRQ

[SWS_TtCanIf_00086] [

Service Name	CanIf_TTDisableTimeMarkIRQ	
Syntax	<pre>Std_ReturnType CanIf_TTDisableTimeMarkIRQ (uint8 ControllerId)</pre>	
Service ID [hex]	0x4c	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Disables the time mark interrupt.	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00117] [The function `CanIf_TTDisableTimeMarkIRQ()` shall call `Can_TTDisableTimeMarkIRQ(Controller)`.](SRS_Can_01121)

[SWS_TtCanIf_00045] [If parameter `Controller` of `CanIf_TTDisableTimeMarkIRQ()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTDisableTimeMarkIRQ()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

[SWS_TtCanIf_00046] [Caveats of `CanIf_TTDisableTimeMarkIRQ()`: `TtcanIf` has to be initialized before this API service may be called.]()

8.4.8 CanIf_TTGetTimeMarkIRQStatus

[SWS_TtCanIf_00087] [

Service Name	CanIf_TTGetTimeMarkIRQStatus	
Syntax	<pre>Std_ReturnType CanIf_TTGetTimeMarkIRQStatus (uint8 ControllerId, boolean* CanIf_TTIRQStatus)</pre>	
Service ID [hex]	0x4d	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller
Parameters (inout)	None	
Parameters (out)	CanIf_TTIRQStatus	Address to store return value: True if the timer for the time mark is pending.



△

Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Gets the IRQ status of the time mark.	
Available via	TtcanIf.h	

](SRS_Can_01121)

[SWS_TtCanIf_00119] [The function `CanIf_TTGetTimeMarkIRQStatus()` shall call `Can_TTGetTimeMarkIRQStatus(Controller, Can_TTIRQStatus)`.]
(SRS_Can_01121)

[SWS_TtCanIf_00047] [If parameter `Controller` of `CanIf_TTGetTimeMarkIRQStatus()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), the function `CanIf_TTGetTimeMarkIRQStatus()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]
()

[SWS_TtCanIf_00048] [Caveats of `CanIf_TTGetTimeMarkIRQStatus()`: `TtcanIf` has to be initialized before this API service may be called.] ()

[SWS_TtCanIf_00088] [If development error detection for `TtcanIf` is enabled: The function `CanIf_TTGetTimeMarkIRQStatus()` shall raise the error `CAN_E_PARAM_POINTER` and shall return `E_NOT_OK` if the parameter `CanIf_IRQStatus` is a NULL pointer.] ()

8.5 Scheduled Functions

Additional TTCAN specific function definitions

`TtcanIf` has no additional scheduled functions.

8.6 Callback Notifications

This is a list of functions provided for other modules.

Additional TTCAN specific callback notifications

The callback notification specified within this chapter will be called by the CAN Driver module either in context of a main function or an interrupt.

8.6.1 CanIf_TTAppIWatchdogError

[SWS_TtCanIf_00089] [

Service Name	CanIf_TTApplWatchdogError	
Syntax	<pre>Std_ReturnType CanIf_TTApplWatchdogError (uint8 ControllerId)</pre>	
Service ID [hex]	0x5b	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller for which the application watchdog error shall be reported.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Reports an application watchdog error.	
Available via	TtcanIf.h	

]([SRS_Can_01131](#))

[SWS_TtCanIf_00050] [If parameter `ControllerId` of `CanIf_TTApplWatchdogError()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals `ON`), then the function `CanIf_TTApplWatchdogError()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

8.6.2 CanIf_TTTimingError

[SWS_TtCanIf_00090] [

Service Name	CanIf_TTTimingError	
Syntax	<pre>Std_ReturnType CanIf_TTTimingError (uint8 ControllerId, CanIf_TTTimingErrorIRQType CanIf_TTTimingErrorIRQ)</pre>	
Service ID [hex]	0x5c	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller for which the timing error shall be reported.
	CanIf_TTTimingErrorIRQ	Type of timing error.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred





Description	Reports one of the following errors: <ul style="list-style-type: none"> • Change of error level • Tx overflow / underflow • Synchronization failed • Init watch trigger
Available via	TtcanIf.h

]([SRS_Can_01131](#))

Note: This callback service is called by the CAN Driver module (supporting TTCAN) and implemented in the CAN Interface module (supporting TTCAN). It is called if error level S1 or S2 (see [1, ISO 11898-4]) have been detected in the corresponding controller.

[SWS_TtCanIf_00051] [If parameter `ControllerId` of `CanIf_TTTimingError()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals `ON`), then the function `CanIf_TTTimingError()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

8.6.3 CanIf_TTSevereError

[SWS_TtCanIf_00122] [

Service Name	CanIf_TTSevereError	
Syntax	<pre>void CanIf_TTSevereError (uint8 ControllerId, CanIf_TTSevereErrorEnumType CanIf_TTSevereError)</pre>	
Service ID [hex]	0x61	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller at which the severe error occurred
	CanIf_TTSevereError	type of severe error
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	Reports one of the following errors: <ul style="list-style-type: none"> • failed to serve appl. watchdog • config error • watch trigger reached 	
Available via	TtcanIf.h	

]([SRS_TtCan_41013](#))

Note: This callback service is called by the CAN Driver module (supporting TTCAN) and implemented in the CAN Interface module (supporting TTCAN). It is called if error level S3 (severe error, see [1, ISO 11898-4]) has been detected in the corresponding controller.

[SWS_TtCanIf_00123] [If parameter `ControllerId` of `CanIf_TTSevereError()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals `ON`), then the function `CanIf_TTSevereError()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

8.6.4 CanIf_TTGap

[SWS_TtCanIf_00091] [

Service Name	CanIf_TTGap	
Syntax	<pre>Std_ReturnType CanIf_TTGap (uint8 ControllerId)</pre>	
Service ID [hex]	0x5d	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller for which the gap shall be reported.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Reports the occurrence of a gap.	
Available via	TtcanIf.h	

] ([SRS_Can_01131](#))

[SWS_TtCanIf_00052] [If parameter `ControllerId` of `CanIf_TTGap()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals `ON`), then the function `CanIf_TTGap()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

8.6.5 CanIf_TTStartOfCycle

[SWS_TtCanIf_00092] [

Service Name	CanIf_TTStartOfCycle	
Syntax	<pre>Std_ReturnType CanIf_TTStartOfCycle (uint8 ControllerId, uint8 CanIf_TTCycleCount)</pre>	
Service ID [hex]	0x5e	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller for which the start of cycle shall be reported.
	CanIf_TTCycleCount	Cycle count value for the cycle that is started
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Reports the start of a basic cycle.	
Available via	TtcanIf.h	

](SRS_Can_01131)

[SWS_TtCanIf_00053] [If parameter ControllerId of CanIf_TTStartOfCycle () has an invalid value and if development error detection is enabled (i.e. CANIF_DEV_ERROR_DETECT equals ON), then the function CanIf_TTStartOfCycle () shall report development error code CANIF_E_PARAM_CONTROLLER to the Det_ReportError service of the DET module.]()

8.6.6 CanIf_TTTimeDisc

[SWS_TtCanIf_00093] [

Service Name	CanIf_TTTimeDisc	
Syntax	<pre>Std_ReturnType CanIf_TTTimeDisc (uint8 ControllerId)</pre>	
Service ID [hex]	0x5f	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller for which the time discontinuity shall be reported.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Reports a time discontinuity.	
Available via	TtcanIf.h	

](SRS_Can_01131)

[SWS_TtCanIf_00054] [If parameter `ControllerId` of `CanIf_TTTimeDisc()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), then the function `CanIf_TTTimeDisc()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

8.6.7 CanIf_TTMasterStateChange

[SWS_TtCanIf_00094] [

Service Name	CanIf_TTMasterStateChange	
Syntax	<pre>Std_ReturnType CanIf_TTMasterStateChange (uint8 ControllerId, CanIf_TTMasterStateType CanIf_TTMasterState)</pre>	
Service ID [hex]	0x60	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	ControllerId	Abstracted CanIf ControllerId which is assigned to a CAN controller for which the master state change shall be reported.
	CanIf_TTMasterState	Master state including sync mode, master-slave mode and current ref trigger offset
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Function successful E_NOT_OK: Development error occurred
Description	Reports change of the master state between potential and current master.	
Available via	TtcanIf.h	

] ([SRS_Can_01131](#))

[SWS_TtCanIf_00055] [If parameter `ControllerId` of `CanIf_TTMasterStateChange()` has an invalid value and if development error detection is enabled (i.e. `CANIF_DEV_ERROR_DETECT` equals ON), then the function `CanIf_TTMasterStateChange()` shall report development error code `CANIF_E_PARAM_CONTROLLER` to the `Det_ReportError` service of the DET module.]()

8.7 Expected interfaces

8.7.1 Mandatory interfaces

Additional TTCAN specific mandatory interfaces

In this chapter defines all interfaces, required from other modules are listed.

[SWS_TtCanIf_00056] [

API Function	Header File	Description
Can_TTGetControllerTime	Ttcan.h	Gets the current values for the global, local and cycle time and the cycle count of the controller
Can_TTGetErrorLevel	Ttcan.h	Gets the error level. This includes the severity of the error level (S0-S3) and the minimum and maximum value of the message status count.
Can_TTGetMasterState	Ttcan.h	Gets the master state. The master state includes the sync mode (sync_off, synchronizing, in_gap, in_schedule) the master-slave mode (master_off, slave, backup_master, current_master) and the current value for ref trigger offset.
Can_TTGetNTUActual	Ttcan.h	Gets the actual value of NTU (network time unit). Together with the local oscillator period, the actual value of NTU can be derived from the actual value of TUR.
Can_TTGlobalTimePreset	Ttcan.h	Sets the value of "global time preset".
Can_TTSetEndOfGap	Ttcan.h	Signals the end of a gap.
Can_TTSetExtClockSyncCommand	Ttcan.h	Adjusts the NTU (network time unit) according to the value given by "NTU adjust". Together with the local oscillator period, "TUR adjust" can be derived from "NTU adjust".
Can_TTSetNextIsGap	Ttcan.h	Sets the "Next_is_Gap" bit.
Can_TTSetNTUAdjust	Ttcan.h	Sets the value of "NTU adjust". Together with the local oscillator period, "TUR adjust" can be derived from "NTU adjust".
Can_TTSetTimeCommand	Ttcan.h	Adjusts the global time at the beginning of the next basic cycle by the amount of "global time preset"
Dem_SetEventStatus	Dem.h	Called by SW-Cs or BSW modules to report monitor status information to the Dem. BSW modules calling Dem_SetEventStatus can safely ignore the return value. This API will be available only if ({Dem/Dem ConfigSet/DemEventParameter/DemEvent ReportingType} == STANDARD_REPORTING)

]()

8.7.2 Optional Interfaces

Additional TTCAN specific optional interfaces

This chapter defines all interfaces which are required to fulfill an optional functionality of the module.

[SWS_TtCanIf_00057] [

API Function	Header File	Description
Can_TTAckTimeMark	Ttcan.h	Acknowledges the time mark interrupt by resetting the flag in the interrupt vector register.
Can_TTCancelTimeMark	Ttcan.h	Cancels the time mark.
Can_TTDisableTimeMarkIRQ	Ttcan.h	Disables the time mark interrupt.
Can_TTEnableTimeMarkIRQ	Ttcan.h	Enables the time mark interrupt.





API Function	Header File	Description
Can_TTGetSyncQuality	Ttcan.h	Gets the synchronization quality.
Can_TTGetTimeMarkIRQStatus	Ttcan.h	Gets the IRQ status of the time mark.
Can_TTReceive	Ttcan.h	Reads received data from the controller by returning the pointer of the CanID, the DLC and the Data of the message in the requested HRH.
Can_TTSetTimeMark	Ttcan.h	Sets a new value for the time mark for the given time source.

]()

8.7.3 Configurable Interfaces

Additional TTCAN specific configurable interfaces

This chapter lists all interfaces where the target API service of any upper layer, which require one or more of these mentioned interfaces to be called has to be set up by static configuration of TtcanIf. The target function is usually a call-back function. The names of these kinds of interfaces are not fixed because they are configurable.

8.7.3.1 <User_TriggerTransmit>

[SWS_TtCanIf_00058] [

Service Name	<User_TriggerTransmit>	
Syntax	<pre>Std_ReturnType <User_TriggerTransmit> (PduIdType TxPduId, PduInfoType* PduInfoPtr)</pre>	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different PduIds. Non reentrant for the same PduId.	
Parameters (in)	TxPduId	ID of the SDU that is requested to be transmitted.
Parameters (inout)	PduInfoPtr	Contains a pointer to a buffer (SduDataPtr) to where the SDU data shall be copied, and the available buffer size in SduLength. On return, the service will indicate the length of the copied SDU data in SduLength.
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: SDU has been copied and SduLength indicates the number of copied bytes. E_NOT_OK: No SDU data has been copied. PduInfoPtr must not be used since it may contain a NULL pointer or point to invalid data.
Description	Within this API, the upper layer module (called module) shall check whether the available data fits into the buffer size reported by PduInfoPtr->SduLength. If it fits, it shall copy its data into the buffer provided by PduInfoPtr->SduDataPtr and update the length of the actual copied data in PduInfoPtr->SduLength. If not, it returns E_NOT_OK without changing PduInfoPtr.	
Available via	<none>	

]()

When calling the `PduR`, this function has to be named `<User_TriggerTransmit>()`.

This API service of an upper layer BSW module `<User_>` (e.g. `PduR`) is called by `TtcanIf` to request from this upper layer BSW module that the PDU with index `Tx-PduId` has to be copied to the location in a temporary L-SDU buffer of `TtcanIf` to which this part of `PduInfoPtr` points.

[SWS_TtCanIf_00144] [If during `JLEF` `<User_TriggerTransmit>()` returns `E_NOT_OK`, `TtcanIf` shall not call `Can_Write()` afterwards.]()

Note for **[SWS_TtCanIf_00144]**: See [Figure 9.1](#). It shows only the case when `<User_TriggerTransmit>()` returns `E_OK`.

Reason for **[SWS_TtCanIf_00144]**: It is possible that e.g. the PDU is not available in COM module. This may be due to a stopped PDU group in COM module. Caveats of `<User_TriggerTransmit>()`: This API service is called during the execution of the `TTCAN JLEF`.

9 Sequence diagrams

The following sequence diagrams show the interactions of `TtcanIf` additional to the CAN Interface.

9.1 Transmission with JobList (TriggerTransmit with decoupled buffer access)

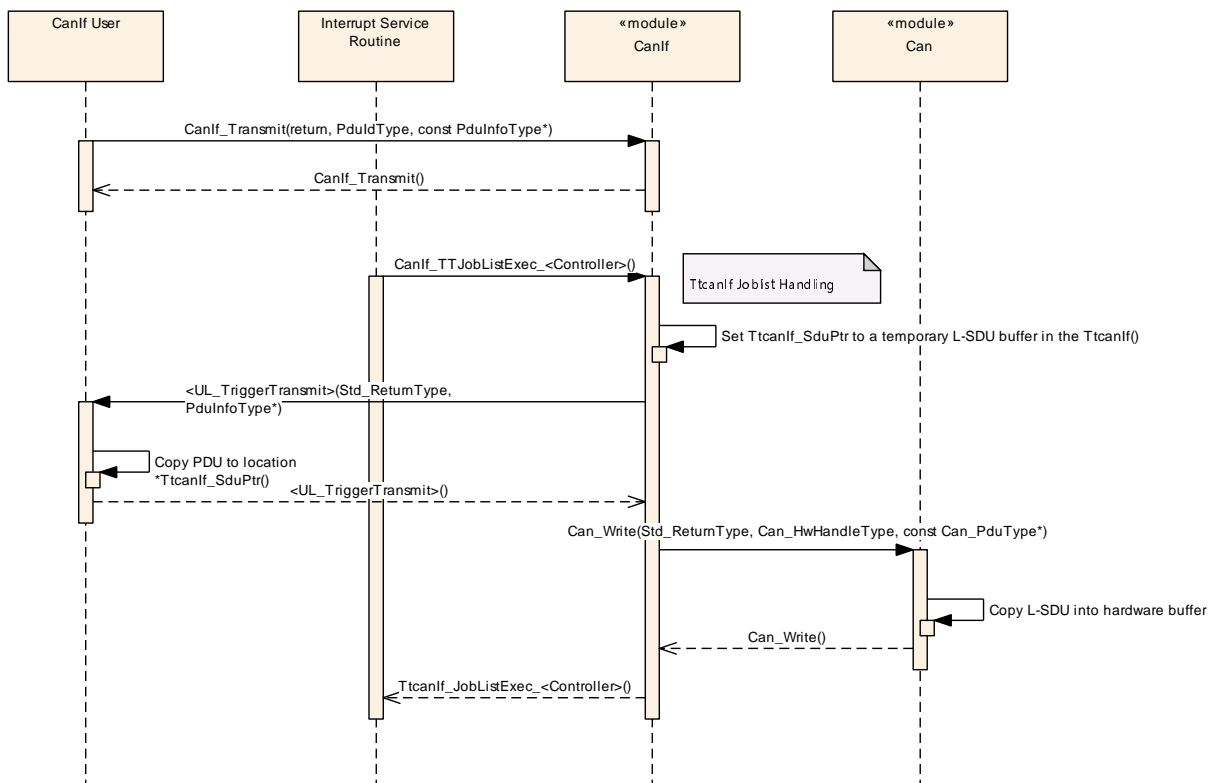


Figure 9.1: CAN Interface Time Triggered transmission with Job List

9.2 Reception with Joblist

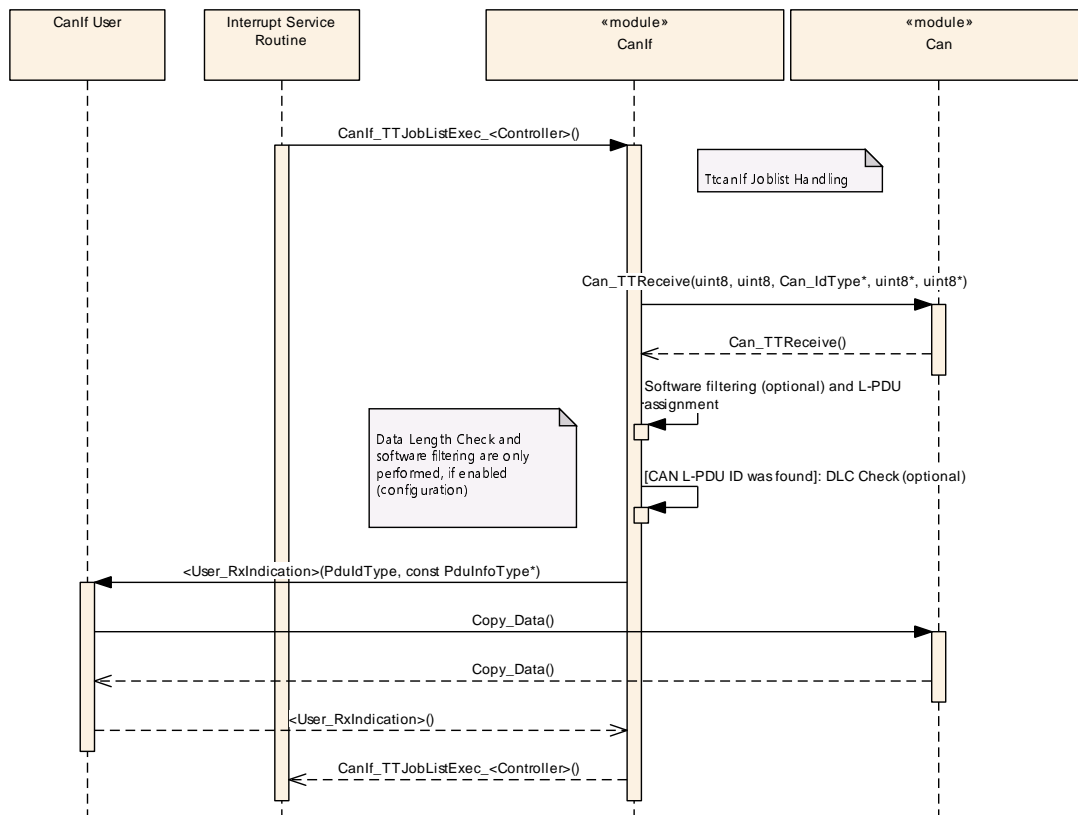


Figure 9.2: CAN Interface Time Triggered reception with Job List

9.3 Job List Execution Function

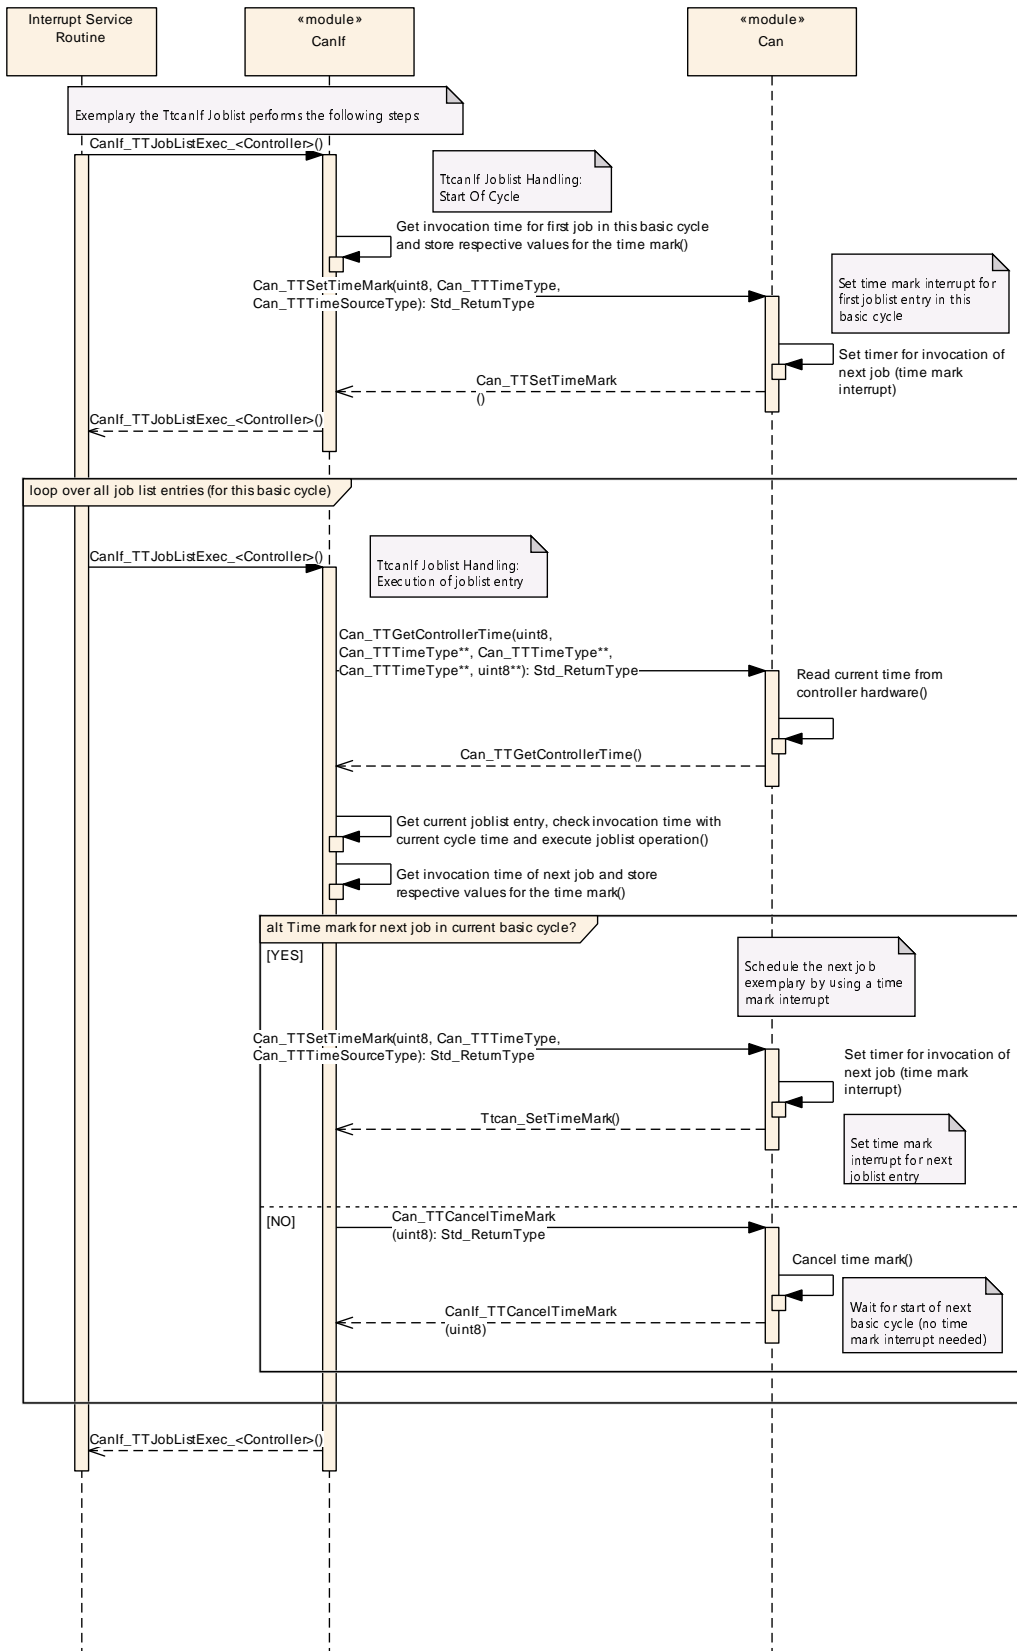


Figure 9.3: CAN Interface Time Triggered Job List Execution Function (JLEF)

10 Configuration specification

In general, this chapter defines configuration parameters and their clustering into containers. For general information about the definition of containers and parameters, refer to the [5, chapter 10.1 "Introduction to configuration specification" in SWS_BSWGeneral].

section 10.1 specifies the structure (containers) and the parameters of `TtcanIf`.

section 10.2 specifies published information of `TtcanIf`.

10.1 Containers and configuration parameters

Additional TTCAN specific configuration parameters

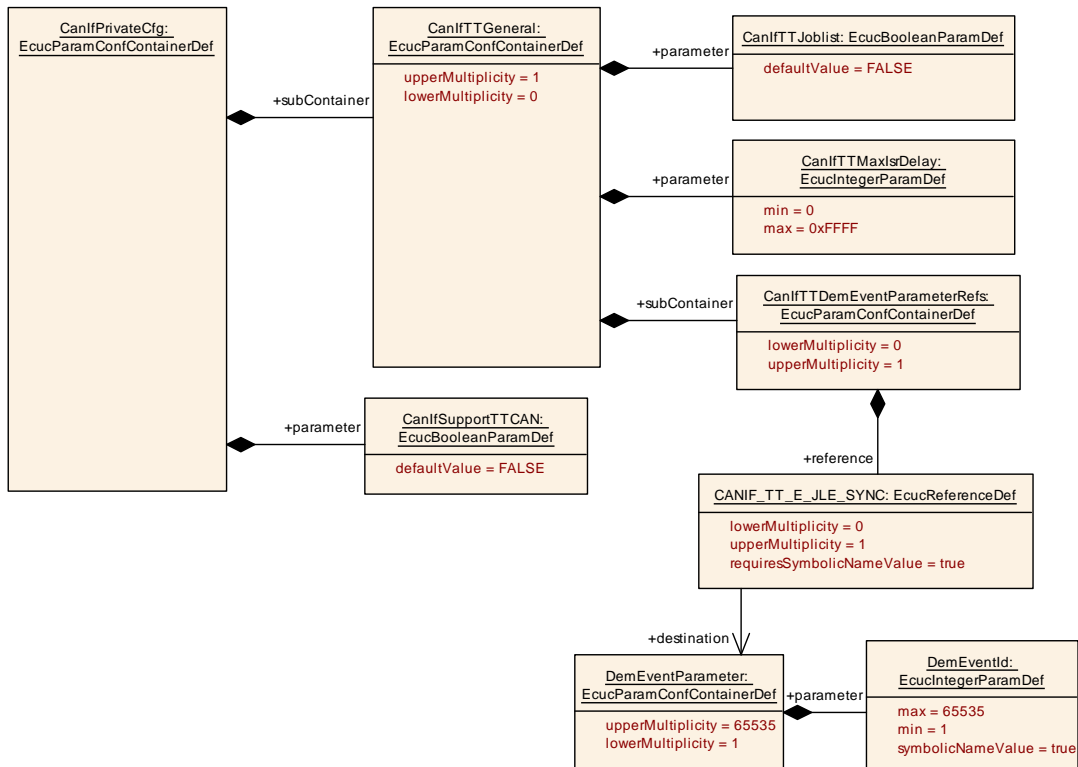


Figure 10.1: CAN Interface Time Triggered Private Configuration

The parameter `CanIfSupportTTCAN` is described in Specification of [2, CAN Interface SWS, ECUC_CanIf_00675].

10.1.1 CanIfTTGeneral

SWS Item	[ECUC_CanIf_00005]
Container Name	CanIfTTGeneral

Parent Container	CanIfPrivateCfg
Description	<p>CanIfTTGeneral is specified in the SWS TTCAN Interface and defines if and in which way TTCAN is supported.</p> <p>This container is only included and valid if TTCAN is supported by the controller, enabled (see CanIfSupportTTCAN, ECUC_CanIf_00675), and used.</p>
Configuration Parameters	

Name	CanIfTTJoblist [ECUC_CanIf_00126]		
Parent Container	CanIfTTGeneral		
Description	<p>Defines whether TTCAN is processed via a joblist. TRUE: Joblist is used. FALSE: No joblist is used.</p> <p>This parameter is only configurable if TTCAN is enabled by parameter CanIfSupportTTCAN.</p>		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default Value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local dependency: CanIfSupportTTCAN		

Name	CanIfTTMaxIsrDelay [ECUC_CanIf_00127]		
Parent Container	CanIfTTGeneral		
Description	<p>Defines the maximum delay for the execution of the joblist execution function JLEF. This parameter is only configurable if a joblist is enabled by parameter CanIfTTJobList.</p>		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 65535		
Default Value			
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local dependency: CanIfTTJobList		

Included Containers		
Container Name	Multiplicity	Scope / Dependency
CanIfTTDemEventParameterRefs	0..1	Container for the references to DemEventParameter elements which shall be invoked using the API Dem_SetEventStatus in case the corresponding error occurs. The EventId is taken from the referenced DemEventParameter's DemEventId symbolic value. The standardized errors are provided in this container and can be extended by vendor-specific error references.

10.1.2 CanIfTTDemEventParameterRefs

SWS Item	[ECUC_CanIf_00835]
Container Name	CanIfTTDemEventParameterRefs
Parent Container	CanIfTTGeneral
Description	Container for the references to DemEventParameter elements which shall be invoked using the API Dem_SetEventStatus in case the corresponding error occurs. The EventId is taken from the referenced DemEventParameter's DemEventId symbolic value. The standardized errors are provided in this container and can be extended by vendor-specific error references.
Configuration Parameters	

Name	CANIF_TT_E_JLE_SYNC [ECUC_CanIf_00836]		
Parent Container	CanIfTTDemEventParameterRefs		
Description	Reference to configured DEM event to report that the JLEF lost synchronization to the local time of the TTCAN controller.		
Multiplicity	0..1		
Type	Symbolic name reference to DemEventParameter		
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local dependency: Dem		

No Included Containers

10.1.3 CanIfTTTxFrameTriggering

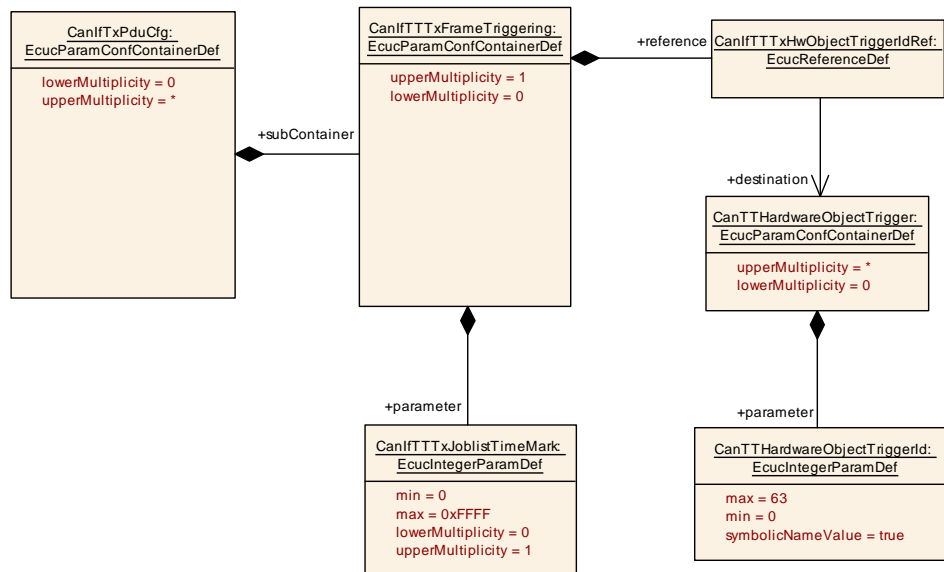


Figure 10.2: CAN Interface Time Triggered Transmit PDU Configuration

SWS Item	[ECUC_CanIf_00142]
Container Name	CanIfTTTxFrameTriggering
Parent Container	CanIfTxPduCfg
Description	<p>CanIfTTTxFrameTriggering is specified in the SWS TTCAN Interface and defines Frame trigger for TTCAN transmission.</p> <p>This container is only included and valid if TTCAN is supported by the controller, enabled (see CanIfSupportTTCAN, ECUC_CanIf_00675), and a joblist is used.</p>
Configuration Parameters	

Name	CanIfTTTxJoblistTimeMark [ECUC_CanIf_00132]		
Parent Container	CanIfTTTxFrameTriggering		
Description	Defines the point in time, when the joblist execution function (JLEF) shall be called for the referenced tx frame trigger. Value is given in cycle time. This parameter is only configurable if a joblist is enabled by parameter CanIfTTJobList.		
Multiplicity	0..1		
Type	EcucIntegerParamDef		
Range	0 .. 65535		
Default Value			
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD

Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local dependency: CanIfTTJoblist		

Name	CanIfTTTxHwObjectTriggerIdRef [ECUC_CanIf_00128]		
Parent Container	CanIfTTTxFrameTriggering		
Description	This parameter refers to a particular TTCAN hardware transmit object Trigger of a hardware object in the TTCAN Driver Module, which is referred via plain CAN parameter CANIF_HTH_HANDLETYPE_REF. This parameter is only configurable if a joblist is enabled by parameter CanIfTTJobList.		
Multiplicity	1		
Type	Reference to CanTTHardwareObjectTrigger		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local dependency: CanIfTTJoblist		

No Included Containers

10.1.4 CanIfTTRxFrameTriggering

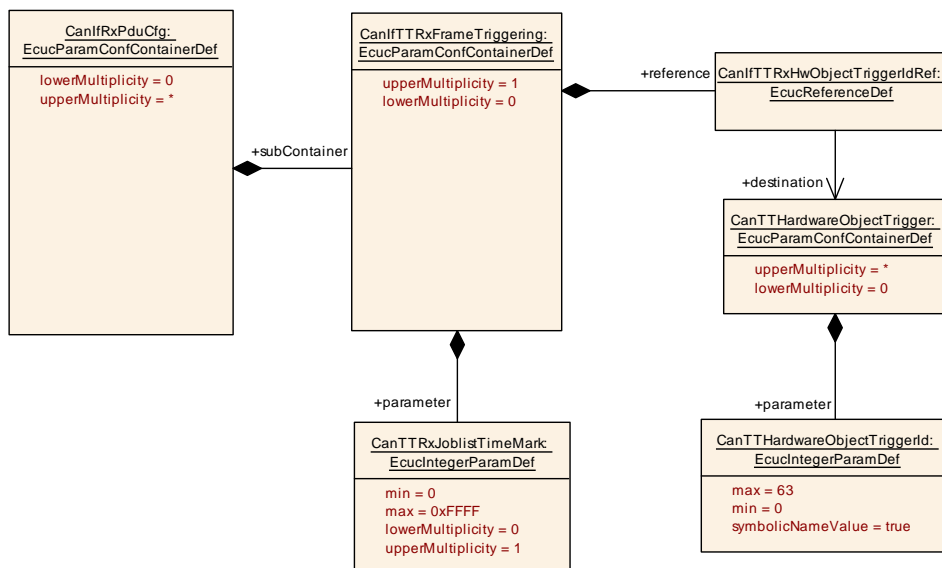


Figure 10.3: CAN Interface Time Triggered Receive PDU Configuration

SWS Item	[ECUC_CanIf_00003]
Container Name	CanIfTTRxFrameTriggering
Parent Container	CanIfRxPduCfg
Description	<p>CanIfTTRxFrameTriggering is specified in the SWS TTCAN Interface and defines Frame trigger for TTCAN reception.</p> <p>This container is only included and valid if TTCAN is supported by the controller, enabled (see CanIfSupportTTCAN, ECUC_CanIf_00675), and a joblist is used for reception.</p>
Configuration Parameters	

Name	CanTTRxJoblistTimeMark [ECUC_CanIf_00136]		
Parent Container	CanIfTTRxFrameTriggering		
Description	<p>Defines the point in time, when the joblist execution function (JLEF) shall be called for the referenced rx trigger. Value is given in cycle time. This parameter is only configurable if a joblist is enabled by parameter CanIfTTJobList.</p>		
Multiplicity	0..1		
Type	EcucIntegerParamDef		
Range	0 .. 65535		
Default Value			
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local dependency: CanIfTTJoblist		

Name	CanIfTTRxHwObjectTriggerIdRef [ECUC_CanIf_00133]
Parent Container	CanIfTTRxFrameTriggering
Description	<p>This parameter refers to a particular TTCAN hardware receive object Trigger of a hardware object in the TTCAN Driver Module, which is referred via plain CAN parameter CANIF_HRH_HANDLETYPE_REF. This parameter is only configurable if a joblist is enabled by parameter CanIfTTJobList.</p>
Multiplicity	1
Type	Reference to CanTTHardwareObjectTrigger
Post-Build Variant Value	true

Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local dependency: CanIfTTJoblist		

No Included Containers

10.2 Published information

For details refer to the [5, chapter 10.1 "Published Information" in SWS_BSWGeneral]

A Not applicable requirements

[SWS_TtCanIf_99999] [These requirements are not applicable to this specification.]
()