

|                                   |   |
|-----------------------------------|---|
| <b>Document Title</b>             | Specification of Ethernet Switch Driver |
| <b>Document Owner</b>             | AUTOSAR                                 |
| <b>Document Responsibility</b>    | AUTOSAR                                 |
| <b>Document Identification No</b> | 656                                     |

|                                 |                  |
|---------------------------------|------------------|
| <b>Document Status</b>          | published        |
| <b>Part of AUTOSAR Standard</b> | Classic Platform |
| <b>Part of Standard Release</b> | R22-11           |

| <b>Document Change History</b> |                |                            |  |
|--------------------------------|----------------|----------------------------|--|
| <b>Date</b>                    | <b>Release</b> | <b>Changed by</b>          | <b>Description</b>   |
| 2022-11-24                     | R22-11         | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>Remodel EthSwtPort MAC address and VLAN definition</li> <li>Implemented MACSec</li> <li>Implemented Deterministic Communication with TSN</li> </ul>   |
| 2021-11-25                     | R21-11         | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>Added 10BASE-T1S support</li> <li>Clarified return values and development errors</li> <li>Removed EthSwtMgmtInfoIndicationTimeout related requirements</li> </ul>   |
| 2020-11-30                     | R20-11         | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>Support for Ethernet wake on data line</li> <li>Modified description of return values in EthSwt_StoreConfiguration, EthSwt_ResetConfiguration</li> <li>Updated the types for ReTaggingVlanId and DoubleTaggingVlanId</li> <li>Fix service IDs for EthSwt_DeletePortMirrorConfiguration, EthSwt_PortLinkStateRequest, EthSwt_GetMaxFIFOBufferFillLevel</li> <li>Editorial changes</li> </ul> |

|            |        |                            |   |
|------------|--------|----------------------------|---|
| 2019-11-28 | R19-11 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Possibility to explicitly request or release Ethernet link state added</li> <li>• Replace usage of EthTrcv_ModeType with the Eth_ModeType</li> <li>• Support for 2500 MBit/s Ethernet connection</li> <li>• Fix Ethernet Hardware Initialization</li> <li>• Changed Document Status from Final to published</li> </ul>   |
| 2018-10-31 | 4.4.0  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Clarified Port Mirroring concepts.</li> <li>• Introduced timeout for ARL table entries</li> <li>• Added counter synchronization for cascaded switches</li> </ul>   |
| 2017-12-08 | 4.3.1  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation</li> </ul>   |
| 2016-11-30 | 4.3.0  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Restructured VLAN-membership as a port-related configuration parameter</li> <li>• Introduced configuration of rate policers on ingress side</li> <li>• Introduced filter configuration for double tagged frames</li> <li>• Introduced configuration of minimum buffer size for FIFOS</li> <li>• Introduced Types to read HW-statistic by List pointer; reorganized interfaces to read HW-statistics.</li> <li>• Introduced Compensation of Ethernet switch delays for Global Time Synchronization</li> <li>• Add / update elements to describe MAC interface and physical interface</li> <li>• Added testing functionality for diagnostic use cases</li> <li>• Added Possibility to switch off ports and switch instances according to VLAN or PNC.</li> <li>• Introduced interfaces for verification of switch configuration</li> </ul> |

|            |       |                                  |   |
|------------|-------|----------------------------------|---|
| 2015-07-31 | 4.2.2 | AUTOSAR<br>Release<br>Management | <ul style="list-style-type: none"><li>• minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation</li></ul> |
| 2014-10-31 | 4.2.1 | AUTOSAR<br>Release<br>Management | <ul style="list-style-type: none"><li>• Initial Release</li></ul>   |

## Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

## Contents

|          |   |    |
|----------|---|----|
| 1        | Introduction and functional overview  | 10 |
| 2        | Acronyms and abbreviations  | 11 |
| 3        | Related documentation   | 12 |
| 3.1      | Input documents & related standards and norms                                     | 12 |
| 3.2      | Related specification   | 12 |
| 4        | Constraints and assumptions   | 14 |
| 4.1      | Limitations   | 14 |
| 4.2      | Applicability to car domains  | 14 |
| 5        | Dependencies to other modules   | 15 |
| 6        | Requirements Tracing  | 16 |
| 7        | Functional specification  | 23 |
| 7.1      | Ethernet BSW stack  | 23 |
| 7.1.1    | Indexing scheme   | 24 |
| 7.1.2    | Ethernet Switch Port Mirroring  | 24 |
| 7.1.3    | State Handling  | 25 |
| 7.1.4    | Handling of cable diagnostic  | 26 |
| 7.1.5    | Functional Description  | 26 |
| 7.1.5.1  | Learning Phase at Start-up  | 26 |
| 7.1.5.2  | Frame forwarding process  | 30 |
| 7.1.5.3  | Ingress filtering   | 32 |
| 7.1.5.4  | Frame filtering   | 40 |
| 7.1.5.5  | Egress filtering  | 41 |
| 7.1.5.6  | Stream identification, per-stream filtering and policing                          | 41 |
| 7.1.5.7  | Transmission selection algorithm  | 48 |
| 7.1.5.8  | Switch Management support   | 52 |
| 7.1.5.9  | Global Time support   | 53 |
| 7.1.5.10 | Counter synchronization of Ethernet switches which are connected via uplink ports | 53 |
| 7.1.5.11 | Verification of Configuration   | 54 |
| 7.1.5.12 | Testing and Diagnostic of Switch Ports  | 55 |
| 7.1.5.13 | Low Power Mode Support  | 55 |
| 7.2      | Error Classifications   | 56 |
| 7.2.1    | Development Errors  | 56 |
| 7.2.2    | Runtime Errors  | 58 |
| 7.2.3    | Transient Faults  | 58 |
| 7.2.4    | Production Errors   | 58 |
| 7.2.5    | Extended Production Errors  | 58 |
| 8        | API specification   | 60 |

|        |                                       |    |
|--------|---------------------------------------|----|
| 8.1    | Imported types                        | 60 |
| 8.2    | Type definitions                      | 61 |
| 8.2.1  | EthSwT_StateType                      | 61 |
| 8.2.2  | EthSwT_ConfigType                     | 61 |
| 8.2.3  | EthSwT_MacLearningType                | 62 |
| 8.2.4  | EthSwT_MgmtInfoType                   | 62 |
| 8.2.5  | EthSwT_PortMirrorCfgType              | 62 |
| 8.2.6  | EthSwT_PortMirrorStateType            | 64 |
| 8.2.7  | EthSwT_ReturnType                     | 64 |
| 8.2.8  | EthSwT_MgmtOwner                      | 65 |
| 8.2.9  | EthSwT_Mgmt_ObjectType                | 65 |
| 8.2.10 | EthSwT_MgmtObjectValidType            | 66 |
| 8.3    | Function definitions                  | 66 |
| 8.3.1  | EthSwT_Init                           | 66 |
| 8.3.2  | EthSwT_SetSwitchPortMode              | 68 |
| 8.3.3  | EthSwT_GetSwitchPortMode              | 69 |
| 8.3.4  | EthSwT_StartSwitchPortAutoNegotiation | 70 |
| 8.3.5  | EthSwT_CheckWakeup                    | 71 |
| 8.3.6  | EthSwT_GetSwitchPortWakeupReason      | 71 |
| 8.3.7  | EthSwT_GetLinkState                   | 72 |
| 8.3.8  | EthSwT_GetBaudRate                    | 73 |
| 8.3.9  | EthSwT_GetDuplexMode                  | 74 |
| 8.3.10 | EthSwT_GetPortMacAddr                 | 75 |
| 8.3.11 | EthSwT_GetArITable                    | 76 |
| 8.3.12 | EthSwT_GetCounterValues               | 77 |
| 8.3.13 | EthSwT_GetRxStats                     | 77 |
| 8.3.14 | EthSwT_GetTxStats                     | 78 |
| 8.3.15 | EthSwT_GetTxErrorCounterValues        | 79 |
| 8.3.16 | EthSwT_GetSwitchReg                   | 79 |
| 8.3.17 | EthSwT_SetSwitchReg                   | 80 |
| 8.3.18 | EthSwT_ReadTrcvRegister               | 81 |
| 8.3.19 | EthSwT_WriteTrcvRegister              | 82 |
| 8.3.20 | EthSwT_EnableVlan                     | 82 |
| 8.3.21 | EthSwT_StoreConfiguration             | 83 |
| 8.3.22 | EthSwT_ResetConfiguration             | 84 |
| 8.3.23 | EthSwT_SetMacLearningMode             | 85 |
| 8.3.24 | EthSwT_GetMacLearningMode             | 86 |
| 8.3.25 | EthSwT_NvmSingleBlockCallback         | 86 |
| 8.3.26 | EthSwT_GetVersionInfo                 | 87 |
| 8.3.27 | EthSwT_EthRxProcessFrame              | 88 |
| 8.3.28 | EthSwT_EthRxFinishedIndication        | 89 |
| 8.3.29 | EthSwT_EthTxPrepareFrame              | 89 |
| 8.3.30 | EthSwT_EthTxAdaptBufferLength         | 90 |
| 8.3.31 | EthSwT_SetMgmtInfo                    | 91 |
| 8.3.32 | EthSwT_EthTxProcessFrame              | 91 |
| 8.3.33 | EthSwT_EthTxFinishedIndication        | 92 |

|        |   |     |
|--------|---|-----|
| 8.3.34 | EthSwT_PortEnableTimeStamp . . . . .                  | 93  |
| 8.3.35 | EthSwT_VerifyConfig . . . . .                         | 93  |
| 8.3.36 | EthSwT_SetForwardingMode . . . . .                    | 94  |
| 8.3.37 | EthSwT_GetPortSignalQuality . . . . .                 | 95  |
| 8.3.38 | EthSwT_GetPortIdentifier . . . . .                    | 95  |
| 8.3.39 | EthSwT_GetSwitchIdentifier . . . . .                  | 96  |
| 8.3.40 | EthSwT_WritePortMirrorConfiguration . . . . .         | 97  |
| 8.3.41 | EthSwT_ReadPortMirrorConfiguration . . . . .          | 98  |
| 8.3.42 | EthSwT_DeletePortMirrorConfiguration . . . . .        | 99  |
| 8.3.43 | EthSwT_GetPortMirrorState . . . . .                   | 100 |
| 8.3.44 | EthSwT_SetPortMirrorState . . . . .                   | 101 |
| 8.3.45 | EthSwT_SetPortTestMode . . . . .                      | 101 |
| 8.3.46 | EthSwT_SetPortLoopbackMode . . . . .                  | 102 |
| 8.3.47 | EthSwT_SetPortTxMode . . . . .                        | 103 |
| 8.3.48 | EthSwT_RunPortCableDiagnostic . . . . .               | 104 |
| 8.3.49 | EthSwT_GetPortCableDiagnosticsResult . . . . .        | 104 |
| 8.3.50 | EthSwT_GetCfgDataRaw . . . . .                        | 105 |
| 8.3.51 | EthSwT_GetCfgDataInfo . . . . .                       | 106 |
| 8.3.52 | EthSwT_PortLinkStateRequest . . . . .                 | 107 |
| 8.3.53 | EthSwT_GetMaxFIFOBufferFillLevel . . . . .            | 107 |
| 8.3.54 | EthSwT_GetRxMgmtObject . . . . .                      | 108 |
| 8.3.55 | EthSwT_GetTxMgmtObject . . . . .                      | 109 |
| 8.3.56 | EthSwT_MacSecUpdateSecY . . . . .                     | 109 |
| 8.3.57 | EthSwT_MacSecUpdateSecYNotification . . . . .         | 110 |
| 8.3.58 | EthSwT_MacSecInitRxSc . . . . .                       | 111 |
| 8.3.59 | EthSwT_MacSecResetRxSc . . . . .                      | 111 |
| 8.3.60 | EthSwT_MacSecAddTxSa . . . . .                        | 112 |
| 8.3.61 | EthSwT_MacSecAddTxSaNotification . . . . .            | 113 |
| 8.3.62 | EthSwT_MacSecUpdateTxSa . . . . .                     | 113 |
| 8.3.63 | EthSwT_MacSecDeleteTxSa . . . . .                     | 114 |
| 8.3.64 | EthSwT_MacSecAddRxSa . . . . .                        | 115 |
| 8.3.65 | EthSwT_MacSecAddRxSaNotification . . . . .            | 115 |
| 8.3.66 | EthSwT_MacSecUpdateRxSa . . . . .                     | 116 |
| 8.3.67 | EthSwT_MacSecDeleteRxSa . . . . .                     | 117 |
| 8.3.68 | EthSwT_MacSecGetTxSaNextPn . . . . .                  | 117 |
| 8.3.69 | EthSwT_MacSecGetMacSecStats . . . . .                 | 118 |
| 8.3.70 | EthSwT_MacSecGetMacSecStatsNotification . . . . .     | 118 |
| 8.3.71 | EthSwT_MacSecSetControlledPortEnabled . . . . .       | 119 |
| 8.4    | Callback notifications . . . . .                      | 120 |
| 8.4.1  | EthSwTPersistentConfigurationResultCallback . . . . . | 120 |
| 8.5    | Scheduled functions . . . . .                         | 120 |
| 8.5.1  | EthSwT_MainFunction . . . . .                         | 120 |
| 8.5.2  | EthSwT_BackgroundTask . . . . .                       | 121 |
| 8.6    | Expected interfaces . . . . .                         | 121 |
| 8.6.1  | Mandatory Interfaces . . . . .                        | 121 |
| 8.6.2  | Optional Interfaces . . . . .                         | 121 |

|         |   |     |
|---------|---|-----|
| 8.6.3   | Configurable interfaces . . . . .                             | 122 |
| 8.6.3.1 | <EthSwtLinkDownCallout> . . . . .                             | 123 |
| 8.6.3.2 | <EthSwtLinkUpCallout> . . . . .                               | 123 |
| 8.6.3.3 | <GetCfgDataRawDone> . . . . .                                 | 124 |
| 8.7     | Service Interfaces . . . . .                                  | 124 |
| 9       | Sequence diagrams . . . . .                                   | 125 |
| 9.1     | Switch Management support . . . . .                           | 126 |
| 10      | Configuration specification . . . . .                         | 128 |
| 10.1    | Containers and configuration parameters . . . . .             | 128 |
| 10.1.1  | EthSwt . . . . .  | 128 |
| 10.1.2  | EthSwtConfig . . . . .  | 130 |
| 10.1.3  | EthSwtDemEventParameterRefs . . . . .                         | 133 |
| 10.1.4  | EthSwtNvm . . . . .   | 134 |
| 10.1.5  | EthSwtPort . . . . .  | 135 |
| 10.1.6  | EthSwtPortEgress . . . . .                                    | 142 |
| 10.1.7  | EthSwtPortEgressScheduler . . . . .                           | 145 |
| 10.1.8  | EthSwtPortEgressSchedulerPredecessor . . . . .                | 145 |
| 10.1.9  | EthSwtPortFifo . . . . .                                      | 146 |
| 10.1.10 | EthSwtPortQueue . . . . .                                     | 148 |
| 10.1.11 | EthSwtPortEgressQueueTransmissionSelection . . . . .          | 149 |
| 10.1.12 | EthSwtPortEgressQueueTransmissionSelectionCBSConfig . . . . . | 150 |
| 10.1.13 | EthSwtPortShaper . . . . .                                    | 152 |
| 10.1.14 | EthSwtPortIngress . . . . .                                   | 153 |
| 10.1.15 | EthSwtPortIngressScheduler . . . . .                          | 157 |
| 10.1.16 | EthSwtPortATSSchedulerGroup . . . . .                         | 158 |
| 10.1.17 | EthSwtPortOutboundVlanPriorityAssignment . . . . .            | 158 |
| 10.1.18 | EthSwtPortPolicer . . . . .                                   | 160 |
| 10.1.19 | EthSwtPriorityRegeneration . . . . .                          | 162 |
| 10.1.20 | EthSwtPriorityTrafficClassAssignment . . . . .                | 163 |
| 10.1.21 | EthSwtSpi . . . . .   | 164 |
| 10.1.22 | EthSwtSpiSequence . . . . .                                   | 164 |
| 10.1.23 | EthSwtStreamIdentification . . . . .                          | 166 |
| 10.1.24 | EthSwtPSFP . . . . .  | 169 |
| 10.1.25 | EthSwtFlowMetering . . . . .                                  | 170 |
| 10.1.26 | EthSwtStreamGate . . . . .                                    | 172 |
| 10.1.27 | EthSwtPortATSScheduler . . . . .                              | 173 |
| 10.1.28 | EthSwtStreamFilterAction . . . . .                            | 175 |
| 10.1.29 | EthSwtStreamFilterActionDestinationPortModification . . . . . | 176 |
| 10.1.30 | EthSwtStreamFilterActionVlanModification . . . . .            | 178 |
| 10.1.31 | EthSwtStreamFilterRule . . . . .                              | 178 |
| 10.1.32 | EthSwtStreamFilterIPDestAddress . . . . .                     | 182 |
| 10.1.33 | EthSwtStreamFilterIPSrcAddress . . . . .                      | 183 |
| 10.1.34 | EthSwtStreamFilterMACDestAddress . . . . .                    | 184 |
| 10.1.35 | EthSwtStreamFilterMACSrcAddress . . . . .                     | 185 |
| 10.1.36 | EthSwtStreamFilterTcpDestPort . . . . .                       | 186 |



|         |  |     |
|---------|--|-----|
| 10.1.37 | EthSwtStreamFilterTcpSrcPort . . . . .     | 187 |
| 10.1.38 | EthSwtStreamFilterUdpDestPort . . . . .    | 188 |
| 10.1.39 | EthSwtStreamFilterUdpSrcPort . . . . .     | 189 |
| 10.1.40 | EthSwtMacForwardingTable . . . . .         | 190 |
| 10.1.41 | EthSwtVlanMembership . . . . .             | 191 |
| 10.1.42 | EthSwtVlanMembershipPortRefEntry . . . . . | 191 |
| 10.1.43 | EthSwtGeneral . . . . .                    | 193 |
| 10.2    | Constraints . . . . .                      | 212 |

# 1 Introduction and functional overview


In the AUTOSAR Layered Software Architecture [1], the Ethernet Switch Driver belongs to the Communication Hardware Abstraction.

This indicates the main task of the Ethernet Switch Driver:

Provide to the upper layers (e.g. Ethernet Interface [2]) a hardware independent interface comprising a switch with several ports. This interface shall be uniform for all Ethernet switches. Thus, the upper layers may access the underlying communication technology in a uniform manner.

A single Ethernet Switch Driver module supports only one type of switch hardware. The Ethernet physical layer ports are configured by the Ethernet Transceiver Driver[3]. The Ethernet Switch Driver's prefix generates a unique namespace. The Ethernet Interface can access different Ethernet controller types using different Ethernet Switch Drivers using this prefix. The decision which driver to use to access a particular transceiver is a configuration parameter of the Ethernet Interface.

Figure 1.1 depicts the lower part of the Ethernet stack. Accesses via an SPI- and MII/MDIO-Hardware-Interface for switch specific configuration or functions are directly done via the Ethernet Driver [4] or the SPI driver [5].

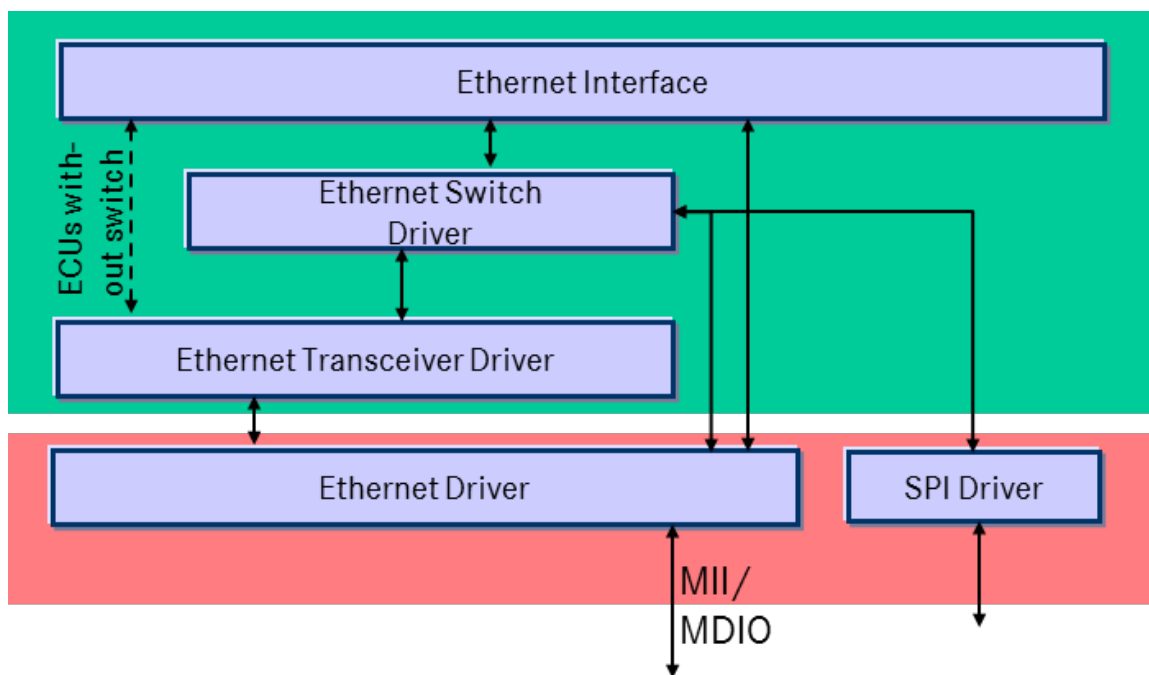

**Figure 1.1: Ethernet Switch Driver in layer architecture**

## 2 Acronyms and abbreviations

The glossary below includes acronyms and abbreviations and terms relevant to the Network Management Interface module that are not included in the [6, AUTOSAR glossary].

| Abbreviation / Acronym: | Description:  |
|-------------------------|---|
| DEM                     | Diagnostic Event Manager module   |
| EcuM                    | ECU State Manager module  |
| Eth                     | Ethernet Controller Driver (AUTOSAR BSW module)   |
| EthIf                   | Ethernet Interface (AUTOSAR BSW module)   |
| EthTrcv                 | Ethernet Transceiver Driver (AUTOSAR BSW module)  |
| MII                     | Media Independent Interface (standardized interface provided by Ethernet controllers to access Ethernet transceivers) |
| MDIO                    | Management Data Input/Output  |
| OA TC10                 | Open Alliance TC10 specification (see [7])  |

## 3 Related documentation

### 3.1 Input documents & related standards and norms

- [1] Layered Software Architecture  
AUTOSAR\_EXP\_LayeredSoftwareArchitecture
- [2] Specification of Ethernet Interface  
AUTOSAR\_SWS\_EthernetInterface
- [3] Specification of Ethernet Transceiver Driver  
AUTOSAR\_SWS\_EthernetTransceiverDriver
- [4] Specification of Ethernet Driver  
AUTOSAR\_SWS\_EthernetDriver
- [5] Specification of SPI Handler/Driver  
AUTOSAR\_SWS\_SPIHandlerDriver
- [6] Glossary  
AUTOSAR\_TR\_Glossary
- [7] OPEN Sleep/Wake-up Specification for Automotive Ethernet  
<http://www.opensig.org/Automotive-Ethernet-Specifications/>
- [8] General Specification of Basic Software Modules  
AUTOSAR\_SWS\_BSWGeneral
- [9] Requirements on Ethernet Support in AUTOSAR  
AUTOSAR\_SRS\_Ethernet
- [10] General Requirements on Basic Software Modules  
AUTOSAR\_SRS\_BSWGeneral
- [11] IEEE 802.1Q-2018 - IEEE Standard for Local and Metropolitan Area Network -  
Bridges and Bridged Networks  
<https://ieeexplore.ieee.org/>
- [12] Specification of Time Synchronization over Ethernet  
AUTOSAR\_SWS\_TimeSyncOverEthernet
- [13] Specification of NVRAM Manager  
AUTOSAR\_SWS\_NVRAMManager

### 3.2 Related specification

AUTOSAR provides a General Specification on Basic Software [8, SWS\_BSWGeneral] which is also valid for Ethernet Switch Driver.

Thus, the specifications [SWS\_BSWGeneral] [8], SRS\_Ethernet [9] shall be considered as additional and required specification for Ethernet Switch Driver.

## 4 Constraints and assumptions

### 4.1 Limitations

The Ethernet Switch Driver module is only able to handle a single thread of execution. The execution must not be pre-empted by itself.

The implementation is limited to 10Mbit/s, 100MBit/s and 1000Mbit/s Ethernet and transceivers connected via (gigabit) Media Independent Interface (xMII).

External MACPHY connected over SPI will not be supported by a switch.

Depending on the Ethernet hardware, it may become necessary that implementations deviate from API specifications in respect to the asynchronous/synchronous behavior.

The switch driver does not support the following features:

- MAC-based Ingress Filtering: No filtering options for Ethernet frames based on MAC-addresses is supported.

### 4.2 Applicability to car domains

The Ethernet BSW stack is intended to be used wherever high data rates are required but no hard real-time is required. Of course, it can also be used for less-demanding use cases, i.e. for low data rates.

## 5 Dependencies to other modules

This chapter lists the modules interacting with the Ethernet Switch Driver module.

Modules that use the Ethernet Switch Driver module:

- Ethernet Interface (EthIf) calls the Ethernet Switch driver for initializing and accessing the switch device.

Modules used by the Ethernet Switch Driver module:

- Ethernet Controller Driver (Eth) for transceiver access via Media Independent Interface (MII).
- Ethernet Transceiver Driver (EthTrcv) for configuring the PHY ports and controlling/checking the ports.
- The configuration of the Ethernet Switch device can be either via MDIO or SPI. In case of an SPI interface access to SPI module is necessary.

Dependencies to other Modules:

- On certain systems the Ethernet switch might share resources with other components, and may depend on their configuration. If those resources are within the scope of other modules (e.g. PLL configuration, memory mapping, etc.) the Ethernet Switch Driver module does not take care of configuring those components but requires their preceding initialization.

## 6 Requirements Tracing

The following tables reference the requirements specified in [9] as well as [10] and links to the fulfillment of these. Please note that if column “Satisfied by” is empty for a specific requirement this means that this requirement is not fulfilled by this document.

| Requirement     | Description  | Satisfied by   |
|-----------------|--|--|
| [SRS_BSW_00003] | All software modules shall provide version and identification information  | [SWS_EthSwT_00131]   |
| [SRS_BSW_00101] | The Basic Software Module shall be able to initialize variables and hardware in a separate initialization function                             | [SWS_EthSwT_00006]<br>[SWS_EthSwT_00007]<br>[SWS_EthSwT_00008]<br>[SWS_EthSwT_00011]   |
| [SRS_BSW_00161] | The AUTOSAR Basic Software shall provide a microcontroller abstraction layer which provides a standardized interface to higher software layers | [SWS_EthSwT_00099]<br>[SWS_EthSwT_00130]   |
| [SRS_BSW_00162] | The AUTOSAR Basic Software shall provide a hardware abstraction layer  | [SWS_EthSwT_00099]<br>[SWS_EthSwT_00130]   |
| [SRS_BSW_00171] | Optional functionality of a Basic-SW component that is not required in the ECU shall be configurable at pre-compile-time                       | [SWS_EthSwT_00022]<br>[SWS_EthSwT_00029]<br>[SWS_EthSwT_00035]<br>[SWS_EthSwT_00042]<br>[SWS_EthSwT_00049]<br>[SWS_EthSwT_00056]<br>[SWS_EthSwT_00058]<br>[SWS_EthSwT_00090]<br>[SWS_EthSwT_00095]<br>[SWS_EthSwT_00124]<br>[SWS_EthSwT_00129]<br>[SWS_EthSwT_00177]<br>[SWS_EthSwT_00186]<br>[SWS_EthSwT_00191]<br>[SWS_EthSwT_00202]<br>[SWS_EthSwT_00210]<br>[SWS_EthSwT_00215]<br>[SWS_EthSwT_00220]<br>[SWS_EthSwT_00225]<br>[SWS_EthSwT_00229]<br>[SWS_EthSwT_00230]<br>[SWS_EthSwT_00240]<br>[SWS_EthSwT_00243]<br>[SWS_EthSwT_00249] |



| Requirement            | Description   | Satisfied by   |
|------------------------|---|--|
|                        |   | <a href="#">[SWS_EthSwT_00253]</a><br><a href="#">[SWS_EthSwT_00257]</a><br><a href="#">[SWS_EthSwT_00261]</a><br><a href="#">[SWS_EthSwT_00264]</a><br><a href="#">[SWS_EthSwT_00268]</a><br><a href="#">[SWS_EthSwT_00273]</a><br><a href="#">[SWS_EthSwT_00287]</a><br><a href="#">[SWS_EthSwT_00291]</a><br><a href="#">[SWS_EthSwT_00297]</a><br><a href="#">[SWS_EthSwT_00303]</a><br><a href="#">[SWS_EthSwT_00308]</a><br><a href="#">[SWS_EthSwT_00312]</a><br><a href="#">[SWS_EthSwT_00317]</a><br><a href="#">[SWS_EthSwT_00322]</a><br><a href="#">[SWS_EthSwT_00327]</a><br><a href="#">[SWS_EthSwT_00332]</a><br><a href="#">[SWS_EthSwT_00338]</a><br><a href="#">[SWS_EthSwT_00344]</a><br><a href="#">[SWS_EthSwT_00350]</a><br><a href="#">[SWS_EthSwT_00362]</a><br><a href="#">[SWS_EthSwT_00370]</a><br><a href="#">[SWS_EthSwT_00379]</a><br><a href="#">[SWS_EthSwT_00403]</a><br><a href="#">[SWS_EthSwT_00405]</a><br><a href="#">[SWS_EthSwT_00427]</a><br><a href="#">[SWS_EthSwT_00432]</a><br><a href="#">[SWS_EthSwT_00441]</a><br><a href="#">[SWS_EthSwT_00443]</a> |
| <b>[SRS_BSW_00323]</b> | All AUTOSAR Basic Software Modules shall check passed API parameters for validity                                       | <a href="#">[SWS_EthSwT_00009]</a><br><a href="#">[SWS_EthSwT_00154]</a><br><a href="#">[SWS_EthSwT_00156]</a><br><a href="#">[SWS_EthSwT_00157]</a><br><a href="#">[SWS_EthSwT_00180]</a>   |
| <b>[SRS_BSW_00347]</b> | A Naming separation of different instances of BSW drivers shall be in place   | <a href="#">[SWS_EthSwT_00131]</a>   |
| <b>[SRS_BSW_00350]</b> | All AUTOSAR Basic Software Modules shall allow the enabling/disabling of detection and reporting of development errors. | <a href="#">[SWS_EthSwT_00386]</a><br><a href="#">[SWS_EthSwT_00387]</a><br><a href="#">[SWS_EthSwT_00389]</a><br><a href="#">[SWS_EthSwT_00390]</a><br><a href="#">[SWS_EthSwT_00391]</a><br><a href="#">[SWS_EthSwT_00392]</a><br><a href="#">[SWS_EthSwT_00393]</a>   |
| <b>[SRS_BSW_00369]</b> | All AUTOSAR Basic Software Modules shall not return specific development error codes via the API                        | <a href="#">[SWS_EthSwT_00009]</a><br><a href="#">[SWS_EthSwT_00128]</a><br><a href="#">[SWS_EthSwT_00154]</a><br><a href="#">[SWS_EthSwT_00156]</a><br><a href="#">[SWS_EthSwT_00157]</a><br><a href="#">[SWS_EthSwT_00164]</a><br><a href="#">[SWS_EthSwT_00180]</a>   |
| <b>[SRS_BSW_00375]</b> | Basic Software Modules shall report wake-up reasons   | <a href="#">[SWS_EthSwT_00098]</a>   |

| Requirement     | Description  | Satisfied by   |
|-----------------|--|--|
| [SRS_BSW_00385] | List possible error notifications  | [SWS_EthSwT_00001]<br>[SWS_EthSwT_00113]<br>[SWS_EthSwT_00395]   |
| [SRS_BSW_00386] | The BSW shall specify the configuration and conditions for detecting an error  | [SWS_EthSwT_00016]<br>[SWS_EthSwT_00164]   |
| [SRS_BSW_00395] | The Basic Software Module specifications shall list all configuration parameter dependencies   | [SWS_EthSwT_00165]   |
| [SRS_BSW_00406] | A static status variable denoting if a BSW module is initialized shall be initialized with value 0 before any APIs of the BSW module is called | [SWS_EthSwT_00123]   |
| [SRS_BSW_00413] | An index-based accessing of the instances of BSW modules shall be done   | [SWS_EthSwT_00120]<br>[SWS_EthSwT_00154]<br>[SWS_EthSwT_00156]<br>[SWS_EthSwT_00157]<br>[SWS_EthSwT_00180]   |
| [SRS_BSW_00433] | Main processing functions are only allowed to be called from task bodies provided by the BSW Scheduler   | [SWS_EthSwT_00114]<br>[SWS_EthSwT_00115]   |
| [SRS_Eth_00087] | Semi-Static Auto-Configuration   | [SWS_EthSwT_00031]<br>[SWS_EthSwT_00032]<br>[SWS_EthSwT_00060]<br>[SWS_EthSwT_00061]<br>[SWS_EthSwT_00086]<br>[SWS_EthSwT_00087]<br>[SWS_EthSwT_00091]<br>[SWS_EthSwT_00092]<br>[SWS_EthSwT_00098]<br>[SWS_EthSwT_00111]<br>[SWS_EthSwT_00117]<br>[SWS_EthSwT_00118]<br>[SWS_EthSwT_00125]<br>[SWS_EthSwT_00126]<br>[SWS_EthSwT_00127]<br>[SWS_EthSwT_00136]<br>[SWS_EthSwT_00162]<br>[SWS_EthSwT_00181]<br>[SWS_EthSwT_00182]<br>[SWS_EthSwT_00183]<br>[SWS_EthSwT_00187]<br>[SWS_EthSwT_00188]<br>[SWS_EthSwT_00193]<br>[SWS_EthSwT_00194] |

| Requirement            | Description   | Satisfied by   |
|------------------------|---|--|
|                        |   | <a href="#">[SWS_EthSwt_00196]</a><br><a href="#">[SWS_EthSwt_00197]</a><br><a href="#">[SWS_EthSwt_00203]</a><br><a href="#">[SWS_EthSwt_00204]</a><br><a href="#">[SWS_EthSwt_00226]</a><br><a href="#">[SWS_EthSwt_00227]</a><br><a href="#">[SWS_EthSwt_00228]</a><br><a href="#">[SWS_EthSwt_00235]</a>   |
| <b>[SRS_Eth_00107]</b> | The Ethernet Transceiver Driver shall support access to the wake up reason. | <a href="#">[SWS_EthSwt_00442]</a><br><a href="#">[SWS_EthSwt_91040]</a>   |
| <b>[SRS_Eth_00114]</b> | Ethernet Switch Filtering and Policing                                      | <a href="#">[SWS_EthSwt_00134]</a><br><a href="#">[SWS_EthSwt_00172]</a><br><a href="#">[SWS_EthSwt_00173]</a><br><a href="#">[SWS_EthSwt_00233]</a><br><a href="#">[SWS_EthSwt_00491]</a><br><a href="#">[SWS_EthSwt_00492]</a><br><a href="#">[SWS_EthSwt_00493]</a><br><a href="#">[SWS_EthSwt_00494]</a><br><a href="#">[SWS_EthSwt_CONSTR_00450]</a>  |
| <b>[SRS_Eth_00118]</b> | Transparent interface to underlying EthTrcv module(s)                       | <a href="#">[SWS_EthSwt_00018]</a><br><a href="#">[SWS_EthSwt_00019]</a><br><a href="#">[SWS_EthSwt_00023]</a><br><a href="#">[SWS_EthSwt_00025]</a><br><a href="#">[SWS_EthSwt_00026]</a><br><a href="#">[SWS_EthSwt_00038]</a><br><a href="#">[SWS_EthSwt_00044]</a><br><a href="#">[SWS_EthSwt_00045]</a><br><a href="#">[SWS_EthSwt_00051]</a><br><a href="#">[SWS_EthSwt_00052]</a><br><a href="#">[SWS_EthSwt_00098]</a><br><a href="#">[SWS_EthSwt_00154]</a><br><a href="#">[SWS_EthSwt_00156]</a><br><a href="#">[SWS_EthSwt_00157]</a><br><a href="#">[SWS_EthSwt_00164]</a><br><a href="#">[SWS_EthSwt_00217]</a><br><a href="#">[SWS_EthSwt_00222]</a><br><a href="#">[SWS_EthSwt_00398]</a><br><a href="#">[SWS_EthSwt_00440]</a><br><a href="#">[SWS_EthSwt_91003]</a> |
| <b>[SRS_Eth_00119]</b> | Access to hardware status of ports  | <a href="#">[SWS_EthSwt_00037]</a><br><a href="#">[SWS_EthSwt_00038]</a><br><a href="#">[SWS_EthSwt_00098]</a><br><a href="#">[SWS_EthSwt_00117]</a><br><a href="#">[SWS_EthSwt_00118]</a><br><a href="#">[SWS_EthSwt_00154]</a><br><a href="#">[SWS_EthSwt_00203]</a><br><a href="#">[SWS_EthSwt_00204]</a><br><a href="#">[SWS_EthSwt_00430]</a><br><a href="#">[SWS_EthSwt_00431]</a>   |

| Requirement     | Description                          | Satisfied by  |
|-----------------|--------------------------------------|---|
| [SRS_Eth_00120] | Hardware access via MII and/or SPI   | [SWS_EthSwt_00098]<br>[SWS_EthSwt_00206]<br>[SWS_EthSwt_00207]<br>[SWS_EthSwt_00211]<br>[SWS_EthSwt_00212]<br>[SWS_EthSwt_00216]<br>[SWS_EthSwt_00217]<br>[SWS_EthSwt_00221]<br>[SWS_EthSwt_00222]  |
| [SRS_Eth_00121] | Configuration of forwarding rules    | [SWS_EthSwt_00132]<br>[SWS_EthSwt_00133]<br>[SWS_EthSwt_00134]<br>[SWS_EthSwt_00135]<br>[SWS_EthSwt_00172]<br>[SWS_EthSwt_00173]<br>[SWS_EthSwt_00178]<br>[SWS_EthSwt_00179]<br>[SWS_EthSwt_00234]<br>[SWS_EthSwt_00460]<br>[SWS_EthSwt_00461]<br>[SWS_EthSwt_CONSTR_00450]<br>[SWS_EthSwt_CONSTR_00451]<br>[SWS_EthSwt_CONSTR_00452]<br>[SWS_EthSwt_CONSTR_00453]<br>[SWS_EthSwt_CONSTR_00454]<br>[SWS_EthSwt_CONSTR_00456]<br>[SWS_EthSwt_CONSTR_00457]<br>[SWS_EthSwt_CONSTR_00458]<br>[SWS_EthSwt_CONSTR_00459]<br>[SWS_EthSwt_CONSTR_00495]<br>[SWS_EthSwt_CONSTR_00496] |
| [SRS_Eth_00122] | Persistent storage of configurations | [SWS_EthSwt_00086]<br>[SWS_EthSwt_00087]<br>[SWS_EthSwt_00091]<br>[SWS_EthSwt_00092]<br>[SWS_EthSwt_00098]<br>[SWS_EthSwt_00125]<br>[SWS_EthSwt_00126]<br>[SWS_EthSwt_00127]<br>[SWS_EthSwt_00136]<br>[SWS_EthSwt_00182]<br>[SWS_EthSwt_00183]<br>[SWS_EthSwt_00192]<br>[SWS_EthSwt_00193]<br>[SWS_EthSwt_00194]<br>[SWS_EthSwt_00196]  |

| Requirement     | Description  | Satisfied by   |
|-----------------|--|--|
| [SRS_Eth_00123] | Testing and diagnostic of switch ports                           | [SWS_EthSwt_00293]<br>[SWS_EthSwt_00299]<br>[SWS_EthSwt_00305]<br>[SWS_EthSwt_00309]<br>[SWS_EthSwt_00313]<br>[SWS_EthSwt_00318]<br>[SWS_EthSwt_00323]<br>[SWS_EthSwt_00328]<br>[SWS_EthSwt_00334]<br>[SWS_EthSwt_00340]<br>[SWS_EthSwt_00346]<br>[SWS_EthSwt_00416]<br>[SWS_EthSwt_00417]<br>[SWS_EthSwt_00418]<br>[SWS_EthSwt_00419]<br>[SWS_EthSwt_00420]<br>[SWS_EthSwt_00421]<br>[SWS_EthSwt_00422]<br>[SWS_EthSwt_00424]<br>[SWS_EthSwt_00425]<br>[SWS_EthSwt_00426]<br>[SWS_EthSwt_91014]<br>[SWS_EthSwt_91015]<br>[SWS_EthSwt_91016]<br>[SWS_EthSwt_91017]<br>[SWS_EthSwt_91018]<br>[SWS_EthSwt_91019]<br>[SWS_EthSwt_91020]<br>[SWS_EthSwt_91021]<br>[SWS_EthSwt_91022]<br>[SWS_EthSwt_91023]<br>[SWS_EthSwt_91024]<br>[SWS_EthSwt_91025]<br>[SWS_EthSwt_91029]<br>[SWS_EthSwt_91030]<br>[SWS_EthSwt_91031]<br>[SWS_EthSwt_91032] |
| [SRS_Eth_00125] | The Ethernet Switch Driver shall support switch frame management | [SWS_EthSwt_00098]<br>[SWS_EthSwt_00240]<br>[SWS_EthSwt_00241]<br>[SWS_EthSwt_00242]<br>[SWS_EthSwt_00243]<br>[SWS_EthSwt_00245]<br>[SWS_EthSwt_00378]<br>[SWS_EthSwt_91002]<br>[SWS_EthSwt_91004]<br>[SWS_EthSwt_91005]<br>[SWS_EthSwt_91006]<br>[SWS_EthSwt_91007]<br>[SWS_EthSwt_91008]<br>[SWS_EthSwt_91009]<br>[SWS_EthSwt_91010]<br>[SWS_EthSwt_91028]   |

| Requirement     | Description  | Satisfied by   |
|-----------------|--|--|
| [SRS_Eth_00126] | Independent reset of host ECU and switch hardware                          | <a href="#">[SWS_EthSwt_00181]</a><br><a href="#">[SWS_EthSwt_00292]</a><br><a href="#">[SWS_EthSwt_91012]</a><br><a href="#">[SWS_EthSwt_91013]</a>   |
| [SRS_Eth_00128] | The Ethernet Switch Driver shall provide statistic counter values per port | <a href="#">[SWS_EthSwt_00106]</a><br><a href="#">[SWS_EthSwt_00198]</a><br><a href="#">[SWS_EthSwt_00199]</a><br><a href="#">[SWS_EthSwt_00231]</a><br><a href="#">[SWS_EthSwt_00372]</a><br><a href="#">[SWS_EthSwt_00373]</a><br><a href="#">[SWS_EthSwt_91000]</a><br><a href="#">[SWS_EthSwt_91001]</a> |

## 7 Functional specification


### 7.1 Ethernet BSW stack

As part of the AUTOSAR Layered Software Architecture according to [Figure 7.1](#), the Ethernet BSW modules also form a layered software stack.

[Figure 7.1](#) depicts the basic Ethernet BSW stack. The EthIf module accesses several switches using one or more Ethernet Switch Driver modules. The role of the Ethernet transceiver driver is to configure and control the physical layer ports (PHY) integrated into or connected to a switch. Whereas, the role of the Ethernet switch driver is the configuration and control of the switch. In case the Ethernet interface wants to access a PHY, it has to use the APIs of the switch driver which forward the API call to the addressed transceiver driver.

By separating the transceiver driver from the switch driver, different hardware architectures will be supported. In HW-Variant 1, the PHYs are separate devices from different vendors. They are connected via MII and MDIO to a switch which is integrated into a microcontroller. In HW-Variant 2, the switch has integrated PHYs. In HW-Variant 3, the microcontroller can control the switch via MDIO or SPI and the switch has three external PHYs which can be controlled via MDIO. In this case, different Ethernet transceiver drivers might occur.


Please note that the functional behavior of the ingress and egress port of a switch is implemented in hardware in the switch devices (see [11]). Thus, the configuration from [chapter 10](#) in some parts has to be written to the switch device.

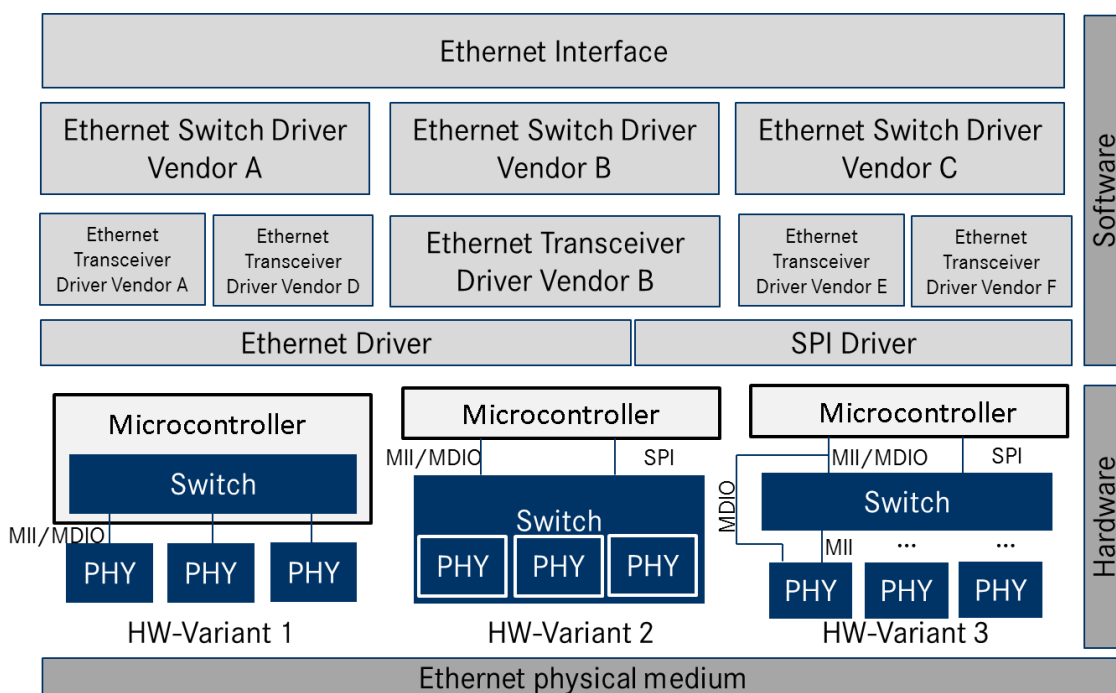

**Figure 7.1: Basic Structure of the Ethernet BSW stack.(Note: The different hardware variants are alternative setups)**

### 7.1.1 Indexing scheme

Users of the Ethernet Switch Driver identify switch resources using an indexing scheme as depicted in [Figure 7.2](#).

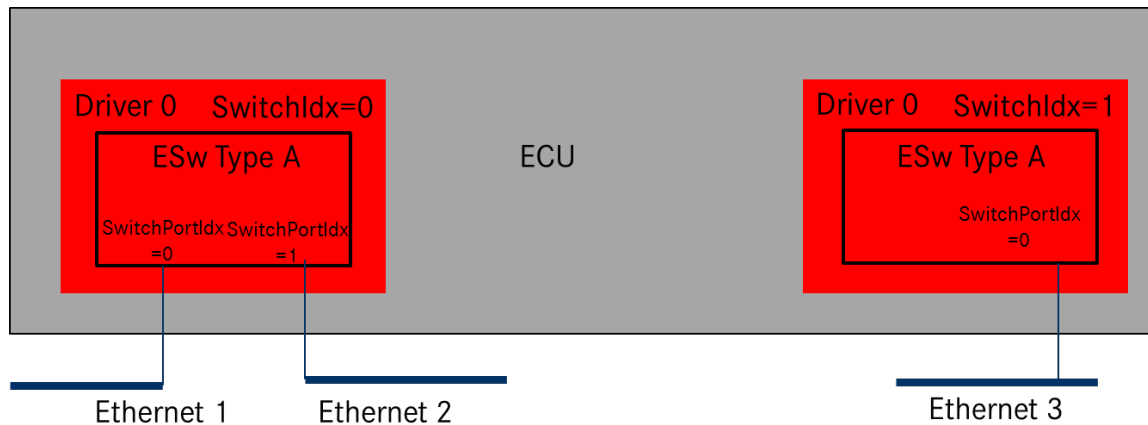

**Figure 7.2: Ethernet Switch Driver indexing scheme**

**[SWS\_EthSwT\_00099]** [The Ethernet Switch Driver shall use a zero-based index to abstract the access for upper software layers.]([SRS\\_BSW\\_00161](#), [SRS\\_BSW\\_00162](#))

**[SWS\_EthSwT\_00130]** [The `SwitchPortIdx` is an index for a port at the switch.]([SRS\\_BSW\\_00161](#), [SRS\\_BSW\\_00162](#))

**[SWS\_EthSwT\_00120]** [The parameter `EthSwTIdx` within the configuration shall correspond to the argument used in the API.]([SRS\\_BSW\\_00413](#))

**[SWS\_EthSwT\_00180]** [The parameter `EthSwTIndex` shall be used to distinguish different instances of a switch driver module in case the API `Det_ReportError` (`uint16 ModuleId`, `uint8 InstanceId`, `uint8 ApiId`, `uint8 ErrorId`) is called.]([SRS\\_BSW\\_00413](#), [SRS\\_BSW\\_00323](#), [SRS\\_BSW\\_00369](#))

**[SWS\_EthSwT\_00131]** [In case different Switch devices are used in one ECU, the function names of the different Ethernet Switch drivers must be modified such that no two functions with the same names are generated. It is the responsibility of the user to take care that no two functions with the same names are configured. The names may be extended with a vendor ID or a type ID.]([SRS\\_BSW\\_00003](#), [SRS\\_BSW\\_00347](#))

### 7.1.2 Ethernet Switch Port Mirroring

Ethernet switch port mirroring use the common established functionality of the Ethernet switch hardware to mirror traffic of one or more Ethernet switch ports (mirrored port) to a another Ethernet switch port (capture port). The mirroring configuration is given by the port mirror configuration (see [[SWS\\_EthSwT\\_91017](#)]). The port mirror configuration is set up per Ethernet switch. The configuration is stored persistently by the Ethernet switch driver. Therefore a shadow buffer is used to store the port mirror configura-



tion during runtime and stored persistently according to the NvM storing strategy (e.g. store the shadow buffer persistently upon ECU shutdown). The port mirror configuration could be activated and de-activated, respectively, explicitly via dedicated APIs. The port mirroring is controlled by a dedicated diagnostic CDD with receive diagnostic request and forward them to the Ethernet switch driver.

**[SWS\_EthSwT\_00416]** [The port mirror configuration (see [SWS\_EthSwT\_91017] ) shall be written to a shadow buffer of the Ethernet switch driver per Ethernet Switch by calling `EthSwT_WritePortMirrorConfiguration`.] (SRS\_Eth\_00123)

**Note:** One port mirror configuration is maintained per Ethernet switch.

**[SWS\_EthSwT\_00417]** [The port mirror configuration shall be enabled and disabled, respectively, per Ethernet Switch by calling `EthSwT_SetPortMirrorState`. The current state of the stored port mirror configuration shall be stored persistently, to out-last an ECU reset and to restore the port mirroring activities after an ECU reset.] (SRS\_Eth\_00123)

**[SWS\_EthSwT\_00418]** [The stored port mirror configuration shall be marked as "to be deleted" by calling `EthSwT_DeletePortMirrorConfiguration`, if the port mirroring of the given Ethernet switch index is disabled (see [SWS\_EthSwT\_91022]. Otherwise the request to delete the port mirror configuration shall be rejected.] (SRS\_Eth\_00123)

**Note:** The shadow buffer is stored persistently according to the NvM storing strategy, e.g. store the shadow buffer persistently upon ECU shutdown.

**[SWS\_EthSwT\_00419]** [The current port mirroring state shall be returned by calling `EthSwT_GetPortMirrorState`.] (SRS\_Eth\_00123)

**[SWS\_EthSwT\_00420]** [The port mirror configuration per Ethernet switch shall be returned by calling `EthSwT_ReadPortMirrorConfiguration`.] (SRS\_Eth\_00123)

### 7.1.3 State Handling

**[SWS\_EthSwT\_00435]** [All functions apart from `EthSwT_SetSwitchPortMode`, `EthSwT_GetSwitchPortMode`, `EthSwT_StartSwitchPortAutoNegotiation`, `EthSwT_GetLinkState`, `EthSwT_GetBaudRate`, `EthSwT_GetDuplexMode`, `EthSwT_ReadTrcvRegister`, `EthSwT_WriteTrcvRegister`, `EthSwT_Init`, `EthSwT_MainFunction` and `EthSwT_BackgroundTask` may only be called in state `ETHSWT_STATE_ACTIVE`.

If a function which can only run (succeed with `E_OK`) in the states `ETHSWT_STATE_PORTINIT_COMPLETED` and `ETHSWT_STATE_ACTIVE` is called before state `ETHSWT_STATE_PORTINIT_COMPLETED` is reached, the Ethernet switch driver shall raise the runtime error `ETHSWT_INIT_NOT_COMPLETED`.] ()

**[SWS\_EthSwT\_00436]** [`ETHSWT_STATE_PORTINIT_COMPLETED` shall be reached as soon as the port initialization has finished.] ()

**Note:** `ETHSWT_STATE_PORTINIT_COMPLETED` can be reached either by the function `EthSwt_Init` or by a background task (see [SWS\_EthSwt\_91104]).

[SWS\_EthSwt\_00437] [`ETHSWT_STATE_ACTIVE` shall be reached, when the Ethernet switch initialization has finished.]()

**Note:** The initialization of the Ethernet switch takes longer than the initialization of the Ethernet switch ports.

## 7.1.4 Handling of cable diagnostic

Cable diagnostic measurement is triggered by calling `EthSwt_RunPortCableDiagnostic`. The current state of the cable diagnostic measurement is polled by calling `EthSwt_GetPortCableDiagnosticsResult`. If `EthSwt_GetPortCableDiagnosticsResult` return with other value than `ETHTRCV_CABLEDIAG_PENDING`, then the cable diagnostic has finished.

Its up to the caller to re-trigger cable diagnostic again, if the measurement failed by returning `ETHTRCV_CABLEDIAG_ERROR`.

[SWS\_EthSwt\_00428] [The cable diagnostic APIs (`EthSwt_RunPortCableDiagnostic`, `EthSwt_GetPortCableDiagnosticsResult`) shall only be called for Ethernet switch ports of a Ethernet switch, where the Ethernet switch ports reference an Ethernet transceiver.]()


**Note:** The upper layer is a CDD that triggers the cable diagnostic measurement and maintains the cable diagnostic result. The `EthSwt` forwards the API calls to the `EthTrcv` (see [SWS\_EthSwt\_00429] and [SWS\_EthSwt\_00346]).

## 7.1.5 Functional Description

### 7.1.5.1 Learning Phase at Start-up

[SWS\_EthSwt\_00226] [The switch driver shall support a learning phase which can be divided into several sequential steps.](*SRS\_Eth\_00087*)


Note: After assembly and initial power-up of the network, three learning phases follow which include MAC-Learning and IP-Address Assignment. Afterwards the learned parameters are stored to one or several non-volatile memories to make them available for subsequent start-ups. This process is shown in [Figure 7.3](#). As an example for triggering this process, the DCM receives a diagnostic request via a bus system or a broadcast message in the Ethernet network. This diagnostic request can be forwarded to an SWC which triggers the auto-configuration process. However, the trigger is not part of this specification.

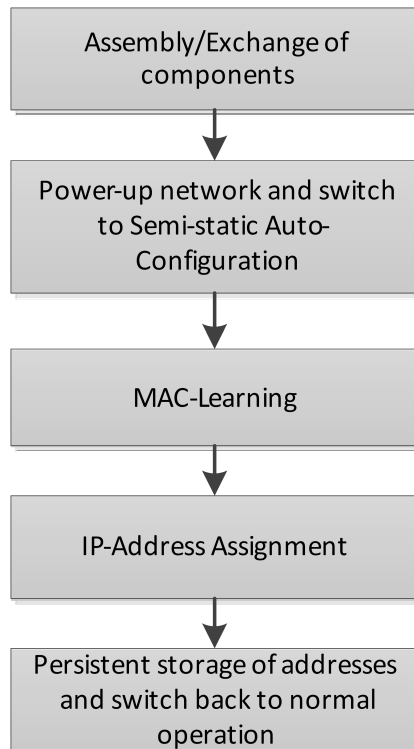

**Figure 7.3: Learning Process**


**MAC-Learning (Optional Step):** In this phase, messages need to be sent through the network and the switch will learn new MAC addresses (cf. [Figure 7.4](#)). These MAC-addresses will be stored in addition to predefined addresses, e.g. multicast MAC addresses which are configured during the vehicle network design. If static learning is executed, i.e. MAC address will be persistently stored, it might be possible to add dynamically learned entries in the tables.

If software MAC learning is supported by switch hardware and the switch hardware expects an external microcontroller (see Variant 2 and 3 in [Figure 7.1](#)), packets with unknown MAC Source Address will be routed to this microcontroller. The MAC learning is done by integration code. It is intentionally not defined where this algorithm is located within the AUTOSAR stack as this might need a very time-optimized solution.

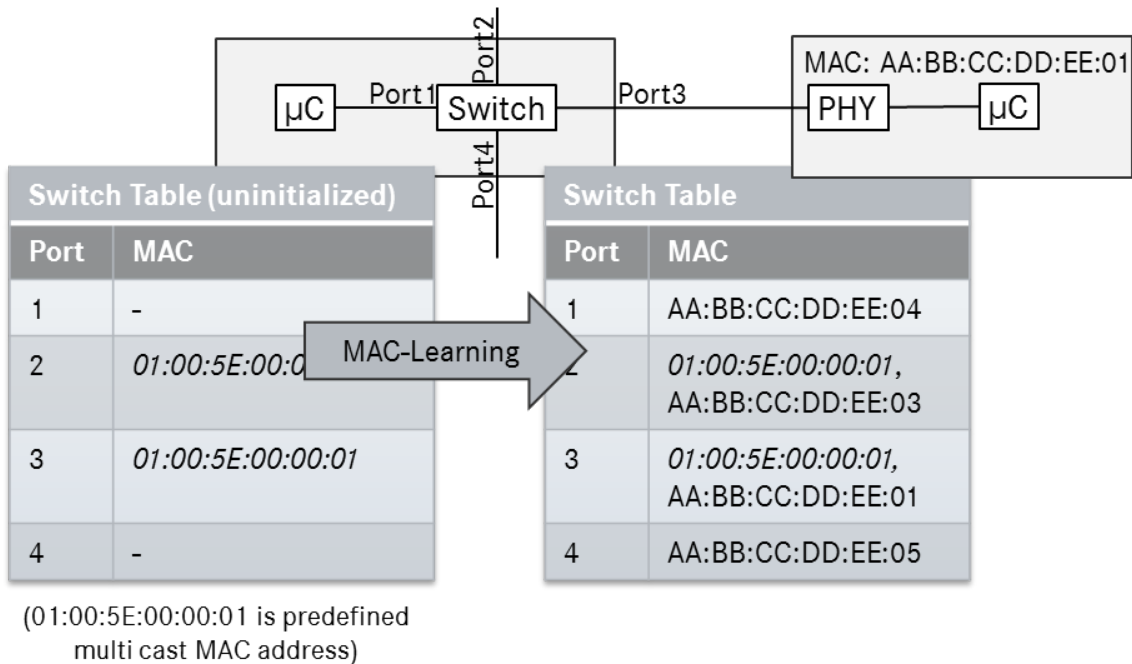

**Figure 7.4: MAC-learning within the switch**

IP-Address Assignment: In this phase, ECUs without a predefined IP-address will start to acquire an IP-address via DHCP (cf. [Figure 7.5](#)). Thus, these ECUs will run a DHCP-client while the ECU with the switch will run a DHCP server. In order to be able to assign always the same IP-address to a certain node, the DHCP server needs the information at which port the MAC address has been received. This port information can be interpreted as a "domain name" in the internet which is resolved to an IP address using a domain name server (DNS). With this port information the DHCP-server will assign the IP-address according to the IP-Assignment Table to the node. As mentioned above, this allows the assignment of MAC addresses by the Tier 1 and assignment of IP addresses by the OEM. With this mechanism it is also possible to assign different IP addresses to several VLANs at the same port. For this purpose, the IP-Assignment Table needs to be extended with a VLAN-column. Please note that the MAC-Learning-Phase can be combined with this phase.

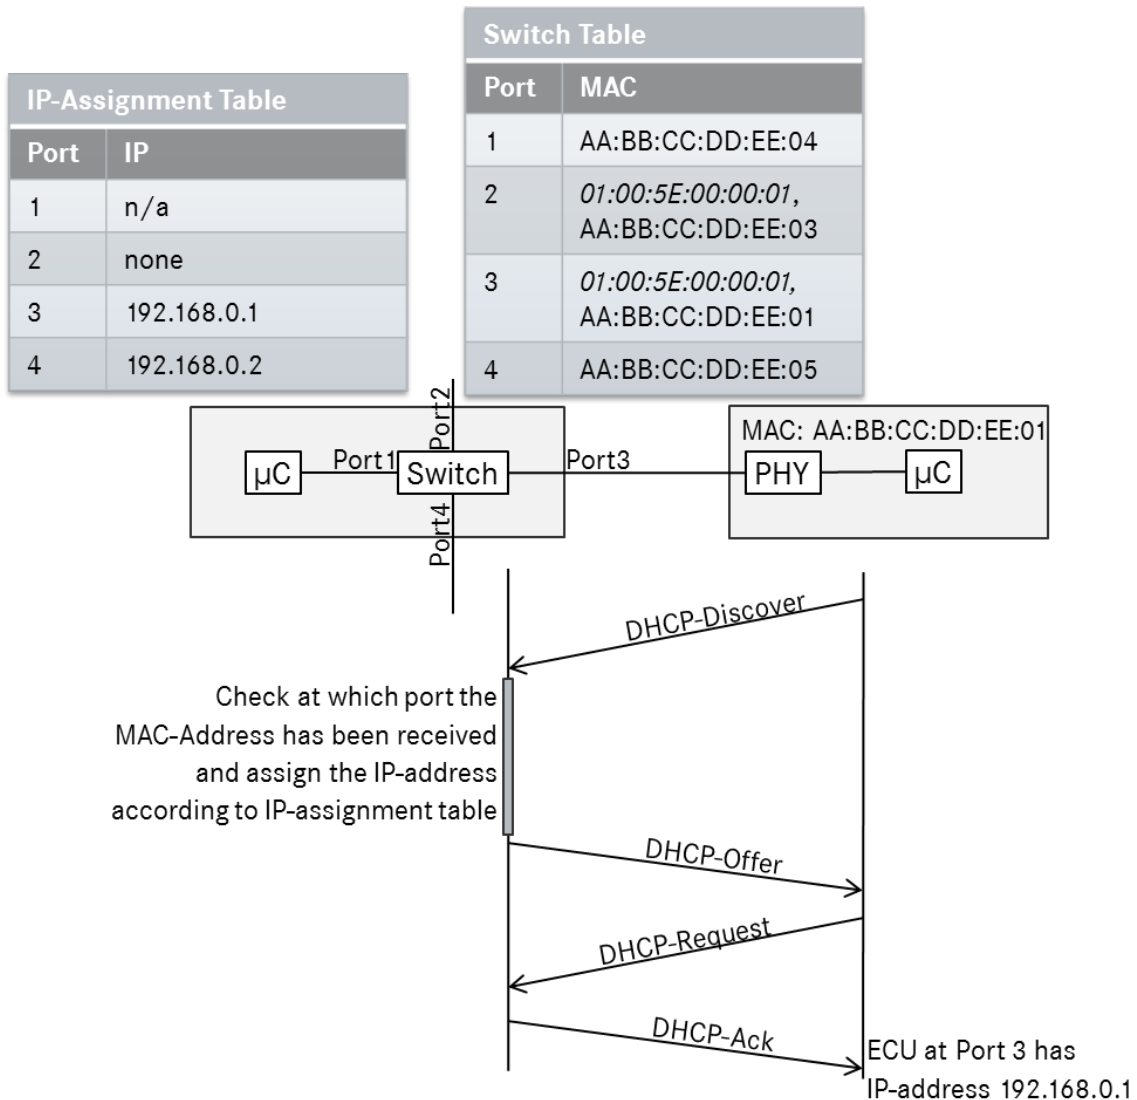

**Figure 7.5: IP-address assignment via DHCP**

**[SWS\_EthSwt\_00136]** [The Ethernet Switch driver shall support an API which allows to store learned parameters like address resolution tables in a persistent manner by using the API `EthSwt_StoreConfiguration`. This persistent storage can be done in an NVRAM of the host CPU which runs the Ethernet Switch driver. Alternatively, this can be done in a memory of the switch itself. The trigger for storing the learned configuration or resetting the stored configuration can be done e.g. by a DCM.] ([SRS\\_Eth\\_00122](#), [SRS\\_Eth\\_00087](#))

**[SWS\_EthSwt\_00181]** [The Ethernet Switch driver shall support an API which allows to reset learned parameters like address resolution tables by using the API `EthSwt_ResetConfiguration`.] ([SRS\\_Eth\\_00126](#), [SRS\\_Eth\\_00087](#))

**[SWS\_EthSwt\_00162]** [The switch driver shall provide APIs to read the MAC-address to switch port mapping from the switch device to support the IP-address assignment by using the API `EthSwt_GetPortMacAddr`.] ([SRS\\_Eth\\_00087](#))


**[SWS\_EthSwt\_00407]** [Unused ARL table entries shall be removed from the ARL table after the timeout configured via `EthSwtArlTableEntryTimeout`, if this parameter is present in the configuration.]()

### 7.1.5.2 Frame forwarding process

As shown in [Figure 7.6](#), the Ethernet switch consists of a certain number of Ethernet switch ports. A single physical Ethernet port is logically divided in an ingress port and an egress port. A frame is received by an Ethernet switch port in the role of an ingress port. This frame is processed within the Ethernet switch and most likely forwarded to one or more Ethernet switch ports in the role of an egress port. This process is called the "frame forwarding process". A frame forwarding process considers among others the following points:


- An Ethernet frame is typically not forwarded to the Ethernet switch port where it has been received.
- A unicast Ethernet frame could be forwarded to exactly one egress port. (Please note, for some reasons (e.g. mirroring or unknown unicast Ethernet frame) a unicast Ethernet frame may be forwarded to multiple egress ports)
- A multicast Ethernet frame (e.g. SOME/IP-SD offer frame) could be forwarded to one or more egress ports.
- A broadcast Ethernet frame (e.g. ARP frame) is forwarded to all egress ports except the Ethernet switch port from where the frame has been received.

Please note: The route of the frame within an Ethernet switch from an ingress port to one or multiple egress ports is called "internal frame route".

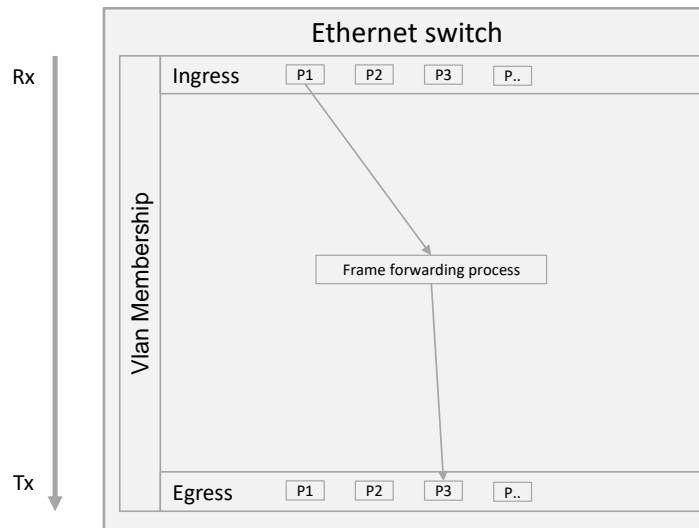

**Figure 7.6: Simplified frame forwarding process within an Ethernet switch**

The forwarding process consists of multiple frame processing levels. Some frame processing levels are always performed (e.g. check of VLAN membership) and some frame processing levels are performed if they are configured (e.g. flow metering). A frame processing level may qualify a received frame as invalid. Such a frame is discarded and therefore not forwarded to the subsequent frame processing level. The IEEE802.1Q specifies the frame forwarding process and particular frame processing levels. [Figure 7.7](#) shows an overview of the processing levels which are supported by AUTOSAR.

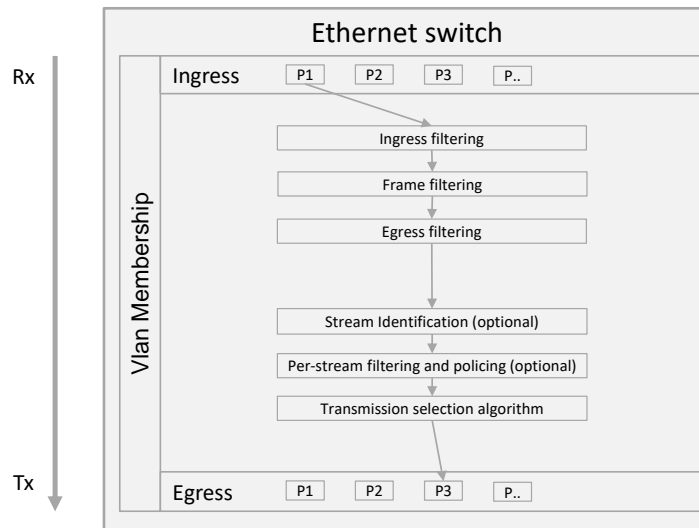

**Figure 7.7: Overview of frame processing levels within an Ethernet switch supported by AUTOSAR**

The following chapters describe the behaviour of the supported procession levels.

### 7.1.5.3 Ingress filtering

If an Ethernet frame is received, then a so-called ingress filtering is performed by an Ethernet switch. The following sub chapters describe the details of the processing.

#### 7.1.5.3.1 Vlan-Membership

For each Ethernet switch port a VLAN membership could be defined. An Ethernet switch port could be member of 0..\* VLANs. The VLAN membership impacts the frame processing. A VLAN Membership describes ingress and egress behavior in terms of filtering, tagging or untagging.

- Ingress behaviour: The Ethernet switch inspect if an VLAN tag within an received Ethernet frame exists. If an VLAN tag within the received Ethernet frame exist, the Ethernet switch checks a received VLAN identifier (VLAN-ID). If the Ethernet switch port from where the Ethernet frame has been received is member of the VLAN which is associated with the received VLAN-ID, then the frame processing will continue, otherwise the frame is discarded and no further frame



processing will be performed. Thus, all supported VLAN-IDs are configured in `EthSwtVlanMembership`.

- Egress behaviour: If a received Ethernet frame with an particular VLAN-ID passed all processing levels, the Ethernet switch has to add the frame to an egress queue according to the internal frame route. Thereby, the VLAN membership defines with `EthSwtVlanForwardingType`, if an Ethernet frame with a particular VLAN-ID shall be sent on the affected port with a VLAN tag (`ETH-SWT_SENT_TAGGED`), or if this Ethernet frame shall be sent on the affected port without the VLAN tag (`ETHSWT_SENT_UNTAGGED`), or if this Ethernet frame shall not be sent on the affected port (`ETHSWT_NOT_SENT`).

For each VLAN-ID a table is necessary which stores at which egress port an Ethernet frame with the corresponding VLAN-ID is sent tagged, sent untagged or not sent. For an 8-port switch, this table could look like the following example where T stands for tagging, U for untagging, N for not sent and "-" not member of this VLAN:

| VLAN Forwarding Table |             |   |   |   |   |   |   |   |
|-----------------------|-------------|---|---|---|---|---|---|---|
| VLAN-ID               | Port Number |   |   |   |   |   |   |   |
|                       | 1           | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 1                     | T           | T | - | U | - | - | - | T |
| 2                     | T           | U | - | T | - | - | - | N |
| ...                   |             |   |   |   |   |   |   |   |
| 4094                  |             |   |   |   |   |   |   |   |

Examples of communication scenarios:

- Incoming Ethernet frames which contain a VLAN-ID of e.g. 1 can be forwarded to the ports 1, 2, 4, and 8. At ports 1, 2, and 8 these Ethernet frames will be transmitted with the VLAN tag and at port 4 the VLAN tag will be removed. Ethernet frames which contain a VLAN-ID e.g. 1 received on ports 3,5,6 and 7 will be discarded.
- If a broadcast message with e.g. VLAN-ID 2 will be received at port 2, it will be forwarded to port 1,4 and 8. At ports 1 and 4 these Ethernet frames will be transmitted with the VLAN tag and on port 8 it will not be send, since the forwarding type is configured with N (`ETHSWT_NOT_SENT`). The other ports 3, 5, 6, and 7 are not in the same VLAN. Thus, the Ethernet frame will not be forwarded to these egress ports.
- If a broadcast message with e.g. VLAN-ID 2 will be received at port 8, it will be forwarded to port 1,2 and 4. At ports 1 and 4 these Ethernet frames will be transmitted with the VLAN tag and on port 2 the VLAN tag will be removed. The other ports 3, 5, 6, and 7 are not in the same VLAN. Thus, the Ethernet frame will not be forwarded to these egress ports.

The table considers only messages, which contain a VLAN-ID within the Ethernet switch.

**[SWS\_EthSwt\_00134]{OBSOLETE}** [Replaced by [\[SWS\\_EthSwt\\_CONSTR\\_00450\]](#). The switch configuration shall support the configuration how packets will be forwarded with respect to configured VLANs by using the configuration parameters of the subcontainer [EthSwtVlanMembership](#).] ([SRS\\_Eth\\_00121](#), [SRS\\_Eth\\_00114](#))

**[SWS\_EthSwt\_CONSTR\_00450]{DRAFT}** [The switch configuration shall support the configuration how packets will be forwarded with respect to configured VLANs by using the configuration parameters of the subcontainer [EthSwtVlanMembership](#).] ([SRS\\_Eth\\_00121](#), [SRS\\_Eth\\_00114](#))

Note: VLAN-Memberships of a port are modeled with the container [EthSwtVlanMembership](#) where the associated ports are referenced via [EthSwtVlanMembership-PortRef](#) and the according [EthSwtVlanForwardingType](#) is configured.

### 7.1.5.3.2 VLAN-modification at ingress side

It is possible to define a port-based modification of the VLAN-ID or an insertion of a VLAN-ID into a received Ethernet frame. This is specified with another table, e.g.:

| Ingress VLAN Modification/Insertion Table |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|
| Port Number                               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| VLAN-ID                                   | 2 | - | - | 6 | - | - | - | - |

In this example, all incoming Ethernet frames at port 1 will get the VLAN-ID 2 no matter if they already had one before. At port 4, all incoming Ethernet frames will get 6 as their VLAN-ID. At the remaining ports, no VLAN-IDs will be inserted and an existing VLAN-ID in the Ethernet frame will remain without modification.

**[SWS\_EthSwt\_00135]{OBSOLETE}** [Replaced by [\[SWS\\_EthSwt\\_CONSTR\\_00451\]](#). The switch configuration shall support the configuration how VLANs will be inserted into Ethernet frames or existing VLANs will be modified by the configuration [EthSwt-PortIngressVlanModification](#).] ([SRS\\_Eth\\_00121](#))

**[SWS\_EthSwt\_CONSTR\_00451]{DRAFT}** [The switch configuration shall support the configuration how VLANs will be inserted into Ethernet frames or existing VLANs will be modified by the configuration [EthSwtPortIngressVlanModification](#).] ([SRS\\_Eth\\_00121](#))

### 7.1.5.3.3 VLAN network - Handling of untagged Ethernet frames

For Ethernet frames which are received without an VLAN tag, a specific Ethernet switch handling could be configured via the AUTOSAR Ethernet switch driver.

There are two ways to handle untagged Ethernet frames at ingress side:

- Drop all untagged Ethernet frames at ingress side of the Ethernet port where the Ethernet frame was received
- Tag all untagged Ethernet frames at ingress side with a default VLAN and default VLAN priority.

Note: The handling of untagged Ethernet frames by the Ethernet switch is expected to be performed before all other modifications of the VLAN (e.g. VLAN modification). This applies also for the VLAN priority handling, which is expected to be performed before a Traffic Class assignment (see subsequent chapters) is done.

Basically, an Ethernet switch tag all Ethernet frames internally for its internal processing with hardware specific default value for a VLAN tag. This hardware specific default value can be overwritten via `EthSwtPortIngressDefaultVlan` and `EthSwtPortIngressDefaultPriority` per Ethernet switch port

**[SWS\_EthSwt\_CONSTR\_00452]{DRAFT}** [If `EthSwtPortIngressDefaultVlan` and `EthSwtPortIngressDefaultPriority` for a particular Ethernet port is available, then the default VLAN and the default priority of this hardware Ethernet switch port shall be configured with the available values.]([SRS\\_Eth\\_00121](#))

**Implementation Hint:** A VLAN tag consist of a VLAN-ID and the VLAN priority.

**[SWS\_EthSwt\_CONSTR\_00453]{DRAFT}** [If Ethernet frames without a VLAN tag (untagged Ethernet frame) which are received on a particular Ethernet port shall be dropped, then the parameter `EthSwtPortIngressDropUntagged` of this Ethernet port shall be set to `TRUE` and the parameters `EthSwtPortIngressDefaultVlan` and `EthSwtPortIngressDefaultPriority` of this Ethernet port shall not be configured (multiplicity of both parameters are 0)]([SRS\\_Eth\\_00121](#))

**[SWS\_EthSwt\_CONSTR\_00454]{DRAFT}** [If Ethernet frames without a VLAN tag (untagged Ethernet frame) which are received on a particular Ethernet port shall be handled for further processing with a dedicated VLAN-ID and VLAN priority, then the parameter `EthSwtPortIngressDropUntagged` of this Ethernet port shall be set to `FALSE` and the parameters `EthSwtPortIngressDefaultVlan` and `EthSwtPortIngressDefaultPriority` of this Ethernet port shall be configured.]([SRS\\_Eth\\_00121](#))

Note: If a Ethernet frame shall be sent without a VLAN tag (untagged Ethernet frame) of a specific VLAN-ID and on a particular egress port, then `EthSwtVlanForwardingType` of this VLAN-ID at this Ethernet port need to be set to `ETHSWT_SENT_UNTAGGED` (see [paragraph 7.1.5.3.1](#))

#### 7.1.5.3.4 VLAN network - Handling of double tagged Ethernet frames

AUTOSAR support to configure the handling for so-called "double tagged" Ethernet frames per Ethernet switch. Double tagged Ethernet frames contain two VLAN tags. For some use cases it may be avoided to handle such Ethernet frames. Therefore a boolean parameter `EthSwtDropDoubleTagged` is available. Per default the forward-

ing of double tagged frames is supported. The Switch Driver supports a configuration of dropping double tagged frames via the configuration parameter [EthSwtDropDoubleTagged](#), if the Ethernet switch hardware supports dropping of double tagged Ethernet frames.

**[SWS\_EthSwt\_00233]** [If the parameter [EthSwtDropDoubleTagged](#) is set to TRUE, the double tagged frames shall be dropped independent on which Ethernet switch port this Ethernet frame has been received.] ([SRS\\_Eth\\_00114](#))

### 7.1.5.3.5 Priority handling

A VLAN tag of an Ethernet frame consist of a VLAN-ID and the VLAN priority. The VLAN priority within an VLAN tag is called the PCP-field (priority code point). The PCP defines the priority this Ethernet frame shall be handled within the Ethernet frame forwarding process. The PCP is an 3bit value and define the lowest priority with 0 and highest priority with 7. The prioritisation of Ethernet traffic support the quality of service technique on a switched Ethernet network. From the Ethernet switch perspective the priority received with an Ethernet frame could be re-defined for the internal frame processing. AUTOSAR supports the following methodes to re-define the VLAN priority of an received Ethernet frame for the internal frame processing:

- definition of an internal priority value (IPV) which could be configured if per-stream filtering is used (see [paragraph 7.1.5.6.3](#))
- regeneration of the ingress PCP (PCP regenerenrated priority)


The methods to re-define the VLAN priority of a received Ethernet frame could coexit. It is possible to define a table for priority regeneration and additionally per-stream filtering and policing with a IPV per stream gate. The usage of a re-defined priority differ partly:

- PCP regenerenrated priority and internal priority values are used for the traffic class assignment of a Ethernet frame
- PCP regenerated priority is used for the outbound priority assignment

The methods to re-define a VLAN priority and the configuration within the Ethernet switch driver are described in the following chapters.

#### 7.1.5.3.5.1 Priority to traffic class assignment

The Ethernet switch elects the priority for a traffic class assignment of a particular Ethernet frame. The elected priority is used to assign a particular Ethernet frame to a dedicated traffic class (please note, the usage of a traffic class is described in [subsubsection 7.1.5.7](#)). The priority selection of an particular Ethernet frame for the internal Ethernet frame processing is depicted in [Figure 7.8](#).

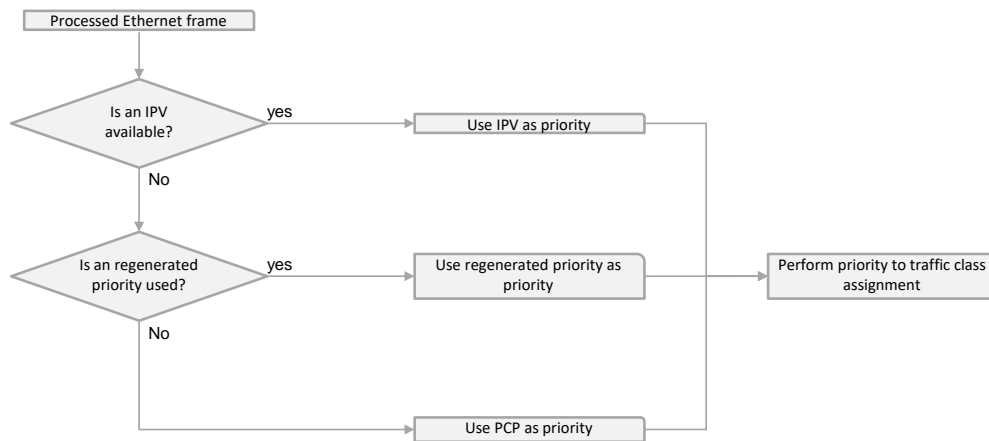

**Figure 7.8: Priority election process to elect the priority for the internal Ethernet frame procession**

The Ethernet switch has to check if the internal frame route of a received Ethernet frame is processed by a per-stream filtering to determine the stream gate and the availability of the according IPV (see [EthSwtStreamGateIPV](#)). If no IPV is available, then the Ethernet switch has to determine if a regenerated priority value (see [EthSwt-PriorityRegeneration](#)) is available. If no regenerated priority value is available then the priority of the PCP field of the received Ethernet frame is used to assign the Ethernet frame to a particular traffic class.

**[SWS\_EthSwt\_00455]{DRAFT}** [If an Ethernet switch has to elect an priority value for an received Ethernet frame, then the priority election process shall be performed according the following order:

- If the Ethernet switch detect that the received Ethernet frame is handled by an per-stream filtering and policing (see [EthSwtPSFP](#)) and the corresponding stream gate (see [EthSwtStreamGate](#)) has an IPV configured, then this value shall be used as priority to map this Ethernet frame to a traffic class. Otherwise the Ethernet switch shall proceed as discribed within the next point.
- Else if the Ethernet switch detect that a regenerated priority value (see [EthSwt-PriorityRegeneration](#)) is available, then this value shall be used as priority to map this Ethernet frame to a traffic class. Otherwise the Ethernet switch shall proceed as discribed within the next point.

- Else if neither a IPV nor a regenerated priority value is available, then the PCP of the received Ethernet frame shall be used as priority to map this Ethernet frame to a traffic class.

]()

For the mapping of an Ethernet frame to a certain traffic class, a table is necessary where the priorities are mapped to traffic classes. Eight traffic classes are specified, similarly to the eight specified VLAN priorities. Most likely eight priorities are mapped to the eight traffic classes. It is also supported to map multiple priorities to one traffic class. The table for the priority based mapping can be defined at the ingress port.

[Table 7.1](#) shows an example for priority to traffic class mapping.

| Priority | Traffic Class |
|----------|---------------|
| Prio 0   | 7             |
| Prio 1   | 6             |
| Prio 2-7 | 5             |
| -        | 4             |
| -        | 3             |
| -        | 2             |
| -        | 1             |
| -        | 0             |

**Table 7.1: In this table, "Priorities" are mapped to a particular "Traffic class".**

**[SWS\_EthSwt\_CONSTR\_00456]{DRAFT}** [The switch configuration shall support the configuration of priority to traffic class mapping per ingress port, i.e. a priority to traffic class table can be configured (see [EthSwtPortTrafficClassAssignment](#)).] ([SRS\\_Eth\\_00121](#))

As alternative to configure a table for priority to traffic class assignment, it is possible to configure an ingress port to traffic class assignment. This is used to simplify the configuration. This configuration will result also in a table for priority to traffic class assignment. All incoming traffic of the according ingress port is mapped to the according traffic class. [Table 7.2](#) shows an example for ingress port to traffic class mapping.

| Ingress port             | Traffic Class |
|--------------------------|---------------|
| e.g. Port2, Port3, Port4 | 7             |
| e.g. Port1               | 6             |
| -                        | 5             |
| -                        | 4             |
| -                        | 3             |
| -                        | 2             |
| -                        | 1             |
| -                        | 0             |

**Table 7.2: In this table, "Ingress ports" are mapped to a particular "Traffic Class"**

**[SWS\_EthSwt\_00179]** [The switch configuration shall support the configuration of a default traffic class for incoming untagged Ethernet frames (Please also refer to [EthSwtPortTrafficClassAssignment](#)).] ([SRS\\_Eth\\_00121](#))

[SWS\_EthSwT\_CONSTR\_00457]{DRAFT} [If the same `EthSwTPortIngress` need to configure a priority to traffic class assignment, then exclusively either `EthSwTPortTrafficClassAssignment` or `EthSwTPriorityTrafficClassAssignment` shall be configured.](SRS\_Eth\_00121)

### 7.1.5.3.5.2 Internal priority value

A internal priority value could be defined by configuring a `EthSwTStreamIdentification` in combination with a `EthSwTPSFP` (per-stream filtering and policing). As described in [paragraph 7.1.5.3.5](#) the internal priority value is used to assign a Ethernet frame to the traffic class. Please refer to [paragraph 7.1.5.6.3](#) for further description regarding the configuration.

### 7.1.5.3.5.3 Priority-Code-Point-Regeneration

The PCP-field (priority code point) of received VLAN tag can be modified at an ingress port of an Ethernet switch. For this purpose a so-called priority regeneration table has to be defined:

| Priority Regeneration Table |   |   |   |   |   |   |   |   |
|-----------------------------|---|---|---|---|---|---|---|---|
| Ingress PCP                 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| Regenerated PCP             | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 |

**Table 7.3:** In this table, the "Ingress PCP" is mapped to the "Regenerated PCP".

[SWS\_EthSwT\_00178]{OBSOLETE} [Replaced by [SWS\_EthSwT\_CONSTR\_00458]. The switch configuration shall support the configuration how the PCP field of incoming Ethernet frames will be modified before they are forwarded to the egress port, i.e. a priority regeneration table can be configured (Please refer to `EthSwTPriorityRegeneration`, `EthSwTPriorityRegenerationIngressPriority` and `EthSwTPriorityRegenerationRegeneratedPriority`.](SRS\_Eth\_00121)

[SWS\_EthSwT\_CONSTR\_00458]{DRAFT} [The switch configuration shall support the configuration how the PCP field of incoming Ethernet frames will be modified before they are forwarded to the egress port, i.e. a priority regeneration table can be configured (Please refer to `EthSwTPriorityRegeneration`, `EthSwTPriorityRegenerationIngressPriority` and `EthSwTPriorityRegenerationRegeneratedPriority`.](SRS\_Eth\_00121)

#### 7.1.5.3.5.4 Outbound priority assignment

It is possible to define a particular VLAN priority at the ingress port for outgoing Ethernet frames. This VLAN priority is called outbound VLAN priority. An outbound VLAN priority could be assigned to a regenerated VLAN priority. Therefore a mapping between the regenerated VLAN priority (see [EthSwtPriorityRegeneratedIngressVlanPriority](#)) to an outbound VLAN priority (see [EthSwtPriorityOutboundVlanPriority](#)) could be configured. The outbound priority is configured at an ingress port.

**[SWS\_EthSwt\_CONSTR\_00459]{DRAFT}** [The Ethernet switch configuration shall support a port based configuration at ingress side to assign an outbound VLAN priority to incoming Ethernet frames according to their regenerated VLAN priority (a.k.a. PCP field, see [\[SWS\\_EthSwt\\_00178\]](#)), i.e. an outbound VLAN priority assignment can be configured (see [EthSwtPortOutboundVlanPriorityAssignment](#), [EthSwtPriorityRegeneratedIngressVlanPriority](#), and [EthSwtPriorityOutboundVlanPriority](#)).] ([SRS\\_Eth\\_00121](#))

The outbound VLAN priority is used within the VLAN tag as VLAN priority for an Ethernet frame which is transmitted on the network. The outbound VLAN priority does not impact the internal used priority of an particular Ethernet frame and vice versa. As soon as a Ethernet frame is transmitted with an VLAN-tag and this Ethernet frame has an assigned outbound VLAN priority, then this outbound VLAN priority is used as VLAN priority in the VLAN-tag.

**[SWS\_EthSwt\_00460]{DRAFT}** [If an Ethernet frame has to be transmitted on a particular egress port, this Ethernet frame is transmitted with an VLAN tag and a outbound VLAN priority is assigned to this Ethernet frame, then this Ethernet frame shall be transmitted with the VLAN priority set to the assigned outbound VLAN priority] ([SRS\\_Eth\\_00121](#))

#### 7.1.5.4 Frame filtering

If an Ethernet frame pass the "ingress filtering", then a so-called "frame filtering" is performed by an Ethernet switch. This processing level has the focus on the destination MAC address of the received Ethernet frame. The Ethernet switch check if this destination MAC address is available in the internal address resolution table (ARL). Please refer to chapter [subsection 7.1.5.1](#) for further information regarding the process to setup the ARL table.

**[SWS\_EthSwt\_00461]{DRAFT}** [If the destination MAC address of a received Ethernet frame is qualified as a MAC unicast/multicast address and this MAC address is available in the ARL table, then this Ethernet frame shall be forwarded for further processing. Otherwise this Ethernet frame shall be dropped and the forwarding process shall be aborted.] ([SRS\\_Eth\\_00121](#))



Note: If the destination MAC address of a received Ethernet frame is qualified as a MAC broadcast address, then this Ethernet frame is forwarded for further processing. No check in ARL table is performed.

If the Ethernet frame is forwarded, then the Ethernet frame is assigned to the corresponding egress port(s) according the ARL table entries. If the frame is forwarded and MAC address learning is enabled, the source MAC address is added into the ARL table.

#### 7.1.5.5 Egress filtering

If an Ethernet frame pass the "frame filtering" than a so-called "egress filtering" is performed by an Ethernet switch. This processing level has the focus on the VLAN membership. The previous processing level "frame filtering" assigned this Ethernet to one or multiple egress ports. The egress filtering inspect the VLAN membership of the egress ports where the received Ethernet frame has been assigned to and the VLAN-ID of the received Ethernet frame. The egress filtering process keep the Ethernet frame assignment to those egress ports where the VLAN-ID of the received Ethernet frame and the VLAN membership of the egress port match. Otherwise the assignment of the Ethernet frame to a egress port is removed.

**[SWS\_EthSwT\_00462]{DRAFT}** [If the VLAN membership of a egress port match to the VLAN-ID of a received Ethernet frame and this Ethernet frame has been assigned to this egress port, then the assignment of this Ethernet frame to this egress port shall be kept. Otherwise the assignment of this Ethernet frame to the affected egress port shall be removed.]()

**[SWS\_EthSwT\_00463]{DRAFT}** [After the egress filtering has been finalized for an received Ethernet frame and the Ethernet frame is still assigned to a least one egress port, then this Ethernet frame shall be forwarded for further processing. Otherwise this Ethernet frame shall be dropped and the forwarding process shall be aborted.]()

#### 7.1.5.6 Stream identification, per-stream filtering and policing

If an Ethernet frame pass the "egress filtering" than a so-called "stream indentification and per-stream filtering and policing" could be performed by an Ethernet switch, if this processing level is configured. Otherwise the Ethernet switch forward the Ethernet frame to the next processing level "Transmission selection algorithm".

IEEE802.1Q-2018 defines per-stream filtering and policing. If the Ethernet switch HW supports this feature, then it can be configured by using the sub container [EthSwTStreamIdentification](#). [EthSwTStreamIdentification](#) represent the stream identification definition. The stream identification definition applies to traffic (i.e. streams) within an Ethernet switch. Ethernet frames (i.e. streams) are received by an ingress port and may be forwarded to one or multiple egress ports. A stream identification could be defined

- (1) in dependency of ingress ports, or
- (2) in dependency of egress ports, or
- (3) in dependency of egress and ingress ports, or
- (4) independent of ingress and egress ports.

Therefore a stream identification could reference 0...n ingress ports (`EthSwtPortIngress`), or 0...n egress ports(`EthSwtPortEgress`), or both ingress and egress ports.

**[SWS\_EthSwt\_CONSTR\_00464]{DRAFT}** [If an instance of an `EthSwtStreamIdentification` is configured, then it shall be possible that this `EthSwtStreamIdentification` could reference none, one or multiple ingress and egress ports via `EthSwtPortIngressStreamIdentificationRef` and `EthSwtPortEgressStreamIdentificationRef` respectively.]()

**[SWS\_EthSwt\_00465]{DRAFT}** [If an instance of an `EthSwtStreamIdentification` references one or multiple ingress ports, then the stream identification shall be processed for streams received via any of the referencing ingress ports.]()

**[SWS\_EthSwt\_00466]{DRAFT}** [If an instance of an `EthSwtStreamIdentification` references one or multiple egress ports, then the stream identification shall be processed for streams which are forwarded to all referenced egress ports.]()

**[SWS\_EthSwt\_00467]{DRAFT}** [If an instance of an `EthSwtStreamIdentification` neither reference ingress ports nor egress ports, then the stream identification shall be processed for all streams received via any ingress port regardless to which egress port the stream is forwarded.]()

**[SWS\_EthSwt\_CONSTR\_00468]{DRAFT}** [If an instance of a configured `EthSwtStreamIdentification` references an `EthSwtPortIngress` or `EthSwtPortEgress`, then this instance of stream identification definition shall reference the same `EthSwtPortIngress` or `EthSwtPortEgress` exclusively one time.]()

The configuration of an `EthSwtStreamIdentification` which references ingress or egress ports define the dependency between a instance of an `EthSwtStreamIdentification` and the stream route of a received Ethernet frame (i.e. stream) within an Ethernet switch. Therefore this stream route is called the "internal stream route".

**[SWS\_EthSwt\_00469]{DRAFT}** [If an Ethernet frame (i.e stream) has been received, then the stream identification shall be processed by instances of configured `EthSwtStreamIdentification` where the internal stream route match.]()

Multiple instances of `EthSwtStreamIdentifications` are configured as an ordered list. The position within the ordered list is defined with the configured value of `EthSwtStreamIdentificationPosition`. The list is processed in ascending order by the Ethernet switch. As soon as the first instance of a `EthSwtStreamIdentification` matches, the Ethernet switch will threat this Ethernet frame according

to the configuration that is associated with this instance of the `EthSwtStreamIdentification`. Subsequential instances of `EthSwtStreamIdentifications` of the ordered list will not be applied. In case a received Ethernet frame does not match any instances of `EthSwtStreamIdentifications`, the Ethernet frame will be forwarded to the next frame processing level.

**[SWS\_EthSwt\_CONSTR\_00470]{DRAFT}** [Every instance of `EthSwtStreamIdentification` shall have a unique position value configured via `EthSwtStreamIdentificationPosition`. The value shall start with 0 and continue in ascending order with no gaps for each subsequential instance of `EthSwtStreamIdentification`.]  
( )

Note: The position value forms a ordered list of instances of `EthSwtStreamIdentifications`

**[SWS\_EthSwt\_00471]{DRAFT}** [If a Ethernet frame (i.e stream) has been received, then the Ethernet switch shall check for a matching instance of `EthSwtStreamIdentification` in ascending order according the `EthSwtStreamIdentificationPosition`, starting with `EthSwtStreamIdentificationPosition` configured with value 0.]  
( )

**[SWS\_EthSwt\_00472]{DRAFT}** [If a received Ethernet frame (i.e stream) does not match any instances of `EthSwtStreamIdentifications`, the Ethernet frame shall be forwarded to the next frame processing level without applying any further stream identification handling.]  
( )

An `EthSwtStreamIdentification` consist of the `EthSwtStreamFilterRule` (multiplicity 1) and additionally of the following optional elements: `EthSwtStreamFilterAction`, `EthSwtPSFP` and `EthSwtPortATSScheduler`

The elements of an `EthSwtStreamIdentification` define the filter rules, filter actions and further stream handling. Further stream handling is represented by `EthSwtPSFP` (per-stream filtering and policing ) and `EthSwtPortATSScheduler` (asynchronous traffic shaping). An `EthSwtPSFP` could define a flow metering. The `EthSwtPortATSScheduler` could define an scheduler for asynchronous traffic shaping. The same `EthSwtStreamIdentification` could either have an flow metering (see `EthSwtFlowMetering`) or an `EthSwtPortATSScheduler` configured.

**[SWS\_EthSwt\_CONSTR\_00473]{DRAFT}** [The configuration shall allow to have exclusively either `EthSwtFlowMetering` or `EthSwtPortATSScheduler` in the same `EthSwtStreamIdentification` configured.]  
( )

**[SWS\_EthSwt\_CONSTR\_00474]{DRAFT}** [If an `EthSwtPortATSScheduler` is configured, then additionally a `EthSwtPSFP` shall be available in the same `EthSwtStreamIdentification`.]  
( )

The order to perform the stream identification (apply filter rules, filter actions and further stream handling) is statically defined.

**[SWS\_EthSwt\_00475]{DRAFT}** [If a Ethernet frame (i.e. stream) has been received and the internal stream route match to an instance of a configured `EthSwtStreamIdentification`, then this stream identification shall be processed in the following order:

- Perform the `EthSwtStreamFilterRule`
- Perform the `EthSwtStreamFilterAction`, if configured
- Perform the `EthSwtPSFP`, if configured and if the Ethernet frame has passed the `EthSwtStreamFilterRule` and `EthSwtStreamFilterAction`
- Perform the `EthSwtPortATSScheduler`, if configured and if the Ethernet frame has passed the `EthSwtStreamFilterRule` and `EthSwtStreamFilterAction`

]()

Note: If a filter rule is empty (no filter rule primitives configured (see [paragraph 7.1.5.6.1](#))), then the Ethernet frame (i.e. stream) pass this filter per default. The stream processing proceed with `EthSwtPSFP` or `EthSwtPortATSScheduler`, if configured. Otherwise forward the Ethernet frame (i.e. stream) to the egress port for further processing.

An instance of an `EthSwtStreamIdentification` is considered as an empty stream identification definition, where none of the optional elements are defined. Thus, incoming Ethernet frames which match the internal stream route of an empty stream identification definition, always pass this instance of `EthSwtStreamIdentification` per default.

**[SWS\_EthSwt\_00476]{DRAFT}** [A configured instance of an `EthSwtStreamIdentification` where no optional elements are configured, shall be considered as empty stream identification, where incoming Ethernet frames always pass.]()

#### 7.1.5.6.1 Stream identification and filter rules

An instance of an `EthSwtStreamIdentification` has always a filter rule configured (`EthSwtStreamFilterRule`). `EthSwtStreamFilterRule` defines which parts of a received Ethernet frame are considered for the filtering (e.g. MAC source address, IP destination address a.s.o). The `EthSwtStreamFilterRule` could contain multiple filter rules. One particular filter rule (e.g. `EthSwtStreamFilterMACDestAddress`) is called a "filter rule primitive".

**[SWS\_EthSwt\_00477]{DRAFT}** [If an `EthSwtStreamFilterRule` have multiple filter rule primitives configured (e.g. `EthSwtStreamFilterMACSrcAddress` and `EthSwtStreamFilterVlanId`), then the filter rule primitives shall be considered as AND-linked filter rules.]()

Note: A received Ethernet frame (i.e. stream) matches the filter, if all configured filter rule primitives are matches. E.g. if `EthSwtStreamFilterMACSrcAddress` and `EthSwtStreamFilterVlanId` is configured, then a stream matches, if the source MAC address AND the VLAN id match the defined values. A stream where for example only the `EthSwtStreamFilterMACSrcAddress` matches is considered as NOT matching Ethernet frame.

**[SWS\_EthSwt\_00478]{DRAFT}** [If a Ethernet frame (i.e. stream) has been received, the internal stream route for this Ethernet frame matches to an instance of a configured `EthSwtStreamIdentification`, the `EthSwtStreamFilterRule` of this instance has filter rule primitives configured (e.g. `EthSwtStreamFilterMACSrcAddress` and `EthSwtStreamFilterVlanId`) and the Ethernet frame matches all configured filter rule primitives, then this Ethernet frame shall be qualified as matching stream.]()

**[SWS\_EthSwt\_00479]{DRAFT}** [If an Ethernet frame (i.e. stream) has been received, the internal stream route for this Ethernet frame matches to an instance of a configured `EthSwtStreamIdentification` and a particular filter rule primitive in the `EthSwtStreamFilterRule` of this instance is not configured, then this filter rule primitive shall be considered a matching filter rule primitive.]()

Note: Not configured filter rule primitives within an existing `EthSwtStreamFilterRule` are called "wildcard filter rule primitives". In order to qualify an Ethernet frame (i.e. stream) as matching stream, this Ethernet frame must match all filter rule primitives, as all filter rule primitives shall be AND-linked. Therefore, an empty `EthSwtStreamFilterRule`, i.e. without any filter rule primitives configured, will match every received Ethernet frame for which the internal stream route matches to the according instance of `EthSwtStreamIdentification`.

#### 7.1.5.6.2 Stream identification and filter action

An `EthSwtStreamIdentification` could define a filter action (`EthSwtStreamFilterAction`). The filter action describe the expected behaviour, if a matching stream has been detected. A filter action always refer to the filter rule of the same `EthSwtStreamIdentification`.

**[SWS\_EthSwt\_00480]{DRAFT}** [If a Ethernet frame (i.e. stream) has been qualified as matching stream and an `EthSwtStreamFilterAction` is configured, then this filter action shall be applied on this Ethernet frame.]()

**[SWS\_EthSwt\_00481]{DRAFT}** [If a filter action is applied on a Ethernet frame (i.e. stream) and the corresponding `EthSwtStreamFilterAction` has `EthSwtStreamFilterActionDropFrame` set to `TRUE`, then this Ethernet frame shall be dropped.]()

**[SWS\_EthSwt\_00482]{DRAFT}** [If a filter action is applied on a Ethernet frame (i.e. stream) and the corresponding `EthSwtStreamFilterActionEthSwtStreamFilterActionBlockSource` set to TRUE, then this Ethernet frame and all subsequent receptions of Ethernet frames with the same source MAC address shall be blocked.]()

**[SWS\_EthSwt\_00483]{DRAFT}** [If a filter action is applied on a Ethernet frame (i.e. stream) and the corresponding `EthSwtStreamFilterAction` has an `EthSwtStreamFilterActionVlanModification` configured, then the VLAN-ID of this Ethernet frame shall be modified with the configured VLAN-ID given by `EthSwtStreamFilterActionVlanModificationVlanId`.]()

An Ethernet switch determine the egress destination of an Ethernet frame within the forwarding process. An egress destination for an Ethernet frame could include one or multiple destination ports (egress ports). This egress destination could be modified if `EthSwtStreamFilterActionDestinationPortModification` is configured. The egress destination which is used for the modification is configured as reference to the according egress port(s).

**[SWS\_EthSwt\_00484]{DRAFT}** [If a filter action `EthSwtStreamFilterActionDestinationPortModification` is configured, then the egress destination which is used for the modification shall be determined according the configured references to egress ports via `EthSwtStreamFilterActionDestinationPortModificationEgressPortRef`.]()

**[SWS\_EthSwt\_CONSTR\_00485]{DRAFT}** [If a filter action `EthSwtStreamFilterActionDestinationPortModification` is configured, then this `EthSwtStreamFilterActionDestinationPortModification` shall reference the same `EthSwtPortEgress` via `EthSwtStreamFilterActionDestinationPortModificationEgressPortRef` exclusively one time.]()

**[SWS\_EthSwt\_00486]{DRAFT}** [If a filter action is applied on a Ethernet frame (i.e. stream), the corresponding `EthSwtStreamFilterAction` has an `EthSwtStreamFilterActionDestinationPortModification` configured and the `EthSwtStreamFilterActionDestinationPortModificationType` is set to `ETHSWT_STREAM_EGRESS_DESTINATION_OVERWRITE`, then the egress destination of this Ethernet frame shall be overwritten with the configured egress destination (see `EthSwtStreamFilterActionDestinationPortModificationEgressPortRef`).]()

**[SWS\_EthSwt\_00487]{DRAFT}** [If a filter action is applied on a Ethernet frame (i.e. stream), the corresponding `EthSwtStreamFilterAction` has an `EthSwtStreamFilterActionDestinationPortModification` configured and the `EthSwtStreamFilterActionDestinationPortModificationType` is set to `ETHSWT_STREAM_EGRESS_DESTINATION_EXTEND`, then the egress destination of this Ethernet frame shall be extended with the configured egress destination (see `EthSwtStreamFilterActionDestinationPortModificationEgressPortRef`).]()

### 7.1.5.6.3 Per-stream filtering and policing

An [EthSwtStreamIdentification](#) could exclusively define a per stream filtering and policing ([EthSwtPSFP](#)) or a scheduler for asynchronous traffic shaping ([EthSwtPortATSScheduler](#)). The [EthSwtPSFP](#) has always an [EthSwtStreamGate](#) configured. The state of a gate could be open or close. If a gate is open, then Ethernet frames could pass through for further processing. Otherwise a gate is closed and Ethernet frames are not permitted to pass through. Please note, AUTOSAR supports only open gates.

**[SWS\_EthSwt\_CONSTR\_00488]{DRAFT}** [If a [EthSwtStreamIdentification](#) has a [EthSwtPSFP](#) configured, then a [EthSwtStreamGate](#) shall be configured.]()

**[SWS\_EthSwt\_CONSTR\_00489]{DRAFT}** [If a [EthSwtPSFP](#) is configured, then the corresponding Ethernet switch hardware shall be configured such that Ethernet frames (i.e. streams) could always pass through (open gate).]()

An [EthSwtPSFP](#) has the possibility to define a internal priority value (see [EthSwtStreamGateIPV](#)). This internal priority value is used for the traffic class assignment (see [subparagraph 7.1.5.3.5.1](#)) of an received Ethernet frame. The internal priority value is modeled as an 32bit value, but only the least 3 signification bits are considered. Thus, the internal priority value directly matches to the VLAN priority of an received Ethernet frame and an traffic class.

**[SWS\_EthSwt\_00490]{DRAFT}** [If a [EthSwtPSFP](#) is available, the corresponding [EthSwtStreamGate](#) has an [EthSwtStreamGateIPV](#) (internal priority value) configured and an Ethernet frame pass through the gate, then the internal priority value shall be assigned to this Ethernet frame.]()

Note: The internal priority value is used for the traffic class assignment (see [subparagraph 7.1.5.3.5.1](#))

A [EthSwtPSFP](#) has the possibility to define a flow metering ([EthSwtFlowMetering](#)). The configuration of the flow metering support to limit the rate of Ethernet frames (i.e. streams).

**[SWS\_EthSwt\_00491]{DRAFT}** [If an Ethernet frame match to [EthSwtStreamIdentification](#), this Ethernet frame pass the filtering and a [EthSwtFlowMetering](#) is available, then this Ethernet frame shall be handled by this [EthSwtFlowMetering](#).] ([SRS\\_Eth\\_00114](#))

**[SWS\_EthSwt\_00492]{DRAFT}** [A configured [EthSwtFlowMetering](#) shall perform the metering according to the configuration: [EthSwtFlowMeteringColorMode](#), [EthSwtFlowMeteringCIR](#), [EthSwtFlowMeteringCBS](#), [EthSwtFlowMeteringEIR](#), [EthSwtFlowMeteringEBS](#) and [EthSwtFlowMeterCF](#)] ([SRS\\_Eth\\_00114](#))

A [EthSwtStreamIdentification](#) could define a scheduler for asynchronous traffic shaping ([EthSwtPortATSScheduler](#)).


[SWS\_EthSwT\_00493]{DRAFT} [If an Ethernet frame match to [EthSwTStreamIdentification](#), this Ethernet frame pass the filtering and a [EthSwTPortATSScheduler](#) is available, then a eligibility time shall be assigned to this Ethernet frame and scheduled by this [EthSwTPortATSScheduler](#).] ([SRS\\_Eth\\_00114](#))

[SWS\_EthSwT\_00494]{DRAFT} [A configured [EthSwTPortATSScheduler](#) shall perform the scheduling according to the following configuration: [EthSwTPortATSSCommittedBurstSize](#) , [EthSwTPortATSSCommittedInformationRate](#) and [EthSwTATSGroupMaximumResidenceTime](#).] ([SRS\\_Eth\\_00114](#))

Note: [EthSwTATSGroupMaximumResidenceTime](#) is available by the referenced [EthSwTPortATSSchedulerGroup](#) (referenced via [EthSwTPortATSSchedulerGroupRef](#)) at the [EthSwTPortIngress](#).

### 7.1.5.7 Transmission selection algorithm


If an Ethernet frame pass all previous processing levels of the forwarding process, then this Ethernet frame has been assigned to a traffic class at ingress side by the processing level "ingress filtering". Additionally, this Ethernet frame has also been assigned to one or multiple egress ports by processing the levels "frame filtering" and "egress filtering". As result, the forwarding process is adding the Ethernet frame to the queue according the traffic class assignment of each egress port where this Ethernet frame has been assigned. [Figure 7.9](#) shows the linkage between the priority of an received Ethernet frame and the according egress queue via the traffic class assignment.

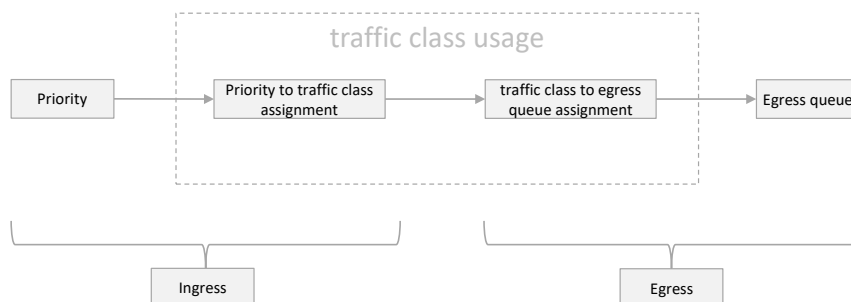

**Figure 7.9: Traffic class assignment as linkage between the priority at ingress side and a queue at egress side**



Each egress port supports up to 8 queues. Each traffic class is mapped to exactly one queue. Figure 7.10 shows the linkage between the priority of an received Ethernet frame and the according egress queue via the traffic class assignment.

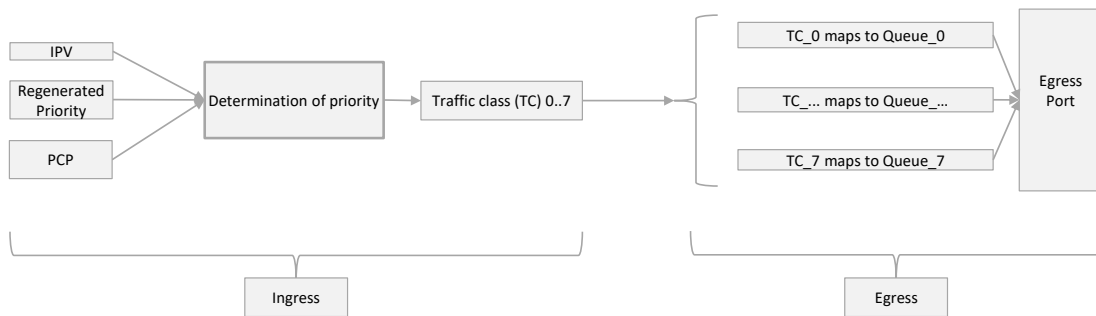

**Figure 7.10: Mapping between the priority of an received Ethernet frame and the egress port queues**

Maybe an Ethernet switch hardware cannot provide 8 queues per egress port. In such a case only a subset of traffic classes should be used. Starting from traffic class 0 in consecutive and ascending order. Table 7.4 shows an example of traffic class to egress port queue mapping, if only 4 queues are provided by an Ethernet switch hardware.

| Traffic Class | Queue (if 4 Queues available) |
|---------------|-------------------------------|
| 0             | 0                             |
| 1             | 1                             |
| 2             | 2                             |
| 3             | 3                             |

**Table 7.4: In this table, "Queue" to "Traffic class" at an egress port is depicted**


[SWS\_EthSwt\_00133]{OBSOLETE} [Replaced by [SWS\_EthSwt\_CONSTR\_00495]. The Ethernet switch configuration shall support to configure the linkage between the priority of an received Ethernet frame and the according queue of an egress port via the traffic class assignment. Therefore the priority to traffic class assignment at an ingress port (exclusively either via `EthSwtPortTrafficClassAssignment` or `EthSwtPriorityTrafficClassAssignment`) and the traffic class to a queue assignment at the egress port ( via `EthSwtPortQueueTrafficClassAssignment`) shall be configured.](SRS\_Eth\_00121)

**[SWS\_EthSwT\_CONSTR\_00495]{DRAFT}** [The Ethernet switch configuration shall support to configure the linkage between the priority of an received Ethernet frame and the according queue of an egress port via the traffic class assignment. Therefore the priority to traffic class assignment at an ingress port (exclusively either via [EthSwTPortTrafficClassAssignment](#) or [EthSwTPriorityTrafficClassAssignment](#)) and the traffic class to a queue assignment at the egress port ( via [EthSwTPortQueueTrafficClassAssignment](#)) shall be configured.]([SRS\\_Eth\\_00121](#))

**[SWS\_EthSwT\_00234]** [The Parameter [EthSwTPortQueueMinimumLength](#) shall define the minimum length for one queue of an dedicated egress port.]([SRS\\_Eth\\_00121](#))

**Note:** The actual queue length can be longer. The decision on the queue length is most likely to be taken by the Ethernet switch hardware or fixed by the Ethernet switch design. The definition of the minimum queue length in the configuration is supposed to guarantee that some priorities have enough egress buffer.

Each egress queue (see [EthSwTPortQueue](#)) has to configure the algorithm to select the Ethernet frames for transmission. Therefore each egress queue has an mandatory sub container [EthSwTPortEgressQueueTransmissionSelection](#). [EthSwTPortEgressQueueTransmissionSelection](#) defines the selection algorithm via [EthSwTPortEgressQueueTransmissionSelectionAlgorithm](#) (e.g. credit based shaper, asynchronous traffic shaper ... a.s.o.). Each [EthSwTPortQueue](#) is connected to an port scheduler. The port scheduler has to schedule all connected egress queues. Each port scheduler has an mandatory sub container [EthSwTPortEgressScheduler](#) which defines the scheduler algorithm via [EthSwTPortSchedulerAlgorithm](#) (e.g. strict priority, weighted round robin ... a.s.o.). Multiple egress schedulers at the same egress port could be configured and connected in an cascaded manner. Thus, the output of an egress scheduler is used as an input for the sub sequential egress port scheduler. [Figure 7.11](#) shows examples for an egress port structure.

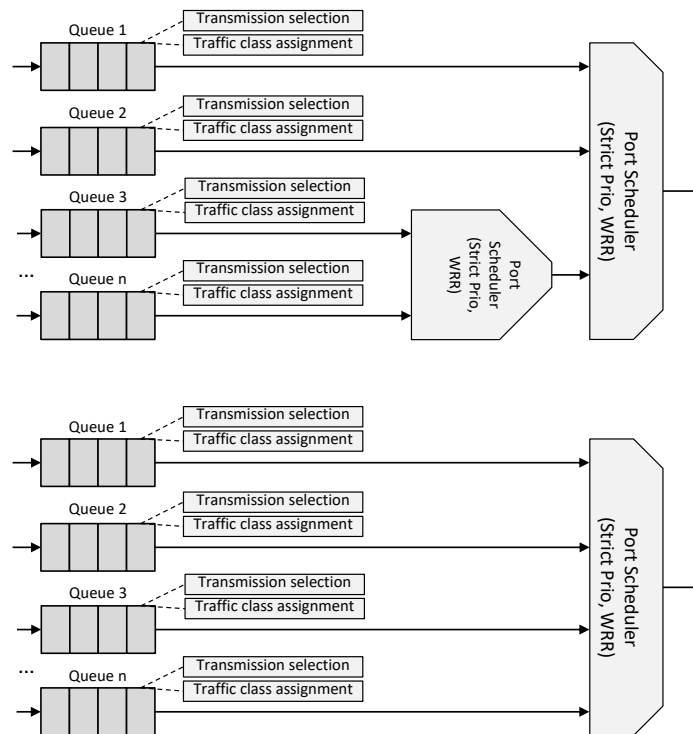

**Figure 7.11: Examples for an egress port structure**

The port scheduler algorithm schedule its input (either an egress queue or an egress port scheduler) by considering the according properties (e.g. traffic class assignment). Once the port scheduler algorithm has decided which of its input should be handled, the port scheduler select an Ethernet frame from the according egress queue based on the configured transmission selection algorithm:

- If the transmission selection algorithm is configured as credit based shaper, then the according egress queue is handled as FIFO. The egress queue has an budget of credits, which is increased in the idle phase and decreased for each transmission of Ethernet frame from this egress queue.
- If the transmission selection algorithm is configured as asynchronous traffic shaper, then the according egress queue is handled as queue. Each Ethernet frame of the queue has an assigned eligibility time. According the eligibility time a Ethernet frame is selected from this egress queue. The Ethernet frames are not handled according the arrival in this egress queue, but according the assigned eligibility time which has been added at the ingress side
- If the transmission selection algorithm is configured as unshaped, then the according egress queue is handled as FIFO
- If the transmission selection algorithm is configured as enhanced traffic shaping, then the according egress queue is handled is handled as queue

Note: The parameterization of the egress port influences the latency of Ethernet frames within the network.

The configuration of the egress port schedulers is done with the container `EthSwtPortEgressScheduler` and its sub-container `EthSwtPortEgressSchedulerPredecessor` with multiplicity 1 to \*. Egress port scheduler connect its predecessors with the predecessor references `EthSwtPortEgressPredecessorRef`. An egress port scheduler could either have an further egress port scheduler or a egress port queue as predecessor.

**[SWS\_EthSwt\_00132]{OBSOLETE}** [Replaced by **[SWS\_EthSwt\_CONSTR\_00496]**]. The configuration of the Ethernet switch driver shall support different egress port structures by the configuration `EthSwtPortEgressScheduler`.] (*SRS\_Eth\_00121*)

**[SWS\_EthSwt\_CONSTR\_00496]{DRAFT}** [The configuration of the Ethernet switch driver shall support different egress port structures by the configuration `EthSwtPortEgressScheduler`.] (*SRS\_Eth\_00121*)

#### 7.1.5.8 Switch Management support

Switch Management enables the possibility to control an Ethernet frame regarding a Switch-Port specific ingress and egress handling as well as providing a Switch-Port specific timestamp. This functionality is essential for other BSW modules, in particular for EthTSyn, which requires Port specific information associated to a time synchronization or path-delay measurement frame.

For an introduction of the basic HW architecture and interaction, please refer to [4, SWS\_EthernetDriver].

**[SWS\_EthSwt\_00240]** [The Switch driver shall offer Switch management APIs

- `EthSwt_EthRxProcessFrame`
- `EthSwt_EthRxFinishedIndication`
- `EthSwt_EthTxAdaptBufferLength`
- `EthSwt_EthTxPrepareFrame`
- `EthSwt_SetMgmtInfo`
- `EthSwt_EthTxProcessFrame` and
- `EthSwt_EthTxFinishedIndication`

if `EthSwtManagementSupportApi` is set to `TRUE`.] (*SRS\_BSW\_00171, SRS\_Eth\_00125*)

Note: Switch management APIs support the EthIf to gather / modify Switch-Port specific communication attributes.

**[SWS\_EthSwt\_00241]** [The Switch Driver management APIs

- `EthSwt_EthRxProcessFrame`

- [EthSwt\\_EthRxFinishedIndication](#)
- [EthSwt\\_EthTxAdaptBufferLength](#)
- [EthSwt\\_EthTxPrepareFrame](#)
- [EthSwt\\_SetMgmtInfo](#)
- [EthSwt\\_EthTxProcessFrame](#) and
- [EthSwt\\_EthTxFinishedIndication](#)

shall support the Ethernet Driver to gather the Switch specific management information out of an Ethernet frame for reception or to prepare an Ethernet frame for management mode conformant frame transmission, e.g. the egress route of a frame.]([SRS\\_Eth\\_00125](#))

**[SWS\_EthSwt\_00242]** [The Switch Driver management APIs [EthSwt\\_EthTxProcessFrame](#) and [EthSwt\\_EthTxFinishedIndication](#) shall return immediately, if [EthSwt\\_SetMgmtInfo](#) has not been called before a call of [EthSwt\\_EthTxProcessFrame](#).]([SRS\\_Eth\\_00125](#))

#### 7.1.5.9 Global Time support

For more details regarding time measurement with Switches, please refer to [12, [SWS\\_TimeSyncOverEthernet](#)].

**[SWS\_EthSwt\_00243]** [The Switch driver shall access the port specific hardware time stamps if [EthSwtPortTimeStampSupport](#) of the port is set to `TRUE`.]([SRS\\_BSW\\_00171](#), [SRS\\_Eth\\_00125](#))

**[SWS\_EthSwt\_00378]** [If [EthSwt\\_PortEnableTimeStamp](#) is called for a `PortIdx`, the switch driver shall enable the time-stamping for this port if [EthSwtPortTimeStampSupport](#) is set to `TRUE` for this port.]([SRS\\_Eth\\_00125](#))

**[SWS\_EthSwt\_00245]** [The Switch driver shall inform the `EthIf` about the availability of port specific ingress and egress timestamps using the APIs [EthIf\\_SwitchIngressTimeStampIndication](#) and [EthIf\\_SwitchEgressTimeStampIndication](#) , if [EthSwtGlobalTimeSupportApi](#) is set to `TRUE`.]([SRS\\_Eth\\_00125](#))

**Note:** Global Time support typically requires the activation of the Switch management support functionality within the Switch device.

#### 7.1.5.10 Counter synchronization of Ethernet switches which are connected via uplink ports

Some Ethernet Switches provide the possibility to synchronize their internal clock. For Ethernet switches which are connected via uplink ports it is not necessary to measure

the delay between the connected uplink ports, if the clock synchronization clock is activated (`EthSwtClockSynchronizationSupport` set to `TRUE`).

**[SWS\_EthSwt\_00408]** [The Switch driver shall enable clock synchronization with another Ethernet switch to which it is connected via uplink port, if `EthSwtClockSynchronizationSupport` is set to `TRUE`.]()

**[SWS\_EthSwt\_CONSTR\_00409]** [The port specific timestamping (`EthSwtPortTimeStampSupport`) can be set to `TRUE`, if clock synchronization for connected Ethernet switches is deactivated (`EthSwtClockSynchronizationSupport` set to `FALSE`).]()

**[SWS\_EthSwt\_CONSTR\_00410]** [The port specific timestamping (`EthSwtPortTimeStampSupport`) can be set to `TRUE`, if `EthSwtClockSynchronizationSupport` is activated and `EthSwtPortRole` is not `ETHSWT_UP_LINK_PORT`. `EthSwtPorts` with `EthSwtPortRole` `ETHSWT_UP_LINK_PORT` are connected to another Ethernet switch and not considered for the time delay compensation, if `EthSwtClockSynchronizationSupport` is activated.]()

#### 7.1.5.11 Verification of Configuration

There are some situations where the Host controller needs to verify the Switch configuration.

**[SWS\_EthSwt\_00292]** [If the parameter `EthSwtVerifyConfigApi` is set to `TRUE` the function `EthSwt_VerifyConfig` shall be used to verify switch configuration.] (*SRS\_Eth\_00126*)

**Implementation hint:** As Switch configuration is highly HW-Architecture dependent the steps inside the function are implementation specific.

In some use cases, it is necessary to stop frame forwarding during the verification using the optional function `EthSwt_SetForwardingMode`

The function `EthSwt_VerifyConfig` could for example do the following steps:

- Stop frame forwarding by calling `EthSwt_SetForwardingMode` (`FALSE`).
- Verify the switch configuration
- In case the switch configuration is valid then frame forwarding shall be enabled by calling `EthSwt_SetForwardingMode` (`TRUE`) (if disabled in step 1).
- In case the switch configuration is not valid then the switch shall be reset and reconfigured.

**Note:** Please note that a reset of the Host Controller does not necessarily need a reset of the connected Switch HW. This needs to be evaluated individually very carefully as a reset raises the risk of uncontrolled communication during reset phase of the host controller.

**Note:** The Verification of the Switch Configuration as described above is just an example how and when this Verification may be done. It is very dependent on the used switch HW as well as the individual HW-Architecture and even Power supply and Reset strategy of the Switch of the ECU how the Configuration is verified or even how it can be verified. The only thing what this Module specifies is the interface to the upper layer to apply some verification on the switch configuration.

#### 7.1.5.12 Testing and Diagnostic of Switch Ports

If configured, the Ethernet Switch Driver provides following interfaces to apply Testing and diagnostic functionalities

- `EthSwt_GetPortSignalQuality`
- `EthSwt_GetPortIdentifier`
- `EthSwt_GetSwitchIdentifier`
- `EthSwt_WritePortMirrorConfiguration`
- `EthSwt_ReadPortMirrorConfiguration`
- `EthSwt_GetPortMirrorState`
- `EthSwt_SetPortMirrorState`
- `EthSwt_SetPortTestMode`
- `EthSwt_SetPortLoopbackMode`
- `EthSwt_SetPortTxMode`
- `EthSwt_GetPortCableDiagnosticsResult`
- `EthSwt_GetCfgDataRaw`
- `EthSwt_GetCfgDataInfo`

The Availability of these functions is strongly depending on the possibilities of the used Transceiver-(Phy)-HW.

#### 7.1.5.13 Low Power Mode Support

**[SWS\_EthSwt\_00376]** [If `EthSwtLowPowerModeSupport` is set to `TRUE` and at least one `EthSwtPort` of a Ethernet switch is enabled and the corresponding Ethernet switch HW is in an inactive or low power mode the Ethernet switch HW shall be set to an active mode in which forwarding of Ethernet frames is possible.]()

**[SWS\_EthSwt\_00377]** [If `EthSwtLowPowerModeSupport` is set to `TRUE` and no `EthSwtPort` for a certain Ethernet switch is enabled, the corresponding Ethernet switch HW shall be set to an inactive or low power mode.]()

## 7.2 Error Classifications

Section 7.2 "Error Handling" of the document [8, SWS\_BSW General] describes the error handling of the Basic Software in detail. Above all, it constitutes a classification scheme consisting of five error types which may occur in BSW modules.

Based on this foundation, the following section specifies particular errors arranged in the respective subsections below

### 7.2.1 Development Errors

#### [SWS\_EthSwt\_00001] [

| Type of error  | Related error code          | Error value |
|--|-----------------------------|-------------|
| Invalid switch index                                 | ETHSWT_E_INV_SWITCH_IDX     | 0x01        |
| EthSwt module was not initialized                    | ETHSWT_E_UNINIT             | 0x02        |
| Invalid pointer in parameter list                    | ETHSWT_E_PARAM_POINTER      | 0x03        |
| Invalid API which is not available by another module | ETHSWT_E_INV_API            | 0x05        |
| Invalid switch port index                            | ETHSWT_E_INV_SWITCHPORT_IDX | 0x06        |
| Invalid Controller Index                             | ETHSWT_E_INV_CTRL_IDX       | 0x07        |
| Invalid input parameter                              | ETHSWT_E_INV_PARAM          | 0x08        |
| Invalid configuration                                | ETHSWT_E_INIT_FAILED        | 0x09        |

]([SRS\\_BSW\\_00385](#))

[SWS\_EthSwt\_00009] [If development error detection is enabled, the function `EthSwt_Init` shall check the parameter `CfgPtr` for being valid. If the check fails, `EthSwt_Init` shall raise the development error ETHSWT\_E\_INIT\_FAILED.]([SRS\\_BSW\\_00323](#), [SRS\\_BSW\\_00369](#))

**Note:** Please note that in case of variant pre-compile `NULL_PTR` is allowed.

[SWS\_EthSwt\_00164] [The switch driver shall check whether the lower layer driver, i.e. the `EthTrcv` provides the APIs which can be called by an upper layer module (`EthIf`) of the switch driver and will be forwarded to the lower layer. In case of missing APIs, the switch driver shall raise the development error ETHSWT\_E\_INV\_API if APIs are missing in the lower layer module.]([SRS\\_BSW\\_00369](#), [SRS\\_BSW\\_00386](#), [SRS\\_Eth\\_00118](#))

**Note:** This check will be performed upon calling a certain API. For this check the input parameter `SwitchPortIdx` and a configuration table which needs to be derived from the configuration of the Ethernet transceiver drivers which are attached to the Ethernet switch driver are necessary. This functionality is necessary if development error tracing is activated. This check is necessary because an Ethernet switch driver API can be called by an upper layer module with the argument `SwitchPortIdx`. This value of this `SwitchPortIdx` can be in a valid range, but some Ethernet transceiver driver which are used by the switch driver support the API and some do not support this API. In order to resolve this conflict, this check has been implemented.



**[SWS\_EthSwt\_00156]** [The function `EthSwt_SetSwitchPortMode` shall check whether the `EthTrcv_SetTransceiverMode` API of the indexed transceiver driver is available by checking whether for this `SwitchPortIdx` the corresponding `EthTrcv` API is available. If this is not the case, the function shall raise the development error `ETHSWT_E_INV_API`.] ([SRS\\_BSW\\_00413](#), [SRS\\_BSW\\_00323](#), [SRS\\_BSW\\_00369](#), [SRS\\_Eth\\_00118](#))

**[SWS\_EthSwt\_00157]** [The function `EthSwt_GetSwitchPortMode` shall check whether the `EthTrcv_GetTransceiverMode` API of the indexed transceiver driver is available by checking whether for this `SwitchPortIdx` the corresponding `EthTrcv` API is available. If this is not the case, the function shall raise the development error `ETHSWT_E_INV_API`.] ([SRS\\_BSW\\_00413](#), [SRS\\_BSW\\_00323](#), [SRS\\_BSW\\_00369](#), [SRS\\_Eth\\_00118](#))

**[SWS\_EthSwt\_00386]** [If development error detection is activated by `EthSwtDevErrorDetect`, all functions except `EthSwt_Init` shall check that the service `EthSwt_Init` was previously called. If the check fails, the function shall raise the development error `ETHSWT_E_UNINIT`.] ([SRS\\_BSW\\_00350](#))

**[SWS\_EthSwt\_00387]** [If development error detection is activated by `EthSwtDevErrorDetect`, all functions with input parameter `SwitchIdx` shall check the parameter for being valid. If the check fails, the functions shall raise the development error `ETHSWT_E_INV_SWITCH_IDX`.] ([SRS\\_BSW\\_00350](#))

**[SWS\_EthSwt\_00389]** [If development error detection is enabled, all functions with input parameter `SwitchPortIdx` or `PortIdx` shall check the parameter for being valid. If the check fails, the functions shall raise the development error `ETHSWT_E_INV_SWITCH_IDX`.] ([SRS\\_BSW\\_00350](#))

**[SWS\_EthSwt\_00390]** [If development error detection is enabled, all functions with input parameter `CtrlIdx` shall check the parameter for being valid. If the check fails, the functions shall raise the development error `ETHSWT_E_INV_CTRL_IDX`.] ([SRS\\_BSW\\_00350](#))

**[SWS\_EthSwt\_00391]** [If development error detection is enabled, all functions with input parameter `BufIdx` shall check the parameter for being valid. If the check fails, the functions shall raise the development error `ETHSWT_E_INV_PARAM`.] ([SRS\\_BSW\\_00350](#))

**[SWS\_EthSwt\_00392]** [If development error detection is enabled, all functions with inout or output pointer parameter shall check the parameter for being valid. If the check fails, the functions shall raise the development error `ETHSWT_E_PARAM_POINTER`.] ([SRS\\_BSW\\_00350](#))

**[SWS\_EthSwt\_00393]** [If development error tracing is activated by `EthSwtDevErrorDetect`, the functions which call an Ethernet Transceiver API and do not obtain the functionality directly from the switch port interface shall check whether the API of the indexed transceiver driver is available. If this is not the case, the functions shall raise the development error `ETHSWT_E_INV_API`.] ([SRS\\_BSW\\_00350](#))

**[SWS\_EthSwt\_00154]** [If development error detection is activated by `EthSwt-DevErrorDetect`, the function `EthSwt_GetLinkState` shall check whether the `EthTrcv_GetLinkState` API of the indexed transceiver driver is available by checking whether for this `SwitchPortIdx` the corresponding `EthTrcv` API is available. If this is not the case, the function shall raise the development error `ETHSWT_E_INV_API`.] ([SRS\\_Eth\\_00118](#), [SRS\\_Eth\\_00119](#), [SRS\\_BSW\\_00413](#), [SRS\\_BSW\\_00323](#), [SRS\\_BSW\\_00369](#))

### 7.2.2 Runtime Errors

**[SWS\_EthSwt\_00434]** [

| Type of error                           | Related error code        | Error value |
|---|---------------------------|-------------|
| Initialization of ports is not finished | ETHSWT_INIT_NOT_COMPLETED | 0x01        |

]()

### 7.2.3 Transient Faults

There are no transient faults.

### 7.2.4 Production Errors

There are no production errors.

### 7.2.5 Extended Production Errors

**[SWS\_EthSwt\_00113]** [

|                     |  |   |
|---------------------|--|---|
| Error Name:         | ETHSWT_E_ACCESS  |   |
| Short Description:  | Ethernet Switch Access Failure   |   |
| Long Description:   | This production error shall be issued when the switch is not accessible. |   |
| Recommended DTC:    | N/A  |   |
| Detection Criteria: | Fail   | When access to the Ethernet Switch fails the module shall report the extended production error with event status <code>DEM_EVENT_STATUS_PREFAILED</code> to DEM.    |
|                     | Pass   | When access to the Ethernet Switch succeeds the module shall report the extended production error with event status <code>DEM_EVENT_STATUS_PREPASSED</code> to DEM. |





|                       |     |
|-----------------------|-----|
| Secondary Parameters: | N/A |
| Time Required:        | N/A |
| Monitor Frequency     | N/A |
| MIL illumination:     | N/A |

**Table 7.5: ETHSWT\_E\_ACCESS**

](SRS\_BSW\_00385)

[SWS\_EthSwt\_00395] [

|                       |   |   |
|-----------------------|---|---|
| Error Name:           | ETHSWT_E_SYNCPORT2PHY   |   |
| Short Description:    | Ethernet switch port and the referenced Ethernet transceiver are in contradicting modes.  |   |
| Long Description:     | While getting the Ethernet switch port mode, the Ethernet switch driver detected an inconsistent state between Ethernet switch port and the referenced Ethernet transceiver Mode. |   |
| Recommended DTC:      | N/A   |   |
| Detection Criteria:   | Fail  | When getting the Ethernet switch port mode together with the Ethernet transceiver mode and the mode of the two referenced modules was found inconsistent the module shall report the extended production error with event status DEM_EVENT_STATUS_PREFAILED to DEM. |
|                       | Pass  | When getting the Ethernet switch port mode together with the Ethernet transceiver mode and the mode of the two referenced modules was found consistent the module shall report the extended production error with event status DEM_EVENT_STATUS_PREPASSED to DEM.   |
| Secondary Parameters: | N/A   |   |
| Time Required:        | N/A   |   |
| Monitor Frequency     | N/A   |   |
| MIL illumination:     | N/A   |   |

**Table 7.6: ETHSWT\_E\_SYNCPORT2PHY**

](SRS\_BSW\_00385)

## 8 API specification

### 8.1 Imported types

This chapter lists all types included from the following files:

[SWS\_EthSwT\_00002] [

| <i>Module</i> | <i>Header File</i> | <i>Imported Type</i>                  |
|---------------|--------------------|---------------------------------------|
| Dem           | Rte_Dem_Type.h     | Dem_EventIdType                       |
|               | Rte_Dem_Type.h     | Dem_EventStatusType                   |
| Eth           | Eth_GeneralTypes.h | Eth_BuflDxType                        |
|               | Eth_GeneralTypes.h | Eth_CounterType                       |
|               | Eth_GeneralTypes.h | Eth_DataType                          |
|               | Eth_GeneralTypes.h | Eth_MacVlanType                       |
|               | Eth_GeneralTypes.h | Eth_ModeType                          |
|               | Eth_GeneralTypes.h | Eth_RxStatsType                       |
|               | Eth_GeneralTypes.h | Eth_TimeStampType                     |
|               | Eth_GeneralTypes.h | Eth_TxErrorCounterValuesType          |
|               | Eth_GeneralTypes.h | Eth_TxStatsType                       |
| EthTrcv       | Eth_GeneralTypes.h | EthTrcv_BaudRateType                  |
|               | Eth_GeneralTypes.h | EthTrcv_CableDiagResultType           |
|               | Eth_GeneralTypes.h | EthTrcv_DuplexModeType                |
|               | Eth_GeneralTypes.h | EthTrcv_LinkStateType                 |
|               | Eth_GeneralTypes.h | EthTrcv_PhyLoopbackModeType           |
|               | Eth_GeneralTypes.h | EthTrcv_PhyTestModeType               |
|               | Eth_GeneralTypes.h | EthTrcv_PhyTxModeType                 |
|               | Eth_GeneralTypes.h | EthTrcv_WakeupReasonType              |
| Mka           | Mka.h              | Mka_ConfidentialityOffsetType (DRAFT) |
|               | Mka.h              | Mka_MacSecConfigType (DRAFT)          |
|               | Mka.h              | Mka_SakKeyPtrType (DRAFT)             |
|               | Mka.h              | Mka_Stats_Rx_ScType (DRAFT)           |
|               | Mka.h              | Mka_Stats_Rx_SecYType (DRAFT)         |
|               | Mka.h              | Mka_Stats_SecYType (DRAFT)            |
|               | Mka.h              | Mka_Stats_Tx_ScType (DRAFT)           |
|               | Mka.h              | Mka_Stats_Tx_SecYType (DRAFT)         |
|               | Mka.h              | Mka_ValidateFramesType (DRAFT)        |
| NvM           | Rte_NvM_Type.h     | NvM_BlockIdType                       |
|               | Rte_NvM_Type.h     | NvM_BlockRequestType                  |
|               | Rte_NvM_Type.h     | NvM_RequestResultType                 |
| Spi           | Spi.h              | Spi_AsyncModeType                     |
|               | Spi.h              | Spi_ChannelType                       |
|               | Spi.h              | Spi_DataBufferType                    |
|               | Spi.h              | Spi_NumberOfDataType                  |



△

| Module | Header File | Imported Type       |
|--------|-------------|---------------------|
|        | Spi.h       | Spi_SequenceType    |
| Std    | Std_Types.h | Std_ReturnType      |
|        | Std_Types.h | Std_VersionInfoType |

]()

## 8.2 Type definitions

### 8.2.1 EthSwt\_StateType

[SWS\_EthSwt\_00123] [

|                      |  |      |                                  |
|----------------------|--|------|----------------------------------|
| <b>Name</b>          | EthSwt_StateType   |      |                                  |
| <b>Kind</b>          | Enumeration  |      |                                  |
| <b>Range</b>         | ETHSWT_STATE_UNINIT  | 0x00 | Switch is not yet configured     |
|                      | ETHSWT_STATE_INIT  | 0x01 | Switch driver is initialized     |
|                      | ETHSWT_STATE_PORTINIT_COMPLETED  | 0x02 | Port initialization is completed |
|                      | ETHSWT_STATE_ACTIVE  | 0x03 | Switch is active                 |
| <b>Description</b>   | Status supervision used for Development Error Detection. The state shall be available for debugging. |      |                                  |
| <b>Available via</b> | Eth_GeneralTypes.h   |      |                                  |

] ([SRS\\_BSW\\_00406](#))

### 8.2.2 EthSwt\_ConfigType

[SWS\_EthSwt\_00165] [

|                      |  |   |  |
|----------------------|--|---|--|
| <b>Name</b>          | EthSwt_ConfigType  |   |  |
| <b>Kind</b>          | Structure  |   |  |
| <b>Elements</b>      | implementation specific  |   |  |
|                      | <b>Type</b>  | - |  |
|                      | <b>Comment</b>   | - |  |
| <b>Description</b>   | Implementation specific structure of the post build configuration. |   |  |
| <b>Available via</b> | EthSwt.h   |   |  |

] ([SRS\\_BSW\\_00395](#))

### 8.2.3 EthSwt\_MacLearningType

[SWS\_EthSwt\_00227] [

|                      |                                  |   |  |
|----------------------|----------------------------------|---|--|
| <b>Name</b>          | EthSwt_MacLearningType           |   |  |
| <b>Kind</b>          | Enumeration                      |   |  |
| <b>Range</b>         | ETHSWT_MACLEARNING_HWDISABLED    | – | If hardware learning disabled, the switch must not learn new MAC addresses   |
|                      | ETHSWT_MACLEARNING_HWENABLED     | – | If hardware learning enabled, the switch learns new MAC addresses  |
|                      | ETHSWT_MACLEARNING_SWENABLED     | – | If software learning enabled, the hardware learning is disabled and the switch forwards packets with an unknown source address to a host CPU |
| <b>Description</b>   | The interpretation of this value |   |  |
| <b>Available via</b> | Eth_GeneralTypes.h               |   |  |

] ([SRS\\_Eth\\_00087](#))

### 8.2.4 EthSwt\_MgmtInfoType

[SWS\_EthSwt\_91002] [

|                      |   |                          |  |
|----------------------|---|--------------------------|--|
| <b>Name</b>          | EthSwt_MgmtInfoType   |                          |  |
| <b>Kind</b>          | Structure   |                          |  |
| <b>Elements</b>      | SwitchIdx   |                          |  |
|                      | <b>Type</b>   | uint8                    |  |
|                      | <b>Comment</b>  | Switch index             |  |
|                      | SwitchPortIdx   |                          |  |
|                      | <b>Type</b>   | uint8                    |  |
|                      | <b>Comment</b>  | Port index of the switch |  |
| <b>Description</b>   | Type for holding the management information received/transmitted on Switches (ports). |                          |  |
| <b>Available via</b> | Eth_GeneralTypes.h  |                          |  |

] ([SRS\\_Eth\\_00125](#))

### 8.2.5 EthSwt\_PortMirrorCfgType

[SWS\_EthSwt\_91017] [

|                 |                          |                |  |
|-----------------|--------------------------|----------------|--|
| <b>Name</b>     | EthSwt_PortMirrorCfgType |                |  |
| <b>Kind</b>     | Structure                |                |  |
| <b>Elements</b> | srcMacAddrFilter         |                |  |
|                 | <b>Type</b>              | Array of uint8 |  |
|                 | <b>Size</b>              | 6              |  |





|                                |  |
|--------------------------------|--|
| <b>Comment</b>                 | Specifies the source MAC address [0..255,0..255,0..255,0..255,0..255,0..255] that should be mirrored. If set to 0,0,0,0,0, no source MAC address filtering shall take place.   |
| dstMacAddrFilter               |  |
| <b>Type</b>                    | Array of uint8   |
| <b>Size</b>                    | 6  |
| <b>Comment</b>                 | Specifies the destination MAC address [0..255,0..255,0..255,0..255,0..255,0..255] that should be mirrored. If set to 0,0,0,0,0, no destination MAC address filtering shall take place.   |
| VlanIdFilter                   |  |
| <b>Type</b>                    | uint16   |
| <b>Comment</b>                 | Specifies the VLAN address 0..4094 that should be mirrored. If set to 65535, no VLAN filtering shall take place.   |
| MirroringPacketDivider         |  |
| <b>Type</b>                    | uint8  |
| <b>Comment</b>                 | Divider if only a subset of received frames should be mirrored. E.g. MirroringPacketDivider = 2 means every second frames is mirrored  |
| MirroringMode                  |  |
| <b>Type</b>                    | uint8  |
| <b>Comment</b>                 | specifies the mode how the mirrored traffic should be tagged : 0x00 == No VLAN re-tagging; 0x01 == VLAN re-tagging; 0x02 == VLAN Double tagging  |
| TrafficDirectionIngressBitMask |  |
| <b>Type</b>                    | uint32   |
| <b>Comment</b>                 | Specifies the bit mask of Ethernet switch ingress port traffic direction to be mirrored. The bit mask is calculated depending of the values of EthSwPortIdx. (e.g. set EthSwPortIdx == 2 => TrafficDirectionIngressBitMask = 0b0000 0000 0000 0000 0000 0000 0000 0100). 0b0 == enable ingress port mirroring 0b1 == disable ingress port mirroring<br><br>Example: TrafficDirectionIngressBitMask = 0b0000 0000 0000 0000 0000 0000 0000 0100 => Ingress traffic mirroring is enabled of Ethernet switch port with EthSwPortIdx=2 |
| TrafficDirectionEgressBitMask  |  |
| <b>Type</b>                    | uint32   |
| <b>Comment</b>                 | Specifies the bit mask of Ethernet switch egress port traffic direction to be mirrored. The bit mask is calculated depending of the values of EthSwPortIdx. (e.g. set EthSwPortIdx == 2 => TrafficDirectionEgressBitMask = 0b0000 0000 0000 0000 0000 0000 0000 0100). 0b0 == enable egress port mirroring 0b1 == disable egress port mirroring<br><br>Example: TrafficDirectionEgressBitMask = 0b0000 0000 0000 0000 0000 0000 0000 0001 => Egress traffic mirroring is enabled of Ethernet switch port with EthSwPortIdx=0       |
| CapturePortIdx                 |  |
| <b>Type</b>                    | uint8  |
| <b>Comment</b>                 | Specifies the Ethernet switch port which capture the mirrored traffic  |
| ReTaggingVlanId                |  |
| <b>Type</b>                    | uint16   |
| <b>Comment</b>                 | Specifies the VLAN address 0..4094 which shall be used for re-tagging if MirroringMode is set to 0x01 (VLAN re-tagging). If the value is set to 65535, the value shall be ignored, because the VLAN address for re-tagging is provided by the Ethernet switch configuration  |
| DoubleTaggingVlanId            |  |





|                      |  |   |
|----------------------|--|---|
|                      | <b>Type</b>  | uint16  |
|                      | <b>Comment</b>   | Specifies the VLAN address 0..4094 which shall be used for double-tagging if MirroringMode is set to 0x02 (VLAN double tagging). If the value is set to 65535, the value shall be ignored, because the VLAN address for double tagging is provided by the Ethernet switch configuration |
| <b>Description</b>   | The EthSwt_PortMirrorCfgType specify the port mirror configuration which is set up per Ethernet switch. The configuration is written to the Ethernet switch driver by calling EthSwt_WritePortMirror Configuration. One port mirror configuration is maintained per Ethernet Switch. |   |
| <b>Available via</b> | Eth_GeneralTypes.h   |   |

](SRS\_Eth\_00123)

### 8.2.6 EthSwt\_PortMirrorStateType

[SWS\_EthSwt\_91020] [

|                      |   |      |                         |
|----------------------|---|------|-------------------------|
| <b>Name</b>          | EthSwt_PortMirrorStateType  |      |                         |
| <b>Kind</b>          | Enumeration   |      |                         |
| <b>Range</b>         | PORT_MIRRORING_DISABLED   | 0x00 | port mirroring disabled |
|                      | PORT_MIRRORING_ENABLED  | 0x01 | port mirroring enabled  |
| <b>Description</b>   | Type to request or obtain the port mirroring state (enable/disable) for a particular port mirror configuration per Ethernet switch. |      |                         |
| <b>Available via</b> | Eth_GeneralTypes.h  |      |                         |

](SRS\_Eth\_00123)

### 8.2.7 EthSwt\_ReturnType

[SWS\_EthSwt\_91033] [

|                      |  |      |  |
|----------------------|--|------|--|
| <b>Range</b>         | ETHSWT_PORT_MIRRORING_CONFIGURATION_NOT_SUPPORTED  | 0x02 | port mirroring configuration is not supported by Ethernet switch driver or by the Ethernet switch hardware |
| <b>Description</b>   | Overlaid return value of Std_ReturnType for Ethernet switch driver API EthSwt_WritePortMirror Configuration, if the port mirroring configuration is not supported by Ethernet switch driver or by the Ethernet switch hardware (e.g. the configured mirrored traffic direction (see SWS_EthSwt_91017 "TrafficDirectionIngressBitMask" and "TrafficDirectionEgressBitMask") for ingress and egress traffic of the same port is not supported, or the addressed Ethernet switch ports within the port mirror configuration are not accessible by the Ethernet switch driver) |      |  |
| <b>Available via</b> | Eth_GeneralTypes.h   |      |  |

]()



## 8.2.8 EthSwt\_MgmtOwner

[SWS\_EthSwt\_91035] [

|                      |  |      |   |
|----------------------|--|------|---|
| <b>Name</b>          | EthSwt_MgmtOwner   |      |   |
| <b>Kind</b>          | Enumeration  |      |   |
| <b>Range</b>         | ETHSWT_MGMT_OBJ_UNUSED   | 0x00 | Object unused                                     |
|                      | ETHSWT_MGMT_OBJ_OWNED_BY_ETHSWT                                  | 0x01 | Object used and EthSwt collects needed data       |
|                      | ETHSWT_MGMT_OBJ_OWNED_BY_UPPER_LAYER                             | 0x02 | Object used and the upper layer does calculations |
| <b>Description</b>   | Holds information if upper layer or EthSwt is owner of mgmt_obj. |      |   |
| <b>Available via</b> | Eth_GeneralTypes.h   |      |   |

]()

## 8.2.9 EthSwt\_Mgmt\_ObjectType

[SWS\_EthSwt\_91037] [

|                      |                       |  |  |
|----------------------|-----------------------|--|--|
| <b>Name</b>          | EthSwt_MgmtObjectType |  |  |
| <b>Kind</b>          | Structure             |  |  |
| <b>Elements</b>      | Validation            |  |  |
|                      | <b>Type</b>           | <a href="#">EthSwt_MgmtObjectValidType</a>   |  |
|                      | <b>Comment</b>        | The validation information for the mgmt_obj.   |  |
|                      | IngressTimestamp      |  |  |
|                      | <b>Type</b>           | Eth_TimeStampType  |  |
|                      | <b>Comment</b>        | The ingress timestamp value out of the switch.   |  |
|                      | EgressTimestamp       |  |  |
|                      | <b>Type</b>           | Eth_TimeStampType  |  |
|                      | <b>Comment</b>        | The egress timestamp value out of the switch.  |  |
|                      | MgmtInfo              |  |  |
|                      | <b>Type</b>           | <a href="#">EthSwt_MgmtInfoType</a>  |  |
|                      | <b>Comment</b>        | Received/Transmitted Management information of the switches.   |  |
|                      | <b>Description</b>    | Provides information about all struct member elements. The ownership gives information whether EthSwt has finished its activities in providing all struct member elements. |  |
| <b>Available via</b> |                       |  |  |
| Eth_GeneralTypes.h   |                       |  |  |

]()

[SWS\_EthSwt\_00433] [A MgmtObject is just allowed to be owned between EthSwt and only one <UPPER\_LAYER>. The structure element can be identified unambiguously using the DataPtr in Rx- and BufIdx in Tx-context, because both elements are definitively unique within the RxIndication() / TxConfirmation() context.]()

## 8.2.10 EthSwt\_MgmtObjectValidType

[SWS\_EthSwt\_91036] [

|                      |   |  |
|----------------------|---|--|
| <b>Name</b>          | EthSwt_MgmtObjectValidType  |  |
| <b>Kind</b>          | Structure   |  |
| <b>Elements</b>      | IngressTimestampValid   |  |
|                      | <b>Type</b>   | Std_ReturnType   |
|                      | <b>Comment</b>  | IngressTimestampValid shall be set to E_NOT_OK if ingress timestamp is not available |
|                      | EgressTimestampValid  |  |
|                      | <b>Type</b>   | Std_ReturnType   |
|                      | <b>Comment</b>  | EgressTimestampValid shall be set to E_NOT_OK if ingress timestamp is not available. |
|                      | MgmtInfoValid   |  |
|                      | <b>Type</b>   | Std_ReturnType   |
| <b>Comment</b>       | MgmtInfoValid shall be set to E_NOT_OK if ingress timestamp is not available(e.g. timeout).                                     |  |
| <b>Description</b>   | Will be set from EthSwt and marks EthSwt_MgmtObject as valid or not. So the upper layer will be able to detect inconsistencies. |  |
| <b>Available via</b> | Eth_GeneralTypes.h  |  |

]()

## 8.3 Function definitions

This is a list of functions provided for upper layer modules.

### 8.3.1 EthSwt\_Init

[SWS\_EthSwt\_00006] [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_Init   |   |
| <b>Syntax</b>             | <pre>void EthSwt_Init (     const EthSwt_ConfigType* CfgPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x01  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | CfgPtr  | Points to the implementation specific structure |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | None  |   |
| <b>Description</b>        | Initializes the Ethernet Switch Driver                              |   |
| <b>Available via</b>      | EthSwt.h  |   |

] ([SRS\\_BSW\\_00101](#))

**[SWS\_EthSwt\_00007]** [The function `EthSwt_Init` shall store the access to the configuration structure for subsequent API calls.] (*SRS\_BSW\_00101*)

**[SWS\_EthSwt\_00008]** [The function `EthSwt_Init` shall change the state of all switches controlled by this Switch Driver from `ETHSWT_STATE_UNINIT` to `ETHSWT_STATE_INIT`.] (*SRS\_BSW\_00101*)

**[SWS\_EthSwt\_00421]** [The EthSwt shall check for enabled port mirror configuration. The enabled port mirror configuration shall be activated by reconfiguring the Ethernet switch hardware according to the port mirror configuration, before frame forwarding is being enabled.] (*SRS\_Eth\_00123*)

**[SWS\_EthSwt\_00422]** [If the PortMirrorState is set to 0x01 (port mirroring enabled), then the stored port mirror configuration for the given Ethernet switch shall be written to hardware registers of the given Ethernet switch and enable port mirroring.] (*SRS\_Eth\_00123*)

**[SWS\_EthSwt\_00423]** [If the PortMirrorState is set to 0x00 (port mirroring disabled) the corresponding hardware registers of the given Ethernet switch shall be reset (to the HW's default values) and the port mirroring shall be disabled.] ()

**[SWS\_EthSwt\_00011]** [After initialization of the Ethernet switch within the `EthSwt_BackgroundTask`, the Ethernet switch shall enter an inactive or low power mode if `EthSwtLowPowerModeSupport` is set to TRUE. If `EthSwtLowPowerModeSupport` is not defined or set to FALSE the Ethernet switch shall enter an active state.] (*SRS\_BSW\_00101*)

Note: The execution of this function may take a long time (e.g. port structure, VLAN configuration, internal Ethernet switch engine ... a.s.o.) and therefore cannot be called by EcuM or BswM. Instead it should be called e.g. by a background task (see `EthSwt_BackgroundTask`).

**[SWS\_EthSwt\_00374]** [All Ethernet switch HW ports which are not configured as a EthSwtPort shall be switched off during initialization. This Ethernet switch HW ports shall never be switched on during runtime] ()

**[SWS\_EthSwt\_00375]** [All EthSwtPorts shall be set to `ETH_MODE_DOWN` during initialization.] ()

**[SWS\_EthSwt\_00016]** [The function `EthSwt_SwitchInit` shall check the access to the Ethernet Switch hardware, i.e. by trying to read or write registers during the configuration of the switch. If the access to the registers fails, the function shall raise the extended production error `ETHSWT_E_ACCESS` and return `E_NOT_OK`.] (*SRS\_BSW\_00386*)

**Note:** Access to the Ethernet Switch hardware is device dependent, e.g. access through the Ethernet Controller Mii, access through SPI, ... etc.

### 8.3.2 EthSwt\_SetSwitchPortMode

[SWS\_EthSwt\_00018] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_SetSwitchPortMode   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_SetSwitchPortMode (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     Eth_ModeType PortMode )</pre> |  |
| <b>Service ID [hex]</b>   | 0x03   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver   |
|                           | SwitchPortIdx  | Index of the port at the addressed switch  |
|                           | PortMode   | ETH_MODE_DOWN: Disable the addressed Ethernet switch port at the given Ethernet switch<br><br>ETH_MODE_ACTIVE: Enable the addressed Ethernet switch port at the given Ethernet switch<br><br>ETH_MODE_ACTIVE_WITH_WAKEUP_REQUEST: Enable the addressed Ethernet switch port at the given Ethernet switch and request to trigger a wake-up on the network. (This could be used e.g. for Ethernet hardware which is compatible with the OA TC10) |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: The indexed switch port could not be set to Port Mode, or the function is called in state ETHSWT_STATE_UNINIT or ETHSWT_STATE_INIT.   |
| <b>Description</b>        | Enables/disables the indexed switch port   |  |
| <b>Available via</b>      | EthSwt.h   |  |

](SRS\_Eth\_00118)

[SWS\_EthSwt\_00019] [The function `EthSwt_SetSwitchPortMode` shall put the indexed port of the switch into the specified mode. If `EthSwtPort` references an `EthTrcv` then the function `EthTrcv_SetTransceiverMode` of the Ethernet Transceiver Driver shall additionally be called with the corresponding transceiver mode.](SRS\_Eth\_00118)

[SWS\_EthSwt\_00396] [When calling the function `EthSwt_SetSwitchPortMode` with mode `ETH_MODE_DOWN`, the `EthSwt` shall disable the Ethernet switch port directly for reduction of power consumption, if it is possible.](/)

[SWS\_EthSwt\_00397] [When calling the function `EthSwt_SetSwitchPortMode`, the function shall check the access to the Ethernet switch driver. If the check fails, the function shall raise the extended production error `ETHSWT_E_ACCESS` and return `E_NOT_OK`, otherwise pass the extended production error `ETHSWT_E_ACCESS` and return `E_OK`.](/)

[SWS\_EthSwt\_00398] [If `EthSwtPort` does not reference an `EthTrcv`, `EthSwt` shall indicate a mode of the port by the API `EthIf_SwitchPortModeIndication` latest during the next `EthSwt_MainFunction`.](SRS\_Eth\_00118)

**[SWS\_EthSwT\_00022]** [The function `EthSwT_SetSwitchPortMode` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwT_SetSwitchPortModeApi`.] ([SRS\\_BSW\\_00171](#))

**[SWS\_EthSwT\_00023]** [If the switch is already in the requested mode `E_OK` shall be returned and no development error shall be raised.] ([SRS\\_Eth\\_00118](#))

### 8.3.3 EthSwT\_GetSwitchPortMode

**[SWS\_EthSwT\_00025]** [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwT_GetSwitchPortMode   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_GetSwitchPortMode (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     Eth_ModeType* SwitchModePtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x04   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver   |
|                           | SwitchPortIdx  | Index of the port at the addressed switch  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | SwitchModePtr  | ETH_MODE_DOWN: The Ethernet switch port of the given Ethernet switch is disabled<br>ETH_MODE_ACTIVE: The Ethernet switch port of the given Ethernet switch is enabled                |
|                           | <b>Return value</b>  | Std_ReturnType<br>E_OK: success<br>E_NOT_OK: The mode of the indexed switch port could not be obtained, or the function is called in state ETHSWT_STATE_UNINIT or ETHSWT_STATE_INIT. |
| <b>Description</b>        | Obtains the mode of the indexed switch port  |  |
| <b>Available via</b>      | EthSwT.h   |  |

] ([SRS\\_Eth\\_00118](#))

**[SWS\_EthSwT\_00026]** [The function `EthSwT_GetSwitchPortMode` shall read the mode of the indexed port of the switch. If `EthSwTPort` references an `EthTrcv` then the function shall additionally call the corresponding function `EthTrcv_GetTransceiverMode` of the Ethernet Transceiver Driver.] ([SRS\\_Eth\\_00118](#))

**[SWS\_EthSwT\_00439]** [The function shall report the active mode always as `ETH_MODE_ACTIVE`, even though the previous requested (via `EthSwT_SetSwitchPortMode`) mode was `ETH_MODE_ACTIVE_WITH_WAKEUP_REQUEST`.] ()

**[SWS\_EthSwT\_00399]** [If the obtained modes of the `EthSwTPort` and the `EthTrcv` are not aligned, the function `EthSwT_GetSwitchPortMode` shall raise the extended production error `ETHSWT_E_SYNCPORT2PHY` and return `E_NOT_OK`.

If `EthTrcv_GetTransceiverMode` returns `E_NOT_OK`, the `EthSwT_GetSwitchPortMode` shall also return `E_NOT_OK` without raising an error.] ()

**[SWS\_EthSwt\_00400]** [If the function `EthSwt_GetSwitchPortMode` is called, the function shall check the access to the Ethernet Switch Driver. If the check fails, the function shall raise the extended production error `ETHSWT_E_ACCESS` and return `E_NOT_OK`, otherwise pass the production error `ETHSWT_E_ACCESS` and return `E_OK`.]()

**[SWS\_EthSwt\_00029]** [The function `EthSwt_GetSwitchPortMode` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwt_GetSwitchPortModeApi`.]([SRS\\_BSW\\_00171](#))

### 8.3.4 EthSwt\_StartSwitchPortAutoNegotiation

**[SWS\_EthSwt\_00031]** [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_StartSwitchPortAutoNegotiation  |   |
| <b>Syntax</b>             | Std_ReturnType EthSwt_StartSwitchPortAutoNegotiation (<br>uint8 SwitchIdx,<br>uint8 SwitchPortIdx<br>) |   |
| <b>Service ID [hex]</b>   | 0x05   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Non Reentrant  |   |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver  |
|                           | SwitchPortIdx  | Index of the port at the addressed switch   |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: Automatic negotiation could not be started for the indexed switch port, or the function is called in state ETHSWT_STATE_UNINIT or ETHSWT_STATE_INIT. |
| <b>Description</b>        | Starts the auto-negotiation of the indexed switch port   |   |
| <b>Available via</b>      | EthSwt.h   |   |

] ([SRS\\_Eth\\_00087](#))

**[SWS\_EthSwt\_00032]** [The function `EthSwt_StartSwitchPortAutoNegotiation` shall restart the automatic negotiation of the used transmission parameters of the referenced Ethernet transceiver driver by calling the function `EthTrcv_StartAutoNegotiation`.]([SRS\\_Eth\\_00087](#))

**[SWS\_EthSwt\_00035]** [The function `EthSwt_StartSwitchPortAutoNegotiation` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtStartSwitchPortAutoNegotiationApi`.]([SRS\\_BSW\\_00171](#))

### 8.3.5 EthSwt\_CheckWakeup

[SWS\_EthSwt\_91003] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_CheckWakeup   |  |
| <b>Syntax</b>             | Std_ReturnType EthSwt_CheckWakeup (<br>uint8 SwitchIdx<br>)  |  |
| <b>Service ID [hex]</b>   | 0x4c   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver   |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: request to check for a wake-up is accepted<br>E_NOT_OK: request to check for a wake-up is not accepted |
| <b>Description</b>        | <p>API is called by EthIf. The Ethernet switch driver request to check for a wake-up at all Ethernet switch ports which reference an EthTrcv. For those Ethernet switch ports the call is forwarded to the referenced EthTrcv. The function could be called in context of an interrupt service routine or on task level</p> <p>Note: Interrupt service routine consuming time has to be considered, since all EthSwtPorts of the maintained Ethernet switches has to be checked. Therefore the call is forwarded to the referred EthTrcv where the request to check for wake-up is stored. The check of the Ethernet hardware is done asynchronously in the context of the EthTrcv_MainFunction.</p> |  |
| <b>Available via</b>      | EthSwt.h   |  |

](SRS\_Eth\_00118)

[SWS\_EthSwt\_00440] [The function [EthSwt\\_CheckWakeup](#) shall iterate over the Ethernet switch ports of the indexed Ethernet switch and forward the call to `EthTrcv_`CheckWakeup for those Ethernet switch ports, which reference an EthTrcv.](SRS\_Eth\_00118)

[SWS\_EthSwt\_00441] [The function [EthSwt\\_CheckWakeup](#) shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtCheckWakeupApi` ](SRS\_BSW\_00171)

### 8.3.6 EthSwt\_GetSwitchPortWakeuperReason

[SWS\_EthSwt\_91040] [

|                         |   |  |
|-------------------------|---|--|
| <b>Service Name</b>     | EthSwt_GetSwitchPortWakeuperReason  |  |
| <b>Syntax</b>           | Std_ReturnType EthSwt_GetSwitchPortWakeuperReason (<br>uint8 SwitchIdx,<br>uint8 SwitchPortIdx,<br>EthTrcv_WakeupReasonType Reason<br>) |  |
| <b>Service ID [hex]</b> | 0x4b  |  |
| <b>Sync/Async</b>       | Synchronous   |  |
| <b>Reentrancy</b>       | Reentrant   |  |





|                           |  |  |
|---------------------------|--|--|
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the Ethernet switch within the context of the Ethernet Switch driver  |
|                           | SwitchPortIdx  | Index of the Ethernet switch port index in the context of the Ethernet switch driver   |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | Reason   | Pointer to structure of least recent wakeup event, which was detected by the Ethernet switch port  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Ethernet switch port wake up reason request has been accepted.<br>E_NOT_OK: Ethernet switch port wake up reason request has not been accepted. |
| <b>Description</b>        | This function obtains the wake up reasons of the the indexed Ethernet switch port by calling EthTrcv_GetBusWuReason(...) of the referenced EthTrcv |  |
| <b>Available via</b>      | EthSwt.h   |  |

](SRS\_Eth\_00107)

**[SWS\_EthSwt\_00442]** [The function [EthSwt\\_GetSwitchPortWakeupReason](#) shall read the current wake-up reason of the indexed Ethernet switch port by forwarding the call to `EthTrcv_GetBusWuReason` of the referenced `EthTrcv`. If the indexed Ethernet switch port has no reference to an `EthTrcv`, the function shall return `E_NOT_OK`.]  
(SRS\_Eth\_00107)

**[SWS\_EthSwt\_00443]** [The function [EthSwt\\_GetSwitchPortWakeupReason](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwtGetSwitchPortWakeupReasonApi](#)](SRS\_BSW\_00171)

### 8.3.7 EthSwt\_GetLinkState

**[SWS\_EthSwt\_00037]** [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_GetLinkState  |  |
| <b>Syntax</b>             | Std_ReturnType EthSwt_GetLinkState (<br>uint8 SwitchIdx,<br>uint8 SwitchPortIdx,<br>EthTrcv_LinkStateType* LinkStatePtr<br>) |  |
| <b>Service ID [hex]</b>   | 0x06   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver   |
|                           | SwitchPortIdx  | Index of the port at the addressed switch  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | LinkStatePtr   | ETHTRCV_LINK_STATE_DOWN: Switch port is disconnected<br>ETHTRCV_LINK_STATE_ACTIVE: Switch port is connected  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: Link state of the indexed switch port could not be obtained, or the function is called in state ETHSWT_STATE_UNINIT or ETHSWT_STATE_INIT. |







|                      |   |
|----------------------|---|
| <b>Description</b>   | Obtains the link state of the indexed switch port |
| <b>Available via</b> | EthSwt.h  |

]([SRS\\_Eth\\_00119](#))

**[SWS\_EthSwt\_00038]** [The function [EthSwt\\_GetLinkState](#) shall read the current (link) state of the indexed switch port. If the indexed Ethernet port references an Ethernet transceiver, the link state shall be obtained by calling the function `EthTrcv_GetLinkState` of the Ethernet Transceiver Driver. If the indexed Ethernet Switch port does not reference an Ethernet transceiver, the state shall be obtained from the MAC interface of the Switch port. If the MAC interface is not able to provide a link state (e.g. Ethernet hardware does not support a link state of the MAC interface), the API shall return the following state which is derived from the current mode:

- If the current mode of the indexed switch port is `ETH_MODE_ACTIVE`, then `ETHTRCV_LINK_STATE_ACTIVE` shall be returned
- If the current mode of the indexed switch port is `ETH_MODE_DOWN`, then `ETHTRCV_LINK_STATE_DOWN` shall be returned

]([SRS\\_Eth\\_00118](#), [SRS\\_Eth\\_00119](#))

**[SWS\_EthSwt\_00042]** [The function [EthSwt\\_GetLinkState](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwt\\_GetLinkStateApi](#).]([SRS\\_BSW\\_00171](#))

### 8.3.8 EthSwt\_GetBaudRate

**[SWS\_EthSwt\_00044]** [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_GetBaudRate   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_GetBaudRate (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     EthTrcv_BaudRateType* BaudRatePtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x07   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver   |
|                           | SwitchPortIdx  | Index of the port at the addressed switch  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | BaudRatePtr  | ETHTRCV_BAUD_RATE_10MBIT: 10MBit connection<br>ETHTRCV_BAUD_RATE_100MBIT: 100MBit connection<br>ETHTRCV_BAUD_RATE_1000MBIT: 1000MBit connection<br>ETHTRCV_BAUD_RATE_2500MBIT: 2500MBit connection |





|                      |  |   |
|----------------------|--|---|
| <b>Return value</b>  | Std_ReturnType                                   | E_OK: success<br>E_NOT_OK: Baud rate of the indexed switch port could not be obtained, or the function is called in state ETHSWT_STATE_UNINIT or ETHSWT_STATE_INIT. |
| <b>Description</b>   | Obtains the baud rate of the indexed switch port |   |
| <b>Available via</b> | EthSwt.h   |   |

]([SRS\\_Eth\\_00118](#))

**[SWS\_EthSwt\_00045]** [The function [EthSwt\\_GetBaudRate](#) shall read the current baud rate of the indexed switch port. If the indexed Ethernet port reference an Ethernet transceiver, the baud rate shall be obtained by the function [EthTrcv\\_GetBaudRate](#) of the Ethernet Transceiver Driver. If the indexed Ethernet Switch port does not reference an Ethernet transceiver, the baud rate shall be obtained from the MAC interface of the Switch port.]([SRS\\_Eth\\_00118](#))

**[SWS\_EthSwt\_00049]** [The function [EthSwt\\_GetBaudRate](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwtGetBaudRateApi](#).]([SRS\\_BSW\\_00171](#))

### 8.3.9 EthSwt\_GetDuplexMode

**[SWS\_EthSwt\_00051]** [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_GetDuplexMode  |   |
| <b>Syntax</b>             | Std_ReturnType EthSwt_GetDuplexMode (<br>uint8 SwitchIdx,<br>uint8 SwitchPortIdx,<br>EthTrcv_DuplexModeType* DuplexModePtr<br>) |   |
| <b>Service ID [hex]</b>   | 0x08  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver  |
|                           | SwitchPortIdx   | Index of the port at the addressed switch   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | DuplexModePtr   | ETHTRCV_DUPLEX_MODE_HALF: half duplex connections<br>ETHTRCV_DUPLEXMODE_FULL: full duplex connection  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: success<br>E_NOT_OK: duplex mode of the indexed switch port could not be obtained, or the function is called in state ETHSWT_STATE_UNINIT or ETHSWT_STATE_INIT. |
| <b>Description</b>        | Obtains the duplex mode of the indexed switch port  |   |
| <b>Available via</b>      | EthSwt.h  |   |

]([SRS\\_Eth\\_00118](#))

**[SWS\_EthSwt\_00052]** [The function [EthSwt\\_GetDuplexMode](#) shall read the current duplex mode of the indexed switch port. If the indexed Ethernet port reference an Ethernet transceiver, the duplex mode shall be obtained by calling the function

EthTrcv\_ GetDuplexMode of the Ethernet Transceiver Driver. If the indexed Ethernet Switch port does not reference an Ethernet transceiver, the duplex mode shall be obtained from the MAC interface of the Switch port.](SRS\_Eth\_00118)

[SWS\_EthSwt\_00056] [The function EthSwt\_GetDuplexMode shall be pre compile time configurable On/Off by the configuration parameter: EthSwtGetDuplexModeApi.](SRS\_BSW\_00171)

### 8.3.10 EthSwt\_GetPortMacAddr

[SWS\_EthSwt\_00060] [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_GetPortMacAddr   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_GetPortMacAddr (     uint8 SwitchIdx,     const uint8* MacAddrPtr,     uint8* PortIdxPtr )</pre>   |   |
| <b>Service ID [hex]</b>   | 0x09  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver                                      |
|                           | MacAddrPtr  | MAC-address for which a switch port is searched over which the node with this MAC-address can be reached. |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | PortIdxPtr  | Pointer to the port index   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: success<br>E_NOT_OK: multiple ports were found  |
| <b>Description</b>        | Obtains the port over which this MAC-address at the indexed switch can be reached. The result might be used for a DHCP-server which will need the port/MAC-resolution. If for the PortIdxPtr the maximal possible value (255) is returned the given MAC address cannot be reached via a port of this switch. If multiple ports were found the API returns E_NOT_OK. |   |
| <b>Available via</b>      | EthSwt.h  |   |

](SRS\_Eth\_00087)

[SWS\_EthSwt\_00061] [The function EthSwt\_GetPortMacAddr shall return the port index over which the given MAC-address is reachable within the indexed switch. If for the PortIdxPtr the maximal possible value (255) is returned the given MAC address cannot be reached via a port of this switch. If multiple ports were found the API returns E\_NOT\_OK.](SRS\_Eth\_00087)

[SWS\_EthSwt\_00230] [The function EthSwt\_GetPortMacAddr shall be pre compile time configurable On/Off by the configuration parameter: EthSwtGetPortMacAddrApi.](SRS\_BSW\_00171)

### 8.3.11 EthSwt\_GetArlTable

[SWS\_EthSwt\_00111] [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_GetArlTable   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_GetArlTable (     uint8 switchIdx,     uint16* numberOfElements,     Eth_MacVlanType* arlTableListPointer )</pre>   |   |
| <b>Service ID [hex]</b>   | 0x0a   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Non Reentrant  |   |
| <b>Parameters (in)</b>    | switchIdx  | Index of the switch within the context of the Ethernet Switch Driver  |
| <b>Parameters (inout)</b> | numberOfElements   | In: Maximum number of elements which can be written into the arlTable Out: Number of elements which are currently available in the EthSwitch module.  |
| <b>Parameters (out)</b>   | arlTableListPointer  | Returns a pointer to the memory where the ARL table of the switch consisting of a list of structs with MAC-address, VLAN-ID and port shall be stored. |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: requested switchIdx is not valid or inactive   |
| <b>Description</b>        | Obtains the address resolution table of a switch and copies the list into a user provided buffer. The function will copy all or numberOfElements into the output list. If input value of numberOfElements is 0 the function will not copy any data but only return the number of valid entries in the cache. arlTableListPointer may be NULL_PTR in this case. |   |
| <b>Available via</b>      | EthSwt.h   |   |

]([SRS\\_Eth\\_00087](#))

[SWS\_EthSwt\_00228] [The function [EthSwt\\_GetArlTable](#) shall provide a list of structs with MAC-address, VLAN-ID and port for the indexed switch.]([SRS\\_Eth\\_00087](#))

[SWS\_EthSwt\_00197] [If the numberOfElements is greater 0x00, the arlTableListPointer shall be filled with up to numberOfElements elements. numberOfElements shall return the number of copied elements.]([SRS\\_Eth\\_00087](#))

[SWS\_EthSwt\_00235] [The [EthSwt\\_GetArlTable](#) API shall return only the numberOfElements if the numberOfElements is set to 0x00. In this case no data will be copied and a NULLPTR can be used for the arlTableListPointer.]([SRS\\_Eth\\_00087](#))

[SWS\_EthSwt\_00229] [The function [EthSwt\\_GetArlTable](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwtGetArlTableApi](#).]([SRS\\_BSW\\_00171](#))

### 8.3.12 EthSwt\_GetCounterValues

[SWS\_EthSwt\_00231] [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | EthSwt_GetCounterValues   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_GetCounterValues (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     Eth_CounterType* CounterPtr )</pre>         |  |
| <b>Service ID [hex]</b>   | 0x0c  |  |
| <b>Sync/Async</b>         | Synchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant   |  |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver |
|                           | SwitchPortIdx   | Index of the port at the addressed switch                            |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | CounterPtr  | counter values according to IETF RFC 1757, RFC 1643 and RFC 2233.    |
| <b>Return value</b>       | Std_ReturnType  | E_OK: success<br>E_NOT_OK: counter values read failure               |
| <b>Description</b>        | Reads a list with drop counter values of the corresponding port of the switch. The meaning of these values is described at Eth_CounterType. |  |
| <b>Available via</b>      | EthSwt.h  |  |

]([SRS\\_Eth\\_00128](#))

[SWS\_EthSwt\_00106] [ [EthSwt\\_GetCounterValues](#) shall read a list with drop counter values of the corresponding port of the switch. The meaning of these values is described at Eth\_CounterType.]([SRS\\_Eth\\_00128](#))

### 8.3.13 EthSwt\_GetRxStats

[SWS\_EthSwt\_00198] [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_GetRxStats  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_GetRxStats (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     Eth_RxStatsType* RxStats )</pre> |   |
| <b>Service ID [hex]</b>   | 0x0d   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Non Reentrant  |   |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver                              |
|                           | SwitchPortIdx  | Index of the port at the addressed switch   |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | RxStats  | List of values according to IETF RFC 2819 (Remote Network Monitoring Management Information Base) |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: drop counter could not be obtained                                     |





|                      |  |
|----------------------|--|
| <b>Description</b>   | Returns a list of statistic counters defined with <code>Eth_RxStatsType</code> . The majority of these Counters are derived from the IETF RFC2819. |
| <b>Available via</b> | <code>EthSwT.h</code>  |

]([SRS\\_Eth\\_00128](#))

**[SWS\_EthSwT\_00199]** [`EthSwT_GetRxStats` shall return a list of statistic counters defined with `Eth_RxStatsType`. The majority of these Counters are derived from the IETF RFC2819.]([SRS\\_Eth\\_00128](#))

**[SWS\_EthSwT\_00202]** [The function `EthSwT_GetRxStats` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwTGetRxStatsApi`.]([SRS\\_BSW\\_00171](#))

### 8.3.14 EthSwT\_GetTxStats

**[SWS\_EthSwT\_91001]** [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | EthSwT_GetTxStats   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_GetTxStats (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     Eth_TxStatsType* TxStats )</pre>  |  |
| <b>Service ID [hex]</b>   | 0x20  |  |
| <b>Sync/Async</b>         | Synchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant   |  |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver |
|                           | SwitchPortIdx   | Index of the port at the addressed switch                            |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | TxStats   | List of values to read statistic values for transmission.            |
| <b>Return value</b>       | Std_ReturnType  | E_OK: success<br>E_NOTOK: Tx-statistics could not be obtained        |
| <b>Description</b>        | Returns the list of Transmission Statistics out of IETF RFC1213 defined with <code>Eth_TxStatsType</code> , where the maximal possible value shall denote an invalid value, e.g. this counter is not available. |  |
| <b>Available via</b>      | <code>EthSwT.h</code>   |  |

]([SRS\\_Eth\\_00128](#))

**[SWS\_EthSwT\_00372]** [`EthSwT_GetTxStats` shall return the list of Transmission Statistics out of IETF RFC1213 defined with `Eth_TxStatsType`, where the maximal possible value shall denote an invalid value, e.g. this counter is not available.]([SRS\\_Eth\\_00128](#))

**[SWS\_EthSwT\_00362]** [The function `EthSwT_GetTxStats` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwTGetTxStatsApi`.]([SRS\\_BSW\\_00171](#))

### 8.3.15 EthSwt\_GetTxErrorCounterValues

[SWS\_EthSwt\_91000] [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_GetTxErrorCounterValues   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_GetTxErrorCounterValues (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     Eth_TxErrorCounterValuesType* TxStats )</pre>   |   |
| <b>Service ID [hex]</b>   | 0x21   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Non Reentrant  |   |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Drive     |
|                           | SwitchPortIdx  | Index of the port at the addressed switch                               |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | TxStats  | List of values to read statistic error counter values for transmission. |
|                           |  |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success,<br>E_NOTOK: Tx-statistics could not be obtained          |
| <b>Description</b>        | Returns the list of Transmission Error Counters out of IETF RFC1213 and RFC1643 defined with Eth_TxErrorCounterValuesType, where the maximal possible value shall denote an invalid value, e.g. this counter is not available. |   |
| <b>Available via</b>      | EthSwt.h   |   |

]([SRS\\_Eth\\_00128](#))

[SWS\_EthSwt\_00373] [[EthSwt\\_GetTxErrorCounterValues](#) returns the list of Transmission Error Counters out of IETF RFC1213 and RFC1643 defined with Eth\_TxErrorCounterValuesType, where the maximal possible value shall denote an invalid value, e.g. this counter is not available.]([SRS\\_Eth\\_00128](#))

[SWS\_EthSwt\_00370] [The function [EthSwt\\_GetTxErrorCounterValues](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwt\\_GetTxErrorCounterValuesApi](#).]([SRS\\_BSW\\_00171](#))

### 8.3.16 EthSwt\_GetSwitchReg

[SWS\_EthSwt\_00206] [

|                         |  |  |
|-------------------------|--|--|
| <b>Service Name</b>     | EthSwt_GetSwitchReg  |  |
| <b>Syntax</b>           | <pre>Std_ReturnType EthSwt_GetSwitchReg (     uint8 SwitchIdx,     uint32 page,     uint32 register,     uint32* registerContent )</pre> |  |
| <b>Service ID [hex]</b> | 0x0e   |  |
| <b>Sync/Async</b>       | Synchronous  |  |
| <b>Reentrancy</b>       | Non Reentrant  |  |





|                           |  |  |
|---------------------------|--|--|
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver |
|                           | page   | Address of a register page   |
|                           | register   | Address of a register  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | registerContent  | Content of the addresses register                                    |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: drop counter could not be obtained        |
| <b>Description</b>        | Generic API for reading the content of a switch register |  |
| <b>Available via</b>      | EthSwt.h   |  |

](SRS\_Eth\_00120)

[SWS\_EthSwt\_00207] [The function `EthSwt_GetSwitchReg` shall read the content of a switch register.](SRS\_Eth\_00120)

[SWS\_EthSwt\_00210] [The function `EthSwt_GetSwitchReg` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtGetSwitchRegApi`.](SRS\_BSW\_00171)

### 8.3.17 EthSwt\_SetSwitchReg

[SWS\_EthSwt\_00211] [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | EthSwt_SetSwitchReg   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_SetSwitchReg (     uint8 SwitchIdx,     uint32 page,     uint32 register,     uint32 registerContent )</pre> |  |
| <b>Service ID [hex]</b>   | 0x0f  |  |
| <b>Sync/Async</b>         | Synchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant   |  |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver |
|                           | page  | Address of a register page   |
|                           | register  | Address of a register  |
|                           | registerContent   | Content of the addresses register                                    |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: success<br>E_NOT_OK: drop counter could not be obtained        |
| <b>Description</b>        | Generic API for writing the content of a switch register  |  |
| <b>Available via</b>      | EthSwt.h  |  |

](SRS\_Eth\_00120)

[SWS\_EthSwt\_00212] [The function `EthSwt_SetSwitchReg` shall write the content to the switch register.](SRS\_Eth\_00120)



[SWS\_EthSwt\_00215] [The function `EthSwt_SetSwitchReg` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtSetSwitchRegApi.`](SRS\_BSW\_00171)

### 8.3.18 EthSwt\_ReadTrcvRegister

[SWS\_EthSwt\_00216] [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_ReadTrcvRegister   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_ReadTrcvRegister (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     uint8 RegIdx,     uint16* RegValPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x10  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver  |
|                           | SwitchPortIdx   | Index of the port at the addressed switch   |
|                           | RegIdx  | Index of the register   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | RegValPtr   | Pointer to the register content   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: success<br>E_NOT_OK: Content of the transceiver could not be obtained, or the function is called in state ETHSWT_STATE_UNINIT or ETHSWT_STATE_INIT. |
| <b>Description</b>        | Generic API for reading the content of a transceiver register   |   |
| <b>Available via</b>      | EthSwt.h  |   |

](SRS\_Eth\_00120)

[SWS\_EthSwt\_00217] [The function `EthSwt_ReadTrcvRegister` shall read the specified transceiver register through the MII or SPI of the indexed switch port.](SRS\_Eth\_00118, SRS\_Eth\_00120)

[SWS\_EthSwt\_00220] [The function `EthSwt_ReadTrcvRegister` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtReadTrcvRegisterApi.`](SRS\_BSW\_00171)

### 8.3.19 EthSwt\_WriteTrcvRegister

[SWS\_EthSwt\_00221] [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_WriteTrcvRegister   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_WriteTrcvRegister (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     uint8 RegIdx,     uint16 RegVal )</pre> |   |
| <b>Service ID [hex]</b>   | 0x11   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Non Reentrant  |   |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver  |
|                           | SwitchPortIdx  | Index of the port at the addressed switch   |
|                           | RegIdx   | Index of the register   |
|                           | RegVal   | Content for the indexed register  |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: Content given by RegVal could not be written to the given register (RegIdx) of the transceiver, or the function is called in state ETHSWT_STATE_UNINIT or ETHSWT_STATE_INIT. |
| <b>Description</b>        | Generic API for writing the content of a transceiver register  |   |
| <b>Available via</b>      | EthSwt.h   |   |

](SRS\_Eth\_00120)

[SWS\_EthSwt\_00222] [The function `EthSwt_WriteTrcvRegister` shall write the specified transceiver register through the MII or SPI of the indexed switch port.](SRS\_Eth\_00118, SRS\_Eth\_00120)

[SWS\_EthSwt\_00225] [The function `EthSwt_WriteTrcvRegister` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtWriteTrcvRegisterApi`.](SRS\_BSW\_00171)

### 8.3.20 EthSwt\_EnableVlan

[SWS\_EthSwt\_00172] [

|                         |   |  |
|-------------------------|---|--|
| <b>Service Name</b>     | EthSwt_EnableVlan   |  |
| <b>Syntax</b>           | <pre>Std_ReturnType EthSwt_EnableVlan (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     uint16 VlanId,     boolean Enable )</pre> |  |
| <b>Service ID [hex]</b> | 0x12  |  |
| <b>Sync/Async</b>       | Synchronous   |  |



△

|                           |  |  |
|---------------------------|--|--|
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver                                       |
|                           | SwitchPortIdx  | Index of the port at the addressed switch  |
|                           | VlanId   | VLAN-ID to a preconfigured configuration on the given ingress port   |
|                           | Enable   | 1 = VLAN-configuration enabled 0 = VLAN-configuration disabled (frames with given VLAN-ID will be dropped) |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: buffer level could not be obtained  |
| <b>Description</b>        | Enables or disables a pre-configured VLAN at a certain port of a switch. |  |
| <b>Available via</b>      | EthSwt.h   |  |

]([SRS\\_Eth\\_00121](#), [SRS\\_Eth\\_00114](#))

**[SWS\_EthSwt\_00173]** [The function [EthSwt\\_EnableVlan](#) shall enable or disable a pre-configured VLAN at a certain port of a switch.] ([SRS\\_Eth\\_00121](#), [SRS\\_Eth\\_00114](#))

**[SWS\_EthSwt\_00177]** [The function [EthSwt\\_EnableVlan](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwtEnableVlanApi](#).] ([SRS\\_BSW\\_00171](#))

### 8.3.21 EthSwt\_StoreConfiguration

**[SWS\_EthSwt\_00086]** [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_StoreConfiguration  |  |
| <b>Syntax</b>             | Std_ReturnType EthSwt_StoreConfiguration (<br>uint8 SwitchIdx<br>)   |  |
| <b>Service ID [hex]</b>   | 0x13   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver   |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request to persistently store the MAC/Port table was accepted<br>E_NOT_OK: Request to persistently store the MAC/Port table was not accepted |
| <b>Description</b>        | Trigger the storage/reset of the configuration of the learned MAC/Port tables of a switch in a persistent manner and will be used by e.g. CDD. |  |
| <b>Available via</b>      | EthSwt.h   |  |

]([SRS\\_Eth\\_00087](#), [SRS\\_Eth\\_00122](#))

**[SWS\_EthSwt\_00087]** [The function [EthSwt\\_StoreConfiguration](#) shall request to store the configuration of the learned MAC/Port tables of a switch in a persistent manner. This can be done in two ways: 1.) Reading out the parameters and storing

them in the NV-RAM of the host CPU using the NV-RAM manager. 2.) Advising the switch to store the configuration data in its local NV-RAM.

In both alternatives `<EthSwtPersistentConfigurationResultCallback>` shall be invoked if `EthSwtPersistentConfigurationResultCallback` is configured. In case of storage to switch local NV-RAM, `JobResult` shall be set to `NVM_REQ_OK` to indicate success or to `NVM_REQ_NOT_OK` to indicate failure.]([SRS\\_Eth\\_00087](#), [SRS\\_Eth\\_00122](#))

**[SWS\_EthSwt\_00090]** [The function `EthSwt_StoreConfiguration` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtStoreConfigurationApi`.]([SRS\\_BSW\\_00171](#))

### 8.3.22 EthSwt\_ResetConfiguration

**[SWS\_EthSwt\_00091]** [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | EthSwt_ResetConfiguration   |  |
| <b>Syntax</b>             | Std_ReturnType EthSwt_ResetConfiguration ( uint8 SwitchIdx )  |  |
| <b>Service ID [hex]</b>   | 0x14  |  |
| <b>Sync/Async</b>         | Synchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant   |  |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver   |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request to persistently reset the MAC/Port table was accepted<br>E_NOT_OK: Request to persistently reset the MAC/Port table was not accepted |
| <b>Description</b>        | The function shall request to reset and store the configuration of the learned MAC/Port tables of a Ethernet switch in a persistent manner. This could be used by e.g. a CDD. |  |
| <b>Available via</b>      | EthSwt.h  |  |

]([SRS\\_Eth\\_00087](#), [SRS\\_Eth\\_00122](#))

**[SWS\_EthSwt\_00092]** [The function `EthSwt_ResetConfiguration` shall request to reset the configuration of the learned MAC/Port tables of a switch in a persistent manner. This can be done in two ways: 1.) Overwriting the learned parameters in the NV-RAM of the host CPU with preconfigured default values. 2.) Advising the switch to reset the learned configuration data in its local NV-RAM.

In both alternatives `<EthSwtPersistentConfigurationResultCallback>` shall be invoked if `EthSwtPersistentConfigurationResultCallback` is configured. In case of storage to switch local NV-RAM, `JobResult` shall be set to `NVM_REQ_OK` to indicate success or to `NVM_REQ_NOT_OK` to indicate failure.]([SRS\\_Eth\\_00122](#), [SRS\\_Eth\\_00087](#))

[SWS\_EthSwT\_00095] [The function `EthSwT_ResetConfiguration` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwTResetConfigurationApi`.] ([SRS\\_BSW\\_00171](#))

### 8.3.23 EthSwT\_SetMacLearningMode

[SWS\_EthSwT\_00182] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwT_SetMacLearningMode  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_SetMacLearningMode (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     EthSwT_MacLearningType MacLearningMode )</pre>   |  |
| <b>Service ID [hex]</b>   | 0x15   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver                                 |
|                           | SwitchPortIdx  | Index of the port at the addressed switch  |
|                           | MacLearningMode  | Defines whether MAC addresses shall be learned and if they shall be learned in software or hardware. |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: configuration could be persistently reset                                 |
| <b>Description</b>        | Sets the MAC learning mode in one of the tree modes: 1.) HW learning enabled, 2.) Hardware learning disabled, 3.) Software learning enabled. Note: This feature is hardware dependent, i.e. the switch hardware needs to support the different learning modes. |  |
| <b>Available via</b>      | EthSwT.h   |  |

] ([SRS\\_Eth\\_00087](#), [SRS\\_Eth\\_00122](#))

[SWS\_EthSwT\_00183] [The function `EthSwT_SetMacLearningMode` shall set the MAC learning mode according to `EthSwT_MacLearningType`.] ([SRS\\_Eth\\_00122](#), [SRS\\_Eth\\_00087](#))

**Note:** This feature is hardware dependent, i.e. the switch hardware needs to support the different modes.

[SWS\_EthSwT\_00186] [The function `EthSwT_SetMacLearningMode` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwTSetMacLearningModeApi`.] ([SRS\\_BSW\\_00171](#))

### 8.3.24 EthSwT\_GetMacLearningMode

[SWS\_EthSwT\_00187] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwT_GetMacLearningMode  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_GetMacLearningMode (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     EthSwT_MacLearningType* MacLearningMode )</pre>  |  |
| <b>Service ID [hex]</b>   | 0x16   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver                                 |
|                           | SwitchPortIdx  | Index of the port at the addressed switch  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | MacLearningMode  | Defines whether MAC addresses shall be learned and if they shall be learned in software or hardware. |
|                           |  |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: configuration could be persistently reset                                 |
|                           |  |  |
| <b>Description</b>        | Returns the MAC learning mode, i.e. 1.) HW learning enabled, 2.) Hardware learning disabled, 3.) Software learning enabled. Note: This feature is hardware dependent, i.e. the switch hardware needs to support the different learning modes |  |
| <b>Available via</b>      | EthSwT.h   |  |

](SRS\_Eth\_00087)

[SWS\_EthSwT\_00188] [The function `EthSwT_GetMacLearningMode` shall return the MAC learning mode according to `EthSwT_MacLearningType`.](SRS\_Eth\_00087)

**Note:** This feature is hardware dependent, i.e. the switch hardware needs to support the different learning modes.

[SWS\_EthSwT\_00191] [The function `EthSwT_GetMacLearningMode` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwTGetMacLearningModeApi`.](SRS\_BSW\_00171)

### 8.3.25 EthSwT\_NvmSingleBlockCallback

[SWS\_EthSwT\_00125] [

|                         |  |  |
|-------------------------|--|--|
| <b>Service Name</b>     | EthSwT_NvmSingleBlockCallback  |  |
| <b>Syntax</b>           | <pre>Std_ReturnType EthSwT_NvmSingleBlockCallback (     NvM_BlockRequestType BlockRequest,     NvM_RequestResultType JobResult )</pre> |  |
| <b>Service ID [hex]</b> | 0x17   |  |
| <b>Sync/Async</b>       | Synchronous  |  |
| <b>Reentrancy</b>       | Non Reentrant  |  |





|                           |   |  |
|---------------------------|---|--|
| <b>Parameters (in)</b>    | BlockRequest  | The request type (read, write, ... etc.) of the previous processed block job     |
|                           | JobResult   | Covers the job result of the previous processed single block job.                |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: success<br>E_NOT_OK: Callback function has not been processed successfully |
| <b>Description</b>        | Function will be called by the NVRAMManager after the switch configuration has been stored or resetted. |  |
| <b>Available via</b>      | EthSwT_NvM.h  |  |

]([SRS\\_Eth\\_00087](#), [SRS\\_Eth\\_00122](#))

**[SWS\_EthSwT\_00126]** [The function [EthSwT\\_NvmSingleBlockCallback](#) shall be called by the NVRAMManager [13] after the switch configuration has been stored or reset in the the NV RAM.]([SRS\\_Eth\\_00122](#), [SRS\\_Eth\\_00087](#))

**[SWS\_EthSwT\_00196]** [The function [EthSwT\\_NvmSingleBlockCallback](#) shall call the function <user>\_PersistentConfigurationResult to provide the JobResult to the caller of [EthSwT\\_StoreConfiguration](#) or [EthSwT\\_ResetConfiguration](#).]([SRS\\_Eth\\_00122](#), [SRS\\_Eth\\_00087](#))

**[SWS\_EthSwT\_00127]** [The function [EthSwT\\_NvmSingleBlockCallback](#) shall always return E\_OK according to SWS\_NvM\_00368.]([SRS\\_Eth\\_00122](#), [SRS\\_Eth\\_00087](#))

**[SWS\_EthSwT\_00128]** [The function [EthSwT\\_NvmSingleBlockCallback](#) shall raise a development error if the JobResult equals NVM\_REQ\_NOT\_OK, i.e. the write request has been finished unsuccessfully.]([SRS\\_BSW\\_00369](#))

**Note:** Please note that a production error at this point is not necessary because the NvM will raise also a production error if the write to NV RAM was not successful.

**[SWS\_EthSwT\_00129]** [The function [EthSwT\\_NvmSingleBlockCallback](#) shall be pre compile time configurable On/Off by the existence of the container [EthSwT\\_Nvm](#).]([SRS\\_BSW\\_00171](#))

### 8.3.26 EthSwT\_GetVersionInfo

**[SWS\_EthSwT\_00058]** [

|                         |  |
|-------------------------|--|
| <b>Service Name</b>     | EthSwT_GetVersionInfo  |
| <b>Syntax</b>           | void EthSwT_GetVersionInfo (<br>Std_VersionInfoType* VersionInfoPtr<br>) |
| <b>Service ID [hex]</b> | 0x18   |
| <b>Sync/Async</b>       | Synchronous  |



△

|                           |   |   |
|---------------------------|---|---|
| <b>Reentrancy</b>         | Reentrant                                       |   |
| <b>Parameters (in)</b>    | None  |   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | VersionInfoPtr                                  | Pointer to where to store the version information of this module. |
| <b>Return value</b>       | None  |   |
| <b>Description</b>        | Returns the version information of this module. |   |
| <b>Available via</b>      | EthSwt.h  |   |

](SRS\_BSW\_00171)

[SWS\_EthSwt\_00124] [The function `EthSwt_GetVersionInfo` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtVersionInfoApi`.](SRS\_BSW\_00171)

### 8.3.27 EthSwt\_EthRxProcessFrame

[SWS\_EthSwt\_91004] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_EthRxProcessFrame   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_EthRxProcessFrame (     uint8 CtrlIdx,     Eth_BufIdxType BufIdx,     uint8** DataPtr,     uint16* LengthPtr,     boolean* IsMgmtFrameOnlyPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x23   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | CtrlIdx  | Ethernet Controller index  |
|                           | BufIdx   | Ethernet Rx Buffer index   |
| <b>Parameters (inout)</b> | DataPtr  | IN: Pointer to the position of the EtherType of a common Ethernet frame<br>OUT: Pointer to the position of the EtherType in the management frame   |
|                           | LengthPtr  | IN: Pointer to the length of the frame received<br>OUT: Pointer to the length decreased by the management information length.  |
| <b>Parameters (out)</b>   | IsMgmtFrameOnlyPtr   | Information about the kind of frame<br>FALSE: Frame is not only for management purpose, but also for normal communication.<br>TRUE: Frame is only for management purpose and must not be processed in common receive process |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Frame successfully processed<br>E_NOT_OK: Frame processing failed  |
| <b>Description</b>        | Function inspects the Ethernet frame passed by the data pointer for management information and stores it for later use in <code>EthSwt_EthRxFinishedIndication()</code> .        |  |
| <b>Available via</b>      | EthSwt_Eth.h   |  |

](SRS\_Eth\_00125)



[SWS\_EthSwt\_00249] [The function [EthSwt\\_EthRxProcessFrame](#) shall be pre compile time configurable ON/OFF by the configuration parameter: [EthSwtManagementSupportApi](#) .]([SRS\\_BSW\\_00171](#))

### 8.3.28 EthSwt\_EthRxFinishedIndication

[SWS\_EthSwt\_91005] [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_EthRxFinishedIndication  |   |
| <b>Syntax</b>             | Std_ReturnType EthSwt_EthRxFinishedIndication (<br>uint8 CtrlIdx,<br>Eth_BufIdxType BufIdx<br>)   |   |
| <b>Service ID [hex]</b>   | 0x24  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | CtrlIdx   | Ethernet Controller index   |
|                           | BufIdx  | Ethernet Rx Buffer index  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Frame successfully processed<br>E_NOT_OK: Frame processing failed |
| <b>Description</b>        | Indication for a finished receive process for a specific Ethernet frame, which results in providing the management information retrieved during EthSwt_EthRxProcessFrame(). |   |
| <b>Available via</b>      | EthSwt_Eth.h  |   |

]([SRS\\_Eth\\_00125](#))

[SWS\_EthSwt\_00253] [The function [EthSwt\\_EthRxFinishedIndication](#) shall be pre compile time configurable ON/OFF by the configuration parameter: [EthSwtManagementSupportApi](#) .]([SRS\\_BSW\\_00171](#))

### 8.3.29 EthSwt\_EthTxPrepareFrame

[SWS\_EthSwt\_91006] [

|                         |   |                           |
|-------------------------|---|---------------------------|
| <b>Service Name</b>     | EthSwt_EthTxPrepareFrame  |                           |
| <b>Syntax</b>           | Std_ReturnType EthSwt_EthTxPrepareFrame (<br>uint8 CtrlIdx,<br>Eth_BufIdxType BufIdx,<br>uint8** DataPtr,<br>uint16* LengthPtr<br>) |                           |
| <b>Service ID [hex]</b> | 0x25  |                           |
| <b>Sync/Async</b>       | Synchronous   |                           |
| <b>Reentrancy</b>       | Non Reentrant   |                           |
| <b>Parameters (in)</b>  | CtrlIdx   | Ethernet Controller index |
|                         | BufIdx  | Ethernet Rx Buffer index  |





|                           |   |  |
|---------------------------|---|--|
| <b>Parameters (inout)</b> | DataPtr   | IN: Pointer to the position of the EtherType of a common Ethernet frame<br>OUT: Pointer to the position of the EtherType in the management frame           |
|                           | LengthPtr   | IN: Pointer to the length of the buffer without management information<br>OUT: Pointer to the modified length needed for buffer and management information |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Frame successfully prepared<br>E_NOT_OK: Frame preparation failed  |
| <b>Description</b>        | Prepares the Ethernet frame for common Ethernet communication (frame shall be handled by switch according to the common address resolution behavior) and stores the information for processing of EthSwT_EthTxFinishedIndication(). |  |
| <b>Available via</b>      | EthSwT_Eth.h  |  |

]([SRS\\_Eth\\_00125](#))

**[SWS\_EthSwT\_00257]** [The function [EthSwT\\_EthTxPrepareFrame](#) shall be pre compile time configurable ON/OFF by the configuration parameter: [EthSwTManagementSupportApi](#) .]([SRS\\_BSW\\_00171](#))

### 8.3.30 EthSwT\_EthTxAdaptBufferLength

**[SWS\_EthSwT\_91007]** [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | EthSwT_EthTxAdaptBufferLength   |  |
| <b>Syntax</b>             | void EthSwT_EthTxAdaptBufferLength ( uint16* LengthPtr )                |  |
| <b>Service ID [hex]</b>   | 0x26  |  |
| <b>Sync/Async</b>         | Synchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant   |  |
| <b>Parameters (in)</b>    | None  |  |
| <b>Parameters (inout)</b> | LengthPtr   | IN: Pointer to the length of the buffer without management information.<br>OUT: Pointer to the modified length needed for buffer and management information. |
|                           | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | None  |  |
| <b>Description</b>        | Modifies the buffer length to be able to insert management information. |  |
| <b>Available via</b>      | EthSwT_Eth.h  |  |

]([SRS\\_Eth\\_00125](#))

**[SWS\_EthSwT\_00261]** [The function [EthSwT\\_EthTxAdaptBufferLength](#) shall be pre compile time configurable ON/OFF by the configuration parameter: [EthSwTManagementSupportApi](#) .]([SRS\\_BSW\\_00171](#))

### 8.3.31 EthSwT\_SetMgmtInfo

[SWS\_EthSwT\_91008] [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwT_SetMgmtInfo   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_SetMgmtInfo (     uint8 CtrlIdx,     Eth_BufIdxType BufIdx,     const EthSwT_MgmtInfoType* MgmtInfoPtr )</pre>                    |   |
| <b>Service ID [hex]</b>   | 0x27   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Non Reentrant  |   |
| <b>Parameters (in)</b>    | CtrlIdx  | Ethernet Controller index   |
|                           | BufIdx   | Ethernet Rx Buffer index  |
|                           | MgmtInfoPtr  | Pointer to the management information   |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Management infos successfully set<br>E_NOT_OK: Setting of management infos failed |
| <b>Description</b>        | Extends the Ethernet frame prepared previously by EthSwT_EthTxPrepareFrame() with the management information to achieve transmission only on specific ports. |   |
| <b>Available via</b>      | EthSwT.h   |   |

]([SRS\\_Eth\\_00125](#))

[SWS\_EthSwT\_00264] [The function [EthSwT\\_SetMgmtInfo](#) shall be pre compile time configurable ON/OFF by the configuration parameter: [EthSwTManagementSupportApi](#) .]([SRS\\_BSW\\_00171](#))

### 8.3.32 EthSwT\_EthTxProcessFrame

[SWS\_EthSwT\_91009] [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | EthSwT_EthTxProcessFrame  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_EthTxProcessFrame (     uint8 CtrlIdx,     Eth_BufIdxType BufIdx,     uint8** DataPtr,     uint16* LengthPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x28  |  |
| <b>Sync/Async</b>         | Synchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant   |  |
| <b>Parameters (in)</b>    | CtrlIdx   | Ethernet Controller index  |
|                           | BufIdx  | Ethernet Rx Buffer index   |
| <b>Parameters (inout)</b> | DataPtr   | IN: Pointer to the position of the EtherType of a common Ethernet frame<br>OUT: Pointer to the position of the EtherType in the management frame |



△

|                         |  |  |
|-------------------------|--|--|
|                         | LengthPtr  | IN: Pointer to the length of the received frame<br>OUT: Pointer to the length decreased by the management information length |
| <b>Parameters (out)</b> | None   |  |
| <b>Return value</b>     | Std_ReturnType   | E_OK: Frame successfully processed<br>E_NOT_OK: Frame processing failed  |
| <b>Description</b>      | Function inserts management information into the Ethernet frame. |  |
| <b>Available via</b>    | EthSwT_Eth.h   |  |

]([SRS\\_Eth\\_00125](#))

**[SWS\_EthSwT\_00268]** [The function [EthSwT\\_EthTxProcessFrame](#) shall be pre compile time configurable ON/OFF by the configuration parameter: [EthSwTManagementSupportApi](#) .]([SRS\\_BSW\\_00171](#))

### 8.3.33 EthSwT\_EthTxFinishedIndication

**[SWS\_EthSwT\_91010]** [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_EthTxFinishedIndication  |   |
| <b>Syntax</b>             | Std_ReturnType EthSwT_EthTxFinishedIndication (<br>uint8 CtrlIdx,<br>Eth_BufIdxType BufIdx<br>) |   |
| <b>Service ID [hex]</b>   | 0x29  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | CtrlIdx   | Ethernet Controller index   |
|                           | BufIdx  | Ethernet Rx Buffer index  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Frame successfully processed<br>E_NOT_OK: Frame processing failed |
| <b>Description</b>        | Indication for a finished transmit process for a specific Ethernet frame.                       |   |
| <b>Available via</b>      | EthSwT_Eth.h  |   |

]([SRS\\_Eth\\_00125](#))

**[SWS\_EthSwT\_00273]** [The function [EthSwT\\_EthTxFinishedIndication](#) shall be pre compile time configurable ON/OFF by the configuration parameter: [EthSwTManagementSupportApi](#) .]([SRS\\_BSW\\_00171](#))

### 8.3.34 EthSwt\_PortEnableTimeStamp

[SWS\_EthSwt\_91028] [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_PortEnableTimeStamp  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_PortEnableTimeStamp (     uint8 CtrlIdx,     Eth_BufIdxType BufIdx,     EthSwt_MgmtInfoType* MgmtInfoPtr )</pre>   |   |
| <b>Service ID [hex]</b>   | 0x40  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | CtrlIdx   | Ethernet Controller index   |
|                           | BufIdx  | Ethernet Rx Buffer index  |
|                           | MgmtInfoPtr   | Management information including SwitchIdx and SwitchPortIdx  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Time stamping on egress successfully enabled<br>E_NOT_OK: Enabling of time stamping on egress has been failed |
| <b>Description</b>        | Activates egress time stamping on a dedicated message object on a dedicated port of a Switch if EthSwtPortTimeStampSupport is set to TRUE for this port. The selective activation of dedicated message objects for time stamping reduces the number of notification calls only to the required calls. Some HW does store once the egress time stamp marker and some HW needs it always before transmission. There will be no disabled functionality, due to the fact, that the message type is always "time stamped" by network design. |   |
| <b>Available via</b>      | EthSwt.h  |   |

](SRS\_Eth\_00125)

[SWS\_EthSwt\_00379] [The function `EthSwt_PortEnableTimeStamp` shall be pre compile time configurable ON/OFF by the configuration parameter: `EthSwtGlobal-TimeSupportApi` .](SRS\_BSW\_00171)

### 8.3.35 EthSwt\_VerifyConfig

[SWS\_EthSwt\_91012] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_VerifyConfig  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_VerifyConfig (     uint8 SwitchIdx,     boolean* Result )</pre> |  |
| <b>Service ID [hex]</b>   | 0x31   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver                                 |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | Result   | Result of verification, TRUE: configuration verified ok, FALSE: configuration values found corrupted |





|                      |   |   |
|----------------------|---|---|
| <b>Return value</b>  | Std_ReturnType  | E_OK: Configuration verificaton succeeded,<br>E_NOT_OK: Configuration verification not succeeded. |
| <b>Description</b>   | Verifies the Switch Configuration depending on the HW-Architecture, HW-capability and the intended accuracy of this verification. |   |
| <b>Available via</b> | EthSwT.h  |   |

]([SRS\\_Eth\\_00126](#))

**[SWS\_EthSwT\_00287]** [The function [EthSwT\\_VerifyConfig](#) shall be compile time configurable On/Off by the configuration parameter: [EthSwTVerifyConfigApi.](#)]([SRS\\_BSW\\_00171](#))

### 8.3.36 EthSwT\_SetForwardingMode

**[SWS\_EthSwT\_91013]** [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwT_SetForwardingMode   |  |
| <b>Syntax</b>             | Std_ReturnType EthSwT_SetForwardingMode (<br>uint8 SwitchIdx,<br>boolean mode<br>)   |  |
| <b>Service ID [hex]</b>   | 0x32   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver                                   |
|                           | mode   | True Forwarding enabled, False Forwarding disabled   |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: stopping of frame forwarding succeeded,<br>E_NOT_OK: stopping of frame forwarding not succeeded. |
| <b>Description</b>        | Configures switch to start or stop forwarding for all ports. This API call may be used during switch configuration verification. |  |
| <b>Available via</b>      | EthSwT.h   |  |

]([SRS\\_Eth\\_00126](#))

**[SWS\_EthSwT\_00291]** [The function [EthSwT\\_SetForwardingMode](#) shall be compile time configurable On/Off by the configuration parameter: [EthSwTSetForwardingModeApi.](#)]([SRS\\_BSW\\_00171](#))

### 8.3.37 EthSwT\_GetPortSignalQuality

[SWS\_EthSwT\_91014] [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_GetPortSignalQuality   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_GetPortSignalQuality (     uint8 SwitchIdx,     uint8 PortIdx,     uint32* SignalQualityPtr )</pre>  |   |
| <b>Service ID [hex]</b>   | 0x33  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver  |
|                           | PortIdx   | Index of the port at the addressed switch   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | SignalQualityPtr  | Pointer to the memory where the signal quality shall be stored.   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: signal quality could be read.<br>E_NOT_OK: signal quality could not be read (i.e. no Ethernet transceiver is available for this Ethernet switch port) |
| <b>Description</b>        | The function retrieves the signal quality of the link of the indexed Ethernet switch port. If no transceiver is referenced the signal quality shall be set to 0xFFFFFFFF. |   |
| <b>Available via</b>      | EthSwT.h  |   |

] ([SRS\\_Eth\\_00123](#))

[SWS\_EthSwT\_00293] [The function [EthSwT\\_GetPortSignalQuality](#) shall obtain the signal quality by calling the function [EthTrcv\\_GetPhySignalQuality](#) of the referenced Ethernet Transceiver Driver. If the current signal quality is not available, the signal quality shall be set to 0xFFFFFFFF.] ([SRS\\_Eth\\_00123](#))

[SWS\_EthSwT\_00297] [The function [EthSwT\\_GetPortSignalQuality](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwTGetPortSignalQualityApi](#).] ([SRS\\_BSW\\_00171](#))

### 8.3.38 EthSwT\_GetPortIdentifier

[SWS\_EthSwT\_91015] [

|                         |  |  |
|-------------------------|--|--|
| <b>Service Name</b>     | EthSwT_GetPortIdentifier   |  |
| <b>Syntax</b>           | <pre>Std_ReturnType EthSwT_GetPortIdentifier (     uint8 SwitchIdx,     uint8 PortIdx,     uint32* OrgUniqueIdPtr,     uint8* ModelNrPtr,     uint8* RevisionNrPtr )</pre> |  |
| <b>Service ID [hex]</b> | 0x34   |  |
| <b>Sync/Async</b>       | Synchronous  |  |
| <b>Reentrancy</b>       | Non Reentrant  |  |





|                           |   |  |
|---------------------------|---|--|
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver   |
|                           | PortIdx   | Index of the port at the addressed switch  |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | OrgUniqueIdPtr  | Pointer to the memory where the Organizationally Unique Identifier (OUI) shall be stored.  |
|                           | ModelNrPtr  | Pointer to the memory where the Manufacturer's Model Number shall be stored.   |
|                           | RevisionNrPtr   | Pointer to the memory where the Revision Number shall be stored.   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: organizationally unique identifier of the Ethernet transceiver could be read.<br>E_NOT_OK: organizationally unique identifier of the Ethernet transceiver could not be obtained (i.e. OUI is not available). |
| <b>Description</b>        | This function retrieves the OUI (24 bit) of the indexed Ethernet switch port. |  |
| <b>Available via</b>      | EthSwt.h  |  |

]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00299]** [The function [EthSwt\\_GetPortIdentifier](#) shall return the value of the organizationally unique identifier (OUI 24 bit) of the indexed Ethernet switch port that is connected to the indexed Ethernet switch. It shall set the 8 most significant bits of the OUI to 0xFFxxxxxx. If the Ethernet switch port references an Ethernet transceiver, the function shall obtain the OUI by calling the function [EthTrcv\\_GetPhyIdentifier](#) and set the 8 most significant bits of the OUI to 0x00xxxxxx.]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00394]** [If neither the Ethernet switch port nor the Ethernet Transceiver Driver can provide an OUI the function [EthSwt\\_GetPortIdentifier](#) shall return E\_NOT\_OK.]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00303]** [The function [EthSwt\\_GetPortIdentifier](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwtGetPortIdentifierApi](#).]([SRS\\_BSW\\_00171](#))

### 8.3.39 EthSwt\_GetSwitchIdentifier

**[SWS\_EthSwt\_91016]** [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_GetSwitchIdentifier   |  |
| <b>Syntax</b>             | Std_ReturnType EthSwt_GetSwitchIdentifier (<br>uint8 SwitchIdx,<br>uint32* OrgUniqueIdPtr<br>) |  |
| <b>Service ID [hex]</b>   | 0x35   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver |
| <b>Parameters (inout)</b> | None   |  |







|                         |   |   |
|-------------------------|---|---|
| <b>Parameters (out)</b> | OrgUniqueIdPtr  | Pointer to the memory where the Organizationally Unique Identifier shall be stored.   |
| <b>Return value</b>     | Std_ReturnType  | E_OK: organizationally unique identifier of the Ethernet switch could be read.<br>E_NOT_OK: organizationally unique identifier of the Ethernet switch could not be read (i.e. no OUI is available for this Ethernet switch) |
| <b>Description</b>      | Obtain the Organizationally Unique Identifier that is given by the IEEE of the indexed Ethernet switch. This function shall provide the OUI of Ethernet switch. The OUI has a size of 24 bit. If a ethernet switch can provide the OUI the 8 most significant bits of the OUI shall be set to 0x00xxxxxx. If a Ethernet switch can not provide the OUI the 8 most significant bits of the OUI shall be set to 0xFFxxxxxx. |   |
| <b>Available via</b>    | EthSwt.h  |   |

] ([SRS\\_Eth\\_00123](#))

[SWS\_EthSwt\_00305] [The function [EthSwt\\_GetSwitchIdentifier](#) shall return the value of the organizationally unique identifier of the indexed Ethernet switch.] ([SRS\\_Eth\\_00123](#))

[SWS\_EthSwt\_00308] [The function [EthSwt\\_GetSwitchIdentifier](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwt\\_GetSwitchIdentifierApi](#).] ([SRS\\_BSW\\_00171](#))

### 8.3.40 EthSwt\_WritePortMirrorConfiguration

[SWS\_EthSwt\_91018] [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_WritePortMirrorConfiguration   |   |
| <b>Syntax</b>             | Std_ReturnType EthSwt_WritePortMirrorConfiguration (<br>uint8 MirroredSwitchIdx,<br>const EthSwt_PortMirrorCfgType* PortMirrorConfigurationPtr<br>) |   |
| <b>Service ID [hex]</b>   | 0x36  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | MirroredSwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver, where the Ethernet switch port is located, that has to be mirrored  |
|                           | PortMirrorConfigurationPtr  | Pointer of the port configuration, which shall be stored in a shadow buffer in the Ethernet switch driver   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: the port mirror configuration for the indexed Ethernet switch port was written.<br>E_NOT_OK: the port mirror configuration for the indexed Ethernet switch port was not written. (i.e. indexed ethernet switch is not available)<br>ETHSWT_PORT_MIRRORING_CONFIGURATION_NOT_SUPPORTED: port mirroring configuration is not supported by Ethernet switch driver or by the Ethernet switch hardware |





|                      |   |
|----------------------|---|
| <b>Description</b>   | Store the given port mirror configuration in a shadow buffer in the Ethernet switch driver for the given <code>MirroredSwitchIdx</code> . |
| <b>Available via</b> | <code>EthSwT.h</code>   |

]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwT\_00309]** [The function `EthSwT_WritePortMirrorConfiguration` shall store the port mirror configuration of the given `MirroredSwitchIdx` in a shadow buffer. The `MirroredSwitchIdx` shall be used to identify the port mirror configuration within the Ethernet switch driver.]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwT\_00312]** [The function `EthSwT_WritePortMirrorConfiguration` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwT_WritePortMirrorConfigurationApi`.]([SRS\\_BSW\\_00171](#))

**[SWS\_EthSwT\_00424]** [The function shall return with `ETH-SWT_PORT_MIRRORING_CONFIGURATION_NOT_SUPPORTED`, if the port mirroring configuration is not supported by the Ethernet switch driver or by the Ethernet switch hardware, e.g.:

- the configured mirrored traffic direction (see [[SWS\\_EthSwT\\_91017](#)] "TrafficDirectionIngressBitMask" and "TrafficDirectionEgressBitMask") for ingress and egress traffic of the same port is not supported
- mirrored ports and capture ports, respectively, are not available within the Ethernet switch driver

]([SRS\\_Eth\\_00123](#))

### 8.3.41 EthSwT\_ReadPortMirrorConfiguration

**[SWS\_EthSwT\_91019]** [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | <code>EthSwT_ReadPortMirrorConfiguration</code>  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_ReadPortMirrorConfiguration (     uint8 MirroredSwitchIdx,     EthSwT_PortMirrorCfgType* PortMirrorConfigurationPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x37   |  |
| <b>Sync/Async</b>         | Asynchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | <code>MirroredSwitchIdx</code>   | Index of the Ethernet switch within the context of the Ethernet Switch Driver, where the Ethernet switch ports are located, that have to be mirrored |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | <code>PortMirrorConfigurationPtr</code>  | Pointer to the memory where the port configuration shall be stored.  |





|                      |  |   |
|----------------------|--|---|
| <b>Return value</b>  | Std_ReturnType   | E_OK: the port mirror configuration for the indexed Ethernet switch port was read successfully.<br>E_NOT_OK: the port mirror configuration for the indexed Ethernet switch was not read successfully. (i.e. indexed Ethernet switch is not available) |
| <b>Description</b>   | Obtain the port mirror configuration of the given Ethernet switch. |   |
| <b>Available via</b> | EthSwT.h   |   |

]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwT\_00313]** [The function [EthSwT\\_ReadPortMirrorConfiguration](#) shall return the port mirror configuration identified by the given `MirroredSwitchIdx`. If no port mirror configuration is found for the `MirroredSwitchIdx`, the function shall return `E_NOT_OK`.]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwT\_00317]** [The function [EthSwT\\_ReadPortMirrorConfiguration](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwTReadPortMirrorConfigurationApi](#).]([SRS\\_BSW\\_00171](#))

### 8.3.42 EthSwT\_DeletePortMirrorConfiguration

**[SWS\_EthSwT\_91034]** [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwT_DeletePortMirrorConfiguration   |  |
| <b>Syntax</b>             | Std_ReturnType EthSwT_DeletePortMirrorConfiguration (<br>uint8 MirroredSwitchIdx<br>)  |  |
| <b>Service ID [hex]</b>   | 0x4a   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Reentrant for different <code>MirroredSwitchIdx</code> . Non reentrant for the same <code>SwitchIdx</code> .   |  |
| <b>Parameters (in)</b>    | MirroredSwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver.  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Port mirror configuration was deleted successfully<br>E_NOT_OK: Port mirror configuration was not deleted successfully. (e.g. the port mirroring is enabled) |
| <b>Description</b>        | Delete the stored port mirror configuration of the given <code>MirroredSwitchIdx</code> . If no port mirror configuration was found for the given <code>MirroredSwitchIdx</code> , the return value shall be <code>E_OK</code> . |  |
| <b>Available via</b>      | EthSwT.h   |  |

](`()`)

**[SWS\_EthSwT\_00425]** [The function [EthSwT\\_DeletePortMirrorConfiguration](#) shall mark the stored port mirror configuration in the shadow buffer of the given `MirroredSwitchIdx` as "to be deleted".]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwT\_00426]** [If a port mirroring for the given `MirroredSwitchIdx` is enabled, the request to delete the configuration shall be rejected by returning `E_NOT_OK`. Only those port configurations are allowed to be deleted, where the port mirroring of the given `MirroredSwitchIdx` is disabled.]([SRS\\_Eth\\_00123](#))

[SWS\_EthSwt\_00427] [The function [EthSwt\\_DeletePortMirrorConfiguration](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwtDeletePortMirrorConfigurationApi](#).] ([SRS\\_BSW\\_00171](#))

### 8.3.43 EthSwt\_GetPortMirrorState

[SWS\_EthSwt\_91021] [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_GetPortMirrorState  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_GetPortMirrorState (     uint8 SwitchIdx,     uint8 PortIdx,     EthSwt_PortMirrorStateType* PortMirrorStatePtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x38   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Non Reentrant  |   |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver  |
|                           | PortIdx  | Index of the port at the addressed switch   |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | PortMirrorStatePtr   | Pointer to the memory where the port mirroring state (either PORT_MIRRORING_ENABLED or PORT_MIRRORING_DISABLED) of the given Ethernet switch port shall be stored.  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: the port mirroring state for the indexed Ethernet switch port returned successfully.<br>E_NOT_OK: the port mirror configuration for the indexed Ethernet switch returned not successfully. (i.e. indexed ethernet switch port is not available) |
| <b>Description</b>        | Obtain the current status of the port mirroring for the indexed Ethernet switch port   |   |
| <b>Available via</b>      | EthSwt.h   |   |

] ([SRS\\_Eth\\_00123](#))

[SWS\_EthSwt\_00318] [The function [EthSwt\\_GetPortMirrorState](#) shall return the port mirroring state of the indexed ethernet switch port.] ([SRS\\_Eth\\_00123](#))

[SWS\_EthSwt\_00322] [The function [EthSwt\\_GetPortMirrorState](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwtGetPortMirrorStateApi](#).] ([SRS\\_BSW\\_00171](#))

### 8.3.44 EthSwt\_SetPortMirrorState

[SWS\_EthSwt\_91022] [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | EthSwt_SetPortMirrorState   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_SetPortMirrorState (     uint8 MirroredSwitchIdx,     EthSwt_PortMirrorStateType PortMirrorState )</pre> |  |
| <b>Service ID [hex]</b>   | 0x39  |  |
| <b>Sync/Async</b>         | Synchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant   |  |
| <b>Parameters (in)</b>    | MirroredSwitchIdx   | Index of the Ethernet switch within the context of the Ethernet Switch Driver, where the port mirroring configuration is located that has to be enabled and disabled, respectively.  |
|                           | PortMirrorState   | Contain the requested port mirroring state either PORT_MIRRORING_ENABLED or PORT_MIRRORING_DISABLED  |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: the requested port mirroring state for the indexed Ethernet switch port was set successfully.<br>E_NOT_OK: the requested port mirroring state for the indexed Ethernet switch was not set successfully. (i.e. indexed Ethernet switch is not available, no port mirror configuration is available) |
| <b>Description</b>        | Request to set the given port mirroring state of the port mirror configuration for the given Ethernet switch.                       |  |
| <b>Available via</b>      | EthSwt.h  |  |

](SRS\_Eth\_00123)

[SWS\_EthSwt\_00323] [The function `EthSwt_SetPortMirrorState` shall request the given port mirroring state for the port mirroring configuration of the indexed Ethernet switch, and store the requested port mirror state in a shadow buffer.](SRS\_Eth\_00123)

[SWS\_EthSwt\_00327] [The function `EthSwt_SetPortMirrorState` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtSetPortMirrorStateApi`.](SRS\_BSW\_00171)

### 8.3.45 EthSwt\_SetPortTestMode

[SWS\_EthSwt\_91029] [

|                         |   |  |
|-------------------------|---|--|
| <b>Service Name</b>     | EthSwt_SetPortTestMode  |  |
| <b>Syntax</b>           | <pre>Std_ReturnType EthSwt_SetPortTestMode (     uint8 SwitchIdx,     uint8 PortIdx,     EthTrcv_PhyTestModeType Mode )</pre> |  |
| <b>Service ID [hex]</b> | 0x3a  |  |
| <b>Sync/Async</b>       | Synchronous   |  |
| <b>Reentrancy</b>       | Non Reentrant   |  |



△

|                           |  |  |
|---------------------------|--|--|
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver   |
|                           | PortIdx  | Index of the port at the addressed switch  |
|                           | Mode   | Test mode to be activated  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: the port test mode for the indexed Ethernet switch port was set successfully.<br>E_NOT_OK: the port test mode for the indexed Ethernet switch was not set successfully. (i.e. indexed Ethernet switch port is not available) |
| <b>Description</b>        | Activates a given test mode of the indexed Ethernet switch port. |  |
| <b>Available via</b>      | EthSwt.h   |  |

](SRS\_Eth\_00123)

**[SWS\_EthSwt\_00328]** [The function `EthSwt_SetPortTestMode` shall forward the call with the given test mode by calling the function `EthTrcv_SetPhyTestMode` of the referenced Ethernet Transceiver Driver.] (SRS\_Eth\_00123)

**[SWS\_EthSwt\_00332]** [The function `EthSwt_SetPortTestMode` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtSetPortTestModeApi`.] (SRS\_BSW\_00171)

### 8.3.46 EthSwt\_SetPortLoopbackMode

**[SWS\_EthSwt\_91023]** [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_SetPortLoopbackMode  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_SetPortLoopbackMode (     uint8 SwitchIdx,     uint8 PortIdx,     EthTrcv_PhyLoopbackModeType Mode )</pre> |   |
| <b>Service ID [hex]</b>   | 0x3b  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver  |
|                           | PortIdx   | Index of the port at the addressed switch   |
|                           | Mode  | Loop-back mode to be activated  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: the port mirroring loop-back mode for the indexed Ethernet switch port was activated successfully.<br>E_NOT_OK: the port mirroring loop-back mode for the indexed Ethernet switch port was not activated successfully. (i.e. indexed Ethernet switch port is not available) |
| <b>Description</b>        | Activates a given test loop-back mode of the indexed Ethernet switch port.  |   |
| <b>Available via</b>      | EthSwt.h  |   |

](SRS\_Eth\_00123)

**[SWS\_EthSwt\_00334]** [The function `EthSwt_SetPortLoopbackMode` shall forward the call with the given loop-back mode by calling the function `EthTrcv_SetPhyLoopbackMode` of the referenced Ethernet Transceiver Driver.] ([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00338]** [The function `EthSwt_SetPortLoopbackMode` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtSetPortLoopbackModeApi`.] ([SRS\\_BSW\\_00171](#))

### 8.3.47 EthSwt\_SetPortTxMode

**[SWS\_EthSwt\_91024]** [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_SetPortTxMode  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_SetPortTxMode (     uint8 SwitchIdx,     uint8 PortIdx,     EthTrcv_PhyTxModeType Mode )</pre> |   |
| <b>Service ID [hex]</b>   | 0x3c  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver  |
|                           | PortIdx   | Index of the port at the addressed switch   |
|                           | Mode  | Transmission mode to be activated   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: the port Tx mode for the indexed Ethernet switch port was activated successfully.<br>E_NOT_OK: the port Tx mode for the indexed Ethernet switch port was not activated successfully. (i.e. indexed Ethernet switch port is not available) |
| <b>Description</b>        | Activates a given transmission mode of the indexed Ethernet switch port.  |   |
| <b>Available via</b>      | EthSwt.h  |   |

] ([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00340]** [The function `EthSwt_SetPortTxMode` shall forward the call with the given transmission mode by calling the function `EthTrcv_SetPhyTxMode` of the referenced Ethernet Transceiver Driver.] ([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00344]** [The function `EthSwt_SetPortTxMode` shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtSetPortTxModeApi`.] ([SRS\\_BSW\\_00171](#))

### 8.3.48 EthSwt\_RunPortCableDiagnostic

[SWS\_EthSwt\_91011] [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | EthSwt_RunPortCableDiagnostic   |  |
| <b>Syntax</b>             | Std_ReturnType EthSwt_RunPortCableDiagnostic (<br>uint8 SwitchIdxIdx,<br>uint8 PortIdx<br>)   |  |
| <b>Service ID [hex]</b>   | 0x45  |  |
| <b>Sync/Async</b>         | Asynchronous  |  |
| <b>Reentrancy</b>         | Reentrant for different SwitchIdx and PortIdx. Non reentrant for the same SwitchIdx and PortIdx.  |  |
| <b>Parameters (in)</b>    | SwitchIdxIdx  | Index of the switch within the context of the Ethernet Switch Driver.  |
|                           | PortIdx   | Index of the port at the addressed switch.   |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: The trigger to run the cable diagnostic has been accepted<br>E_NOT_OK: The trigger to run the cable diagnostic has not been accepted |
| <b>Description</b>        | Trigger the cable diagnostics of the given Ethernet Switch port (PortIdx) by calling EthTrcv_RunCableDiagnostic of the referenced Ethernet transceiver. |  |
| <b>Available via</b>      | EthSwt.h  |  |

]()

[SWS\_EthSwt\_00429] [The function `EthSwt_RunPortCableDiagnostic` shall forward the call by calling `EthTrcv_RunCableDiagnostic` of the referenced Ethernet Transceiver Driver.]()

### 8.3.49 EthSwt\_GetPortCableDiagnosticsResult

[SWS\_EthSwt\_91025] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_GetPortCableDiagnosticsResult   |  |
| <b>Syntax</b>             | Std_ReturnType EthSwt_GetPortCableDiagnosticsResult (<br>uint8 SwitchIdx,<br>uint8 PortIdx,<br>EthTrcv_CableDiagResultType* ResultPtr<br>) |  |
| <b>Service ID [hex]</b>   | 0x3f   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver       |
|                           | PortIdx  | Index of the port at the addressed switch                                  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | ResultPtr  | Pointer to the location where the cable diagnostics result shall be stored |





△

|                      |   |   |
|----------------------|---|---|
| <b>Return value</b>  | Std_ReturnType  | E_OK: the port cable diagnostic result for the indexed Ethernet switch port was obtained successfully.<br>E_NOT_OK: the port cable diagnostic result for the indexed Ethernet switch port was not obtained successfully. (i.e. indexed Ethernet switch port is not available) |
| <b>Description</b>   | Retrieves the cable diagnostics result of the indexed Ethernet switch port respectively the referenced Ethernet Transceiver Driver. |   |
| <b>Available via</b> | EthSwt.h  |   |

]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00346]** [The function [EthSwt\\_GetPortCableDiagnosticsResult](#) shall obtain the cable diagnostics result by calling the function `EthTrcv_GetCableDiagnosticsResult` of the referenced Ethernet Transceiver Driver.]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00350]** [The function [EthSwt\\_GetPortCableDiagnosticsResult](#) shall be pre compile time configurable On/Off by the configuration parameter: `EthSwtGetPortCableDiagnosticsResultApi`.]([SRS\\_BSW\\_00171](#))

### 8.3.50 EthSwt\_GetCfgDataRow

**[SWS\_EthSwt\_91030]** [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_GetCfgDataRow   |  |
| <b>Syntax</b>             | Std_ReturnType EthSwt_GetCfgDataRow (<br>uint8 SwitchIdx,<br>uint32 Offset,<br>uint16 Length,<br>uint8* BufferPtr<br>) |  |
| <b>Service ID [hex]</b>   | 0x41   |  |
| <b>Sync/Async</b>         | Asynchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the Ethernet switch within the context of the Ethernet Switch Driver  |
|                           | Offset   | Offset of the Ethernet switch memory from where the reading starts   |
|                           | Length   | Length of data in bytes that shall be copied   |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | BufferPtr  | Pointer to the location where the data shall be copied   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: the data read was triggered successfully<br>E_NOT_OK: the data read was not triggered successfully (i.e. indexed Ethernet switch is not available) |
| <b>Description</b>        | Retrieves the data in memory of the indexed Ethernet switch in variable length   |  |
| <b>Available via</b>      | EthSwt.h   |  |

]([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00403]** [The function [EthSwt\\_GetCfgDataRow](#) shall only be available if parameter `EthSwtGetCfgRaw` is set to TRUE.]([SRS\\_BSW\\_00171](#))

**[SWS\_EthSwt\_00404]** [When calling the function `EthSwt_GetCfgDataRaw`, the function shall check the access to the Ethernet switch driver. If the check fails, the function shall raise the extended production error `ETHSWT_E_ACCESS` and return `E_NOT_OK`, otherwise pass the extended production error `ETHSWT_E_ACCESS` and return `E_OK`.]()

### 8.3.51 EthSwt\_GetCfgDataInfo

**[SWS\_EthSwt\_91031]** [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_GetCfgDataInfo  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_GetCfgDataInfo (     uint8 SwitchIdx,     uint32* DataSizePtr,     uint32* DataAddressPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x42   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant  |   |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the Ethernet switch within the context of the Ethernet Switch Driver   |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | DataSizePtr  | Pointer to the location where the total size of the configuration data shall be copied  |
|                           | DataAddressPtr   | Pointer to the location where the start address of the configuration registers shall be copied  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: the data was obtained successfully<br>E_NOT_OK: the data was not obtained successfully. (i.e. indexed Ethernet switch is not available) |
| <b>Description</b>        | Retrieves the total size of data and the memory start address of the indexed Ethernet Switch.                                |   |
| <b>Available via</b>      | EthSwt.h   |   |

] ([SRS\\_Eth\\_00123](#))

**[SWS\_EthSwt\_00405]** [The function `EthSwt_GetCfgDataInfo` shall only be available if parameter `EthSwtGetCfgRaw` is set to `TRUE`.] ([SRS\\_BSW\\_00171](#))

**[SWS\_EthSwt\_00406]** [When calling the function `EthSwt_GetCfgDataInfo`, the function shall check the access to the Ethernet switch driver. If the check fails, the function shall raise the extended production error `ETHSWT_E_ACCESS` and return `E_NOT_OK`, otherwise pass the extended production error `ETHSWT_E_ACCESS` and return `E_OK`.]()

### 8.3.52 EthSwt\_PortLinkStateRequest

[SWS\_EthSwt\_91123] [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwt_PortLinkStateRequest   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_PortLinkStateRequest (     uint8 SwitchIdx,     uint8 PortIdx,     EthTrcv_LinkStateType PortLinkState )</pre>                                   |   |
| <b>Service ID [hex]</b>   | 0x49  |   |
| <b>Sync/Async</b>         | Asynchronous  |   |
| <b>Reentrancy</b>         | Reentrant for different SwitchIdx and PortIdx. Non reentrant for the same SwitchIdx and PortIdx.  |   |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the switch within the context of the Ethernet Switch Driver.   |
|                           | PortIdx   | Index of the port at the addressed switch.  |
|                           | PortLinkState   | The Ethernet link state of a physical Ethernet connection.  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request has been accepted and if the function call is in state ETHSWT_STATE_PORTINIT_COMPLETED or ETHSWT_STATE_ACTIVE<br>E_NOT_OK: Request has not been accepted. (e.g. the indexed Ethernet switch port does not reference an EthTrcv) |
| <b>Description</b>        | Request a link state by calling EthTrcv_TransceiverLinkStateRequest with the TrcvIdx of the Ethernet transceiver which is referenced by the Ethernet Switch port (PortIdx). |   |
| <b>Available via</b>      | EthSwt.h  |   |

]()

[SWS\_EthSwt\_00415] [The function `EthSwt_PortLinkStateRequest` shall request the given link state for the indexed Ethernet switch port of the switch by calling the `EthTrcv_TransceiverLinkStateRequest` with the given `EthTrcv_LinkStateType`. If the `EthSwtPort` does not reference an `EthTrcv`, then the function shall return `E_NOT_OK`.]()

### 8.3.53 EthSwt\_GetMaxFIFOBufferFillLevel

[SWS\_EthSwt\_91050] [

|                         |  |  |
|-------------------------|--|--|
| <b>Service Name</b>     | EthSwt_GetMaxFIFOBufferFillLevel   |  |
| <b>Syntax</b>           | <pre>Std_ReturnType EthSwt_GetMaxFIFOBufferFillLevel (     uint8 SwitchIdx,     uint8 SwitchPortIdx,     uint8 SwitchPortEgressFifoIdx,     uint32* SwitchPortEgressFifoBufferLevelPtr )</pre> |  |
| <b>Service ID [hex]</b> | 0x48   |  |
| <b>Sync/Async</b>       | Synchronous  |  |





|                           |   |  |
|---------------------------|---|--|
| <b>Reentrancy</b>         | Reentrant for different SwitchIdx and PortIdx. Non reentrant for the same SwitchIdx and PortIdx.  |  |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the Ethernet switch within the context of the Ethernet Switch Driver.   |
|                           | SwitchPortIdx   | Index of the Ethernet switch egress port at the addressed Ethernet switch.   |
|                           | SwitchPortEgressFifIdx  | Index of the egress FIFO of the addressed Ethernet switch port   |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | SwitchPortEgressFifoBufferLevelPtr  | Pointer to a memory location, where the maximum amount of allocated FIFO buffer (in bytes) since the last read out shall be stored   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: The FIFO buffer fill level was written to the address pointed to by SwitchPortEgressFifoBufferLevelPtr.<br>E_NOT_OK: The maximal FIFO buffer level could not be obtained |
| <b>Description</b>        | The function retrieves the maximum amount of allocated FIFO buffer of the indexed Ethernet switch egress port. If the Ethernet switch hardware does not support Ethernet switch port based maximal FIFO buffer level, the content of SwitchPortEgressFifoBufferLevelPtr shall be set to 0xFFFFFFFF. This API may be called by e.g. a CDD. |  |
| <b>Available via</b>      | EthSwt.h  |  |

]()

**[SWS\_EthSwt\_00430]** [The function [EthSwt\\_GetMaxFIFOBufferFillLevel](#) shall read out the maximum amount of allocated FIFO buffer since the last read out.] ([SRS\\_Eth\\_00119](#))

**[SWS\_EthSwt\_00431]** [When the maximum amount of allocated FIFO buffer is read out, the value shall be reset to 0x00000000 explicitly, if it is not done by the hardware.] ([SRS\\_Eth\\_00119](#))

**[SWS\_EthSwt\_00432]** [The function [EthSwt\\_GetMaxFIFOBufferFillLevel](#) shall be pre compile time configurable On/Off by the configuration parameter: [EthSwtGetMaxFIFOBufferFillLevelApi](#).] ([SRS\\_BSW\\_00171](#))

### 8.3.54 EthSwt\_GetRxMgmtObject

**[SWS\_EthSwt\_91038]** [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_GetRxMgmtObject   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_GetRxMgmtObject (     uint8 CtrlIdx,     Eth_DataType* DataPtr,     EthSwt_MgmtObjectType** MgmtObjectPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x47   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant  |   |
| <b>Parameters (in)</b>    | CtrlIdx  | Index of an Ethernet Interface controller |
|                           | DataPtr  | Ethernet data pointer                     |
| <b>Parameters (inout)</b> | None   |   |





|                         |   |  |
|-------------------------|---|--|
| <b>Parameters (out)</b> | MgmtObjectPtr   | Pointer to the management object.                                  |
| <b>Return value</b>     | Std_ReturnType  | E_OK: success<br>E_NOT_OK: management object could not be obtained |
| <b>Description</b>      | Obtains the MgmtObject of the (in this context) unique DataPtr. |  |
| <b>Available via</b>    | EthSwt.h  |  |

]()

### 8.3.55 EthSwt\_GetTxMgmtObject

[SWS\_EthSwt\_91039] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | EthSwt_GetTxMgmtObject   |  |
| <b>Syntax</b>             | Std_ReturnType EthSwt_GetTxMgmtObject (<br>uint8 CtrlIdx,<br>Eth_BufIdxType BufIdx,<br>EthSwt_MgmtObjectType* MgmtObjectPtr<br>) |  |
| <b>Service ID [hex]</b>   | 0x44   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Reentrant  |  |
| <b>Parameters (in)</b>    | CtrlIdx  | Index of an Ethernet Interface controller                          |
|                           | BufIdx   | Ethernet Rx Buffer index   |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | MgmtObjectPtr  | Pointer to the management object.                                  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: success<br>E_NOT_OK: management object could not be obtained |
| <b>Description</b>        | Obtains the MgmtObject of the (in this context) unique BufIdx.   |  |
| <b>Available via</b>      | EthSwt.h   |  |

]()

### 8.3.56 EthSwt\_MacSecUpdateSecY

[SWS\_EthSwt\_91124]{DRAFT} [

|                         |   |  |
|-------------------------|---|--|
| <b>Service Name</b>     | EthSwt_MacSecUpdateSecY (DRAFT)   |  |
| <b>Syntax</b>           | Std_ReturnType EthSwt_MacSecUpdateSecY (<br>const EthSwt_MgmtInfoType* MgmtInfoPtr,<br>const Mka_MacSecConfigType* MACsecCfgPtr,<br>uint64 TxSci<br>) |  |
| <b>Service ID [hex]</b> | 0x4d  |  |
| <b>Sync/Async</b>       | Asynchronous  |  |
| <b>Reentrancy</b>       | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr   |  |





|                           |  |   |
|---------------------------|--|---|
| <b>Parameters (in)</b>    | MgmtInfoPtr  | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwt. |
|                           | MACsecCfgPtr   | Pointer to the structure to configure a MACsec Entity (SecY)  |
|                           | TxSci  | Secure Channel Identifier for the MACsec's Transmission Secure channel  |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |
| <b>Description</b>        | Requests the Ethernet Switch to update the SecY/PAC of the PHY with the provided parameters. A Transmission Secure Channel with the provided SCI shall be configured during the first call. A pointer to a MACsec Basic Parameters Configuration file shall be provided to create the Secure Channel.<br><b>Tags:</b> atp.Status=DRAFT |   |
| <b>Available via</b>      | EthSwt.h   |   |

]()

### 8.3.57 EthSwt\_MacSecUpdateSecYNotification

[SWS\_EthSwt\_91135]{DRAFT} [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_MacSecUpdateSecYNotification (DRAFT)  |   |
| <b>Syntax</b>             | <pre>void EthSwt_MacSecUpdateSecYNotification (     const EthSwt_MgmtInfoType* MgmtInfoPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x58   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr                        |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr  | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwt. |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | None   |   |
| <b>Description</b>        | Callback to notify that EthSwt_MacSecUpdateSecY finished.<br><b>Tags:</b> atp.Status=DRAFT         |   |
| <b>Available via</b>      | EthSwt.h   |   |

]()

### 8.3.58 EthSwT\_MacSecInitRxSc

[SWS\_EthSwT\_91125]{DRAFT} [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_MacSecInitRxSc (DRAFT)   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecInitRxSc (     const EthSwT_MgmtInfoType* MgmtInfoPtr,     uint64 Sci )</pre>  |   |
| <b>Service ID [hex]</b>   | 0x4e  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr   |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | Sci   | Secure Channel Identifier for the MACsec's Reception Secure channel   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |
| <b>Description</b>        | Requests the Ethernet Switch Driver to configure a Reception Secure Channel for the given Secure Channel Identifier.<br><b>Tags:</b> atp.Status=DRAFT |   |
| <b>Available via</b>      | EthSwT.h  |   |

]()

### 8.3.59 EthSwT\_MacSecResetRxSc

[SWS\_EthSwT\_91126]{DRAFT} [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_MacSecResetRxSc (DRAFT)  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecResetRxSc (     const EthSwT_MgmtInfoType* MgmtInfoPtr,     uint64 Sci )</pre> |   |
| <b>Service ID [hex]</b>   | 0x4f  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr                                     |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | Sci   | Secure Channel Identifier for the MACsec's Reception Secure channel   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |





|                      |   |
|----------------------|---|
| <b>Description</b>   | Requests the Ethernet Switch Driver to reset to default the MACsec values of the Reception Secure Channel for the given Secure Channel Identifier.<br><b>Tags:</b> atp.Status=DRAFT |
| <b>Available via</b> | EthSwT.h  |

]()

### 8.3.60 EthSwT\_MacSecAddTxSa

[SWS\_EthSwT\_91127]{DRAFT} [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_MacSecAddTxSa (DRAFT)  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecAddTxSa (     EthSwT_MgmtInfoType* MgmtInfoPtr,     uint8 An,     uint64 NextPn,     uint32 Ssci,     const Mka_SakKeyPtrType* KeysPtr,     boolean Active )</pre>                 |   |
| <b>Service ID [hex]</b>   | 0x50  |   |
| <b>Sync/Async</b>         | Asynchronous  |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr   |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | An  | Association Number to use in the MACsec's transmission secure association   |
|                           | NextPn  | Next accepted Packet Number in the MACsec's transmission secure association   |
|                           | Ssci  | Short Secure Channel Identifier used in the MACsec's transmission secure association  |
|                           | KeysPtr   | Pointer to the SAKs Key (and needed Key information) to use in the MACsec's transmission secure association   |
|                           | Active  | Boolean to enable/disable the MACsec's transmission secure association  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |
| <b>Description</b>        | Requests the Ethernet Switch Driver to create a Transmission Secure Association in the Transceiver. The Short Secure Channel Identifier is included to support XPN configurations.<br><b>Tags:</b> atp.Status=DRAFT |   |
| <b>Available via</b>      | EthSwT.h  |   |

]()



### 8.3.61 EthSwT\_MacSecAddTxSaNotification

[SWS\_EthSwT\_91136]{DRAFT} [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_MacSecAddTxSaNotification (DRAFT)  |   |
| <b>Syntax</b>             | <pre>void EthSwT_MacSecAddTxSaNotification (     const EthSwT_MgmtInfoType* MgmtInfoPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x59  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr                     |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | None  |   |
| <b>Description</b>        | Callback to notify that EthSwT_MacSecAddTxSa finished.<br><b>Tags:</b> atp.Status=DRAFT         |   |
| <b>Available via</b>      | EthSwT.h  |   |

]()

### 8.3.62 EthSwT\_MacSecUpdateTxSa

[SWS\_EthSwT\_91128]{DRAFT} [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_MacSecUpdateTxSa (DRAFT)   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecUpdateTxSa (     const EthSwT_MgmtInfoType* MgmtInfoPtr,     uint8 An,     uint64 NextPn,     boolean Active )</pre> |   |
| <b>Service ID [hex]</b>   | 0x51  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr   |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | An  | Association Number to use in the MACsec's transmission secure association   |
|                           | NextPn  | Next accepted Packet Number in the MACsec's transmission secure association   |
|                           | Active  | Boolean to enable/disable the MACsec's transmission secure association  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |



△

|                      |  |
|----------------------|--|
| <b>Description</b>   | Requests the Ethernet Switch Driver to update the Transmission Secure Association with the given Packet Number. The Active parameter is included to change the specified AN status.<br><b>Tags:</b> atp.Status=DRAFT |
| <b>Available via</b> | EthSwT.h   |

]()

### 8.3.63 EthSwT\_MacSecDeleteTxSa

[SWS\_EthSwT\_91129]{DRAFT} [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwT_MacSecDeleteTxSa (DRAFT)  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecDeleteTxSa (     const EthSwT_MgmtInfoType* MgmtInfoPtr,     uint8 An )</pre>   |   |
| <b>Service ID [hex]</b>   | 0x52   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr  |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr  | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | An   | Association Number to use in the MACsec's transmission secure association   |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |
| <b>Description</b>        | Request the Ethernet Switch Driver to remove the Transmission Secure Association identified by the provided Association Number.<br><b>Tags:</b> atp.Status=DRAFT |   |
| <b>Available via</b>      | EthSwT.h   |   |

]()

### 8.3.64 EthSwT\_MacSecAddRxSa

[SWS\_EthSwT\_91130]{DRAFT} [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_MacSecAddRxSa (DRAFT)  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecAddRxSa (     const EthSwT_MgmtInfoType* MgmtInfoPtr,     uint8 An,     uint64 LowestPn,     uint32 Ssci,     const Mka_SakKeyPtrType* KeysPtr,     boolean Active )</pre>     |   |
| <b>Service ID [hex]</b>   | 0x53  |   |
| <b>Sync/Async</b>         | Asynchronous  |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr   |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | An  | Association Number to use in the MACsec's reception secure association  |
|                           | LowestPn  | Lowest accepted Packet Number in the MACsec's reception secure association  |
|                           | Ssci  | Short Secure Channel Identifier used in the MACsec's reception secure association   |
|                           | KeysPtr   | Pointer to the SAKs Key (and needed Key information) to use in the MACsec's reception secure association  |
|                           | Active  | Boolean to enable/disable the MACsec's reception secure association   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |
| <b>Description</b>        | Request the Ethernet Switch Driver to create a Reception Secure Association in the Transceiver. The Short Secure Channel Identifier is included to support XPN configurations.<br><b>Tags:</b> atp.Status=DRAFT |   |
| <b>Available via</b>      | EthSwT.h  |   |

]()

### 8.3.65 EthSwT\_MacSecAddRxSaNotification

[SWS\_EthSwT\_91137]{DRAFT} [

|                         |   |  |
|-------------------------|---|--|
| <b>Service Name</b>     | EthSwT_MacSecAddRxSaNotification (DRAFT)  |  |
| <b>Syntax</b>           | <pre>void EthSwT_MacSecAddRxSaNotification (     const EthSwT_MgmtInfoType* MgmtInfoPtr )</pre> |  |
| <b>Service ID [hex]</b> | 0x5a  |  |
| <b>Sync/Async</b>       | Synchronous   |  |
| <b>Reentrancy</b>       | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr                     |  |





|                           |   |   |
|---------------------------|---|---|
| <b>Parameters (in)</b>    | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | None  |   |
| <b>Description</b>        | Callback to notify that EthSwT_MacSecAddRxSa finished.<br><b>Tags:</b> atp.Status=DRAFT |   |
| <b>Available via</b>      | EthSwT.h  |   |

]()

### 8.3.66 EthSwT\_MacSecUpdateRxSa

[SWS\_EthSwT\_91131]{DRAFT} [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwT_MacSecUpdateRxSa (DRAFT)  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecUpdateRxSa (     const EthSwT_MgmtInfoType* MgmtInfoPtr,     uint8 An,     uint64 LowestPn,     boolean Active )</pre>  |   |
| <b>Service ID [hex]</b>   | 0x54   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr  |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr  | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | An   | Association Number to use in the MACsec's reception secure association  |
|                           | LowestPn   | Lowest accepted Packet Number in the MACsec's reception secure association  |
|                           | Active   | Boolean to enable/disable the MACsec's reception secure association   |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |
| <b>Description</b>        | Request the Ethernet Switch Driver to update the Reception Secure Association with the given Packet Number. The Active parameter is included to change the specified AN status.<br><b>Tags:</b> atp.Status=DRAFT |   |
| <b>Available via</b>      | EthSwT.h   |   |

]()

### 8.3.67 EthSwT\_MacSecDeleteRxSa

[SWS\_EthSwT\_91132]{DRAFT} [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_MacSecDeleteRxSa (DRAFT)   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecDeleteRxSa (     const EthSwT_MgmtInfoType* MgmtInfoPtr,     uint8 An )</pre>  |   |
| <b>Service ID [hex]</b>   | 0x55  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr   |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | An  | Association Number to use in the MACsec's reception secure association  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |
| <b>Description</b>        | Request the Ethernet Switch Driver to remove the Reception Secure Association identified by the provided Association Number.<br><b>Tags:</b> atp.Status=DRAFT |   |
| <b>Available via</b>      | EthSwT.h  |   |

]()

### 8.3.68 EthSwT\_MacSecGetTxSaNextPn

[SWS\_EthSwT\_91133]{DRAFT} [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwT_MacSecGetTxSaNextPn (DRAFT)   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecGetTxSaNextPn (     const EthSwT_MgmtInfoType* MgmtInfoPtr,     uint8 An,     uint64* NextPnPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x56   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr  |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr  | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | An   | Association Number to use in the MACsec's reception secure association  |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | NextPnPtr  | Pointer to the Next Packet Number read out from the MACsec Entity (SecY)  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |





|                      |  |
|----------------------|--|
| <b>Description</b>   | Request the Ethernet Switch Driver to return the Packet Number that is used for the next packet in the given Transmission Secure Association.<br><b>Tags:</b> atp.Status=DRAFT |
| <b>Available via</b> | EthSwt.h   |

]()

### 8.3.69 EthSwt\_MacSecGetMacSecStats

[SWS\_EthSwt\_91134]{DRAFT} [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | EthSwt_MacSecGetMacSecStats (DRAFT)  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwt_MacSecGetMacSecStats (     const EthSwt_MgmtInfoType* MgmtInfoPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x57   |   |
| <b>Sync/Async</b>         | Asynchronous   |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr                          |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr  | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwt. |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |
| <b>Description</b>        | Request the Ethernet Switch Driver to provide MACsec statistics.<br><b>Tags:</b> atp.Status=DRAFT    |   |
| <b>Available via</b>      | EthSwt.h   |   |

]()

### 8.3.70 EthSwt\_MacSecGetMacSecStatsNotification

[SWS\_EthSwt\_91138]{DRAFT} [

|                         |   |   |
|-------------------------|---|---|
| <b>Service Name</b>     | EthSwt_MacSecGetMacSecStatsNotification (DRAFT)   |   |
| <b>Syntax</b>           | <pre>void EthSwt_MacSecGetMacSecStatsNotification (     const EthSwt_MgmtInfoType* MgmtInfoPtr,     const Mka_Stats_SecYType* MacSecStats )</pre> |   |
| <b>Service ID [hex]</b> | 0x5b  |   |
| <b>Sync/Async</b>       | Synchronous   |   |
| <b>Reentrancy</b>       | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr   |   |
| <b>Parameters (in)</b>  | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwt. |





|                           |   |  |
|---------------------------|---|--|
|                           | MacSecStats   | Pointer to a structure including the MACsec statistics of an MKA participant |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | None  |  |
| <b>Description</b>        | Callback to notify that EthSwT_MacSecGetMacSecStats finished and provide the requested statistics.<br><b>Tags:</b> atp.Status=DRAFT |  |
| <b>Available via</b>      | EthSwT.h  |  |

]()

### 8.3.71 EthSwT\_MacSecSetControlledPortEnabled

[SWS\_EthSwT\_91139]{DRAFT} [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | EthSwT_MacSecSetControlledPortEnabled (DRAFT)   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType EthSwT_MacSecSetControlledPortEnabled (     const EthSwT_MgmtInfoType* MgmtInfoPtr,     boolean ControlledPortEnabled )</pre> |   |
| <b>Service ID [hex]</b>   | 0x5c  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant for different MgmtInfoPtr, Non reentrant for the same MgmtInfoPtr   |   |
| <b>Parameters (in)</b>    | MgmtInfoPtr   | Pointer to the management information within the context of an Ethernet Switch Driver. SwitchIdx in context of EthIf, PortIdx in context of EthSwT. |
|                           | ControlledPortEnabled   | Boolean to activate the Controlled Port of the PAE  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: The request has been accepted E_NOT_OK: The request has not been accepted   |
| <b>Description</b>        | Requests to set the Controlled Port enabled parameter of a PAE.<br><b>Tags:</b> atp.Status=DRAFT  |   |
| <b>Available via</b>      | EthSwT.h  |   |

]()

## 8.4 Callback notifications

### 8.4.1 EthSwtPersistentConfigurationResultCallback

[SWS\_EthSwt\_00193] [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | <EthSwtPersistentConfigurationResultCallback>   |   |
| <b>Syntax</b>             | <pre>void &lt;EthSwtPersistentConfigurationResultCallback&gt; (     NvM_RequestResultType JobResult )</pre> |   |
| <b>Service ID [hex]</b>   | 0x1b  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant   |   |
| <b>Parameters (in)</b>    | JobResult   | Covers the job result of the previous processed single block job. |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | None  |   |
| <b>Description</b>        | Job end notification of EthSwt_StoreConfiguration or EthSwt_ResetConfiguration                              |   |
| <b>Available via</b>      | EthSwtExternals.h   |   |

]([SRS\\_Eth\\_00122](#), [SRS\\_Eth\\_00087](#))

[SWS\_EthSwt\_00194] [The callback function <EthSwtPersistentConfigurationResultCallback> shall be called by the [EthSwt\\_NvmSingleBlockCallback](#) to inform the caller of [EthSwt\\_StoreConfiguration](#) or [EthSwt\\_ResetConfiguration](#) about the state of the past calls.]([SRS\\_Eth\\_00122](#), [SRS\\_Eth\\_00087](#))

## 8.5 Scheduled functions

### 8.5.1 EthSwt\_MainFunction

[SWS\_EthSwt\_00114] [

|                         |   |
|-------------------------|---|
| <b>Service Name</b>     | EthSwt_MainFunction                                   |
| <b>Syntax</b>           | <pre>void EthSwt_MainFunction (     void )</pre>      |
| <b>Service ID [hex]</b> | 0x1c  |
| <b>Description</b>      | Service to support asynchronous behavior of API calls |
| <b>Available via</b>    | EthSwt_SchM.h   |

]([SRS\\_BSW\\_00433](#))

[SWS\_EthSwt\_00115] [The [EthSwt\\_MainFunction](#) support asynchronous behavior of API calls. This function is directly called by Basic Software Scheduler.]([SRS\\_BSW\\_00433](#))



## 8.5.2 EthSwT\_BackgroundTask

[SWS\_EthSwT\_91104] [

|                           |   |
|---------------------------|---|
| <b>Service Name</b>       | EthSwT_BackgroundTask   |
| <b>Syntax</b>             | <pre>void EthSwT_BackgroundTask (     void )</pre>  |
| <b>Service ID [hex]</b>   | 0x46  |
| <b>Sync/Async</b>         | Synchronous   |
| <b>Reentrancy</b>         | Non Reentrant   |
| <b>Parameters (in)</b>    | None  |
| <b>Parameters (inout)</b> | None  |
| <b>Parameters (out)</b>   | None  |
| <b>Return value</b>       | None  |
| <b>Description</b>        | The background task should be scheduled as often as possible when no other task runs. It may be used for switch and port initialization in case the EthSwT_Init function needs too much time. |
| <b>Available via</b>      | EthSwT.h  |

]()

## 8.6 Expected interfaces

In this chapter all external interfaces required from other modules are listed.

### 8.6.1 Mandatory Interfaces

This chapter defines all external interfaces which are required to fulfill the core functionality of the module.

No mandatory Interfaces defined.

### 8.6.2 Optional Interfaces

This chapter defines all external interfaces which are required to fulfill an optional functionality of the module.

[SWS\_EthSwT\_00098] [

| API Function                 | Header File | Description  |
|------------------------------|-------------|--|
| Dem_SetEventStatus           | Dem.h       | Called by SW-Cs or BSW modules to report monitor status information to the Dem. BSW modules calling Dem_SetEventStatus can safely ignore the return value. This API will be available only if ({Dem/Dem ConfigSet/DemEventParameter/DemEvent ReportingType} == STANDARD_REPORTING) |
| Det_ReportError              | Det.h       | Service to report development errors.  |
| Eth_ReadMii                  | Eth.h       | Reads a transceiver register   |
| Eth_WriteMii                 | Eth.h       | Configures a transceiver register or triggers a function offered by the receiver   |
| EthTrcv_GetBaudRate          | EthTrcv.h   | Obtains the baud rate of the indexed transceiver   |
| EthTrcv_GetDuplexMode        | EthTrcv.h   | Obtains the duplex mode of the indexed transceiver   |
| EthTrcv_GetLinkState         | EthTrcv.h   | Obtains the link state of the indexed transceiver  |
| EthTrcv_GetTransceiverMode   | EthTrcv.h   | Obtains the state of the indexed transceiver   |
| EthTrcv_SetTransceiverMode   | EthTrcv.h   | Enables / disables the indexed transceiver   |
| EthTrcv_StartAutoNegotiation | EthTrcv.h   | Restarts the negotiation of the transmission parameters used by the indexed transceiver  |
| NvM_GetErrorStatus           | NvM.h       | Service to read the block dependent error/status information.  |
| NvM_ReadBlock                | NvM.h       | Service to copy the data of the NV block to its corresponding RAM block.   |
| NvM_WriteBlock               | NvM.h       | Service to copy the data of the RAM block to its corresponding NV block.   |
| Spi_AsyncTransmit            | Spi.h       | Service to transmit data on the SPI bus.   |
| Spi_Cancel                   | Spi.h       | Service cancels the specified on-going sequence transmission.  |
| Spi_ReadIB                   | Spi.h       | Service for reading synchronously one or more data from an IB SPI Handler/Driver Channel specified by parameter.   |
| Spi_SetAsyncMode             | Spi.h       | Service to set the asynchronous mechanism mode for SPI busses handled asynchronously.  |
| Spi_SetupEB                  | Spi.h       | Service to setup the buffers and the length of data for the EB SPI Handler/Driver Channel specified.   |
| Spi_SyncTransmit             | Spi.h       | Service to transmit data on the SPI bus  |
| Spi_WriteIB                  | Spi.h       | Service for writing one or more data to an IB SPI Handler/Driver Channel specified by parameter.   |

] ([SRS\\_Eth\\_00122](#), [SRS\\_Eth\\_00118](#), [SRS\\_Eth\\_00119](#), [SRS\\_Eth\\_00120](#), [SRS\\_Eth\\_00087](#), [SRS\\_Eth\\_00125](#), [SRS\\_BSW\\_00375](#))

[SWS\_EthSwT\_00192] [The NvM APIs will only be used if the respective block is not configured for NvM\_ReadAll and NvM\_WriteAll.] ([SRS\\_Eth\\_00122](#))

### 8.6.3 Configurable interfaces

In this chapter all interfaces are listed where the target function could be configured.

The names of these kind of interfaces are not fixed because they are configurable.

### 8.6.3.1 <EthSwtLinkDownCallout>

[SWS\_EthSwt\_00117] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | <EthSwtLinkDownCallout>  |  |
| <b>Syntax</b>             | <pre>void &lt;EthSwtLinkDownCallout&gt; (     uint8 SwitchIdx,     uint8 PortIdx )</pre> |  |
| <b>Service ID [hex]</b>   | 0x19   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver |
|                           | PortIdx  | Index of the port at the addressed switch                            |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | None   |  |
| <b>Description</b>        | Is called, if a link which is configured goes down.                                      |  |
| <b>Available via</b>      | EthSwt_Externals.h   |  |

]([SRS\\_Eth\\_00119](#), [SRS\\_Eth\\_00087](#))

[SWS\_EthSwt\_00118] [The function <EthSwtLinkDownCallout> shall be called if a link, which is configured, goes down (link loss). The function provides the Switch index and the Port index, such that the port which went down can be identified.]([SRS\\_Eth\\_00119](#), [SRS\\_Eth\\_00087](#))

### 8.6.3.2 <EthSwtLinkUpCallout>

[SWS\_EthSwt\_00203] [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | <EthSwtLinkUpCallout>  |  |
| <b>Syntax</b>             | <pre>void &lt;EthSwtLinkUpCallout&gt; (     uint8 SwitchIdx,     uint8 PortIdx )</pre> |  |
| <b>Service ID [hex]</b>   | 0x1a   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | SwitchIdx  | Index of the switch within the context of the Ethernet Switch Driver |
|                           | PortIdx  | Index of the port at the addressed switch                            |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | None   |  |
| <b>Description</b>        | Is called, if a link which is configured goes up                                       |  |
| <b>Available via</b>      | EthSwt_Externals.h   |  |

]([SRS\\_Eth\\_00119](#), [SRS\\_Eth\\_00087](#))

**[SWS\_EthSwt\_00204]** [The function `<EthSwtLinkUpCallout>` shall be called if a link, which is configured, goes up. The function provides the Switch index and the Port index, such that the port which went up can be identified.] ([SRS\\_Eth\\_00119](#), [SRS\\_Eth\\_00087](#))

**Note:** If the hardware cannot signal a link up with an interrupt, the status of the link has to be determined in polling mode by checking the state of the link.

### 8.6.3.3 `<GetCfgDataRawDone>`

**[SWS\_EthSwt\_91032]** [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | <code>&lt;GetCfgDataRawDone&gt;</code>  |   |
| <b>Syntax</b>             | <pre>void &lt;GetCfgDataRawDone&gt; (     uint8 SwitchIdx )</pre>   |   |
| <b>Service ID [hex]</b>   | 0x43  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant   |   |
| <b>Parameters (in)</b>    | SwitchIdx   | Index of the Ethernet switch where the Configuration is read. |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | None  |   |
| <b>Description</b>        | The call of the function <code>EthSwt_GetCfgDataRaw()</code> triggers a asynchrony read of a certain memory section of the Ethernet switch driver. If the read is done, the configured callout function <code>&lt;GetCfgDataRawDone&gt;</code> shall be called] |   |
| <b>Available via</b>      | EthSwt_Externals.h  |   |

]([SRS\\_Eth\\_00123](#))

## 8.7 Service Interfaces

No direct access is necessary from the application layer.

## 9 Sequence diagrams

The following sequence diagram shows the interaction between the DHCP-Server in the TCP/IP-module and the Ethernet Switch Driver:

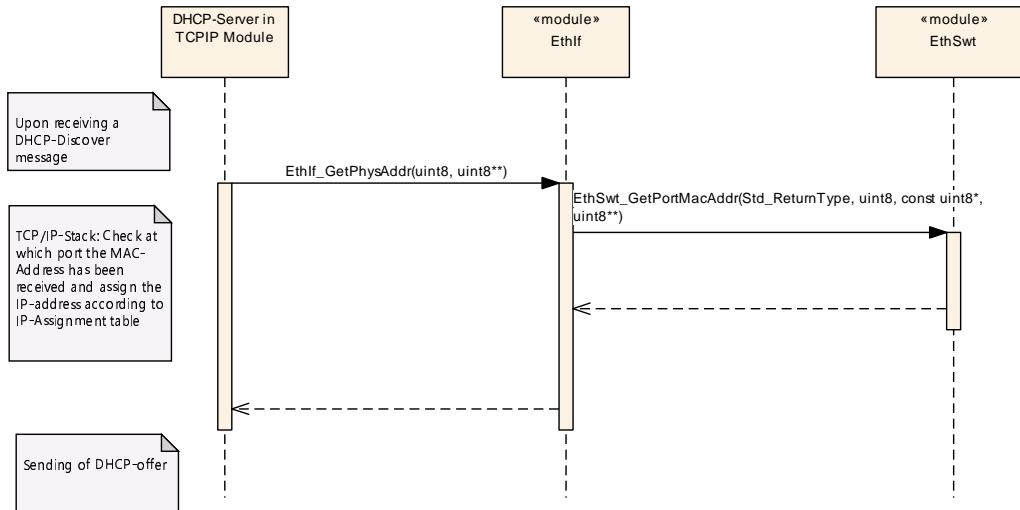


Figure 9.1

The following sequence diagram shows the interaction between the EthIf, EthSwt and the EthTrcv for API calls to the EthIf:

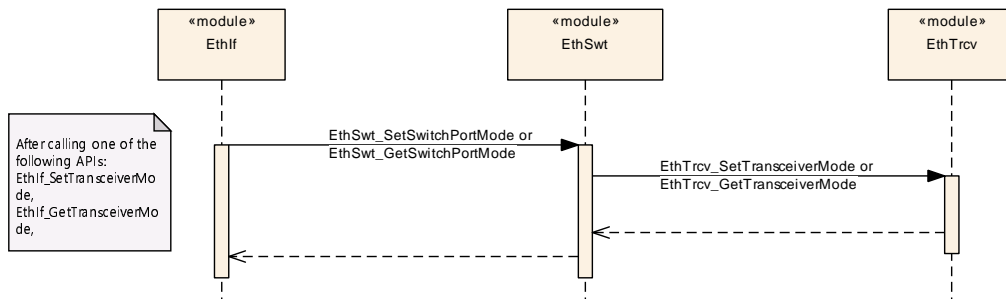


Figure 9.2

The following sequence diagram shows the interaction between the EthIf, EthSwt, and the EthTrcv for API calls which are initiated by the EthIf:



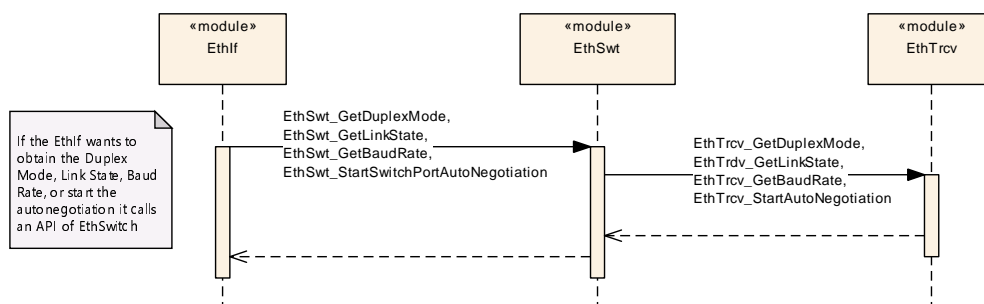


Figure 9.3

### 9.1 Switch Management support

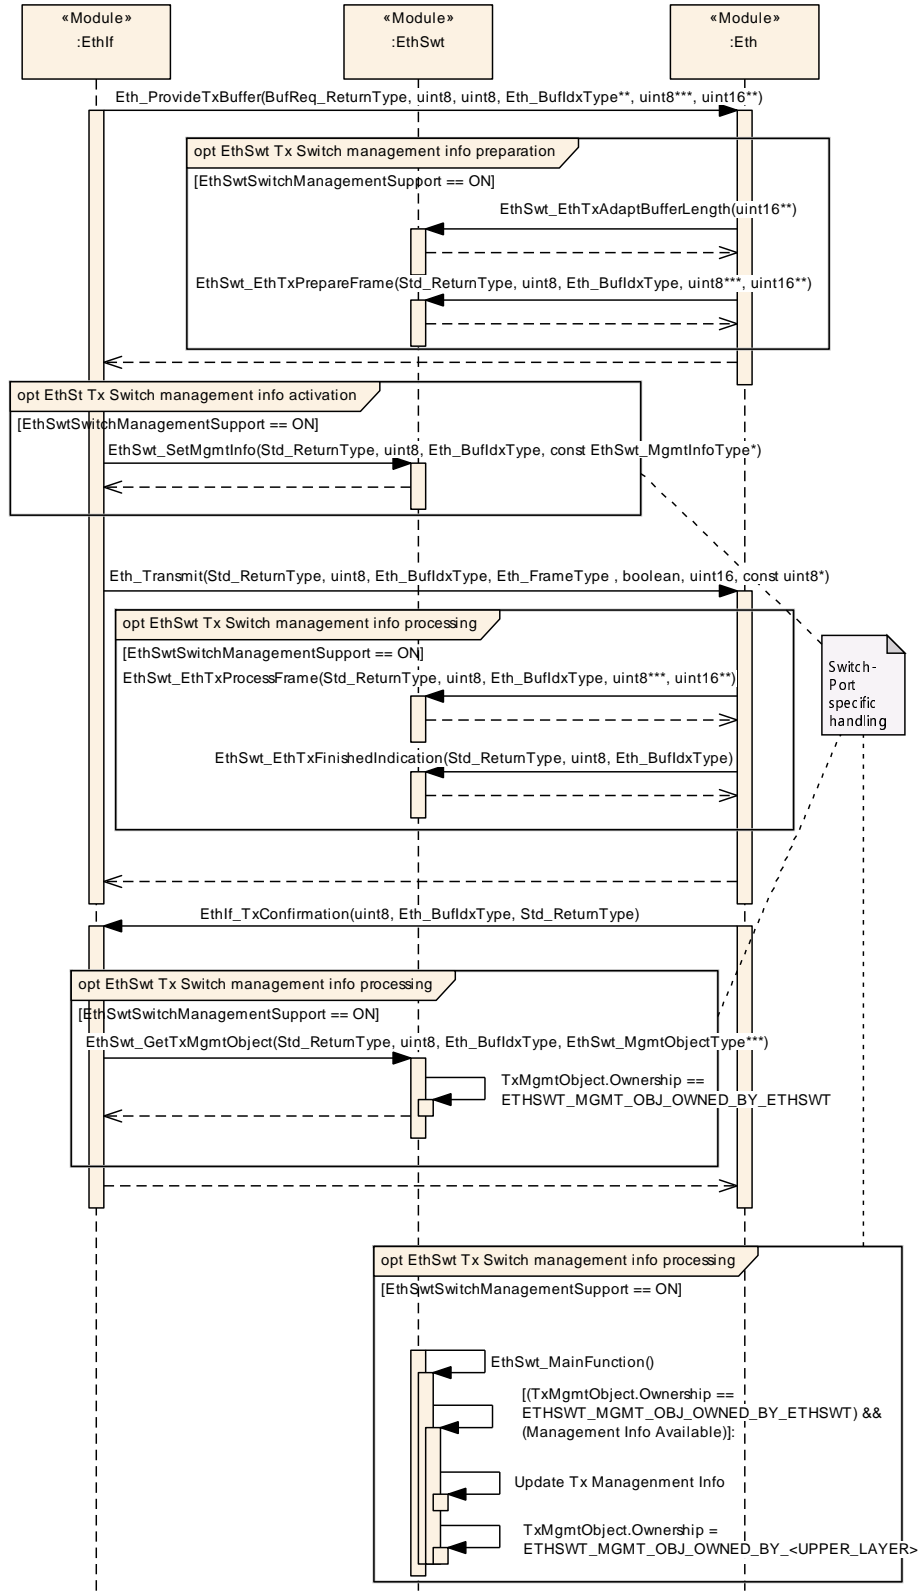

**Figure 9.4: Switch Management support for transmission**

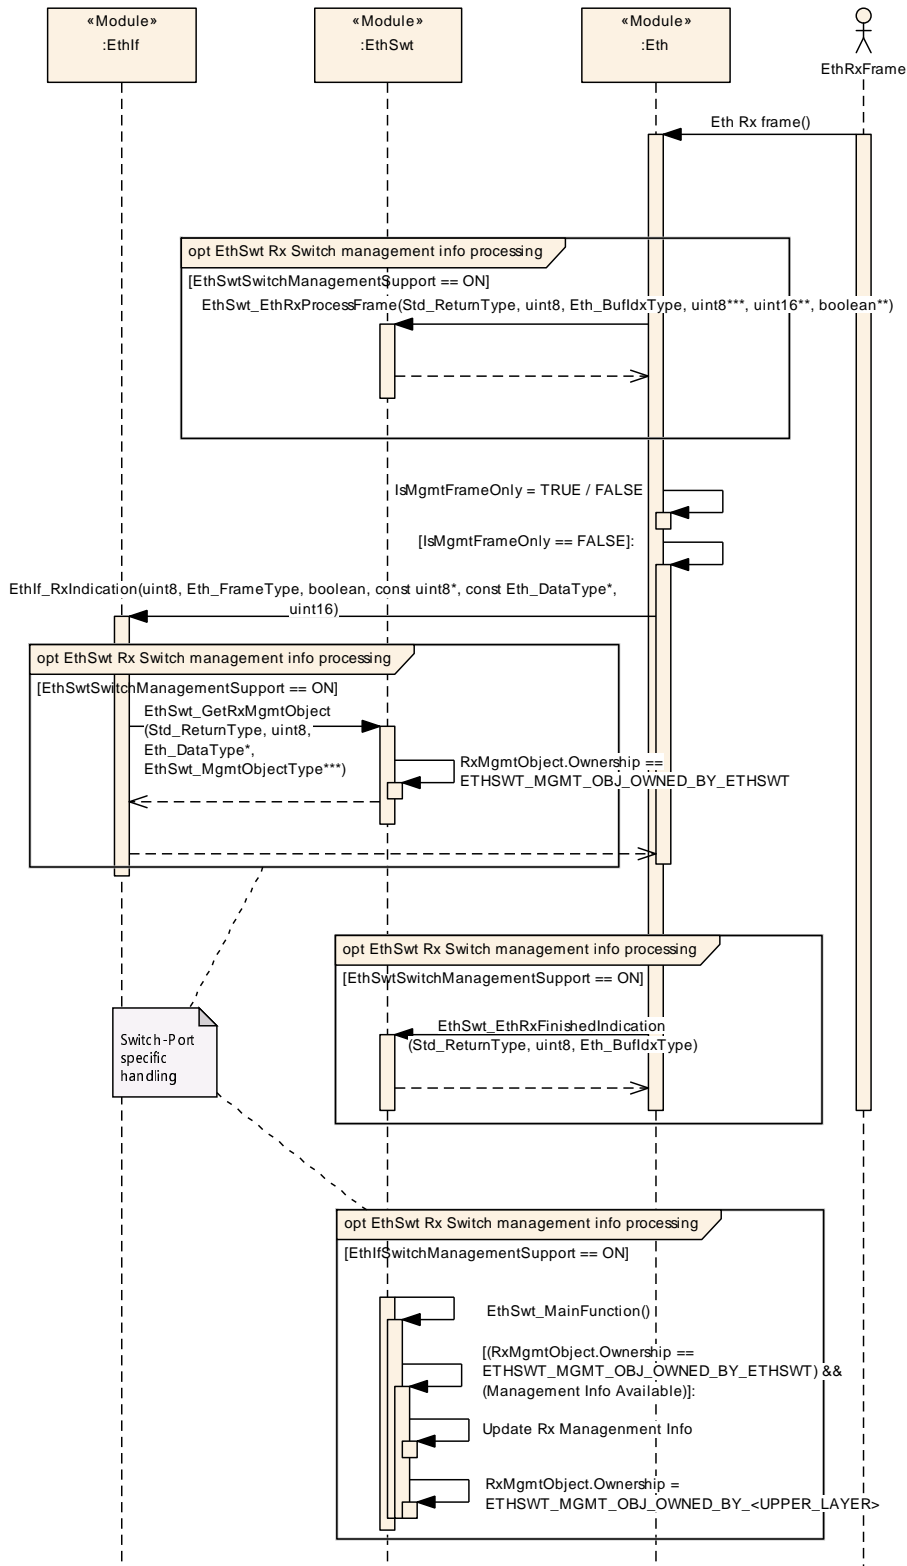

**Figure 9.5: Management support for reception**

## 10 Configuration specification

section 10.2 specifies the structure (containers) and the parameters of the module Eth Swt.

### 10.1 Containers and configuration parameters

The following chapters summarize all configuration parameters. The detailed meanings of the parameters describe chapter 7 and chapter 8.


**[SWS\_EthSwt\_00414]** [The Ethernet Switch Driver module shall reject configurations with partition mappings which are not supported by the implementation.] ()

#### 10.1.1 EthSwt

|                                   |  |
|-----------------------------------|--|
| <b>SWS Item</b>                   | <b>[ECUC_EthSwt_00046]</b>                                   |
| <b>Module Name</b>                | EthSwt   |
| <b>Description</b>                | Configuration of the EthSwt (Ethernet Switch Driver) module. |
| <b>Post-Build Variant Support</b> | true   |
| <b>Supported Config Variants</b>  | VARIANT-LINK-TIME, VARIANT-POST-BUILD, VARIANT-PRE-COMPILE   |

| Included Containers           |              |   |
|-------------------------------|--------------|---|
| Container Name                | Multiplicity | Scope / Dependency                                      |
| <a href="#">EthSwtConfig</a>  | 1..*         | Configuration of one Ethernet Switch.                   |
| <a href="#">EthSwtGeneral</a> | 1            | General configuration of Ethernet Switch Driver module. |



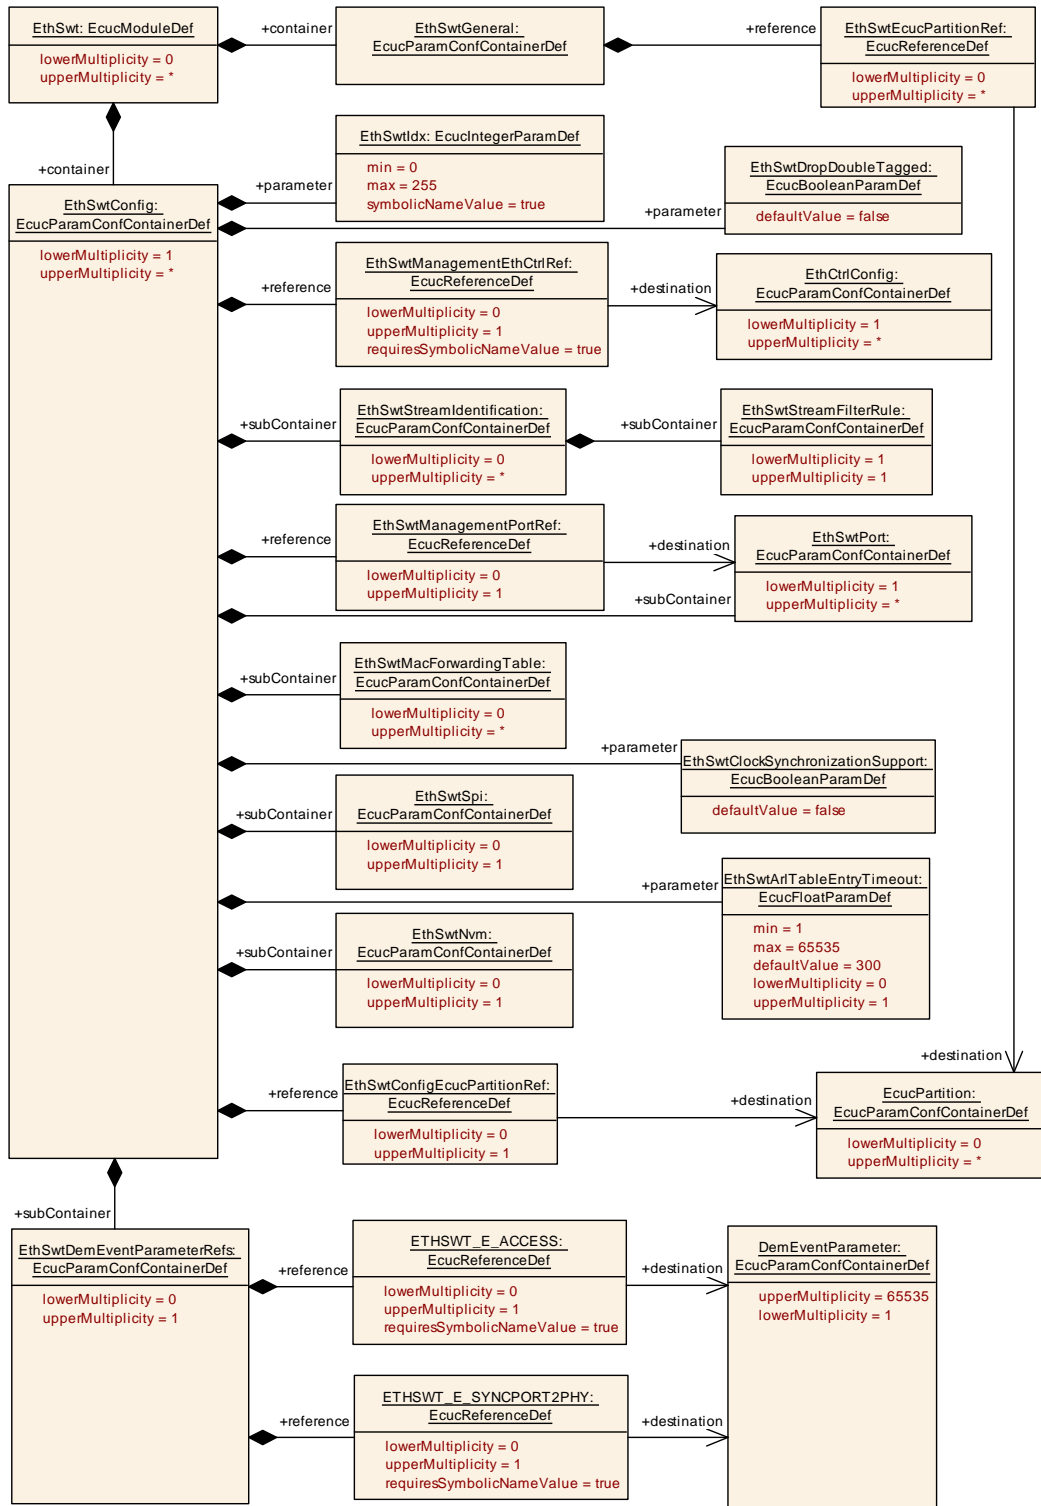

**Figure 10.1: EthSwt**

## 10.1.2 EthSwtConfig

|   |                                       |   |                     |
|---|---------------------------------------|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00001]                   |   |                     |
| <b>Container Name</b>                   | EthSwtConfig                          |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwt</a>                |   |                     |
| <b>Description</b>                      | Configuration of one Ethernet Switch. |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                                  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>               | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>                      | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>                | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |                                       |   |                     |

|   |   |   |              |
|---|---|---|--------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00127]   |   |              |
| <b>Parameter Name</b>                   | EthSwtArlTableEntryTimeout  |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtConfig</a>  |   |              |
| <b>Description</b>                      | If present, this parameter specifies the timeout in seconds for removing unused entries from the ARL table of the Ethernet switch. If the parameter is not configured, entries are not removed automatically. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucFloatParamDef   |   |              |
| <b>Range</b>                            | [1 .. 65535]  |   |              |
| <b>Default value</b>                    | 300   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00128]  |   |                     |
| <b>Parameter Name</b>            | EthSwtClockSynchronizationSupport  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtConfig</a>   |   |                     |
| <b>Description</b>               | <p>This parameter defines, if a Ethernet switch shall enable clock synchronization with another Ethernet switch to which it is connected via uplink port.</p> <p>If this parameter is set to TRUE the clock synchronization between connected Ethernet switches is activated and the clocks of the Ethernet switches are synchronized. If this parameter is set to FALSE the clock synchronization between connected Ethernet switches is deactivated.</p> <p>This parameter shall only be set to TRUE if the Ethernet switch hardware supports clock synchronization.</p> |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucBooleanParamDef  |   |                     |
| <b>Default value</b>             | false  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |





|                           |                        |   |                    |
|---------------------------|------------------------|---|--------------------|
|                           | <b>Post-build time</b> | X | VARIANT-POST-BUILD |
| <b>Scope / Dependency</b> | scope: local           |   |                    |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00073]</b>   |   |                     |
| <b>Parameter Name</b>            | EthSwtDropDoubleTagged   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtConfig</a>   |   |                     |
| <b>Description</b>               | <p>This parameter defines if a switch shall drop double tagged (Q in Q) frames.</p> <p>If this parameter is set to TRUE double tagged frames are dropped at all ports.</p> <p>If this parameter is set to FALSE, then double tagged frames are forwarded. If double tagging is used as a feature, this parameter must be set to FALSE.</p> <p>This parameter shall only be set to TRUE when Switch-HW supports the filtering of double tagged frames as filtering by SW is NOT possible!</p> |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucBooleanParamDef  |   |                     |
| <b>Default value</b>             | false  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00004]</b>                                       |   |              |
| <b>Parameter Name</b>            | EthSwtIdx  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtConfig</a>                                     |   |              |
| <b>Description</b>               | Specifies the instance ID of the configured Ethernet Switch.     |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucIntegerParamDef (Symbolic Name generated for this parameter) |   |              |
| <b>Range</b>                     | 0 .. 255   |   |              |
| <b>Default value</b>             | -  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | - |              |
|                                  | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>        | scope: ECU   |   |              |

|   |  |   |              |
|---|--|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00130]</b>   |   |              |
| <b>Parameter Name</b>                   | EthSwtConfigEcucPartitionRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtConfig</a>   |   |              |
| <b>Description</b>                      | <p>Maps the configuration of one single Ethernet switch to zero or one ECUC partitions.</p> <p>The ECUC partition referenced is a subset of the ECUC partitions where the Ethernet switch driver is mapped to.</p> |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Reference to EcucPartition   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |              |
| <b>Post-Build Variant Value</b>         | true   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |





|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
|                                  | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: ECU              |   |              |

|   |   |   |              |
|---|---|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwT_00110]</b>  |   |              |
| <b>Parameter Name</b>                   | EthSwTManagementEthCtrlRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwTConfig</a>  |   |              |
| <b>Description</b>                      | Reference to the Ethernet controller connected to the management port where the management frames will be transmitted/received. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to EthCtrlConfig  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

|   |   |   |              |
|---|---|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwT_00111]</b>                                      |   |              |
| <b>Parameter Name</b>                   | EthSwTManagementPortRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwTConfig</a>                                    |   |              |
| <b>Description</b>                      | Reference to the port where the management CPU is connected to. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Reference to <a href="#">EthSwTPort</a>                         |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

| <b>Included Containers</b>                  |                     |  |
|---|---------------------|--|
| <b>Container Name</b>                       | <b>Multiplicity</b> | <b>Scope / Dependency</b>  |
| <a href="#">EthSwTDemEventParameterRefs</a> | 0..1                | Container for the references to DemEventParameter elements which shall be invoked using the API Dem_SetEventStatus in case the corresponding error occurs. The EventId is taken from the referenced DemEventParameter's DemEventId symbolic value. The standardized errors are provided in this container and can be extended by vendor-specific error references. |
| <a href="#">EthSwTMacForwardingTable</a>    | 0..*                | Represents a MAC forwarding table.   |





| Included Containers                        |              |  |
|--|--------------|--|
| Container Name                             | Multiplicity | Scope / Dependency   |
| <a href="#">EthSwtNvm</a>                  | 0..1         | Configuration of one Ethernet Switch Nvm usage in case the module requires non volatile memory in the Ecu to store switch configuration.   |
| <a href="#">EthSwtPort</a>                 | 1..*         | Configuration of one Ethernet Switch Port.   |
| <a href="#">EthSwtSpi</a>                  | 0..1         | Configuration of one Ethernet Switch SPI access (if SPI is used).  |
| <a href="#">EthSwtStreamIdentification</a> | 0..*         | Configuration of a stream identification.<br><b>Tags:</b> atp.Status=draft   |
| <a href="#">EthSwtVlanMembership</a>       | 0..4095      | Determines the membership of this Ethernet switch and the referenced ports to the virtual network, i.e. frames with this VID can be received and transmitted via the referenced ports. |

### 10.1.3 EthSwtDemEventParameterRefs

|   |   |   |              |
|---|---|---|--------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00016]   |   |              |
| <b>Container Name</b>                   | EthSwtDemEventParameterRefs   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtConfig</a>  |   |              |
| <b>Description</b>                      | Container for the references to DemEventParameter elements which shall be invoked using the API Dem_SetEventStatus in case the corresponding error occurs. The Event Id is taken from the referenced DemEventParameter's DemEventId symbolic value. The standardized errors are provided in this container and can be extended by vendor-specific error references. |   |              |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Configuration Parameters</b>         |   |   |              |

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00006]  |   |                     |
| <b>Parameter Name</b>                   | ETHSWT_E_ACCESS  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtDemEventParameterRefs</a>  |   |                     |
| <b>Description</b>                      | Reference to the DemEventParameter which shall be issued when the error "Ethernet Switch Access Failure" has occurred. |   |                     |
| <b>Multiplicity</b>                     | 0..1   |   |                     |
| <b>Type</b>                             | Symbolic name reference to DemEventParameter   |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Post-Build Variant Value</b>         | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: local   |   |                     |

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00125]   |   |                     |
| <b>Parameter Name</b>                   | ETHSWT_E_SYNCPORT2PHY   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwTDemEventParameterRefs</a>   |   |                     |
| <b>Description</b>                      | Reference to the DemEventParameter which shall be issued when the error "Ethernet switch port and the referenced Ethernet transceiver are in contradicting modes" has occurred. |   |                     |
| <b>Multiplicity</b>                     | 0..1  |   |                     |
| <b>Type</b>                             | Symbolic name reference to DemEventParameter  |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Post-Build Variant Value</b>         | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: local  |   |                     |

No Included Containers


### 10.1.4 EthSwTNm

|   |  |   |              |
|---|--|---|--------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00043]  |   |              |
| <b>Container Name</b>                   | EthSwTNm   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwTConfig</a>   |   |              |
| <b>Description</b>                      | Configuration of one Ethernet Switch Nvm usage in case the module requires non volatile memory in the Ecu to store switch configuration. |   |              |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Configuration Parameters</b>         |  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwT_00134]   |   |              |
| <b>Parameter Name</b>            | EthSwTConfigurationNvmBlockDescriptorRef  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTNm</a>  |   |              |
| <b>Description</b>               | Reference to the Nvm block description in the Nvm module configuration to store e.g. the port mirror configurations |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | Symbolic name reference to NvMBlockDescriptor   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00044]</b>   |   |              |
| <b>Parameter Name</b>            | EthSwtTableNvmBlockDescriptorRef   |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtNvm</a>  |   |              |
| <b>Description</b>               | Reference to the Nvm block description in the Nvm module configuration to store e.g. the learned ARL table |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | Symbolic name reference to NvMBlockDescriptor  |   |              |
| <b>Post-Build Variant Value</b>  | true   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>        | scope: ECU   |   |              |

**No Included Containers**

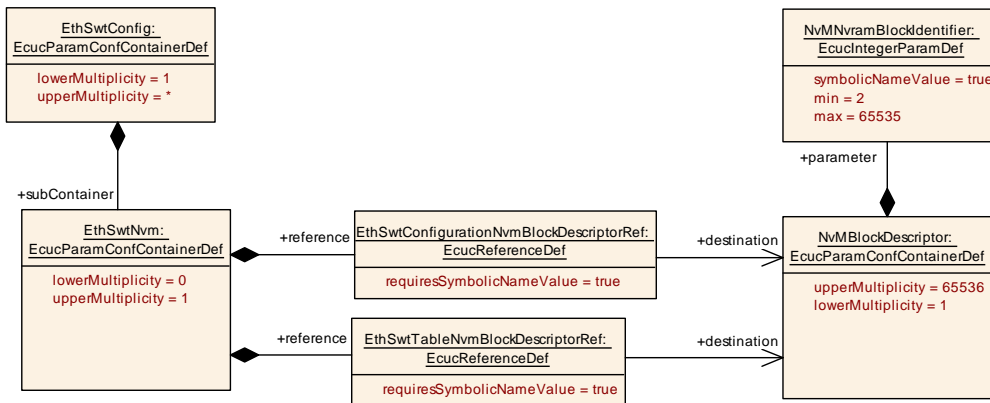

**Figure 10.2: EthSwt Nvm Interaction**

### 10.1.5 EthSwtPort

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00005]</b>                 |   |                     |
| <b>Container Name</b>                   | EthSwtPort                                 |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtConfig</a>               |   |                     |
| <b>Description</b>                      | Configuration of one Ethernet Switch Port. |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                                       |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                    | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>                           | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>                     | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                         |   |  |  |
|-------------------------|---|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwt_00013]</b>  |  |  |
| <b>Parameter Name</b>   | EthSwtPortIdx   |  |  |
| <b>Parent Container</b> | <a href="#">EthSwtPort</a>  |  |  |
| <b>Description</b>      | Specifies the instance ID of the configured Ethernet Switch Port. |  |  |





|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucIntegerParamDef (Symbolic Name generated for this parameter) |   |              |
| <b>Range</b>                     | 0 .. 255   |   |              |
| <b>Default value</b>             | -  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | - |              |
|                                  | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>        | scope: ECU   |   |              |

|   |   |   |  |
|---|---|---|--|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwT_00114]</b>              |   |  |
| <b>Parameter Name</b>                   | EthSwTPortMacLayerSpeed                 |   |  |
| <b>Parent Container</b>                 | <a href="#">EthSwTPort</a>              |   |  |
| <b>Description</b>                      | Defines the baud rate of the MAC layer. |   |  |
| <b>Multiplicity</b>                     | 0..1                                    |   |  |
| <b>Type</b>                             | EcucEnumerationParamDef                 |   |  |
| <b>Range</b>                            | ETH_MAC_LAYER_SPEED_100M                | - |  |
|   | ETH_MAC_LAYER_SPEED_10G                 | - |  |
|   | ETH_MAC_LAYER_SPEED_10M                 | - |  |
|   | ETH_MAC_LAYER_SPEED_1G                  | - |  |
|   | ETH_MAC_LAYER_SPEED_2500M               | - |  |
| <b>Post-Build Variant Multiplicity</b>  | true                                    |   |  |
| <b>Post-Build Variant Value</b>         | true                                    |   |  |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                 | X | VARIANT-PRE-COMPILE                      |
|   | <b>Link time</b>                        | X | VARIANT-LINK-TIME,<br>VARIANT-POST-BUILD |
|   | <b>Post-build time</b>                  | - |  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                 | X | VARIANT-PRE-COMPILE                      |
|   | <b>Link time</b>                        | X | VARIANT-LINK-TIME,<br>VARIANT-POST-BUILD |
|   | <b>Post-build time</b>                  | - |  |
| <b>Scope / Dependency</b>               | scope: ECU                              |   |  |

|                         |   |   |
|-------------------------|---|---|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00113]</b>                        |   |
| <b>Parameter Name</b>   | EthSwTPortMacLayerSubType                         |   |
| <b>Parent Container</b> | <a href="#">EthSwTPort</a>                        |   |
| <b>Description</b>      | Defines the MAC layer subtype of this EthSwTPort. |   |
| <b>Multiplicity</b>     | 0..1  |   |
| <b>Type</b>             | EcucEnumerationParamDef                           |   |
| <b>Range</b>            | REDUCED   | Reduced media-independent interface   |
|                         | REVERSED  | reversed media-independent interface (to provide direct connection between two Ethernet MACs) |
|                         | SERIAL  | low-power and low pin-count serial 8b/10b-coded media-independent interface                   |
|                         | STANDARD  | standard media-independent interface  |







|                                  |                  |   |                                       |
|----------------------------------|------------------|---|---------------------------------------|
|                                  | UNIVERSAL_SERIAL | Universal low-power and low pin-count serial 8b/10b-coded media-independent interface |                                       |
| Post-Build Variant Multiplicity  | true             |   |                                       |
| Post-Build Variant Value         | true             |   |                                       |
| Multiplicity Configuration Class | Pre-compile time | X   | VARIANT-PRE-COMPILE                   |
|                                  | Link time        | X   | VARIANT-LINK-TIME, VARIANT-POST-BUILD |
|                                  | Post-build time  | –   |                                       |
| Value Configuration Class        | Pre-compile time | X   | VARIANT-PRE-COMPILE                   |
|                                  | Link time        | X   | VARIANT-LINK-TIME, VARIANT-POST-BUILD |
|                                  | Post-build time  | –   |                                       |
| Scope / Dependency               | scope: ECU       |   |                                       |

|                                  |  |  |                                       |
|----------------------------------|--|--|---------------------------------------|
| SWS Item                         | [ECUC_EthSwT_00072]                            |  |                                       |
| Parameter Name                   | EthSwTPortMacLayerType                         |  |                                       |
| Parent Container                 | <a href="#">EthSwTPort</a>                     |  |                                       |
| Description                      | Defines the MAC layer type of this EthSwTPort. |  |                                       |
| Multiplicity                     | 0..1   |  |                                       |
| Type                             | EcucEnumerationParamDef                        |  |                                       |
| Range                            | ETHSWT_PORT_MAC_LAYER_TYPE_XGMII               | MAC layer interface (data) bandwidth class 1Gbit/s (e.g. GMII, RGMII, SGMII, RvGMII, USGMII) |                                       |
|                                  | ETHSWT_PORT_MAC_LAYER_TYPE_XMII                | MAC layer interface (data) bandwidth class 100Mbit/s (e.g. MII, RMII, RvMII, SMII, RvMII)    |                                       |
|                                  | ETHSWT_PORT_MAC_LAYER_TYPE_XXGMII              | MAC layer interface (data) bandwidth class 10Gbit/s  |                                       |
| Post-Build Variant Multiplicity  | true   |  |                                       |
| Post-Build Variant Value         | true   |  |                                       |
| Multiplicity Configuration Class | Pre-compile time                               | X  | VARIANT-PRE-COMPILE                   |
|                                  | Link time                                      | X  | VARIANT-LINK-TIME, VARIANT-POST-BUILD |
|                                  | Post-build time                                | –  |                                       |
| Value Configuration Class        | Pre-compile time                               | X  | VARIANT-PRE-COMPILE                   |
|                                  | Link time                                      | X  | VARIANT-LINK-TIME, VARIANT-POST-BUILD |
|                                  | Post-build time                                | –  |                                       |
| Scope / Dependency               | scope: ECU                                     |  |                                       |

|                  |   |   |  |
|------------------|---|---|--|
| SWS Item         | [ECUC_EthSwT_00054]                                 |   |  |
| Parameter Name   | EthSwTPortPhysicalLayerType                         |   |  |
| Parent Container | <a href="#">EthSwTPort</a>                          |   |  |
| Description      | Defines the physical layer type of this EthSwTPort. |   |  |
| Multiplicity     | 0..1  |   |  |
| Type             | EcucEnumerationParamDef                             |   |  |
| Range            | ETHSWT_PORT_1000BASE_T                              | physical layer interface 1000BASE-T (1Gbit/s, 4 pairs). Used for consumer electronic. |  |
|                  | ETHSWT_PORT_1000BASE_T1                             | physical layer interface 1000BASE-T1 (1Gbit/s, 1 pair). Used for automotive.          |  |






|   |  |   |  |
|---|--|---|--|
|   | ETHSWT_PORT_100BASE_T1   | physical layer interface 100BASE-T1 (100Mbit/s, 1 pair). Used for automotive.           |  |
|   | ETHSWT_PORT_100BASE_TX   | physical layer interface 100BASE-TX (100Mbit/s, 2 pairs). Used for consumer electronic. |  |
|   | ETHSWT_PORT_10BASE_T1S   | physical layer interface 10BASE-T1S (10Mbit/s, 1 pair). Used for automotive.            |  |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |  |
| <b>Post-Build Variant Value</b>         | true   |   |  |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X   | VARIANT-PRE-COMPILE                      |
|   | <b>Link time</b>   | X   | VARIANT-LINK-TIME,<br>VARIANT-POST-BUILD |
|   | <b>Post-build time</b>   | –   |  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X   | VARIANT-PRE-COMPILE                      |
|   | <b>Link time</b>   | X   | VARIANT-LINK-TIME,<br>VARIANT-POST-BUILD |
|   | <b>Post-build time</b>   | –   |  |
| <b>Scope / Dependency</b>               | scope: ECU<br>dependency: If a EthSwtPort has an EthSwtPortPhysicalLayerType then EthSwtPort shall reference an EthTrcv. |   |  |

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00101]</b>   |   |                     |
| <b>Parameter Name</b>                   | EthSwtPortRole   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtPort</a>   |   |                     |
| <b>Description</b>                      | Set a special role of the Ethernet switch port. It is either a host port or a up link port. If not configured it is a standard port.   |   |                     |
| <b>Multiplicity</b>                     | 0..1   |   |                     |
| <b>Type</b>                             | EcucEnumerationParamDef  |   |                     |
| <b>Range</b>                            | ETHSWT_HOST_PORT   | The hostPort is connected to an ECU (host ecu). The host ECU controls the connected Coupling Element (e.g. Ethernet switch).  |                     |
|   | ETHSWT_UP_LINK_PORT  | A CouplingPort can be connected to another CouplingPort of a CouplingElement located on the same ECU (CouplingElement.ecuInstance) using the CouplingPortConnection. This is used to model a cascaded switch. |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Post-Build Variant Value</b>         | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X   | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X   | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X   | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X   | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X   | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X   | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: One Ethernet switch shall have either exactly one host port or at least one up link port. In case of having a host port also multiple up link port can exist. A master switch shall be connected by one host port with the host ecu. A slave switch shall be connected to a master switch by one up link port. |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00112]</b>  |   |                     |
| <b>Parameter Name</b>            | EthSwtPortTimeStampSupport  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtPort</a>  |   |                     |
| <b>Description</b>               | Enables/Disables the Switch-port specific timestamping.   |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucBooleanParamDef   |   |                     |
| <b>Default value</b>             | –   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local<br><br>dependency: EthSwtPortTimeStampSupport can only be set to TRUE, * if (EthSwtClockSynchronizationSupport is FALSE) OR * if ((EthSwtClockSynchronizationSupport is TRUE) AND (EthSwtPortRole is NOT ETHSWT_UP_LINK_PORT)) |   |                     |

|   |   |   |  |
|---|---|---|--|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00041]</b>  |   |  |
| <b>Parameter Name</b>                   | EthSwtPortTrcvRef   |   |  |
| <b>Parent Container</b>                 | <a href="#">EthSwtPort</a>  |   |  |
| <b>Description</b>                      | Reference to the Ethernet transceiver driver this EthSwtPort is connected with.   |   |  |
| <b>Multiplicity</b>                     | 0..1  |   |  |
| <b>Type</b>                             | Symbolic name reference to EthTrcvConfig  |   |  |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |  |
| <b>Post-Build Variant Value</b>         | true  |   |  |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE                      |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME,<br>VARIANT-POST-BUILD |
|   | <b>Post-build time</b>  | – |  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE                      |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME                        |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD                       |
| <b>Scope / Dependency</b>               | scope: ECU<br><br>dependency: If EthSwtPortPhysicalLayerType is defined, then EthSwtPortTrcvRef holds the reference to the corresponding EthTrcv. |   |  |

| <b>Included Containers</b>        |                     |   |
|-----------------------------------|---------------------|---|
| <b>Container Name</b>             | <b>Multiplicity</b> | <b>Scope / Dependency</b>                                   |
| <a href="#">EthSwtPortEgress</a>  | 1                   | Configuration of one Ethernet Switch Port Egress behavior.  |
| <a href="#">EthSwtPortIngress</a> | 1                   | Configuration of one Ethernet Switch Port ingress behavior. |

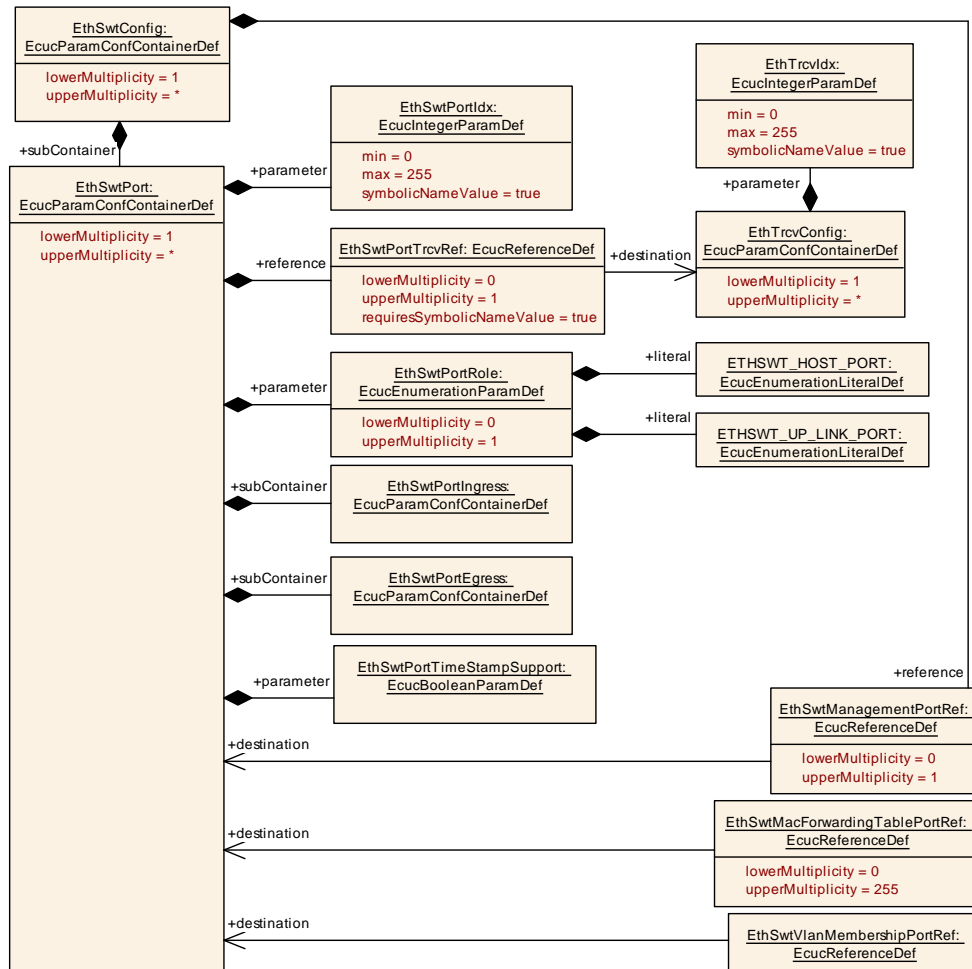

**Figure 10.3: EthSwt Port (1/2)**

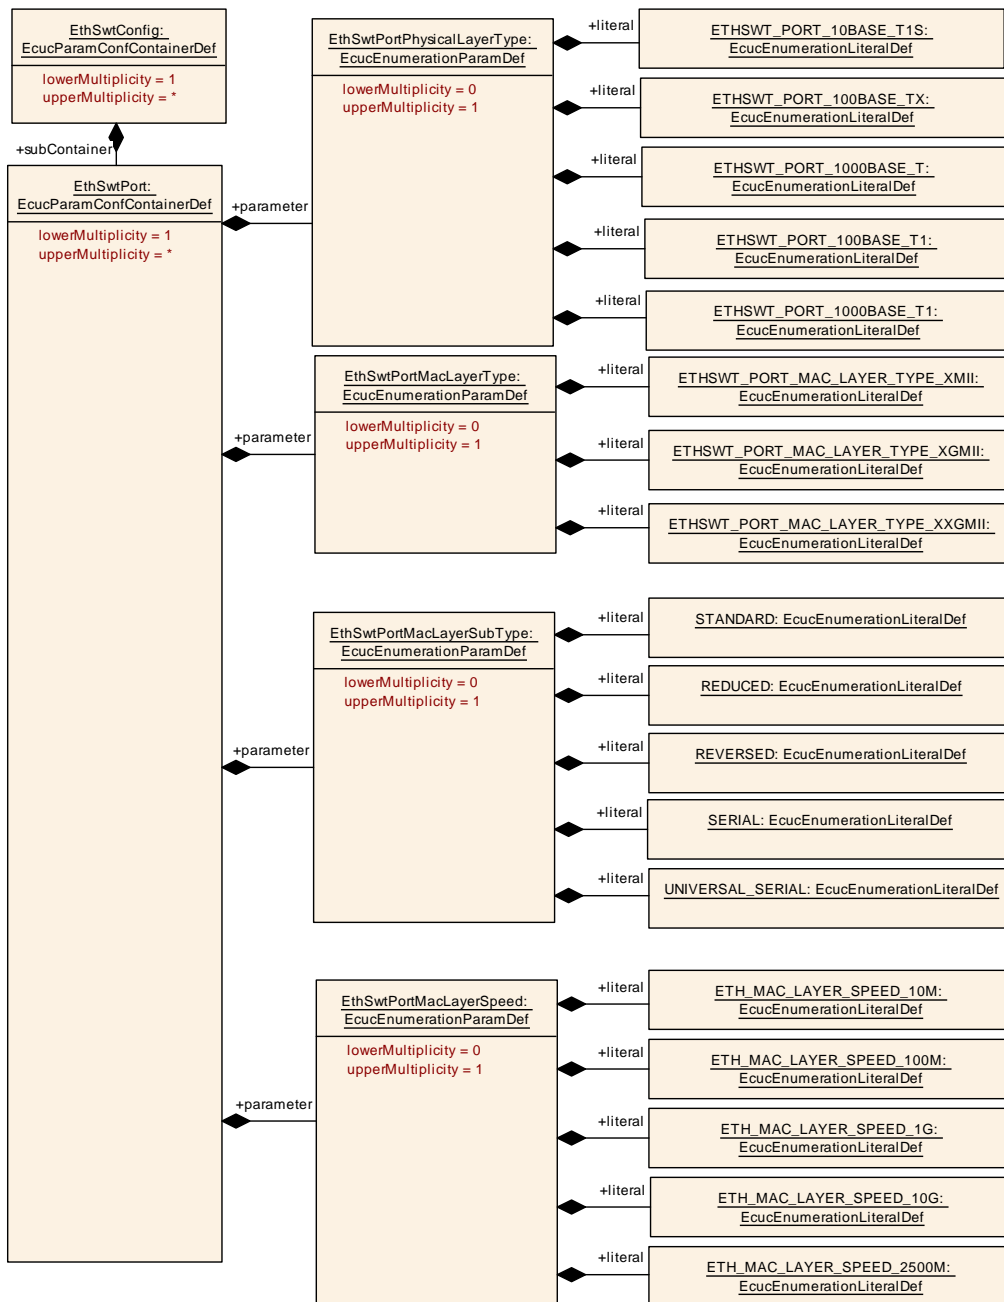


Figure 10.4: EthSwt Port (2/2)


Please note that the functional behavior of the ingress and egress port of a switch is implemented in hardware in the switch devices (see [11]). Thus, the configuration of EthSwtPort and described in the following has to be written to the switch device or is related to the switch configuration.

### 10.1.6 EthSwPortEgress

|                                 |  |
|---------------------------------|--|
| <b>SWS Item</b>                 | [ECUC_EthSwT_00007]  |
| <b>Container Name</b>           | EthSwPortEgress  |
| <b>Parent Container</b>         | <a href="#">EthSwPort</a>                                  |
| <b>Description</b>              | Configuration of one Ethernet Switch Port Egress behavior. |
| <b>Configuration Parameters</b> |  |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwT_00008]   |   |                     |
| <b>Parameter Name</b>            | EthSwPortEgressLastSchedulerRef   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwPortEgress</a>   |   |                     |
| <b>Description</b>               | Reference to the port scheduler which is the last in the egress port structure. |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | Reference to <a href="#">EthSwPortEgressScheduler</a>                           |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

| Included Containers                      |              |   |
|--|--------------|---|
| Container Name                           | Multiplicity | Scope / Dependency  |
| <a href="#">EthSwPortEgressScheduler</a> | 1..*         | Represents a Scheduler in the egress port.                                  |
| <a href="#">EthSwPortFifo</a>            | 1..*         | Represents a Fifo in the egress port.<br><b>Tags:</b> atp.Status=obsolete   |
| <a href="#">EthSwPortQueue</a>           | 1..8         | Represents a Queue at the egress port.<br><b>Tags:</b> atp.Status=draft     |
| <a href="#">EthSwPortShaper</a>          | 0..*         | Represents a Shaper in the egress port.<br><b>Tags:</b> atp.Status=obsolete |

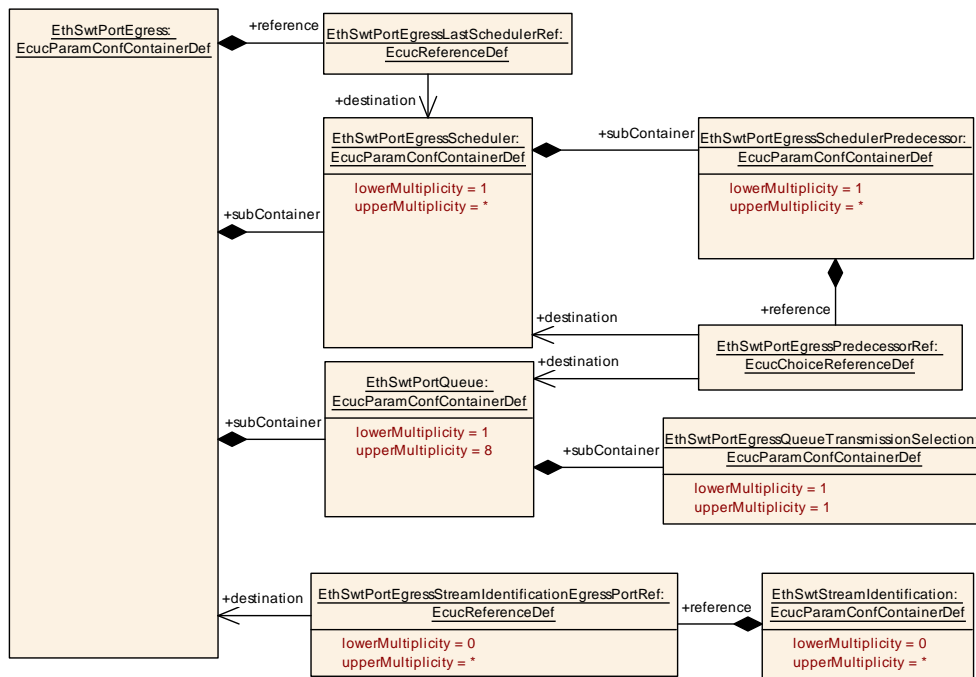

**Figure 10.5: EthSwtPortEgress (1/2)**

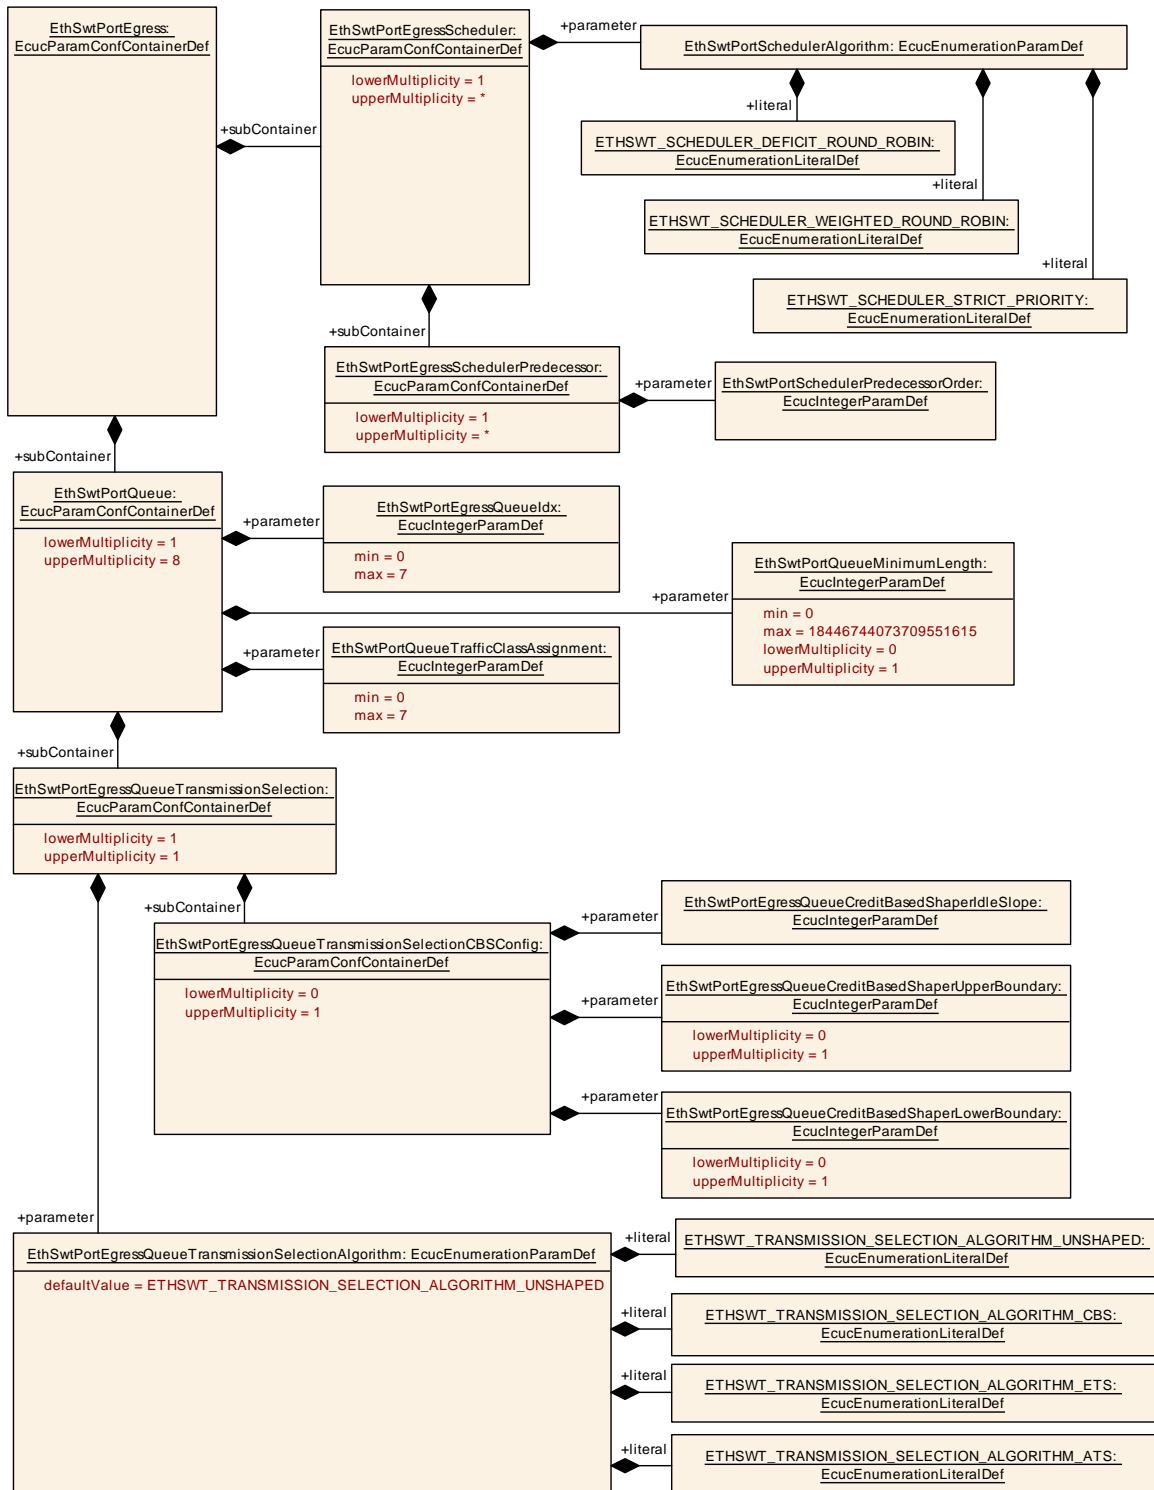


Figure 10.6: EthSwPortEgress (2/2)



### 10.1.7 EthSwPortEgressScheduler

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00017]                        |   |                     |
| <b>Container Name</b>                   | EthSwPortEgressScheduler                   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwPortEgress</a>            |   |                     |
| <b>Description</b>                      | Represents a Scheduler in the egress port. |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                                       |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                    | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>                           | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>                     | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |  |                      |                     |
|----------------------------------|--|----------------------|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwT_00018]                      |                      |                     |
| <b>Parameter Name</b>            | EthSwPortSchedulerAlgorithm              |                      |                     |
| <b>Parent Container</b>          | <a href="#">EthSwPortEgressScheduler</a> |                      |                     |
| <b>Description</b>               | Defines the scheduler algorithm.         |                      |                     |
| <b>Multiplicity</b>              | 1  |                      |                     |
| <b>Type</b>                      | EcucEnumerationParamDef                  |                      |                     |
| <b>Range</b>                     | ETHSWT_SCHEDULER_DEFICIT_ROUND_ROBIN     | deficit round robin  |                     |
|                                  | ETHSWT_SCHEDULER_STRICT_PRIORITY         | strict priority      |                     |
|                                  | ETHSWT_SCHEDULER_WEIGHTED_ROUND_ROBIN    | weighted round robin |                     |
| <b>Post-Build Variant Value</b>  | true                                     |                      |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                  | X                    | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>                         | X                    | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>                   | X                    | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local                             |                      |                     |

|   |                     |   |
|---|---------------------|---|
| <b>Included Containers</b>                          |                     |   |
| <b>Container Name</b>                               | <b>Multiplicity</b> | <b>Scope / Dependency</b>                                   |
| <a href="#">EthSwPortEgressSchedulerPredecessor</a> | 1..*                | Defines an ordered list of predecessors for this scheduler. |

### 10.1.8 EthSwPortEgressSchedulerPredecessor

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00019]   |   |                     |
| <b>Container Name</b>                   | EthSwPortEgressSchedulerPredecessor                         |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwPortEgressScheduler</a>                    |   |                     |
| <b>Description</b>                      | Defines an ordered list of predecessors for this scheduler. |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                     | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>                                      | X | VARIANT-POST-BUILD  |





|                                 |
|---------------------------------|
| <b>Configuration Parameters</b> |
|---------------------------------|

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00020]</b>   |   |                     |
| <b>Parameter Name</b>            | EthSwTPortSchedulerPredecessorOrder  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwTPortEgressSchedulerPredecessor</a>   |   |                     |
| <b>Description</b>               | Defines the order of the scheduler predecessors.<br><br>This value has to be understood as a relative value, i.e. the value shows only the relative ordering of the elements. The highest value has the highest priority and gaps are allowed (not dense based). The values need to be unique within one EthSwTPort Scheduler. |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                     | 0 .. 18446744073709551615  |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: ECU   |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00010]</b>  |   |                     |
| <b>Parameter Name</b>            | EthSwTPortEgressPredecessorRef  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwTPortEgressSchedulerPredecessor</a>  |   |                     |
| <b>Description</b>               | Choice reference to the scheduler predecessor.  |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | Choice reference to [ <a href="#">EthSwTPortEgressScheduler</a> , <a href="#">EthSwTPortFifo</a> , <a href="#">EthSwTPortQueue</a> , <a href="#">EthSwTPortShaper</a> ] |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.9 EthSwTPortFifo

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwT_00011]</b> (Obsolete)   |   |                     |
| <b>Container Name</b>                   | EthSwTPortFifo  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwTPortEgress</a>  |   |                     |
| <b>Description</b>                      | Represents a Fifo in the egress port.<br><br><b>Tags:</b> atp.Status=obsolete |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |





|                                 |                        |   |                    |
|---------------------------------|------------------------|---|--------------------|
|                                 | <b>Post-build time</b> | X | VARIANT-POST-BUILD |
| <b>Configuration Parameters</b> |                        |   |                    |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00132]</b> (Obsolete)   |   |              |
| <b>Parameter Name</b>            | EthSwTPortEgressFifoIdx   |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTPortFifo</a>  |   |              |
| <b>Description</b>               | Specifies the instance ID of the fifo of the configured Ethernet switch egress port<br><b>Tags:</b> atp.Status=obsolete |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 18446744073709551615   |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | true  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: ECU  |   |              |

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwT_00098]</b> (Obsolete)   |   |                     |
| <b>Parameter Name</b>                   | EthSwTPortFifoMinimumLength   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwTPortFifo</a>  |   |                     |
| <b>Description</b>                      | FIFO minimum length in Byte. This assignment is used to configure a guaranteed size of a configured FIFO.<br><b>Tags:</b> atp.Status=obsolete |   |                     |
| <b>Multiplicity</b>                     | 0..1  |   |                     |
| <b>Type</b>                             | EcucIntegerParamDef   |   |                     |
| <b>Range</b>                            | 0 .. 18446744073709551615   |   |                     |
| <b>Default value</b>                    | -   |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Post-Build Variant Value</b>         | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: ECU  |   |                     |

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00012]</b> (Obsolete)  |  |  |
| <b>Parameter Name</b>   | EthSwTPortFifoTrafficClassAssignment   |  |  |
| <b>Parent Container</b> | <a href="#">EthSwTPortFifo</a>   |  |  |
| <b>Description</b>      | Defines which traffic classes are assigned to this Fifo.<br><b>Tags:</b> atp.Status=obsolete |  |  |
| <b>Multiplicity</b>     | 0..8   |  |  |
| <b>Type</b>             | EcucIntegerParamDef  |  |  |
| <b>Range</b>            | 0 .. 7   |  |  |





|                                  |                         |   |                     |
|----------------------------------|-------------------------|---|---------------------|
| <b>Default value</b>             | -                       |   |                     |
| <b>Post-Build Variant Value</b>  | true                    |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>        | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: ECU              |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.10 EthSwtPortQueue

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00182]   |   |                     |
| <b>Container Name</b>                   | EthSwtPortQueue   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtPortEgress</a>  |   |                     |
| <b>Description</b>                      | Represents a Queue at the egress port.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00183]  |   |                     |
| <b>Parameter Name</b>            | EthSwtPortEgressQueueIdx   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtPortQueue</a>  |   |                     |
| <b>Description</b>               | Specifies the instance ID of the queue of the configured Ethernet switch egress port.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                     | 0 .. 7   |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>SWS Item</b>         | [ECUC_EthSwt_00184]  |  |  |
| <b>Parameter Name</b>   | EthSwtPortQueueMinimumLength   |  |  |
| <b>Parent Container</b> | <a href="#">EthSwtPortQueue</a>  |  |  |
| <b>Description</b>      | Queue minimum length in Byte. This assignment is used to configure a guaranteed size of a configured Queue.<br><b>Tags:</b> atp.Status=draft |  |  |
| <b>Multiplicity</b>     | 0..1   |  |  |





|                                  |                           |   |                     |
|----------------------------------|---------------------------|---|---------------------|
| Type                             | EcucIntegerParamDef       |   |                     |
| Range                            | 0 .. 18446744073709551615 |   |                     |
| Default value                    | -                         |   |                     |
| Post-Build Variant Multiplicity  | true                      |   |                     |
| Post-Build Variant Value         | true                      |   |                     |
| Multiplicity Configuration Class | Pre-compile time          | X | VARIANT-PRE-COMPILE |
|                                  | Link time                 | X | VARIANT-LINK-TIME   |
|                                  | Post-build time           | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time          | X | VARIANT-PRE-COMPILE |
|                                  | Link time                 | X | VARIANT-LINK-TIME   |
|                                  | Post-build time           | X | VARIANT-POST-BUILD  |
| Scope / Dependency               | scope: local              |   |                     |

|                           |   |   |                     |
|---------------------------|---|---|---------------------|
| SWS Item                  | [ECUC_EthSwt_00185]   |   |                     |
| Parameter Name            | EthSwtPortQueueTrafficClassAssignment   |   |                     |
| Parent Container          | <a href="#">EthSwtPortQueue</a>   |   |                     |
| Description               | Defines which traffic class is mapped to this queue.<br><b>Tags:</b> atp.Status=draft |   |                     |
| Multiplicity              | 1   |   |                     |
| Type                      | EcucIntegerParamDef   |   |                     |
| Range                     | 0 .. 7  |   |                     |
| Default value             | -   |   |                     |
| Post-Build Variant Value  | true  |   |                     |
| Value Configuration Class | Pre-compile time  | X | VARIANT-PRE-COMPILE |
|                           | Link time   | X | VARIANT-LINK-TIME   |
|                           | Post-build time   | X | VARIANT-POST-BUILD  |
| Scope / Dependency        | scope: local  |   |                     |

| Included Containers  |              |   |
|--|--------------|---|
| Container Name   | Multiplicity | Scope / Dependency  |
| <a href="#">EthSwtPortEgressQueueTransmissionSelection</a> | 1            | Represents the transmission selection of an egress port queue.<br><b>Tags:</b> atp.Status=draft |

### 10.1.11 EthSwtPortEgressQueueTransmissionSelection

|                          |   |
|--------------------------|---|
| SWS Item                 | [ECUC_EthSwt_00186]   |
| Container Name           | EthSwtPortEgressQueueTransmissionSelection  |
| Parent Container         | <a href="#">EthSwtPortQueue</a>   |
| Description              | Represents the transmission selection of an egress port queue.<br><b>Tags:</b> atp.Status=draft |
| Configuration Parameters |   |

|                                  |   |  |                     |
|----------------------------------|---|--|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00191]</b>  |  |                     |
| <b>Parameter Name</b>            | EthSwtPortEgressQueueTransmissionSelectionAlgorithm   |  |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtPortEgressQueueTransmissionSelection</a>  |  |                     |
| <b>Description</b>               | Represents the transmission selection algorithm of an egress port queue.<br><b>Tags:</b> atp.Status=draft |  |                     |
| <b>Multiplicity</b>              | 1   |  |                     |
| <b>Type</b>                      | EcucEnumerationParamDef   |  |                     |
| <b>Range</b>                     | ETHSWT_TRANSMISSION_SELECTION_ALGORITHM_ATS   | Ethernet frames are selected from the egress queue for transmission according the asynchronous traffic shaping algorithm.<br><b>Tags:</b> atp.Status=draft   |                     |
|                                  | ETHSWT_TRANSMISSION_SELECTION_ALGORITHM_CBS   | Ethernet frames are selected from the egress queue for transmission according the credit based shaping algorithm.<br><b>Tags:</b> atp.Status=draft   |                     |
|                                  | ETHSWT_TRANSMISSION_SELECTION_ALGORITHM_ETS   | Ethernet frames are selected from the egress queue for transmission according the enhanced transmission selection algorithm.<br><b>Tags:</b> atp.Status=draft  |                     |
|                                  | ETHSWT_TRANSMISSION_SELECTION_ALGORITHM_UNSHAPED  | Ethernet frames are selected from the egress queue for transmission in an unshaped manner.<br>Please note: IEEE802.1Q uses the term "strict priority". Term "UNSHAPED" is used to avoid confusion with strict priority in context of EthSwtPortEgressScheduler.<br><b>Tags:</b> atp.Status=draft |                     |
| <b>Default value</b>             | <a href="#">ETHSWT_TRANSMISSION_SELECTION_ALGORITHM_UNSHAPED</a>  |  |                     |
| <b>Post-Build Variant Value</b>  | true  |  |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X  | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X  | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X  | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |  |                     |

| Included Containers   |              |  |
|---|--------------|--|
| Container Name  | Multiplicity | Scope / Dependency   |
| <a href="#">EthSwtPortEgressQueueTransmissionSelectionCBSConfig</a> | 0..1         | Represents the configuration of a credit based shaper transmission selection algorithm of an egress port queue.<br>This configuration is used if the EthSwtPortEgressQueueTransmissionSelectionAlgorithm is set to ETHSWT_TRANSMISSION_SELECTION_ALGORITHM_CBS.<br><b>Tags:</b> atp.Status=draft |

### 10.1.12 EthSwtPortEgressQueueTransmissionSelectionCBSConfig

|                         |  |
|-------------------------|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwt_00187]</b>                                 |
| <b>Container Name</b>   | EthSwtPortEgressQueueTransmissionSelectionCBSConfig        |
| <b>Parent Container</b> | <a href="#">EthSwtPortEgressQueueTransmissionSelection</a> |





|   |   |   |                     |
|---|---|---|---------------------|
| <b>Description</b>                      | <p>Represents the configuration of a credit based shaper transmission selection algorithm of an egress port queue.</p> <p>This configuration is used if the EthSwPortEgressQueueTransmissionSelection Algorithm is set to ETHSWT_TRANSMISSION_SELECTION_ALGORITHM_CBS.</p> <p><b>Tags:</b> atp.Status=draft</p> |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00188]</b>   |   |                     |
| <b>Parameter Name</b>            | EthSwPortEgressQueueCreditBasedShaperIdleSlope   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwPortEgressQueueTransmissionSelectionCBSConfig</a>   |   |                     |
| <b>Description</b>               | <p>Defines the increase of credit in bits per second for the AVB shaper.</p> <p>Note: this parameter maps to IEEE802.1Q parameter "ieee8021FqtssAdminIdleSlope Ms" and "ieee8021FqtssAdminIdleSlopeLs".</p> <p><b>Tags:</b> atp.Status=draft</p> |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                     | 0 .. 18446744073709551615  |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwT_00190]</b>   |   |                     |
| <b>Parameter Name</b>                   | EthSwPortEgressQueueCreditBasedShaperLowerBoundary   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwPortEgressQueueTransmissionSelectionCBSConfig</a>   |   |                     |
| <b>Description</b>                      | <p>Defines the lower credit boundary for the Credit Based Shaper.</p> <p><b>Tags:</b> atp.Status=draft</p> |   |                     |
| <b>Multiplicity</b>                     | 0..1   |   |                     |
| <b>Type</b>                             | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                            | 0 .. 18446744073709551615  |   |                     |
| <b>Default value</b>                    | -  |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |                     |
| <b>Post-Build Variant Value</b>         | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants        |
|   | <b>Link time</b>   | - |                     |
|   | <b>Post-build time</b>   | - |                     |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: local   |   |                     |

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00189]   |   |                     |
| <b>Parameter Name</b>                   | EthSwTPortEgressQueueCreditBasedShaperUpperBoundary   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwTPortEgressQueueTransmissionSelectionCBSConfig</a>                             |   |                     |
| <b>Description</b>                      | Defines the upper credit boundary for the Credit Based Shaper.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>                     | 0..1  |   |                     |
| <b>Type</b>                             | EcucIntegerParamDef   |   |                     |
| <b>Range</b>                            | 0 .. 18446744073709551615   |   |                     |
| <b>Default value</b>                    | -   |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |                     |
| <b>Post-Build Variant Value</b>         | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants        |
|   | <b>Link time</b>  | - |                     |
|   | <b>Post-build time</b>  | - |                     |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: local  |   |                     |

No Included Containers

### 10.1.13 EthSwTPortShaper

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00021] (Obsolete)  |   |                     |
| <b>Container Name</b>                   | EthSwTPortShaper  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwTPortEgress</a>  |   |                     |
| <b>Description</b>                      | Represents a Shaper in the egress port.<br><b>Tags:</b> atp.Status=obsolete |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                 |   |  |  |
|---------------------------------|---|--|--|
| <b>SWS Item</b>                 | [ECUC_EthSwT_00042] (Obsolete)  |  |  |
| <b>Parameter Name</b>           | EthSwTPortShaperIdleSlope   |  |  |
| <b>Parent Container</b>         | <a href="#">EthSwTPortShaper</a>  |  |  |
| <b>Description</b>              | Defines the increase of credit in bits per second for the AVB shaper.<br><b>Tags:</b> atp.Status=obsolete |  |  |
| <b>Multiplicity</b>             | 0..1  |  |  |
| <b>Type</b>                     | EcucIntegerParamDef   |  |  |
| <b>Range</b>                    | 0 .. 18446744073709551615   |  |  |
| <b>Default value</b>            | -   |  |  |
| <b>Post-Build Variant Value</b> | true  |  |  |







|                                  |                         |   |                     |
|----------------------------------|-------------------------|---|---------------------|
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>        | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local            |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwT_00009] (Obsolete)  |   |                     |
| <b>Parameter Name</b>            | EthSwTPortEgressPredecessorFifoRef  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwTPortShaper</a>  |   |                     |
| <b>Description</b>               | Reference to the fifo which is the predecessor for this shaper.<br><b>Tags:</b> atp.Status=obsolete |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | Reference to <a href="#">EthSwTPortFifo</a>   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.14 EthSwTPortIngress

|                                 |   |  |  |
|---------------------------------|---|--|--|
| <b>SWS Item</b>                 | [ECUC_EthSwT_00014]   |  |  |
| <b>Container Name</b>           | EthSwTPortIngress   |  |  |
| <b>Parent Container</b>         | <a href="#">EthSwTPort</a>                                  |  |  |
| <b>Description</b>              | Configuration of one Ethernet Switch Port ingress behavior. |  |  |
| <b>Configuration Parameters</b> |   |  |  |

|   |                                   |   |                     |
|---|-----------------------------------|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00096]               |   |                     |
| <b>Parameter Name</b>                   | EthSwTPortIngressDefaultPriority  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwTPortIngress</a> |   |                     |
| <b>Description</b>                      | Default priority for ingress.     |   |                     |
| <b>Multiplicity</b>                     | 0..1                              |   |                     |
| <b>Type</b>                             | EcucIntegerParamDef               |   |                     |
| <b>Range</b>                            | 0 .. 7                            |   |                     |
| <b>Default value</b>                    | 0                                 |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                              |   |                     |
| <b>Post-Build Variant Value</b>         | true                              |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>           | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>                  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>            | X | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>           | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>                  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>            | X | VARIANT-POST-BUILD  |





|                           |   |
|---------------------------|---|
| <b>Scope / Dependency</b> | scope: local<br>dependency: If EthSwPortIngressDefaultPriority is configured (multiplicity set to 1) then EthSwPortIngressDefaultVlan shall be configured. If EthSwPortIngressDefaultVlan is configured EthSwPortIngressDropUntagged shall be set to FALSE. |
|---------------------------|---|

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwT_00095]</b>  |   |                     |
| <b>Parameter Name</b>                   | EthSwPortIngressDefaultVlan   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwPortIngress</a>  |   |                     |
| <b>Description</b>                      | Default VLAN for ingress.   |   |                     |
| <b>Multiplicity</b>                     | 0..1  |   |                     |
| <b>Type</b>                             | EcucIntegerParamDef   |   |                     |
| <b>Range</b>                            | 0 .. 4094   |   |                     |
| <b>Default value</b>                    | 1   |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Post-Build Variant Value</b>         | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: If EthSwPortIngressDefaultVlan is configured (multiplicity set to 1) then EthSwPortIngressDefaultPriority shall be configured. If EthSwPortIngressDefaultVlan is configured EthSwPortIngressDropUntagged shall be set to FALSE. |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00097]</b>  |   |                     |
| <b>Parameter Name</b>            | EthSwPortIngressDropUntagged  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwPortIngress</a>  |   |                     |
| <b>Description</b>               | Defines the ingress behavior for untagged frames.   |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucBooleanParamDef   |   |                     |
| <b>Default value</b>             | false   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local<br>dependency: If EthSwPortIngressDropUntagged is set to TRUE then EthSwPortIngressDefaultVlan and EthSwPortIngressDefaultPriority parameters shall not be configured. |   |                     |

|                         |                                  |  |  |
|-------------------------|----------------------------------|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00015]</b>       |  |  |
| <b>Parameter Name</b>   | EthSwPortIngressVlanModification |  |  |
| <b>Parent Container</b> | <a href="#">EthSwPortIngress</a> |  |  |






|   |  |   |                     |
|---|--|---|---------------------|
| <b>Description</b>                      | <p>If this parameter is defined all messages which arrive at this ingress port will be tagged with this VLAN Id. This tagging happen also if the arriving message already has a VLAN Id, it will be overwritten by the defined one.</p> <p>If this parameter is not defined no changes to the VLAN Id shall happen at this ingress port.</p> |   |                     |
| <b>Multiplicity</b>                     | 0..1   |   |                     |
| <b>Type</b>                             | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                            | 0 .. 4095  |   |                     |
| <b>Default value</b>                    | -  |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Post-Build Variant Value</b>         | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: ECU   |   |                     |

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00023]  |   |                     |
| <b>Parameter Name</b>                   | EthSwtPortTrafficClassAssignment   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtPortIngress</a>  |   |                     |
| <b>Description</b>                      | <p>If this parameter is defined all arriving messages at this ingress port shall be assigned this traffic class.</p> <p>If this parameter is not defined no general port based traffic class assignment is done.</p> |   |                     |
| <b>Multiplicity</b>                     | 0..1   |   |                     |
| <b>Type</b>                             | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                            | 0 .. 7   |   |                     |
| <b>Default value</b>                    | -  |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Post-Build Variant Value</b>         | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: ECU   |   |                     |

| Included Containers                                       |              |   |
|---|--------------|---|
| Container Name  | Multiplicity | Scope / Dependency  |
| <a href="#">EthSwtPortIngressScheduler</a>                | 0..*         | Represents a Scheduler configuration at an ingress port.<br><b>Tags:</b> atp.Status=draft   |
| <a href="#">EthSwtPortOutboundVlanPriority Assignment</a> | 0..8         | Defines a priority mapping from a regenerated VLAN priority (EthSwtPriorityRegeneratedIngressVlanPriority) to an outbound VLAN priority (EthSwtPriorityOutboundVlanPriority).<br><br>The EthSwtPortOutboundVlanPriorityAssignment is optional. The outbound priority mapping shall only be performed if EthSwtPortOutboundVlanPriorityAssignment is configured.<br><br>In case an EthSwtPortOutboundVlanPriorityAssignment is defined it shall have 8 mappings, one for each priority.<br><b>Tags:</b> atp.Status=draft |
| <a href="#">EthSwtPortPolicer</a>                         | 0..32760     | Definition of Rate Policing parameters.<br><b>Tags:</b> atp.Status=obsolete   |
| <a href="#">EthSwtPriorityRegeneration</a>                | 0..8         | Defines a priority regeneration where the EthSwtPriorityRegenerationIngressPriority is replaced by EthSwtPriorityRegenerationRegeneratedPriority.<br><br>The EthSwtPriorityRegeneration is optional in case no priority regeneration shall be performed.<br><br>In case a EthSwtPriorityRegeneration is defined it shall have 8 mappings, one for each priority.  |
| <a href="#">EthSwtPriorityTrafficClass Assignment</a>     | 0..8         | Defines a priority based traffic class assignment. All messages with a specific priority (EthSwtPriorityTrafficClassAssignmentPriority) arriving at this ingress port or, if enabled regenerated priorities (EthSwtPriorityRegeneration), shall be assigned to a traffic class (EthSwtPriorityTrafficClassAssignmentTrafficClass).  |

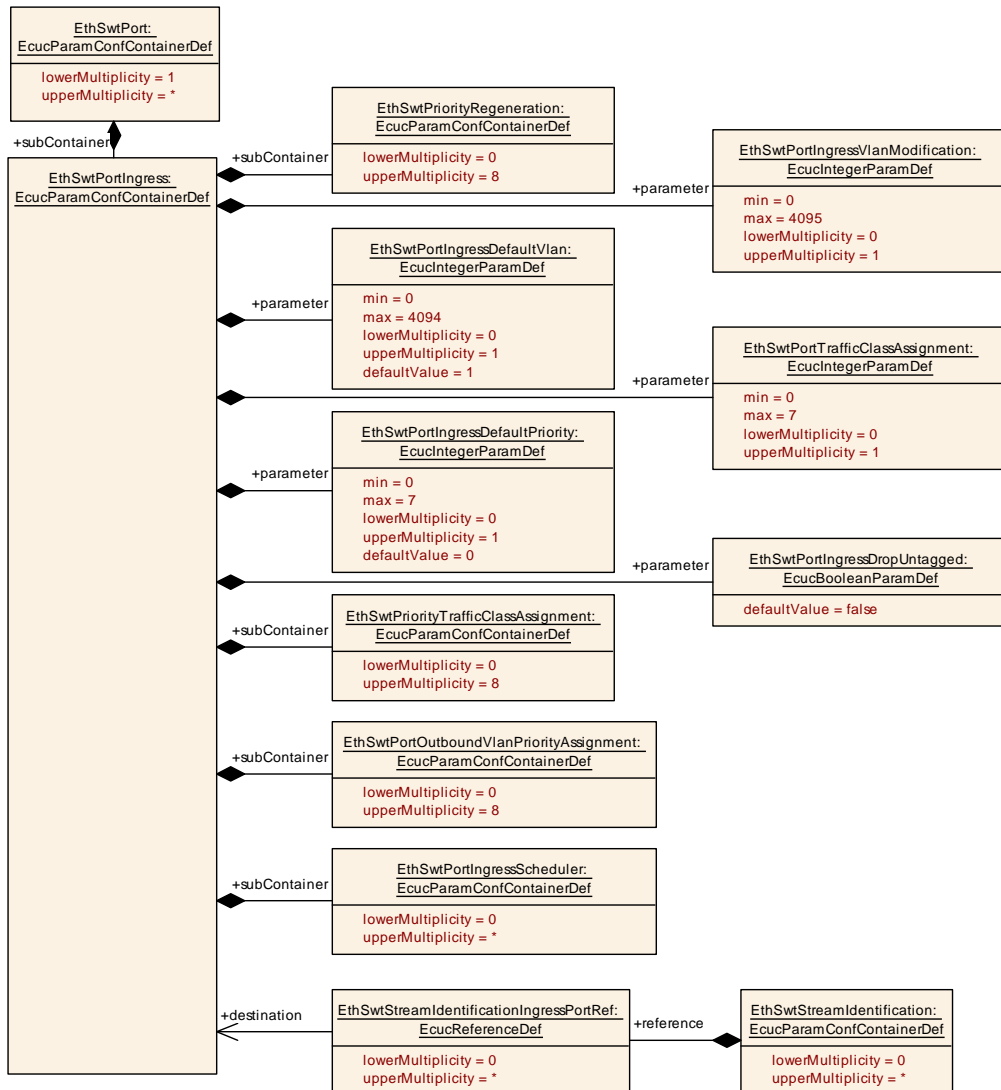

**Figure 10.7: EthSwtPortIngress**

### 10.1.15 EthSwtPortIngressScheduler

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00139]   |   |                     |
| <b>Container Name</b>                   | EthSwtPortIngressScheduler  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtPortIngress</a>   |   |                     |
| <b>Description</b>                      | Represents a Scheduler configuration at an ingress port.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

| Included Containers                        |              |  |
|--|--------------|--|
| Container Name                             | Multiplicity | Scope / Dependency   |
| <a href="#">EthSwPortATSSchedulerGroup</a> | 0..*         | Represents an Asynchronous Traffic Scheduler Group configuration.<br><b>Tags:</b> atp.Status=draft |

### 10.1.16 EthSwPortATSSchedulerGroup

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00194]  |   |                     |
| <b>Container Name</b>                   | EthSwPortATSSchedulerGroup   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwPortIngressScheduler</a>  |   |                     |
| <b>Description</b>                      | Represents an Asynchronous Traffic Scheduler Group configuration.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwT_00195]   |   |              |
| <b>Parameter Name</b>            | EthSwATSGroupMaximumResidenceTime   |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwPortATSSchedulerGroup</a>  |   |              |
| <b>Description</b>               | The parameter defines the maximum duration limit for which frames can reside in a bridge in seconds.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucFloatParamDef   |   |              |
| <b>Range</b>                     | ]0 .. INF[  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.17 EthSwPortOutboundVlanPriorityAssignment

|                         |   |
|-------------------------|---|
| <b>SWS Item</b>         | [ECUC_EthSwT_00138]                     |
| <b>Container Name</b>   | EthSwPortOutboundVlanPriorityAssignment |
| <b>Parent Container</b> | <a href="#">EthSwPortIngress</a>        |





|   |  |   |                     |
|---|--|---|---------------------|
| <b>Description</b>                      | <p>Defines a priority mapping from a regenerated VLAN priority (EthSwtpriorityRegeneratedIngressVlanPriority) to an outbound VLAN priority (EthSwtpriorityOutboundVlanPriority).</p> <p>The EthSwtpriorityOutboundVlanPriorityAssignment is optional. The outbound priority mapping shall only be performed if EthSwtpriorityOutboundVlanPriorityAssignment is configured.</p> <p>In case an EthSwtpriorityOutboundVlanPriorityAssignment is defined it shall have 8 mappings, one for each priority.</p> <p><b>Tags:</b> atp.Status=draft</p> |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwtp_00193]</b>  |   |                     |
| <b>Parameter Name</b>            | EthSwtpriorityOutboundVlanPriority   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtpriorityOutboundVlanPriorityAssignment</a>   |   |                     |
| <b>Description</b>               | <p>Message priority the outgoing message will be tagged with.</p> <p>Note: This parameter maps IEEE802.1Q parameter "ieee8021BridgePortOutboundAccessPriority".</p> <p><b>Tags:</b> atp.Status=draft</p> |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                     | 0 .. 7   |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwtp_00192]</b>   |   |                     |
| <b>Parameter Name</b>            | EthSwtpriorityRegeneratedIngressVlanPriority  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtpriorityOutboundVlanPriorityAssignment</a>  |   |                     |
| <b>Description</b>               | <p>Message priority of the outgoing message.</p> <p>Note: this parameter maps to IEEE802.1Q parameter "ieee8021BridgePortOutboundAccessPriorityEntry".</p> <p><b>Tags:</b> atp.Status=draft</p> |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef   |   |                     |
| <b>Range</b>                     | 0 .. 7  |   |                     |
| <b>Default value</b>             | -   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.18 EthSwtPortPolicer

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00074] (Obsolete)  |   |                     |
| <b>Container Name</b>                   | EthSwtPortPolicer   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtPortIngress</a>   |   |                     |
| <b>Description</b>                      | Definition of Rate Policing parameters.<br><b>Tags:</b> atp.Status=obsolete |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00075] (Obsolete)  |   |                     |
| <b>Parameter Name</b>            | EthSwtPortRatePolicedByteCount  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtPortPolicer</a>   |   |                     |
| <b>Description</b>               | Amount of Byte Counts (excluding Header information) which can be received in a configured EthSwtPortRatePolicedTimeInterval.<br><b>Tags:</b> atp.Status=obsolete |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef   |   |                     |
| <b>Range</b>                     | 1 .. 18446744073709551615   |   |                     |
| <b>Default value</b>             | -   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00077] (Obsolete)   |   |                     |
| <b>Parameter Name</b>                   | EthSwtPortRatePolicedPriority  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtPortPolicer</a>  |   |                     |
| <b>Description</b>                      | Defines the priority which this rate policy shall be limited on. If no priority is given this rate policy is not considering priority.<br><b>Tags:</b> atp.Status=obsolete |   |                     |
| <b>Multiplicity</b>                     | 0..1   |   |                     |
| <b>Type</b>                             | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                            | 0 .. 7   |   |                     |
| <b>Default value</b>                    | -  |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Post-Build Variant Value</b>         | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |







|                           |   |
|---------------------------|---|
| <b>Scope / Dependency</b> | scope: local<br>dependency: If no priority is configured the rate policing only applies to the configured EthSwRateVlanMembershipRef. |
|---------------------------|---|

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00076]</b> (Obsolete)  |   |                     |
| <b>Parameter Name</b>            | EthSwPortRatePolicedTimeInterval   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwPortPolicer</a>   |   |                     |
| <b>Description</b>               | Time interval in seconds where a configured EthSwPortRatePolicedByteCount can be received without a rate limitation.<br><b>Tags:</b> atp.Status=obsolete |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucFloatParamDef  |   |                     |
| <b>Range</b>                     | ]0 .. INF[   |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00078]</b> (Obsolete)   |   |                     |
| <b>Parameter Name</b>            | EthSwPortRateViolationAction  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwPortPolicer</a>  |   |                     |
| <b>Description</b>               | Action to be taken when the rate policy criteria defined for this EthSwPortPolicer are met.<br><b>Tags:</b> atp.Status=obsolete |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucEnumerationParamDef   |   |                     |
| <b>Range</b>                     | BLOCK_SOURCE  | All incoming traffic from the violating Source based on the MAC-Address is blocked.<br><b>Tags:</b> atp.Status=obsolete |                     |
|                                  | DROP_FRAME  | The received frame which led to the violation of the rate policy is dropped.<br><b>Tags:</b> atp.Status=obsolete        |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X   | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X   | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X   | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00081]</b> (Obsolete)  |  |  |
| <b>Parameter Name</b>   | EthSwRateVlanMembershipRef   |  |  |
| <b>Parent Container</b> | <a href="#">EthSwPortPolicer</a>   |  |  |
| <b>Description</b>      | References the Vlans this rate policy shall apply to.<br>If no EthSwRateVlanMembershipRef is configured the rate policing applies only on the configured EthSwPortRatePolicedPriority.<br><b>Tags:</b> atp.Status=obsolete |  |  |
| <b>Multiplicity</b>     | 0..4095  |  |  |





|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| Type                             | Reference to <a href="#">EthSwtVlanMembership</a> |   |                     |
| Post-Build Variant Multiplicity  | true  |   |                     |
| Post-Build Variant Value         | true  |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                  | X | VARIANT-PRE-COMPILE |
|                                  | Link time   | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                   | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                  | X | VARIANT-PRE-COMPILE |
|                                  | Link time   | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                   | X | VARIANT-POST-BUILD  |
| Scope / Dependency               | scope: local                                      |   |                     |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

### 10.1.19 EthSwtPriorityRegeneration

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| SWS Item                         | [ECUC_EthSwt_00057]   |   |                     |
| Container Name                   | EthSwtPriorityRegeneration  |   |                     |
| Parent Container                 | <a href="#">EthSwtPortIngress</a>   |   |                     |
| Description                      | <p>Defines a priority regeneration where the EthSwtPriorityRegenerationIngressPriority is replaced by EthSwtPriorityRegenerationRegeneratedPriority.</p> <p>The EthSwtPriorityRegeneration is optional in case no priority regeneration shall be performed.</p> <p>In case a EthSwtPriorityRegeneration is defined it shall have 8 mappings, one for each priority.</p> |   |                     |
| Post-Build Variant Multiplicity  | true  |   |                     |
| Multiplicity Configuration Class | Pre-compile time  | X | VARIANT-PRE-COMPILE |
|                                  | Link time   | X | VARIANT-LINK-TIME   |
|                                  | Post-build time   | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |   |   |                     |

|                           |  |   |                     |
|---------------------------|--|---|---------------------|
| SWS Item                  | [ECUC_EthSwt_00058]                        |   |                     |
| Parameter Name            | EthSwtPriorityRegenerationIngressPriority  |   |                     |
| Parent Container          | <a href="#">EthSwtPriorityRegeneration</a> |   |                     |
| Description               | Message priority of the incoming message.  |   |                     |
| Multiplicity              | 1  |   |                     |
| Type                      | EcucIntegerParamDef                        |   |                     |
| Range                     | 0 .. 7                                     |   |                     |
| Default value             | -  |   |                     |
| Post-Build Variant Value  | true                                       |   |                     |
| Value Configuration Class | Pre-compile time                           | X | VARIANT-PRE-COMPILE |
|                           | Link time                                  | X | VARIANT-LINK-TIME   |
|                           | Post-build time                            | X | VARIANT-POST-BUILD  |
| Scope / Dependency        | scope: ECU                                 |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00059]</b>                                 |   |                     |
| <b>Parameter Name</b>            | EthSwtPriorityRegenerationRegeneratedPriority              |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtPriorityRegeneration</a>                 |   |                     |
| <b>Description</b>               | Message priority the incoming message will be tagged with. |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                     | 0 .. 7   |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                    | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>                                     | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: ECU   |   |                     |

No Included Containers

### 10.1.20 EthSwtPriorityTrafficClassAssignment

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00027]</b>   |   |                     |
| <b>Container Name</b>                   | EthSwtPriorityTrafficClassAssignment   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtPortIngress</a>  |   |                     |
| <b>Description</b>                      | Defines a priority based traffic class assignment. All messages with a specific priority (EthSwtPriorityTrafficClassAssignmentPriority) arriving at this ingress port or, if enabled regenerated priorities (EthSwtPriorityRegeneration), shall be assigned to a traffic class (EthSwtPriorityTrafficClassAssignmentTrafficClass). |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00028]</b>                           |   |                     |
| <b>Parameter Name</b>            | EthSwtPriorityTrafficClassAssignmentPriority         |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtPriorityTrafficClassAssignment</a> |   |                     |
| <b>Description</b>               | Message priority.                                    |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef                                  |   |                     |
| <b>Range</b>                     | 0 .. 7   |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                              | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>                                     | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>                               | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: ECU   |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00029]</b>                           |   |                     |
| <b>Parameter Name</b>            | EthSwtPriorityTrafficClassAssignmentTrafficClass     |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtPriorityTrafficClassAssignment</a> |   |                     |
| <b>Description</b>               | Traffic Class value.                                 |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef                                  |   |                     |
| <b>Range</b>                     | 0 .. 7   |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                              | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>                                     | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>                               | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: ECU   |   |                     |

**No Included Containers**

### 10.1.21 EthSwtSpi

|   |   |   |              |
|---|---|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00030]</b>  |   |              |
| <b>Container Name</b>                   | EthSwtSpi   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtConfig</a>                                      |   |              |
| <b>Description</b>                      | Configuration of one Ethernet Switch SPI access (if SPI is used). |   |              |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Configuration Parameters</b>         |   |   |              |

| <b>Included Containers</b>        |                     |   |
|-----------------------------------|---------------------|---|
| <b>Container Name</b>             | <b>Multiplicity</b> | <b>Scope / Dependency</b>   |
| <a href="#">EthSwtSpiSequence</a> | 1..*                | Container gives EthSwt driver information about one SPI sequence. One SPI sequence used by EthSwt driver is in exclusive use for it. No other driver is allowed to access this sequence. EthSwt driver may use one sequence to access n Eth Swt hardware chips of the same type or n sequences are used to access one single EthSwt hardware chip. If a EthSwt hardware has no SPI interface, there is no instance of this container. |

### 10.1.22 EthSwtSpiSequence

|                         |                            |
|-------------------------|----------------------------|
| <b>SWS Item</b>         | <b>[ECUC_EthSwt_00034]</b> |
| <b>Container Name</b>   | EthSwtSpiSequence          |
| <b>Parent Container</b> | <a href="#">EthSwtSpi</a>  |





|   |  |   |              |
|---|--|---|--------------|
| <b>Description</b>                      | Container gives EthSwt driver information about one SPI sequence. One SPI sequence used by EthSwt driver is in exclusive use for it. No other driver is allowed to access this sequence. EthSwt driver may use one sequence to access n EthSwt hardware chips of the same type or n sequences are used to access one single EthSwt hardware chip. If a EthSwt hardware has no SPI interface, there is no instance of this container. |   |              |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Configuration Parameters</b>         |  |   |              |

|   |  |   |              |
|---|--|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00036]</b>   |   |              |
| <b>Parameter Name</b>                   | EthSwtSpiAccessSynchronous   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtSpiSequence</a>  |   |              |
| <b>Description</b>                      | This parameter is used to define whether the access to the Spi sequence is synchronous or asynchronous.<br>true: SPI access is synchronous. false: SPI access is asynchronous. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucBooleanParamDef  |   |              |
| <b>Default value</b>                    | –  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |              |
| <b>Post-Build Variant Value</b>         | true   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: ECU   |   |              |

|   |  |   |              |
|---|--|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00035]</b>                           |   |              |
| <b>Parameter Name</b>                   | EthSwtSpiSequenceName                                |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtSpiSequence</a>                    |   |              |
| <b>Description</b>                      | Reference to a Spi sequence configuration container. |   |              |
| <b>Multiplicity</b>                     | 0..*   |   |              |
| <b>Type</b>                             | Symbolic name reference to SpiSequence               |   |              |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |              |
| <b>Post-Build Variant Value</b>         | true   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                              | X | All Variants |
|   | <b>Link time</b>                                     | – |              |
|   | <b>Post-build time</b>                               | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                              | X | All Variants |
|   | <b>Link time</b>                                     | – |              |
|   | <b>Post-build time</b>                               | – |              |
| <b>Scope / Dependency</b>               | scope: ECU   |   |              |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

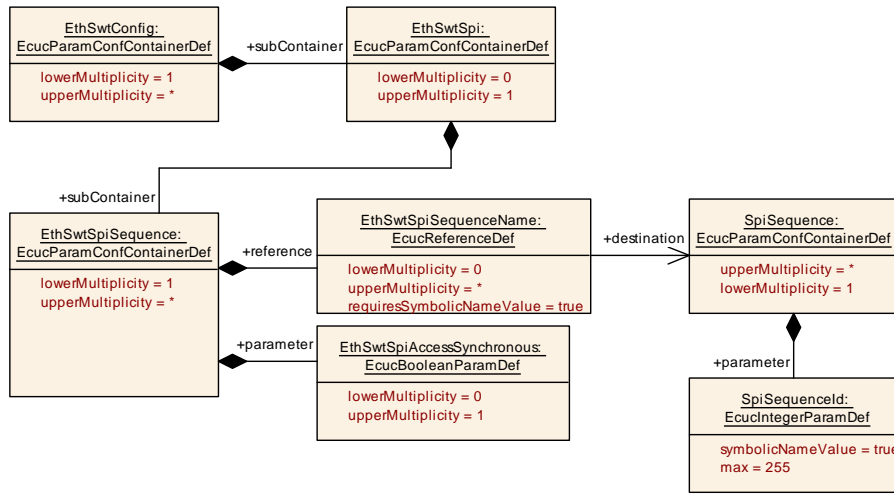


Figure 10.8: EthSwt SPI Interaction

### 10.1.23 EthSwtStreamIdentification

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| SWS Item                         | [ECUC_EthSwt_00140]  |   |                     |
| Container Name                   | EthSwtStreamIdentification   |   |                     |
| Parent Container                 | EthSwtConfig   |   |                     |
| Description                      | Configuration of a stream identification.<br><b>Tags:</b> atp.Status=draft |   |                     |
| Post-Build Variant Multiplicity  | true   |   |                     |
| Multiplicity Configuration Class | Pre-compile time   | X | VARIANT-PRE-COMPILE |
|                                  | Link time  | X | VARIANT-LINK-TIME   |
|                                  | Post-build time  | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |  |   |                     |

|                           |  |   |                     |
|---------------------------|--|---|---------------------|
| SWS Item                  | [ECUC_EthSwt_00142]  |   |                     |
| Parameter Name            | EthSwtStreamIdentificationPosition   |   |                     |
| Parent Container          | EthSwtStreamIdentification   |   |                     |
| Description               | Specifies the position as unique ID within an ordered list of instances of EthSwtStream Identifications. The ordered list shall start with 0 and continue as linear list with no gaps.<br>Note: The list is processed in ascending order. The instance of EthSwtStream Identification with position 0 is processed first.<br><b>Tags:</b> atp.Status=draft |   |                     |
| Multiplicity              | 1  |   |                     |
| Type                      | EcucIntegerParamDef  |   |                     |
| Range                     | 0 .. 65535   |   |                     |
| Default value             | -  |   |                     |
| Post-Build Variant Value  | true   |   |                     |
| Value Configuration Class | Pre-compile time   | X | VARIANT-PRE-COMPILE |
|                           | Link time  | X | VARIANT-LINK-TIME   |
|                           | Post-build time  | X | VARIANT-POST-BUILD  |






|   |   |   |              |
|---|---|---|--------------|
| <b>Scope / Dependency</b>               | scope: ECU  |   |              |
| <b>SWS Item</b>                         | [ECUC_EthSwT_00153]   |   |              |
| <b>Parameter Name</b>                   | EthSwTPortEgressStreamIdentificationEgressPortRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwTStreamIdentification</a>  |   |              |
| <b>Description</b>                      | Reference to the egress ports this stream identification applies to.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>                     | 0..*  |   |              |
| <b>Type</b>                             | Reference to <a href="#">EthSwTPortEgress</a>   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

|   |  |   |              |
|---|--|---|--------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00152]  |   |              |
| <b>Parameter Name</b>                   | EthSwTStreamIdentificationIngressPortRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwTStreamIdentification</a>   |   |              |
| <b>Description</b>                      | Reference to the ingress ports this stream identification applies to.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>                     | 0..*   |   |              |
| <b>Type</b>                             | Reference to <a href="#">EthSwTPortIngress</a>   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

| <b>Included Containers</b>               |                     |   |
|--|---------------------|---|
| <b>Container Name</b>                    | <b>Multiplicity</b> | <b>Scope / Dependency</b>   |
| <a href="#">EthSwTPSFP</a>               | 0..*                | Configuration of Per-stream Filtering and Policing (PSFP).<br><b>Tags:</b> atp.Status=draft                                 |
| <a href="#">EthSwTPortATSScheduler</a>   | 0..1                | Configuration of an Asynchronous Traffic Scheduler configuration in the scope of the PSFP.<br><b>Tags:</b> atp.Status=draft |
| <a href="#">EthSwTStreamFilterAction</a> | 0..1                | Configuration of a stream filter action.<br><b>Tags:</b> atp.Status=draft   |
| <a href="#">EthSwTStreamFilterRule</a>   | 1                   | Configuration of a filter rule.<br><b>Tags:</b> atp.Status=draft  |

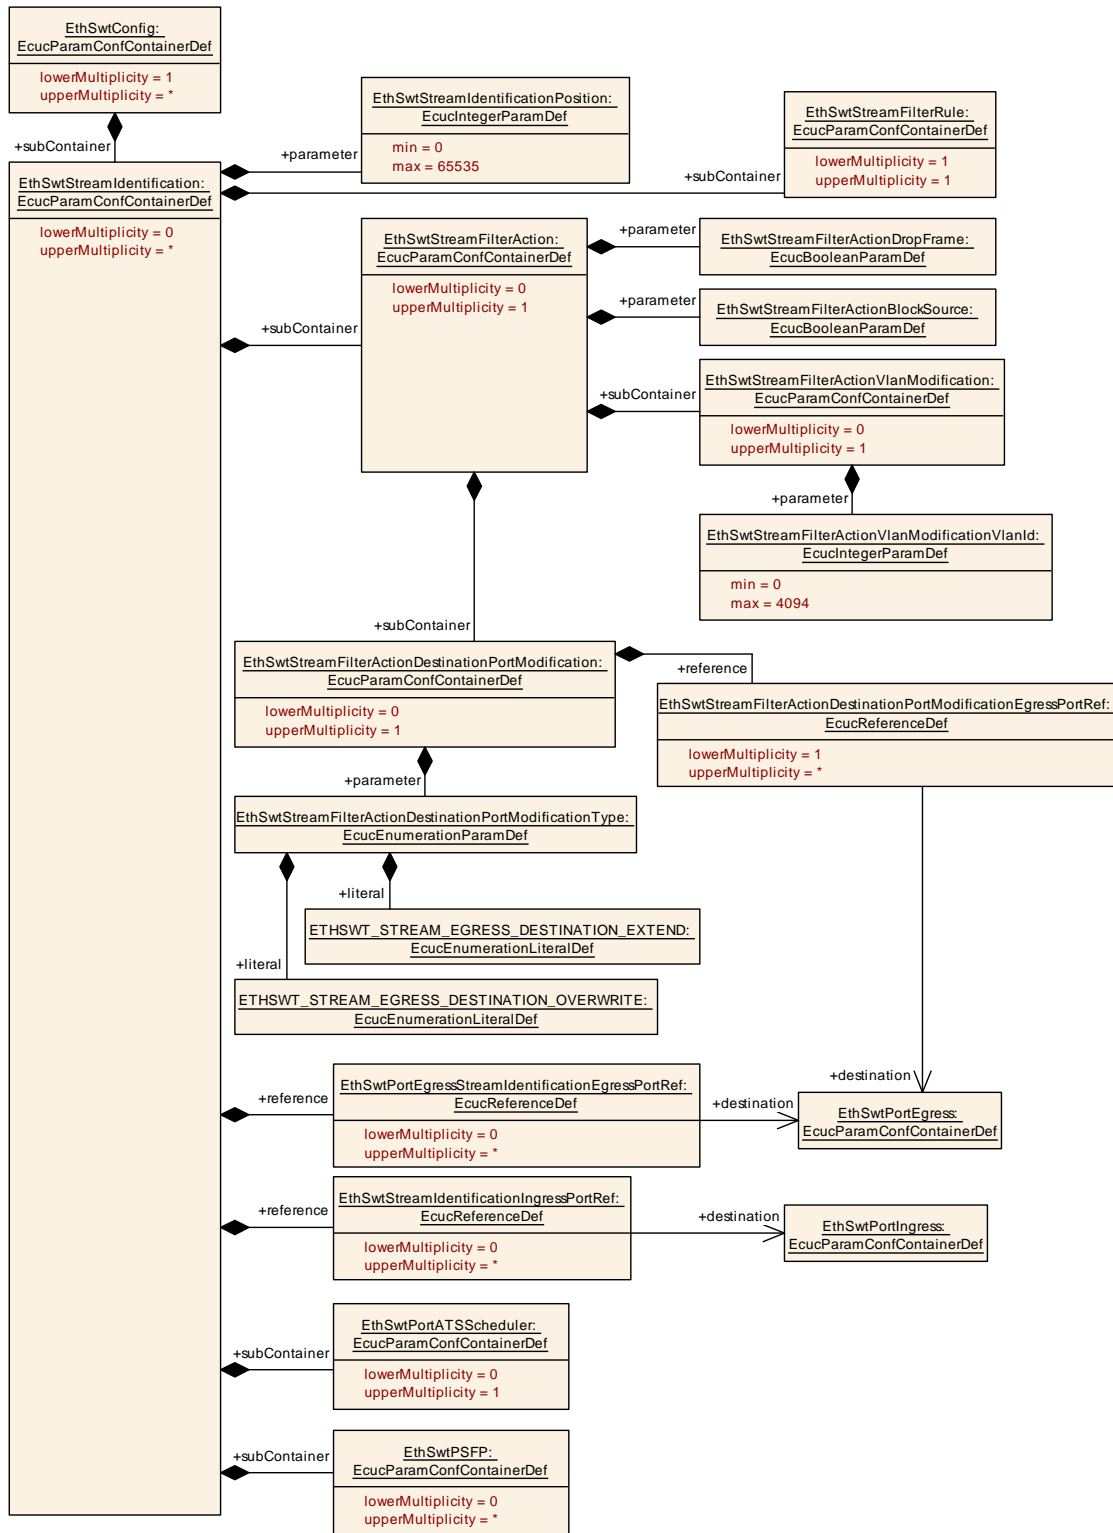

**Figure 10.9: EthSwStreamIdentification**



### 10.1.24 EthSwtPSFP

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00154]   |   |                     |
| <b>Container Name</b>                   | EthSwtPSFP  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamIdentification</a>  |   |                     |
| <b>Description</b>                      | Configuration of Per-stream Filtering and Policing (PSFP).<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

| Included Containers                |              |  |
|------------------------------------|--------------|--|
| Container Name                     | Multiplicity | Scope / Dependency   |
| <a href="#">EthSwtFlowMetering</a> | 0..1         | Configuration of a flow metering.<br><b>Tags:</b> atp.Status=draft |
| <a href="#">EthSwtStreamGate</a>   | 1            | Configuration of a stream gate.<br><b>Tags:</b> atp.Status=draft   |

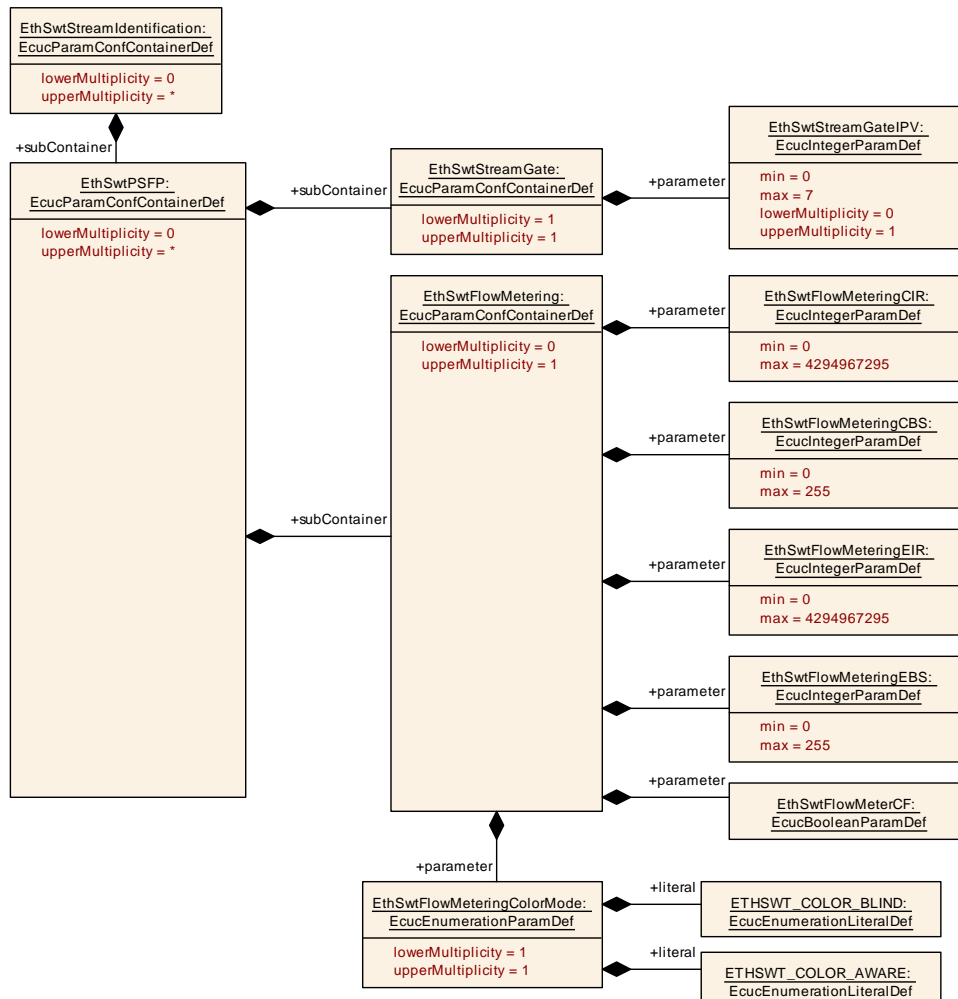


Figure 10.10: EthSwtPSFP

### 10.1.25 EthSwtFlowMetering

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00157]  |   |                     |
| <b>Container Name</b>                   | EthSwtFlowMetering   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtPSFP</a>   |   |                     |
| <b>Description</b>                      | Configuration of a flow metering.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00162]   |   |                     |
| <b>Parameter Name</b>            | EthSwtFlowMeterCF   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtFlowMetering</a>  |   |                     |
| <b>Description</b>               | Coupling Flag that defines if unused "green" tokens in the first bucket are transferred to the second bucket as "yellow" tokens.<br>Note: this parameter maps to IEEE802.1Q parameter "ieee8021PSFPFlowMeterCF".<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucBooleanParamDef   |   |                     |
| <b>Default value</b>             | -   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00159]   |   |              |
| <b>Parameter Name</b>            | EthSwtFlowMeteringCBS   |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtFlowMetering</a>  |   |              |
| <b>Description</b>               | Committed Burst Size (accepted burst size in green token bucket).<br>Note: this parameter maps to IEEE802.1Q parameter "ieee8021PSFPFlowMeterCBS".<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 255  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00158]</b>   |   |              |
| <b>Parameter Name</b>            | EthSwTFlowMeteringCIR  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTFlowMetering</a>   |   |              |
| <b>Description</b>               | Committed Information Rate (accepted rate in green token bucket) in bits per second.<br>Note: this parameter maps to IEEE802.1Q parameter "ieee8021PSFPFlowMeterCIR".<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucIntegerParamDef  |   |              |
| <b>Range</b>                     | 0 .. 4294967295  |   |              |
| <b>Default value</b>             | -  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | - |              |
|                                  | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

|                                  |   |  |                     |
|----------------------------------|---|--|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00163]</b>  |  |                     |
| <b>Parameter Name</b>            | EthSwTFlowMeteringColorMode   |  |                     |
| <b>Parent Container</b>          | <a href="#">EthSwTFlowMetering</a>  |  |                     |
| <b>Description</b>               | Parameter that defines if color-aware or color-blind mode is used. The mode indicates if a color that might be assigned at ingress is used to chose the bucket from which to take tokens; only green and yellow can be assigned; basically, in color-blind mode, all frames are treated like green frames.<br>Note: this parameter maps to IEEE802.1Q parameter "ieee8021PSFPFlowMeterCM".<br><b>Tags:</b> atp.Status=draft |  |                     |
| <b>Multiplicity</b>              | 1   |  |                     |
| <b>Type</b>                      | EcucEnumerationParamDef   |  |                     |
| <b>Range</b>                     | ETHSWT_COLOR_AWARE  | color aware color mode.<br><b>Tags:</b> atp.Status=draft |                     |
|                                  | ETHSWT_COLOR_BLIND  | color blind color mode.<br><b>Tags:</b> atp.Status=draft |                     |
| <b>Post-Build Variant Value</b>  | true  |  |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X  | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X  | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X  | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |  |                     |

|                         |   |  |  |
|-------------------------|---|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00161]</b>  |  |  |
| <b>Parameter Name</b>   | EthSwTFlowMeteringEBS   |  |  |
| <b>Parent Container</b> | <a href="#">EthSwTFlowMetering</a>  |  |  |
| <b>Description</b>      | Excess burst size (accepted burst size in yellow token bucket).<br>Note: this parameter maps to IEEE802.1Q parameter "ieee8021PSFPFlowMeterEBS".<br><b>Tags:</b> atp.Status=draft |  |  |
| <b>Multiplicity</b>     | 1   |  |  |
| <b>Type</b>             | EcucIntegerParamDef   |  |  |
| <b>Range</b>            | 0 .. 255  |  |  |





|                           |                  |   |              |
|---------------------------|------------------|---|--------------|
| Default value             | -                |   |              |
| Post-Build Variant Value  | false            |   |              |
| Value Configuration Class | Pre-compile time | X | All Variants |
|                           | Link time        | - |              |
|                           | Post-build time  | - |              |
| Scope / Dependency        | scope: local     |   |              |

|                           |  |   |              |
|---------------------------|--|---|--------------|
| SWS Item                  | [ECUC_EthSwT_00160]  |   |              |
| Parameter Name            | EthSwTFlowMeteringEIR  |   |              |
| Parent Container          | <a href="#">EthSwTFlowMetering</a>   |   |              |
| Description               | Excess Information Rate (accepted rate in yellow token bucket) in bits per second.<br>Note: this parameter maps to IEEE802.1Q parameter "ieee8021PSFPFlowMeterEIR".<br><b>Tags:</b> atp.Status=draft |   |              |
| Multiplicity              | 1  |   |              |
| Type                      | EcucIntegerParamDef  |   |              |
| Range                     | 0 .. 4294967295  |   |              |
| Default value             | -  |   |              |
| Post-Build Variant Value  | false  |   |              |
| Value Configuration Class | Pre-compile time   | X | All Variants |
|                           | Link time  | - |              |
|                           | Post-build time  | - |              |
| Scope / Dependency        | scope: local   |   |              |

No Included Containers

### 10.1.26 EthSwTStreamGate

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| SWS Item                         | [ECUC_EthSwT_00155]  |   |                     |
| Container Name                   | EthSwTStreamGate   |   |                     |
| Parent Container                 | <a href="#">EthSwTPSFP</a>                                       |   |                     |
| Description                      | Configuration of a stream gate.<br><b>Tags:</b> atp.Status=draft |   |                     |
| Post-Build Variant Multiplicity  | true   |   |                     |
| Multiplicity Configuration Class | Pre-compile time   | X | VARIANT-PRE-COMPILE |
|                                  | Link time  | X | VARIANT-LINK-TIME   |
|                                  | Post-build time  | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |  |   |                     |

|                  |                                  |  |  |
|------------------|----------------------------------|--|--|
| SWS Item         | [ECUC_EthSwT_00156]              |  |  |
| Parameter Name   | EthSwTStreamGateIPV              |  |  |
| Parent Container | <a href="#">EthSwTStreamGate</a> |  |  |





|   |   |   |              |
|---|---|---|--------------|
| <b>Description</b>                      | Internal Priority Value (IPV), a priority value that determines the assigned traffic class.<br>Note: Only the least 3 significant bits shall be configured. The remaining bits shall be ignored.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 0 .. 7  |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

No Included Containers

### 10.1.27 EthSwtPortATSScheduler

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00151]   |   |                     |
| <b>Container Name</b>                   | EthSwtPortATSScheduler  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamIdentification</a>  |   |                     |
| <b>Description</b>                      | Configuration of an Asynchronous Traffic Scheduler configuration in the scope of the PSFP.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                 |  |  |  |
|---------------------------------|--|--|--|
| <b>SWS Item</b>                 | [ECUC_EthSwt_00197]  |  |  |
| <b>Parameter Name</b>           | EthSwtPortATSCommittedBurstSize  |  |  |
| <b>Parent Container</b>         | <a href="#">EthSwtPortATSScheduler</a>                                       |  |  |
| <b>Description</b>              | Maximum token capacity of the token bucket.<br><b>Tags:</b> atp.Status=draft |  |  |
| <b>Multiplicity</b>             | 1  |  |  |
| <b>Type</b>                     | EcucIntegerParamDef  |  |  |
| <b>Range</b>                    | 0 .. 18446744073709551615  |  |  |
| <b>Default value</b>            | -  |  |  |
| <b>Post-Build Variant Value</b> | true   |  |  |





|                                  |                         |   |                     |
|----------------------------------|-------------------------|---|---------------------|
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>        | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local            |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwT_00198]  |   |                     |
| <b>Parameter Name</b>            | EthSwTPortATSCommittedInformationRate  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwTPortATSScheduler</a>   |   |                     |
| <b>Description</b>               | Defines the rate at which the token bucket is refilled with tokens.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef  |   |                     |
| <b>Range</b>                     | 0 .. 18446744073709551615  |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwT_00196]  |   |              |
| <b>Parameter Name</b>            | EthSwTPortATSSchedulerGroupRef   |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTPortATSScheduler</a>   |   |              |
| <b>Description</b>               | Defines to which ATS scheduler group this ATS scheduler belongs to.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | Reference to <a href="#">EthSwTPortATSSchedulerGroup</a>   |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | - |              |
|                                  | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

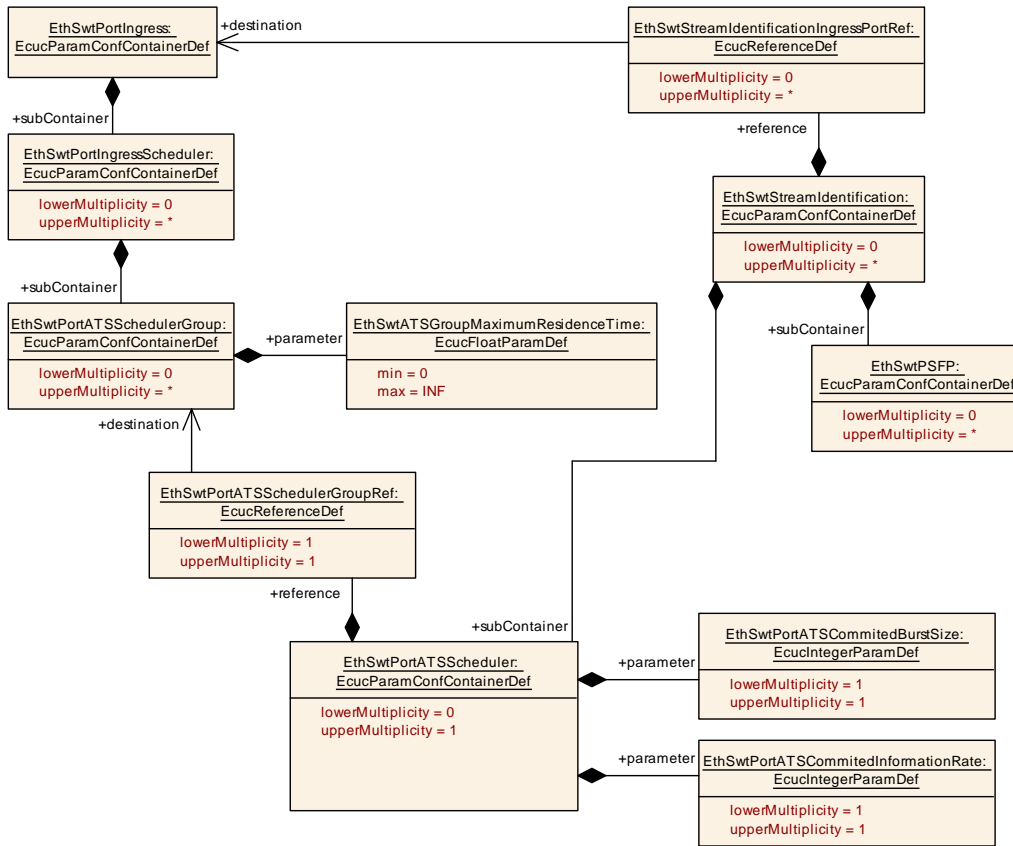


Figure 10.11: EthSwtPortEgressShaperATS

### 10.1.28 EthSwtStreamFilterAction

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| SWS Item                         | [ECUC_EthSwt_00143]   |   |              |
| Container Name                   | EthSwtStreamFilterAction  |   |              |
| Parent Container                 | <a href="#">EthSwtStreamIdentification</a>                                |   |              |
| Description                      | Configuration of a stream filter action.<br><b>Tags:</b> atp.Status=draft |   |              |
| Post-Build Variant Multiplicity  | false   |   |              |
| Multiplicity Configuration Class | Pre-compile time  | X | All Variants |
|                                  | Link time   | – |              |
|                                  | Post-build time   | – |              |
| Configuration Parameters         |   |   |              |

|                  |  |  |  |
|------------------|--|--|--|
| SWS Item         | [ECUC_EthSwt_00145]  |  |  |
| Parameter Name   | EthSwtStreamFilterActionBlockSource  |  |  |
| Parent Container | <a href="#">EthSwtStreamFilterAction</a>   |  |  |
| Description      | Enables Blocking all frames from the MAC address.<br><b>Tags:</b> atp.Status=draft |  |  |
| Multiplicity     | 1  |  |  |





|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
| <b>Type</b>                      | EcucBooleanParamDef     |   |              |
| <b>Default value</b>             | –                       |   |              |
| <b>Post-Build Variant Value</b>  | false                   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwT_00144]   |   |              |
| <b>Parameter Name</b>            | EthSwTStreamFilterActionDropFrame                           |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTStreamFilterAction</a>                    |   |              |
| <b>Description</b>               | Enables Drop Frame action.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef   |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                     | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>                                      | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

| Included Containers   |              |   |
|---|--------------|---|
| Container Name  | Multiplicity | Scope / Dependency  |
| <a href="#">EthSwTStreamFilterActionDestinationPortModification</a> | 0..1         | Defines the action to modify the destination port(s) determined by the frame forwarding process for an particular Ethernet frame. Either the egress destination of an Ethernet frame is extended or overwritten.<br><b>Tags:</b> atp.Status=draft |
| <a href="#">EthSwTStreamFilterActionVlanModification</a>            | 0..1         | Defines the action to modify the VLAN-ID within a VLAN tag of an Ethernet frame.<br><b>Tags:</b> atp.Status=draft   |

### 10.1.29 EthSwTStreamFilterActionDestinationPortModification

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00148]   |   |                     |
| <b>Container Name</b>                   | EthSwTStreamFilterActionDestinationPortModification   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwTStreamFilterAction</a>  |   |                     |
| <b>Description</b>                      | Defines the action to modify the destination port(s) determined by the frame forwarding process for an particular Ethernet frame. Either the egress destination of an Ethernet frame is extended or overwritten.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |







**Configuration Parameters**

|                                  |   |  |              |
|----------------------------------|---|--|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00150]</b>  |  |              |
| <b>Parameter Name</b>            | EthSwTStreamFilterActionDestinationPortModificationType   |  |              |
| <b>Parent Container</b>          | <a href="#">EthSwTStreamFilterActionDestinationPortModification</a>   |  |              |
| <b>Description</b>               | <p>Defines the method to modify the egress destination. Either overwrite or extend the egress destination.</p> <p><b>Tags:</b> atp.Status=draft</p> |  |              |
| <b>Multiplicity</b>              | 1   |  |              |
| <b>Type</b>                      | EcucEnumerationParamDef   |  |              |
| <b>Range</b>                     | ETHSWT_STREAM_EGRESS_DESTINATION_EXTEND   | extend the egress destination of an Ethernet frame.    |              |
|                                  | ETHSWT_STREAM_EGRESS_DESTINATION_OVERWRITE  | overwrite the egress destination of an Ethernet frame. |              |
|                                  |   | <b>Tags:</b> atp.Status=draft                          |              |
| <b>Post-Build Variant Value</b>  | false   |  |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X  | All Variants |
|                                  | <b>Link time</b>  | –  |              |
|                                  | <b>Post-build time</b>  | –  |              |
| <b>Scope / Dependency</b>        | scope: local  |  |              |

|   |   |   |              |
|---|---|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwT_00149]</b>  |   |              |
| <b>Parameter Name</b>                   | EthSwTStreamFilterActionDestinationPortModificationEgressPortRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwTStreamFilterActionDestinationPortModification</a>   |   |              |
| <b>Description</b>                      | <p>Defines a set of destination ports (egress ports) used for the modification of the egress destination of an Ethernet frame.</p> <p><b>Tags:</b> atp.Status=draft</p> |   |              |
| <b>Multiplicity</b>                     | 1..*  |   |              |
| <b>Type</b>                             | Reference to <a href="#">EthSwTPortEgress</a>   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

**No Included Containers**

### 10.1.30 EthSwtStreamFilterActionVlanModification

|   |   |   |              |
|---|---|---|--------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00146]   |   |              |
| <b>Container Name</b>                   | EthSwtStreamFilterActionVlanModification  |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterAction</a>  |   |              |
| <b>Description</b>                      | Defines the action to modify the VLAN-ID within a VLAN tag of an Ethernet frame.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Configuration Parameters</b>         |   |   |              |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00147]   |   |                     |
| <b>Parameter Name</b>            | EthSwtStreamFilterActionVlanModificationVlanId  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterActionVlanModification</a>  |   |                     |
| <b>Description</b>               | Defines the VLAN-ID to modify the existing VLAN-ID within the VLAN tag of an Ethernet frame.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef   |   |                     |
| <b>Range</b>                     | 0 .. 4094   |   |                     |
| <b>Default value</b>             | –   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.31 EthSwtStreamFilterRule

|                                 |  |  |  |
|---------------------------------|--|--|--|
| <b>SWS Item</b>                 | [ECUC_EthSwt_00141]  |  |  |
| <b>Container Name</b>           | EthSwtStreamFilterRule   |  |  |
| <b>Parent Container</b>         | <a href="#">EthSwtStreamIdentification</a>                       |  |  |
| <b>Description</b>              | Configuration of a filter rule.<br><b>Tags:</b> atp.Status=draft |  |  |
| <b>Configuration Parameters</b> |  |  |  |

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>SWS Item</b>         | [ECUC_EthSwt_00170]                    |  |  |
| <b>Parameter Name</b>   | EthSwtStreamFilterEtherType            |  |  |
| <b>Parent Container</b> | <a href="#">EthSwtStreamFilterRule</a> |  |  |





|   |   |   |              |
|---|---|---|--------------|
| <b>Description</b>                      | Definition of the filter Ether Type.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>                     | 0..*  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 0 .. 65535  |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00181]   |   |                     |
| <b>Parameter Name</b>                   | EthSwTStreamFilterIEEE1722StreamId  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwTStreamFilterRule</a>  |   |                     |
| <b>Description</b>                      | Definition of the filter IEEE1722 Stream Id. Specifies a 64 bit Stream Id.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>                     | 0..*  |   |                     |
| <b>Type</b>                             | EcucStringParamDef  |   |                     |
| <b>Default value</b>                    | -   |   |                     |
| <b>Regular Expression</b>               | -   |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |                     |
| <b>Post-Build Variant Value</b>         | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants        |
|   | <b>Link time</b>  | - |                     |
|   | <b>Post-build time</b>  | - |                     |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: local  |   |                     |

|  |  |  |  |
|--|--|--|--|
| <b>SWS Item</b>                        | [ECUC_EthSwT_00168]  |  |  |
| <b>Parameter Name</b>                  | EthSwTStreamFilterVlanId   |  |  |
| <b>Parent Container</b>                | <a href="#">EthSwTStreamFilterRule</a>                             |  |  |
| <b>Description</b>                     | Definition of the filter VLAN ID.<br><b>Tags:</b> atp.Status=draft |  |  |
| <b>Multiplicity</b>                    | 0..*   |  |  |
| <b>Type</b>                            | EcucIntegerParamDef  |  |  |
| <b>Range</b>                           | 0 .. 4094  |  |  |
| <b>Default value</b>                   | -  |  |  |
| <b>Post-Build Variant Multiplicity</b> | false  |  |  |
| <b>Post-Build Variant Value</b>        | false  |  |  |






|   |                         |   |              |
|---|-------------------------|---|--------------|
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local            |   |              |

|   |  |   |              |
|---|--|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00169]</b>   |   |              |
| <b>Parameter Name</b>                   | EthSwtStreamFilterVlanPriority   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterRule</a>                                   |   |              |
| <b>Description</b>                      | Definition of the filter VLAN Priority.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>                     | 0..*   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 0 .. 7   |   |              |
| <b>Default value</b>                    | –  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

| <b>Included Containers</b>                        |                     |  |
|---|---------------------|--|
| <b>Container Name</b>                             | <b>Multiplicity</b> | <b>Scope / Dependency</b>  |
| <a href="#">EthSwtStreamFilterIPDestAddress</a>   | 0..*                | Configuration of one IP destination filter.<br><b>Tags:</b> atp.Status=draft     |
| <a href="#">EthSwtStreamFilterIPSrcAddress</a>    | 0..*                | Configuration of one IP source filter.<br><b>Tags:</b> atp.Status=draft          |
| <a href="#">EthSwtStreamFilterMACDest Address</a> | 0..*                | Configuration of one MAC destination filter.<br><b>Tags:</b> atp.Status=draft    |
| <a href="#">EthSwtStreamFilterMACSrc Address</a>  | 0..*                | Configuration of one MAC source filter.<br><b>Tags:</b> atp.Status=draft         |
| <a href="#">EthSwtStreamFilterTcpDestPort</a>     | 0..*                | Configuration of a TCP destination port filter.<br><b>Tags:</b> atp.Status=draft |
| <a href="#">EthSwtStreamFilterTcpSrcPort</a>      | 0..*                | Configuration of a TCP source port filter.<br><b>Tags:</b> atp.Status=draft      |
| <a href="#">EthSwtStreamFilterUdpDestPort</a>     | 0..*                | Configuration of a UDP destination port filter.<br><b>Tags:</b> atp.Status=draft |
| <a href="#">EthSwtStreamFilterUdpSrcPort</a>      | 0..*                | Configuration of a UDP source port filter.<br><b>Tags:</b> atp.Status=draft      |

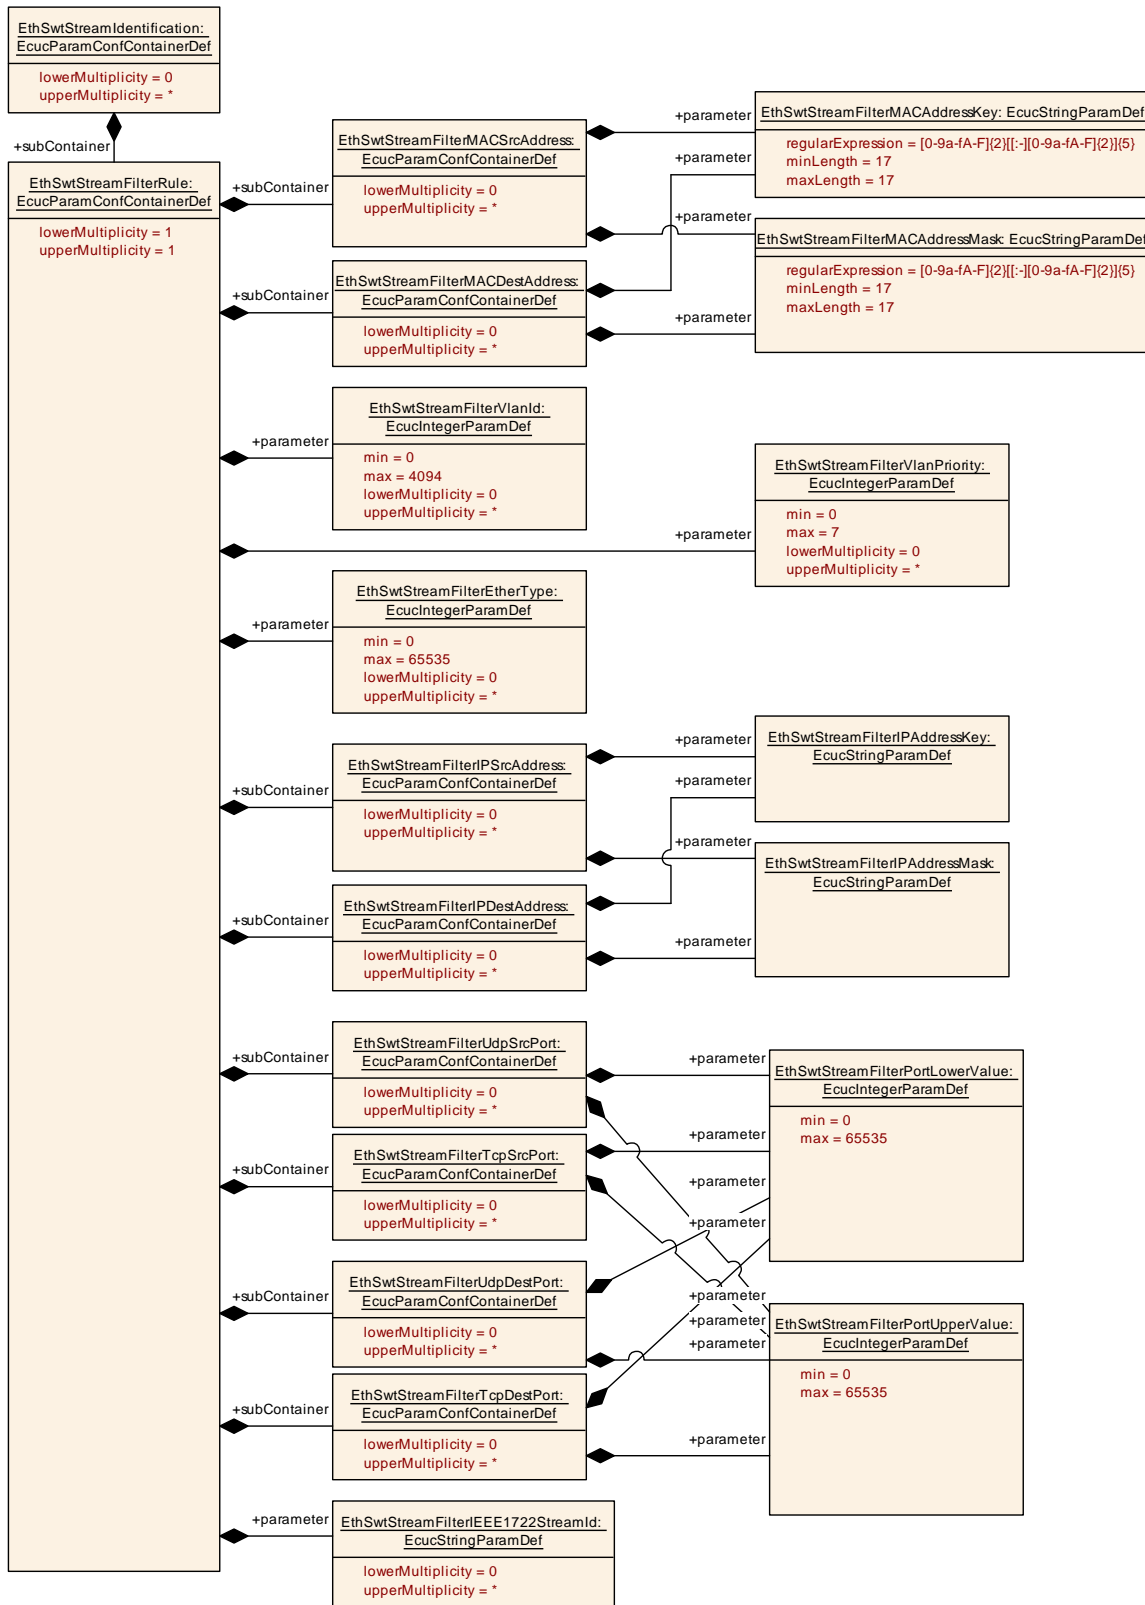

**Figure 10.12: EthSwtStreamFilterRule**

### 10.1.32 EthSwtStreamFilterIPDestAddress

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00172]  |   |                     |
| <b>Container Name</b>                   | EthSwtStreamFilterIPDestAddress  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterRule</a>                                       |   |                     |
| <b>Description</b>                      | Configuration of one IP destination filter.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00173]                                      |   |                     |
| <b>Parameter Name</b>            | EthSwtStreamFilterIPAddressKey                           |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterIPDestAddress</a>          |   |                     |
| <b>Description</b>               | IP address key pattern.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucStringParamDef                                       |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Regular Expression</b>        | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>                                   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00174]                                       |   |                     |
| <b>Parameter Name</b>            | EthSwtStreamFilterIPAddressMask                           |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterIPDestAddress</a>           |   |                     |
| <b>Description</b>               | IP address mask pattern.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucStringParamDef  |   |                     |
| <b>Default value</b>             | -   |   |                     |
| <b>Regular Expression</b>        | -   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>                                    | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.33 EthSwtStreamFilterIPSrcAddress

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00171]   |   |                     |
| <b>Container Name</b>                   | EthSwtStreamFilterIPSrcAddress  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterRule</a>                                  |   |                     |
| <b>Description</b>                      | Configuration of one IP source filter.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00173]                                      |   |                     |
| <b>Parameter Name</b>            | EthSwtStreamFilterIPAddressKey                           |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterIPSrcAddress</a>           |   |                     |
| <b>Description</b>               | IP address key pattern.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucStringParamDef                                       |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Regular Expression</b>        | -  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>                                   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00174]                                       |   |                     |
| <b>Parameter Name</b>            | EthSwtStreamFilterIPAddressMask                           |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterIPSrcAddress</a>            |   |                     |
| <b>Description</b>               | IP address mask pattern.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucStringParamDef  |   |                     |
| <b>Default value</b>             | -   |   |                     |
| <b>Regular Expression</b>        | -   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>                                    | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.34 EthSwtStreamFilterMACDestAddress

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00165]   |   |                     |
| <b>Container Name</b>                   | EthSwtStreamFilterMACDestAddress  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterRule</a>  |   |                     |
| <b>Description</b>                      | Configuration of one MAC destination filter.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00166]   |   |                     |
| <b>Parameter Name</b>            | EthSwtStreamFilterMACAddressKey   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterMACDestAddress</a>  |   |                     |
| <b>Description</b>               | Specifies the 48-bit physical address (MAC address) key value.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucStringParamDef  |   |                     |
| <b>Default value</b>             | -   |   |                     |
| <b>Length</b>                    | 17-17   |   |                     |
| <b>Regular Expression</b>        | [0-9a-fA-F]{2}[:-][0-9a-fA-F]{2}{5}   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00167]  |   |                     |
| <b>Parameter Name</b>            | EthSwtStreamFilterMACAddressMask   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterMACDestAddress</a>   |   |                     |
| <b>Description</b>               | Specifies the 48-bit physical address (MAC address) mask value.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucStringParamDef   |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Length</b>                    | 17-17  |   |                     |
| <b>Regular Expression</b>        | [0-9a-fA-F]{2}[:-][0-9a-fA-F]{2}{5}  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|



### 10.1.35 EthSwtStreamFilterMACSrcAddress

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00164]  |   |                     |
| <b>Container Name</b>                   | EthSwtStreamFilterMACSrcAddress  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterRule</a>                                   |   |                     |
| <b>Description</b>                      | Configuration of one MAC source filter.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00166]   |   |                     |
| <b>Parameter Name</b>            | EthSwtStreamFilterMACAddressKey   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterMACSrcAddress</a>   |   |                     |
| <b>Description</b>               | Specifies the 48-bit physical address (MAC address) key value.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucStringParamDef  |   |                     |
| <b>Default value</b>             | -   |   |                     |
| <b>Length</b>                    | 17-17   |   |                     |
| <b>Regular Expression</b>        | [0-9a-fA-F]{2}[[:-][0-9a-fA-F]{2}]{5}   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local  |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00167]  |   |                     |
| <b>Parameter Name</b>            | EthSwtStreamFilterMACAddressMask   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterMACSrcAddress</a>  |   |                     |
| <b>Description</b>               | Specifies the 48-bit physical address (MAC address) mask value.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucStringParamDef   |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Length</b>                    | 17-17  |   |                     |
| <b>Regular Expression</b>        | [0-9a-fA-F]{2}[[:-][0-9a-fA-F]{2}]{5}  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: local   |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.36 EthSwtStreamFilterTcpDestPort

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00178]  |   |                     |
| <b>Container Name</b>                   | EthSwtStreamFilterTcpDestPort  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterRule</a>   |   |                     |
| <b>Description</b>                      | Configuration of a TCP destination port filter.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00179]   |   |              |
| <b>Parameter Name</b>            | EthSwtStreamFilterPortLowerValue  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterTcpDestPort</a>                               |   |              |
| <b>Description</b>               | Definition of the filter port lower value.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 65535  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00180]   |   |              |
| <b>Parameter Name</b>            | EthSwtStreamFilterPortUpperValue  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterTcpDestPort</a>                               |   |              |
| <b>Description</b>               | Definition of the filter port upper value.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 65535  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.37 EthSwtStreamFilterTcpSrcPort

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00176]   |   |                     |
| <b>Container Name</b>                   | EthSwtStreamFilterTcpSrcPort  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterRule</a>                                      |   |                     |
| <b>Description</b>                      | Configuration of a TCP source port filter.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00179]   |   |              |
| <b>Parameter Name</b>            | EthSwtStreamFilterPortLowerValue  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterTcpSrcPort</a>                                |   |              |
| <b>Description</b>               | Definition of the filter port lower value.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 65535  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00180]   |   |              |
| <b>Parameter Name</b>            | EthSwtStreamFilterPortUpperValue  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterTcpSrcPort</a>                                |   |              |
| <b>Description</b>               | Definition of the filter port upper value.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 65535  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.38 EthSwtStreamFilterUdpDestPort

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00177]  |   |                     |
| <b>Container Name</b>                   | EthSwtStreamFilterUdpDestPort  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterRule</a>   |   |                     |
| <b>Description</b>                      | Configuration of a UDP destination port filter.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00179]   |   |              |
| <b>Parameter Name</b>            | EthSwtStreamFilterPortLowerValue  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterUdpDestPort</a>                               |   |              |
| <b>Description</b>               | Definition of the filter port lower value.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 65535  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00180]   |   |              |
| <b>Parameter Name</b>            | EthSwtStreamFilterPortUpperValue  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterUdpDestPort</a>                               |   |              |
| <b>Description</b>               | Definition of the filter port upper value.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 65535  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.39 EthSwtStreamFilterUdpSrcPort

|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00175]   |   |                     |
| <b>Container Name</b>                   | EthSwtStreamFilterUdpSrcPort  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtStreamFilterRule</a>                                      |   |                     |
| <b>Description</b>                      | Configuration of a UDP source port filter.<br><b>Tags:</b> atp.Status=draft |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00179]   |   |              |
| <b>Parameter Name</b>            | EthSwtStreamFilterPortLowerValue  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterUdpSrcPort</a>                                |   |              |
| <b>Description</b>               | Definition of the filter port lower value.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 65535  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00180]   |   |              |
| <b>Parameter Name</b>            | EthSwtStreamFilterPortUpperValue  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtStreamFilterUdpSrcPort</a>                                |   |              |
| <b>Description</b>               | Definition of the filter port upper value.<br><b>Tags:</b> atp.Status=draft |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 65535  |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.40 EthSwtMacForwardingTable

|   |                                    |   |                     |
|---|------------------------------------|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00205]                |   |                     |
| <b>Container Name</b>                   | EthSwtMacForwardingTable           |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtConfig</a>       |   |                     |
| <b>Description</b>                      | Represents a MAC forwarding table. |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                               |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>            | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>                   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>             | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |                                    |   |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | [ECUC_EthSwt_00206]  |   |                     |
| <b>Parameter Name</b>            | EthSwtPredefinedMacAddress   |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtMacForwardingTable</a>   |   |                     |
| <b>Description</b>               | Specifies a 48-bit physical addresses (MAC addresses) network byte order, which can be reached via the referenced port and if available via the referenced VLAN . Note that further addresses can be learned during runtime. |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | EcucStringParamDef   |   |                     |
| <b>Default value</b>             | -  |   |                     |
| <b>Regular Expression</b>        | [0-9a-fA-F]{2}[:-][0-9a-fA-F]{2}{5}  |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: ECU   |   |                     |

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | [ECUC_EthSwt_00207]                                |   |                     |
| <b>Parameter Name</b>                   | EthSwtMacForwardingTablePortRef                    |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtMacForwardingTable</a>           |   |                     |
| <b>Description</b>                      | References the ports the MAC shall be assigned to. |   |                     |
| <b>Multiplicity</b>                     | 0..255   |   |                     |
| <b>Type</b>                             | Reference to <a href="#">EthSwtPort</a>            |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Post-Build Variant Value</b>         | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                            | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>                                   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>                             | X | VARIANT-POST-BUILD  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                            | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>                                   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>                             | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>               | scope: ECU   |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

### 10.1.41 EthSwtVlanMembership

|   |  |   |                     |
|---|--|---|---------------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00199]</b>   |   |                     |
| <b>Container Name</b>                   | EthSwtVlanMembership   |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtConfig</a>   |   |                     |
| <b>Description</b>                      | Determines the membership of this Ethernet switch and the referenced ports to the virtual network, i.e. frames with this VID can be received and transmitted via the referenced ports. |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>   | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>   | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |  |   |                     |

|                                  |   |   |                     |
|----------------------------------|---|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00202]</b>                                      |   |                     |
| <b>Parameter Name</b>            | EthSwtVlanMembershipId  |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwtVlanMembership</a>                            |   |                     |
| <b>Description</b>               | Determines the VID of the virtual network this port belongs to. |   |                     |
| <b>Multiplicity</b>              | 1   |   |                     |
| <b>Type</b>                      | EcucIntegerParamDef   |   |                     |
| <b>Range</b>                     | 0 .. 4094   |   |                     |
| <b>Default value</b>             | -   |   |                     |
| <b>Post-Build Variant Value</b>  | true  |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: ECU  |   |                     |

| <b>Included Containers</b>                       |                     |   |
|--|---------------------|---|
| <b>Container Name</b>                            | <b>Multiplicity</b> | <b>Scope / Dependency</b>   |
| <a href="#">EthSwtVlanMembershipPortRefEntry</a> | 0..255              | Determines the VLAN membership of one referenced ports to the virtual network and the according forwarding type (NOT_SENT, SENT_UNTAGGED, SENT_TAGGED). |

### 10.1.42 EthSwtVlanMembershipPortRefEntry


|   |   |   |                     |
|---|---|---|---------------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00203]</b>  |   |                     |
| <b>Container Name</b>                   | EthSwtVlanMembershipPortRefEntry  |   |                     |
| <b>Parent Container</b>                 | <a href="#">EthSwtVlanMembership</a>  |   |                     |
| <b>Description</b>                      | Determines the VLAN membership of one referenced ports to the virtual network and the according forwarding type (NOT_SENT, SENT_UNTAGGED, SENT_TAGGED). |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true  |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | VARIANT-PRE-COMPILE |
|   | <b>Link time</b>  | X | VARIANT-LINK-TIME   |
|   | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |   |   |                     |

|                                  |  |  |                     |
|----------------------------------|--|--|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00026]</b>   |  |                     |
| <b>Parameter Name</b>            | EthSwTvlanForwardingType   |  |                     |
| <b>Parent Container</b>          | <a href="#">EthSwTvlanMembershipPortRefEntry</a>   |  |                     |
| <b>Description</b>               | Defines how the message with a specific VLAN Id at the referenced port shall be handled. |  |                     |
| <b>Multiplicity</b>              | 1  |  |                     |
| <b>Type</b>                      | EcucEnumerationParamDef  |  |                     |
| <b>Range</b>                     | ETHSWT_NOT_SENT  | The message with the specific VLAN Id shall not be sent at the referenced port.              |                     |
|                                  | ETHSWT_SENT_TAGGED   | The message with the specific VLAN Id shall be sent with its VLAN Id at the referenced port. |                     |
|                                  | ETHSWT_SENT_UNTAGGED   | The message with the specific VLAN Id shall be sent untagged at the referenced port.         |                     |
| <b>Post-Build Variant Value</b>  | true   |  |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X  | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>   | X  | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>   | X  | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: ECU   |  |                     |

|                                  |  |   |                     |
|----------------------------------|--|---|---------------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00204]</b>                           |   |                     |
| <b>Parameter Name</b>            | EthSwTvlanMembershipPortRef                          |   |                     |
| <b>Parent Container</b>          | <a href="#">EthSwTvlanMembershipPortRefEntry</a>     |   |                     |
| <b>Description</b>               | Reference to one port the VLAN shall be assigned to. |   |                     |
| <b>Multiplicity</b>              | 1  |   |                     |
| <b>Type</b>                      | Reference to <a href="#">EthSwTport</a>              |   |                     |
| <b>Post-Build Variant Value</b>  | true   |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                              | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>                                     | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>                               | X | VARIANT-POST-BUILD  |
| <b>Scope / Dependency</b>        | scope: ECU   |   |                     |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|



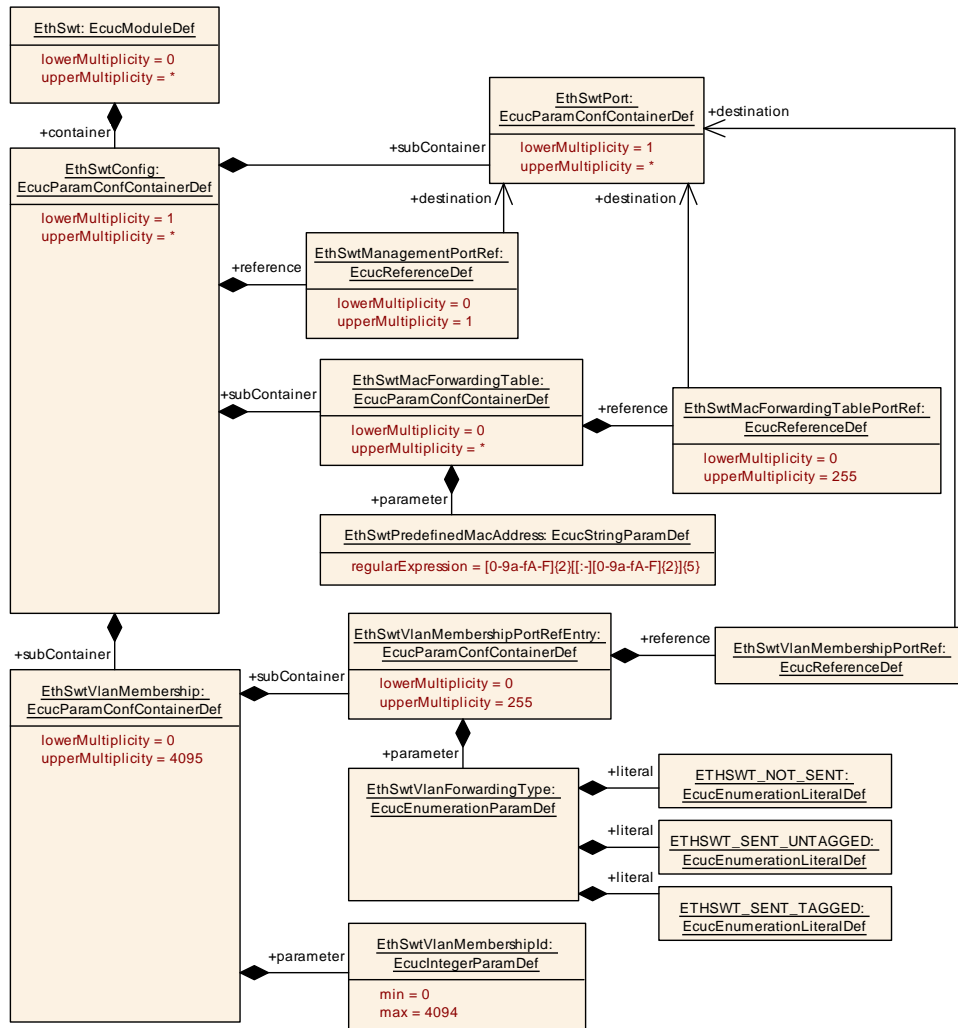

**Figure 10.13: EthSwtVlanMacForward**

### 10.1.43 EthSwtGeneral

|                                 |   |
|---------------------------------|---|
| <b>SWS Item</b>                 | [ECUC_EthSwt_00003]                                     |
| <b>Container Name</b>           | EthSwtGeneral   |
| <b>Parent Container</b>         | <a href="#">EthSwt</a>                                  |
| <b>Description</b>              | General configuration of Ethernet Switch Driver module. |
| <b>Configuration Parameters</b> |   |

|                         |  |
|-------------------------|--|
| <b>SWS Item</b>         | [ECUC_EthSwt_00136]                        |
| <b>Parameter Name</b>   | EthSwtCheckWakeupApi                       |
| <b>Parent Container</b> | <a href="#">EthSwtGeneral</a>              |
| <b>Description</b>      | Enables / Disables EthSwt_CheckWakeup API. |
| <b>Multiplicity</b>     | 1  |
| <b>Type</b>             | EcucBooleanParamDef                        |





|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
| <b>Default value</b>             | -                       |   |              |
| <b>Post-Build Variant Value</b>  | false                   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00133]</b>                                  |   |              |
| <b>Parameter Name</b>            | EthSwTDeletePortMirrorConfigurationApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                               |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_DeletePortMirrorConfiguration API |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef   |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                     | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>                                      | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00002]</b>  |   |              |
| <b>Parameter Name</b>            | EthSwTDevErrorDetect  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>   |   |              |
| <b>Description</b>               | Switches the development error detection and notification on or off. <ul style="list-style-type: none"> <li>• true: detection and notification is enabled.</li> <li>• false: detection and notification is disabled.</li> </ul> |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef   |   |              |
| <b>Default value</b>             | false   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00135]</b>  |   |              |
| <b>Parameter Name</b>            | EthSwTEnableCableDiagnosticApi  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>   |   |              |
| <b>Description</b>               | Enable/disable the APIs for cable diagnostic: EthSwT_RunPortCableDiagnostic, EthSwT_GetPortCableDiagnosticsResult |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef   |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>  | - |              |





|                           |              |
|---------------------------|--------------|
| <b>Scope / Dependency</b> | scope: local |
|---------------------------|--------------|

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00055]</b>                |   |              |
| <b>Parameter Name</b>            | EthSwTEnableVlanApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>             |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_EnableVLAN API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                       |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false                                     |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                   | X | All Variants |
|                                  | <b>Link time</b>                          | - |              |
|                                  | <b>Post-build time</b>                    | - |              |
| <b>Scope / Dependency</b>        | scope: local                              |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00052]</b>                 |   |              |
| <b>Parameter Name</b>            | EthSwTGetArITableApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>              |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetArITable API. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                        |   |              |
| <b>Default value</b>             | -  |   |              |
| <b>Post-Build Variant Value</b>  | false                                      |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                    | X | All Variants |
|                                  | <b>Link time</b>                           | - |              |
|                                  | <b>Post-build time</b>                     | - |              |
| <b>Scope / Dependency</b>        | scope: local                               |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00121]</b>                |   |              |
| <b>Parameter Name</b>            | EthSwTGetBaudRateApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>             |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetBaudRate API |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                       |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false                                     |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                   | X | All Variants |
|                                  | <b>Link time</b>                          | - |              |
|                                  | <b>Post-build time</b>                    | - |              |
| <b>Scope / Dependency</b>        | scope: local                              |   |              |

|                         |   |  |  |
|-------------------------|---|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00124]</b>                        |  |  |
| <b>Parameter Name</b>   | EthSwTGetCfgDataRawDone                           |  |  |
| <b>Parent Container</b> | <a href="#">EthSwTGeneral</a>                     |  |  |
| <b>Description</b>      | Defines the function name for <GetCfgDataRawDone> |  |  |
| <b>Multiplicity</b>     | 0..1  |  |  |
| <b>Type</b>             | EcucFunctionNameDef                               |  |  |





|   |  |   |              |
|---|--|---|--------------|
| <b>Default value</b>                    | -  |   |              |
| <b>Regular Expression</b>               | -  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: The function GetCfgDataRowDone shall only be configured if parameter EthSwtGetCfgRaw is set to TRUE. |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00123]</b>                                     |   |              |
| <b>Parameter Name</b>            | EthSwtGetCfgRaw  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtGeneral</a>                                  |   |              |
| <b>Description</b>               | Disable /Enable support of reading raw data from switch memory |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef  |   |              |
| <b>Default value</b>             | -  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | - |              |
|                                  | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00053]</b>                     |   |              |
| <b>Parameter Name</b>            | EthSwtGetCounterValuesApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtGeneral</a>                  |   |              |
| <b>Description</b>               | Enables / Disables EthSwt_GetCounterValues API |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                            |   |              |
| <b>Default value</b>             | -  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                        | X | All Variants |
|                                  | <b>Link time</b>                               | - |              |
|                                  | <b>Post-build time</b>                         | - |              |
| <b>Scope / Dependency</b>        | scope: local                                   |   |              |

|                         |   |  |  |
|-------------------------|---|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwt_00122]</b>                  |  |  |
| <b>Parameter Name</b>   | EthSwtGetDuplexModeApi                      |  |  |
| <b>Parent Container</b> | <a href="#">EthSwtGeneral</a>               |  |  |
| <b>Description</b>      | Enables / Disables EthSwt_GetDuplexMode API |  |  |
| <b>Multiplicity</b>     | 1   |  |  |
| <b>Type</b>             | EcucBooleanParamDef                         |  |  |
| <b>Default value</b>    | -   |  |  |





|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
| <b>Post-Build Variant Value</b>  | false                   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00120]</b>                 |   |              |
| <b>Parameter Name</b>            | EthSwTGetLinkStateApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>              |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetLinkState API |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                        |   |              |
| <b>Default value</b>             | –  |   |              |
| <b>Post-Build Variant Value</b>  | false                                      |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                    | X | All Variants |
|                                  | <b>Link time</b>                           | – |              |
|                                  | <b>Post-build time</b>                     | – |              |
| <b>Scope / Dependency</b>        | scope: local                               |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00061]</b>                        |   |              |
| <b>Parameter Name</b>            | EthSwTGetMacLearningModeApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                     |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetMacLearningMode API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                               |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                           | X | All Variants |
|                                  | <b>Link time</b>                                  | – |              |
|                                  | <b>Post-build time</b>                            | – |              |
| <b>Scope / Dependency</b>        | scope: local                                      |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00131]</b>                               |   |              |
| <b>Parameter Name</b>            | EthSwTGetMaxFIFOBufferFillLevelApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                            |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetMaxFIFOBufferFillLevel API. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                                      |   |              |
| <b>Default value</b>             | –  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>                                   | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00092]</b>                                  |   |              |
| <b>Parameter Name</b>            | EthSwTGetPortCableDiagnosticsResultApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                               |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetPortCableDiagnosticsResult API |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef   |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                     | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>                                      | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00083]</b>                      |   |              |
| <b>Parameter Name</b>            | EthSwTGetPortIdentifierApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                   |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetPortIdentifier API |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                             |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                         | X | All Variants |
|                                  | <b>Link time</b>                                | – |              |
|                                  | <b>Post-build time</b>                          | – |              |
| <b>Scope / Dependency</b>        | scope: local                                    |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00051]</b>                    |   |              |
| <b>Parameter Name</b>            | EthSwTGetPortMacAddrApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                 |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetPortMacAddr API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                           |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                       | X | All Variants |
|                                  | <b>Link time</b>                              | – |              |
|                                  | <b>Post-build time</b>                        | – |              |
| <b>Scope / Dependency</b>        | scope: local                                  |   |              |

|                                 |  |  |  |
|---------------------------------|--|--|--|
| <b>SWS Item</b>                 | <b>[ECUC_EthSwT_00087]</b>                       |  |  |
| <b>Parameter Name</b>           | EthSwTGetPortMirrorStateApi                      |  |  |
| <b>Parent Container</b>         | <a href="#">EthSwTGeneral</a>                    |  |  |
| <b>Description</b>              | Enables / Disables EthSwT_GetPortMirrorState API |  |  |
| <b>Multiplicity</b>             | 1  |  |  |
| <b>Type</b>                     | EcucBooleanParamDef                              |  |  |
| <b>Default value</b>            | –  |  |  |
| <b>Post-Build Variant Value</b> | false  |  |  |





|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00082]</b>                         |   |              |
| <b>Parameter Name</b>            | EthSwTGetPortSignalQualityApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                      |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetPortSignalQuality API |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                                |   |              |
| <b>Default value</b>             | –  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                            | X | All Variants |
|                                  | <b>Link time</b>                                   | – |              |
|                                  | <b>Post-build time</b>                             | – |              |
| <b>Scope / Dependency</b>        | scope: local                                       |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00065]</b>                |   |              |
| <b>Parameter Name</b>            | EthSwTGetRxStatsApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>             |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetRxStats API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                       |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false                                     |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                   | X | All Variants |
|                                  | <b>Link time</b>                          | – |              |
|                                  | <b>Post-build time</b>                    | – |              |
| <b>Scope / Dependency</b>        | scope: local                              |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00084]</b>                        |   |              |
| <b>Parameter Name</b>            | EthSwTGetSwitchIdentifierApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                     |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_GetSwitchIdentifier API |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                               |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                           | X | All Variants |
|                                  | <b>Link time</b>                                  | – |              |
|                                  | <b>Post-build time</b>                            | – |              |
| <b>Scope / Dependency</b>        | scope: local                                      |   |              |

|                         |                               |  |  |
|-------------------------|-------------------------------|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00118]</b>    |  |  |
| <b>Parameter Name</b>   | EthSwTGetSwitchPortModeApi    |  |  |
| <b>Parent Container</b> | <a href="#">EthSwTGeneral</a> |  |  |





|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Description</b>               | Enables / Disables EthSwt_GetSwitchPortMode API |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                             |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                         | X | All Variants |
|                                  | <b>Link time</b>                                | – |              |
|                                  | <b>Post-build time</b>                          | – |              |
| <b>Scope / Dependency</b>        | scope: local                                    |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00137]</b>                               |   |              |
| <b>Parameter Name</b>            | EthSwtGetSwitchPortWakeupReasonApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtGeneral</a>                            |   |              |
| <b>Description</b>               | Enables / Disables EthSwt_GetSwitchPortWakeupReason API. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                                      |   |              |
| <b>Default value</b>             | –  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>                                   | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00066]</b>                  |   |              |
| <b>Parameter Name</b>            | EthSwtGetSwitchRegApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtGeneral</a>               |   |              |
| <b>Description</b>               | Enables / Disables EthSwt_GetSwitchReg API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                         |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false                                       |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                     | X | All Variants |
|                                  | <b>Link time</b>                            | – |              |
|                                  | <b>Post-build time</b>                      | – |              |
| <b>Scope / Dependency</b>        | scope: local                                |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00100]</b>                        |   |              |
| <b>Parameter Name</b>            | EthSwtGetTxErrorCounterValuesApi                  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtGeneral</a>                     |   |              |
| <b>Description</b>               | Enables/Disables Eth_GetTxErrorCounterValues API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                               |   |              |
| <b>Default value</b>             | false   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                           | X | All Variants |
|                                  | <b>Link time</b>                                  | – |              |
|                                  | <b>Post-build time</b>                            | – |              |







|                                  |                                      |   |              |
|----------------------------------|--------------------------------------|---|--------------|
| <b>Scope / Dependency</b>        | scope: local                         |   |              |
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00099]</b>           |   |              |
| <b>Parameter Name</b>            | EthSwTGetTxStatsApi                  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>        |   |              |
| <b>Description</b>               | Enables/Disables Eth_GetTxStats API. |   |              |
| <b>Multiplicity</b>              | 1                                    |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                  |   |              |
| <b>Default value</b>             | false                                |   |              |
| <b>Post-Build Variant Value</b>  | false                                |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>              | X | All Variants |
|                                  | <b>Link time</b>                     | – |              |
|                                  | <b>Post-build time</b>               | – |              |
| <b>Scope / Dependency</b>        | scope: local                         |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00107]</b>  |   |              |
| <b>Parameter Name</b>            | EthSwTGlobalTimeSupportApi  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>   |   |              |
| <b>Description</b>               | Enables/Disables the Global Time APIs used amongst others by Global Time Synchronization over Ethernet. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef   |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00033]</b>  |   |              |
| <b>Parameter Name</b>            | EthSwTIndex   |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>   |   |              |
| <b>Description</b>               | Specifies the InstanceId of this module instance. If only one instance is present it shall have the Id 0. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucIntegerParamDef   |   |              |
| <b>Range</b>                     | 0 .. 255  |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                         |                               |  |  |
|-------------------------|-------------------------------|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00115]</b>    |  |  |
| <b>Parameter Name</b>   | EthSwTLinkDownCallout         |  |  |
| <b>Parent Container</b> | <a href="#">EthSwTGeneral</a> |  |  |





|   |  |   |              |
|---|--|---|--------------|
| <b>Description</b>                      | Defines the function name for the <EthSwtLinkDownCallout> callout. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucFunctionNameDef  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Regular Expression</b>               | -  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

|   |  |   |              |
|---|--|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00116]</b>                                       |   |              |
| <b>Parameter Name</b>                   | EthSwtLinkUpCallout  |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtGeneral</a>                                    |   |              |
| <b>Description</b>                      | Defines the function name for the <EthSwtLinkUpCallout> callout. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucFunctionNameDef  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Regular Expression</b>               | -  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

|   |   |   |              |
|---|---|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00102]</b>                  |   |              |
| <b>Parameter Name</b>                   | EthSwtLowPowerModeSupport                   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtGeneral</a>               |   |              |
| <b>Description</b>                      | Disable / Enable support of low power mode. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucBooleanParamDef                         |   |              |
| <b>Default value</b>                    | false                                       |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false                                       |   |              |
| <b>Post-Build Variant Value</b>         | false                                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                     | X | All Variants |
|   | <b>Link time</b>                            | - |              |
|   | <b>Post-build time</b>                      | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                     | X | All Variants |
|   | <b>Link time</b>                            | - |              |





|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Post-build time</b> | – |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00071]</b>   |   |              |
| <b>Parameter Name</b>            | EthSwTMainFunctionPeriod   |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>  |   |              |
| <b>Description</b>               | The cycle time of the periodic main function of EthSwT. Defined in seconds . |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucFloatParamDef  |   |              |
| <b>Range</b>                     | ]0 .. INF[   |   |              |
| <b>Default value</b>             | –  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>        |  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00108]</b>  |   |              |
| <b>Parameter Name</b>            | EthSwTManagementSupportApi  |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>   |   |              |
| <b>Description</b>               | Enables/Disables the Switch management APIs to support a Switch-port specific communication attribute access. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef   |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00062]</b>  |   |              |
| <b>Parameter Name</b>            | EthSwTPersistentConfigurationResult                                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>   |   |              |
| <b>Description</b>               | Enables / Disables the callback API <User>_PersistentConfigurationResult. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef   |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                         |   |  |  |
|-------------------------|---|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00063]</b>                  |  |  |
| <b>Parameter Name</b>   | EthSwTPersistentConfigurationResultCallback |  |  |
| <b>Parent Container</b> | <a href="#">EthSwTGeneral</a>               |  |  |





|   |  |   |              |
|---|--|---|--------------|
| <b>Description</b>                      | Defines the function name for <EthSwtPersistentConfigurationResultCallback>. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucFunctionNameDef  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Regular Expression</b>               | -  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

|   |  |   |              |
|---|--|---|--------------|
| <b>SWS Item</b>                         | <b>[ECUC_EthSwt_00064]</b>   |   |              |
| <b>Parameter Name</b>                   | EthSwtPublicCddHeaderFile  |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwtGeneral</a>  |   |              |
| <b>Description</b>                      | Defines header files for callback functions which shall be included in case of CDDs. |   |              |
| <b>Multiplicity</b>                     | 0..*   |   |              |
| <b>Type</b>                             | EcucStringParamDef   |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Length</b>                           | 1-32   |   |              |
| <b>Regular Expression</b>               | -  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00086]</b>                                |   |              |
| <b>Parameter Name</b>            | EthSwtReadPortMirrorConfigurationApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtGeneral</a>                             |   |              |
| <b>Description</b>               | Enables / Disables EthSwt_ReadPortMirrorConfiguration API |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                                       |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|                                  | <b>Link time</b>  | - |              |
|                                  | <b>Post-build time</b>                                    | - |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00069]</b>                      |   |              |
| <b>Parameter Name</b>            | EthSwTReadTrcvRegisterApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                   |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_ReadTrcvRegister API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                             |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                         | X | All Variants |
|                                  | <b>Link time</b>                                | - |              |
|                                  | <b>Post-build time</b>                          | - |              |
| <b>Scope / Dependency</b>        | scope: local                                    |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00049]</b>                        |   |              |
| <b>Parameter Name</b>            | EthSwTResetConfigurationApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                     |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_ResetConfiguration API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                               |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                           | X | All Variants |
|                                  | <b>Link time</b>                                  | - |              |
|                                  | <b>Post-build time</b>                            | - |              |
| <b>Scope / Dependency</b>        | scope: local                                      |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00104]</b>                      |   |              |
| <b>Parameter Name</b>            | EthSwTSetForwardingModeApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                   |   |              |
| <b>Description</b>               | Enables /disables EthSwT_SetForwardingMode API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                             |   |              |
| <b>Default value</b>             | false   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                         | X | All Variants |
|                                  | <b>Link time</b>                                | - |              |
|                                  | <b>Post-build time</b>                          | - |              |
| <b>Scope / Dependency</b>        | scope: local                                    |   |              |

|                                 |   |  |  |
|---------------------------------|---|--|--|
| <b>SWS Item</b>                 | <b>[ECUC_EthSwT_00060]</b>                        |  |  |
| <b>Parameter Name</b>           | EthSwTSetMacLearningModeApi                       |  |  |
| <b>Parent Container</b>         | <a href="#">EthSwTGeneral</a>                     |  |  |
| <b>Description</b>              | Enables / Disables EthSwT_SetMacLearningMode API. |  |  |
| <b>Multiplicity</b>             | 1   |  |  |
| <b>Type</b>                     | EcucBooleanParamDef                               |  |  |
| <b>Default value</b>            | -   |  |  |
| <b>Post-Build Variant Value</b> | false   |  |  |





|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00090]</b>                           |   |              |
| <b>Parameter Name</b>            | EthSwTSetPortLoopbackModeApi                         |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                        |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_SetPortLoopbackModeApi API |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                                  |   |              |
| <b>Default value</b>             | –  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                              | X | All Variants |
|                                  | <b>Link time</b>                                     | – |              |
|                                  | <b>Post-build time</b>                               | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00088]</b>                       |   |              |
| <b>Parameter Name</b>            | EthSwTSetPortMirrorStateApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                    |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_SetPortMirrorState API |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                              |   |              |
| <b>Default value</b>             | –  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                          | X | All Variants |
|                                  | <b>Link time</b>                                 | – |              |
|                                  | <b>Post-build time</b>                           | – |              |
| <b>Scope / Dependency</b>        | scope: local                                     |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00089]</b>                    |   |              |
| <b>Parameter Name</b>            | EthSwTSetPortTestModeApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                 |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_SetPortTestMode API |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                           |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                       | X | All Variants |
|                                  | <b>Link time</b>                              | – |              |
|                                  | <b>Post-build time</b>                        | – |              |
| <b>Scope / Dependency</b>        | scope: local                                  |   |              |

|                         |                               |  |  |
|-------------------------|-------------------------------|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00091]</b>    |  |  |
| <b>Parameter Name</b>   | EthSwTSetPortTxModeApi        |  |  |
| <b>Parent Container</b> | <a href="#">EthSwTGeneral</a> |  |  |





|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>Description</b>               | Enables / Disables EthSwt_SetPortTxModeApi API |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                            |   |              |
| <b>Default value</b>             | –  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                        | X | All Variants |
|                                  | <b>Link time</b>                               | – |              |
|                                  | <b>Post-build time</b>                         | – |              |
| <b>Scope / Dependency</b>        | scope: local                                   |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00117]</b>                      |   |              |
| <b>Parameter Name</b>            | EthSwtSetSwitchPortModeApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtGeneral</a>                   |   |              |
| <b>Description</b>               | Enables / Disables EthSwt_SetSwitchPortMode API |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                             |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                         | X | All Variants |
|                                  | <b>Link time</b>                                | – |              |
|                                  | <b>Post-build time</b>                          | – |              |
| <b>Scope / Dependency</b>        | scope: local                                    |   |              |

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00067]</b>                  |   |              |
| <b>Parameter Name</b>            | EthSwtSetSwitchRegApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtGeneral</a>               |   |              |
| <b>Description</b>               | Enables / Disables EthSwt_SetSwitchReg API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                         |   |              |
| <b>Default value</b>             | –   |   |              |
| <b>Post-Build Variant Value</b>  | false                                       |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                     | X | All Variants |
|                                  | <b>Link time</b>                            | – |              |
|                                  | <b>Post-build time</b>                      | – |              |
| <b>Scope / Dependency</b>        | scope: local                                |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwt_00119]</b>                                   |   |              |
| <b>Parameter Name</b>            | EthSwtStartSwitchPortAutoNegotiationApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwtGeneral</a>                                |   |              |
| <b>Description</b>               | Enables / Disables EthSwt_StartSwitchPortAutoNegotiation API |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef  |   |              |
| <b>Default value</b>             | –  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                      | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>                                       | – |              |





|                           |              |
|---------------------------|--------------|
| <b>Scope / Dependency</b> | scope: local |
|---------------------------|--------------|

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00050]</b>                        |   |              |
| <b>Parameter Name</b>            | EthSwTStoreConfigurationApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                     |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_StoreConfiguration API. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                               |   |              |
| <b>Default value</b>             | -   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                           | X | All Variants |
|                                  | <b>Link time</b>                                  | - |              |
|                                  | <b>Post-build time</b>                            | - |              |
| <b>Scope / Dependency</b>        | scope: local                                      |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00105]</b>                 |   |              |
| <b>Parameter Name</b>            | EthSwTVerifyConfigApi                      |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>              |   |              |
| <b>Description</b>               | Enables /disables EthSwT_VerifyConfig API. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                        |   |              |
| <b>Default value</b>             | false                                      |   |              |
| <b>Post-Build Variant Value</b>  | false                                      |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                    | X | All Variants |
|                                  | <b>Link time</b>                           | - |              |
|                                  | <b>Post-build time</b>                     | - |              |
| <b>Scope / Dependency</b>        | scope: local                               |   |              |

|                                  |                                      |   |              |
|----------------------------------|--------------------------------------|---|--------------|
| <b>SWS Item</b>                  | <b>[ECUC_EthSwT_00031]</b>           |   |              |
| <b>Parameter Name</b>            | EthSwTVersionInfoApi                 |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>        |   |              |
| <b>Description</b>               | Enables / Disables version info API. |   |              |
| <b>Multiplicity</b>              | 1                                    |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                  |   |              |
| <b>Default value</b>             | false                                |   |              |
| <b>Post-Build Variant Value</b>  | false                                |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>              | X | All Variants |
|                                  | <b>Link time</b>                     | - |              |
|                                  | <b>Post-build time</b>               | - |              |
| <b>Scope / Dependency</b>        | scope: local                         |   |              |

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>SWS Item</b>         | <b>[ECUC_EthSwT_00085]</b>                                 |  |  |
| <b>Parameter Name</b>   | EthSwTWritePortMirrorConfigurationApi                      |  |  |
| <b>Parent Container</b> | <a href="#">EthSwTGeneral</a>                              |  |  |
| <b>Description</b>      | Enables / Disables EthSwT_WritePortMirrorConfiguration API |  |  |
| <b>Multiplicity</b>     | 1  |  |  |
| <b>Type</b>             | EcucBooleanParamDef  |  |  |







|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
| <b>Default value</b>             | -                       |   |              |
| <b>Post-Build Variant Value</b>  | false                   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | - |              |
|                                  | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>SWS Item</b>                  | [ECUC_EthSwT_00070]                              |   |              |
| <b>Parameter Name</b>            | EthSwTWriteTrcvRegisterApi                       |   |              |
| <b>Parent Container</b>          | <a href="#">EthSwTGeneral</a>                    |   |              |
| <b>Description</b>               | Enables / Disables EthSwT_WriteTrcvRegister API. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                              |   |              |
| <b>Default value</b>             | -  |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                          | X | All Variants |
|                                  | <b>Link time</b>                                 | - |              |
|                                  | <b>Post-build time</b>                           | - |              |
| <b>Scope / Dependency</b>        | scope: local                                     |   |              |

|   |  |   |              |
|---|--|---|--------------|
| <b>SWS Item</b>                         | [ECUC_EthSwT_00129]  |   |              |
| <b>Parameter Name</b>                   | EthSwTEcucPartitionRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">EthSwTGeneral</a>  |   |              |
| <b>Description</b>                      | Maps the Ethernet switch driver to zero or multiple ECUC partitions to make the modules API available in this partition. The Ethernet switch driver will operate as an independent instance in each of the partitions. |   |              |
| <b>Multiplicity</b>                     | 0..*   |   |              |
| <b>Type</b>                             | Reference to EcucPartition   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | true   |   |              |
| <b>Post-Build Variant Value</b>         | true   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: ECU   |   |              |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

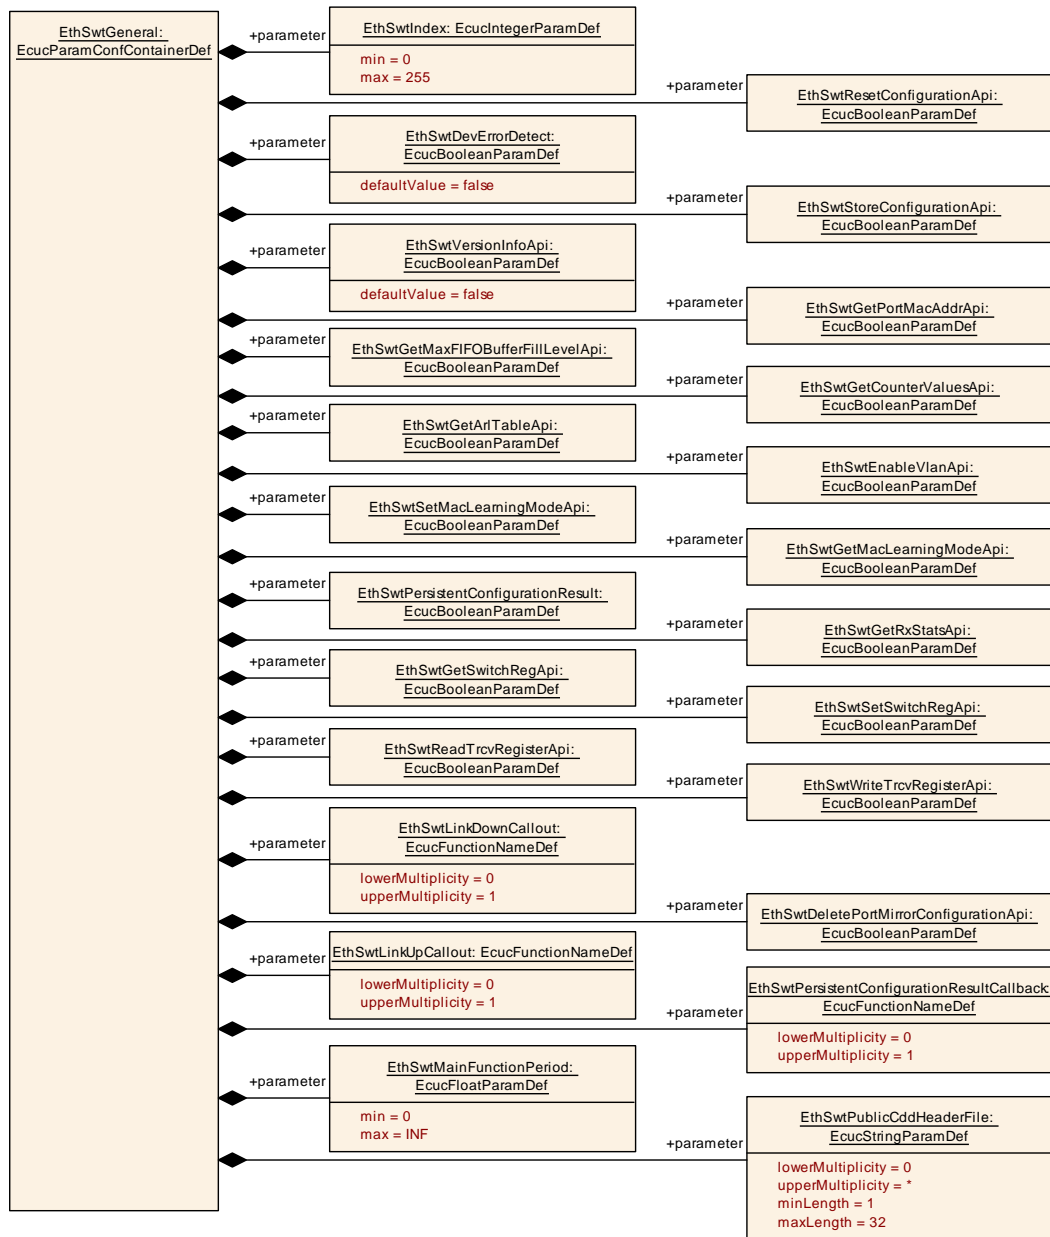


Figure 10.14: EthSwtGeneral (1/2)

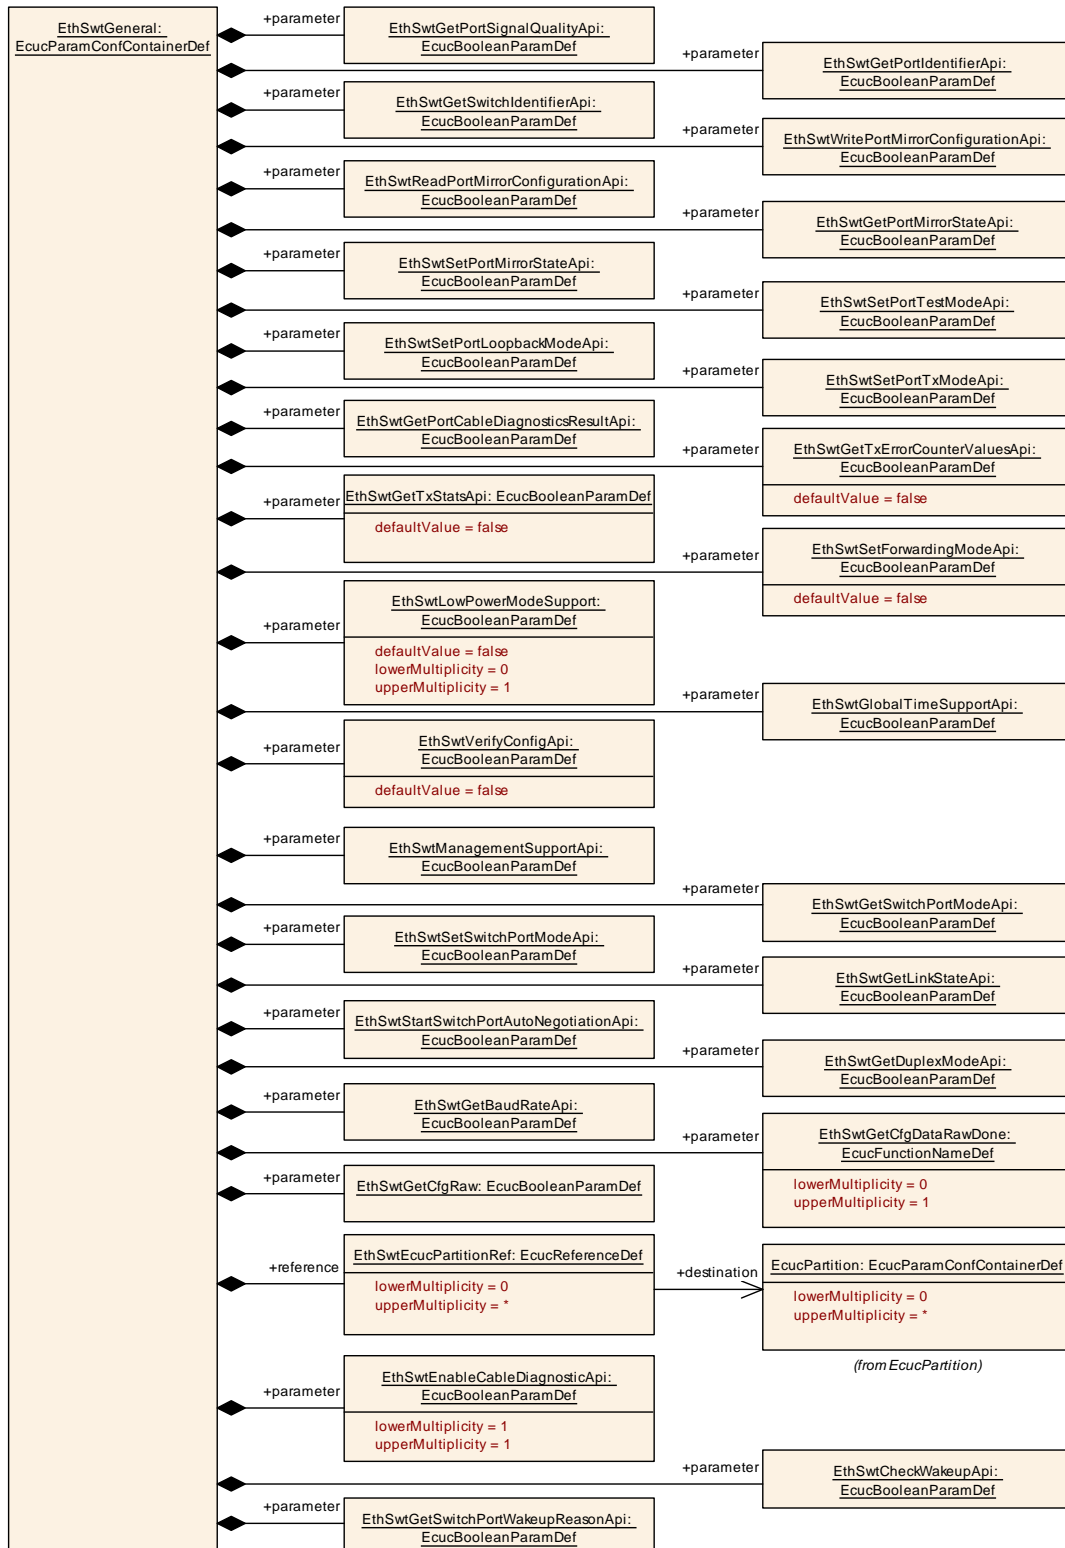


Figure 10.15: EthSwtGeneral (2/2)

## 10.2 Constraints

**[SWS\_EthSwt\_CONSTR\_00413]** [The module will operate as an independent instance in each of the partitions (see [EthSwtEcucPartitionRef](#)), means the called API will only target the partition it is called in.]()

**[SWS\_EthSwt\_CONSTR\_00411]** [The ECUC partitions referenced by [EthSwtConfigEcucPartitionRef](#) shall be a subset of the ECUC partitions referenced by [EthSwtEcucPartitionRef](#).]()

**[SWS\_EthSwt\_CONSTR\_00412]** [[EthSwtConfig](#), [EthCtrlConfig](#) and [EthTrcvConfig](#) of one communication channel shall all reference the same ECUC partition.]()

**[SWS\_EthSwt\_CONSTR\_00438]** [If [EthSwtEcucPartitionRef](#) references one or more ECUC partitions, [EthSwtConfigEcucPartitionRef](#) shall have a multiplicity of one and reference one of these ECUC partitions as well.]()