


<b>Document Title</b>	Requirements on MCU Driver
<b>Document Owner</b>	AUTOSAR
Document Responsibility	AUTOSAR
Document Identification No	195
Document Classification	Auxiliary
<b>Document Status</b>	Final
Part of AUTOSAR Release	4.2.1

Document Change History		
Release		Change Description
4.2.1	AUTOSAR Release Management	Editorial changes
4.1.2	AUTOSAR Release Management	Editorial changes
4.1.1	AUTOSAR Administration	<ul> <li>Link Requirement with BSW Feature Document</li> <li>Updating format of requirements according to TPS_StandardizationTemplate</li> </ul>
3.1.5	AUTOSAR Administration	<ul> <li>Lots requirements rephrased to make them atomic.</li> <li>Debugging Concept inserted.</li> <li>Insertion of a new service (Api) to read the Status after the reset. (Affected also SRS R4.0)</li> <li>Insertion new configuration parameters to enable/disable PLL Apis.</li> <li>Introduction of a new container to publish all the different resets that Micro Controller support.</li> <li>Legal disclaimer revised</li> </ul>
3.1.1	AUTOSAR Administration	Legal disclaimer revised
3.0.1	AUTOSAR Administration	<ul><li>Document meta information extended</li><li>Small layout adaptations made</li></ul>
2.1.15	AUTOSAR Administration	<ul><li> "Advice for users" revised</li><li> "Revision Information" added</li></ul>
2.1	AUTOSAR Administration	Legal disclaimer revised
2.0	AUTOSAR Administration	Release as a separate document. The SRS SPAL V1.0.0 has been split into 12 independent documents for Release 2.0
1.0	AUTOSAR Administration	1.0.0 initial release







#### **Disclaimer**

This specification and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the specification.

The material contained in this specification is protected by copyright and other types of Intellectual Property Rights. The commercial exploitation of the material contained in this specification requires a license to such Intellectual Property Rights.

This specification may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only.

For any other purpose, no part of the specification may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The AUTOSAR specifications have been developed for automotive applications only. They have neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

#### Advice for users

AUTOSAR specifications may contain exemplary items (exemplary reference models, "use cases", and/or references to exemplary technical solutions, devices, processes or software).

Any such exemplary items are contained in the specifications for illustration purposes only, and they themselves are not part of the AUTOSAR Standard. Neither their presence in such specifications, nor any later documentation of AUTOSAR conformance of products actually implementing such exemplary items, imply that intellectual property rights covering such exemplary items are licensed under the same rules as applicable to the AUTOSAR Standard.



### **Table of Contents**

1	S	cope o	f document	5
2	Н	ow to r	ead this document	6
	2.1	Con	ventions used	6
	2.2	Red	uirements structure	8
3	A	cronym	ns and abbreviations	9
4	F	unction	al Overview1	0
5	R	equire	ment Specification1	1
	5.1	Fun	ctional Requirements1	1
	5.	.1.1	Configuration and Initialization1	
		5.1.1.1 5.1.1.2	[SRS_Mcu_12421] Low Power Mode Configuration	11
			d during start-upd	11
		5.1.1.3	[SRS_Mcu_12331] The MCU Driver shall provide a service to initialize the contents of configured RAI	
		sections 5.1.1.4	11 [SRS_Mcu_12392] The MCU driver shall provide a service to query the lock status of all PLLs in the	
			ntroller individually	12
		5.1.1.5	[SRS_Mcu_12336] The MCU Driver shall provide a service for activating the PLL clock distribution to	)
			e MCU[SRS_Mcu_12207] The MCU Driver shall configure the clock safety features	
		5.1.1.6 5.1.1.7	[SRS_Mcu_12207] The MCU Driver shall provide a service to initialize the clock system of the MCU	
	5.	.1.2	Normal Operation	
		5.1.2.1	[SRS_Mcu_12000] The MCU Driver shall provide a service for querying the standardized reset reason	13
		5.1.2.2	[SRS_Mcu_12215] The MCU driver shall provide a service that allows to query the raw reset status	
		5.1.2.3 5.1.2.4	[SRS_Mcu_12277] The MCU driver shall provide a reset trigger function	
	5	.1.3	Fault operation	
	٥.	5.1.3.1	[SRS_Mcu_12394] The MCU driver shall provide a notification of failure of the clock source	
	5.	.1.4	Shutdown operation	
		5.1.4.1	[SRS_Mcu_12268] The MCU driver shall provide a service to activate MCU power saving modes of th	
		μC _	15	_
	5.2	Ren	narks 1	6
6	R	eferen	ces1	7
	6.1	Deli	verables of AUTOSAR1	7
	6.2		ated standards and norms	



### 1 Scope of document

This document specifies requirements on the module MCU Driver.

### Constraints

First scopes for specification of requirements on basic software modules are systems which are not safety relevant. For this reason safety requirements are assigned to medium priority.



### 2 How to read this document


Each requirement has its unique identifier starting with the prefix "BSW" (for "Basic Software"). For any review annotations, remarks or questions, please refer to this unique ID rather than chapter or page numbers!

### 2.1 Conventions used

- The representation of requirements in AUTOSAR documents follows the table specified in [TPS\_STDT\_00078].
- In requirements, the following specific semantics are used

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted. Note that the requirement level of the document in which they are used modifies the force of these words.

- MUST: This word, or the terms "REQUIRED" or "SHALL", mean that the definition is an absolute requirement of the specification.
- MUST NOT: This phrase, or the phrase "SHALL NOT", means that the definition is an absolute prohibition of the specification.
- SHOULD: This word, or the adjective "RECOMMENDED", mean that there may exist valid reasons in particular circumstances to ignore a particular item, but the full implications must be understood and carefully weighed before choosing a different course.
- SHOULD NOT: This phrase, or the phrase "NOT RECOMMENDED" mean that there may exist valid reasons in particular circumstances when the particular behavior is acceptable or even useful, but the full implications should be understood and the case carefully weighed before implementing any behavior described with this label.
- MAY: This word, or the adjective "OPTIONAL", means that an item is truly optional. One vendor may choose to include the item because a particular marketplace requires it or because the vendor feels that it enhances the product while another vendor may omit the same item. An implementation, which does not include a particular option, MUST be prepared to interoperate with another implementation, which does include the option, though perhaps with reduced functionality. In the same vein an implementation, which does include a particular option, MUST be prepared to interoperate with another implementation, which does not include the option (except, of course, for the feature the option provides.)







### 2.2 Requirements structure

Each module specific chapter contains a short functional description of the Basic Software Module. Requirements of the same kind within each chapter are grouped under the following headlines (where applicable):

### Functional Requirements:

- Configuration (which elements of the module need to be configurable)
- Initialisation
- Normal Operation
- Shutdown Operation
- Fault Operation
- ...

### Non-Functional Requirements:

- Timing Requirements
- Resource Usage
- Usability
- Output for other WPs (e.g. Description Templates, Tooling,...)
- ..



### 3 Acronyms and abbreviations

Acronyms and abbreviations that have a local scope are not contained in the AUTOSAR glossary. These must appear in a local glossary.

Acronym:	Description:
CS	Chip select
DIO	Digital Input Output
ECU	Electric Control Unit
EOL	End Of Line
	Often used in the term 'EOL Programming' or 'EOL Configuration'
HIS	Herstellerinitiative Software
ICU	Interrupt Capture Unit
MAL	Old name of Microcontroller Abstraction Layer (replaced by MCAL because 'MAL' is
	a french term meaning 'bad')
MCAL	Microcontroller Abstraction Layer
MCU	Microcontroller Unit
MMU	Memory Management Unit
Master	A device controlling other devices (slaves, see below)
Slave	A device beeing completely controlled by a master device
NMI	Non maskable interrupt
OS	Operating System
PLL	Phase Locked Loop
PWM	Pulse Width Modulation
RX	Reception (in the context of bus communication)
SPAL	The name of this working group (Standard Peripheral Abstraction Layer)
SFR	Special Function Register
RTE	Runtime environment
WP	Work Package


Abbreviation:	Description:
STD	Standard
REQ	Requirement
UNINIT	Uninitialized (= not initialized)

As this is a document from professionals for professionals, all other terms are expected to be known.



### 4 Functional Overview

The MCU Driver [Microcontroller Unit] provides services for basic microcontroller initialization, power down functionality, reset and microcontroller specific functions required from other MCAL software modules. The initialization services allow a flexible and application related MCU initialization in addition to the start-up code (see figure below). The start-up code is very MCU specific. The provided start-up code description in this document is for guidance and implies functionality, which have to be taken into account before standardized MCU initialization is able to start.

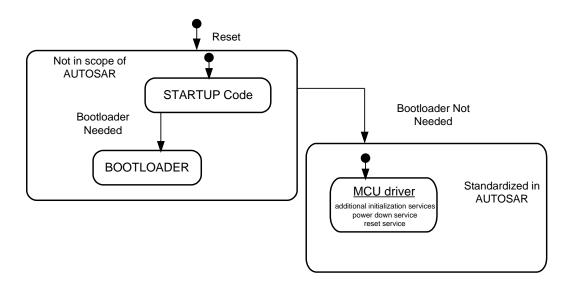

The MCU driver accesses the microcontroller hardware directly and is located in the Microcontroller Abstraction Layer (MCAL).

#### **MCU** driver Features:

- Describe set up required to configure a functionality that is not presently covered by another MCAL module e.g. global clock settings
- Set up off PLL and MCU clock distribution
- Service for RAM section initialization
- Setting of MCU dependent configuration control bits not covered by general SPAL requirements
- Activation of μC reduced power modes
- Perform a µC reset
- Get the reset reason from hardware



### 5 Requirement Specification

### 5.1 Functional Requirements

### **5.1.1 Configuration and Initialization**

### 5.1.1.1 [SRS\_Mcu\_12421] Low Power Mode Configuration

Type:	Valid
Description:	The configuration setting of Low Power Modes is completely microcontroller specific. It shall be possible to configure the different modes supported by the hardware and required by the application.
Rationale:	Reduce power consumption of the MCU depending on application needs
Use Case:	
Dependencies:	[SRS_Mcu_12268] MCU Power Management Control
Supporting Material:	

J(RS\_BRF\_01184)

# 5.1.1.2 [SRS\_Mcu\_12350] The MCU Driver shall allow the static configuration of RAM segments that are initialized during start-up

<u></u>	
Type:	Valid
Description:	The MCU Driver shall allow the static configuration of RAM segments that are initialized during start-up.
Rationale:	Allow to define which segments of RAM are initialized (zeroed-out) and which not.
Use Case:	Allow to save data in specific RAM segments over a reset.
Dependencies:	[SRS_Mcu_12331] RAM Initialization
Supporting Material:	

[(RS\_BRF\_01096)

# 5.1.1.3 [SRS\_Mcu\_12331] The MCU Driver shall provide a service to initialize the contents of configured RAM sections

Type:	Valid
Description:	The MCU Driver shall provide a service to initialize the contents of configured RAM sections. RAM sections that are not configured to be initialized shall not be touched.
Rationale:	Defined RAM contents after ECU start-up.
Use Case:	It is used for flexible initialization of RAM sections with defined content. The ECU state manager can decide during ECU start-up, whether the initialization of some RAM section is required (e.g. depending on Reset



	reason).
Dependencies:	[SRS_Mcu_12350] Configuration of RAM segments
Supporting Material:	

J(RS\_BRF\_01096)

# 5.1.1.4 [SRS\_Mcu\_12392] The MCU driver shall provide a service to query the lock status of all PLLs in the micro controller individually

Type:	Valid
Description:	The MCU driver shall provide a service to query the lock status of all PLLs in the micro controller individually.
	This service shall return:
	Locked
	Un-Locked
	Unsupported
Rationale:	
Use Case:	To know the status of any PLL in the microcontroller.
Dependencies:	[SRS_Mcu_12208] Initialization of the MCU clock
Supporting Material:	

J(RS\_BRF\_01856)

### 5.1.1.5 [SRS\_Mcu\_12336] The MCU Driver shall provide a service for activating the PLL clock distribution to the whole MCU

[	
Type:	Valid
Description:	The MCU Driver shall provide a service for activating the PLL clock distribution to the whole MCU. This service is required if the PLL modules in the MCU provide a separate enable bit releasing the PLL clock. This service shall only be executed after the respective PLL is locked. This service shall, if supported, be provided for all the PLLs in the micro controller individually.
Rationale:	Some micro controllers have more than one PLL
Use Case:	Make the locked PLL clock active within the MCU.
Dependencies:	[SRS_Mcu_12208] ,[SRS_Mcu_12392]
Supporting Material:	

J(RS\_BRF\_01856)

### 5.1.1.6 [SRS\_Mcu\_12207] The MCU Driver shall configure the clock safety features

	_
Туре:	Valid
Description:	The MCU Driver shall configure the clock safety features if supported by HW
	like e.g.:
	Loss of crystal detect enable/disable
	<ul> <li>Loss of crystal clock source (limp home mode) enable/disable</li> </ul>
	<ul> <li>notification enable/disable on error detection</li> </ul>
Rationale:	An example is limp mode where the loss of crystal allows a back up clock
	source to provide a mechanism for safe system shutdown



Use Case:	Loss of crystal recovery and orderly shutdown
Dependencies:	[SRS_Mcu_12208]
Supporting Material:	

J(RS\_BRF\_01856)

# 5.1.1.7 [SRS\_Mcu\_12208] The MCU Driver shall provide a service to initialize the clock system of the MCU

Type:	Valid
Description:	The MCU Driver shall provide a service to initialize the clock system of the MCU. This includes the initialization of the PLL factors, start PLL lock process (if selected) and other MCU specific clock options like for example clock prescalers that affect more than one driver. It is not mandatory to wait for the PLL lock.
Rationale:	
Use Case:	Set appropriate clock speed for MCU sub systems for example after wake- up from MCU reduced power modes.
Dependencies:	[SRS_Mcu_12392] Provide lock status of PLL
Supporting Material:	

J(RS\_BRF\_01856)

### 5.1.2 Normal Operation

## 5.1.2.1 [SRS\_Mcu\_12000] The MCU Driver shall provide a service for querying the standardized reset reason

Type:	Valid
Description:	The MCU Driver shall provide a service for querying the reset reason. The following standardized reset reasons shall be distinguished (if supported by hardware):
	Power On Reset (default return value)
	External Hard Reset
	Internal Watchdog Timer Reset
	Other reset reasons
Rationale:	Different reset reasons may require different actions during the initialization phase.
Use Case:	Information for ECU state manager (e.g. decide what start-up sequence is chosen).
Dependencies:	
Supporting Material:	Note: The reset reasons listed above are not required to be implemented in each microcontroller device. If a microcontroller does not have the ability to distinguish between multiple reset reasons, the default value shall be "Power On Reset".

J(RS\_BRF\_01856)



# 5.1.2.2 [SRS\_Mcu\_12215] The MCU driver shall provide a service that allows to query the raw reset status

<u> </u>	
Type:	Valid
Description:	The MCU driver shall provide a service that allows to query the reset reason.
•	This service shall return the full, raw and µC specific reset information.
Rationale:	After full ECU start-up, the raw reset status can be queried and stored as
	reset information to the diagnostic error memory.
Use Case:	This information shall be used only to store reset information to the
	diagnostic error memory.
	Example for Reset Types:
	Power On Reset
	External Hard Reset
	Soft Reset
	Internal Watchdog Timer Reset
	Debug System Reset
	Reset caused by exception
	•
Dependencies:	
Supporting Material:	If a microcontroller does not provide a reset status register, this service shall return 0 (zero).

J( RS\_BRF\_01856)

### 5.1.2.3 [SRS\_Mcu\_12277] The MCU driver shall provide a reset trigger function

Type:	Valid
Description:	The MCU driver shall provide a reset trigger function using the features of the microcontroller hardware. As the MCU's provides different kind of reset variant, the configuration of the reset trigger shall be defined in the configuration structure of the MCU driver.  If the microcontroller does not support methods for triggering a reset by software, this function shall not be used. In this case the upper layer is responsible to use other application specific methods for example to switch an I/O pin to trigger external reset circuit.
Rationale:	Force a controlled initialization of the microcontroller hardware if the software detects particular unknown system states.
Use Case:	<ul> <li>Could be triggered in case of fatal errors, e.g.</li> <li>if non-recoverable μC traps occur (e.g. bus error trap),</li> <li>if SW statemachines suddenly encounter undefined states (e.g. due to bit errors in RAM) and no other reaction is possible</li> </ul>
Dependencies:	
Supporting Material:	

J(RS\_BRF\_01856)

# 5.1.2.4 [SRS\_Mcu\_13701] The MCU Driver shall provide a service for querying the RAM status

Type:	Valid
Description:	The MCU Driver shall provide a service for querying the RAM status.  The following standardized RAM states shall be distinguished (if supported



	by hardware): RAM state invalid [default] RAM state valid If the hardware does not support this feature, this function shall be disabled.
Rationale:	Different RAM states may require different actions during the Initialization phase.
Use Case:	ECU State Manager can use this information to reload the Ram content after a reset.
Dependencies:	
Supporting Material:	Note: The RAM states listed above are not required to be implemented in each microcontroller device. If a microcontroller does not have the ability to distinguish between multiple RAM states, the default value shall be "RAM invalid"

<u>J(</u> RS\_BRF\_00129)

### 5.1.3 Fault operation

## 5.1.3.1 [SRS\_Mcu\_12394] The MCU driver shall provide a notification of failure of the clock source

Type:	Valid
Description:	The MCU driver shall provide a notification in order to report failure conditions for the clock source when a failure has occurred with the clock generation in the MCU. The notification shall be provided if MCU is able to detect these kind of failures. As the Diagnostic Event Manager will interface to this function, the notification shall not be called during startup phase.
Rationale:	Once a fault is detected a choice of recovery may be desired.
Use Case:	Loss of crystal recovery and orderly shutdown
Dependencies:	
Supporting Material:	

J( RS\_BRF\_01064,RS\_BRF\_02168)

### 5.1.4 Shutdown operation

# 5.1.4.1 [SRS\_Mcu\_12268] The MCU driver shall provide a service to activate MCU power saving modes of the $\mu$ C

Type:	Valid
Description:	The MCU driver shall provide a service to activate MCU power saving modes of the $\mu$ C.
Rationale:	
Use Case:	The upper layer intends to enter ECU reduced power mode. The upper layer is calling the MCU driver to activate the appropriate MCU setting.
Dependencies:	[SRS_Mcu_12421] Low Power Mode Configuration



Supporting Material:	Note: The MCU modes Low Power Modes are not required to be
	implemented in each microcontroller device.

[(RS\_BRF\_01184)

### 5.2 Remarks

This chapter [MCU driver] has many types of functionality gathered together to solve a problem of correct initialization following recovery from an MCU power saving mode or a reset.

A configuration tool is very important for the correct implementation of this functionality and may need to be part of the final solution.



### 6 References

### 6.1 Deliverables of AUTOSAR

**[DOC\_LAYERED\_ARCH]** Layered Software Architecture, AUTOSAR\_EXP\_LayeredSoftwareArchitecture.pdf

**[AUTOSAR\_GLOSSARY]** Glossary, AUTOSAR\_TR\_Glossary.pdf.pdf

**[SRS\_BSW\_GENERAL]** General Requirements on Basic Software Modules, AUTOSAR\_SRS\_BSWGeneral.pdf

[SRS\_BSW\_SPAL] General Requirements on SPAL, AUTOSAR\_SRS\_SPALGeneral.pdf

**[TPS\_STDT\_0078]** Software Standardization Template AUTOSAR\_TPS\_StandardizationTemplate.pdf

### 6.2 Related standards and norms

**[STD\_HIS\_IO\_DRIVER]** HIS API IO Driver, V2.1.3, April 29<sup>th</sup>, 2004, API\_IODriver\_2\_1\_3.pdf