

Document Title	Methodology
Document Owner	AUTOSAR
Document Responsibility	AUTOSAR
Document Identification No	068
Document Classification	Auxiliary

Document Status	Final
Part of AUTOSAR Release	4.2.2

Document Change History				
Release	Changed by	Description		
4.2.2	AUTOSAR Release Management	Minor corrections and editorial changes		
4.2.1	AUTOSAR Release Management	 Support for Safety Extensions added Support for Diagnostic Extract added Support for Rapid Prototyping added Support for Sender Receiver Serialization added 		
4.1.3	AUTOSAR Release Management	 Alignment of the AUTOSAR Methodology to the System Description categories Editorial changes 		
4.1.2	AUTOSAR Release Management	Harmonization between ECU Configuration specification and AUTOSAR Methodology		
4.1.1	AUTOSAR Administration	 Allow the usage of requirement ID definition and tracing for specification items Updated chapter 3.6 Ecu Integration and Configuration with support for A2L function Added chapter 2.14 How to resolve Name Conflicts Added sections 3.4.1.15 Define Consistency Needs and 3.4.2.17 Consistency Needs Refine definition of Binding Times 		



4.0.3	AUTOSAR Administration	 Simplification of use case diagrams by removing task use and introducing deliverables on use cases level (see Methodology Concept chapter) Readability improvement by generation of tables with navigable links Introduction of Variant Handling, E2E support, System Constraints Description Refinement of Methodology Library, including the extension of deliverables in different use cases
4.0.1	AUTOSAR Administration	 Changed tool platform for the SPEM model Publish as pdf file instead of html Used new table format for the model elements Added SPEM diagrams Methodology Concept chapter detailed Memory Mapping use case added Reworked and restructured use cases for more readability Direct references to meta-model elements in figures and tables
3.1.1	AUTOSAR Administration	Legal Disclaimer revised
3.0.1	AUTOSAR Administration	 Subchapter limitations of the current version enhanced Document meta information extended Small layout adaptations made
2.1.15	AUTOSAR Administration	 Updated chapter 5 ECU-Design Updated chapter 6.1 Relationship with Services Legal disclaimer revised Release Notes added Advice for users revised Revision Information added
2.0	AUTOSAR Administration	Initial release



Disclaimer

This specification and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the specification.

The material contained in this specification is protected by copyright and other types of Intellectual Property Rights. The commercial exploitation of the material contained in this specification requires a license to such Intellectual Property Rights.

This specification may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the specification may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The AUTOSAR specifications have been developed for automotive applications only. They have neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

Advice for users

AUTOSAR specifications may contain exemplary items (exemplary reference models, "use cases", and/or references to exemplary technical solutions, devices, processes or software).

Any such exemplary items are contained in the specifications for illustration purposes only, and they themselves are not part of the AUTOSAR Standard. Neither their presence in such specifications, nor any later documentation of AUTOSAR conformance of products actually implementing such exemplary items, imply that intellectual property rights covering such exemplary items are licensed under the same rules as applicable to the AUTOSAR Standard.



Table of Contents

1	Intro	duction							17
	1.1 1.2 1.3 1.4 1.5	Overview Known Limitations Scope Methodology Cond 1.5.1 Method	cepts		 			 	17 17 18 18 19
			Work Product Definition						
			Role Definition						
			Tool Definition						
			Guidance						
			Tables						
			ty Patterns (Use Case Elements)						
			Activity						
	1.6		ceability						
_		-	ocability	 •	•	•	•	•	
2	Use	Cases							40
	2.1	Overall View		 					
			ion						
			Views on the System						
			Overall Workflow						
			v						
	2.2		act System Description						
		•							
			ion						
			v						
	2.3		stem Description						
		•							
			ion						
			v						50
	2.4		Components						
		· ·	an Atomic Software Component .						
			Purpose						
			Description						
			Workflow						
		·	Application Software						
			Purpose						
			Description						
			Workflow						
			ases for more Specialized Software (-					
			Purpose						
		2.4.3.2	Description						62



	2.4.3.	.3	Workflow	62
2.5	Develop S	System a	and Subsystems	68
	2.5.1		ew	68
	2.5.1.	.1	Purpose	68
	2.5.1.	.2	Description	68
	2.5.2	Design	System	72
	2.5.2.		Purpose	72
	2.5.2.	.2	Description	72
	2.5.2.	.3	Workflow	73
	2.5.3		te System Extract	78
	2.5.3.		Purpose	78
	2.5.3.	.2	Description	78
	2.5.3.	.3	Workflow	78
	2.5.4		ECU System Description	78
	2.5.4.		Purpose	78
	2.5.4.	.2	Description	79
	2.5.4.	.3	Workflow	79
	2.5.5		Sub-System	80
	2.5.5.		Purpose	80
	2.5.5.		Description	80
	2.5.5.		Workflow	82
	2.5.6		te ECU Extract	82
	2.5.6.		Purpose	82
	2.5.6.		Description	83
	2.5.6.		Workflow	83
	2.5.7		Transformer	84
	2.5.7.	_	Purpose	84
	2.5.7.	.2	Description	84
	2.5.7.	.3	Workflow	85
	2.5.8	Define S	System Safety Information	86
	2.5.8.		Purpose	86
	2.5.8.	.2	Description	86
	2.5.8.	.3	Workflow	87
2.6	Develop I	Basic Sc	oftware	88
	2.6.1		ew	88
	2.6.1.		Purpose	88
	2.6.1.	.2	Description	88
	2.6.1.		Workflow	88
	2.6.2	Design	BSW	89
	2.6.2.	•	Purpose	89
	2.6.2.	.2	Description	89
	2.6.2.	.3	Workflow	90
	2.6.3		BSW Module	92
	2.6.3.		Purpose	92
	2.6.3.		Description	92
	2.6.3.		Workflow	93



2.7	Integrate	Software for ECU	95
	2.7.1	Description	95
	2.7.2	Overview	96
	2.7.2		96
	2.7.2		96
	2.7.2	·	99
	2.7.3		100
	2.7.3	•	100
	2.7.3	· ·	101
	2.7.4		102
	2.7.4		102
	2.7.4		103
	2.7.5		104
	2.7.5		104
	2.7.5		105
	2.7.6		106
	2.7.6		106
	2.7.7		106
	2.7.7		106
	2.7.7		107
	2.7.8	Build Executable	110
	2.7.8		110
	2.7.8	3.2 Workflow	111
	2.7.9	Configuration Classes	112
	2.7.9		113
	2.7.9	.2 Configuration Class: Link Time	117
	2.7.9	Configuration Class: Post-build Time	119
	2.7.9	.4 Handling of different post-build variants in configura-	
		tion classes	123
2.8	Compone	ents and Services	124
	2.8.1	Purpose	124
	2.8.2		124
	2.8.3	Workflow	124
2.9	Calibration	on Overview	130
	2.9.1	Purpose	130
	2.9.2	Description	130
	2.9.3	Workflow	131
2.10	Memory	Mapping	135
	2.10.1	Purpose	135
	2.10.2	Description	136
	2.10.3	Workflow	136
2.11	E2E Prot	tection	140
	2.11.1	Purpose	140
	2.11.2	to the second se	140
	2.11.3	Workflow	141
2.12	Diagnost	tic Extract	141





	2.12.1	Purpose		‡1
	2.12.2	Description		‡ 1
	2.12.3	Workflow		1 5
2.13	Rapid Pr	totyping		19
	2.13.1	• • •		19
	2.13.2	•		19
	2.13.3			50
2.14				
	2.14.1			_
	2.14.2	•		
	2.14.3	•		
2 15	Variant H			
2.10	2.15.1	•		
	2.15.1			
	2.15.2	•		
	2.15.		3	
	2.15.3		-	
0.40	2.15.4	-	s	
2.16		_		
	2.16.1			
	2.16.2		of Artifacts with respect to Binding Times 16	
	2.16.3		Binding Times	
	2.16.	_	<pre>.ntDerivationTime 16</pre>	
	2.16.		onDesignTime	
	2.16.		BindingTime	
	2.16.	<u> </u>	DesignTime \dots 16	
	2.16.		nerationTime 16	35
	2.16.	-	pileTime 16	
	2.16.	3.7 Compile	eTime 16	36
	2.16.	3.8 LinkTir	ne 16	36
	2.16.	3.9 PostBui	.ld	<u>3</u> 7
	2.16.	3.10 Runtime		37
2.17	How to re	solve Name Conf	licts	37
	2.17.1	Reasons for Nam	ne Conflicts	37
	2.17.2	Points in the Met	hodology where Name Conflicts are resolved 16	36
	2.17.3		resolving Name Conflicts	39
Meth	nodology Lil		17	
3.1	Common	Flomonte		70
J. I	3.1.1		nds	
	_			
	3.1.2			
	3.1.2		eral Documentation	
	3.1.2		dmin Data	
	3.1.2		lias Names	
	3.1.2		Variant	
	3.1.2	b Define M	emory Addressing Modes 17	8

3



	3.1.2.6	Configure Memmap Allocation	179
	3.1.2.7	Generate BSW Memory Mapping Header	181
	3.1.2.8	Generate SWC Memory Mapping Header	184
	3.1.2.9	Configure Compiler Memory Classes	186
	3.1.2.10	Generate Compiler Configuration	188
	3.1.3 Work P	Products	189
	3.1.3.1	General Documentation	189
	3.1.3.2	Alias Name Set	190
	3.1.3.3	Evaluated Variant Set	190
	3.1.3.4	General Autosar Artifact	192
	3.1.3.5	General Deliverable	193
	3.1.3.6	General Non-Autosar Artifact	193
	3.1.3.7	Postbuild Variant Set	194
	3.1.3.8	Predefined Variant	195
	3.1.3.9	Standard Header Files	196
	3.1.3.10	System Constant Value Set	198
	3.1.4 Roles		199
	3.1.5 Tools		209
	3.1.5.1	Compiler	209
	3.1.5.2	Linker	
	3.1.6 Diagno	stics	210
	3.1.6.1	Work Products	210
	3.1.7 Safety		212
	3.1.7.1	Tasks	212
	3.1.7.2	Work Products	221
3.2	Virtual Functiona	ll Bus	224
			225
	3.2.1.1	Define VFB Top Level	225
	3.2.1.2	Define VFB Composition Component	
	3.2.1.3	Extend Composition	227
	3.2.1.4	Define VFB Component Constraints	229
	3.2.1.5	Define VFB Application Software Component	230
	3.2.1.6	Define VFB Sensor or Actuator Component	231
	3.2.1.7	Define VFB Parameter Component	232
	3.2.1.8	Define ECU Abstraction Component	233
	3.2.1.9	Define Complex Driver Component	234
	3.2.1.10	Define VFB NvBlock Software Component	235
	3.2.1.11	Define Wrapper Components to Integrate Legacy	
		Software	236
	3.2.1.12	Define VFB Interfaces	237
	3.2.1.13	Define VFB Types	238
	3.2.1.14	Define VFB Modes	239
	3.2.1.15	Define VFB Constants	240
	3.2.1.16	Define VFB Timing	241
	3.2.1.17	Define VFB Variants	242
	3.2.1.18	Define VFB Integration Connector	243



	3.2.1.19	Translate Non-AUTOSAR Description to AUTOSAR	
		Description	245
	3.2.2 Work P	Products	246
	3.2.2.1	VFB System	246
	3.2.2.2	Overall VFB System	
	3.2.2.3	VFB System Extract	
	3.2.2.4	VFB Top Level System Composition	
	3.2.2.5	VFB Composition Component	
	3.2.2.6	VFB AUTOSAR Standard Package	
	3.2.2.7	AUTOSAR Specification of Application Interfaces	
	3.2.2.8	VFB Atomic Software Component	
	3.2.2.9	VFB Atomic Application Software Component	
	3.2.2.10	Complex Driver Component	
	3.2.2.11	ECU Abstraction Software Component	
	3.2.2.12	VFB Parameter Component	
	3.2.2.13	VFB Sensor Actuator Component	
	3.2.2.14	VFB NvBlock Software Component	
	3.2.2.15	VFB Non AUTOSAR Component	
	3.2.2.16	VFB Interfaces	
	3.2.2.17	VFB Types	
	3.2.2.18	VFB Data Type Mapping Set	
	3.2.2.19	VFB Modes	267
	3.2.2.20	VFB Constants	268
	3.2.2.21	VFB Software Component Mapping Constraints	268
	3.2.2.22	VFB Timing	
	3.2.2.23	Description of a Non-AUTOSAR System	
	3.2.2.24	Integration Connector	
3.3	System		
0.0	3.3.1 Tasks		
	3.3.1.1	Set System Root	
	3.3.1.2	Assign Top Level Composition	
	3.3.1.3	Define ECU Description	274
	3.3.1.4	Define System Topology	275
	3.3.1.5	Define Software Component Mapping Constraints .	
	3.3.1.6	Deploy Software Component	277
	3.3.1.7	Generate or Adjust System Flat Map	278
	3.3.1.8	Derive Communication Needs	279
	3.3.1.9	Define Signal Path Constraints	280
	3.3.1.10	Define System Variants	281
	3.3.1.11	Define System Timing	283
	3.3.1.12	Extend Topology	284
	3.3.1.13	Select Software Component Implementation	285
	3.3.1.14		286
	3.3.1.14	Select Design Time Variant	287
		Define System View Mapping	
	3.3.1.16	Create Transformer Specification	
	3.3.1.17	Define Rapid Prototyping Scenario	289



	3.3.2	Work P	roducts	290
	3.3.2	.1	System Description	290
	3.3.2	.2	Abstract System Description	294
	3.3.2	.3	Complete ECU Description	296
	3.3.2	.4	System Description Root Element	296
	3.3.2	.5	System Mapping Overview	297
	3.3.2	.6		298
	3.3.2	.7		300
	3.3.2	.8		300
	3.3.2	.9	Mapping of Software Components to Implementations	301
	3.3.2	.10		301
	3.3.2	.11		302
	3.3.2	.12	· · · · · · · · · · · · · · · · · · ·	303
	3.3.2	.13	·	304
	3.3.2	.14		305
	3.3.2	.15		306
	3.3.2		· ·	307
	3.3.2		,	308
	3.3.2			309
	3.3.2			309
	3.3.2			310
	3.3.3	Commu	1 71 0	310
	3.3.3		· · · · · · · · · · · · · · · · · · ·	311
	3.3.3	.2		320
	3.3.4	ECU Ex	tract	325
	3.3.4	.1	Tasks	325
	3.3.4	.2	Work Products	333
3.4	Software	Compor	nent	340
	3.4.1	Tasks .		341
	3.4.1	.1	Define Software Component Internal Behavior	341
	3.4.1.	.2	Define Partial Flat Map	342
	3.4.1	.3	Define Software Component Timing	343
	3.4.1	.4	Define SymbolProps for Types	344
	3.4.1.	.5	Add Documentation to the Software Component	345
	3.4.1	.6	Generate Atomic Software Component Contract Header Files	346
	3.4.1.	7		348
	3.4.1		·	350
	3.4.1		·	351
	3.4.1	_		353
	3.4.1		· · · · · · · · · · · · · · · · · · ·	354
	3.4.1		· ·	356
	3.4.1			357
	3.4.1			358
	3.4.1		· · · · · · · · · · · · · · · · · · ·	359
	3.4.2	Work P		361



	3.4.2.1	Delivered Atomic Software Components	361
	3.4.2.2	Software Component Internal Behavior	
	3.4.2.3	Atomic Software Component Implementation	
	3.4.2.4	Software Component Documentation	
	3.4.2.5	Software Component Timing	
	3.4.2.6	Software Component to BSW Mapping	368
	3.4.2.7	Partial Flat Map	
	3.4.2.8	Application Header File	
	3.4.2.9	Software Component Data Types Header	
	3.4.2.10	Component RTE Prebuild Configuration Header	
	3.4.2.11	Atomic Software Component Source Code	
	3.4.2.12	Atomic Software Component Object Code	
	3.4.2.13	Optimized Application Header File	373
	3.4.2.14	Optimized Software Component Object Code	
	3.4.2.15	Consistency Needs	
	3.4.2.16	Rapid Prototyping Wrapper Header File	
	3.4.2.17	Rapid Prototyping Wrapper Source Code	
	3.4.3 Tools		376
	3.4.3.1	Component API Generator Tool	
3.5	Basic Software		377
	3.5.1 Tasks		
	3.5.1.1	Define BSW Types	
	3.5.1.2	Define BSW Entries	379
	3.5.1.3	Define BSW Interfaces	380
	3.5.1.4	Define Vendor Specific Module Definition	
	3.5.1.5	Define BSW Behavior	
	3.5.1.6	Define BSW Module Timing	
	3.5.1.7	Generate BSW Contract Header Files	
	3.5.1.8	Implement a BSW Module	
	3.5.1.9	Develop BSW Module Generator	
	3.5.1.10	Create Library	
	3.5.1.11	Compile BSW Core Code	389
	3.5.1.12	Generate BSW Module Prebuild Dataset	391
		Products	392
	3.5.2.1	BSW Standard Package	392
	3.5.2.2	BSW Module Bundle	394
	3.5.2.3	BSW Design Bundle	395
	3.5.2.4	BSW Module ICS Bundle	396
	3.5.2.5	BSW Module Delivered Bundle	397
	3.5.2.6	AUTOSAR Software Module Specification	399
	3.5.2.7	AUTOSAR Standard Types	400
	3.5.2.8	AUTOSAR Platform Types	400
	3.5.2.9	BSW Module Generator	401
	3.5.2.10	AUTOSAR Standardized ECU Configuration Param-	.01
	0.0.2.10	eter Definition	401
	3.5.2.11	BSW Module Preconfigured Configuration	402
	0.0.2.11	Downwoodie i recomigured Comiguration	702



	3.5.2.12	BSW Module Recommended Configuration	403
	3.5.2.13	BSW Module Vendor Specific Configuration Param-	
		eter Definition	404
	3.5.2.14	BSW Types	405
	3.5.2.15	Basic Software Entries	405
	3.5.2.16	Basic Software Module Description	405
	3.5.2.17	Basic Software Module Internal Behavior	406
	3.5.2.18	Basic Software Module Implementation Description .	407
	3.5.2.19	Build Action Manifest	408
	3.5.2.20	Basic Software Module Timing	409
	3.5.2.21	Basic Software Module Core Header	410
	3.5.2.22	Basic Software Module Core Source Code	410
	3.5.2.23	Basic Software Interlink Header	411
	3.5.2.24	Basic Software Interlink Types Header	412
	3.5.2.25	BSW RTE Prebuild Configuration Header	412
	3.5.2.26	Basic Software Module Object Code	
	3.5.2.27	Library Description	413
	3.5.2.28	Library Header Files	414
	3.5.2.29	Library Object Code	415
3.6		and Configuration	415
	3.6.1 Tasks		415
	3.6.1.1	Provide RTE Calibration Dataset	415
	3.6.1.2	Define Integration Variant	416
	3.6.1.3	Generate Base ECU Configuration	418
	3.6.1.4	Generate Updated ECU Configuration	419
	3.6.1.5	Define ECU Timing	420
	3.6.1.6	Configure EcuC	421
	3.6.1.7	Configure OS	423
	3.6.1.8	Configure RTE	425
	3.6.1.9	Configure Watchdog Manager	427
	3.6.1.10	Configure Mode Management	
	3.6.1.11	Configure NvM	429
	3.6.1.12	Configure Diagnostics	431
	3.6.1.13	Create Service Component	432
	3.6.1.14	Connect Service Component	436
	3.6.1.15	Configure COM	437
	3.6.1.16	Configure IO Hardware Abstraction	439
	3.6.1.17	Configure MCAL	440
	3.6.1.18	Configure Debug	441
	3.6.1.19	Configure Transformer	444
	3.6.1.20	Generate BSW Configuration Code and Model Ex-	
	-	tensions	445
	3.6.1.21	Generate Local MC Data Support	447
	3.6.1.22	Create MC Function Model	448
	3.6.1.23	Generate RTE	450
	3.6.1.24	Generate Scheduler	453
	· - · - ·		





	3.6.1.25	Generate OS	. 454
	3.6.1.26	Generate RTE Prebuild Dataset	. 455
	3.6.1.27	Compile ECU Source Code	. 456
	3.6.1.28	Generate ECU Executable	
	3.6.1.29	Generate RTE Postbuild Dataset	. 460
	3.6.1.30	Generate A2L	
	3.6.1.31	Measure Resources	
	3.6.1.32	Refine Rapid Prototyping Scenario	. 464
	3.6.2 Work F	Products	
	3.6.2.1	BSW Module Integration Bundle	
	3.6.2.2	ECU Software Delivered	
	3.6.2.3	Service Component Description	
	3.6.2.4	ECU Service Connectors	
	3.6.2.5	ECU Timing	
	3.6.2.6	BSW Module Interface Extension	
	3.6.2.7	BSW Module Behavior Extension	
	3.6.2.8	BSW Module Implementation Extension	. 470
	3.6.2.9	ECU Configuration Values	
	3.6.2.10	RTE Implementation Description	
	3.6.2.11	RTE Prebuild Configuration Header	
	3.6.2.12	Calibration Parameter Value Set	
	3.6.2.13	MC Function Model	
	3.6.2.14	Local Measurement and Calibration Support Data	
	3.6.2.15	RTE Measurement and Calibration Support Data	
	3.6.2.16	RTE Source Code	. 479
	3.6.2.17	BSW Scheduler Code	. 479
	3.6.2.18	OS Generated Code	. 480
	3.6.2.19	RTE Postbuild Variants Dataset	. 480
	3.6.2.20	ECU Object Code	. 480
	3.6.2.21	ECU Executable	
	3.6.2.22	Map of the ECU Executable	. 481
	3.6.2.23	A2L File	. 482
	3.6.2.24	MC Driver Support Data	. 482
	3.6.2.25	MC Additional Config	. 483
	3.6.3 Tools		. 483
	3.6.3.1	RTE Generator	. 483
	3.6.3.2	BSW Generator Framework	. 484
	3.6.4 ECU C	onfig Classes	. 484
	3.6.4.1	Tasks	. 484
	3.6.4.2	Work Products	. 494
Α	History of Constraints a	and Specification Items	498
	A.1 Constraint Histor	ry of this Document according to AUTOSAR R4.1.1.	. 498
		Specification Items in R4.1.1	
		ry of this Document according to AUTOSAR R4.1.2	
		Specification Items in R4.1.2	
	= 0.00	•	





A.3	Constra	int History of this Document according to AUTOSAR R4.1.3	501
	A.3.1	Added Specification Items in R4.1.3	501
	A.3.2	Changed Specification Items in R4.1.3	501
A.4	Constra	int History of this Document according to AUTOSAR R4.2.1	502
	A.4.1	Added Specification Items in R4.2.1	502
	A.4.2	Changed Specification Items in R4.2.1	502
	A.4.3	Deleted Specification Items in R4.2.1	503
A.5	Constra	int History of this Document according to AUTOSAR R4.2.2	503



Bibliography

- [1] Requirements on Methodology AUTOSAR_RS_Methodology
- [2] Software Process Engineering Meta-Model Specification http://www.omg.org/spec/SPEM/2.0/
- [3] Integration of Franca IDL Software Component Descriptions AUTOSAR TR FrancaIntegration
- [4] Virtual Functional Bus AUTOSAR EXP VFB
- [5] Software Component Template AUTOSAR_TPS_SoftwareComponentTemplate
- [6] General Specification of Basic Software Modules AUTOSAR_SWS_BSWGeneral
- [7] General Specification on Transformers AUTOSAR ASWS TransformerGeneral
- [8] Basic Software Module Description Template AUTOSAR_TPS_BSWModuleDescriptionTemplate
- [9] System Template AUTOSAR_TPS_SystemTemplate
- [10] Specification of ECU Configuration AUTOSAR_TPS_ECUConfiguration
- [11] Specification of Memory Mapping AUTOSAR SWS MemoryMapping
- [12] Specification of Compiler Abstraction AUTOSAR_SWS_CompilerAbstraction
- [13] Specification of Module E2E Transformer AUTOSAR_SWS_E2ETransformer
- [14] Diagnostic Extract Template
 AUTOSAR_TPS_DiagnosticExtractTemplate
- [15] Specification of RTE Software AUTOSAR_SWS_RTE
- [16] Specifications of Safety Extensions AUTOSAR_TPS_SafetyExtensions
- [17] ISO 26262 (Part 1-10) Road vehicles Functional Safety, First edition http://www.iso.org



- [18] Generic Structure Template
 AUTOSAR_TPS_GenericStructureTemplate
- [19] Standardization Template AUTOSAR_TPS_StandardizationTemplate
- [20] Specification of ECU Resource Template AUTOSAR_TPS_ECUResourceTemplate



1 Introduction

1.1 Objective

AUTOSAR requires a common technical approach for some steps of system development. This approach is called the AUTOSAR methodology. This document defines and describes this AUTOSAR methodology. It covers all major steps of the development of a system with AUTOSAR: from the definition of the Virtual Functional Bus to the generation of an ECU executable.

The requirements for the methodology are defined in the document [1].

1.2 Overview

[TR_METH_01000] Domains of the AUTOSAR methodology [The AUTOSAR methodology is structured into several domains of development:

- Virtual Functional Bus
- System
- Software Component
- Basic Software
- ECU

(RS METH 00018, RS METH 00032)

[TR_METH_01001] AUTOSAR methodology assets [For each domain, relevant Work Product, Task, Role, and Tool elements are defined (see chapter 3). In addition, there are elements that are common for all domains (see 3.1). | (RS METH 00025, RS METH 00028, RS METH 00009)

[TR_METH_01002] AUTOSAR methodology use cases [Use cases (see chapter 2) show how these standard reusable elements are applied to support real-world development. The Overall View (see chapter 2.1) provides an end to end view on the typical use cases of all domains.] (RS_METH_00018, RS_METH_00056, RS_METH_00009)

1.3 Known Limitations

Work products and tasks for End to End communication safety are not completely described in the methodology.



1.4 Scope

[TR_METH_01003] Scope of the AUTOSAR methodology [The AUTOSAR methodology is not a complete process description, but rather aggregates the various elements of AUTOSAR and shows how they are brought together to develop a complete system. Sample aggregations are provided as Use Cases in Chapter 2. | (RS_METH_00006)

[TR_METH_01004] Support for various stakeholders by the AUTOSAR methodology
☐ The structure of the methodology was designed to help cover the needs of various AUTOSAR stakeholders:

- Organizations: Methodology is modeled in a modular format to allow organizations to tailor it and combine the Methodology within their own internal processes, while identifying points where they interact with other organizations.
- Engineers: Methodology is scoped to allow engineers of various roles quickly find AUTOSAR information that is relevant to their specific needs.
- Tool Vendors: Methodology provides a common language to share among all AUTOSAR members and a common expectation of what capabilities tools should support.

(RS METH 00018, RS_METH_00056, RS_METH_00009)

[TR_METH_01005] Restrictions of AUTOSAR methodology [Furthermore, the methodology does not prescribe a precise order in which activities should be carried out. The methodology is a mere work-product flow: it defines the dependencies of activities on work-products. This means that when the information specified in the methodology is available, an activity can be carried out to produce the output work-products. The set of activities is described in Chapter 3.

This restriction implies that the AUTOSAR methodology does not define an overall timeline and does not define how and when iterations are carried out. For example during system and design, the same activity (namely configuring the system) will be carried out repeatedly with various levels of precision. There will be a first "rough" configuration and a final "precise" configuration which might depend on the feedback from the actual configuration or even implementation of ECUs. How and when such refinement steps are to be carried out is NOT defined in the methodology. | (RS METH 00047)

1.5 Methodology Concepts

[TR_METH_01006] General AUTOSAR methodology concepts [The AUTOSAR methodology defines activities performed by roles that create work products as general reusable method patterns¹. The reusable method pattern elements are described in the method library section (cf. Section 1.5.1). The methodology also describes

¹The RS_Methodology document uses the term "Activity" when addressing process elements in general. In the SPEM model the atomic process elements are called "Tasks", whereas an "Activity" is used to organize tasks and to define processes.



sample process patterns of typical use cases considered for the creation of AUTOSAR work products. The patterns use process elements that are described in the use case section (cf. Section 1.5.2).

The definitions and the figures are made according to the Software Process Engineering Meta-Model Specification [2]. The symbols are taken from the Enterprise Architect modeling tool. \(\] (RS_METH_00018, RS_METH_00021, RS_METH_00047, RS_METH_00048, RS_METH_00025, RS_METH_00061, RS_METH_00028, RS_METH_00056)

1.5.1 Method Library (Method Content)

[TR_METH_01007] Method Library [The Method Library defines the Method Library Elements of every method pattern such as Roles, Tasks, and Work Product Definitions.](RS_METH_00018, RS_METH_00021, RS_METH_00025, RS_METH_00028)

[TR_METH_01008] Method Library Element [A Method Library Element contains a description of the element to define its purpose in the methodology and thus provides the basic contents of the AUTOSAR methodology. The Method Library Elements are used for the description of the related development processes. These Method Library Elements can been seen as a standard. [(RS_METH_00017, RS_METH_00043, RS_METH_00050, RS_METH_00064)]

[TR_METH_01009] Relation of Method Library and Method Library Element to the SPEM meta model [The Method Library and the Method Library Elements correspond to the Method Content and Method Content Elements in the SPEM meta model [2]. $](RS_METH_00009)$

[TR_METH_01010] Overview of Method Library Elements [Method Library Elements comprise:

- Task Definition (section 1.5.1.1)
- Work Product Definition (section 1.5.1.2)
- Role Definition (section 1.5.1.3)
- Tool Definition (section 1.5.1.4)
- Guidance (section 1.5.1.5)²

](RS_METH_00021, RS_METH_00025, RS_METH_00027, RS_METH_00042, RS_METH_00028)

The element symbols are shown in Figure 1.1.

²The Guidance is currently not used in the AUTOSAR Methodology. It may be used in future documents.



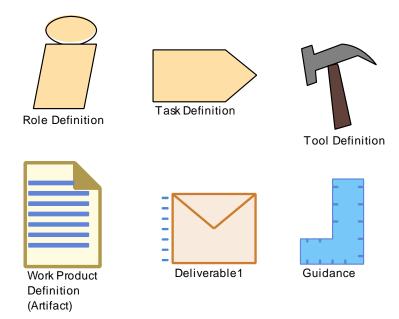


Figure 1.1: Symbols of AUTOSAR Method Content Elements

1.5.1.1 Task Definition

[TR_METH_01011] Task Definition | According to the SPEM meta model, a Task Definition is an assignable unit of work that is being performed by specific Roles. The duration of a task is generally a few hours to a few days. Tasks usually generate one or more work products. Each Task is associated to input and output Work Products. Inputs are differentiated in mandatory and optional inputs. A Task is used as one element among others to define a Process. | (RS_METH_00021)

[TR_METH_01012] Task semantics [A Task has a clear purpose in which the performing roles achieve a well defined goal. It provides complete step-by-step explanations of doing all the work that needs to be done to achieve this goal. This description is completely independent of when in a process lifecycle the work would actually be done. It does not describe when what work is being done, but describes all the work that gets done. | (RS_METH_00021, RS_METH_00056)

[TR_METH_01013] Task usage [When a Task is used in a process (cf. Task Use), it provides the information of which pieces of the Task will actually be performed at any particular point in time. This assumes that the Task will be performed in the process over and over again, but each time with a slightly different emphasis on different steps or aspects of the task description [2].

For the AUTOSAR Methodology, a Task is a reusable element that is used across multiple methodology use cases. A Task is associated to at least one performing Role and may have several additional performers. Tasks use Tools to achieve their outputs. Optional performers and optional input and outputs to the task are described by the relationship's multiplicity. | (RS METH 00021, RS METH 00042)



An overview of the Task as it is used in this document is given in Figure 1.2.

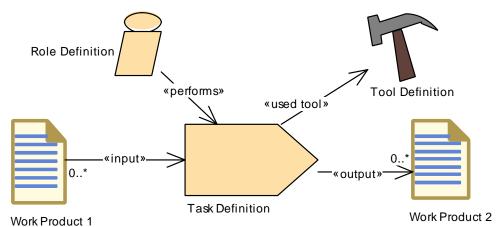


Figure 1.2: Task Definition Overview

1.5.1.2 Work Product Definition

[TR_METH_01014] Work Product Definition | According to the SPEM meta model, a Work Product Definition is used, modified, and produced by Tasks (i.e. a task input and output). Work Products are in most cases tangible work products consumed, produced, or modified by Tasks. They may serve as a basis for defining reusable assets. A Work Product can be related to other work products by a kind of nesting relationship. \(\left(RS_METH_00046, RS_METH_00047, RS_METH_00025, RS_METH_00052, RS_METH_00061, RS_METH_00054) \)

[TR_METH_01015] Relationship between Roles and Work Products [Roles use Work Products to perform Tasks and produce Work Products in the course of performing the Tasks. Work Products are in the responsibility of the associated Roles, thereby also defining a set of skills the performing Role should have. Even though one Role might own a specific type of Work Product, other Roles can still use the Work Product for their work, and update them [2].](RS_METH_00052, RS_METH_00061)

A Work Product can be of type Artifact or Deliverable:

• [TR_METH_01017] Artifact Definition [Artifact: A tangible Work Product that is consumed, produced, or modified by one or more Tasks. Artifacts may be composed of other Artifacts and may serve as a basis for defining reusable assets [2].] (RS_METH_00052, RS_METH_00061, RS_METH_00054)

[TR_METH_01018] Kinds of Artifacts | For the AUTOSAR Methodology, typical kinds of artifacts are:

- AUTOSAR XML
- Source Code



- Object Code
- Executable
- Text

For more details see chapter 3.1.1. $](RS_METH_00063, RS_METH_00015, RS_METH_00057)$

[TR_METH_01019] Properties of Artifacts | At a high level, an artifact is represented as a single conceptual file. As a rule of thumb, the AUTOSAR Methodology will distinguish artifacts that have most of the following properties:

- Separate versioning is needed
- A dedicated life cycle has to be cared for
- Different exchange requirements need to be fulfilled
- Change in responsible roles
- Change in multiplicities
- Change in physical representation or format
- One of the products may be a separate deliverable to another party
- Separation of standardized from non-standardized parts

(RS METH 00063, RS METH 00017, RS METH 00016)

[TR_METH_01020] Relationship between Artifacts and meta-model elements [To express a relationship between artifacts of the methodology model and any AUTOSAR meta-model element, a relationship with the stereotype «at-pUseMetaModelElement» is used to express this "dependency". For AUTOSAR meta-model elements that are not directly related to methodology elements, there is usually an indirect relationship via a related meta-model element. The methodology can thus focus on the main elements of the meta-model. |(RS_METH_00051)

• [TR_METH_01021] Deliverable Definition | Deliverable: Used to predefine typical or recommended content in the form of Work Products that would be packaged for delivery. Deliverables are used to represent an output from a process that has value, material or otherwise, to a client, customer, or other stakeholder. | (RS_METH_00025, RS_METH_00018, RS_METH_00054)

[TR_METH_01022] Aggregation of Work Products [A Deliverable is a Work Product that aggregates other Work Products. The Method Content maintains pre-configured potential Deliverables [2]. For the AUTOSAR Methodology, the aggregation relationship is used to indicate which Work Products are contained in a deliverable. [RS_METH_00025, RS_METH_00018, RS_METH_00054)



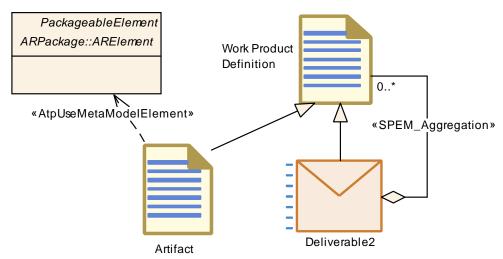


Figure 1.3: Work Product Definition Overview

1.5.1.3 Role Definition

[TR_METH_01023] Role Definition [According to the SPEM meta model, Role Definitions define responsibilities of an individual or a set of individuals and thereby define a set of related skills, competencies, and qualifications needed to perform a Task. A Role can be filled by one person or multiple people, one person may fill several Roles. Each Role performs Tasks. | (RS_METH_00028)

[TR_METH_01024] Role assignment [Roles are not individuals or resources. Individual members of the development organization will wear different hats, or perform different Roles. The mapping from individual to Role, usually performed by the project manager when planning and staffing a project, allows different individuals to act as several different Roles, and for a Role to be taken by several individuals [2].

In the AUTOSAR Methodology, a Role also assigns the responsibility of a Task and defines *optional* performers. Performers that are responsible for e.g. a Task have a multiplicity of 1 for the relationship to the Task, optional performers have optional multiplicity assigned. Role Definitions are usually generic and still provide sufficient level of detail for managers to organize a team. Examples of Roles are "System Engineer", "Safety Engineer", or "Software Developer". \(\) (RS_METH_00028, RS_METH_00056)



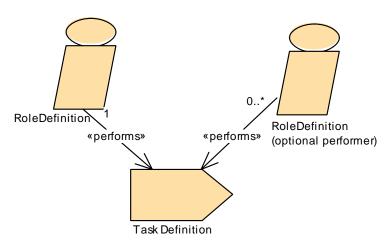


Figure 1.4: Role Definition Overview

1.5.1.4 Tool Definition

[TR_METH_01025] Tool Definition [According to the SPEM meta model, Tool Definitions can be used to specify a tool's participation in a Task. A Tool Definition describes the capabilities of a CASE tool, general purpose tool, or any other automation unit that supports the associated Roles in performing the work defined by a Task. A Tool can identify a resource as useful, recommended, or necessary for a task's completion. A Tool can also be used to manage one or more Work Products [2].

The AUTOSAR Methodology uses the Tool Definition to describe AUTOSAR specific (e.g. Software Component Contract Generator) and other general Tools (e.g. Compilers). The relationship of a Tool to a Task shows which Tools a Role will need to perform the Task. | (RS_METH_00066, RS_METH_00042)



Figure 1.5: Tool Definition Overview

1.5.1.5 **Guidance**

[TR_METH_01026] Guidance definition [According to the SPEM meta model, a Guidance provides additional information related to e.g. Roles, Work Products, and Tasks. A Guidance is classified to indicate a specific type for which perhaps a specific structure and type of content is assumed [2]. | (RS METH 00027)



[TR METH 01027] Guidance kinds [A Guidance can be a

- Supporting Material: Supporting Material is a catch-all for other types of guidance not specifically defined elsewhere. It can be related to all kinds of Content Elements, i.e., including other guidance elements. The AUTOSAR Methodology uses the Supporting Material Guidance type to define title pages, change histories, disclaimers etc.
- Tool Mentor: A Tool Mentor shows how to use a specific Tool to accomplish some piece of work either in the context of or independent from a Task or Activity. In the context of the AUTOSAR Methodology, a Tool Mentor is used in the same way as the Tool element.
- White Paper: White Papers are concept guidances that have been externally reviewed or published and can be read and understood in isolation from other Method Content. AUTOSAR documents are examples of White Papers.

Other Guidances such as Checklists, Concepts, Estimates, Guidelines, Practices, Reports, Reusable Assets, Roadmaps, or Templates as defined in [2] are not used within the AUTOSAR Methodology. | (RS METH 00027)

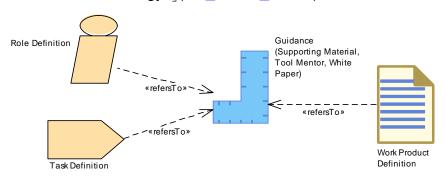


Figure 1.6: Guidance Overview

1.5.1.6 Tables

[TR_METH_01028] Usage of tables [Beside the graphical visualization of the different SPEM diagrams, tables are used to specify and describe the model elements in detail.] (RS_METH_00050, RS_METH_00064)

[TR_METH_01113] Usage of hyperlinks \[Beside the conventional references to chapters, figures and sections the AUTOSAR methodology document utilizes hyperlinks to the used SPEM elements. These hyperlinks are used across the text and within the tables. Using the hyperlinks the reader can quickly navigate to the related elements such as Tasks, Activities, Roles, Work Products and Tools. \[(RS_METH_00067)\]

In the Methodology library the following tables are used:



1.5.1.6.1 Work Product Kind Tables

Category (Work Product Kind)	Work Product Kind
Package	Location in the MetaModel package
Brief Description	Short Description
Description	Detailed Description

Table 1.1: Work Product Kind

1.5.1.6.2 Task Definition Tables

Task Definition	Task	Task		
Package	Location in the Met	Location in the MetaModel package		
Brief Description	Short description			
Description	Detailed description			
Relation Type	Related Element	Mul.	Note	
Performed by	Which Roles Per- form the Task	Opt or not	Description of the specific role needed	
Consumes	What is Consumed by the Task	Mult	Explanation on why this Element is needed.	
Produces	What is produced by the Task	Mult	Explanation on why this Element is needed.	
In/out	What is produced and consumed by the Task	Mult	Explanation on why this Element is needed.	
Used tool	Tool used for that Task	Mult		

Table 1.2: Task

1.5.1.6.3 Work Product Definition Tables

Artifact	Work Product	Work Product		
Package	Location in the Met	Location in the MetaModel package		
Brief Description	Short Description.	Short Description.		
Description	Detailed Description	Detailed Description		
Kind	Work Product Kind	Work Product Kind		
Extended by	Artifacts which exter	Artifacts which extend this Artifact		
Extends	Artifacts which are e	Artifacts which are extended by this Artifact		
Relation Type	Related Element	Related Element Mul. Note		
Aggregated by	To which Deliver- able is it aggre- gated By	Mult	Description of the context of the Aggregation.	



Relation Type	Related Element	Mul.	Note
In/out	Which task is pro- ducing and con- suming the Work Product	Mult	Description of the context of the Work Product production and consumption.
Produced by	Which task is pro- ducing the Work Product	Mult	Description of the context of the Work Product production.
Consumed by	Which task is consuming the Work Product	Mult	Description of the context of the Work Product consumption.
Use meta model element	MetamodelElement Relationship	Mult	

Table 1.3: Work Product

1.5.1.6.4 Deliverable Definition Tables

It is the same structure of table as the Work Product, only the Aggregation is not the same as it can aggregate other Work Products or Deliverables.

Deliverable	Deliverable		
Package	Location in the MetaModel package		
Brief Description	Short Description.		· · · · ·
Description	Detailed Description		
Kind	Work Product Kind		
Extended by	Deliverables which e	xtend th	nis Deliverable
Extends	Deliverables which a	re exter	nded by this Deliverable
Relation Type	Related Element	Mul.	Note
Aggregates	Which Work Products are aggregated to it	Mult	
Aggregated by	To which Deliver- able is it aggre- gated By	Mult	Description of the context of the Aggregation.
In/out	Which task is pro- ducing and con- suming the Deliv- erable	Mult	Description of the Context of production and consumption.
Produced by	Which task is pro- ducing the Deliver- able	Mult	Description of the context of the production.
Consumed by	Which task is consuming the Deliverable	Mult	Description of the context of the consumption.
Use meta model element	MetamodelElement Relationship	Mult	

Table 1.4: Deliverable



1.5.1.6.5 Roles Definition Tables

Role	Role			
Package	Meta-model Package	Meta-model Package Name		
Brief Description	Brief Description Short Description.			
Description	Detailed Description	Detailed Description.		
Relation Type	Related Element	Mul.	Note	
Performs	In which task the performer is acting	Mult		

Table 1.5: Role

1.5.1.6.6 **Tools Tables**

Tool	Tool			
Package	Meta-model Package	Meta-model Package name		
Brief Description	Short Description			
Description	Detailed Description	Detailed Description		
Kind				
Relation Type	Related Element	Mul.	Note	
Used	Task where the tool is used	Mult		

Table 1.6: Tool

1.5.2 Capability Patterns (Use Case Elements)

The method content (cf. Section 1.5.1) is referenced in section 2.1.2 to describe so-called Capability Patterns.

[TR_METH_01029] Capability Patterns definition \lceil A Capability Pattern³ is a process pattern that contains a reusable set of activities. $|(RS_METH_00018)|$

[TR_METH_01030] Composition of Capability Patterns [Capability Patterns can be assembled to larger Capability Patterns that describe development processes or parts of a development process including typical use cases.](RS_METH_00018, RS_METH_00056)

[TR_METH_01031] Adaptability of the AUTOSAR methodology ☐ The main focus of this section is merely to provide a use case process flow that can be supported by an AUTOSAR tool chain rather than to define a complete process description. One reason for doing this is that the AUTOSAR methodology should be adaptable to development processes of different organizations. ☐ (RS_METH_00056)

[TR_METH_01032] Use case elements \lceil This section describes the use case elements. The SPEM meta model defines the Role Use , the Work Product Use and

³In Enterprise Architect a SPEM "Capability Pattern" is called "Process Pattern".



the Task Use elements in addition. Whereas these are important elements when applying SPEM in an organization, the AUTOSAR methodology does not necessarily need these elements since no instantiation of the Enterprise Architect model is intended. The elements are thus not used to enhance readability and ease the description. Instead, Roles, Work Products, Deliverables and Tasks are used directly to describe the details of an Activity.

The element symbols are shown in Figure 1.7. |()




Figure 1.7: Symbols of AUTOSAR Use Case Process Elements

1.5.2.1 **Activity**

[TR_METH_01033] Definition of Activities [In the SPEM meta model, an Activity is the main building block to define a process. An Activity is usually a defined task or work to be done that is commonly executed in one sequence. |(RS_METH_00021)

[TR_METH_01034] Composition of Activities [Activities can include other Activities and thereby often decompose a flow of work and show which Activity precedes other Activities [2]. At the lowest level, Activities are collections of work breakdown elements which in AUTOSAR methodology are Tasks, Roles, and Work Products.](RS_METH_00048, RS_METH_00046, RS_METH_00047, RS_METH_00066)

[TR_METH_01035] Definition of Processes [A Process is a special Activity in the SPEM meta model that describes a typical structure of development projects or parts of them. A Process focuses on the lifecycle and the sequencing of work in breakdown structures. Processes contain sequences of Task and Activities and thereby express a lifecycle of the product under development. Processes also define how to get from one milestone to the next by defining sequences of work, operations, or events [2]. |(RS_METH_00056)

For the AUTOSAR Methodology, the main $Use\ Cases$ are described with 3 types of diagrams.

[TR_METH_01036] Description of overall Use Cases [In the first diagram, the Capability Patterns, Activities and Deliverables are used to describe the overall Use Case, sequence of Activities and their main out-



puts(Deliverables). In these diagrams, the predecessor relationship can be skipped and Deliverables can be extended by other Deliverables (see Figure 1.8). |()

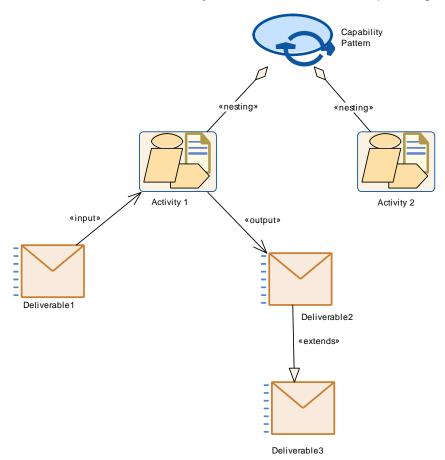


Figure 1.8: Activity Overview

The diagram is followed by its corresponding table as detailed hereunder:

Process Pattern	Capability Pattern			
Package	Meta-model Package	name		
Brief Description	Short Description			
Description	Detailed Description			
Relation Type	Related Element	Related Element Mul. Note		
Aggregates	Activity nested to the Capability Pat- tern or to another Activity	Mult	Context explanation	
Consumes	Deliverable consumed by the Activity	Mult	Why this Activity needs to consume this Deliverable	
Produces	Deliverable pro- duced by the Activity	Mult	Why this Activity is producing this Deliverable	

Table 1.7: Capability Pattern



[TR_METH_01037] Precise description of Use Cases [The second type of diagram are Activities and Task Definition diagrams which precise the main Tasks and Work Products used for the Use Cases but are not as detailed as in the Methodology Library (see Figure 1.9). The task usage in these diagrams will be expressed by the role and in the note at the aggregation. This information will be also visible in the generated table. The Work Products consumed or produced in the use cases will be not integrated in the table for readability. | ()

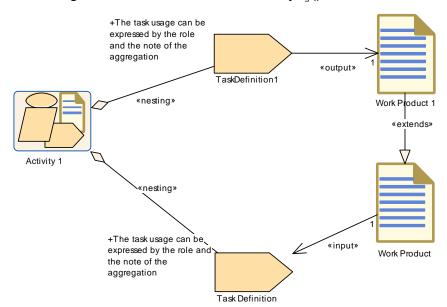


Figure 1.9: Activity and Tasks Overview

The diagram is followed by its corresponding table as detailed hereunder:

Activity	Activity		
Package	Meta-model Package	e Name	
Brief Description	Short Description		
Description	Detailed Description		
Extended by	Activities which exte	nd this A	Activity
Extends	Activities which are	extende	d by this Activity
Relation Type	Related Element	Mul.	Note
Aggregates	Nested task definition	Mult	Task usage description if needed
Consumes	What is Consumed by the Activity	Mult	Explanation on why this Element is needed.
Produces	What is produced by the Activity	Mult	Explanation on why this Element is needed.
In/out	What is produced and consumed by the Activity	Mult	Explanation on why this Element is needed.
Predecessor	Predecessor of the Activity	Mult	Explanation on why the Predecessor is needed.

Table 1.8: Activity



[TR_METH_01038] Detailed description of the work flow $\[$ The third type of diagram contains the Tasks and Work Products used by an Activity in order to show the detailed work flow but not the structure of Activities as seen in Section 1.5.1.1. As an example take Figure 2.9. The table generation is not done for this type of diagram. $\]$ $\[$ $\]$ $\$

1.6 Requirements Traceability

This section states the response of this specification to the corresponding requirements document[1].

Requirement	Description	Satisfied by
[RS_METH_00002]	Methodology shall explain the	[TR_METH_01044]
	typical usage of SW-C template	[TR_METH_01047]
		[TR_METH_01048]
		[TR_METH_01050]
		[TR_METH_01051]
		[TR_METH_01052]
		[TR_METH_01053]
		[TR_METH_01054]
		[TR_METH_01055]
		[TR_METH_01056]
		[TR_METH_01057]
		[TR_METH_01058]
		[TR_METH_01059]
		[TR_METH_01060]
		[TR_METH_01061]
		[TR_METH_01065]
		[TR_METH_01066]
		[TR_METH_01067]
		[TR_METH_01068]
		[TR_METH_01071]
		[TR_METH_01075]
		[TR_METH_01076]
		[TR_METH_01077]
		[TR_METH_01078]



		[TR_METH_01079]
		[TR_METH_01080]
		[TR_METH_01081]
		[TR_METH_01082]
		[TR_METH_01087]
		[TR_METH_01088]
		[TR_METH_01090]
		[TR_METH_01091]
		[TR_METH_01110]
		[TR_METH_01112]
		[TR_METH_01125]
		[TR_METH_01126]
		[TR_METH_01127]
		[TR_METH_01132]
		[TR_METH_01133]
		[TR_METH_02000]
		[TR_METH_02001]
		[TR_METH_02002]
		[TR_METH_02005]
		[TR_METH_03000]
		[TR_METH_03005]
		[TR_METH_03006]
		[TR_METH_03007]
[RS_METH_00003]	Methodology shall explain the	[TR_METH_01083]
	typical usage of BSW Module	[TR_METH_01084]
	Template	[TR_METH_01085]
		[TR_METH_01087]
		[TR_METH_01088]
		[TR_METH_01089]
		[TR_METH_01090]
		[TR_METH_01091]
		[TR_METH_01092]
		[TR_METH_01111]
		[TR_METH_01112]
		[TR_METH_01114]
		[TR_METH_01115]
		[TR_METH_01117]
		[TR_METH_02002]
		[TR_METH_02005]
		[TR_METH_03000]
		[TR_METH_03010]



[RS_METH_00004]	Methodology shall explain the	[TR_METH_01083]
[110_111_00001]	typical usage of the ECU	[TR_METH_01086]
	Configuration template	[TR_METH_01087]
	Comigaration tomplate	[TR_METH_01088]
		[TR_METH_01089]
		[TR METH 01090]
		[TR_METH_01091]
		[TR_METH_01092]
		[TR METH 01095]
		[TR_METH_01098]
		[TR_METH_01103]
		[TR_METH_01104]
		[TR_METH_01112]
		[TR_METH_01114]
		[TR_METH_01115]
		[TR_METH_01116]
		[TR_METH_01117]
		[TR_METH_01151]
		[TR_METH_02005]
		[TR_METH_03000]
[RS_METH_00005]	Methodology shall explain the	[TR_METH_01046]
	typical usage of the System	[TR_METH_01047]
	Template	[TR_METH_01048]
		[TR_METH_01053]
		[TR_METH_01065] [TR_METH_01066]
		[TR_METH_01066] [TR_METH_01067]
		[TR_METH_01068]
		[TR_METH_01070]
		[TR_METH_01071]
		[TR_METH_01075]
		[TR_METH_01076] [TR_METH_01077]
		[TR_METH_01076]
		[TR_METH_01076] [TR_METH_01077]
		[TR_METH_01076] [TR_METH_01077] [TR_METH_01078]
		[TR_METH_01076] [TR_METH_01077] [TR_METH_01078] [TR_METH_01079] [TR_METH_01080] [TR_METH_01081]
		[TR_METH_01076] [TR_METH_01077] [TR_METH_01078] [TR_METH_01079] [TR_METH_01080] [TR_METH_01081] [TR_METH_01082]
		[TR_METH_01076] [TR_METH_01077] [TR_METH_01078] [TR_METH_01079] [TR_METH_01080] [TR_METH_01081] [TR_METH_01082] [TR_METH_01087]
		[TR_METH_01076] [TR_METH_01077] [TR_METH_01078] [TR_METH_01079] [TR_METH_01080] [TR_METH_01081] [TR_METH_01082] [TR_METH_01087] [TR_METH_01088]
		[TR_METH_01076] [TR_METH_01077] [TR_METH_01078] [TR_METH_01079] [TR_METH_01080] [TR_METH_01081] [TR_METH_01082] [TR_METH_01087] [TR_METH_01088] [TR_METH_01090]
		[TR_METH_01076] [TR_METH_01077] [TR_METH_01078] [TR_METH_01079] [TR_METH_01080] [TR_METH_01081] [TR_METH_01082] [TR_METH_01087] [TR_METH_01088] [TR_METH_01090] [TR_METH_01091]
		[TR_METH_01076] [TR_METH_01077] [TR_METH_01078] [TR_METH_01079] [TR_METH_01080] [TR_METH_01081] [TR_METH_01082] [TR_METH_01087] [TR_METH_01088] [TR_METH_01090]



		[TR_METH_01112]
		[TR_METH_01114]
		[TR_METH_01125]
		[TR_METH_01126]
		[TR_METH_01127]
		[TR_METH_01130]
		[TR_METH_01153]
		[TR_METH_01154]
		[TR_METH_02003]
		[TR_METH_02006]
		[TR_METH_02015]
		[TR_METH_02016]
		[TR_METH_02017]
		[TR_METH_02018]
		[TR_METH_03000]
		[TR_METH_03008]
[RS_METH_00006]	Methodology shall explain how	[TR_METH_01003]
	Autosar system is built	[TR_METH_01039]
		[TR_METH_01044]
		[TR_METH_01045]
		[TR_METH_01046]
		[TR_METH_01047]
		[TR_METH_01048]
		[TR_METH_01049]
		[TR_METH_01061]
		[TR_METH_01085] [TR_METH_01087]
		[TR_METH_01092]
		[TR_METH_01092]
		[TR_METH_01109]
		[TR_METH_01110]
		[TR_METH_01111]
		[TR_METH_01112]
		[TR_METH_01114]
		[TR METH 01134]
		[TR METH 01135]
		[TR METH 03002]
		[TR METH 03003]
		TR METH 03004
[RS_METH_00009]	Methodology should be modeled	[TR_METH_01001]
		[TR_METH_01002]
		[TR_METH_01004]
		[TR_METH_01009]
[RS_METH_00010]	Methodology should define rules	[TR_METH_01121]
	to translate methodology model	
	into a document	
[RS_METH_00015]	Methodology shall be	[TR_METH_01018]
	independent of programming	
	language	
[RS_METH_00016]	Methodology shall support	[TR_METH_01019]
	building a system of both	[TR_METH_01128]
	Autosar and Non-Autosar ECUs	[TR_METH_01129]
[RS_METH_00017]	Methodology shall clearly define	[TR_METH_01008]
	what is standardized and what is	[TR_METH_01019]
	not standardized	
	<u> </u>	



		TED METH CLOSE
[RS_METH_00018]	Methodology shall be modular	[TR_METH_01000]
		[TR_METH_01002]
		[TR_METH_01004]
		[TR_METH_01006]
		[TR_METH_01007]
		[TR_METH_01021]
		[TR_METH_01022]
		[TR_METH_01029]
		[TR_METH_01030]
		[TR_METH_01084]
		[TR_METH_01110]
[RS_METH_00020]	Methodology shall support	[TR_METH_01071]
	iterations	[TR_METH_01089]
		[TR_METH_02004]
[RS_METH_00021]	Methodology shall define	[TR_METH_01006]
	Activities	[TR_METH_01007]
		[TR_METH_01010]
		[TR_METH_01011]
		TR_METH_01012
		[TR_METH_01013]
		[TR METH 01033]
[RS_METH_00025]	Methodology shall define Work	[TR METH 01001]
	products	TR METH 01006
	'	TR_METH_01007
		[TR_METH_01010]
		[TR_METH_01014]
		TR_METH_01021]
		[TR_METH_01022]
[RS_METH_00027]	Methodology shall define	[TR METH 01010]
	unambiguous guidance	[TR_METH_01026]
	terminology	TR_METH_01027
[RS METH 00028]	Methodology shall define Roles	[TR METH 01001]
	, and a second	[TR METH 01006]
		[TR_METH_01007]
		[TR_METH_01010]
		[TR METH 01023]
		[TR_METH_01024]
[RS_METH_00032]	The methodology shall respect	[TR METH 01000]
	the different levels of	[TR_METH_01040]
	Abstractions	
[RS METH 00033]	Methodology should support	[TR_METH_01039]
	VFB concept	[TR_METH_01045]
		[TR METH 01054]
		[TR_METH_02000]
[RS_METH_00038]	Methodology shall support the C	[TR_METH_01060]
[programming language	[TR_METH_01085]
	p. og. ag languago	[TR METH 01093]
		[TR_METH_02005]
		[TR_METH_03001]
[RS METH 00041]	Methodology shall support	[TR METH 01071]
[110_WE111_00041]	Bottom/Up Approach	[111_WE111_010/1]
	Bottom/op Approach	



[RS_METH_00042]	Methodology shall incorporate	[TR_METH_01010]
	the usage of industry standard	[TR_METH_01013]
	tools	[TR_METH_01025]
		[TR_METH_01093]
[RS_METH_00043]	Activities shall have a purpose	[TR_METH_01008]
[RS_METH_00046]	Activities shall have input work	[TR_METH_01014]
	products	[TR_METH_01034]
[RS_METH_00047]	Activities shall have output work	[TR_METH_01005]
	products	[TR_METH_01006]
		[TR_METH_01014]
		[TR_METH_01034]
[RS_METH_00048]	Activities shall include roles	[TR_METH_01006]
		[TR_METH_01034]
[RS_METH_00050]	Work products shall have a	[TR_METH_01008]
	description	[TR_METH_01028]
[RS_METH_00051]	Work products shall have a	[TR_METH_01020]
	reference(s) to metaclass(es) in	_
	the Autosar Metamodel.	
[RS_METH_00052]	It must be possible to avoid	[TR_METH_01014]
	duplication of data in Work	[TR_METH_01015]
	Products	[TR_METH_01017]
[RS_METH_00054]	Work Products shall not have	[TR_METH_01014]
	circular references with other	[TR_METH_01017]
	work products	[TR_METH_01021]
		[TR_METH_01022]
		[TR_METH_01122]
[RS_METH_00056]	AUTOSAR methodology shall	[TR_METH_01002]
	not be bound to a particular	[TR_METH_01004]
	lifecycle model	[TR_METH_01006]
		[TR_METH_01012]
		[TR_METH_01024]
		[TR_METH_01030]
		[TR_METH_01031]
		[TR_METH_01035]
[RS_METH_00057]	AUTOSAR methodology shall	[TR_METH_01018]
	support traceability to external	[TR_METH_01123]
	artifacts	
[RS_METH_00061]	Methodology shall describe the	[TR_METH_01006]
	change of existing work	[TR_METH_01014]
	products.	[TR_METH_01015]
		[TR_METH_01017]
[RS_METH_00062]	Methodology shall support	[TR_METH_01086]
	configuration of parameters with	[TR_METH_01095]
	different binding time.	[TR_METH_01098]
		[TR_METH_01104]
		[TR_METH_01108]
		[TR_METH_01150]
	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	[TR_METH_01151]
[RS_METH_00063]	Work Products shall be capable	[TR_METH_01018]
	to be version controlled	[TR_METH_01019]
[RS_METH_00064]	Roles shall have a description	[TR_METH_01008]
		[TR_METH_01028]
[RS_METH_00066]	Activities shall include tools	[TR_METH_01025]
		[TR_METH_01034]



IDC METH 000C71	Mathadalagu, dagumant aball	ITD METIL 044401
[RS_METH_00067]	Methodology document shall	[TR_METH_01113]
	include hyperlinks between	
	Activities, Roles, Work Products,	
	and Guidance.	
[RS_METH_00069]	It shall be possible to add	[TR_METH_01123]
	precise and human readable	[TR_METH_01124]
	documentation to each work	
	product.	
[RS_METH_00074]	Methodology shall specify	[TR_METH_00001]
	Binding times	[TR_METH_00002]
		[TR_METH_00003]
		[TR_METH_02011]
		[TR_METH_02012]
		[TR_METH_02013]
		[TR_METH_02014]
		[TR_METH_02020]
[RS_METH_00075]	Methodology shall specify the	[TR_METH_00001]
	tasks of resolving variant	[TR_METH_02016]
[RS_METH_00076]	Methodology shall specify a	[TR_METH_02016]
	work product for values of	TR METH 02017
	variant selectors	
[RS_METH_00077]	Methodology shall explain the	[TR_METH_01049]
[typical interaction between	[TR METH 01076]
	OEMs and suppliers	[TR METH 01079]
		[TR_METH_01080]
		[TR_METH_01081]
		[TR_METH_01082]
		[TR_METH_01125]
		[TR_METH_01126]
		[TR_METH_01127]
		[TR_METH_01130]
		[TR_METH_01131]
[RS_METH_00078]	Methodology shall explain the	[TR METH 01044]
[1.10_ME111_00070]	typical usage of different views	[TR_METH_01050]
	on the system of the OEM	[TR_METH_01068]
[RS_METH_00079]	Methodology shall explain the	[TR_METH_01068]
[1.10_ME111_00019]	typical usage of different views	[TR_METH_01079]
	on the system of the Supplier	[TR_METH_01079] [TR_METH_01080]
	on the system of the supplier	[TR_METH_01080]
IDS METH 000001	Evolution of Implicit	[TR_METH_01082]
[RS_METH_00080]	Exchange of Implicit Communication Behavior	[TR_METH_01120]
IDC METH 000041	Description Methodology abolt symbols the	ITD METH 011441
[RS_METH_00081]	Methodology shall explain the	[TR_METH_01144]
	typical usage of Safety	[TR_METH_01145]
	Extensions	[TR_METH_01146]
		[TR_METH_01147]
		[TR_METH_01148]
		[TR_METH_01149]



[RS_METH_00082]	Methodology shall explain the	[TR_METH_01136]
	typical usage of Diagnostic	[TR_METH_01137]
	Extract Template	[TR_METH_01138]
		[TR_METH_01139]
		[TR_METH_01140]
		[TR_METH_01141]
		[TR_METH_01142]
		[TR_METH_01143]

Some input requirements cannot (or not completely) be traced down to single specification items found in this document. They are satisfied by the AUTOSAR methodology in a general way together with other documents as listed in the following:

[TR_METH_01120] Definition of Consistency Needs [The AUTOSAR methodology supports the exchange of implicit communication behavior description. Chapters 3.4.1.14 and 3.4.2.15 depict the task and the artifact which allow to define the corresponding consistency needs. | (RS METH 00080)

[TR_METH_01121] Building the AUTOSAR methodology document [All AUTOSAR methodology related model elements (see 1.5) are consumed by an internal AUTOSAR tool that automatically produces the corresponding text, tables, and diagrams. These artifacts are included into a document which is automatically transformed into the final PDF file. | (RS_METH_00010)

[TR_METH_01122] Relations between AUTOSAR Work Products [Work Products (Deliverables and Artifacts) are designed in such a way that no circular references with other Work Products exist.](RS_METH_00054)

[TR_METH_01123] Traceability to external artifacts [Artifacts considered in the Methodology model include external artifacts like c-code, libraries, documentation and generated artifacts (see e.g. 3.5.2.22, 3.4.2.4). General Non Autosar Artifact is a generic representation of non AUTOSAR artifacts. It is aggregated by the General Deliverable and allows linking and tracing of non AUTOSAR artifacts within the AUTOSAR context. Furthermore, several specific artifacts represent non AUTOSAR elements or allow referring to them. The A2L File artifact is a representation of the measurement and calibration format that is defined by the ASAM and therefore out of scope of AUTOSAR. The description of the Atomic Software Component Implementation artifact explains how external artifacts can be referred from this ARXML artifact.] (RS_METH_00057, RS_METH_00069)

[TR_METH_01124] Documentation of Work Products [In order to document design decisions or restrictions during the development process each Work Product can aggregate the corresponding documentation which is represented by the General Documentation artifact. The General Documentation artifact is added to Work Products by processing the task Add General Documentation.

](RS_METH_00069)



2 Use Cases

2.1 Overall View

2.1.1 Purpose

This pattern provides a rough outline of the design steps to build a system and resultant of this the ECUs and the topology with the AUTOSAR methodology. The main activities are depicted in Figure 2.1.

2.1.2 Description

2.1.2.1 Views on the System

[TR_METH_01039] AUTOSAR System development overview | The development of an AUTOSAR System is based on the definition of the Virtual Functional Bus (VFB). The VFB is the communication mechanism that allows a composition of interconnected software components to interact. Based on the VFB the system is designed. | (RS_METH_00006, RS_METH_00033)

[TR_METH_01040] Support of different system views [During the overall development of the system, different views on the system can exist (e.g. functional architecture, or software architecture). These views are described explicitly, whereas a mapping mechanism is used to express the relation between them.](RS_METH_00032)

In the following three different views on the system are distinguished:

- [TR_METH_01041] Abstract system ☐ The abstract system abstracts from the concrete software architecture and describes e.g. the functional view on the system. ☐()
- [TR_METH_01042] Overall technical system [The overall technical system is organized from the software architecture perspective. |()
- [TR_METH_01043] Sub-System [The Sub-System is a reduced part of the overall technical System and describes relevant aspects for a dedicated subsystem. |()

2.1.2.2 Overall Workflow

[TR_METH_01044] Development of a functional view on the system [The overall workflow (see Figure 2.2) starts with an optional activity. In this activity, the Abstract System Description is developed in advance, which represents the overall system from a functional or abstract view (functional architecture). This Abstract System



Description is then the basis for the development of the concrete System Description. | (RS METH 00006, RS METH 00002, RS METH 00078)

[TR_METH_01045] Development of the Overall VFB System [In case of omitting the optional first step, the development directly starts with the definition of the Overall VFB System. The VFB provides a software architecture oriented view of all the functions the system supports, independent of any ECUs and networks. See chapter 2.3 for more details. | (RS METH 00006, RS METH 00033)

[TR_METH_01046] Development of the system The VFB is refined into a system by defining a topology of ECUs and Networks, deploying software components to the ECUs, and deriving the communication matrices required to interconnect the distributed features. As a part of the communication development, a custom transformation technology can be specified. This specification is the basis for the implementation of the corresponding basic software module. The development of the system can be achieved directly in one phase or in several phases (the use case shows a single phase and a two phase approach).

[RS_METH_00006, RS_METH_00005]

[TR_METH_01047] Two phase development approach [The two phase approach is used when there is an organizational separation of responsibility where the primary organization defines the overall system in the first phase, and several other organizations define the sub-systems in parallel during the second phase. In this case, the primary organization hands over System Extracts, which represent subsystem parts of the whole system. These subsystems contain Subsystem VFBs which are reduced overall VFBs. |(RS_METH_00006, RS_METH_00002, RS_METH_00005)

[TR_METH_01048] The overall system ☐ The overall system defines the major public ECUs and topologies, and the subsystem design contributes by adding private ECUs and networks to the system. Please note that portions defined within a subsystem are not directly visible to any other subsystem or to the overall system. ☐ (RS_METH_00006, RS_METH_00005, RS_METH_00002)

[TR_METH_01049] Interaction between organizations [Additionally, the software component structure of the System Extracts, delivered by the primary organization can be transformed into a different structure by the receiving organization (ECU System Description). In this case the System Extract of the primary organization can be considered as a requirement and the subsystem of the receiving organization represented by one or more ECU System Descriptions can be seen as a solution which has to fulfill the delivered requirements.

[RS_METH_00006, RS_METH_00077]

[TR_METH_01109] Producing ECU-specific deliverables [After the system design is complete, the portions that are related to a specific ECU are extracted producing a deliverable for each ECU. This is elaborated further in chapter 2.5. | (RS METH 00006, RS METH 00005)

[TR_METH_01110] Development of Software Components \lceil In parallel to the system design, the software components (Delivered Atomic Software Components)



nents) are implemented according to the definitions required by the abstract VFB, the VFB or the subsystem VFB. These are delivered to be integrated in the ECUs where they are deployed. Please note that the implementation of a software component is more or less independent from ECU configuration. This is a key feature of the AUTOSAR methodology. See chapter 2.4 for more details. \(\(\ln \) (RS_METH_00006, \(RS_METH_000018 \))

[TR_METH_01111] Development of Basic Software modules [Since the Basic Software modules are independent of the VFB, they can be developed at any time before ECU integration. See chapter 2.6 for more details.](RS_METH_00006, RS_METH_00003)

[TR_METH_01112] Integration of AUTOSAR ECUs [The integration for an AUTOSAR ECU commences when the BSW Module Delivered Bundles, ECU Extract, and the implementation of all Delivered Atomic Software Components are available. At this stage, the ECU is configured by creating tasks, scheduling Software Component Runnables, configuring the Basic Software Modules, etc. The complete code is compiled and linked into an executable. This is elaborated in chapter 2.7. \(\left(RS_METH_00006, RS_METH_00002, RS_METH_00003, RS_METH_00004, RS_METH_00005) \)

2.1.3 Workflow

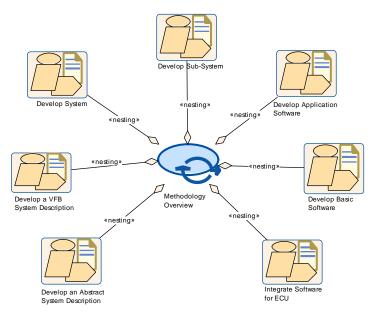


Figure 2.1: Methodology Overview: Overall Structure



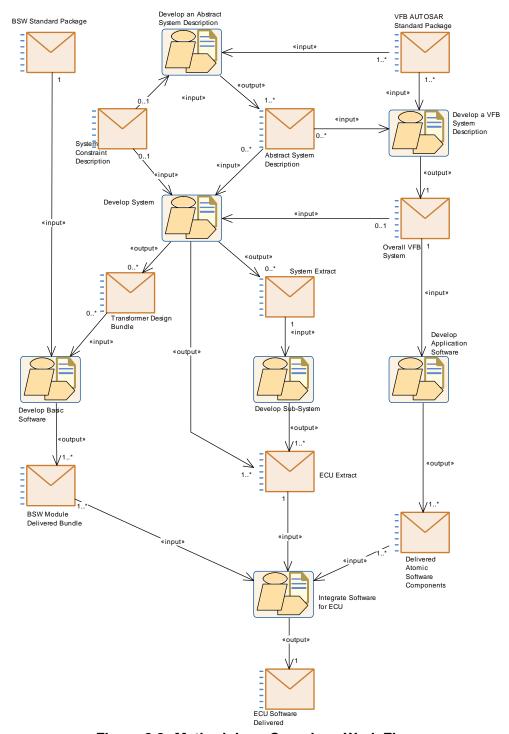


Figure 2.2: Methodology Overview: Work Flow



Process Pattern	Methodology Overview		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Methodology Overview		
Brief Description	High level view of the	OTUA e	SAR Methodology
Description	This Process Pattern AUTOSAR system.	ns conta	ins the typical activities to develop an
Relation Type	Related Element	Mul.	Note
Aggregates	Develop Application Software	1	
Aggregates	Develop Basic Software	1	
Aggregates	Develop Sub-Sys- tem	1	
Aggregates	Develop System	1	
Aggregates	Develop a VFB System Descrip- tion	1	
Aggregates	Develop an Ab- stract System Description	1	
Aggregates	Integrate Software for ECU	1	

Table 2.1: Methodology Overview

2.2 Develop an Abstract System Description

2.2.1 Purpose

This Activity provides a rough outline of the creation of the Abstract System Description.

2.2.2 Description

[TR_METH_01050] Abstract System Description activity | Due to the fact that the overall view on vehicle functions can differ from the actual technical definition of the software architectures of individual ECUs, the optional activity Develop an Abstract System Description allows to define a view on the overall system from an abstract or functional perspective. This view describes a dedicated abstract VFB. During the further activities this abstract view is refactored into a technical view of the software architecture. | (RS METH 00002, RS METH 00078)

For the purpose of this use case, this activity is split into sub-activities and tasks (see Figure 2.3) that are in detail described in Chapter 2.3 and 2.5.2:

• Data Model Development



- Component Model Development
- VFB Timing Development
- Define VFB Top Level
- Define VFB Component Constraints
- Design System
- Integrate Non AUTOSAR System at VFB level

In the Data Model Development activity, the set of VFB Interfaces, VFB Modes, and VFB Types that are used throughout the abstract VFB are defined. Please note, that these objects can be used in later steps by the VFB and the subsystem VFB as well.

[TR_METH_01051] Creation of an overall abstract system [In the Component Model Development activity, a component model is created which represents the overall system from a functional point of view, e.g. from a customer related perspective of vehicle functions, independent of a concrete vehicle platform design. During this process compositions might be modeled, which are not further refined into Atomic Software Components. However it is also possible to define atomic software components as well in this abstract VFB view. | (RS_METH_00002)

[TR_METH_01052] Definition of a constraints in the context of an abstract system \[\text{In the context of the abstract VFB, the task Define VFB Component Constraints defines constraints w.r.t. software components of the abstract VFB. These constraints have to be considered when the abstract VFB is transformed into the concrete, technical VFB. \[\left(RS_METH_00002) \]

[TR METH 01128] Integration of Non AUTOSAR Systems in the context of an abstract system [In parallel with the development of the Abstract System Description within an AUTOSAR process there may be functions that are developed based on another approach. The functionality of in-vehicle infotainment systems for instance is usually not covered in an AUTOSAR development process. Rather, development methods and platforms such as GENIVI (http://www.genivi.org/) for instance are employed that address the specific needs and conditions of infotainment system development. The integration of these functions into the overall system should be addressed as early as possible. For that purpose first a description of the non-AUTOSAR functionality (Description of a Non-AUTOSAR System) is needed, which must be provided by the non-AUTOSAR approach. Within the development of the Abstract System Description the functional interaction of the non-AUTOSAR functions and the AUTOSAR functions has to be specified that is based on the given descriptions of both parts. Since the non-AUTOSAR part is typically specified in a non-AUTOSAR format it must be translated to the corresponding AUTOSAR format (task Translate Non-Autosar Description to Autosar Description). Moreover, the information on the functional interaction must be incorporated in order to obtain one common view of the integrated system. The "Integration of Franca IDL Software Component Descriptions" document ([3]) defines a format for a VFB Integration Con-



nector and a translation of Franca Interface Definitions - that are used in GENIVI - to AUTOSAR. It can be used for the development of an abstract description of an integrated AUTOSAR and GENIVI system. | (RS METH 00016)

[TR_METH_01053] Definition of a System Description in the context of an abstract system [Additionally to the definition of the abstract VFB, parts of the System Description can already be defined in the Design System activity, e.g. the topology and ECUs where SWCs of the abstract VFB are mapped to. This SW-C mapping from the abstract VFB to ECUs can be used as a methodological step to the definition of the concrete VFB. Please note that not all tasks of the Design System activity have to be performed in the context of an abstract system.

[RS_METH_00002, RS_METH_00005]

2.2.3 Workflow

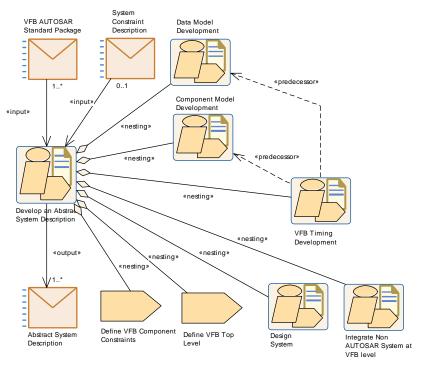


Figure 2.3: Develop an Abstract System Description

Activity	Develop an Abstract System Description			
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::System:: Develop System			
Brief Description	Develop an abstract or functional view on the system.			
Description	This activity defines an abstract view on the overall system from an abstract or functional point of view. This activity is optional.			
Relation Type	Related Element Mul. Note			



Relation Type	Related Element	Mul.	Note
Consumes	System Constraint Description	01	In the context of the "Develop an Abstract System Description" activity, the constraints for the abstract or functional view on the system can be provided by the "System Constraint Description".
Consumes	VFB AUTOSAR Standard Package	1*	
Produces	Abstract System Description	1*	
Aggregates	Component Model Development	1	
Aggregates	Data Model Development	1	
Aggregates	Define VFB Component Constraints	1	
Aggregates	Define VFB Top Level	1	
Aggregates	Design System	1	In the context of the Develop an Abstract System Description activity, not all tasks have to be performed.
Aggregates	Integrate Non AUT OSAR System at V FB level	1	
Aggregates	VFB Timing Development	1	

Table 2.2: Develop an Abstract System Description

2.3 Develop a VFB System Description

2.3.1 Purpose

This Activity provides a rough outline of the creation of a Virtual Functional Bus view of a System. [2]

2.3.2 Description

[TR_METH_01054] Virtual Functional Bus [The Virtual Functional Bus (VFB) view of a System shows how the Systems software functions interact independently of any network topology or deployment of features across multiple ECUs.](RS_METH_00033, RS_METH_00002)

For more information on the VFB concept see [4]. For detailed information on the meta-model parts relevant for the VFB see [5].

For the purpose of this use case, this Activity is split into the following sub-activities:



- Data Model Development
- Component Model Development
- VFB Timing Development
- Integrate Non AUTOSAR System at VFB level
- Define VFB Safety Information

[TR_METH_01055] Data Model Development activity [In the Data Model Development, the set of VFB Interfaces, VFB Modes, and VFB Types that are used throughout the VFB are defined. Some of these have already been pre-defined by AUTOSAR (so-called "blueprints"), see 3.2.2.7 | (RS_METH_00002)

[TR_METH_01056] Definition of the VFB [In the Component Model Development activity, the VFB is defined. This can either be done by the use of the abstract VFB as a basis, or is done directly by defining the software components. In case of using the abstract VFB as a basis, a mapping between the abstract and the concrete VFB can be established by performing the tasks Define System View Mapping (see Section 3.3.1.15 for more details). | (RS METH 00002)

Two general approaches can be separated:

- [TR_METH_01057] Top-Down approach | Following a Top-Down approach, the highest level VFB Composition Components are created, and these are iteratively broken down to smaller components. At the leaves of the hierarchy the VFB Atomic Software Component are defined. Note that the activity can be even finished with empty VFB Composition Components, allowing the detailing of the further structure at a later stage. | (RS_METH_00002)
- [TR_METH_01058] Bottom-Up approach [If a Bottom-Up approach is used, then the VFB Atomic Software Components are first defined, and aggregated into VFB Composition Components. | (RS METH 00002)

[TR_METH_01059] Kinds of VFB Atomic Software Components [Several special kinds of VFB Atomic Software Components can be modeled in this activity:

- VFB Atomic Application Software Components are the core elements. They are used to implement the feature algorithms.
- VFB Parameter Component are used to provide characteristic values, such as calibration parameters, to software components.
- VFB Sensor Actuator Components provide the connection between physical sensors/actuators and the VFB Atomic Application Software Components.
- ECU Abstraction Software Components can be modeled at this level as well in oder to model the ECU input and output interfaces which are used by sensors and actuators.



- Complex Driver Components also have to be modeled here, though their implementation is ECU specific, because their ports need to be connected at the VFB level.
- VFB NvBlock Software Component can be modeled at this level if application software accesses non-volatile data via ports.
- Empty VFB Composition Components can be provided in case the detailed structure of the desired solution is not in the scope of this activity and will be left open to a later stage in the development.

(RS METH 00002)

49 of 503

[TR METH 01129] Integrate Non AUTOSAR System at VFB level activity [In addition to the components that are specified with an AUTOSAR SwComponent Description there may be application components that are specified in other formats because they are developed within another application domain. In-vehicle infotainment components for instance are usually not developed with AUTOSAR means. Rather, development methods and platforms such as GENIVI (http://www.genivi.org/) are employed that address the specific needs and conditions of infotainment system development. The integration of these components into the overall system should be addressed as early as possible. For that purpose the Description of a Non-AUTOSAR System must be incorporated into the VFB system description (VFB System). Since the non-AUTOSAR components are typically specified in a non-AUTOSAR format their descriptions must be translated to the corresponding AUTOSAR format (Task Translate Non-Autosar Description to Autosar Description). Moreover, the information on the interconnection of the components must be incorporated in order to obtain one common view of the integrated system. The document "Integration of Franca IDL Software Component Descriptions" ([3]) defines a format for a VFB Integration Connector and a translation of Franca Interface Definitions - that are used in GENIVI - to AUTOSAR. It can be used for the development of a VFB description of an integrated AUTOSAR-and-GENIVI system. (RS METH 00016)

[TR_METH_01149] Definition of VFB relevant safety information [In the optional activity <code>Define VFB Safety Information</code> the VFB relevant safety information is defined. Safety requirements and safety measures created at this development stage may be detailed (refined, decomposed, allocated, mapped, etc.) later on in the process (See chapter 2.14). <code>](RS_METH_00081)</code>

After these activities are completed, the <code>Virtual Functional Bus view</code> of the System is defined. At this point, some <code>VFB Software Component Mapping Constraints</code> may already be known by design, or based on an analysis such as <code>Define VFB Timing</code>. These can be described to provide guidance to the downstream activities.

- AUTOSAR CONFIDENTIAL -



2.3.3 Workflow

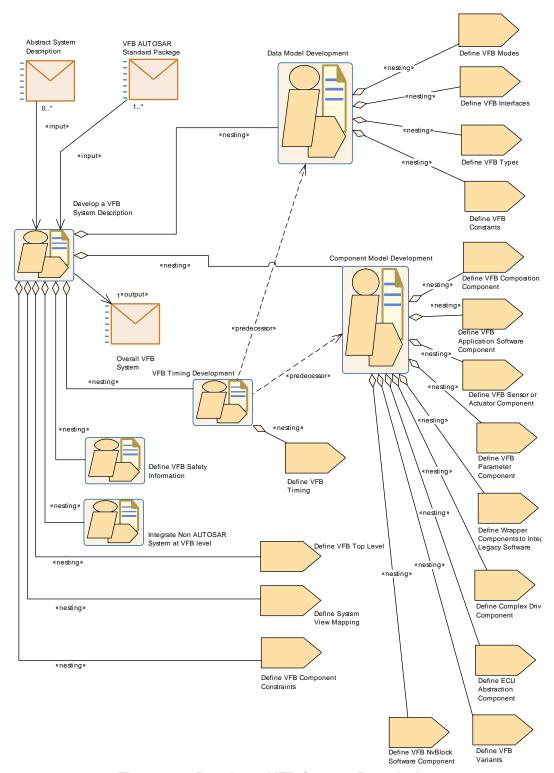


Figure 2.4: Develop a VFB System Description






Figure 2.5: Integrate Non AUTOSAR System at VFB level

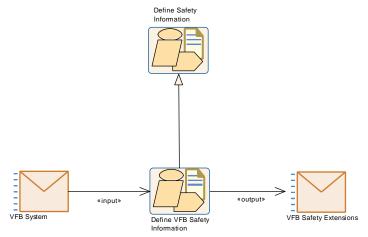


Figure 2.6: Define VFB Safety Information

Activity	Develop a VFB System Description		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::VFB:: Develop VFB		
Brief Description	This pattern describes the methodology to develop the Virtual Functional Bus view of the System.		
Description	The Virtual Functional Bus (VFB) view of a System shows how the Systems software and hardware functions interact independent of any network topology or deployment of features across muliple ECUs. This Activity is split into three sub-activities:		
	Data Model Development		
	Component Model Development		
	Timing Model Development		
	Integrate Non AUTOSAR System at VFB level		
	Define VFB Safety Information.		
Relation Type	Related Element Mul. Note		



Relation Type	Related Element	Mul.	Note
Consumes	Abstract System Description	0*	The abstract System Description is an optional input for the activity "Develop a VFB System Description". The VFB-related part of the Abstract System Description can be than refined to the concrete "Overall VFB System". Additionally, a mapping between those two views can be established.
Consumes	VFB AUTOSAR Standard Package	1*	
Produces	Overall VFB System	1	
Aggregates	Component Model Development	1	
Aggregates	Data Model Development	1	
Aggregates	Define System View Mapping	1	
Aggregates	Define VFB Component Constraints	1	
Aggregates	Define VFB Safety Information	1	
Aggregates	Define VFB Top Level	1	
Aggregates	Integrate Non AUT OSAR System at V FB level	1	
Aggregates	VFB Timing Development	1	

Table 2.3: Develop a VFB System Description

Activity	Data Model Develo	Data Model Development		
Package	AUTOSAR Root::M2 Develop VFB	AUTOSAR Root::M2::Methodology::Methodology Use Cases::VFB:: Develop VFB		
Brief Description				
Description				
Relation Type	Related Element	Mul.	Note	
Aggregates	Define VFB Constants	1		
Aggregates	Define VFB Inter- faces	1		
Aggregates	Define VFB Modes	1		
Aggregates	Define VFB Types	1		

Table 2.4: Data Model Development



Activity	Component Model Development		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::VFB:: Develop VFB		
Brief Description			
Description			
Relation Type	Related Element	Mul.	Note
Aggregates	Define Complex Driver Component	1	
Aggregates	Define ECU Abstraction Component	1	
Aggregates	Define VFB Application Software Component	1	
Aggregates	Define VFB Composition Component	1	
Aggregates	Define VFB Nv Block Software Component	1	
Aggregates	Define VFB Pa- rameter Compo- nent	1	
Aggregates	Define VFB Sensor or Actuator Component	1	
Aggregates	Define VFB Variants	1	
Aggregates	Define Wrapper Components to Integrate Legacy Software	1	

Table 2.5: Component Model Development

Activity	VFB Timing Development			
Package	AUTOSAR Root::M2 Develop VFB	AUTOSAR Root::M2::Methodology::Methodology Use Cases::VFB:: Develop VFB		
Brief Description				
Description				
Relation Type	Related Element	Mul.	Note	
Aggregates	Define VFB Timing	1		
Predecessor	Component Model Development	1		
Predecessor	Data Model Development	1		

Table 2.6: VFB Timing Development



Activity	Integrate Non AUTO	SAR S	ystem at VFB level	
Package	AUTOSAR Root::M2 Develop VFB	AUTOSAR Root::M2::Methodology::Methodology Use Cases::VFB:: Develop VFB		
Brief Description	connection with the	Incorporate the description of the non-AUTOSAR system and its connection with the AUTOSAR system into the AUTOSAR methodology activities.		
Description	with the AUTOSAR solution Connected	Based on the description of the non-AUTOSAR system its connection with the AUTOSAR system is defined and specified using the VFB Integration Connector format. This is translated into an AUTOSAR description that becomes part of the VFB system description.		
Relation Type	Related Element	Mul.	Note	
Aggregates	Define VFB Integration Connector	1		
Aggregates	Translate Non- Autosar Descrip- tion to Autosar Description	1		

Table 2.7: Integrate Non AUTOSAR System at VFB level

Activity	Define VFB Safety	Define VFB Safety Information		
Package	AUTOSAR Root::M2 Develop VFB	AUTOSAR Root::M2::Methodology::Methodology Use Cases::VFB:: Develop VFB		
Brief Description	Defines all required	Defines all required safety information at VFB level.		
Description	,	In this activity, the safety information at VFB level is defined. The safety information can be refined or completed in further development phases.		
Extends	Define Safety Inform	Define Safety Information		
Relation Type	Related Element	Related Element Mul. Note		
Consumes	VFB System	1		
Produces	VFB Safety Extensions	1		

Table 2.8: Define VFB Safety Information

2.4 Develop Software Components

2.4.1 Develop an Atomic Software Component

2.4.1.1 **Purpose**

This Activity provides a rough outline of the creation of an Atomic Software Component.



2.4.1.2 Description

[TR_METH_01060] Develop an Atomic Software Component activity | This is the generic Activity valid for several kinds of Atomic Software Components. The first step is to create design, including the runnables, events, interrunnable variables, etc. Once this is complete, the contract header files can be created and the software component can be implemented.

Optionally, the safety relevant information for the software component and all contained elements can be defined (See chapter 2.14). If the software component is developed as a SEooC (Safety Element out of Context) and the safety requirements are not fully known at development time, the ASIL attribute can be set to indicate the integrity level the component was developed for, i.e. in the development process all development process related requirements of ISO 26262 for the specified ASIL have been applied. | (RS METH 00002, RS METH 00038)

Note that the method of implementation, quality, testing, etc. are beyond the scope of this activity.

After the component is implemented and successfully compiled, its resources are measured and stored as part of the software component description for further usage by downstream processes.

The pattern also includes the optional tasks of creating a timing model, binding prebuild-variants and evaluating variants, all in the scope of the atomic software component. Note that the sequence of these optional tasks within the Activity is only one possible example.

2.4.1.3 Workflow

Figure 2.7 shows the work breakdown assumed for this use case. The next two figures 2.9 and 2.10 show all the tasks and work products of the method library involved in this use case.



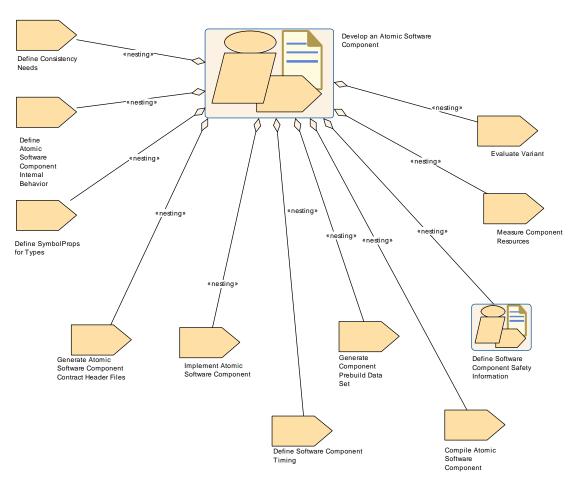


Figure 2.7: Develop an Atomic Software Component

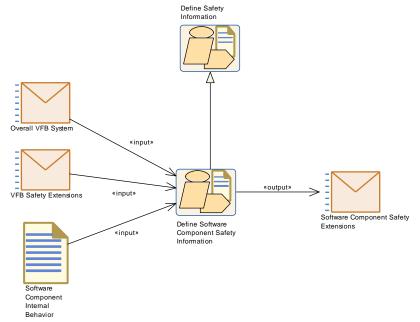


Figure 2.8: Define Software Component Safety Information



Activity	Develop an Atomic	Softwa	re Component	
Package	AUTOSAR Root::M2 Component::Develop		dology::Methodology Use Cases::Software	
Brief Description				
Description	This is the generic pattern valid for several kinds of Atomic Software Components. The first step is to create design, including the runnables, events, interrunnable variables, etc. Once this is complete, the contract header files can be created and the software component can be implemented. Note that the method of implementation, quality, testing, etc. are beyond the scope of this capability pattern.			
		ured and	emented and successfully compiled, its d stored as part of the software component eam processes.	
	defining safety relev- evaluating variants, Component. Note th	The pattern also includes the optional tasks of creating a timing model, defining safety relevant information, binding prebuild-variants and evaluating variants, all in the scope of the Atomic Software Component. Note that the sequence of these optional tasks within the capability pattern is only one possible example.		
Extended by	Develop Application Software, Develop a Complex Driver Component, Develop a Sensor Actuator Component, Develop an ECU Abstraction Component, Develop an NvBlock Software Component, Optimize a Software Component for a Specific Target			
Relation Type	Related Element	Mul.	Note	
Aggregates	Compile Atomic Software Compo- nent	1		
Aggregates	Define Atomic Software Com- ponent Internal Behavior	1		
Aggregates	Define Consistency Needs	1	Used for defining the consistency relations between a group of RunnableEntitys and a group of DataPrototypes.	
Aggregates	Define Software Component Safety Information	1		
Aggregates	Define Software Component Timing	1		
Aggregates	Define Symbol Props for Types	1	Used for solving name conflicts on the level of component or data types.	
Aggregates	Evaluate Variant	1		
Aggregates	Generate Atomic Software Com- ponent Contract Header Files	1		
Aggregates	Generate Component Prebuild Data Set	1		



Relation Type	Related Element	Mul.	Note
Aggregates	Implement Atomic Software Compo- nent	1	
Aggregates	Measure Component Resources	1	

Table 2.9: Develop an Atomic Software Component

Activity	Define Software Component Safety Information		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::Software Component::Develop Atomic SWC		
Brief Description	Defines all required	safety in	formation for a software component.
Description			
Extends	Define Safety Inform	ation	
Relation Type	Related Element	Mul.	Note
Consumes	Overall VFB System	1	
Consumes	Software Component Internal Behavior	1	
Consumes	VFB Safety Extensions	1	
Produces	Software Component Safety Extensions	1	

Table 2.10: Define Software Component Safety Information



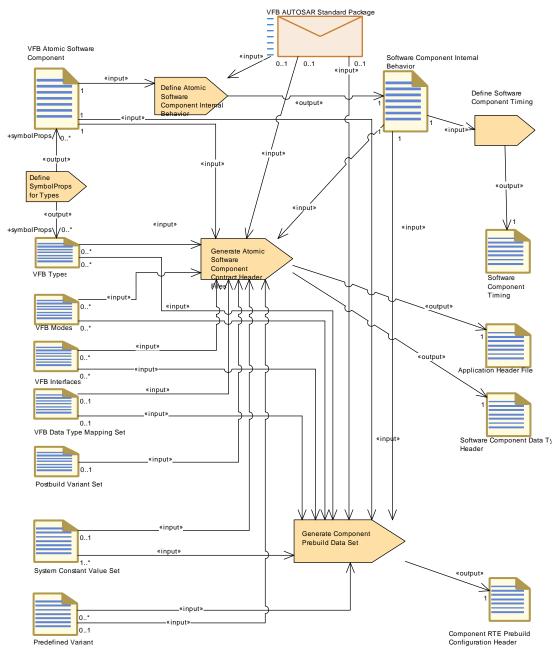


Figure 2.9: Develop an Atomic Software Component - Detailed view with work products (1)



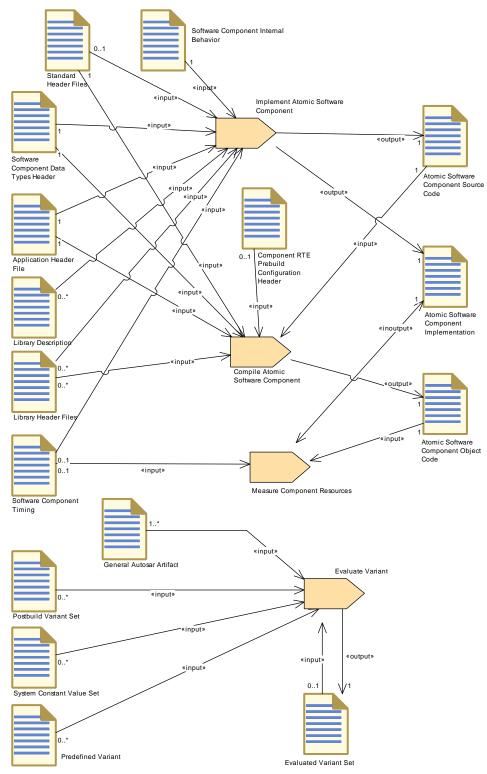


Figure 2.10: Develop an Atomic Software Component - Detailed view with work products (2)



2.4.2 Develop Application Software

2.4.2.1 **Purpose**

This Activity provides a rough outline of the creation of one or more Application Software Components.

2.4.2.2 Description

[TR_METH_01061] Develop Application Software activity | This Activity describes the work flow and the necessary activities in terms of the AUTOSAR methodology to develop one or more Application Software Components. The work flow shall allow a more or less independent development of the software components core functionality. These activities have to be performed for each Application Software Component. | (RS_METH_00002, RS_METH_00006)

2.4.2.3 Workflow

The detailed work flow can be derived from the generic activity Develop an Atomic Software Component.




Figure 2.11: Develop Application Software



Activity	Develop Applicatio	n Softw	are	
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::Software Component::Develop Application SWC			
Brief Description				
Description	terms of the AUTOS application software	This pattern describes the workflow and the necessary activities in terms of the AUTOSAR methodology for the development of application software components. The workflow shall allow a more or less independent development of		
	the software compor	the software component core functionality. These activities have to be performed for every application software component.		
Extends	Develop an Atomic S	Software	Component	
Relation Type	Related Element	Mul.	Note	
Consumes	Diagnostic System Extract	0*		
Consumes	Overall VFB System	1	The application software needs to refer to the relevant elements of the overall VFB system such as Software Component Types, Port Interfaces and Data Types.	
Produces	Delivered Atomic Software Compo- nents	1*		
Produces	Diagnostic System Extract	0*		

Table 2.11: Develop Application Software

2.4.3 Uses Cases for more Specialized Software Components

2.4.3.1 **Purpose**

These Activities provides a rough outline of the creation of more specialized components and of the ECU specific optimization of a software component.

2.4.3.2 Description

These Activities describe the work flow and the necessary activities in terms of the AUTOSAR methodology to develop more specialized components, which could be partially hardware or ECU dependent.

2.4.3.3 Workflow

These work flows are for the most part derived from the generic activity Develop an Atomic Software Component. The diagrams show the required extensions.



Note the development of a Service Component does not fall into this category of use cases, because it is for the most part generated during integration time.

For the development of a VFB Parameter Component refer to the calibration use case 2.9.




Figure 2.12: Develop a Sensor or Actuator Component

Activity	Develop a Sensor Actuator Component		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::Software Component::Develop Sensor-Actuator Component		
Brief Description	Show how to develop a Sensor Actuator Component		
Description	Activities to develop a VFB Sensor Actuator Component, i.e. component that represents a physical sensor or actuator.		
Extends	Develop an Atomic Software Component		
Relation Type	Related Element Mul. Note		
	· ·		

Table 2.12: Develop a Sensor Actuator Component

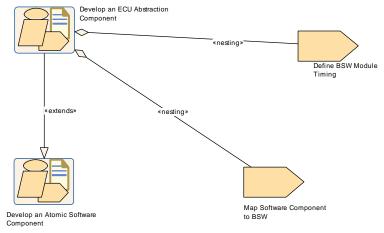


Figure 2.13: Develop an ECU Abstraction Component



Activity	Develop an ECU At	straction	on Component	
Package		AUTOSAR Root::M2::Methodology::Methodology Use Cases::Software Component::Develop Ecuabs Component		
Brief Description	Show how to develop	o an EC	U Abstraction Component.	
Description	Activities to develop an ECU Abstraction Software Component, i.e. a component that implements an ECU Abstraction			
Extends	Develop an Atomic S	Software	Component	
Relation Type	Related Element	Mul.	Note	
Aggregates	Define BSW Mod- ule Timing	1		
Aggregates	Map Software Component to BS W	1		

Table 2.13: Develop an ECU Abstraction Component




Figure 2.14: Develop a Complex Driver Component

Activity	Develop a Complex	Driver	Component
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::Software Component::Develop CDD Component		
Brief Description	Show how to develop a Complex Driver Component		
Description	Show how to develop	o a Com	plex Driver Component
Extends	Develop an Atomic Software Component		
Relation Type	Related Element	Mul.	Note
Aggregates	Map Software Component to BS W	1	

Table 2.14: Develop a Complex Driver Component






Figure 2.15: Develop an NvBlock Software Component



Activity	Develop an NvBlock Software Component				
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::Software				
	Component::Develop NvBlock Software Component				
Brief Description					
Description	Activities to develop an NvBlock Software Component. An NvBlockSoftwareComponentType (designed as part of activity Component Model Development) allows the application software to access non-volatile data in a convenient way via ports. The NvBlock Software Component takes over the management and buffering of data within blocks including data exchange with the underlying basic software (NvM). Optionally, it implements special writing strategies (e.g. cyclic writing). The development activities are similar to the generic activity Develop an Atomic Software Component with the following differences:				
	The description of the NvBlockNeeds within a NvBlockSoftwareComponentType is done in response to requirements given by the application software as part of their own NvBlockNeeds. These are part of their Software Component Internal Behavior which means that this level must be available when the NvBlockSoftwareComponentType is finally designed.				
	The creation of an Software Component Internal Behavior within NvBlockSoftwareComponentType is optional. This artifact is only needed if special writing strategies have to implemented by the RTE or if the application software needs a direct access (via client-server ports) to the NvM.				
	The source code of an NvBlockSoftwareComponentType will be generated during integration as part of the artifact RTE Source Code. Therefore no source code and no Atomic Software Component Implementation needs to be created during this activity.				
	Note that if non-volatile data are accessed by the application software via an NvBlockSoftwareComponentType, it is not required to define a ServiceComponentType for this use case.				
Extends	Develop an Atomic Software Component				
Relation Type	Related Element Mul. Note				

Table 2.15: Develop an NvBlock Software Component



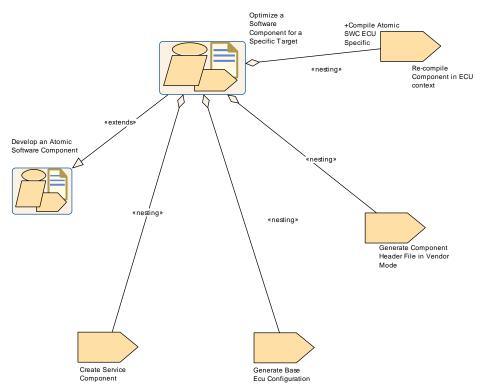


Figure 2.16: Optimize Software Component

Activity	Optimize a Softwar	Optimize a Software Component for a Specific Target			
Package		AUTOSAR Root::M2::Methodology::Methodology Use Cases::Software Component::Optimize Software Component			
Brief Description	Show how to optimiz	Show how to optimize a software component for a specific target.			
Description	consider some optim requirements. The C will be generated pa configuration, e.g. vi for some RTE interaction component Implemental That means now we include the ECU-cor	In practice the integration of an application software component has to consider some optimizations to meet performance or resource requirements. The Component API might be much more efficient, if it will be generated particularly adapted to the concrete ECU configuration, e.g. via using macro definitions instead of function calls for some RTE interaction. In fact this should not change the Component Implementation (i.e. the C-sources). That means now we have a different set of component headers, which include the ECU-configuration-specific optimizations. Note: This use case shows the typical steps needed until the recompilation with the optimized header file can be done. It does not			
Extends	Develop an Atomic Software Component				
Relation Type	Related Element	Mul.	Note		
Aggregates	Create Service Component	1			
Aggregates	Generate Base Ecu Configuration	1			
Aggregates	Generate Compo- nent Header File in Vendor Mode	1			



Relation Type	Related Element	Mul.	Note
Aggregates	Re-compile Component in ECU context	1	Compile Atomic SWC ECU Specific:

Table 2.16: Optimize a Software Component for a Specific Target

2.5 Develop System and Subsystems

2.5.1 Overview

2.5.1.1 Purpose

The Activities to develop the artifacts on the system level include the optional development of the abstract system (see Chapter 2.2), the development of an overall (technical) system and optionally the refinement into one or more subsystems. The reason for this split is, that the latter may be done by another organization, as has already been pointed out in 2.1.2.

2.5.1.2 Description

[TR_METH_01065] Develop System and Develop Sub-System activities | Figures 2.17 and 2.18 show the main inputs and outputs of these two major activities and how they are refined into sub-activities. Note that the activity Generate ECU Extract and Define System Safety Information can be performed as part of Develop System and Develop Sub-System as well. Optionally a mapping between two different system views represented by different System Descriptions can be added (see Section 3.3.1.15) and a specification of the transformer technology for the communication can be defined. | (RS_METH_00005, RS_METH_00002)

[TR_METH_01066] Creation of a System Extract and an ECU Extract | Depending on the intended work split, the System Configuration Description produced during this activity can be used as a basis

- 1. to create one or more so-called System Extracts as a basis for further refinement as sub-systems (see 2.5.5)
- 2. or to generate ECU Extracts which directly contain all relevant information to be integrated on an ECU (see 2.5.6)

In the first case, only an outer system is defined. Based on the outer system, one or more System Extracts can be delivered. The System Extract is not fully decomposed and still needs to be refined before it forms the basis for the ECU configuration. In order to distinguish between the delivered System Extracts and the refined sub-system, one or more ECU System Descriptions are created as a basis for further refinement (See activity Create ECU System De-



scription). Atomic Software Components, additional ECUs, Networks and the resulting communication will be added during the refinement step in the activity Design Sub-System. |(RS METH 00005, RS METH 00002)

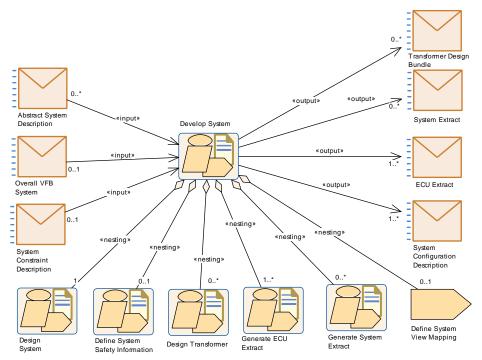


Figure 2.17: Structure of Activity: Develop System




Figure 2.18: Structure of Activity: Develop Subsystem

Figure 2.19 shows how the major deliverables produced during these activities are related and how they refer to artifacts describing the software.

[TR_METH_01067] Abstract System Description deliverable [The Abstract System Description extends the general System Description. The System View Mapping maps the different views on the system together, e.g. different overall VFB systems (e.g. Abstract System Description with System



Configuration Description), or the overall VFB system with the VFB System Extract description. [(RS_METH_00005, RS_METH_00002)

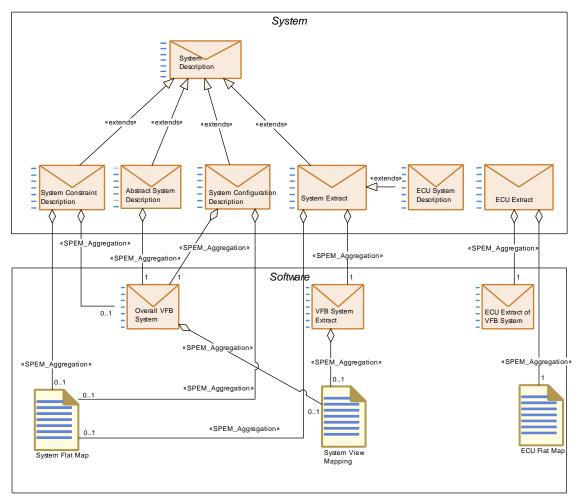


Figure 2.19: Overview on the different roles of deliverables based on System Description

Note that all the deliverables based on the generic deliverable <code>System Description</code> as well as the <code>ECU Extract</code> consist of ARXML files that are using the meta-model element <code>System</code> as the root element, from where the other information can be traced down.

Activity	Develop System		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::System:: Develop System		
Brief Description			
Description	Develop the description of an overall AUTOSAR System as a basis to deliver System and/or ECU extracts.		
Relation Type	Related Element Mul. Note		
Consumes	Abstract System Description	0*	The abstract System Description is an optional input for the activity "Develop System". Please note, that in this step the Abstract System Description is refined to a System Description.



Relation Type	Related Element	Mul.	Note
Consumes	Overall VFB System	01	Usually the System refers to elements of an overall VFB descriptions. But for the description of a legacy system, this input might be empty.
Consumes	System Constraint Description	01	
Produces	ECU Extract	1*	
Produces	System Configura- tion Description	1*	
Produces	System Extract	0*	
Produces	Transformer Design Bundle	0*	
Aggregates	Define System Safety Information	01	
Aggregates	Define System View Mapping	01	
Aggregates	Design System	1	
Aggregates	Design Trans- former	0*	
Aggregates	Generate ECU Extract	1*	
Aggregates	Generate System Extract	0*	

Table 2.17: Develop System

Activity	Develop Sub-Syste	Develop Sub-System		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::System:: Develop System			
Brief Description				
Description	Develop the descript Extract.	Develop the description of a sub-system based on a given System Extract.		
Relation Type	Related Element	Mul.	Note	
Consumes	System Extract	1		
Produces	ECU Extract	1*		
Aggregates	Create ECU System Description	1		
Aggregates	Define System Safety Information	01		
Aggregates	Design Sub-Sys- tem	1*		
Aggregates	Generate ECU Ex- tract	1*		

Table 2.18: Develop Sub-System



2.5.2 Design System

2.5.2.1 **Purpose**

This Activity provides a rough outline of the design steps leading to an AUTOSAR System Configuration Description and the system-specific part of the Abstract System Description, including its topology, deployment, communication matrix, etc.

2.5.2.2 Description

[TR_METH_01068] Inputs and Output of the Design System activity [The design of an AUTOSAR System Configuration Description and the system-specific part of the Abstract System Description uses input information from a System Constraint Description and is based on an Overall VFB System for the software part. Optionally, the Abstract System Description that represents the functional view on the system can be used as an input. Please note that the inputs and output are depicted in the top-level activities which aggregates the activity Design System.

The activity involves the creation of a Topology, ECU Resources Descriptions, and the interconnection between ECU instances.

[RS_METH_00005, RS_METH_00078, RS_METH_00079]

[TR_METH_01069] Deployment of AUTOSAR Software Components | The AUTOSAR Software Components defined within the VFB Top Level System Composition are then deployed to the ECU instances. |()

[TR_METH_01070] Description of network signals [The required network signals are identified and a mapping is done to System Signals to implement the VFB. System Signal Groups, are defined to keep certain signals grouped together for consistent transmission. System Signals are then defined and form the initial input to design the Communication. | (RS_METH_00005)

[TR_METH_01071] Description of design constraints \[During this stage, design constraints can also be defined Mapping of Software Components to Implementations, Mapping of Software Components to ECUs, Signal Path Constraints, and Software Component Mapping Constraints. These constraints serve many purposes including the ability for tools to use them to optimization a system, to interface with legacy ECUs, and to "lock" design decision between iterations. \[(RS_METH_00005, RS_METH_00002, RS_METH_00041, RS_METH_00020) \]

Note: The mapping of software components to implementations is optional and needed only if those components are specifically required to be used in an ECU.



2.5.2.3 Workflow




Figure 2.20: Structure overview: Design System



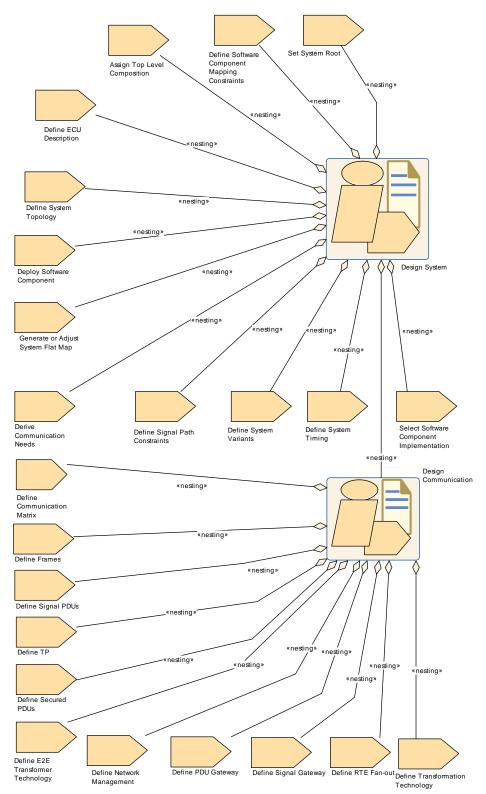


Figure 2.21: Nesting relationship: Design System



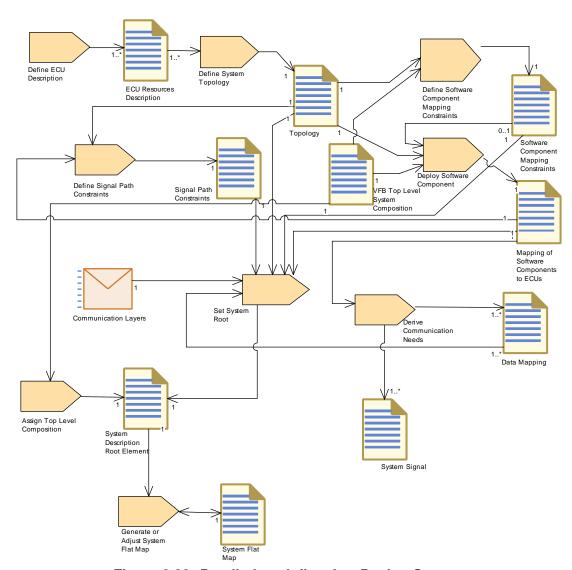


Figure 2.22: Detailed work flow for: Design System



Activity	Design System			
Package	AUTOSAR Root::M2 Design System	2::Metho	dology::Methodology Use Cases::System::	
Brief Description		Initial work to create a topology, map a VFB onto that topology and determine the ECU resources each ECU needs.		
Description	Topology, ECU Reso	The design of an AUTOSAR System involves the creation of a Topology, ECU Resources Descriptions, and the interconnection between ECU instances.		
			efined within the VFB Top Level System yed to the ECU instances.	
	System Signals to in defined to keep certa transmission. System	The required network signals are identified and a mapping is done to System Signals to implement the VFB. System Signal Groups, are defined to keep certain signals grouped together for atomic transmission. System Signals are then defined and form the initial input to design the Communication Matrix. During this stage, design constraints can also be defined (Mapping of Software Components to Implementations, Mapping of Software Component to ECUs, Signal Path Constraint, and Software Component Mapping Constraint). These constraints serve many purposes including the ability for tools to use them to optimization a system, to interface with legacy ECUs, and to "lock" design decision between iterations. Notes: The mapping of software components to implementations is optional and needed only if those components are specifically required to be used in an ECU.		
	Software Component Components to ECL Component Mapping purposes including t system, to interface			
Relation Type	Related Element	Mul.	Note	
Aggregates	Assign Top Level Composition	1		
Aggregates	Define ECU Description	1		
Aggregates	Define Signal Path Constraints	1		
Aggregates	Define Software Component Mapping Constraints	1		
Aggregates	Define System Timing	1		
Aggregates	Define System Topology	1		
Aggregates	Define System Variants	1		
Aggregates	Deploy Software Component	1		
Aggregates	Derive Communication Needs	1		
Aggregates	Design Communi- cation	1		



Relation Type	Related Element	Mul.	Note
Aggregates	Generate or Adjust System Flat Map	1	
Aggregates	Select Software Component Imple- mentation	1	
Aggregates	Set System Root	1	

Table 2.19: Design System

Activity	Design Communica	ation	
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::System:: Design System		
Brief Description			
Description	Describe all communication layers. and define the mapping of the triggering elements within the Physical Channels to the communication connector ports for the individual ECUs. Because the triggering elements are aggregated as splitable elements within the Physical Channels it is possible to define them in an artifact separated from the Topology.		
Relation Type	Related Element	Mul.	Note
Aggregates	Define Communication Matrix	1	
Aggregates	Define E2E Trans- former Technology	1	
Aggregates	Define Frames	1	
Aggregates	Define Network Management	1	
Aggregates	Define PDU Gate- way	1	
Aggregates	Define RTE Fan- out	1	
Aggregates	Define Secured P DUs	1	
Aggregates	Define Signal Gateway	1	
Aggregates	Define Signal PD Us	1	
Aggregates	Define TP	1	
Aggregates	Define Transformation Technology	1	

Table 2.20: Design Communication



2.5.3 Generate System Extract

2.5.3.1 **Purpose**

This Activity provides an extract of the system description for a specific sub-system.

2.5.3.2 Description

Generate a System Extract which is a basis to develop a sub-system.

2.5.3.3 Workflow




Figure 2.23: Generate the System Extract

The detailed tasks of Generate System Extract are not modeled since they are considered as trivial - it just means to reduce the content of the input description to the subsystem in question.

Activity	Generate System Extract			
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::System:: Generate System Extract			
Brief Description				
Description	Generate for further development, a System Extract which represents the description of a part of the system (sub-system). This allows a start of work on ECU's even if the system is not completely described.			
Relation Type	Related Element Mul. Note			
Consumes	System Configura- tion Description	1		
Produces	System Extract	0*		

Table 2.21: Generate System Extract

2.5.4 Create ECU System Description

2.5.4.1 **Purpose**

Based on a System Extract, this Activity creates ECU System Descriptions which are refined during the design of the sub-system.



2.5.4.2 Description

[TR_METH_01125] Create ECU System Description activity [Based on the delivered System Extract, the receiving organization creates one or more ECU Descriptions. The ECU Descriptions are used for designing the sub-system artifacts (See activity Design Sub-System). [RS_METH_00002, RS_METH_00005, RS_METH_00077]

From the methodological point of view there are two choices for creating the ECU System Description.

[TR_METH_01126] Using the System Extract as the structural basis for the ECU development [The System Extract is taken as the structural basis for the ECU development. In this case the System Extract becomes an ECU System Description. | (RS METH 00002, RS METH 00005, RS METH 00077)

[TR_METH_01127] Creating a new structure for the ECU development [A new structure is created as a basis for the ECU development. The newly created ECU System Description is mapped to the initial System Extract. For this purpose the task Define System View Mapping creates the initial System View Mapping artifact which is refined during the sub-system design.](RS_METH_00002, RS_METH_000077)

2.5.4.3 Workflow

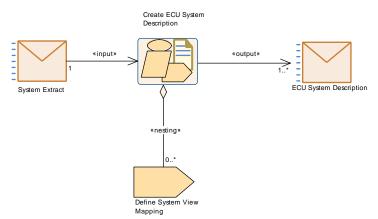


Figure 2.24: Create ECU System Description



Activity	Create ECU Systen	n Descr	iption		
Package	AUTOSAR Root::M2 Create ECU System		dology::Methodology Use Cases::System:: otion		
Brief Description					
Description	received System Exi The refinement of th Description. Therefor Descriptions based of are designed in the l	During the Develop Sub-System activity the supplier refines the received System Extract so that valid ECU Extracts can be generated. The refinement of the System Extract is done using the ECU System Description. Therefore, this activity creates one or more ECU System Descriptions based on the System Extract. The sub-system artifacts are designed in the ECU System Description during the activity "Design Sub-System".			
	1	From the methodological point of view there are two choices for creating the ECU System Description.			
	The System Extract is taken as the structural basis for the ECU development. In this case the System Extract becomes an ECU System Description.				
	2) A new structure is created as a basis for the ECU development. The newly created ECU System Description is mapped to the initial System Extract. For this purpose the task "Define System View Mapping" is performed.				
Relation Type	Related Element	Related Element Mul. Note			
Consumes	System Extract	1			
Produces	ECU System Description	1*			
Aggregates	Define System View Mapping	0*			

Table 2.22: Create ECU System Description

2.5.5 Design Sub-System

2.5.5.1 **Purpose**

This Activity details a given ECU System Description (previously created from the delivered System Extract) with additional ECUs and networks.

2.5.5.2 Description

[TR_METH_01075] Design Sub-System activity [Based on the ECU System Description, the description of a sub-system is defined.](RS_METH_00002, RS METH 00005)

[TR_METH_01076] Collaboration between different organizations [Additionally, the software component structure of the System Extracts, delivered by the primary organization can be transformed into a different structure by the receiving organization



(ECU System Description). In this case the System Extract of the primary organization can be considered as a requirement and the sub-system of the receiving organization can be seen as a solution which has to fulfill the delivered requirements. Thus here again a mapping activity can be defined which maps the newly introduced solution sub-system to the provided requirement sub-system from the primary organization. |(RS_METH_00002, RS_METH_00005, RS_METH_00077)

[TR_METH_01077] Transformation changes during the Design Sub-System activity [During this transformation the hierarchical SWC-structure can be changed, some SWCs can be replaced by other SWCs, some can remain in the resulting view. | (RS_METH_00002, RS_METH_00005)

[TR_METH_01078] Mapping of different views [The different views are mapped by the System View Mapping. | (RS METH 00002, RS METH 00005)

Typical use-cases for this transformation steps are:

- [TR_METH_01079] Use Case: Substitution of existing components [The secondary organization has an existing software architecture. By software sharing some of the existing components are substituted by the delivered software components.

 [RS_METH_00002, RS_METH_00005, RS_METH_00077, RS_METH_00079]
- [TR_METH_01080] Use Case: Mapping of requirements to the solution [
 The secondary organization develops one ECU for different primary organizations and therefore has to map the requirements of different primary organizations to its solution.

 [RS_METH_00002, RS_METH_00005, RS_METH_00077, RS_METH_00079]
- [TR_METH_01081] Use Case: Reorganization of the software structure [The primary organization delivers a sub-system description which defines one ECU. The secondary organization decides to use two ECUs. Therefore the software structure has to be reorganized by the second organization. [(RS_METH_00002, RS_METH_00005, RS_METH_00077, RS_METH_00079)]
- [TR_METH_01082] Use Case: Description of changes between different versions of System Descriptions | Additionally the mapping can be used to formally describe changes between different versions of System Descriptions. | (RS_METH_00002, RS_METH_00005, RS_METH_00077, RS_METH_00079)

Finally all Atomic Software Components in the resulting sub-system scope are included in this sub-system description.



2.5.5.3 Workflow




Figure 2.25: Overview: Design Sub-System

Note that the ECU System Description appears as input and output of this Activity because it is refined.

As the detailed work flow for this Activity uses the same elements from the methodology library as the one described in 2.5.2.3, the breakdown into tasks is not modeled here.

Activity	Design Sub-Systen	1		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::System:: Design Sub-System			
Brief Description				
Description	which was previously consists of the same The description mus	Design the sub-system artifacts based on an ECU System Description which was previously created from the delivered ECU Extract. It consists of the same tasks as the activity Design System. The description must be completed down to the ECU level, so that valid ECU extracts can be generated.		
Relation Type	Related Element	Mul.	Note	
Consumes	ECU System Description	1	System Extract as generated from the outer system.	
Produces	ECU System Description	1	System Extract refined during design of the corresponding sub-system with elements needed to generate ECU Extract(s).	

Table 2.23: Design Sub-System

2.5.6 Generate ECU Extract

2.5.6.1 **Purpose**

This Activity provides an extract of the System description for setting up an ECU Configuration for specific ECU.



2.5.6.2 Description

Generate an ${\tt ECU}$ ${\tt Extract}$ basis for setting up the ECU configuration and further development on ECU level.

2.5.6.3 Workflow

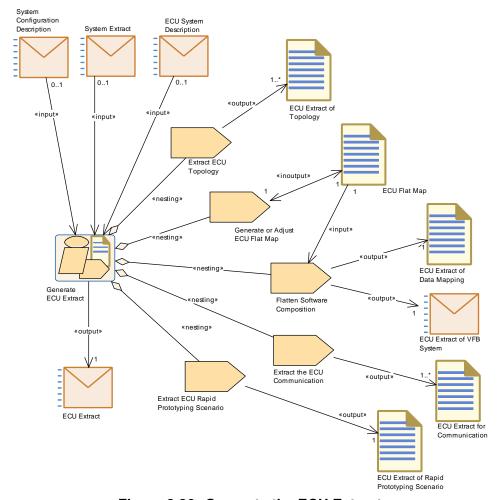


Figure 2.26: Generate the ECU Extract

Activity	Generate ECU Extract			
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::System:: Generate Ecu Extract			
Brief Description	Generate the ECU Extract out of the System Description in order to be delivered for integration for further development on ECU level.			
Description	Generate the ECU extract which is a basis for setting up the ECU configuration and further development on ECU level. It can be generated either from a full system (System Configuration Description), a System Extract or a ECU System Description.			
Relation Type	Related Element Mul. Note			



Relation Type	Related Element	Mul.	Note
Consumes	ECU System Description	01	
Consumes	System Configura- tion Description	01	
Consumes	System Extract	01	
Produces	ECU Extract	1	
Aggregates	Extract ECU Rapid Prototyping Scenario	1	
Aggregates	Extract ECU Topology	1	
Aggregates	Extract the ECU Communication	1	
Aggregates	Flatten Software Composition	1	
Aggregates	Generate or Adjust ECU Flat Map	1	
Predecessor	Define Rapid Prototyping Scenario	1	

Table 2.24: Generate ECU Extract

2.5.7 Design Transformer

2.5.7.1 **Purpose**

This Activity specifies the functional aspects of a transformation technology used for the serialization of selected system signals.

2.5.7.2 Description

Transformer enable AUTOSAR systems to use a data transformation mechanism to linearize and transform data. They can be concatenated to transformer chains and are executed by the RTE for inter-ECU communication which is configured to be transformed.

The transformation technology (which transformer should be used for which communication) is defined in the context of the <code>Design Communication</code> activity (task <code>Define Transformation Technology</code>). For the transformation of communication data standardized transformers (e.g. SOME/IP transformer) or custom transformers can be used.

[TR_METH_01130] Design Transformer activity [In case of custom transformers the Design Transformer activity has to be performed to define the functional specification of the custom transformation mechanism (Transformer Specification) and the corresponding configuration parameters (BSW Module Vendor- Specific



Configuration Parameter Definition). The Design Transformer activity is done during the Develop System activity because it produces a definition what a transformer does and therefore significantly affects the corresponding communication. | (RS METH 00005, RS METH 00077)

The specified transformer is then implemented (Develop Basic Software) and can be used in the Design Communication activity. There, inter-ECU communication can be marked for being transformed.

[TR_METH_01131] Output of Design Transformer activity | The Design Transformer activity shall result in a set of complete and unambiguous written Transformer Specifications and the corresponding BSW Module Vendor-Specific Configuration Parameter Definition. A specification of a specific transformer shall adhere to [6, SWS BSW General] and [7, ASWS Transformer General].

A specification of a transformer shall contain:

- Functional specification of the transformer. See [7, ASWS Transformer General] for details. The most important issue are:
 - Specification of the transformers output
 - Transformer class
 - Transformer errors
- Definition of Development Errors, Production Errors and Extended Production Errors.
- Transformer APIs
- Extension of the transformer EcuC if necessary for the specific transformer

(RS METH 00077)

2.5.7.3 Workflow

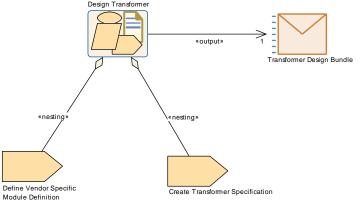


Figure 2.27: Design Transformer activity



Activity	Design Transforme	r		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::System:: Design Transformer			
Brief Description				
Description	In this activity the functional specification of the custom transformer module is created and the corresponding parameter definition is specified. The creation of the functional specification of the Transformer can be seen as a part of the communication design. This activity is performed only if a custom transformer for the communication is required.			
Relation Type	Related Element	Mul.	Note	
Produces	Transformer Design Bundle	1		
Aggregates	Create Trans- 1 former Specifica- tion			
Aggregates	Define Vendor Specific Module Definition	1		

Table 2.25: Design Transformer

2.5.8 Define System Safety Information

2.5.8.1 **Purpose**

This Activity allows specifying safety information at system level.

2.5.8.2 Description

In this activity, the safety information at system or sub-system level is defined. Obviously, the safety information defined in previous development stages is detailed. (For detailed tasks see chapter 2.14).



2.5.8.3 Workflow

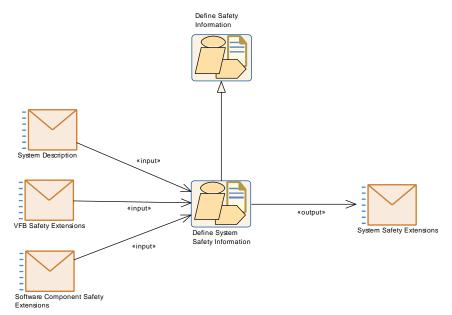


Figure 2.28: Define System Safety Information

Activity	Define System Safe	Define System Safety Information		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::System:: Develop System			
Brief Description	Defines all required	safety in	formation at system level.	
Description	In this activity, the safety information at system level is defined. The safety information can be refined or completed in further development phases.			
Extends	Define Safety Inform	ation		
Relation Type	Related Element	Mul.	Note	
Consumes	Software Component Safety Extensions	1		
Consumes	System Descrip- tion	1		
Consumes	VFB Safety Extensions	1		
Produces	System Safety Ex- tensions	1		

Table 2.26: Define System Safety Information



2.6 Develop Basic Software

2.6.1 Overview

2.6.1.1 Purpose

This Activity provides an overall use case how to the develop AUTOSAR Basic Software.

2.6.1.2 Description

2.6.1.3 Workflow

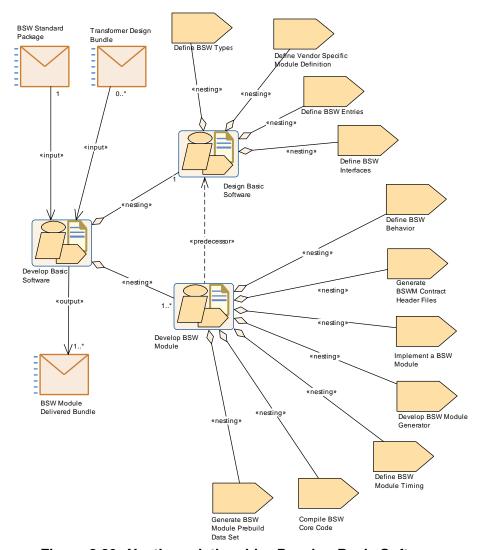


Figure 2.29: Nesting relationship: Develop Basic Software



Activity	Develop Basic Soft	ware			
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::BS W::develop_bsw				
Brief Description					
Description	Describes the overall activities to develop Basic Software, starting from the design down to delivery of modules.				
	In case of custom transformer module development, the Transformer Design Bundle containing the functional specification and the parameter definition is taken as a basis for all required activities.				
Relation Type	Related Element	Related Element Mul. Note			
Consumes	BSW Standard Package	1			
Consumes	Diagnostic System Extract	0*			
Consumes	Transformer Design Bundle	0*			
Produces	BSW Module De- livered Bundle	1*			
Produces	Diagnostic System Extract	0*			
Aggregates	Design Basic Soft- ware	1			
Aggregates	Develop BSW Module	1*			

Table 2.27: Develop Basic Software

It consists of two parts:

- Design Basic Software
- Develop BSW Module

2.6.2 Design BSW

2.6.2.1 **Purpose**

This Activity provides a rough outline for the Basic Software design for an ECU or a set of ECUs.

2.6.2.2 Description

[TR_METH_01083] Design Basic Software activity \[\text{ Design the Basic Software for an ECU or a set of ECUs. This shall result in a set of complete and unambiguous Basic Software Module Descriptions. \] \((RS_METH_00003, RS METH 00004) \)



Note that existing descriptions, especially standardized ones, can be reused, eventually setting only optional elements or user specific extension.

[TR_METH_01084] Separation of design and development of basic software | This Activity is conceptually separated from Develop BSW Module, because it might be performed by a Basic Software Designer responsible for the complete Basic Software Design on a given ECU, which may be different in general from the Basic Software Module Developer who develops or delivers the single modules. | (RS METH 00003, RS METH 00018)

2.6.2.3 Workflow

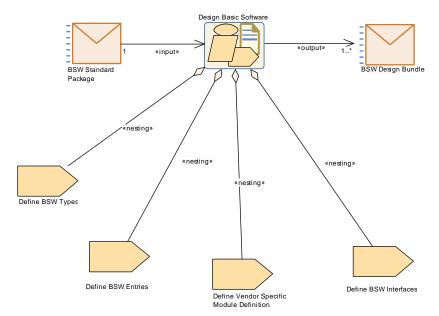


Figure 2.30: Nesting Relationship: Design Basic Software



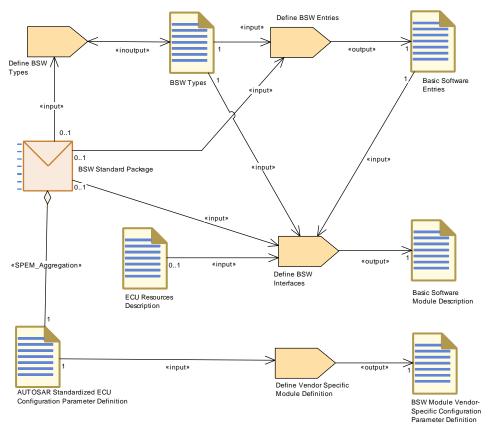


Figure 2.31: Design Basic Software

Activity	Design Basic Softw	/are	
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::BS W::develop_bsw		
Brief Description	Design the Basic So	ftware fo	or an ECU or a set of ECUs.
Description	Design the Basic Software for an ECU or a set of ECUs. This shall result in a set of complete and unambiguous Basic Software Module Description. Note that existing descriptions, especially standardized ones, can be reused, eventually setting only optional elements or user specific extension. This activity is conceptually separated from the activity Develop Basic Software Module, because it might be performed by a Basic Software Designer responsible for the complete Basic Software Design on a given ECU, which may be different (in general) from the Basic Software Module Developer who develops and/or delivers the single modules.		
Relation Type	Related Element	Mul.	Note
Consumes	BSW Standard Package	1	
Produces	BSW Design Bundle	1*	
Aggregates	Define BSW Entries	1	
Aggregates	Define BSW Interfaces	1	



Relation Type	Related Element	Mul.	Note
Aggregates	Define BSW Type	1	
Aggregates	Define Vendo	r 1	
	Specific Modul	9	
	Definition		

Table 2.28: Design Basic Software

2.6.3 Develop BSW Module

2.6.3.1 Purpose

This Activity provides a rough outline for a single Basic Software module or cluster development prior to an ECU integration.

2.6.3.2 Description

[TR_METH_01085] Develop BSW Module activity \[\text{To develop the core code (i.e. the code not generated during integration) of a single BSW module or cluster prior to ECU integration. This Activity focuses on the tasks which are common for most BSW modules. It is not valid for those modules (RTE, BSW Scheduler) which are completely generated at integration time. \[\] (RS_METH_00003, RS_METH_00006, RS_METH_00038)



2.6.3.3 Workflow

93 of 503

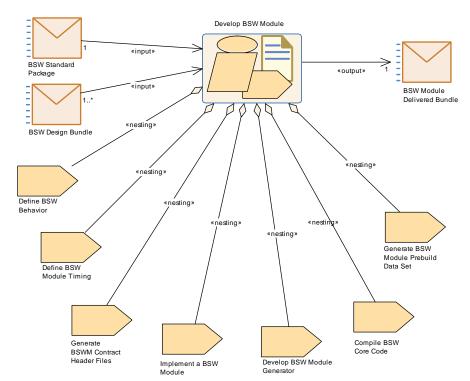


Figure 2.32: Nesting relationship: Develop Basic Software Module



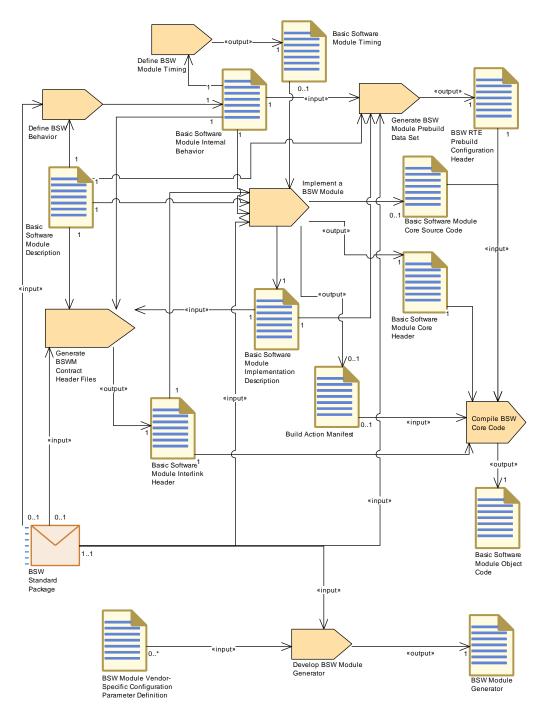


Figure 2.33: Develop Basic Software Module



Activity	Develop BSW Mod	Develop BSW Module		
Package	AUTOSAR Root::M2 W::develop_bsw	1 —		
Brief Description	Develop a single BS	Develop a single BSW module or cluster prior to ECU integration.		
Description		Develop a single BSW module or cluster prior to ECU integration.		
	integration) of a sing including vendor spe generators. This act most BSW modules.	To develop the core code (i.e. the code not generated during integration) of a single BSW module or cluster prior to ECU integration including vendor specific configuration parameters and module generators. This activity focuses on the tasks which are common for most BSW modules. It is not valid for those modules (RTE, BSW Scheduler) which are completely generated at integration time.		
Relation Type	Related Element	Mul.	Note	
Consumes	BSW Design Bun- dle	1*		
Consumes	BSW Standard Package	1		
Produces	BSW Module De- livered Bundle	1		
Aggregates	Compile BSW Core Code	1		
Aggregates	Define BSW Behavior	1		
Aggregates	Define BSW Mod- ule Timing	1		
Aggregates	Develop BSW Module Generator	1		
Aggregates	Generate BSW Module Prebuild Data Set	1		
Aggregates	Generate BSWM Contract Header Files	1		
Aggregates	Implement a BSW Module	1		
Predecessor	Design Basic Soft- ware	1		
Predecessor	Design Basic Soft- ware	1		

Table 2.29: Develop BSW Module

2.7 Integrate Software for ECU

2.7.1 Description

In this chapter, the integration for an AUTOSAR ECU is described. In the AUTOSAR sense an ECU means a microcontroller plus peripherals and the according software/configuration. Therefore, each microcontroller requires its own ECU Configuration.



[TR_METH_01086] Integrate Software for ECU activity [The main activities include configuring and/or generating the BSW modules (including the RTE) and building the executable. The BSW configuration can be done during different steps of development. The detailed use cases for these different ways of configuration are introduced later in the chapter, thanks to the Configuration Classes definition:

- Pre-compile time
- Link time
- Post-build time

(RS METH 00004, RS METH 00062)

2.7.2 Overview

2.7.2.1 **Purpose**

This Activity is showing the high level view how to integrate AUTOSAR Software for an ECU.

2.7.2.2 Description

[TR_METH_01087] Scope of Integrate Software for ECU activity [The development of an AUTOSAR ECU consists of four main activities:

- Prepare ECU Configuration
- Configure BSW and RTE
- Generate BSW and RTE
- Build Executable

In addition, the optional activity <code>Model ECU Timing</code> is shown. The ECU timing model depends on ECU configuration details (BSW and RTE), but the results shall help to optimize the configuration in an iterative approach. <code>](RS_METH_00005, RS_METH_00003, RS_METH_00004, RS_METH_00002, RS_METH_00006)</code>

The ECU configuration plays a significant role during the integration of the software for an ECU. The relevant workflow is depicted in figure 2.35¹. All three activities (Prepare ECU Configuration, Configure BSW and RTE, Generate BSW and RTE) use the work product ECU Configuration Values which contains (i.e. references) all the configuration information for all BSW modules on the ECU. In order to better understand the three different activities an introduction to configuration classes is given in chapter 2.7.9.

¹In order to be more comprehensible, this figure hides some outputs of the activity Generate BSW and RTE. For more details see the outputs of all aggregated tasks.



One can measure resources used by the various BSW modules and applications and save that information within the Basic Software Module Implementation Description Or Atomic Software Component Implementation.

One can also generate an A2L File processing the Generate A2L task at this point.

2.7.2.2.1 Inputs to ECU Configuration

[TR_METH_01114] Input sources for ECU Configuration [ECU Configuration has two input sources (see figure 2.35). First of all, all configuration that must be agreed across ECUs is defined in the System Configuration, which results in a System Configuration Description (and the resulting ECU Extract for the individual ECUs).

Secondly, the ECU BSW is built using BSW modules. The specifics of these module implementation are defined in the BSW Module descriptions covered by the BSW Module Delivered Bundle. \(\langle (RS_METH_00003, RS_METH_00004, RS_METH_00005, RS_METH_00006) \)

The latter is described in [8] in more detail. The concept of the ECU Extract is depicted below:

ECU Extract

ECU Configuration can only be started once a plausible System Configuration Description and the corresponding ECU Extract has been generated (see figure 2.35). Details on the System Configuration Description can be found in [9].

The System Configuration Description contains all relevant system-wide configuration, such as

- ECUs present in the system
- Communication systems interconnecting those ECUs and their configuration
- Communication matrices (frames sent and received) for those communication systems
- Definition of Software Components with their ports and interfaces and connections (defined in the SWC Description and referenced in the System Configuration Description).
- Mapping of SWCs to ECUs

The ECU Extract is a description in the same format as the System Configuration Description, but with only those elements included that are relevant for the configuration of one specific ECU.



2.7.2.2.2 ECU Configuration Value description

The ECU Extract only defines the configuration elements that must be agreed between ECUs. In order to generate a working executable that runs on the ECU, much more configuration information must be provided.

The remaining part of the configuration is about configuring all BSW modules within the ECU. Typical BSW modules within an ECU can be: RTE, Com, Can, OS, NVRAM etc. There are also dependencies between BSW modules to consider when configuring the ECU.

When the configuration is done, the generation of configuration data takes place. I.e. there are both configuration editors and configuration generators involved in the process.

In order to obtain consistency within the overall configuration of the ECU, AUTOSAR has defined a single format, the ECU Configuration Value description to be used for all BSW modules within an ECU. Both configuration editors and configuration generators are working toward ECU Configuration Value descriptions. In the AUTOSAR Methodology the ECU Configuration Value descriptions is represented by the artifact ECU Configuration Values.

[TR_METH_01116] ECU Configuration Value description contains the configuration of all BSW modules in a single ECU [This one description (ECU Configuration Values) collects the complete configuration of BSW modules in a single ECU. Each module generator may then extract the subset of configuration data it needs from that single format.](RS_METH_00004)



2.7.2.3 Workflow

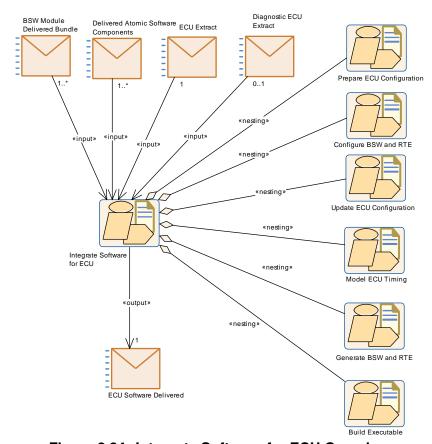


Figure 2.34: Integrate Software for ECU Overview

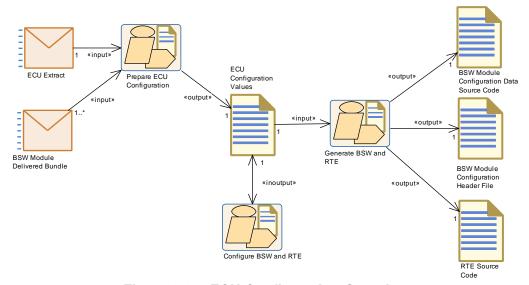


Figure 2.35: ECU Configuration Overview



Activity	Integrate Software for ECU		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Integrate Software for ECU		
Brief Description			
Description	This activity contains all typical sub-activities required to integrate the software components and modules on an AUTOSAR ECU. ECU in this context means processor, so if an electronic control unit consists of several processors, one "ECU Delivered" will be needed for each processor.		
Relation Type	Related Element	Mul.	Note
Consumes	BSW Module De- livered Bundle	1*	
Consumes	Delivered Atomic Software Compo- nents	1*	
Consumes	Diagnostic ECU Extract	01	complete DE:
Consumes	ECU Extract	1	
Produces	ECU Software De- livered	1	
Aggregates	Build Executable	1	
Aggregates	Configure BSW and RTE	1	
Aggregates	Generate BSW and RTE	1	
Aggregates	Model ECU Timing	1	
Aggregates	Prepare ECU Configuration	1	
Aggregates	Update ECU Configuration	1	

Table 2.30: Integrate Software for ECU

2.7.3 Prepare ECU Configuration

2.7.3.1 Description

[TR_METH_01088] Prepare ECU Configuration activity | During the Prepare ECU Configuration activity, the information available in ECU Extract for the specific ECU is extended by implementing the Service Needs required by the Software Components and BSW Modules and by including their initial configurations as provided in the BSW Module Preconfigured Configuration or BSW Module Recommended Configuration. The result of this activity is the base ECU Configuration.

In addition, the BSW Module Vendor- Specific Configuration Parameter Definition, which defines all possible configuration parameters and their structure, is incorporated into the ECU Configuration. This is necessary because the



output ECU Configuration has a flexible structure which does not define a fixed number of configuration parameters a priori. \(\left(RS_METH_00005, RS_METH_00003, RS_METH_00004, RS_METH_00002) \)

[TR_METH_01117] BSW implementation shall be chosen for each BSW module that is present in the ECU \[\text{For each BSW module that shall be present in the ECU, the implementation must be chosen. This is done by referencing the BSW Module description delivered with the BSW module (BSW Module Delivered Bundle). \[(RS_METH_00003, RS_METH_00004) \]

The rules that must be followed when building the base ECU Configuration Value description are available in [10] chapter 4.2.

2.7.3.2 Workflow

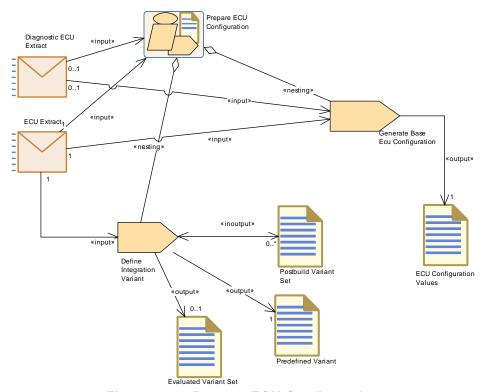


Figure 2.36: Prepare ECU Configuration

Activity	Prepare ECU Confi	Prepare ECU Configuration		
Package	1	AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Integrate Software for ECU		
Brief Description				
Description	Initial actions require	Initial actions required to create the initial ECU Configuration.		
Relation Type	Related Element	Related Element Mul. Note		
Consumes	BSW Module De- livered Bundle	1*		



Relation Type	Related Element	Mul.	Note
Consumes	Diagnostic ECU Extract	01	
Consumes	ECU Extract	1	
Produces	ECU Configuration Values	1	
Aggregates	Define Integration Variant	1	
Aggregates	Generate Base Ecu Configuration	1	
Predecessor	Refine Rapid Prototyping Scenario	1	

Table 2.31: Prepare ECU Configuration

2.7.4 Configure BSW and RTE

2.7.4.1 Description

[TR_METH_01089] Configure BSW and RTE activity [Once there is a base ECU Configuration, the complete configuration can be performed. This is mainly editing work on the ECU Configuration which is typically supported by an editing tool. In practice this will require iterations and/or parallel work to configure the RTE and all participating BSW modules. |(RS_METH_00003, RS_METH_00004, RS_METH_00020)

The methodology does not prescribe a certain order of these configuration steps. The ECU Configuration description (e.g. ECU Configuration Values) which was produced by one activity can be read by another activity (e.g. Configure RTE generates a description and Configure Com reads this). Usually the configuration activities for the BSW modules (e.g. COM and OS) read and write the ECU Configuration.

[TR_METH_01090] Configure RTE task [The Configure RTE task is more complex as this additionally needs all the Atomic Software Component Implementations required for that ECU. Whenever these change, e.g. because software components have been moved to or from other ECUs, or simply another implementation of a software component has been selected, the Configure RTE task must be repeated as well. \(\(\left(RS_METH_00005, RS_METH_00003, RS_METH_00004, RS_METH_00002 \)

[TR_METH_01091] Configure Debug task [Finally the Configure Debug task can be completed. Since this configuration depends on previous configuration results, it should be completed last.](RS_METH_00005, RS_METH_00003, RS_METH_00004, RS_METH_00002)



2.7.4.2 Workflow

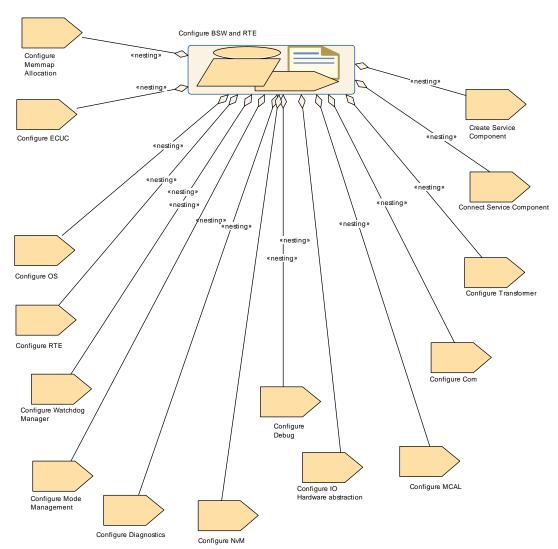


Figure 2.37: Configure BSW and RTE

Activity	Configure BSW and RTE		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Integrate Software for ECU		
Brief Description			
Description	All the tasks used to configure the Basic Software Modules on an ECU.		
Relation Type	Related Element Mul. Note		
Aggregates	Configure Com	1	
Aggregates	Configure Debug	1	
Aggregates	Configure Diag- nostics	1	
Aggregates	Configure ECUC	1	
Aggregates	Configure IO Hard- ware abstraction	1	
Aggregates	Configure MCAL	1	



Relation Type	Related Element	Mul.	Note
Aggregates	Configure Memmap Allocation	1	
Aggregates	Configure Mode Management	1	
Aggregates	Configure NvM	1	Since the configuration of the DEM usually has impact on the data to be stored in NvM, the task Configure Diagnostics is assumed to precede the task Configure NvM.
Aggregates	Configure OS	1	
Aggregates	Configure RTE	1	
Aggregates	Configure Trans- former	1	
Aggregates	Configure Watch- dog Manager	1	
Aggregates	Connect Service Component	1	
Aggregates	Create Service Component	1	
Predecessor	Prepare ECU Configuration	1	
In/out	ECU Configuration Values	1	

Table 2.32: Configure BSW and RTE

2.7.5 Update ECU Configuration

2.7.5.1 Description

In a post-build scenario, there are two loadable files generated in the end - one of them containing the application software, basic software and the pre-compile and link time configuration of the basic software (referred to as ECU Executable) and the other one containing only the post-build time configuration of the basic software (BSW Module Configuration Data Loadable to ECU Memory). These two loadable files represent the initial configuration. This initial configuration can be updated in post-build time by generating two new loadable files. In this update, the ECU Executable is not modified.

[TR_METH_01151] Update ECU Configuration activity [The update of the BSW Module Configuration Data Loadable to ECU Memory is usually done by importing the updated EcuExtract containing the needed post-build updates to the ECU configuration tool which already contains the initial ECU configuration. Based on these updates in the EcuExtract and everything else from the initial ECU configuration, an updated ECU configuration shall be created (therefore we have both input and



output relations between the ECU Configuration Values and the Update ECU Configuration activity). |(RS_METH_00004, RS_METH_00062)

2.7.5.2 Workflow

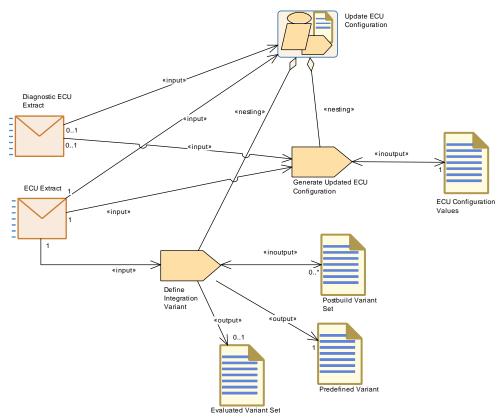


Figure 2.38: Update ECU Configuration

Activity	Update ECU Configuration		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Integrate Software for ECU		
Brief Description	Tasks required to create the updated ECU Configuration.		
Description	Tasks required to create the updated ECU Configuration.		
Relation Type	Related Element	Mul.	Note
Consumes	Diagnostic ECU Extract	01	
Consumes	ECU Extract	1	
Aggregates	Define Integration Variant	1	
Aggregates	Generate Updated ECU Configuration	1	

Table 2.33: Update ECU Configuration



2.7.6 Model ECU Timing

2.7.6.1 Workflow

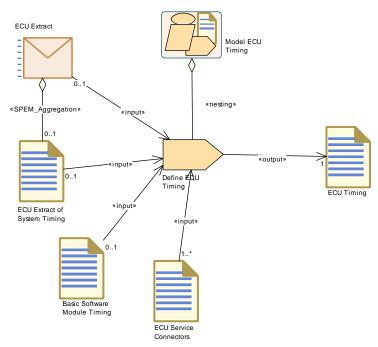


Figure 2.39: Model ECU Timing

Activity	Model ECU Timing			
Package		AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Integrate Software for ECU		
Brief Description				
Description	RTE) but the result of configuration. The re	ECU timing model depends on ECU configuration data (BSW and RTE) but the result of the ECU timing model shall help to optimize ECU configuration. The relation between "Configure BSW and RTE" and "Model ECU Timing" must be seen as an iterative work.		
Relation Type	Related Element	Related Element Mul. Note		
Aggregates	Define ECU Timing	1		
Predecessor	Configure BSW and RTE	1		

Table 2.34: Model ECU Timing

2.7.7 Generate BSW and RTE

2.7.7.1 Description

[TR_METH_01092] Generating BSW modules, RTE, and OS source files \lceil After the ECU Configuration is completed, the BSW modules, RTE, and OS source



files are generated. \(\] (RS_METH_00005, RS_METH_00003, RS_METH_00004, RS_METH_00006)

Generation is the process of applying the tailored ECU Configuration Value description to the software modules. This can be performed in different ways, and is dependent on the configuration classes chosen for the different modules (see 2.7.9), and on implementers choices.

For each BSW module, a generator reads the relevant parameters from the ECU Configuration Value description and creates code that implements the specified configuration.

In this generation step, the abstract parameters of the ECU Configuration Value description are translated to hardware and implementation-specific data structures that fit to the implementation of the corresponding software module. The AUTOSAR Methodology specification does not specify the generator tools in detail.

It is assumed however that generators perform error, consistency and completeness checks on the part of the configuration they require for generation.

There are some alternative approaches when it comes to generation of configuration data. See chapter A.1.2 in [10] for more details.

2.7.7.2 Workflow

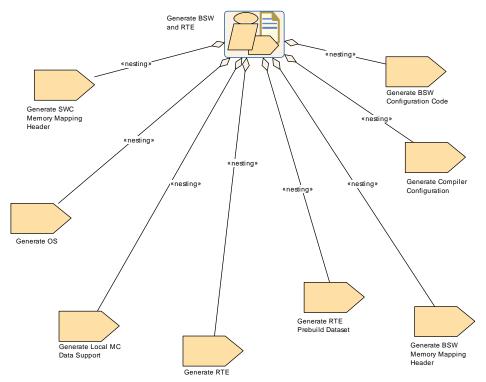


Figure 2.40: Generate BSW and RTE



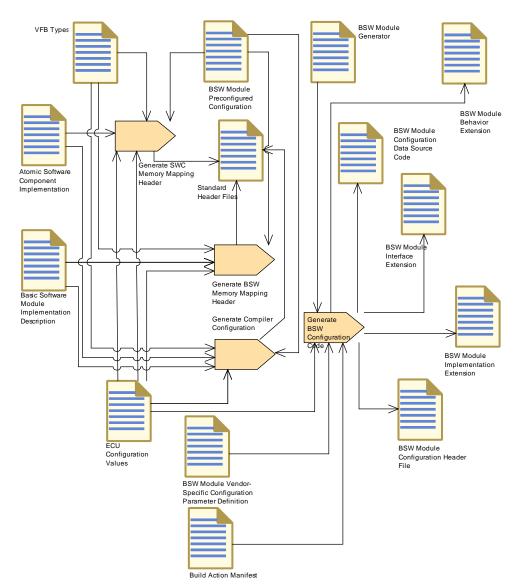


Figure 2.41: Generate BSW and RTE (Part 1)



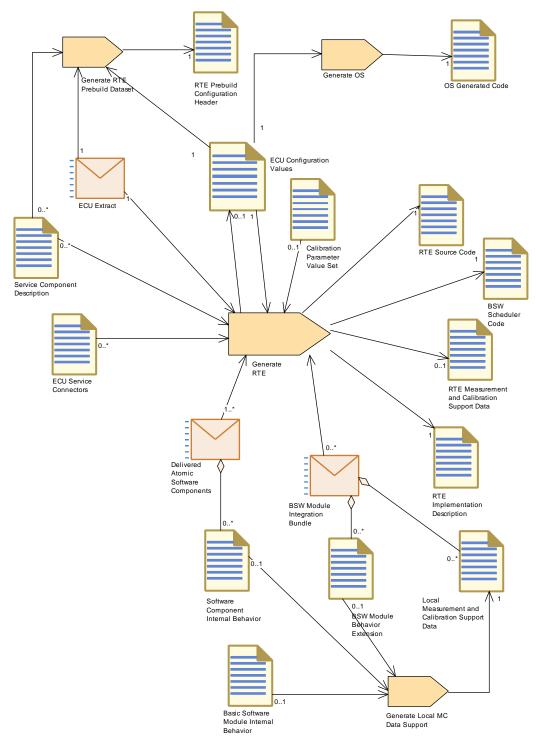


Figure 2.42: Generate BSW and RTE(Part 2)



Activity	Generate BSW and RTE			
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Integrate Software for ECU			
Brief Description	High Level view show	High Level view showing how to build an AUTOSAR ECU software.		
Description	There are many possibilities how to run the configuration of the different modules in detail (see the detailed use cases for the configuration classes). This overall use case shows the generation of RTE, OS and Memory Mapping explicitly, for the other modules it shows as an example the generic task required for link time configuration of the modules plus the generic task to generate local calibration support data.			
Relation Type	Related Element	Mul.	Note	
Consumes	ECU Configuration Values	1		
Produces	BSW Module Configuration Data Source Code	1		
Produces	BSW Module Configuration Header File	1		
Produces	RTE Source Code	1		
Aggregates	Generate BS W Configuration Code	1		
Aggregates	Generate BSW Memory Mapping Header	1		
Aggregates	Generate Compiler Configuration	1		
Aggregates	Generate Local M C Data Support	1		
Aggregates	Generate OS	1		
Aggregates	Generate RTE	1		
Aggregates	Generate RTE Prebuild Dataset	1		
Aggregates	Generate SWC Memory Mapping Header	1		
Predecessor	Configure BSW and RTE	1		

Table 2.35: Generate BSW and RTE

2.7.8 Build Executable

2.7.8.1 Description

[TR_METH_01093] Building ECU Executable \lceil These are compiled and linked along with all the applications, libraries, etc. to build the ECU Executable. The



2.7.8.2 Workflow

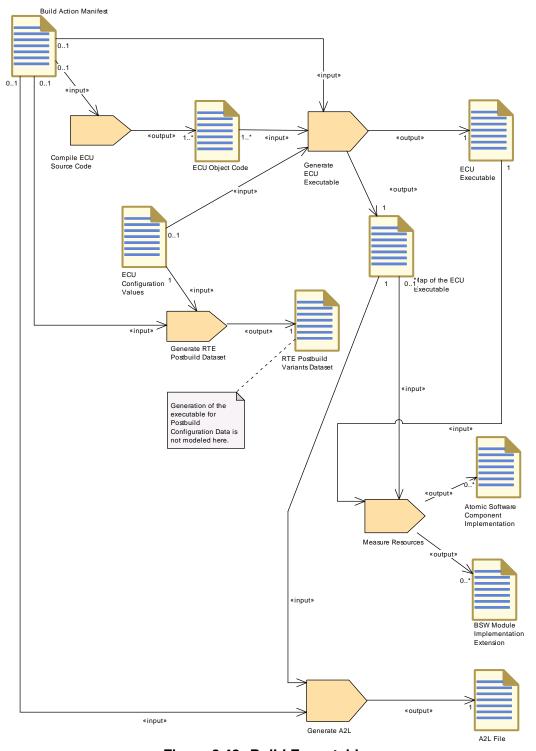


Figure 2.43: Build Executable



Activity	Build Executable			
Package		AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Integrate Software for ECU		
Brief Description				
Description	I	Describes how to build one executable and related artifacts (A2L file) starting from the source code (and delivered object code).		
Relation Type	Related Element	Mul.	Note	
Aggregates	Compile ECU Source Code	1		
Aggregates	Generate A2L	1		
Aggregates	Generate ECU Executable	1		
Aggregates	Generate RTE Postbuild Dataset	1		
Aggregates	Measure Resources	1		
Predecessor	Generate BSW and RTE	1		

Table 2.36: Build Executable

2.7.9 Configuration Classes

The development of BSW modules involve the following development cycles: compiling, linking and downloading of the executable to ECU memory. Configuration of parameters can be done in any of these process-steps: pre-compile time, link time or even post-build time.

According to the process-step that does the configuration of parameters, the configuration classes are categorized as below

- pre-compile time
- link time
- post-build time

The configuration in different process-steps has some consequences for the handling of ECU configuration parameters. If a configuration parameter is defined as precompile time, after compilation this configuration parameter can not be changed any more.

Or if a configuration parameter is defined at post-build time the configuration parameter has to be stored at a known memory location. Also, the format in which the BSW module is delivered determines in what way parameters are changeable. A source code delivery or an object code delivery of a BSW module has different degrees of freedom regarding the configuration.

The configuration class of a parameter depends on the chosen implementation variants of the BSW module it belongs to. However once the module is implemented, the



configuration class for each of the parameters is fixed. Choosing the right implementation variant for a module depends on the type of application and the design decisions taken by the module implementer.

Different configuration classes can be combined within one module. For example, for post-build time configurable BSW implementations only a subset of the parameters might be configurable post-build time. Some parameters might be configured as precompile time or link time.

File formats used for describing the configuration classes:

- .arxml (An xml file standardized by AUTOSAR.)
- .exe (An executable that can be downloaded to an ECU.)
- .hex (A binary file that can be downloaded to an ECU, but it can not execute by its own.)
- .c (A C-source file containing either source code or configuration data.)
- .h (A header file for either source code or configuration data.)
- .obj (A object file for either source code or configuration data.)

[TR_METH_01115] A mix of parameters with different configuration classes within a BSW module is allowed ∫ In a real implementation of a BSW module all configuration parameters are most likely not in the same configuration class. I.e it will be a mix of parameters with different configuration classes within a BSW module. |(RS_METH_00003, RS_METH_00004)

2.7.9.1 Configuration Class: Pre-compile Time

[TR_METH_01095] Configuration Class: Pre-compile Time [TPS_ECUC_01031], see [10]) This type of configuration is a standalone configuration done before compiling the source code. That means parameter values for those configurable elements are selected before compiling and will be effective after compilation time. The value of the configurable parameter is decided in earlier stage of software development process and any changes in the parameter value calls for a re-compilation. The contents of pre-compile time parameters can not be changed at the subsequent development steps like link time or post-build time.

[RS_METH_00004, RS_METH_00062]

2.7.9.1.1 Description

The work breakdown structure shows two approaches:

[TR_METH_01096] Generating header files only [The first approach is to generate a BSW Module Configuration Header File, then compile the module core code



using this header file. In this case the module core code is not touched by the BSW Configuration Generator.]()

[TR_METH_01097] Generating header and source files [An alternative approach, in which the BSW Configuration Generator generates the complete, configuration-specific BSW Module Configuration Header Files plus BSW Module Completely Generated Source Code. In this case, no core code exist. | ()

Both approaches are equally valid.

Whenever the decision of parameter value must be taken before the selection of other dependable parameters, pre-compile time configuration is the right choice. For example, the algorithm choice for CRC initial checksum parameter is based on the selection of CRC type (CRC16 or CRC32). When CRC16 is selected, there will be increase in processing time but reduction in memory usage. Whereas when CRC32 is selected, there will be decrease in processing time but increase in memory usage. The correct choice should be made by the implementer before compilation of source code based on the requirement and resource availability.

Sample cases where pre-compile time configuration can be adopted are:

- Configure the number of memory tables and block descriptor table of NVRAM manager.
- Enable the macro for the development error tracing of the software modules.



2.7.9.1.2 Workflow

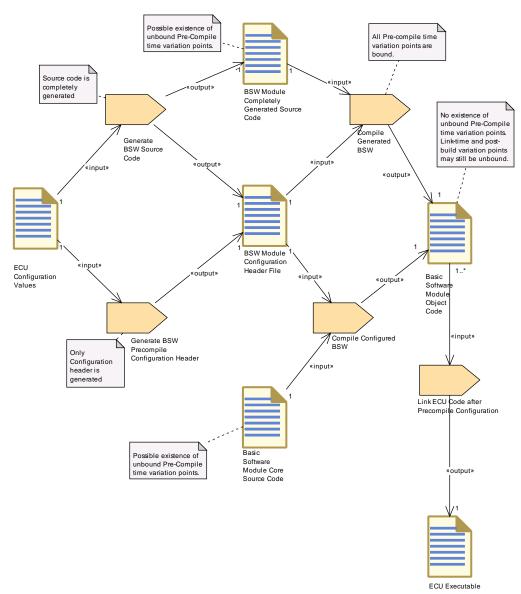


Figure 2.44: Pre-compile time configuration overview

Further description of the PreCompile binding time can be found in Section 2.16.3.6.






Figure 2.45: Pre compile time configuration activities

Activity	Do Pre Compile Co	nfigura	tion
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Pre Compile Conf		
Brief Description			
Description	[from ecuc sws 1031] This type of configuration is a standalone configuration done before compiling the source code. That means parameter values for those configurable elements are defined before compiling and will be effective after compilation time. The value of the configurable parameter is decided in an earlier stage of software development process and any changes in the parameter value calls for a re-compilation. The contents of pre-compile time parameters cannot be changed at the subsequent development steps like link time or post-build time.		
Relation Type	Related Element	Mul.	Note
Aggregates	Compile Configured BSW	1	
Aggregates	Compile Generated BSW	1	
Aggregates	Generate BSW Precompile Configuration Header	1	
Aggregates	Generate BSW Source Code	1	
Aggregates	Link ECU Code after Precompile Configuration	1	

Table 2.37: Do Pre Compile Configuration



2.7.9.2 Configuration Class: Link Time

[TR_METH_01098] Configuration Class: Link Time [([TPS_ECUC_01032], see [10]) This type of configuration is done for the BSW module during link time. That means the object code of the BSW module receives parts of its configuration from another object code file or it is defined by linker options. Link time parameters are typically used when delivering object code to the integrator.

[RS_METH_00062]

2.7.9.2.1 Description

This configuration class provides a modular approach to the configuration process. A separate module will handle the configuration details and those parameter values will be made available to the other modules during the linking process.

[TR_METH_01099] Generation and compilation of BSW Configuration Code [The first step is to Generate BSW Configuration Code, which produces the BSW Module Configuration Data Source Code and the BSW Module Configuration Header File. These are compiled along with the Basic Software Module Core Header into the BSW Module Configuration Data Object Code. |()

[TR_METH_01100] Definition of configuration data [The configuration parameter data is defined in a common header file Basic Software Module Core Header and included by both Basic Software Module Core Source Code and BSW Module Configuration Data Source Code. The module source file needs this header file to resolve the references and module configuration source file will need it in order to cross check the declaration of data type against the definition. | ()

[TR_METH_01101] Separate compilation of module source and configuration file | Both module source file and module configuration source file are compiled separately to generate Basic Software Module Object Code and BSW Module Configuration Data Object Code respectively. |()

[TR_METH_01102] Linking process [During the linking process, the configuration data will be available to Basic Software Module Object Code by resolving the external references. |()

[TR_METH_01103] Re-generation in case of configuration value changes \lceil When the values of configuration parameters change the Basic Software Module Object Code needs to be re-generated. \rfloor (RS_METH_00004)

Sample cases where Link time configuration can be adopted are:

- Initial value and invalid value of signal
- Unique channel identifier configured for the respective instance of the Network Management.



- Logical handle of CAN network.
- Identifier and type of Hardware Reception Handle and Hardware Transmission
- Handle for CAN interface.
- Definition of ComFilterAlgorithm.
- COM callback function to indicate RTE about the reception of an invalidated signal.

2.7.9.2.2 Workflow

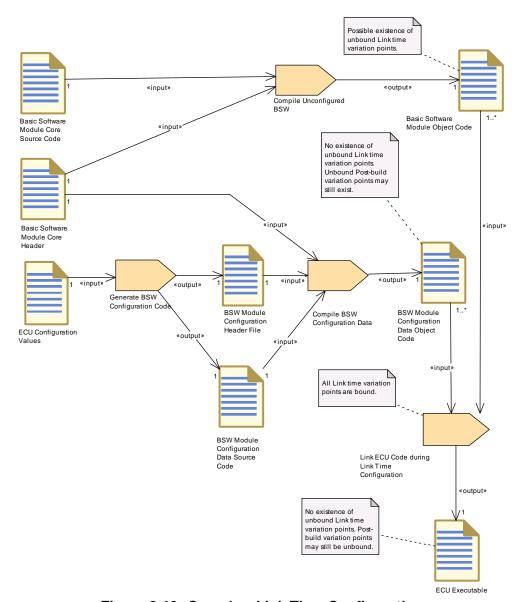


Figure 2.46: Overview Link Time Configuration

Further description of the LinkTime binding time can be found in Section 2.16.3.8.






Figure 2.47: Link time configuration

Activity	Do Link Time Conf	iguratio	n
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Link Time Conf		
Brief Description			
Description	[from ecuc sws 1032] This type of configuration is done for the BSW module during link time. That means the object code of the BSW module receives parts of its configuration from another object code file or it is defined by linker options. Link time parameters are typically used when delivering object code to the integrator.		
Relation Type	Related Element	Mul.	Note
Aggregates	Compile BSW Configuration Data	1	
Aggregates	Compile Unconfigured BSW	1	
Aggregates	Generate BS W Configuration Code	1	
Aggregates	Link ECU Code during Link Time Configuration	1	

Table 2.38: Do Link Time Configuration

2.7.9.3 Configuration Class: Post-build Time

[TR_METH_01104] Configuration Class: Post-build Time [([TPS_ECUC_04006], see [10]) This type of configuration is possible after building the BSW module or the ECU software. The BSW module gets the parameters of its configuration by download-



ing a separate file to the ECU memory, avoiding a re-compilation and re-build of the BSW module. \(\left(RS_METH_00004, RS_METH_00062 \right) \)

2.7.9.3.1 Description

[TR_METH_01105] Generate BSW Postbuild Configuration Code [In order to make the post-build time re-configuration possible, the re-configurable parameters shall be stored at a known memory location of the ECU memory. In this approach the Basic Software Module Core Source Code is compiled and linked independently of its configuration data. The BSW Configuration Generator generates the configuration data as BSW Module Configuration Data Source Code that is compiled and linked independently of the core source code. |()

The generation of the post-build configuration is a process that can be done multiple times. The first time it is done during the creation of the initial ECU configuration which includes the generation of both ECU Executable and BSW Module Configuration Data Loadable to ECU Memory binary files. This approach is shown in Figure 2.48. After this, the post-build configuration may be updated (the updates usually originate from the ECU Extract) separately from the ECU Executable as many times as needed according to the process shown in Figure 2.49.

Sample cases where post-build time configuration can be adopted are:

- Identifiers of the CAN frames
- CAN driver baudrate and propagation delay
- COM transmission mode, transmission mode time offset and time period
- Enabling/disabling signal transmission
- Frame packing
- Signal gateway
- LIN/FlexRay schedule



2.7.9.3.2 Workflow

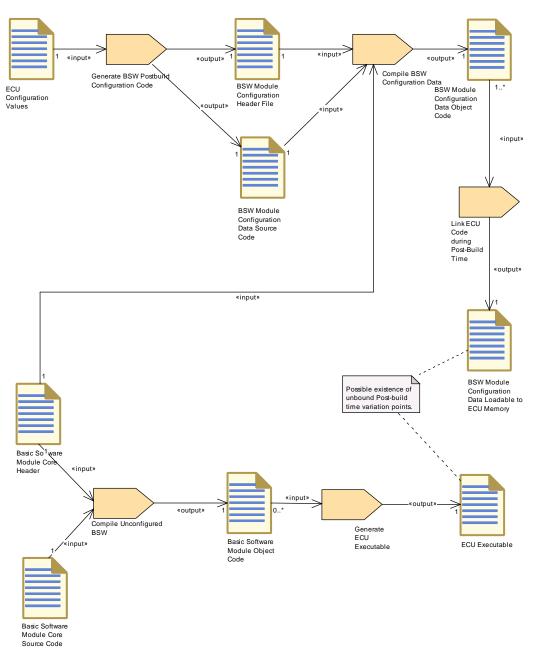


Figure 2.48: Overview of initial Post-Build Configuration



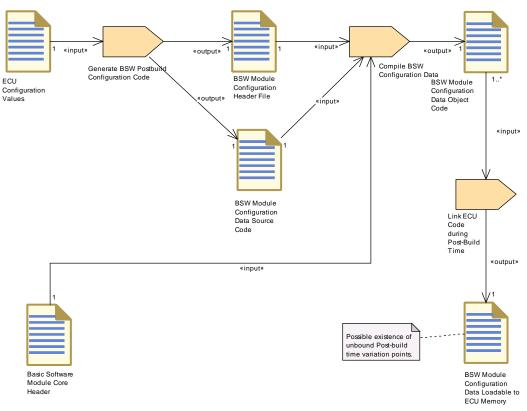


Figure 2.49: Update of the Post-Build Configuration

Further description of the PostBuild binding time can be found in Section 2.16.3.9.




Figure 2.50: Work Flow for Post-Build Configuration



Activity	Do Post Build Conf	iguratio	on
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::ECU:: Post Build Conf		
Brief Description			
Description	[from ecuc sws 4006] This type of configuration is possible after building the BSW module or the ECU software. The BSW module gets the parameters of its configuration by downloading a separate file to the ECU memory, avoiding a re-compilation and re-build of the BSW module.		
Relation Type	Related Element	Mul.	Note
Aggregates	Compile BSW Configuration Data	1	
Aggregates	Compile Unconfigured BSW	1	
Aggregates	Generate BSW Postbuild Configu- ration Code	1	
Aggregates	Generate ECU Executable	1	
Aggregates	Link ECU Code during Post-Build Time	1	

Table 2.39: Do Post Build Configuration

2.7.9.4 Handling of different post-build variants in configuration classes

2.7.9.4.1 Description

[TR_METH_01108] Generating multiple post-build configuration variants [In this use case, the BSW Configuration Generator generates two or more variants of configuration parameters within BSW Module Configuration Header Files and BSW Module Configuration Data Source Code. The configuration data is compiled and linked together with the Basic Software Module Core Source Code. The resulting ECU Executable includes all configuration variants as well as the source code of the BSW module. I.e. it is not possible to exchange the configuration data without re-building the entire executable.] (RS_METH_00062)

[TR_METH_01150] Including different post-build variants ☐ Different post-build variants are included in the configuration by specifying different variation points which shall be bound at post-build time. This can be done regardless of the configuration class, as shown in the notes of 2.44, Figure 2.46 and Figure 2.48. ☐ (RS_METH_00062)



2.8 Components and Services

2.8.1 Purpose

This use case focuses on the activities required to use and configure AUTOSAR Services. It is therefore a subset of the overall use case (see 2.1).

2.8.2 Description

[TR_METH_02000] Use of AUTOSAR Services [Atomic Software Components can use AUTOSAR Services. In order to do so, two things have to be defined on the VFB and Software Component level:

- The ports which are to be connected to the Service during ECU integration (this is a sub-task of Define VFB Application Software Component). The port interfaces used for service ports should be standardized.
- The needs to configure the Service (for example NvM blocks or symbolic names for diagnostic events) from the perspective of the single Software Component (this is a sub-task of Define Atomic Software Component Internal Behavior.)

\((RS_METH_00002, RS_METH_00033)\)

The service ports have impact on the component API just like any other port, so there is no difference between service ports and "normal" ports with respect to API generation.

When the Application Software Components are mapped to an ECU their description is put into the corresponding ECU Extract. These activities belong to the System domain (see 2.5.6) and are not explicitly shown in this use case.

As part of the ECU integration, additional artifacts are generated to connect the service ports over the RTE: Service Component Descriptions, including their mapping to the Basic Software Modules, and the connectors between their ports and the service ports of the Application Software Components.

The use case shows also the creation of ECU configuration of the corresponding Basic Software Module (e.g. DEM, DCM, Watchdog Manager etc.). This must be done with respect to the service ports and the Service Needs of all Application Software Components connected to the corresponding Service Component (the diagram shows only the configuration activity of diagnostics as an example).

2.8.3 Workflow

Figure 2.51 shows the work sequence assumed for this use case. The next two figures 2.52 and 2.53 show the tasks and work products of the method library involved in the activities on the VFB and Component resp. the ECU level.



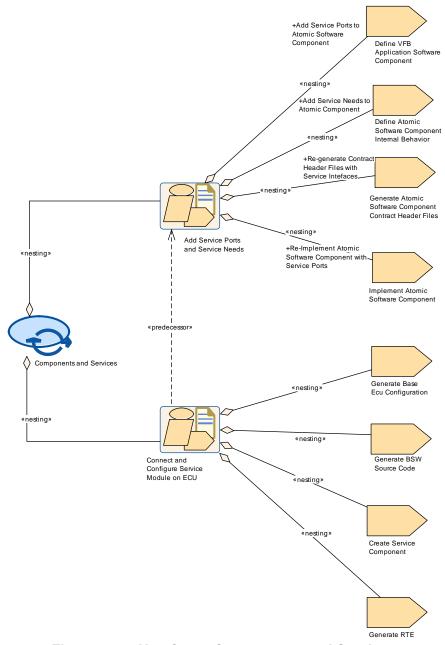


Figure 2.51: Use Case: Components and Services



Process Pattern	Components and S	ervices			
Package	AUTOSAR Root::M2 Level::Components		dology::Methodology Use Cases::High /ices		
Brief Description	AUTOSAR Services.	This use case focuses on the activities required to use and configure AUTOSAR Services. It is therefore a subset of the overall use case (Methodology Overview).			
Description	do so, two things have connected to the Ser needs to configure the names for diagnostic	Atomic Software Components can use AUTOSAR Services. In order to do so, two things have to be defined: The ports which are to be connected to the Service during ECU integration and in addition the needs to configure the Service (for example NvM blocks or symbolic names for diagnostic events) from the perspecive of the single Software Component.			
		s no diff	ct on the component API just like any erence between service ports and o API generation.		
	ECU and their descr (deliverable Complet system domain and	Afterwards the Application Software Components are mapped to an ECU and their description is put into the corresponding ECU extract (deliverable Complete ECU Description). These activities belong to the system domain and are not explictly shown in this use case (see Methodology Overview).			
	connect the service Descriptions, including and the connectors to	As part of the ECU integration, additional artifacts are generated to connect the service ports over the RTE: Service Component Descriptions, including their mapping to the Basic Software Modules, and the connectors between their ports and the service ports of the Appplication Software Components.			
	The ECU configuration of the Basic Software Module (e.g. DEM, DCM, Watchdog Manager etc.) is then created with respect to the service ports and the SeviceNeeds of the Application Software Components connected to that Service.				
Relation Type	Related Element	Mul.	Note		
Aggregates	Add Service Ports and Service Needs	1			
Aggregates	Connect and Configure Service Module on ECU	1			

Table 2.40: Components and Services



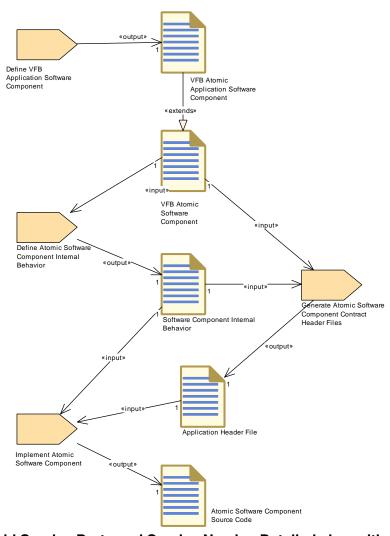


Figure 2.52: Add Service Ports and Service Needs - Detailed view with work products



Activity	Add Service Ports	and Ser	vice Needs	
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Components and Services			
Brief Description				
Description		Atomic Software Components can use AUTOSAR Services. In order to do so, two things have to be defined:		
	integration (th Software Com	The ports which are to be connected to the Service during ECU integration (this is a sub-task of Define VFB Application Software Component). The port interfaces used for service ports should be standardized.		
	symbolic nam the single Sof	 The needs to configure the Service (for example NvM blocks or symbolic names for diagnostic events) from the perspecive of the single Software Component (this is a sub-task of Define Atomic Software Component Internal Behavior) 		
	other port, so there i	The service ports have impact on the component API just like any other port, so there is no difference between service ports and "normal" ports with respect to API generation.		
Relation Type	Related Element	Mul.	Note	
Aggregates	Define Atomic Software Com- ponent Internal Behavior	1	Add Service Needs to Atomic Component:	
Aggregates	Define VFB Application Software Component	1	Add Service Ports to Atomic Software Component:	
Aggregates	Generate Atomic Software Com- ponent Contract Header Files	1	Re-generate Contract Header Files with Service Intefaces:	
Aggregates	Implement Atomic Software Compo- nent	1	Re-Implement Atomic Software Component with Service Ports:	

Table 2.41: Add Service Ports and Service Needs



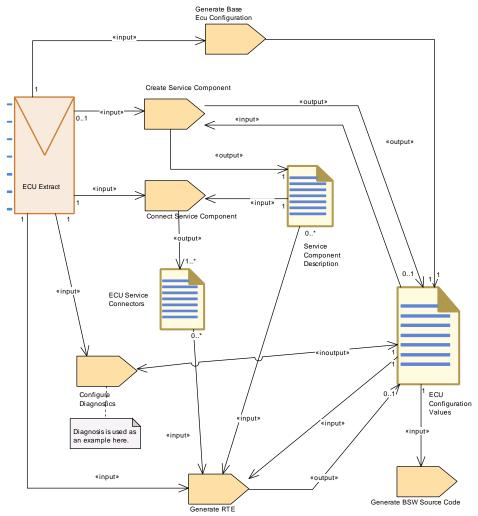


Figure 2.53: Connect and Configure Service Module on ECU - Detailed view with work products

Activity	Connect and Configure Service Module on ECU		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Components and Services		
Brief Description			
Description	As part of the ECU integration, additional artifacts are generated to connect the service ports over the RTE: Service Component Descriptions, including their mapping to the Basic Software Modules, and the connectors between their ports and the service ports of the Appplication Software Components. The ECU configuration of the Basic Software Module (e.g. DEM, DCM, Watchdog Manager etc.) is then created with respect to the service ports and the SeviceNeeds of the Application Software Components connected to that Service (the diagram shows only the configuration activity of diagnostics as an example). The code gneration of the service module (e.g. DEM, DCM) and of the RTE is shown for completeness.		
Relation Type	Related Element Mul. Note		



Relation Type	Related Element	Mul.	Note
Aggregates	Create Service Component	1	
Aggregates	Generate BSW Source Code	1	
Aggregates	Generate Base Ecu Configuration	1	
Aggregates	Generate RTE	1	
Predecessor	Add Service Ports and Service Needs	1	

Table 2.42: Connect and Configure Service Module on ECU

2.9 Calibration Overview

2.9.1 Purpose

This use case describes the typical activities required from the creation or update of calibration parameters down to the creation or update of the A2L Files.

2.9.2 Description

The use cases assumes, that calibration parameters are changed in an already existing system, thus the tasks required to define and build a new system are omitted, only the calibration relevant steps are shown.

In addition, the use case includes the (optional) task of updating a set of calibration parameter values as input for the RTE.

As far as AUTOSAR artifacts are involved, this use case can be divided into four major activities:

[TR_METH_02001] Define Cross-component Calibration Parameters activity \lceil Define Cross-component Calibration Parameters: Contains the tasks used to define or update cross-component calibration parameters. These parameters have to be provided via ports by Parameter Components. $|(RS_METH_00002)|$

[TR_METH_02002] Define Local Calibration Parameters activity [Define Local Calibration Parameters: Contains the tasks used to define or update component-local calibration parameters or calibration parameters defined within a BSW module. These parameters are declared within the Internal Behavior of the component (or the BSW module) which uses them.

[RS_METH_00002, RS_METH_00003]

[TR_METH_02003] Provide Unique Parameter Names activity | Provide Unique Parameter Names: Contains the tasks used to provide unique names for



calibration parameters. A Flat Map is used to provide unique names for MCD tools. An Alias Name Set can be provided additionally in cases, where this is not sufficient. |(RS_METH_00005)

[TR_METH_02004] Re-generate RTE and Calibration Support activity | Re-generate RTE and Calibration Support: Contains the tasks used to regenerate relevant artifacts during ECU integration (before the final build) after an update of calibration parameters. | (RS_METH_00020)

2.9.3 Workflow

Figure 2.54 shows the work sequence assumed for this use case.



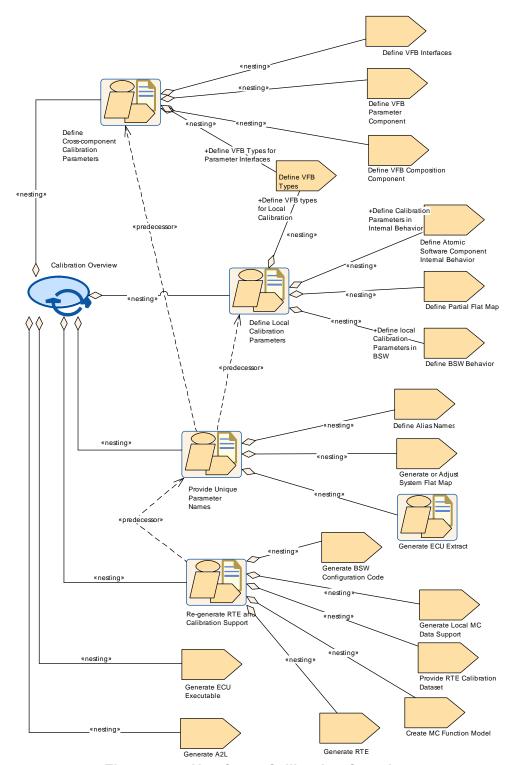


Figure 2.54: Use Case: Calibration Overview



Process Pattern	Calibration Overvie	Calibration Overview		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Calibration Overview			
Brief Description	Describe the require update of the A2L fil		to update the calibrations data down to an	
Description	This use case shows the typical steps required from an updated design of calibration data down to an update of the A2L file. The use cases assumes, that calibration parameters are changed in an already existing system, thus the steps required to define and build a new system are omitted, only the calibration relevant steps are shown. In addition, the use case includes the (optional) task of updating a set of calibration parameter values as input for the RTE.			
Relation Type	Related Element	Mul.	Note	
Aggregates	Define Cross- component Cali- bration Parameters	1		
Aggregates	Define Local Calibration Parameters	1		
Aggregates	Generate A2L	1		
Aggregates	Generate ECU Executable	1		
Aggregates	Provide Unique Parameter Names	1		
Aggregates	Re-generate RT E and Calibration Support	1		

Table 2.43: Calibration Overview

Activity	Define Cross-comp	onent (Calibration Parameters
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Calibration Overview		
Brief Description			
Description	Contains the tasks used to define or update cross-component calibration parameters. These parameters are provided by Parameter Components.		
Relation Type	Related Element	Mul.	Note
Aggregates	Define VFB Composition Component	1	
Aggregates	Define VFB Interfaces	1	
Aggregates	Define VFB Pa- rameter Compo- nent	1	
Aggregates	Define VFB Types	1	Define VFB Types for Parameter Interfaces: Use this task to define VFB Types for Parameter Interfaces

Table 2.44: Define Cross-component Calibration Parameters



Activity	Define Local Calibr	ation P	arameters
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Calibration Overview		
Brief Description			
Description	Contains the tasks used to define or update component-local (or module-local) calibration parameters. These parameters are declared within the Internal Behavior of the component (or BSW module) which uses them.		
Relation Type	Related Element	Mul.	Note
Aggregates	Define Atomic Software Com- ponent Internal Behavior	1	Define Calibration Parameters in Internal Behavior: Use this task to define local calibration parameters as part of the Internal Behavior of a software component.
Aggregates	Define BSW Behavior	1	Define local Calibration Parameters in BSW: Use this task to define local calibration parameters as part of the Internal Behavior of a BSW module.
Aggregates	Define Partial Flat Map	1	Define (optionally) a Partial Flat Map for one or more delivered components.
Aggregates	Define VFB Types	1	Define VFB types for Local Calibration: Use this task to define VFB types for Local Calibration.

Table 2.45: Define Local Calibration Parameters

Activity	Provide Unique Parameter Names		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Calibration Overview		
Brief Description			
Description	Contains the tasks used to provide unique names for calibration parameters. A Flat Map is used to provide unique names for MCD tools. An Alias Name Set can be provided in cases, where this is not sufficient.		
Relation Type	Related Element	Mul.	Note
Aggregates	Define Alias Names	1	
Aggregates	Generate ECU Extract	1	Use this activity to update the ECU Extract. This includes updating the ECU Flat Map if parameter names on ECU level have changed.
Aggregates	Generate or Adjust System Flat Map	1	Use this task if parameter names are defined on system level.
Predecessor	Define Cross- component Cali- bration Parameters	1	
Predecessor	Define Local Calibration Parameters	1	

Table 2.46: Provide Unique Parameter Names



Activity	Re-generate RTE and Calibration Support			
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Calibration Overview			
Brief Description				
Description	Contains the tasks used to re-generate relevant artifacts during ECU integration (before the final build) after an update of calibration parameters.			
Relation Type	Related Element	Mul.	Note	
Aggregates	Create MC Function Model	1	This use case shows the creation of an MC Function Model as part of the activity that generates also the RTE and calibration support data.	
			This is only one possibility. It is also possible to create an MC Function Model earlier in the process (as part of the design activities) or later (shortly before the A2L is generated).	
Aggregates	Generate BS W Configuration Code	1	Use this task to generate the description of calibration parameters in BSW that are a result of ECU configuration. Such parameters will be described within	
			the artifact BSW Module Behavior Extension.	
Aggregates	Generate Local M C Data Support	1	Use this task to generate support for calibration data that are not handled via the RTE.	
Aggregates	Generate RTE	1	Use this task to generate support for calibration data that are handled over the RTE.	
			This includes cross-component calibration as well as local calibration (in SWC and BSW) that needs emulation support by the RTE.	
Aggregates	Provide RTE Calibration Dataset	1		
Predecessor	Provide Unique Parameter Names	1		

Table 2.47: Re-generate RTE and Calibration Support

2.10 Memory Mapping

2.10.1 Purpose

This use case gives a comprehensive view on the tasks required to define, configure and generate header files for memory mapping and for the compiler abstraction related to memory aspects. The underlying concepts are specified in [11] and [12].



2.10.2 Description

[TR_METH_02005] Memory sections for data and code 「AUTOSAR basic software as well as application software use a standardized preprocessor mechanism in order to define memory sections for their data and code as well as compiler memory classes² defined globally or per section. The goal of this mechanism is to maintain the compiler specific statements and the ECU specific mappings separately from the main code. | (RS_METH_00002, RS_METH_00003, RS_METH_00004, RS_METH_00038)

With AUTOSAR it is possible to derive (i.e. generate) the content of these header files from XML artifacts. This use case shows how the required artifacts and tasks are related.

2.10.3 Workflow

Figure 2.55 shows the work sequence assumed for this use case. The next figures 2.56 and 2.57 show the involved tasks and work products of the method library.

Note that this use case ends with compilation of the code. The assignment of memory sections to the actual hardware (which is typically done by the configuration of the linker) is currently not considered to be part of the AUTOSAR methodology.

²This determines far and near addressing on certain platforms.



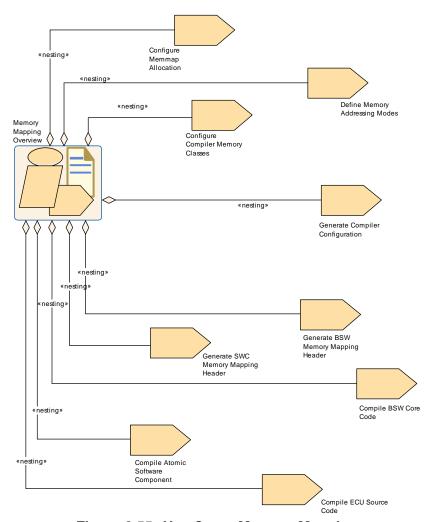


Figure 2.55: Use Case: Memory Mapping



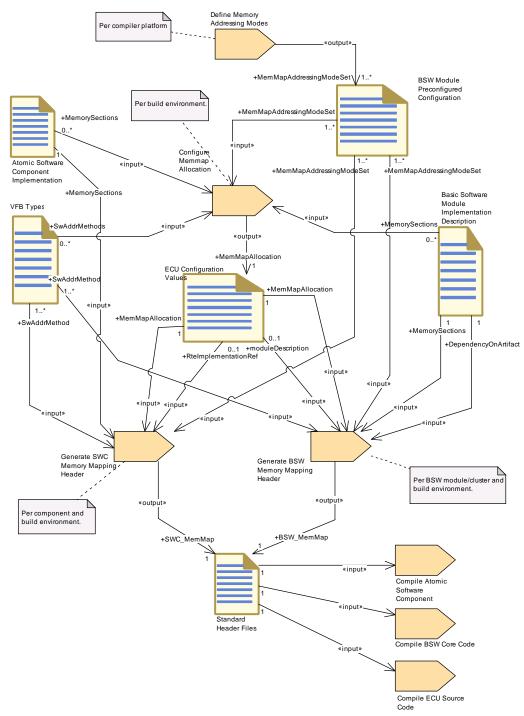


Figure 2.56: Memory Mapping - Detailed view with work products



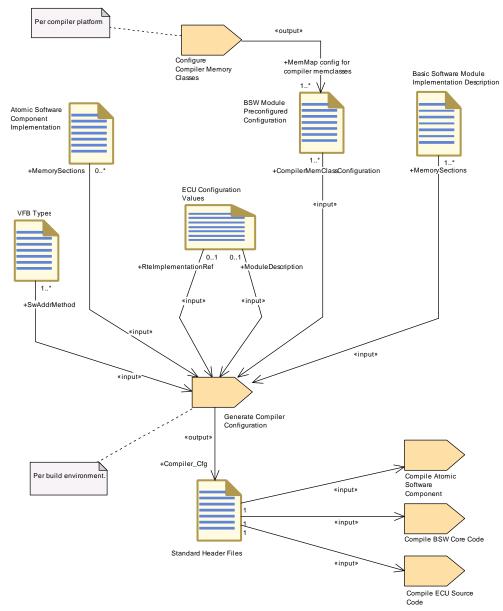


Figure 2.57: Compiler Configuration - Detailed view with work products

Activity	Memory Mapping Overview		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Memory Mapping Overview		
Brief Description			
Description	Overview of the work sequence for defining and configuration of memory sections.		
Relation Type	Related Element	Mul.	Note
Aggregates	Compile Atomic Software Component	1	
Aggregates	Compile BSW Core Code	1	

- AUTOSAR CONFIDENTIAL -



Relation Type	Related Element	Mul.	Note
Aggregates	Compile ECU Source Code	1	
Aggregates	Configure Compiler Memory Classes	1	
Aggregates	Configure Memmap Allocation	1	
Aggregates	Define Memory Addressing Modes	1	
Aggregates	Generate BSW Memory Mapping Header	1	
Aggregates	Generate Compiler Configuration	1	
Aggregates	Generate SWC Memory Mapping Header	1	

Table 2.48: Memory Mapping Overview

2.11 E2E Protection

2.11.1 Purpose

This Activity provides a rough outline of the creation of E2E Protection to secure communication flow in an AUTOSAR Architecture. [13]

2.11.2 Description

 $\tt E2E$ Protection mechanisms are needed when safety related data exchanges need to be protected at runtime against communication link faults.

[TR_METH_02006] E2E Protection | The E2E Protection in AUTOSAR is realized as an E2E Transformer Module [13] which is invoked by the RTE. First of all, the Serializer Transformer serializes the data and then the RTE invokes E2E Transformer to protect the communication. The software component communicates through RTE using the plain RTE API. |(RS METH 00005)

[TR_METH_01153] Configuration and Generation of the E2E Transformer | According to the generic transformer approach, the E2E Transformer can be configured at the system level (Inter-ECU communication). The generation of the E2E Transformer module is done based on the System Description. No ECU configuration is needed. | (RS_METH_00005)



[TR_METH_01154] Define E2E Transformer Technology Task [The task Define E2E Transformer Technology is needed to define all information required for the generation of the E2E transformer module like pre-defined Profiles and state machine configuration.] (RS_METH_00005)

2.11.3 Workflow

Figure 2.58 shows the Define E2E Transformer Technology task which is mainly processed in the activity Design Communication.




Figure 2.58: Task Define E2E Transformer Technology

2.12 Diagnostic Extract

2.12.1 Purpose

This use case provides a rough outline of the diagnostics configuration using the Diagnostic Extract Template [14]. The involved activities and deliverables will be refined based on the experience in the field in next AUTOSAR releases.

2.12.2 Description

The distributed nature of an AUTOSAR ECU development requires an optimized capturing of information. In particular, diagnostic information (i.e. DEM and DCM configuration) shall be captured only once by the person with the best knowledge and therefore being able to take responsibility better than one centralized individual. ECU configuration is not suitable to be exchanged between partners in an ECU development project. Therefore, AUTOSAR defines the Diagnostic Extract Template that represents a standardized exchange format on diagnostic functionality. The Diagnostic Extract Template allows the decentralized configuration of diagnostic aspects. The basic usage of the Diagnostic Extract Template is the exchange of diagnostic data between the different



parties involved in the diagnostic development process to allow the configuration of the DCM and the DEM and to provide the description of corresponding application interfaces to implement diagnostic services and fault handling. In the AUTOSAR Methodology the Diagnostic Extract is represented by the deliverable Diagnostic Extract and its sub-deliverables.

[TR_METH_01136] Content of Diagnostic Extract [The deliverable Diagnostic Extract contains all relevant diagnostics aspects.

- Diagnostic Services (e.g. IOControl, MemoryByAddress)
- Diagnostic Event Handling (e.g. events, trouble codes, conditions)
- Mappings (Service Mappings, Diagnostic Mappings, etc.)

(RS METH 00082)

[TR_METH_01137] Diagnostic Extract category \ Depending on the phase in the process, the Diagnostic Extract can have several categories that are represented as specialized deliverables:

- Diagnostic Abstract System Description: This deliverable represents a high-level definition that can be taken as a template for creating concrete Diagnostic System Extracts or Diagnostic ECU Extracts.
- Diagnostic System Extract: This deliverable represents the diagnostic aspects for several ECUs.
- Diagnostic ECU Extract: This deliverable represents the diagnostic aspects for a single ECUs.

(RS_METH_00082)

[TR_METH_01138] Decentralized configuration [The timing and frequency of exchanges and the content in each of these exchanged files is highly dependent on the individual project setup and situation. The Diagnostic Extract Template has been designed to support the decentralized and independent definition of diagnostic requirements that can be linked together at a late point during the development process. The approach of decentralized configuration is met in the Diagnostic Extract Template mainly in two ways:

- Separation of elements over several physical files: Most elements of the Diagnostic Extract template can be split over several physical files. Therefore, parts of these elements (e.g. certain attributes) can be defined by, for example, an OEM and other parts of these elements by, for example, an ECU supplier.
- Usage of self-contained mappings: Many diagnostic requirements are established by mappings between diagnostic elements (e.g., DTC to DemEvent mapping). However, the "'decentralized configuration" approach requires that these mappings can be flexibly defined at almost any time within the ECU development process and by any of the involved companies respectively roles. Therefore, the Diagnostic Extract Template defines self-contained mapping elements that have



references to two (or potentially more) diagnostic elements to define a mapping. The usage of the Diagnostic Extract Template will be restricted by the appropriate application of the "'roles and rights" concepts in next AUTOSAR releases.

(RS METH 00082)

[TR_METH_01139] Roles [The relevant activities of the Diagnostic Extract use case are logically grouped to the following roles (see diagram 2.60): Diagnostic Requester, Software Developer and Diagnostic Integrator. Obviously, the OEM acts as a diagnostic requester and the ECU supplier as the diagnostic integrator. Nevertheless, in several situations (e.g. in-house development of application software components), the OEM may act as the diagnostic integrator and performs collecting and merging tasks. | (RS METH 00082)

[TR_METH_01140] Develop Diagnostic Abstract System Description activity [The basic workflow for the configuration of the diagnostic aspects may start with the optional activity Develop Diagnostic Abstract System Description. This activity defines diagnostic requirements at abstract level. The resulting Diagnostic Abstract System Description may be used by the following activity as a basis for the Diagnostic System Extract or the Diagnostic ECU Extract. | (RS_METH_00082)

[TR_METH_01141] Development of diagnostic requirements | In the activity Develop Diagnostic Requirements the requester of diagnostic data defines the diagnostic interfaces of one or multiple ECUs. The following tasks may be performed:

- Define the values of the DTCs
- Define the UDS services and sub-services supported by the ECUs
- Define the required events needed by a specific composition implemented by an Application Developer

During this activity, several Develop Diagnostic Requirements from different parties may be collected and merged. | (RS_METH_00082)

[TR_METH_01142] Diagnostic information in the context of SW-C development [The purpose of the Diagnostic Extract during the development of software components is basically twofold: On the one side the Diagnostic System Extract may serve as a requirement for the software developer. The diagnostic requester can specify e.g. the following issues:

- Definition of the content of a specific ReadDataByldentifier which has to be implemented by a specific SW-C
- Definition of the events needed for a certain SW-C

On the other side the application developer has the possibility to provide diagnostic information relevant to the SW-Cs as a part of the <code>Diagnostic</code> System Extract and/or using Service Needs. The Service Needs within the SW-C Description are still to be used along with the <code>Diagnostic</code> System Extract in order to annotate the



SW-C ports which are relevant for further mapping and handling as defined by the Diagnostic System Extract. | (RS_METH_00082)

[TR_METH_01143] Integration of diagnostic information [In activity Integrate Diagnostic Information, the integrator receives one or several Diagnostic System Extracts (or Diagnostic ECU Extracts) from the diagnostic requester and from multiple application software or basic software developers. The main goal of the integration activity is to integrate and merge all delivered Diagnostic Extracts so that the configuration of the corresponding basic software modules (DCM, DEM) can be generated (activity Integrate Software for ECU).

Since the AUTOSAR Methodology does not restrict the definition of elements like DIDs, parameters of a UDS service, Events, Sessions, etc. in activity Integrate Diagnostic Information the integrator has to ensure that the complete information is still valid after merging it. Usually, the following task may be performed:

- Mapping of DTCs (Diagnostic Trouble Code) to events
- · Merge of events
- Mapping of services

During the integration activity the following issues and conflicts may be considered:

- Some DTCs may already be mapped to events especially in cases where both come from the same party. But if the DTCs are defined by the OEM and the software components are implemented by other supplier acting as an application developer the integrator has to ensure that both are mapped together.
- In some cases, an diagnostic event may be defined multiple times. An diagnostic requester defines the events which shall be implemented by an application developer. A supplier implements a software component which will be used in multiple projects and which also detects this type of error and also defines this same event. Both events may have different naming but the same meaning. The integrator has to detect this redundancy during the integration and merge them together.
- The diagnostic requester requires a specific ReadDataByIdentifier and an application developer implements it. If the implementation is performed for one specific project only, the application developer may map the DID from the diagnostic requester to the already defined job in their software component. In other cases in which the application developer implements a generic diagnostic job, it will be a task of the diagnostic integrator to merge this information and to map the jobs to the corresponding DID.

(RS METH 00082)

After all issues and conflicts are resolved and the inputs are merged, the final complete Diagnostic ECU Extract is produced. Based on this deliverable, the initial configuration of the relevant basic software modules is generated (activity Integrate Software for ECU).



2.12.3 Workflow

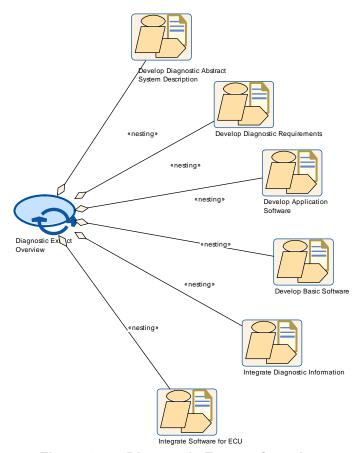


Figure 2.59: Diagnostic Extract Overview



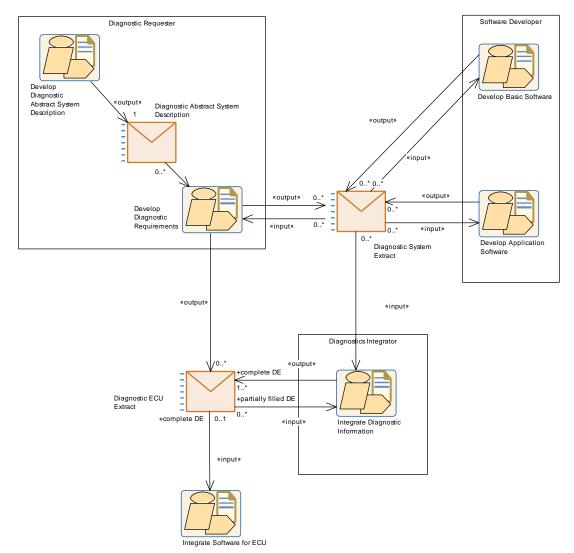


Figure 2.60: Diagnostic Extract Workflow




Figure 2.61: Diagnostic Extract Deliverables



Process Pattern	Diagnostic Extract	Overvi	ew
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Diagnostic Extract Overview		
Brief Description			
Description			
Relation Type	Related Element	Mul.	Note
Aggregates	Develop Application Software	1	
Aggregates	Develop Basic Software	1	
Aggregates	Develop Diagnos- tic Abstract System Description	1	
Aggregates	Develop Diagnos- tic Requirements	1	
Aggregates	Integrate Diagnos- tic Information	1	
Aggregates	Integrate Software for ECU	1	

Table 2.49: Diagnostic Extract Overview

Activity	Develop Diagnostic	Develop Diagnostic Abstract System Description		
Package		AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Diagnostic Extract Overview		
Brief Description				
Description	level. The resulting I used by the following	This activity defines diagnostic requirements at functional/abstract level. The resulting Diagnostic Abstract System Description may be used by the following activity as a basis for the Diagnostic System Extract or the Diagnostic ECU Extract.		
Relation Type	Related Element Mul. Note		Note	
Produces	Diagnostic Ab- stract System Description	1		

Table 2.50: Develop Diagnostic Abstract System Description



Activity	Develop Diagnostic	Requi	rements	
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Diagnostic Extract Overview			
Brief Description				
Description	interfaces of one or i	In this activity the OEM or diagnostic requirer defines the diagnostic interfaces of one or multiple ECUs. It may also define some InternalBehaviors as requirements for the ECU-Supplier or application developer.		
	The following tasks r	nay be r	relevant:	
	Define the val	ues of th	ne DTCs	
	Define the UE ECUs	 Define the UDS services and sub-services supported by the ECUs 		
		Define the required events needed by a specific composition		
		s as wel	Iso collect Diagnostic Extracts from I as from SW-C developers and merge the stic Extract.	
Relation Type	Related Element	Mul.	Note	
	Diagnostic Ab- stract System Description	0*		
Consumes	Diagnostic System Extract	0*		
Produces	Diagnostic ECU Extract	0*		
Produces	Diagnostic System Extract	0*		

Table 2.51: Develop Diagnostic Requirements

Activity	Integrate Diagnostic Information		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Diagnostic Extract Overview		
Brief Description			
Description	The main goal of this activity is to integrate all parts of the Diagnostic Description received from the OEM and from the application developer. Based on the complete Diagnostic Extract the initial ECUC can be generated.		
Relation Type	Related Element	Mul.	Note
Consumes	Diagnostic ECU Extract	0*	partially filled DE:
Consumes	Diagnostic System Extract	0*	
Produces	Diagnostic ECU Extract	1*	complete DE:

Table 2.52: Integrate Diagnostic Information



2.13 Rapid Prototyping

2.13.1 Purpose

This use case describes usual activities to enable rapid prototyping in AUTOSAR.

2.13.2 Description

Rapid prototyping can be used during electronic control unit development to evaluate and test new software control algorithms for various functions.

With Fullpass technology the original ECU is totally replaced by a Rapid Prototyping Unit (RPU). With Bypass technology the original ECU and software stays in the control loop to supports the majority of the control algorithms and interface with sensors, actuators and communication buses: only the specific control algorithm that shall be prototyped is deported into the RPU (external bypass) or even directly executed in the original ECU (internal bypass). Bypass mainly consists in replacing at run time inputs and/or outputs of the original software algorithms by value computed by the prototype algorithm under test.

[TR_METH_01132] Definition of a Rapid Prototyping Scenario [In order to enable rapid prototyping, first of all the initial Rapid Prototyping Scenario is defined (task Define Rapid Prototyping Scenario). After the generation of the ECU Extract the ECU Extract of Rapid Prototyping Scenario should be refined to achieve a complete rapid prototyping scenario (task Refine Rapid Prototyping Scenario). | (RS_METH_00002)

[TR_METH_01133] Content of Rapid Prototyping Scenario artifact [A RPT Scenario consist out of two main aspects: The description of the bypass points and the relation to a hook. A bypass point describes the required preparation of the host ECU. At a bypass point the host ECU shall be capable to communicate with a RPT system in order to support the execution of the rapid prototyping algorithms with the original data calculated by the host system and to replace dedicated results of the host system by the results of the rapid prototyping algorithm. The hook represents the link between a bypass point and the rapid prototyping algorithm.

Obviously, the bypass point and the hook reference aspects like parameterAccess (dataWriteAccess, dataReadAccess, dataSendPoint, dataReceivePointByValue, dataReceivePointByArgument, writtenLocalVariable, readLocalVariable). For more details see SW-C Template [5] (constr_2055). \(\left(RS_METH_00002 \)

Currently, AUTOSAR supports two approaches for Rapid Prototyping: Component wrapper method and direct buffer access method.

[TR_METH_01134] Component wrapper method [The component wrapper method consists in wrapping the original software component implementation with an integration code (Rapid Prototyping Wrapper Header File and Rapid Prototyping Wrapper Source Code) that implements the bypass. With this method the in-



tegration code is able to take the control of the AUTOSAR interfaces of the software component because there is no more direct call between RTE and the SW-C but everything go through the integration code.

In order to use this method, the RTE has to be configured properly (task Configure RTE, for configuration details see AUTOSAR_SWS_RTE [15], section 4.9.2). Furthermore, based on the complete ECU Extract of Rapid Prototyping Scenario artifact the corresponding wrapper code has to be generated and compiled (activity Encapsulate SW-C). Depending on the development strategy the wrapper code generation may be processed in different stages of the development process.

The RTE supports the component wrapper method by generating the SW-C interfaces with a c-namespace including an additional [Byps_] infix for the bypassed SW-C (task Generate RTE, for details see AUTOSAR_SWS_RTE [15], section 4.9.2). | (RS METH 00006)

[TR_METH_01135] Direct buffer access method | The direct buffer access method provides runtime direct read and write access to the RTE buffers that implement the ECU communication infrastructure. If the direct buffer access method for bypass support is enabled for a software component type, the Generate RTE task produces RTE Measurement and Calibration Support Data with mcDataAccessDetails for each preemption area specific buffer that implements the implicit communication for this software component type (For details see AUTOSAR_SWS_RTE [15], section 4.9.3). For this method no wrapper code has to be generated. | (RS METH 00006)

2.13.3 Workflow

Figure 2.62 shows the work sequence for this use case.



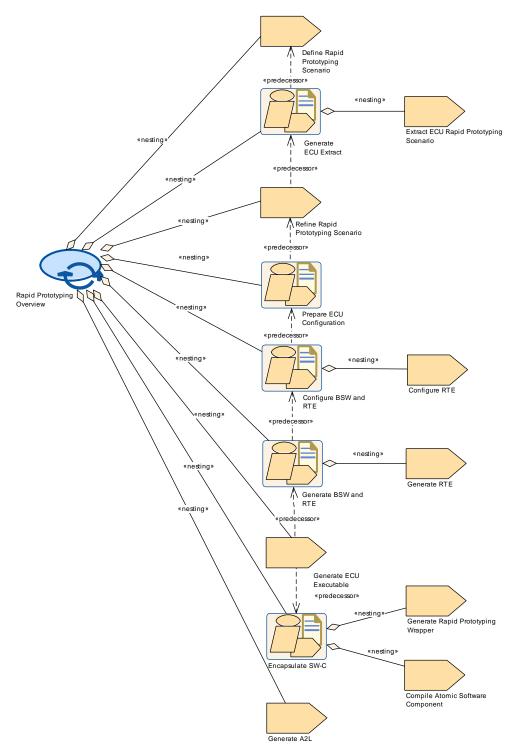


Figure 2.62: Rapid Prototyping Overview



Process Pattern	Rapid Prototyping	Overvie	w
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Rapid Prototyping Overview		
Brief Description			
Description	This use case shows the typical steps required from an updated rapid prototyping scenario down to an update of the generated RTE and the produced A2L file. The use cases assumes, that rapid prototyping scenario is changed in an already existing system, thus the steps required to define and build a new system are omitted, only the calibration relevant steps are shown. In addition, the use case includes the (optional) task of updating a set of calibration parameter values as input for the RTE.		
Relation Type	Related Element	Mul.	Note
Aggregates	Configure BSW and RTE	1	
Aggregates	Define Rapid Prototyping Scenario	1	
Aggregates	Encapsulate SW-C	1	
Aggregates	Generate A2L	1	
Aggregates	Generate BSW and RTE	1	
Aggregates	Generate ECU Executable	1	
Aggregates	Generate ECU Extract	1	
Aggregates	Prepare ECU Configuration	1	
Aggregates	Refine Rapid Prototyping Scenario	1	

Table 2.53: Rapid Prototyping Overview

Activity	Encapsulate SW-C		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Rapid Prototyping Overview		
Brief Description			
Description	During this activity the Prototyping Scenario	Encapsulate the software component to enable rapid prototyping. During this activity the wrapper code is generated based on the Rapid Prototyping Scenario and the software component is compiled and linked with the generated wrapper.	
Relation Type	Related Element	Related Element Mul. Note	
Aggregates	Compile Atomic Software Compo- nent	1	
Aggregates	Generate Rapid Prototyping Wrap- per	1	

Table 2.54: Encapsulate SW-C



2.14 Safety Extensions

2.14.1 Purpose

This use case provides an overview of the usage of the Safety Extensions (see [16]).

2.14.2 Description

ISO 26262 [17] is the applicable standard for functional safety of electronic and software based systems in road vehicles which impacts almost all development activities, including software specifications, design and implementation. The Safety Extensions enable a standardized exchange of the safety information in an AUTOSAR context and provide the basis for consistent management as required by ISO 26262. The additional safety related information can be used e.g. for generation of the documentation or the checking of ASIL constraints (w.r.t. allocation, mapping, decomposition and hierarchy), which are prescribed by the ISO 26262. The AUTOSAR Methodology focuses on the creation and refinement of the information. The corresponding analysis is out of scope of this document.

According to the ISO 26262, the Safety Extensions provide the following means to express safety information (for more details see TPS SafetyExtension [16]):

- Safety Requirements (Artifact Safety Requirement)
- Safety Measures (Artifact Safety Measure)
- Safety integrity levels: attribute of Safety Requirement, Safety Measure and any AUTOSAR element
- Decomposition of Safety Requirements: reference between the original and the decomposed requirement (Task Decompose Safety Requirement)
- Refinement of Safety Requirements: reference between the original and the refined requirement (Task Refine Safety Requirement)
- Allocation of Safety Requirements: reference between of Safety Requirement and an AUTOSAR element (Task Allocate Safety Requirement)
- Allocation of Safety Measures: reference between Safety Measure and an AUTOSAR element (Task Allocate Safety Measure)
- Mapping between Safety Requirements and Safety Measures (Task Map Safety Requirement to Safety Measure)
- Independence relation between Safety Requirements (Task Add Independence Relation)

The safety relevant information can be exchanged independently and are therefore consolidated in a separate deliverable Safety Extensions.



[TR_METH_01144] Activity Define Safety Information | The activity Define Safety Information (see Figure 2.63) represents a generic pattern for defining safety relevant information. The safety extensions are not restricted to specific AUTOSAR elements so that safety relevant information can be added and modified in several stages of the AUTOSAR Methodology in an iterative way. Thus, the AUTOSAR elements consumed by some of the nested tasks are modeled using the General Autosar Artifact. The AUTOSAR Methodology does not prescribe an explicit execution order of the tasks. The only restrictions with respect to the execution order are given by the input and output relations (E.g. obviously, before a Safety Requirement can be decomposed, it has to be defined). | (RS METH 00081)

[TR_METH_01145] Creation of Safety Requirements | Naturally, the process starts with the task Define Safety Requirement. This task creates a Safety Requirement and assigns the required attributes such as ASIL. The top level Safety Requirement is a safety goal and obviously results from the hazard analysis and risk assessment. If Safety Requirements are not detailed enough to allocate them directly to appropriate AUTOSAR elements, it is necessary to refine them first (task Refine Safety Requirement). The refinement will add new Safety Requirements which are in a hierarchy relation to existing Safety Requirements. The ASIL is maintained as attribute at each safety goal and inherited consistently through the subsequent levels of functional safety requirements (as part of the Functional Safety Concept) and technical safety requirements (as part of the Technical Safety Concept). The latter will be refined into SW and HW safety requirements. | (RS_METH_00081)

[TR_METH_01146] Allocation of Safety Requirements [Each Safety Requirement must be allocated properly to an element of the system architecture, i.e. component, HW, SW or both (HW and SW). Hence, an AUTOSAR element might receive an ASIL which indicates that it is in the scope of an ISO 26262 development. The allocation is done by task Allocate Safety Requirement. If safety requirements are not available or will not be exchanged together with a specification, the AUTOSAR implementation must at least be aware that the element is used in a safety context. Hence, the task Define ASIL For AUTOSAR Element directly assigns the ASIL attribute to an AUTOSAR element (independent of an allocation). Especially in cases of a SEooC (Safety Element out of Context) development, where the safety requirements are not fully known at development time, the ASIL attribute supports the integration and verification of such parts in a later stage of development by matching the assumptions against the finalized safety requirements. |(RS_METH_00081)

[TR_METH_01147] Decomposition of Safety Requirements [In order to tailor the ASIL of Safety Requirements, ASIL decomposition may be applied. The decomposition is done by task Decompose Safety Requirement. According to the ISO 26262 a requirement can be decomposed into two requirements. In the context of ASIL decomposition the independence (freedom of interference) for the resulting requirements has to be demonstrated (Task Add Independence Relation). | (RS METH 00081)

[TR_METH_01148] Definition of Safety Measures [Safety of a system is achieved by means of safety measures that are applied at various stages of the development pro-



cess and safety mechanisms which are implemented in a number of technologies into the system. Safety measures and safety mechanisms are represented by the artifact Safety Measure which is created by the task Define Safety Measure. In task Allocate Safety Measure the Safety Measures which are safety mechanisms realized in AUTOSAR are allocated to AUTOSAR elements in order to describe what elements are involved in the provision of a safety measure. The task Map Safety Requirement to Safety Measure creates a mapping between the Safety Measure and the Safety Requirement. | (RS_METH_00081)

The following specialized activities demonstrate the usage of the Safety Extensions in different development stages and are integrated into the corresponding use cases:

- Define VFB Safety Information
- Define Software Component Safety Information
- Define System Safety Information

2.14.3 Workflow

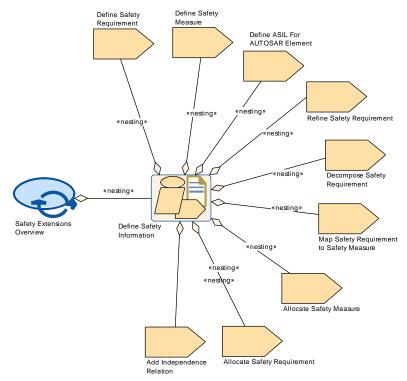


Figure 2.63: Safety Extensions Overview



Process Pattern	Safety Extensions	Overvie	w
Package		AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Safety Extensions Overview	
Brief Description			
Description			
Relation Type	Related Element	Mul.	Note
Aggregates	Define Safety Information	1	

Table 2.55: Safety Extensions Overview

Activity	Define Safety Infor	mation		
Package	AUTOSAR Root::M2::Methodology::Methodology Use Cases::High Level::Safety Extensions Overview			
Brief Description	Defines all required	safety in	formation.	
Description	information. The saf AUTOSAR elements and modified in seve the AUTOSAR elements	This activity represents a generic pattern for defining safety relevant information. The safety extensions are not restricted to specific AUTOSAR elements so that safety relevant information can be added and modified in several stages of the AUTOSAR Methodology. Thus, the AUTOSAR elements consumed by some of the nested tasks are modeled using the "General Autosar Artifact".		
Extended by	Define Software Cor Information, Define		Safety Information, Define System Safety ety Information	
Relation Type	Related Element	Mul.	Note	
Aggregates	Add Independence Relation	1		
Aggregates	Allocate Safety Measure	1		
Aggregates	Allocate Safety Requirement	1		
Aggregates	Decompose Safety Requirement	1		
Aggregates	Define ASIL For A UTOSAR Element	1		
Aggregates	Define Safety Measure	1		
Aggregates	Define Safety Requirement	1		
Aggregates	Map Safety Requirement to Safety Measure	1		
Aggregates	Refine Safety Requirement	1		

Table 2.56: Define Safety Information



2.15 Variant Handling

2.15.1 Overview

[TR_METH_02009] Variation points in Variant Handling \[\text{Variant Handling for AUTOSAR is defined in the Generic Structure Template Template [18]. First, this concept defines means to designate certain locations in the AUTOSAR meta-model as *variation points*. A point roughly consists of a condition (under which conditions is this variation active?) and a binding time (when should this variation be resolved?). \(\) ()

Second, there are predefined variants.

[TR_METH_02010] Predefined variants in Variant Handling A typical AUTOSAR model may contain a large number of variation points. However, usually only a relatively small number of variants (i.e., combinations of "active" variation points) is actively used. Each predefined variant describes such a variant. | ()

2.15.2 Binding Times

[TR_METH_02011] Types of binding times [The AUTOSAR variant handling defines two kinds of binding times for AUTOSAR: the *latest binding time* and the *actual binding time*. They have the same kinds of values³, but are used in different contexts. |(RS_METH_00074)

AUTOSAR defines the following binding times (presented here in chronological order):

- BlueprintDerivationTime
- SystemDesignTime
- CodeGenerationTime
- PreCompileTime
- LinkTime
- PostBuild

The Generic Structure Template mentions two more binding times. First, there is FunctionDesignTime, which comes before SystemDesignTime, but is independent of BluePrintDerivationTime. Second, there is Runtime, which comes after PostBuild. These binding times are not covered by AUTOSAR and mentioned here only for completeness.

[TR_METH_02012] Definition of a binding time
☐ It should also be noted that a binding "time" is not really a point in time, but rather denotes a phase in the development of an AUTOSAR system. | (RS_METH_00074)

³BlueprintDerivationTime and PostBuild are not part of the actual enum that is used in the meta-model, but they are implied by the structure of the variation point. See chapter 7 in the Generic Structure Template [18] are more details.



2.15.2.1 Latest Binding Time

[TR_METH_02013] Latest Binding Time [In the AUTOSAR meta model, every variation point has a latest binding time, which is implemented by the tag Vh.LatestBindingTime. As the name suggests, the latest binding time of a particular variation point puts an upper limit on when this point can be bound. A variation may be bound earlier than this time, but not later. | (RS_METH_00074)

For example, the latest binding time for a software component which is part of a composition is PostBuild. In other words, an ECU can be configured to decide at startup whether a software component is active or not.

However, it is not always possible to bind a variant at the latest *possible* time. To continue the above example, making all software components <code>PostBuild</code> means that an executable always contains code and other resources for all software components, regardless whether it gets activated or not. Because of this, it may happen that the executable becomes too large to fit onto its designated ECU. If this is the case, the software component needs to be bound earlier, typically at PreCompileTime or even at SystemDesignTime.

This is not the only scenario that leads to this decision. For example, a software component might contain two or more subcomponents each of which is specific to a certain vendor. In this case, before delivering the software component to a specific vendor, it is custom to remove the subcomponents that are targeted at the other vendor(s). This can obviously be done at PrecompileTime the latest.

There are also cases where there is an implicit (i.e., not stated of the meta-model) lower limit for the binding time of a variation point. For example, if a variant in software component A uses a variant in software component B, then the binding times need to be coordinated. Component A cannot be SystemDesignTime if component B is PostBuild, but makes use of software component A.

2.15.2.2 Actual Binding Time

[TR_METH_02014] Actual Binding Time \(\) This brings us to the actual binding time of a variation point, which is stored in an attribute⁴ of the variation point. Again, it is not mandatory that the variation point is bound exactly at this stage; it rather states that the variation point must not be bound at a later stage.

This binding time may be earlier than the latest binding time. | (RS METH 00074)

As explained in the previous section, composition of software components can be bound at PostBuild, but it is not always desirable or even feasible to do so. In such a case. bindingTime should state an earlier binding time.

⁴The attribute is named bindingTime and is located at the ConditionByformula element of a variation point. For an AttributeValueVariationPoint, it is contained in the attribute binding—Time.



Also, unlike the latest binding time, which is a *meta model* element and is stated on M2 level, this binding time is a *model* element associated with a variation point and is stated on M1 level.

That is, the binding time of a variation point limits the point at which a *particular* variation point has to be bound, but this binding time is again constrained by the *latest binding time*.

2.15.3 Defining Variants

[TR_METH_02015] Definition of variants [A variant is almost always more than a single variant point or a single system constant. Typically, a variant is a list of value assignments to system constants or postbuild variant conditions. In an AUTOSAR model, such a list is represented by an instance of the meta-class PredefinedVariant, see definition of artifact Predefined Variant. | (RS METH 00005)

[TR_METH_02016] Evaluated Variant Set [Similarly, an instance of the metaclass EvaluatedVariantSet is a set of PredefinedVariants that are known to work (or not to work) for a certain element of the meta-model, for example a specific software component. Evaluated variants may be used to exchange information about known variants between different vendors, for example to document which variants of a software component have been tested and are known to work.

In the Methodology SPEM model, the variant selectors are represented by the Evaluated Variant Set artifact which is created by the Evaluate Variant task. | (RS_METH_00005, RS_METH_00075, RS_METH_00076)

This information is necessary because there is a extremely high number of *possible* variants, but only a very small subset of them are feasible.

[TR_METH_02017] Use of Predefined Variant [The set of system constants that are contained in an instance of PredefinedVariant usually affect a number of variation points, which are at different locations in the model and have different binding times.

Hence, a predefined variant cannot be directly associated with a specific location in the meta-model, or a certain binding time. On the contrary, a Predefined-Variant is used for several meta-model elements and at different binding times. | (RS_METH_00005, RS_METH_00076)

2.15.4 Choosing Variants

Whether a variation point is included in a system or not is determined by one or more variables. If the binding time of a variation point is anywhere from <code>SystemDesignTime</code> to <code>LinkTime</code>, then the variation point contains an expression that is based on system constants (see artifact <code>System Constant Value Set</code>). If this expression evaluates to true, then the variation point is included in the system. <code>PostBuild</code> uses a simplified



scheme that allows only a single comparison with a PostBuildVariantCriterion (technically, an ARElement).

[TR_METH_02018] Choosing variants \lceil So, a variant is *chosen* as soon as the values for the respective system constants or postbuild variant conditions have been determined. This is usually done by selecting a PredefinedVariant, which contains the respective values. This selection must obviously happen before a variation point is bound. But, it does not need to happen *immediately* before a variation point is bound. \rfloor (RS_METH_00005)

For example, the system constants that determine a PreCompileTime variation point may already have been chosen at SystemDesignTime, but the actual binding has to be delayed to PreCompileTime because of a dependency on another software components that have the binding time PreCompileTime, as described in Section 2.15.2.2.

Furthermore, since PredefinedVariant spans several variation points, which may have different binding times, some might have a binding time (latest or even actual) immediately after the PredefinedVariant has been chosen, and the others might have a later binding time.

Finally, the decision to go for a particular variant is often tied to vendor specific processes that follow their own timeline.

Hence, the time at which a particular variant is chosen is often not the same as the time when the associated variation points are bound. In summary, a variant must be chosen some time before it is bound, but the actual time when this is happening is not determined by AUTOSAR, and is also quite vendor specific.

2.16 Definition of Binding Times

2.16.1 Overview

A binding time is not (as the name probably suggests) a precise point in time, but rather a classification of processing steps. For example, the binding time <code>CodeGener-ationTime</code> refers to a transformation step from an *AUTOSAR model* in <code>ARXML</code> format to *code*.

In this section, we define binding times for artifacts and tasks in the methodology.

[TR_METH_00001] Definition of Binding Time for Tasks \lceil A task has binding time X if it binds variation points of binding time X.

This means in particular:

• Any task that works on the model *may* bind variation points that have the binding time SystemDesignTime.



- Any task that *generates* code needs to bind open variation points that have the binding time CodeGenerationTime. All variation points with earlier binding times must have been bound by then.
- Similarly, any task that *compiles* code needs to bind open variation points that have the binding time PreCompileTime.⁵ All variation points with earlier binding times must have been bound by then.

At this time, the *values* for PostBuildVariantConditions of variation points must also be bound. These values have a latest binding time of PreCompile-Time⁶.

In all these cases, the system constants that are needed by the condition of a variation point obviously must be defined before the variation point is bound.

In the Methodology library, the binding time of a task is indicated by a value of the tag Meth.bindingTime for those tasks which always can be associated with this binding time. It is not indicated for tasks that only optionally bind variations. This typically is the case for all tasks that only work on the ARXML model, for example, it is up to the concrete process whether a task like Extract ECU Topology shall bind any variations. | (RS METH 00074, RS METH 00075)

[TR_METH_00002] Definition of Binding Time for Artifacts \lceil In an artifact with binding time X, all variation points up to binding time X shall be bound.

We do not denote such a binding time for artifacts in the Methodology library, because their binding time typically depends on the context. However, this definition could be used to assign a binding time to an artifact as part of a specific use case. $|(RS_METH_00074)|$

[TR_METH_00003] Definition of Binding Time for Artifacts in the context of particular tasks \lceil If an artifact of binding time X is used as input or output of a particular task, then all variation points *related to that task* with binding time up to X shall be bound.

This in particular means that if the artifact is input to the task, then binding time variation points X shall be bound and the task relies on this.

If the artifact is output to the task, it is granted that the such created artifact has all variation points of binding time X bound.

In the Methodology library, this is indicated by a value of the tag Meth.bindingTime attached to a Consumes/ConsumedBy resp. Produces/ProducedBy relationship.

⁵Note that in case of the RTE code, the technical step of binding PreCompileTime variants is partially done by a preparatory task which runs before the actual compilation, see Generate RTE Prebuild Dataset. That means in particular, the relevant system constants must be defined before executing this preparatory task. The binding time of actual compilation task Compile ECU Source Code is indicated as CompileTime in this case.

⁶The variation point is still PostBuild: the PostBuildVariantCondition is fixed at PreCompile-Time, but the comparison with the associated PostBuildVariantCriterion occurs at PostBuild-VariantCriterion. See the Generic Structure Template [18] for details



Note that the tag Meth.bindingTime is not applicable to inout relationships, as the binding time values according to the above definition are usually different for the inputs and outputs of a particular task. If it is important to express these binding times, the inout relation must be split into an input (i.e. ConsumedBy) and output (i.e. Produces) relation.](RS_METH_00074)

Figure 2.64 presents an overview of binding times as used in the AUTOSAR methodology. Boxed elements in this figure correspond to binding times, and the connections between them characterize artifacts.

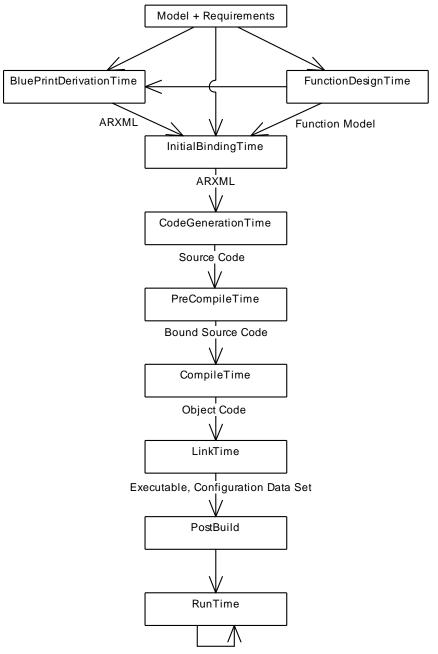


Figure 2.64: Overview of Binding Times



2.16.2 A Classification of Artifacts with respect to Binding Times

- **Model, Requirements, Functional Model** These refer to models that are not an *AUTOSAR Model*. For example, a *Model* may be a Matlab/Simulink model or a requirements document.
- **ARXML** An *ARXML* artifact is a XML document that conforms to the AUTOSAR XML schema.
- **Source Code** A *Source Code* artifact is text written using the syntax of a programming language, for example such as C or C++.

Source Code may be generated by hand, or may be the output of a code generator.

- **Bound Source Code** A *Bound Source Code* artifact contains source code without any unbound precompile variation points.
- **Object Code** An *Object Code* is the output of a compiler. Object code is typically machine code, but may also include descriptive information in a format such as XML.
- **Executable** An *Executable* is an artifact that can run on an ECU. It is often similar to *Object Code*; the difference between the two is that the former does not provide means for execution on an ECU.
- **Configuration Data Set** A *Configuration Data Set* is a set of assignments to Post-BuildVariantCriterion.

2.16.3 Classification of Binding Times

Table 2.57 presents an overview of the binding times in AUTOSAR Variant Handling.

Binding Time	AUTOSAR Metamodel	AUTOSAR Methodology
BlueprintDerivationTime	partially	yes
FunctionDesignTime	out of scope	out of scope
InitialBindingTime	no	yes
SystemDesignTime	yes	yes
CodeGenerationTime	yes	yes
PreCompileTime	yes	yes
CompileTime	unused	yes
LinkTime	yes	yes
PostBuild	yes	yes
Runtime	out of scope	out of scope

Table 2.57: Binding Times in Meta Model and Methodology

Variant handling in the AUTOSAR meta model supports the following binding times:

• BlueprintDerivationTime



- SystemDesignTime
- CodeGenerationTime
- PreCompileTime
- LinkTime
- PostBuild

The actual binding time of a variation point is stored in the attribute bindingTime of the ConditionByFormula of a VariationPoint, and can only use the values SystemDesignTime, CodeGenerationTime, PreCompileTime, LinkTime. | (RS_METH_00074)

The AUTOSAR methodology utilizes two more binding times, InitialBinding—Times to characterize artifacts where no variation points are bound, and Compile—Time to distinguish between preprocessing and compiling of code. Finally, FunctionDesignTime and Runtime are not in the scope of AUTOSAR variant handling but mentioned here for completeness.

2.16.3.1 BlueprintDerivationTime

At BlueprintDerivationTime, a model is derived from Blueprints. For example, a function design tool provides the option to derive objects from a predefined set of blueprints. See [19] for more details. This is different from the variant handling defined in this chapter, but it uses the same meta model features (see [18]).

BlueprintDerivationTime is out of the scope of this document, but mentioned here for completeness.

Input Artifacts: Model, Requirements

Output Artifacts: ARXML

2.16.3.2 FunctionDesignTime

At FunctionDesignTime, a software architecture independent model for (control) systems is developed. Typical tools used at this stage are *Matlab/Simulink*, or *ASCET-MD*.

If a function design tool supports variant handling according to AUTOSAR it has no other choice than using <code>CodeGenerationTime</code> or later as binding time in the generated AUTOSAR artifacts.



FunctionDesignTime is out of the scope of this document (as long as it does not affect calibration measurements), but mentioned here for completeness.

Input Artifacts: Model, Requirements

Output Artifacts: Function model

2.16.3.3 InitialBindingTime

At InitialBindingTime, no variation points are bound. This binding time is needed to express a state where no SystemDesignTime points are bound in artifact

Input Artifacts: Model, Requirements, Function model, AUTOSAR models from blueprints in ARXML format.

Output Artifacts: ARXML.

2.16.3.4 SystemDesignTime

SystemDesignTime is characterized by the following tasks:

- Designing the VFB
- Software Component types (Interfaces)
- SWC Prototypes and the Connections between SWCprototypes
- Designing the Topology
- ECUs and interconnecting Networks
- Designing the Communication Matrix and Data Mapping

Input Artifacts: Function model, Requirements, AUTOSAR models from blueprints in ARXML format.

Output Artifacts: ARXML.

2.16.3.5 CodeGenerationTime

At this step, code is generated. This may be done either by hand, or using a tool, or a mixture of both.

Handwritten code is typically based on a requirements document, whereas generated code is usually created from a model that was designed at FunctionDesignTime or SystemDesignTime.

Both the requirements and the model may contain variants, but code is only generated for those variants that have been selected, or which need to be resolved later.



Input Artifacts: ARXML.

Output Artifacts: Source Code.

2.16.3.6 PreCompileTime

At PreCompileTime, a preprocessor (e.g., the C preprocessor) is used to further customize the code and exclude parts of the code from the compilation process.

There are several reasons for such an exclusion: code is not required for the selected variant(s), code is incompatible with the selected variant(s), or code requires resources that are not present in the selected variant(s). The code that is excluded at this stage code will not be available at later stages.

PreCompileTime is typically used for handwritten code (for which SystemDesign-Time and CodeGenerationTime obviously cannot not take effect) or when a system constant needs to be bound after code generation.

Input Artifacts: Source Code.

Output Artifacts: Bound Source Code.

2.16.3.7 CompileTime

At CompileTime, source code that has already been processed by a macro processor such as the C preprocessor and stripped of all PreCompileTime variation points is transformed into object code. The compiler might eliminate further variants by removing unused code paths.

CompileTime is not used in the AUTOSAR meta model, but is used in the AUTOSAR methodology to discriminate between a preprocessor and a compiler.

Input Artifacts: Bound Source Code.

Output Artifacts: Object code.

2.16.3.8 LinkTime

The configuration at this stage determines which modules are included in the resulting object code (executable), and which ones are omitted based on the selected variants.

Input Artifacts: Object code.

Output Artifacts: Executable program.



2.16.3.9 PostBuild

PostBuild is the binding time which is bound latest at startup of the ECU. In other words this is everything between creation of the executable program and startup of the ECU.

The startup of the ECU is the PostBuild binding since and obviously cannot be resolved in the model.

Input Artifacts: Executable program, Configuration data set.

Output Artifacts: -

2.16.3.10 Runtime

Everything after startup and initialization is RunTime. Variant Handling at RunTime is out of the scope of this document, but mentioned here for completeness.

2.17 How to resolve Name Conflicts

2.17.1 Reasons for Name Conflicts

In the highly distributed development of an AUTOSAR system, there is a certain risk that symbolic names used in different development artifacts are not unique so that name conflicts may occur when applying software tools.

[TR_METH_03000] Name spaces via ARPackages [In the "upstream" specification of an AUTOSAR system, a software component, a basic software module or configuration parameters via AUTOSAR XML artifacts, such a risk can be widely avoided through the proper usage of ARPackages because they set up name spaces and may be nested (see also General Autosar Artifact). Here it is recommended to follow similar rules as AUTOSAR is using for its own published artifacts, see [18]: [TPS_GST_00081], [TPS_GST_00083], [TPS_GST_00086]. \(\] (RS_METH_00002, RS METH_00003, RS METH_00004, RS METH_00005)

However, certain symbols specified in the AUTOSAR XML artifacts need to be transferred to other development artifacts in later process steps ("downstream") and will appear e.g. as symbols in C-code, as file names, as names displayed by calibration tools or in textual documents. Here we have in general two reasons for naming conflicts (which may also occur in combination):

[TR_METH_03001] Reasons for name conflicts in "downstream" artifacts [

Uncoordinated co-development

Due to the global name space of the C-language within one compilation unit, the risk of name conflicts is rather high if pieces of source code are integrated that were developed by different parties without coordinating the definition of symbols.



The same can happen with names of header files or with symbols visible by the linker.

In AUTOSAR, the programming language interfaces between software components and (to some extend) between basic software modules are restricted to certain patterns and are generated from ARXML, so the coordination effort is restricted to the proper definition of the relevant symbols in ARXML.

In several cases the <code>shortName</code> of an <code>ARElement</code> corresponds to an identifier in the code (or to a part of such an identifier), sometimes also to a file name or a part of it. Since <code>shortNames</code> are also used in the links between ARXML elements, it is hard to change such a name without impact on the overall design. This is for example the case for the <code>names</code> of the <code>AtomicSwComponentTypes</code>.

• Multiple instantiation

The AUTOSAR Runtime Environment (RTE) supports multiple instantiation of software components. This means, in a system and even on one ECU there can be several instances of a given AtomicSwComponentType. Each instance possesses its own data (managed by the RTE), but there is only one artifact (VFB Atomic Software Component) describing the whole type. If one needs a symbol identifying a particular component instance or particular data belonging to that instance (for example for display in a calibration tool), a conflict arises.

A similar thing happens with data elements or operation arguments in a PortInterface or in a composite data type, if the enclosing element is reused in more than one context.

A different kind of "multiple instantiation" can occur in the basic software, if several driver modules implement the same interface (only distinguished by an instance identifier). In this case, we actually have different implementations of code, the modules only share the upper levels of description (artifacts Basic Software Module Description and Basic Software Module Internal Behavior).

(RS_METH_00038)

2.17.2 Points in the Methodology where Name Conflicts are resolved

On the other hand we have multiple points in the methodology where to resolve those conflicts.

In general we can distinguish between the development phase in which a name conflict is resolved and the phase in which it occurs (or would occur). Because a conflict usually prevents a certain task from being completed (e.g. compilation), it must be resolved in the same or an earlier phase than the phase in which it would occur.

• [TR_METH_03002] Conflict solution at system design time [
This is mentioned mainly for completeness. Of course, a proper system design



can avoid conflicts in the first place and if a name conflict still arises in a later phase, it is in principle possible to iterate over the system design. But in this chapter we focus on solutions that allow to resolve name conflicts in later process phases which usually causes less effort. | (RS_METH_00006)

• [TR_METH_03003] Conflict solution at coding time [

Conflicts occurring at compile time or link time must be resolved (latest) at the time a developer is producing the code and/or the ARXML descriptions leading to the generation of code. In other words, this has to happen within the activities Develop an Atomic Software Component or Develop BSW Module. Note that in the worst case, such a conflict is detected not before integration time (during activity Build Executable) which means that some kind of iteration of the activities is required. (RS METH 00006)

• [TR_METH_03004] Conflict solution at ECU integration time [
During ECU integration time (latest) it is still possible to resolve name conflicts that would occur in tasks after the software build, e.g. during generation of A2L files. | (RS METH 00006)

2.17.3 Mechanisms for resolving Name Conflicts

The mechanisms to resolve the name conflicts are:

• [TR METH 03005] Conflict solution via SymbolProps

This mechanism allows to redefine a name in cases where the shortName by default is used to generate RTE relevant code. This avoids to change the overall design in the ARXML model.

This mechanism can be applied at coding time (activity <code>Develop</code> an <code>Atomic Software Component</code>, task <code>Define SymbolProps</code> for <code>Types</code>) and solves conflicts caused by uncoordinated development. Such changes - even if they do not influence the overall design of the software - should be agreed upon by the involved parties.

This mechanism is provided for the following meta-model elements:

AtomicSwComponentType.symbolProps

Allows to redefine the software component type name that the RTE is using in its code. This resolves name clashes among different software component types designed accidentally with the same shortName.⁷

ImplementationDataType.symbolProps

Allows to redefine the implementation data type name used in the code of the

⁷Note that this mechanism is not applicable for the prefixes used in the preprocessor code of memory sections and compiler memory classes. Conflicts among these preprocessor symbols due to duplicate component type names are not visible to the linker. However conflicts might occur when compiling the header file Compiler Cfg.h and must be resolved manually.



RTE and/or the components. This resolves name clashes among different implementation data types designed accidentally with the same shortName.

For more information on the meta-model refer to [TPS_SWCT_01194] and [TPS_SWCT_01110] in [5].|(RS_METH_00002)

• [TR_METH_03006] Conflict solution via literal prefixes [

This mechanisms is similar to the one described before. It allows to define a prefix for preprocessor literals (e.g. for enumeration types or upper/lower limits) created by the RTE generator contract phase. Also this mechanism solves conflicts caused by uncoordinated development and must be applied at coding time (part of task Define Atomic Software Component Internal Behavior).

The model element to be manipulated is:

SwcInternalBehavior.includedDataTypeSet.literalPrefix

For more information refer to [TPS_SWCT_01157] in [5]. | (RS_METH_00002)

• [TR_METH_03007] Conflict solution in names of runnable entities [

In case of a RunnableEntity the symbol used in the code is already independent from the shortName - it is always modeled via the attribute RunnableEntity.symbol. However, since these symbols need to be unique in the scope of one RTE instance (see [constr_2025] in [5]), also here a name conflict can occur at integration time if the definition of the symbols was not coordinated before.

Similar to the cases discussed before, this conflict must be solved at coding time simply be changing the symbol. Note that such a change would not influence the overall design and can be done locally on one component (whose runnable shall be renamed) since the runnable symbol is hidden to other component by the RTE. Despite of that, the definition of unique runnable symbols still might need some human coordination. (RS_METH_00002)

• [TR_METH_03008] Conflict solution via FlatMap [

This mechanism allows to assign identifiers to instances of model elements (e.g. software component instances or data element instances) so that they are unique in a certain scope, e.g. a system or an ECU. Thereby name conflicts are avoided, which would occur if simply the shortNames of the ARXML elements would be used. In other words, this mechanisms solves the name conflicts arising from multiple instantiation of types in the ARXML model.

The identifiers defined in this way are typically not used within the code, since AUTOSAR components do not rely on global variables. The main purpose is the usage within other artifacts which need to handle symbols out of the package context of the ARXML model, for example citation in documents (e.g. in artifact Software Component Documentation) or input for measurement and calibration tools (e.g. in artifact RTE Measurement and Calibration Support Data). A special use case of the ECU Flat Map is the the model trans-



formation from the System to ECU Extract, where it is used to define additional names of component prototypes.

The point in the methodology where this mechanisms is applied depends of course on the use case. The typical tasks in the methodology library for defining a Flat Map are normally performed before integration time: Generate or Adjust System Flat Map, Define Partial Flat Map and Generate or Adjust ECU Flat Map. But since identifiers in a FlatMap are independent of the code, it can in principle be adjusted even at integration time in case a conflict occurs.

For more information see artifacts System Flat Map, Partial Flat Map and ECU Flat Map, for the underlying meta-model parts refer to refer to [9].|(RS_METH_00005)

• [TR_METH_03009] Conflict solution via AliasNameSet [

This mechanism is similar to FlatMap. It allows to define additional names for model elements, either on top of an entry in a FlatMap or standalone. The usage is also similar, but there are no standardized use cases in connection with the AUTOSAR RTE. It can be used in cases where the format of the FlatMap is too restrictive.

For more information refer to the artifact Alias Name Set and task Define Alias Names. For the meta-model of AliasNameSet refer to [9]. The document [9] also gives recommendations on how to transfer certain attributes below AliasNameSet into an ASAM ASAP2 ("A2L") specification. | ()

• [TR_METH_03010] Conflict solution via API Infixes [

If several "instances" of a basic software module (with different implementation but identical interface definition) are linked together, name conflicts have to be solved by defining "infixes". These are small pieces of strings denoting the module vendor and the instance role. They are used to extend globally visible C symbols and certain header file names. The mechanism is also relevant for the basic software scheduler APIs generated in task Generate BSWM Contract Header Files.

Though this mechanism solves a conflict of a certain kind of multiple instantiation, it is relevant to the code and thus must be applied at coding time. The description of the infixes has to be put into the artifact Basic Software Module Implementation Description.

For more information refer to [TPS_BSWMDT_04031] in [8] and to [SWS BSW 00102] in [6].|(RS METH 00003)



3 Methodology Library

3.1 Common Elements

This chapter contains the definition of work products and tasks used in several areas of AUTOSAR development. For the definition of the relevant meta-model elements refer to [18].

3.1.1 Work Product Kinds

Category (Work Product Kind)	AUTOSAR XML
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Product Kinds
Brief Description	
Description	An artifact that conforms to the AUTOSAR XML schema.

Table 3.1: AUTOSAR XML

Category (Work Product Kind)	Source Code
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Product Kinds
Brief Description	
Description	A human readable artifact that conforms to a defined programming language syntax, such as C or Java.

Table 3.2: Source Code

Category (Work Product Kind)	Bound Source Code
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Product Kinds
Brief Description	
Description	A Bound Source Code artifact contains source code without any unbound precompile variation points.

Table 3.3: Bound Source Code

Category (Work Product Kind)	Object Code
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Product Kinds
Brief Description	



Description	An Object Code is the output of a compiler. Object code is typically
	machine code, but may also include descriptive information in a format
	such as XML.

Table 3.4: Object Code

Category (Work Product Kind)	Configuration Data Set
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Product Kinds
Brief Description	
Description	This is a special kind of binary code containing configuration that can be loaded separately from the main ECU code.

Table 3.5: Configuration Data Set

Category (Work Product Kind)	Executable
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Product Kinds
Brief Description	
Description	An Executable is an artifact that can run on an ECU. It is often similar to Object Code; the difference between the two is that the former does not provide means for execution on an ECU.

Table 3.6: Executable

Category (Work Product Kind)	Text
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Product Kinds
Brief Description	
Description	A human readable artifact that is stored as plain text, rich text, PDF, etc.

Table 3.7: Text

Category (Work Product Kind)	Custom
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Product Kinds
Brief Description	
Description	A custom artifact format which is not further specified in the AUTOSAR Methodology.

Table 3.8: Custom



Category (Work Product Kind)	Delivered
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Product Kinds
Brief Description	
Description	These are collections of delivered work products. They form the basis of exchange between organizations.

Table 3.9: Delivered

3.1.2 Tasks

3.1.2.1 Add General Documentation




Figure 3.1: Add General Documentation

Task Definition	Add General Docur	Add General Documentation			
Package		AUTOSAR Root::M2::Methodology::Methodology Library::Common			
	Elements::Tasks				
Brief Description					
Description	Add General Docum	Add General Documentation to work products (AR_MET_REQ069)			
Relation Type	Related Element	Related Element Mul. Note			
Produces	General Documen- tation	1			

Table 3.10: Add General Documentation

3.1.2.2 Define Admin Data




Figure 3.2: Define Admin Data



Task Definition	Define Admin Data	Define Admin Data				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Tasks					
Brief Description	Generic task to defir AUTOSAR artifact.	Generic task to define admin data of an Identifiable within an AUTOSAR artifact.				
Description	AdminData) of an Ideadministration data of top-level package of sub-packages and for Admininistration data element via the meta specific data via so-or sub-packages.	Generic task to define administration data (metamodel element AdminData) of an Identifiable within an AUTOSAR artifact. Note that administration data can be defined on several levels, namely for the top-level package of a General Autosar Artifact, but also for sub-packages and for other Identifiables within the XML description. Admininistration data include versioning information of the model element via the meta-class DocRevision, and the aggretation of user specific data via so-called special data groups, meta-class Sdg. For more details on the administration data content see				
Relation Type	Related Element Mul. Note					
Produces	General Autosar Artifact	1				

Table 3.11: Define Admin Data

3.1.2.3 Define Alias Names

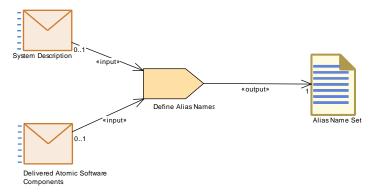


Figure 3.3: Define Alias Names



Task Definition	Define Alias Names	3				
Package	AUTOSAR Root::M2 Elements::Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Tasks				
Brief Description	Define a set of alias	names	for AUTOSAR model elements.			
Description	within an AUTOSAR cooperation with nor require additional ali	The usual mechanism for defining global names for nested elements within an AUTOSAR XML model is the Flat Map. However in the cooperation with non-AUTOSAR tools, there are uses cases which require additional alias names which can be defined by this task. It can be applied on System and on ECU level as well. Possible use				
	cases are for examp	le:				
	Partial Flat Ma	 The names defined by an ECU Flat Map, System Flat Map or Partial Flat Map shall be superseded when used by an external tool (e.g. in order to use a more general string format). 				
	the context of the scope of A	 Resolve name conflicts for elements which cannot be referred in the context of a Flat Map (e.g. for elements directly defined in the scope of ARPackages, like System Constants to be displayed by A2L tools). 				
Relation Type	Related Element	Mul.	Note			
Consumes	Delivered Atomic Software Compo- nents	01	Needed for definition of alias names in the scope of delivered software components.			
Consumes	System Description	01	Needed for definition of alias names with system, system extract or ECU scope, depending of the role of the System Description.			
Produces	Alias Name Set	1				

Table 3.12: Define Alias Names



3.1.2.4 Evaluate Variant

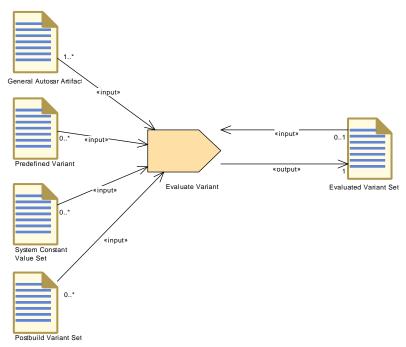


Figure 3.4: Evaluate Variant

Task Definition	Evaluate Variant			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Tasks			
Brief Description	Document the evalua	ation of	variants in the software description.	
Description	Create or modify an Evaluated Variant Set in order to document the outcome of an evaluation of particular variants. This namely means setting the "approval status" in relation to a given set of Predefined Variants and a given set of model elements (e.g. a particular Software Component) which were evaluated. This is a general task which can be applied on different levels, therefore the input is modeled as General Autosar Artifact.			
Relation Type	Related Element	Mul.	Note	
Consumes	General Autosar Artifact	1*		
Consumes	Evaluated Variant Set	01		
Consumes	Postbuild Variant Set	0*		
Consumes	Predefined Variant	0*		
Consumes	System Constant Value Set	0*		
Produces	Evaluated Variant Set	1		

Table 3.13: Evaluate Variant



3.1.2.5 Define Memory Addressing Modes




Figure 3.5: Define Memory Addressing Modes

Task Definition	Define Memory Add	Define Memory Addressing Modes			
Package	AUTOSAR Root::M2 Elements::Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::Common			
Brief Description					
Description	Define the compiler specific configuration used in a later task to generate the "pragmas" in memory mapping header files. The output (container MemMapAddressingModeSet) is treated as pre-configured configuration values for the "module" MemMap, because it can be prepared independently from the configuration for a specific integration project.				
		Meth.bindingTime = SystemDesignTime			
Relation Type	Related Element	Mul.	Note		
Performed by	Basic Software Module Developer	1			
Performed by	Software Component Developer	01			
Produces	BSW Module Pre- configured Config- uration	1*	MemMapAddressingModeSet: Meth.bindingTime = SystemDesignTime		

Table 3.14: Define Memory Addressing Modes



3.1.2.6 Configure Memmap Allocation

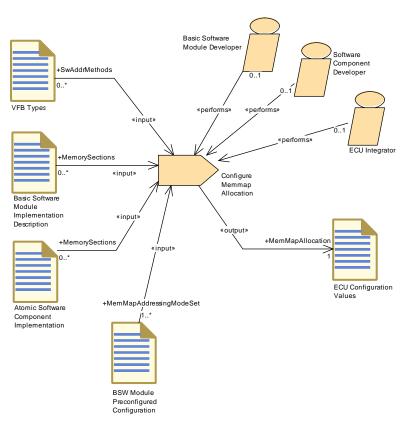


Figure 3.6: Configure Memmap Allocation



Task Definition	Configure Memmap Allocation			
Package	AUTOSAR Root::M2 Elements::Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Tasks		
Brief Description				
Description	"MemMap". The output is to be unduring ECU integration local environments. MemMapAllocation of sections used in BSN configuration element SwAddrmethods (geinput files. The comp	Configure the ECU Configuration part MemMapAllocation for module "MemMap". The output is to be used for generating memory mapping headers during ECU integration as well as for BSW and SWC compiling/linking in local environments. MemMapAllocation defines a mapping between abstract memory sections used in BSW or SWC code and compiler specific configuration elements. The abstract sections are identified via links to SwAddrmethods (generic mapping) resp. MemorySections of the XML input files. The compiler specific configuration is given as a pre-configured configuration for module "MemMap" via the container		
	MemMapAddressing For more information SWS_MemoryMapp	MemMapAddressingModeSet. For more information refer to document ID 128: SWS_MemoryMapping. Meth.bindingTime = SystemDesignTime		
Relation Type	Related Element	Mul.	Note	
Performed by	Basic Software Module Developer	01		
Performed by	ECU Integrator	01		
Performed by	Software Component Developer	01		
Consumes	BSW Module Pre- configured Config- uration	1*	MemMapAddressingModeSet: Collection of compiler specific configuration elements for memory allocation and addressing modes.	
Consumes	Atomic Software Component Imple- mentation	0*	MemorySections:	
Consumes	Basic Software Module Implemen- tation Description	0*	MemorySections:	
Consumes	VFB Types	0*	SwAddrMethods: SwAddrMethods used for the generic mapping. Note that one SwAddrmethod can represent several memory sections.	
Produces	ECU Configuration Values	1	MemMapAllocation: Meth.bindingTime = SystemDesignTime	

Table 3.15: Configure Memmap Allocation



3.1.2.7 Generate BSW Memory Mapping Header

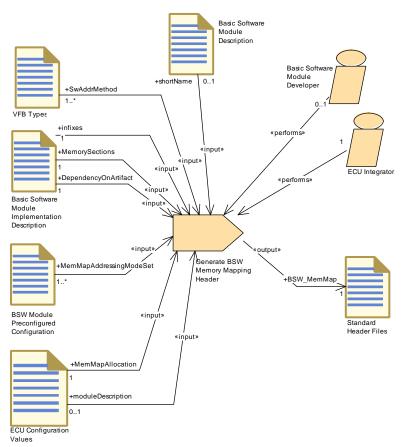


Figure 3.7: Generate BSW Memory Mapping Header



Task Definition	Generate BSW Mer		•• •
Package	AUTOSAR Root::M2 Elements::Tasks	2::Metho	dology::Methodology Library::Common
Brief Description			
Description	(the default case) or Note that the usage build environment is	a group of one N possible	·
	I	that the	U scope or with preliminary scope to test e content of the generated file is compiler ts).
	Inputs are:		
			Module Description: The shortName is ase) as the first part of the generated file
		ods, whi	perties of abstract sections given by ch in turn are referred by MemorySection pAllocation.
	Names of the used in the codefault rule); is used); option	individu ode (incl optional onal dec	Module Implementation Description: all abstract sections (preprocessor macros) uding optional prefixes overriding the infixes for the file name (if the default rule laration of file name (element ct) overriding the default rule.
			Configuration for module "MemMap": r specific configuration elements.
			tion for module "MemMap" : this is the concrete mapping for this
	case the task	is done	tion: Find the list of used BSW modules in for the whole BSW .ecucValue.moduleDescription).
	Meth.bindingTime =		1
Relation Type	Related Element	Mul.	Note
Performed by	ECU Integrator	1	
Performed by	Basic Software Module Developer	01	
Consumes	Basic Software Module Implemen- tation Description	1	infixes: Optional infixes (denoting instance and vendor ID) to be used within the created header file name. Meth.bindingTime = SystemDesignTime
Consumes	Basic Software Module Implemen- tation Description	1	DependencyOnArtifact: Can be used to override the default name of the memory mapping header file. Meth.bindingTime = SystemDesignTime



Relation Type	Related Element	Mul.	Note
Consumes	Basic Software Module Implemen- tation Description	1	MemorySections: MemorySections defined for a BSW module. This input includes optional prefixes for memory sections overriding the default rule. Meth.bindingTime = SystemDesignTime
Consumes	ECU Configuration Values	1	MemMapAllocation: Mapping of the abstract sections (SwAddressMethods for generic mapping resp. MemorySection Elements for specific mapping) to the compiler specific MemMapAddressingModes. Meth.bindingTime = SystemDesignTime
Consumes	BSW Module Pre- configured Config- uration	1*	MemMapAddressingModeSet: Collection of compiler specific configuration elements for memory allocation. Meth.bindingTime = SystemDesignTime
Consumes	VFB Types	1*	SwAddrMethod: Referred SwAddrMethods Meth.bindingTime = SystemDesignTime
Consumes	Basic Software Module Descrip- tion	01	shortName: The BSW module's shortName is used as the first part of the generated file name, in case the default rule applies. Meth.bindingTime = SystemDesignTime
Consumes	ECU Configuration Values	01	moduleDescription: List of used BSW modules (EcucValueCollection.ecucValue.moduleDescription) Meth.bindingTime = SystemDesignTime
Produces	Standard Header Files	1	BSW_MemMap: The memory mapping header file to be used for one or more BSW modules in a given build environment.
			The file name has in the standardized case a form like {Mip}_MemMap.h in which the prefixes {Mip} are determined by the module (or cluster) name and optional infixes.
			However, it is also possible to create a completely different filename via explicit declaration in the BSW Module Implementation.
			For more detailed rules on the name of the generated file refer to AUTOSAR_SWS_MemoryMapping. Meth.bindingTime = CodeGenerationTime

Table 3.16: Generate BSW Memory Mapping Header



3.1.2.8 Generate SWC Memory Mapping Header

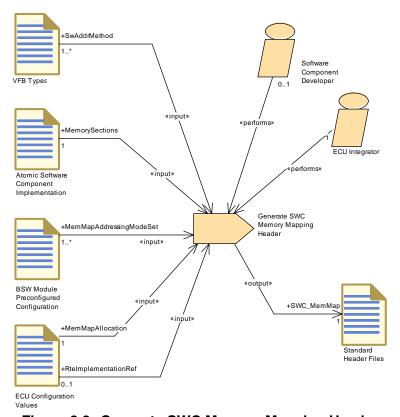


Figure 3.8: Generate SWC Memory Mapping Header



Task Definition	Generate SWC Mer	nory Ma	apping Header
Package	AUTOSAR Root::M2 Elements::Tasks	2::Metho	dology::Methodology Library::Common
Brief Description			
Description .	and one Atomic Soft scope or with preliming	ware Co inary sc	ing header file for one build environment omponent. This task can be used in ECU ope to test software component. Note that compiler specific (#pragma statements).
	Inputs are:		
		ods, whi	perties of abstract sections given by ch in turn are referred by MemorySection pAllocation
	MemorySection	on: Nam	onent Implementation, element nes of the individual abstract sections s) used in the code.
		-	Configuration for module "MemMap": specific configuration elements.
			ion for module "MemMap" : This is the concrete mapping for this
		"RteSw	mplementations by usage of the RTE ECU ComponentType.RteImplementationRef" enerationTime
Relation Type	Related Element	Mul.	Note
Performed by	ECU Integrator	1	
Performed by	Software Compo- nent Developer	01	
Consumes	Atomic Software Component Imple- mentation	1	MemorySections: MemorySections defined for an Atomic Software Component. Meth.bindingTime = SystemDesignTime
Consumes	ECU Configuration Values	1	MemMapAllocation: Mapipng of the abstract sections (SwAddressMethods for generic mapping resp. MemorySection Elements for specific mapping) to the compiler specific MemMapAddressingModes. Meth.bindingTime = SystemDesignTime
Consumes	BSW Module Pre- configured Config- uration	1*	MemMapAddressingModeSet: Collection of compiler specific configuration elements for memory allocation. Meth.bindingTime = SystemDesignTime
			, ,



Relation Type	Related Element	Mul.	Note
Consumes	ECU Configuration Values	01	RteImplementationRef: Existence of SWCs could be identified by usage of the RTE ECU Configuration "RteSwComponentType.RteImplementationRef" Meth.bindingTime = SystemDesignTime
Produces	Standard Header Files	1	SWC_MemMap: One header per software component type for a given build environment. The file name follows the pattern {componentTypeName}_MemMap.h in which the prefix componentTypeName is determined by the software component type name. For more detailed rules on the name of the generated file refer to AUTOSAR_SWS_MemoryMapping. Meth.bindingTime = CodeGenerationTime

Table 3.17: Generate SWC Memory Mapping Header

3.1.2.9 Configure Compiler Memory Classes




Figure 3.9: Define Compiler Memory Classes



Task Definition	Configure Compile	r Memo	ry Classes
Package	AUTOSAR Root::M2 Elements::Tasks	2::Metho	dology::Methodology Library::Common
Brief Description			
Description	a later task to general configuration header The output is treated "module" MemMap,	ate the price file (Co I as pre- because	configuration for "memory classes" used in preprocessor code of the compiler ampiler_Cfg.h). -configured configuration values for the experimental in the prepared independently from fic integration project.
	Meth.bindingTime =	·	
Relation Type	Related Element	Mul.	Note
Performed by	Basic Software Module Developer	1	
Performed by	Software Component Developer	01	
Produces	BSW Module Pre- configured Config- uration	1*	MemMap config for compiler memclasses: Set the parameter values that define generic MemClassSymbols (i.e. those not defined by modules or SWCs.).
			Set the parameter values that define the implementation behind all kind of MemClassSymbols (generic and local ones). Meth.bindingTime = SystemDesignTime

Table 3.18: Configure Compiler Memory Classes



3.1.2.10 Generate Compiler Configuration

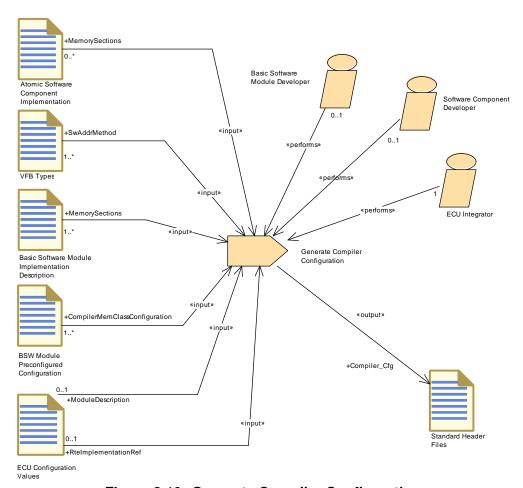


Figure 3.10: Generate Compiler Configuration

Task Definition	Generate Compiler	Config	uration
Package	AUTOSAR Root::M2 Elements::Tasks	2::Metho	dology::Methodology Library::Common
Brief Description			
Description		ment to	ler configuration header (Compiler_cfg.h) be used for all BSW modules and software enerationTime
Relation Type	Related Element	Mul.	Note
Performed by	ECU Integrator	1	
Performed by	Basic Software Module Developer	01	
Performed by	Software Component Developer	01	

- AUTOSAR CONFIDENTIAL -



Relation Type	Related Element	Mul.	Note
Consumes	BSW Module Pre- configured Config- uration	1*	CompilerMemClassConfiguration: The parameters "MemMapCompilerMem-ClassSymbolImpl" and "MemMapGenericCompilerMem-ClassSymbolImpl" define the implementation behind a MemClassSymbol. Meth.bindingTime = SystemDesignTime
Consumes	Basic Software Module Implemen- tation Description	1*	MemorySections: Find referred SwAddrMethods or specific memClassSymbols in the MemorySections defined for BSW modules. Meth.bindingTime = SystemDesignTime
Consumes	VFB Types	1*	SwAddrMethod: Referred SwAddrMethods. They provide the default names for the compiler memory classes. Meth.bindingTime = SystemDesignTime
Consumes	ECU Configuration Values	01	RteImplementationRef: Existence of SWCs could be identified by usage of the RTE ECU Configuration "RteSwComponentType.RteImplementationRef" Meth.bindingTime = SystemDesignTime
Consumes	ECU Configuration Values	01	ModuleDescription: List of used BSW modules (EcucValueCollection.ecucValue.moduleDescription) Meth.bindingTime = SystemDesignTime
Consumes	Atomic Software Component Imple- mentation	0*	MemorySections: Find referred SwAddrMethods or specific memClassSymbols in the MemorySections defined for Atomic Software Components. Meth.bindingTime = SystemDesignTime
Produces	Standard Header Files	1	Compiler_Cfg: The output file "Compiler_Cfg.h" configures the abstraction of compiler specifics. Meth.bindingTime = CodeGenerationTime

Table 3.19: Generate Compiler Configuration

3.1.3 Work Products

3.1.3.1 General Documentation



Artifact	General Document	ation	
Package	AUTOSAR Root::M2 Elements::Work Pro		dology::Methodology Library::Common
Brief Description			
Description	General documentat	ion link	to a given work product
Kind	Custom		
Relation Type	Related Element	Mul.	Note
Aggregated by	General Deliver- able	0*	
Produced by	Add General Docu- mentation	1	

Table 3.20: General Documentation

3.1.3.2 Alias Name Set

Artifact	Alias Name Set		
Package	AUTOSAR Root::M2 Elements::Work Pro		dology::Methodology Library::Common
Brief Description	Set of alias names for AUTOSAR.	or AUTO	SAR model elements for usage outside of
Description	Set of alias names, e reference to the mod		nsisting of the name (string) itself and the ent it renames.
			lement is either a reference to an an ECU Flat Map or System Flat Map.
	For an explanation o	f uses c	ases see task Define Alias Names.
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	Delivered Atomic Software Compo- nents	01	Alias names valid in the context of the delivered components.
Aggregated by	System Description	0*	
Produced by	Define Alias Names	1	
Consumed by	Add Documenta- tion to the Software Component	0*	Optional input in order to refer to unique names defined in an Alias Name Set (e.g. System Constants).
Consumed by	Generate A2L	0*	
Use meta model element	AliasNameSet	1	

Table 3.21: Alias Name Set

3.1.3.3 Evaluated Variant Set



Artifact	Evaluated Variant S	Set	
Package	AUTOSAR Root::M2 Elements::Work Pro		dology::Methodology Library::Common
Brief Description	A set of evaluated va	ariants	
Description	ArPackages (referrre or more particular va	ed as "ev vriant. It	ole defining which ArElements or valuatedElements") are able to support one can thus be used to document which rtain delivery, e.g. of a software component
	represents a table of represents one colur swSystemConstantV	evaluat nn. In th alue (pa	et of evaluatedElements this element ted variants, where each PredefinedVariant his column each descendant art of System Constant Value Set) resp. ue (part of Postbuid Variant Set) represents
		erionVal	n each swSystemConstantValueSet / ueSet could be used as an intermediate
		OVED" it	omes with an attribute "approvalStatus". If expresses that the evaluatedElements are evaluated variants.
			ent could be another Evaluated Variant a hierarchy of EvaluatedVariantSets.
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	Delivered Atomic Software Compo- nents	01	
Aggregated by	ECU Extract of System Variant Model	0*	
Aggregated by	System Description	0*	
Aggregated by	VFB System	0*	
Produced by	Define System Variants	1	
Produced by	Evaluate Variant	1	
Produced by	Define Integration Variant	01	Meth.bindingTime = SystemDesignTime
Produced by	Define VFB Variants	0*	
Consumed by	Evaluate Variant	01	
Consumed by	Extract ECU System Variant Model	0*	
Use meta model element	EvaluatedVariant Set	1	

Table 3.22: Evaluated Variant Set



3.1.3.4 General Autosar Artifact

Artifact	General Autosar Ar	rtifact	
Package	AUTOSAR Root::M2 Elements::Work Pro		dology::Methodology Library::Common
Brief Description	Describes the meta	data for	an AUTOSAR artifact.
Description	This artifact represed XML artifacts.	nts the d	data which are common to all AUTOSAR
	Each file starts with	the root	element AUTOSAR.
	packages using the is important to under other aggregated elefiles, i.e. over several between several files	element rstand, t ements o Il artifac s, each f	act below this root element is organized by ARPackage. Packages can be nested. It hat the hierarchy defined via packages and can (in general) span over several XML ts. That means, if an aggregation is "split" file is considered as a separate artifact by elements are formally aggregated within
	documentation and a AdminData. Note that there can be AdminI and for more specific AdminData among of the artifact version) by	administ at ARPa Data for c elemei other thir	eta-class Identifiable can carry trative description based on the element ackage is itself derived from Identifiable, so the top-level package, for sub-packages ints (derived from Identifiable) as well. The large contain revision information (including in the metamodel element DocRevision.
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	General Deliver- able	0*	
Produced by	Define ASIL For A UTOSAR Element	1	
Produced by	Define Admin Data	1	
Produced by	Allocate Safety Measure	0*	Allocated Elements:
Produced by	Allocate Safety Requirement	0*	Allocated Elements:
Consumed by	Define ASIL For A UTOSAR Element	1	
Consumed by	Allocate Safety Measure	1*	
Consumed by	Allocate Safety Requirement	1*	
Consumed by	Evaluate Variant	1*	
Consumed by	Define Safety Measure	0*	
	1	0*	
Consumed by	Define Safety Requirement	0	
Consumed by Use meta model element	-	1	



|--|

Table 3.23: General Autosar Artifact

3.1.3.5 General Deliverable




Figure 3.11: General Deliverable

Deliverable	General Deliverable	9		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Products			
Brief Description	General data for an	General data for an XML based deliverable within AUTOSAR.		
Description	General data for an XML based deliverable within AUTOSAR: Especially it contains a catalog of all included artifacts. These can be AUTOSAR artifacts (see General Autosar Artifact) or non-AUTOSAR artifacts (see General Non AUTOSAR Artifact). An AUTOSAR XML artifact which is contained in the catalog may refer to an non AUTOSAR Artifact whithin the catalog via the metamodel element AutosarEngineeringObject (see AUTOSAR TPS GenericStructureTemplate.pdf for further description).			
Kind	Delivered			
Relation Type	Related Element	Mul.	Note	
Aggregates	General Autosar Artifact	0*		
Aggregates	General Documen- tation	0*		
Aggregates	General Non Autosar Artifact	0*		

Table 3.24: General Deliverable

3.1.3.6 General Non-Autosar Artifact



Artifact	General Non Autosar Artifact		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Products		
Brief Description	Describes the data f	or a non	AUTOSAR artifact.
Description	Describes the data f	or a non	AUTOSAR artifact.
Kind	Custom		
Relation Type	Related Element	Mul.	Note
Aggregated by	General Deliver- able	0*	
Consumed by	Provide RTE Calibration Dataset	1*	input from calibration process

Table 3.25: General Non Autosar Artifact

3.1.3.7 Postbuild Variant Set

Artifact	Postbuild Variant Set		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Products		
Brief Description	Set of Postbuild Variant Criterion Values used to define post-build variants of the software.		
Description	Set of Postbuild Variant Criterion Values used to define post-build variants of the software. Such a set does not necessarily define a variant which is actually used. To define a meaningful variant in the production process, such a set is to be used via reference by artifact PredefinedVariant.		
Kind	AUTOSAR XML	T	
Relation Type	Related Element	Mul.	Note
Aggregated by	Delivered Atomic Software Compo- nents	01	
Aggregated by	ECU Extract of System Variant Model	0*	
Aggregated by	System Description	0*	
Aggregated by	VFB System	0*	
In/out	Define System Variants	1	
In/out	Define Integration Variant	0*	
In/out	Define VFB Variants	0*	
Consumed by	Generate RTE Postbuild Dataset	1	
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	01	



Relation Type	Related Element	Mul.	Note
Consumed by	Generate RTE Prebuild Dataset	01	
Consumed by	Evaluate Variant	0*	
Consumed by	Extract ECU System Variant Model	0*	
Use meta model element	PostBuildVariant CriterionValueSet	1	

Table 3.26: Postbuild Variant Set

3.1.3.8 Predefined Variant

Artifact	Predefined Variant		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common		
	Elements::Work Products		
Brief Description	· ·		for usage in subsequent process steps.
Description	Defines one variant of a software description for delivery and/or usage in subsequent process steps. The actual definition of all settings which make up this variant is given by attached System Constant Value Set (all settings which are resolved prior to post-build) and/or Postbuid Variant Set (all settings which are resolved after software build). These sets may be part of the same artifact or may be separated artifacts. Via these settings, the actual values which make up a particular variant, are selected.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	Delivered Atomic Software Compo- nents	0*	
Aggregated by	ECU Extract of System Variant Model	0*	
Aggregated by	System Description	0*	
Aggregated by	VFB System	0*	
Produced by	Define Integration Variant	1	Meth.bindingTime = SystemDesignTime
Produced by	Define System Variants	1	
Produced by	Define VFB Variants	0*	
Consumed by	Generate BSW Module Prebuild Data Set	1	
Consumed by	Generate RTE Postbuild Dataset	1	
Consumed by	Generate RTE Prebuild Dataset	1	



Relation Type	Related Element	Mul.	Note
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	01	
Consumed by	Evaluate Variant	0*	
Consumed by	Extract ECU System Variant Model	0*	
Consumed by	Generate Component Prebuild Data Set	0*	
Use meta model element	PredefinedVariant	1	

Table 3.27: Predefined Variant

3.1.3.9 Standard Header Files

Artifact	Standard Header Files				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Products				
Brief Description	Overall header files to be included by each standardized BSW module, optionally also by Software Component code.				
Description	Overall header files to be included by each standardized BSW module, optionally also by Software Component code. For simplicity of the methodology, these are modeled as one artifact though in practice these are several different files:				
	 (<pre>prefixes>_)MemMap.h - defines a common set of macros in order to define abstract memory sections for code and data in the source code . The prefixes indicates whether the scope is limited to a component, module or some other source code area (e.g. an ICC2 cluster). Note that the usage of one MemMap.h for the complete BSW is possible, but deprecated. It is also possible to use a completely different filename via explicit declaration in the BSW Module Implementation Description.</pre> 				
	 Std_Types.h - defines a common set of C data types for usage within the basic software, this header includes the following two headers: 				
	 Compiler.h (in turn including Compiler_Cfg.h) - for abstraction of compiler specifics, in which the second header is the part that is subject to configuration 				
	Platform_Types.h - for abstraction of platform specific types				
Kind	Source Code				
Relation Type	Related Element Mul. Note				



Relation Type	Related Element	Mul.	Note
Produced by	Generate BSW Memory Mapping Header	1	BSW_MemMap: The memory mapping header file to be used for one or more BSW modules in a given build environment. The file name has in the standardized case a form like {Mip}_MemMap.h in which the prefixes {Mip} are determined by the module (or cluster) name and optional infixes. However, it is also possible to create a completely different filename via explicit declaration in the BSW Module Implementation. For more detailed rules on the name of the generated file refer to AUTOSAR_SWS_MemoryMapping. Meth.bindingTime = CodeGenerationTime
Produced by	Generate Compiler Configuration	1	Compiler_Cfg: The output file "Compiler_Cfg.h" configures the abstraction of compiler specifics. Meth.bindingTime = CodeGenerationTime
Produced by	Generate SWC Memory Mapping Header	1	SWC_MemMap: One header per software component type for a given build environment. The file name follows the pattern {componentTypeName}_MemMap.h in which the prefix componentTypeName is determined by the software component type name. For more detailed rules on the name of the generated file refer to AUTOSAR_SWS_MemoryMapping. Meth.bindingTime = CodeGenerationTime
Consumed by	Compile Atomic Software Compo- nent	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile BSW Core Code	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile ECU Source Code	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Implement a BSW Module	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Re-compile Component in ECU context	1	Meth.bindingTime = CodeGenerationTime

197 of 503



Relation Type	Related Element	Mul.	Note
Consumed by	Implement Atomic Software Compo- nent	01	Meth.bindingTime = CodeGenerationTime

Table 3.28: Standard Header Files

3.1.3.10 System Constant Value Set

Artifact	System Constant V	System Constant Value Set		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Work Products			
Brief Description	Set of System Const	Set of System Constant Values used to handle variants.		
Description	software. Such a set does not To define a meaning	Set of System Constant Values used to define pre-build variants of the software. Such a set does not necessarily define a variant which is actually used. To define a meaningful variant in the production process, such a set is to be used via reference by artifact PredefinedVariant.		
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Compo- nents	0*		
Aggregated by	ECU Extract of System Variant Model	0*		
Aggregated by	System Description	0*		
Aggregated by	VFB System	0*		
In/out	Define System Variants	1		
In/out	Define Integration Variant	0*		
In/out	Define VFB Variants	0*		
Consumed by	Generate BSW Module Prebuild Data Set	1		
Consumed by	Generate RTE Prebuild Dataset	1		
Consumed by	Generate Component Prebuild Data Set	1*	Meth.bindingTime = CodeGenerationTime	
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	01	Meth.bindingTime = SystemDesignTime	
Consumed by	Evaluate Variant	0*		
Consumed by	Extract ECU System Variant Model	0*		



Relation Type	Related Element	Mul.	Note
Use meta model element	SwSystemcon- stantValueSet	1	

Table 3.29: System Constant Value Set

3.1.4 Roles

Role	AUTOSAR Partners	AUTOSAR Partnership		
Package	AUTOSAR Root::M2 Elements::Roles	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles		
Brief Description	The AUTOSAR Partr	The AUTOSAR Partnership development defines standard artifacts.		
Description				
Relation Type	Related Element	Related Element Mul. Note		

Table 3.30: AUTOSAR Partnership

Role	Basic Software Des	signer	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles		
Brief Description	Role responsible for	the ove	rall design of the Basic Software.
Description	contrast to the Basic	Softwa	rall design of the Basic Software. In re Module Developer he is responsible for and data types between modules.
Relation Type	Related Element	Mul.	Note
Performs	Define BSW Be- havior	1	
Performs	Define BSW Entries	1	
Performs	Define BSW Interfaces	1	
Performs	Define BSW Types	1	
Performs	Create Trans- former Specifica- tion	01	
Performs	Define VFB Nv Block Software Component	01	
Performs	Define Vendor Specific Module Definition	01	

Table 3.31: Basic Software Designer



Role	Basic Software Mo	dule De	veloper	
Package	AUTOSAR Root::M2 Elements::Roles	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles		
Brief Description	Role responsible to develop and deliver a Basic Software Module.			
Description				
Relation Type	Related Element	Mul.	Note	
Performs	Compile BSW Core Code	1		
Performs	Configure Compiler Memory Classes	1		
Performs	Create Library	1		
Performs	Define BSW Entries	1		
Performs	Define BSW Interfaces	1		
Performs	Define BSW Mod- ule Timing	1		
Performs	Define BSW Types	1		
Performs	Define Memory Addressing Modes	1		
Performs	Develop BSW Module Generator	1		
Performs	Generate BSW Module Prebuild Data Set	1		
Performs	Generate BSWM Contract Header Files	1		
Performs	Implement a BSW Module	1		
Performs	Configure Memmap Allo- cation	01		
Performs	Define Vendor Specific Module Definition	01		
Performs	Generate BSW Memory Mapping Header	01		
Performs	Generate Compiler Configuration	01		
Performs	Measure Component Resources	01		

Table 3.32: Basic Software Module Developer



Role	Calibration Engineer		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles		
Brief Description	The calibration engion ECU.	The calibration engieer determines the calibration parameters of an ECU.	
Description			
Relation Type	Related Element	Mul.	Note
Performs	Define VFB Pa- rameter Compo- nent	1	
Performs	Generate A2L	1	
Performs	Create MC Function Model	01	
Performs	Define VFB Constants	01	
Performs	Provide RTE Calibration Dataset	01	

Table 3.33: Calibration Engineer

Role	Certification Agency
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles
Brief Description	The certification agency verifies the conformance of artifacts with respect to the standard artifacts defined by the autosar consortium.
Description	
Relation Type	Related Element Mul. Note

Table 3.34: Certification Agency

Role	ECU Integrator			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles			
Brief Description	Integrates the compl	ete softv	ware on an ECU.	
Description	generating necessar	y code a	ware on an ECU, which includes and completing the configuration of all asic software modules.	
Relation Type	Related Element	Mul.	Note	
Performs	Compile ECU Source Code	1		
Performs	Configure Com	1		
Performs	Configure Debug	1		
Performs	Configure Diag- nostics	1		
Performs	Configure ECUC 1			
Performs	Configure IO Hard- ware abstraction	1		
Performs	Configure MCAL	1		



Relation Type	Related Element	Mul.	Note
Performs	Configure Mode	1	
	Management		
Performs	Configure NvM	1	
Performs	Configure OS	1	
Performs	Configure RTE	1	
Performs	Configure Trans- former	1	
Performs	Configure Watch- dog Manager	1	
Performs	Connect Service Component	1	
Performs	Create Library	1	
Performs	Create Service Component	1	
Performs	Define ECU Timing	1	
Performs	Define Integration Variant	1	
Performs	Extract the ECU Communication	1	
Performs	Generate BS W Configuration Code	1	
Performs	Generate BSW Memory Mapping Header	1	
Performs	Generate Base Ecu Configuration	1	
Performs	Generate Compiler Configuration	1	
Performs	Generate ECU Ex- ecutable	1	
Performs	Generate Local M C Data Support	1	
Performs	Generate OS	1	
Performs	Generate RTE	1	
Performs	Generate RTE Postbuild Dataset	1	
Performs	Generate RTE Prebuild Dataset	1	
Performs	Generate SWC Memory Mapping Header	1	
Performs	Generate Sched- uler	1	
Performs	Generate Updated ECU Configuration	1	
Performs	Measure Re- sources	1	



Relation Type	Related Element	Mul.	Note
Performs	Provide RTE Calibration Dataset	1	
Performs	Configure Memmap Allocation	01	
Performs	Create MC Function Model	01	
Performs	Define VFB Nv Block Software Component	01	
Performs	Extend Topology	01	
Performs	Extract ECU Rapid Prototyping Sce- nario	01	
Performs	Extract ECU System Timing	01	
Performs	Extract ECU System Variant Model	01	
Performs	Extract ECU Topology	01	
Performs	Flatten Software Composition	01	
Performs	Generate Component Header File in Vendor Mode	01	
Performs	Generate or Adjust ECU Flat Map	01	
Performs	Map Software Component to BS W	01	
Performs	Measure Component Resources	01	

Table 3.35: ECU Integrator

Role	Software Component Designer		
Package	AUTOSAR Root::M2 Elements::Roles	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles	
Brief Description	Designer of software	compo	nents and VFB systems.
Description			
Relation Type	Related Element	Mul.	Note
Performs	Add Documenta- tion to the Software Component	1	
Performs	Define Atomic Software Com- ponent Internal Behavior	1	
Performs	Define Complex Driver Component	1	



Relation Type	Related Element	Mul.	Note
Performs	Define Consistency Needs	1	
Performs	Define ECU Abstraction Component	1	
Performs	Define VFB Application Software Component	1	
Performs	Define VFB Composition Component	1	
Performs	Define VFB Constants	1	
Performs	Define VFB Interfaces	1	
Performs	Define VFB Modes	1	
Performs	Define VFB Sensor or Actuator Component	1	
Performs	Define VFB Timing	1	
Performs	Define VFB Types	1	
Performs	Define VFB Variants	1	
Performs	Define Wrapper Components to Integrate Legacy Software	1	
Performs	Map Software Component to BS W	1	
Performs	Define Partial Flat Map	01	
Performs	Define VFB Component Constraints	01	
Performs	Define VFB Nv Block Software Component	01	
Performs	Define VFB Top Level	01	

Table 3.36: Software Component Designer

Role	Software Component Developer		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles		
Brief Description	Developer of the software component code.		
Description			
Relation Type	Related Element Mul. Note		



Relation Type	Related Element	Mul.	Note
Performs	Define Consistency Needs	1	
Performs	Define Software Component Timing	1	
Performs	Define Symbol Props for Types	1	
Performs	Generate Atomic Software Com- ponent Contract Header Files	1	
Performs	Generate Component Header File in Vendor Mode	1	
Performs	Generate Component Prebuild Data Set	1	
Performs	Implement Atomic Software Component	1	
Performs	Measure Component Resources	1	
Performs	Re-compile Component in ECU context	1	
Performs	Add Documenta- tion to the Software Component	01	
Performs	Compile Atomic Software Component	01	
Performs	Configure Compiler Memory Classes	01	
Performs	Configure Memmap Allocation	01	
Performs	Define Atomic Software Com- ponent Internal Behavior	01	
Performs	Define Memory Addressing Modes	01	
Performs	Define Partial Flat Map	01	
Performs	Generate Compiler Configuration	01	
Performs	Generate SWC Memory Mapping Header	01	

Table 3.37: Software Component Developer



Role	System Engineer		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles		
Brief Description	Creation, management, developement and integration of systems within the vehicle		elopement and integration of systems
Description			
Relation Type	Related Element	Mul.	Note
Performs	Assign Top Level Composition	1	
Performs	Create Trans- former Specifica- tion	1	
Performs	Define Communication Matrix	1	
Performs	Define E2E Trans- former Technology	1	
Performs	Define ECU Description	1	
Performs	Define Frames	1	
Performs	Define Network Management	1	
Performs	Define PDU Gate- way	1	
Performs	Define RTE Fan- out	1	
Performs	Define Secured P DUs	1	
Performs	Define Signal Gateway	1	
Performs	Define Signal PD Us	1	
Performs	Define Signal Path Constraints	1	
Performs	Define Software Component Map- ping Constraints	1	
Performs	Define System Timing	1	
Performs	Define System Topology	1	
Performs	Define System Variants	1	
Performs	Define System View Mapping	1	
Performs	Define TP	1	
Performs	Define Transformation Technology	1	
Performs	Deploy Software Component	1	



Relation Type	Related Element	Mul.	Note
Performs	Derive Communication Needs	1	
Performs	Extend Composition	1	
Performs	Extract the ECU Communication	1	
Performs	Flatten Software Composition	1	
Performs	Generate or Adjust System Flat Map	1	
Performs	Select Design Time Variant	1	
Performs	Select Software Component Imple- mentation	1	
Performs	Set System Root	1	
Performs	Define VFB Component Constraints	01	
Performs	Define VFB Composition Component	01	
Performs	Define VFB Constants	01	
Performs	Define VFB Top Level	01	
Performs	Extend Topology	01	
Performs	Extract ECU Rapid Prototyping Scenario	01	
Performs	Extract ECU System Timing	01	
Performs	Extract ECU System Variant Model	01	
Performs	Extract ECU Topology	01	
Performs	Generate or Adjust ECU Flat Map	01	

Table 3.38: System Engineer



Role	Non-AUTOSAR Sys	tem Int	egrator	
Package	AUTOSAR Root::M2 Elements::Roles	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles		
Brief Description		Responsibility for the quality of the description of the non-AUTOSAR system and its integration into the AUTOSAR process.		
Description	the Description of th the VFB Integration non-AUTOSAR syste	The non-AUTOSAR System Integrator is responsible for the quality of the Description of the non-AUTOSAR System, the correct definition of the VFB Integration Connector, and the integration of the non-AUTOSAR system into the AUTOSAR process via the translation of the non-AUTOSAR artifacts.		
Relation Type	Related Element	Mul.	Note	
Performs	Define VFB Integration Connector	1		
Performs	Translate Non- Autosar Descrip- tion to Autosar Description	1		

Table 3.39: Non-AUTOSAR System Integrator

Role	Rapid Prototyping Engineer		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles		
Brief Description			
Description			
Relation Type	Related Element	Mul.	Note
Performs	Define Rapid Prototyping Scenario	1	
Performs	Generate Rapid Prototyping Wrap- per	1	
Performs	Refine Rapid Prototyping Scenario	1	
Performs	Compile Atomic Software Compo- nent	01	

Table 3.40: Rapid Prototyping Engineer

Role	Safety Engineer		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Roles		
Brief Description			
Description	Responsibility for the safety relevant steps in the AUTOSAR development process		
Relation Type	Related Element Mul. Note		
Performs	Add Independence Relation	1	
Performs	Allocate Safety Measure	1	



Relation Type	Related Element	Mul.	Note
Performs	Allocate Safety Requirement	1	
Performs	Decompose Safety Requirement	1	
Performs	Define ASIL For A UTOSAR Element	1	
Performs	Define Safety Measure	1	
Performs	Define Safety Requirement	1	
Performs	Map Safety Requirement to Safety Measure	1	
Performs	Refine Safety Requirement	1	

Table 3.41: Safety Engineer

3.1.5 Tools

3.1.5.1 Compiler

Tool	Compiler		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Guidance		
Brief Description			
Description			
Kind			
Relation Type	Related Element	Mul.	Note
Used	Compile Atomic Software Compo- nent	1	
Used	Compile BSW Configuration Data	1	
Used	Compile BSW Core Code	1	
Used	Compile Configured BSW	1	
Used	Compile ECU Source Code	1	
Used	Compile Generated BSW	1	
Used	Compile Unconfigured BSW	1	
Used	Re-compile Component in ECU context	1	

Table 3.42: Compiler



3.1.5.2 Linker

Tool	Linker		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Guidance		
Brief Description			
Description			
Kind			
Relation Type	Related Element	Mul.	Note
Used	Generate ECU Ex- ecutable	1	
Used	Link ECU Code after Precompile Configuration	1	
Used	Link ECU Code during Link Time Configuration	1	
Used	Link ECU Code during Post-Build Time	1	

Table 3.43: Linker

3.1.6 Diagnostics

3.1.6.1 Work Products

Deliverable	Diagnostic Extract			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Diagnostics::Work Products			
Brief Description				
Description	Generic deliverable for defining diagnostic information. It is used in different roles (Diagnostic Extract categories).			
	In each role, this deliverable may contain variation points in its ARXML artifacts which need to be bound in later steps. If such variation points are present, the Diagnostic Description may optionally include PredefinedVariants in order to predefine variants for later selection and an Evaluated Variant Set.			
Kind				
Extended by	Diagnostic Abstract System Description, Diagnostic ECU Extract, Diagnostic System Extract			
Relation Type	Related Element Mul. Note			
Ticiation Type	Tiouted Lienett Mai. Note			

Table 3.44: Diagnostic Extract



Deliverable	Diagnostic Abstrac	t Syste	m Description
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Diagnostics::Work Products		
Brief Description			
Description	This deliverable represents a more or less high-level definition of diagnostic information that can be taken as a template for creating Diagnostic System Extract or Diagnostic ECU Extract. It corresponds to an Diagnostic Extract with DiagnosticContributionSet of category DIAGNOSTICS_ABSTRACT_SYSTEM_DESCRIPTION.		
Kind			
Extends	Diagnostic Extract		
Relation Type	Related Element	Mul.	Note
	Develop Diagnos- tic Requirements	0*	
Produced by	Develop Diagnos- tic Abstract System Description	1	

Table 3.45: Diagnostic Abstract System Description

Deliverable	Diagnostic System	Diagnostic System Extract		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Diagnostics::Work Products			
Brief Description				
Description	This deliverable represents concrete diagnostic information for several ECUs. It corresponds to an Diagnostic Extract with DiagnosticContributionSet of category DIAGNOSTICS_SYSTEM_EXTRACT.			
Kind				
Extends	Diagnostic Extract			
Relation Type	Related Element	Mul.	Note	
Produced by	Develop Applica- tion Software	0*		
Produced by	Develop Basic Software	0*		
Produced by	Develop Diagnos- tic Requirements	0*		
Consumed by	Develop Applica- tion Software	0*		
Consumed by	Develop Basic Software	0*		
Consumed by	Develop Diagnos- tic Requirements	0*		
Consumed by	Integrate Diagnos- tic Information	0*		

Table 3.46: Diagnostic System Extract



Deliverable	Diagnostic ECU Ex	tract	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Diagnostics::Work Products		
Brief Description			
Description	This deliverable represents concrete diagnostic information for a single ECUs. It corresponds to an Diagnostic Extract with DiagnosticContributionSet of category DIAGNOSTICS_ECU_EXTRACT.		
Kind			
Extends	Diagnostic Extract		
Relation Type	Related Element	Mul.	Note
Produced by	Integrate Diagnostic Information	1*	complete DE:
Produced by	Develop Diagnos- tic Requirements	0*	
Consumed by	Generate Base Ecu Configuration	01	
Consumed by	Generate Updated ECU Configuration	01	
Consumed by	Integrate Software for ECU	01	complete DE:
Consumed by	Prepare ECU Configuration	01	
Consumed by	Update ECU Configuration	01	
Consumed by	Integrate Diagnos- tic Information	0*	partially filled DE:

Table 3.47: Diagnostic ECU Extract

3.1.7 Safety

3.1.7.1 Tasks

3.1.7.1.1 Define Safety Requirement

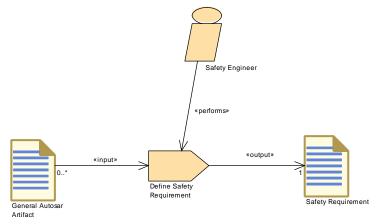


Figure 3.12: Define Safety Requirement



Task Definition	Define Safety Requirement		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Tasks		
Brief Description	Add Safety Requirer	nents to	work products.
Description	This task creates a safety requirement and sets the corresponding attributes such as ASIL. The allocation to an AUTOSAR element and the mapping to a safety measure are not part of this task.		
Relation Type	Related Element	Mul.	Note
Performed by	Safety Engineer	1	
Consumes	General Autosar Artifact	0*	
Produces	Safety Require- ment	1	

Table 3.48: Define Safety Requirement

3.1.7.1.2 Define Safety Measure

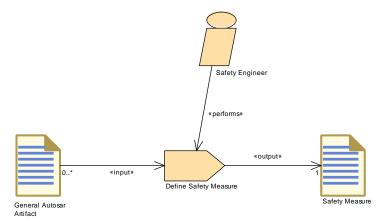


Figure 3.13: Define Safety Measure

Task Definition	Define Safety Measure		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Tasks		
Brief Description	Add Safety Measures to work products.		
Description	This task creates a safety measure and sets the corresponding attributes such as ASIL. The allocation to an AUTOSAR element and the mapping to a safety requirement are not part of this task.		
Relation Type	Related Element	Mul.	Note
Performed by	Safety Engineer	1	
Consumes	General Autosar Artifact	0*	
Produces	Safety Measure	1	

Table 3.49: Define Safety Measure



3.1.7.1.3 Define ASIL For AUTOSAR Element




Figure 3.14: Define ASIL For AUTOSAR Element

Task Definition	Define ASIL For AUTOSAR Element		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Tasks		
Brief Description	Provide ASIL attribute for AUTOSAR element.		
Description	According to the safety extensions, AUTOSAR elements can carry ASIL attributes if they are safety relevant. This task assigns the ASIL attribute to an AUTOSAR element. The assignment of the ASIL attribute can also be done for safety requirements and safety measures. This is covered by the tasks "Define Safety Requirement" and "Define Safety Measure".		
Relation Type	Related Element	Mul.	Note
Performed by	Safety Engineer	1	
Consumes	General Autosar Artifact	1	
Produces	General Autosar Artifact	1	

Table 3.50: Define ASIL For AUTOSAR Element



3.1.7.1.4 Refine Safety Requirement




Figure 3.15: Refine Safety Requirement

Task Definition	Refine Safety Requ	Refine Safety Requirement		
Package		AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Tasks		
Brief Description	_	Refine existing Safety Requirements by adding more detailed safety requirements and organize them in an appropriate hierarchy.		
Description	to appropriate AUTC The refinement will a hierarchy relation to This task adds the cooriginal requirement	If safety requirements are not detailed enough to allocate them directly to appropriate AUTOSAR elements, it is necessary to refine them first. The refinement will add new safety requirements which are in a hierarchy relation to existing safety requirements. This task adds the corresponding "REFINEMENT" relation between the original requirement and the newly created requirements. This task can be done on different levels, depending on the level of		
Relation Type	Related Element	Mul.	Note	
Performed by	Safety Engineer	1		
Consumes	Safety Require- ment	1	Original Safety Requirement:	
Produces	Safety Require- ment	1*	Refined Safety Requirement:	

Table 3.51: Refine Safety Requirement



3.1.7.1.5 Decompose Safety Requirement




Figure 3.16: Decompose Safety Requirement

Task Definition	Decompose Safety	Decompose Safety Requirement		
Package		AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Tasks		
Brief Description	, ,	Decompose existing Safety Requirements into independent Safety Requirements to tailor the ASIL.		
Description	requirement into two ASILs. This can be of for the resulting requ the corresponding IN Independence Relat	By ASIL decomposition it is possible to decompose a safety requirement into two new safety requirements with potentially lower ASILs. This can be done, if the independence (freedom of interference) for the resulting requirements can be demonstrated. The modeling of the corresponding INDEPENDENCE relation is covered by task "Add Independence Relation". This task adds the corresponding "DECOMPOSITION" reference.		
Relation Type	Related Element	Mul.	Note	
Performed by	Safety Engineer	1		
Consumes	Safety Require- ment	1	Initial Safety Requirement:	
Produces	Safety Require- ment	2	Decomposed Safety Requirements:	

Table 3.52: Decompose Safety Requirement



3.1.7.1.6 Allocate Safety Measure

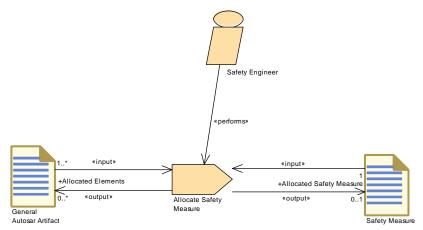


Figure 3.17: Allocate Safety Measure

Task Definition	Allocate Safety Me	asure			
Package	I	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Tasks			
Brief Description	Allocate Safety Mea	sure to A	AUTOSAR elements.		
Description	are allocated to AUT elements are involve adds the correspond be contained by the The allocation can b granularity of the safe	Safety measures which are safety mechanisms realized in AUTOSAR are allocated to AUTOSAR elements in order to describe what elements are involved in the provision of a safety measure. This task adds the corresponding "ALLOCATION" reference. The reference can be contained by the AUTOSAR element or by the safety measure. The allocation can be done on different levels, depending on the granularity of the safety measures and the availability of the appropriate elements in the model.			
Relation Type	Related Element	Mul.	Note		
Performed by	Safety Engineer	1			
Consumes	Safety Measure	1			
Consumes	General Autosar Artifact	1*			
Produces	Safety Measure	01	Allocated Safety Measure:		
Produces	General Autosar Artifact	0*	Allocated Elements:		

Table 3.53: Allocate Safety Measure



3.1.7.1.7 Allocate Safety Requirement

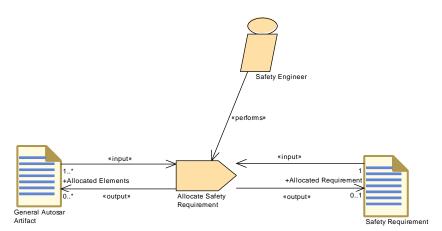


Figure 3.18: Allocate Safety Requirement

Task Definition	Allocate Safety Red	quireme	ent		
Package		AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Tasks			
Brief Description	Allocate Safety Requ	uiremen	t to AUTOSAR elements.		
Description	fulfill the needs of IS obtain their ASIL attraction development of the control o	Safety requirements are allocated to AUTOSAR elements in order to fulfill the needs of ISO 26262. By this allocation, AUTOSAR elements obtain their ASIL attribute (if not defined e.g. during previous development of the element). This task adds the corresponding allocation reference to the AUTOSAR element. The reference can be contained by the AUTOSAR element or by the safety requirement. The allocation can be done on different levels, depending on the granularity of the safety requirements and the availability of the			
Relation Type	Related Element	Mul.	Note		
Performed by	Safety Engineer	1			
Consumes	Safety Requirement	1			
Consumes	General Autosar Artifact	1*			
Produces	Safety Require- ment	01	Allocated Requirement:		
Produces	General Autosar Artifact	0*	Allocated Elements:		

Table 3.54: Allocate Safety Requirement



3.1.7.1.8 Map Safety Requirement to Safety Measure

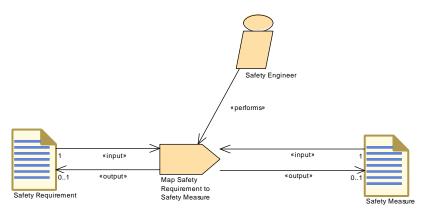


Figure 3.19: Map Safety Requirement to Safety Measure

Task Definition	Map Safety Requirement to Safety Measure			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Tasks			
Brief Description	Map Safety Require	ments to	Safety Measures	
Description	The mapping relates safety requirements with safety measures. This task creates the corresponding MAPS_TO relation. The mapping relation can either be contained by the safety requirement or by the safety measure. The mapping can be done on different levels, depending on the granularity of the safety requirements and the safety measures.			
Relation Type	Related Element	Mul.	Note	
Performed by	Safety Engineer	1		
Consumes	Safety Measure	1		
Consumes	Safety Require- ment	1		
Produces	Safety Measure	01		
Produces	Safety Require- ment	01		

Table 3.55: Map Safety Requirement to Safety Measure



3.1.7.1.9 Add Independence Relation




Figure 3.20: Add Independence Relation

Task Definition	Add Independence	Add Independence Relation		
Package	1	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Tasks		
Brief Description	Add Independence	elation t	to decomposed requirements.	
Description	requirements. The requirement and a refreedom from interfedecomposed requires Safety Requirement	This task establishes the INDEPENDENCE relation between requirements. The relation is established between a decomposed requirement and a requirement which express a means to achieve freedom from interference for the two requirements into which the decomposed requirement is decomposed by the task Decompose Safety Requirement. Obviously, this task is processed in the context of the decomposition of		
Relation Type	Related Element	Mul.	Note	
Performed by	Safety Engineer	1		
Consumes	Safety Require- ment	1*		
Produces	Safety Require- ment	1*	Linked Requirement:	

Table 3.56: Add Independence Relation



3.1.7.2 Work Products

3.1.7.2.1 Safety Extensions

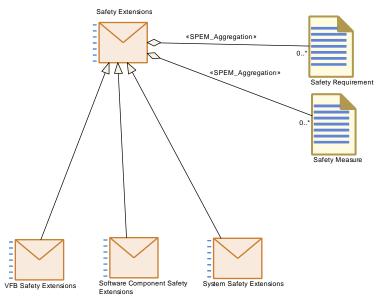


Figure 3.21: Safety Extensions

Deliverable	Safety Extensions			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Work Products			
Brief Description	Safety Extensions			
Description	This element represents an abstract deliverable containing all safety relevant artifacts. Several specializations of this deliverable are used to demonstrate the handling of safety extensions in specific development activities. The explicit separation of the safety information from the AUTOSAR models allows an independent exchange and processing of them.			
Kind	Delivered			
Extended by	Software Component Safety Extensions, System Safety Extensions, V FB Safety Extensions			
Relation Type	Related Element Mul. Note			
Aggregates	Safety Measure	0*		
Aggregates	Safety Require- ment	0*		

Table 3.57: Safety Extensions



Deliverable	VFB Safety Extensions			
Package	I	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Work Products		
Brief Description	Vfb Safety Extension	าร		
Description	This deliverable confederation	This deliverable contains all safety information related to VFB elements.		
Kind	Delivered	Delivered		
Extends	Safety Extensions			
Relation Type	Related Element	Mul.	Note	
Produced by	Define VFB Safety Information	1		
Consumed by	Define Software Component Safety Information	1		
Consumed by	Define System Safety Information	1		

Table 3.58: VFB Safety Extensions

Deliverable	Software Component Safety Extensions			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Work Products			
Brief Description	Software Componen	t Safety	Extensions	
Description	This deliverable contains all safety information related to software components.			
Kind	Delivered			
Extends	Safety Extensions			
Relation Type	Related Element	Mul.	Note	
Produced by	Define Software Component Safety Information	1		
Consumed by	Define System Safety Information	1		

Table 3.59: Software Component Safety Extensions

Deliverable	System Safety Extensions		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Work Products		
Brief Description	System Safety Exter	nsions	
Description	This deliverable contains all safety information related to system elements (see Deliverable "System Description" for more details).		
Kind	Delivered		
Extends	Safety Extensions		
Relation Type	Related Element Mul. Note		
Produced by	Define System Safety Information	1	

Table 3.60: System Safety Extensions



3.1.7.2.2 Safety Requirement

Artifact	Safety Requirement				
Package	AUTOSAR Root::M2 Elements::Safety::W		dology::Methodology Library::Common		
Brief Description	Safety Requirement	011(110)	34010		
Description	This artifact represents a safety requirement and the corresponding ASIL attribute. ISO 26262 defines a hierarchy of safety requirements: safety goals, technical, hardware and software. Furthermore, it might be the case that safety requirements are specified outside the AUTOSAR model (external) and are only referenced. Thus, the safety requirement can have one of the following categories: • SAFETY GOAL				
	SAFETY_FUN		IAL		
	SAFETY_TEG				
	SAFETY_SOI	FTWAR	E		
	SAFETY_HAI	RDWAR	E		
	SAFETY_EXT	ΓERNAL	-		
	For details refer to ISO 26262-3, 4, 9 and TPS_SafetyExtensions document.				
Kind	AUTOSAR XML				
Relation Type	Related Element	Mul.	Note		
Aggregated by	Safety Extensions	0*	10(1)		
Produced by	Decompose Safety Requirement	2	Decomposed Safety Requirements:		
Produced by	Define Safety Requirement	1			
Produced by	Add Independence Relation	1*	Linked Requirement:		
Produced by	Refine Safety Requirement	1*	Refined Safety Requirement:		
Produced by	Allocate Safety Requirement	01	Allocated Requirement:		
Produced by	Map Safety Requirement to Safety Measure	01			
Consumed by	Allocate Safety Requirement	1			
Consumed by	Decompose Safety Requirement	1	Initial Safety Requirement:		
Consumed by	Map Safety Requirement to Safety Measure	1			
Consumed by	Refine Safety Requirement	1	Original Safety Requirement:		



Relation Type	Related Element	Mul.	Note
Consumed by	Add Independence Relation	1*	
Use meta model element	StructuredReq	1	

Table 3.61: Safety Requirement

3.1.7.2.3 Safety Measure

Artifact	Safety Measure		Safety Measure			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Common Elements::Safety::Work Products					
Brief Description	Safety Measure					
Description	This artifact represents a safety measure. A safety measure is an activity or solution to avoid systematic failures and to detect random hardware failures or control failures (see ISO 26262).					
	The safety measure	can hav	re one of the following categories:			
	• SAFETY ME	ASURE				
	SAFETY_ME	CHANIS	SM			
	0711 E 1 1 _ WE	011/11/10	· · · · · · · · · · · · · · · · · · ·			
	For further details re	fer to TF	PS_SafetyExtensions document.			
Kind	AUTOSAR XML					
Relation Type	Related Element	Mul.	Note			
Aggregated by	Safety Extensions	0*				
Produced by	Define Safety Measure	1				
Produced by	Allocate Safety Measure	01	Allocated Safety Measure:			
Produced by	Map Safety Requirement to Safety Measure	01				
Consumed by	Allocate Safety Measure	1				
Consumed by	Map Safety Requirement to Safety Measure	1				
Use meta model element	TraceableText	1				

Table 3.62: Safety Measure

3.2 Virtual Functional Bus

This chapter contains the definition of work products and tasks used for the development of a VFB system. For the definition of the relevant meta-model elements refer to [5], for the VFB concepts refer to [4].



3.2.1 Tasks

3.2.1.1 Define VFB Top Level

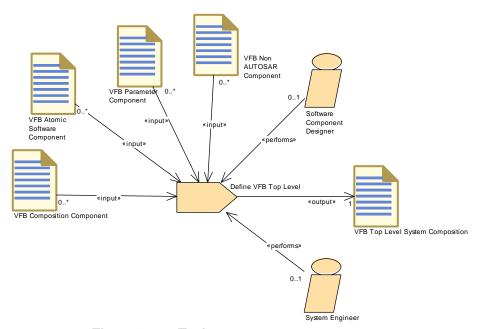


Figure 3.22: Task Define VFB Top Level

Task Definition	Define VFB Top Level		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks		
Brief Description	Define the top level	VFB con	nposition of a concrete system.
Description	Define the top level	composi	tion of a VFB system.
Relation Type	Related Element	Mul.	Note
Performed by	Software Component Designer	01	
Performed by	System Engineer	01	
Consumes	VFB Interfaces	1*	
Consumes	VFB Types	1*	
Consumes	VFB Atomic Soft- ware Component	0*	
Consumes	VFB Composition Component	0*	
Consumes	VFB Modes	0*	
Consumes	VFB Non AUTOSA R Component	0*	
Consumes	VFB Parameter Component	0*	
Produces	VFB Top Level System Composi- tion	1	

Table 3.63: Define VFB Top Level



3.2.1.2 Define VFB Composition Component

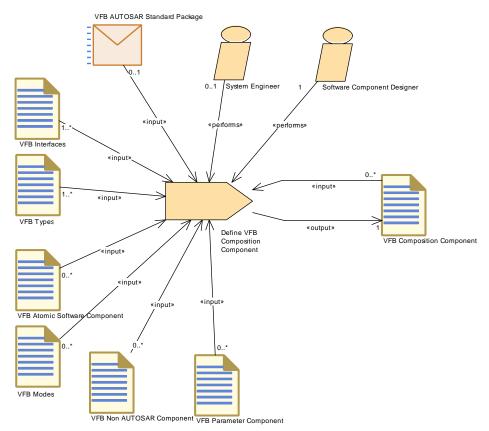


Figure 3.23: Task Define VFB Composition Component

Task Definition	Define VFB Composition Component				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks				
Brief Description	Define a Composition of VFB Software Components, i.e. a ComponentTypes which contains other Component Types.				
Description	Define a Composition of VFB Software Components, i.e. a ComponentType which contains other Component Types. Iteration of this task can create a complete VFB system without the Atomic Software Components itself.				
Relation Type	Related Element	Mul.	Note		
Performed by	Software Component Designer	1			
Performed by	System Engineer	01			
Consumes	VFB Interfaces	1*			
Consumes	VFB Types	1*			
Consumes	VFB AUTOSAR Standard Package	01	Use port blueprints in order to create ports with standardized application interfaces.		
Consumes	VFB Atomic Soft- ware Component	0*			
Consumes	VFB Composition Component	0*			



Relation Type	Related Element	Mul.	Note
Consumes	VFB Modes	0*	
Consumes	VFB Non AUTOSA R Component	0*	
Consumes	VFB Parameter Component	0*	
Produces	VFB Composition Component	1	

Table 3.64: Define VFB Composition Component

3.2.1.3 Extend Composition

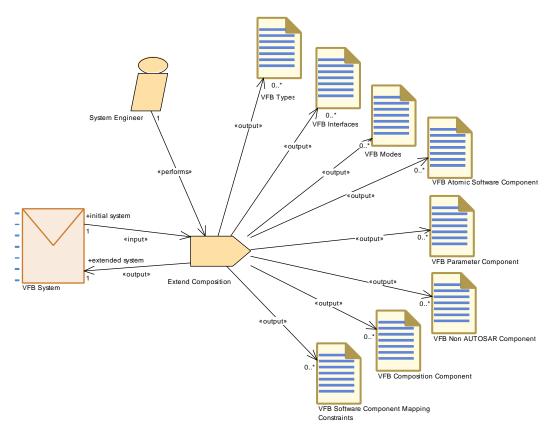


Figure 3.24: Task Extend Composition



Task Definition	Extend Composition	Extend Composition			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks				
Brief Description	I	Extend a software composistion with further compositions and atomic software components.			
Description	extending an existing could be software could be software could be software could be software could be software. It is a could be software	This tasks describes the refinement of a delivered VFB System by extending an existing composition with further sub-elements, which could be software components (Atomic Software Components as well as Compositions), connectors or port groups, plus the related interfaces, data types and modes. The main use case is the refinement of the VFB description of a sub-system: New elements are added but the original delivery is not changed.			
Relation Type	Related Element	Mul.	Note		
Performed by	System Engineer	1			
Consumes	VFB System	1	initial system:		
Produces	VFB System	1	extended system:		
Produces	VFB Atomic Soft- ware Component	0*			
Produces	VFB Composition Component	0*			
Produces	VFB Interfaces	0*			
Produces	VFB Modes	0*			
Produces	VFB Non AUTOSA R Component	0*			
Produces	VFB Parameter Component	0*			
Produces	VFB Software Component Map- ping Constraints	0*			
Produces	VFB Types	0*			

Table 3.65: Extend Composition



3.2.1.4 Define VFB Component Constraints

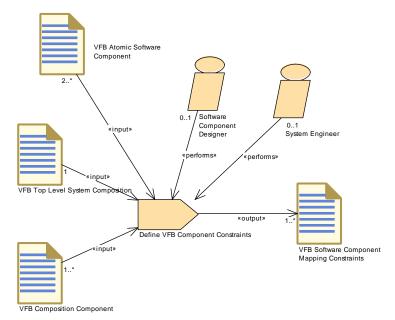


Figure 3.25: Task Define VFB Component Constraints

Task Definition	Define VFB Component Constraints			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks			
Brief Description	Define which components need to be deployed together, and which need to be deployed separately.			
Description		Define which components need to be deployed together, and which need to be deployed separately, independent of any topology.		
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Designer	01		
Performed by	System Engineer	01		
Consumes	VFB Atomic Soft- ware Component	2*		
Consumes	VFB Top Level System Composi- tion	1		
Consumes	VFB Composition Component	1*		
Produces	VFB Software Component Map- ping Constraints	1*		

Table 3.66: Define VFB Component Constraints



3.2.1.5 Define VFB Application Software Component

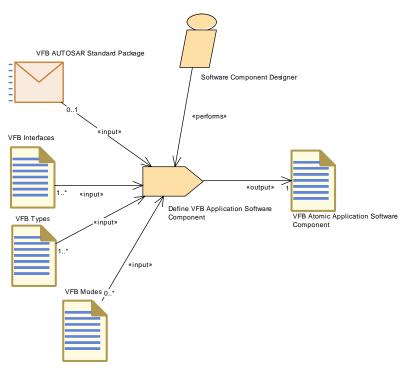


Figure 3.26: Task Define VFB Application Software Component

Task Definition	Define VFB Application Software Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks			
Brief Description	Define an Application	nSoftwa	reComponentType on VFB level	
Description	Define an ApplicationSwComponentType on VFB level. (i.e. without Internal Behavior and Implementation).			
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Designer	1		
Consumes	VFB Interfaces	1*		
Consumes	VFB Types	1*		
Consumes	VFB AUTOSAR Standard Package	01	Use port blueprints in order to create ports with standardized application interfaces.	
Consumes	VFB Modes	0*		
Produces	VFB Atomic Application Software Component	1		

Table 3.67: Define VFB Application Software Component



3.2.1.6 Define VFB Sensor or Actuator Component

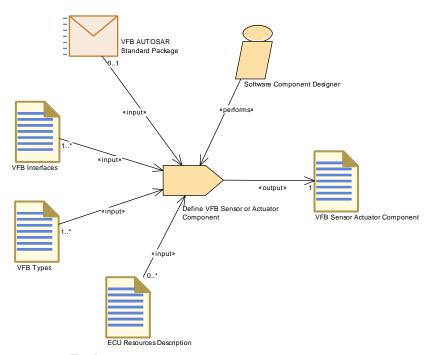


Figure 3.27: Task Define VFB Sensor or Actuator Component

Task Definition	Define VFB Sensor or Actuator Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks			
Brief Description	Define a VFB Senso	r or Acti	uator Comnponent.	
Description	Define a SensorActuatorSwComponentType on VFB level. (i.e. without Internal Behavior and Implementation). In addition to defining the ports, references to the required sensor/actuator hardrware shall be specified.			
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Designer	1		
Consumes	VFB Interfaces	1*		
Consumes	VFB Types	1*		
Consumes	VFB AUTOSAR Standard Package	01	Use port blueprints in order to create ports with standardized application interfaces.	
Consumes	ECU Resources Description	0*		
Produces	VFB Sensor Actu- ator Component	1		

Table 3.68: Define VFB Sensor or Actuator Component



3.2.1.7 Define VFB Parameter Component

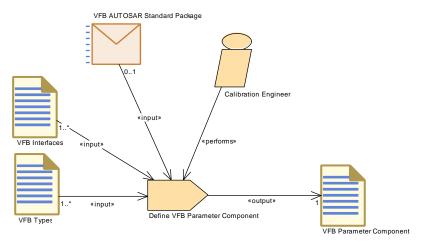


Figure 3.28: Task Define VFB Parameter Component

Task Definition	Define VFB Parameter Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks			
Brief Description	Define a VFB Parameter Component.			
Description	Define a VFB Param	eter Co	mponent.	
Relation Type	Related Element	Mul.	Note	
Performed by	Calibration Engi- neer	1		
Consumes	VFB Interfaces	1*		
Consumes	VFB Types	1*		
Consumes	VFB AUTOSAR Standard Package	01	Use port blueprints in order to create ports with standardized application interfaces.	
Produces	VFB Parameter Component	1		

Table 3.69: Define VFB Parameter Component



3.2.1.8 Define ECU Abstraction Component

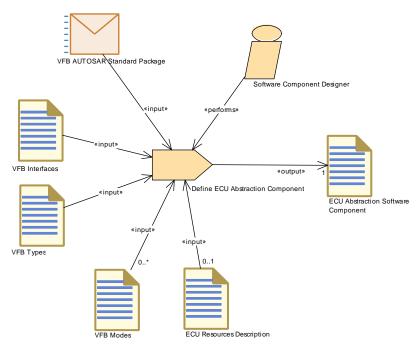


Figure 3.29: Task Define ECU Abstraction Component

Task Definition	Define ECU Abstraction Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks			
Brief Description	Define an EcuAbstractionSoftwareComponentType on VFB level.			
Description	Define a EcuAbstractionSwComponentType on VFB level. (i.e. without Internal Behavior and Implementation). In addition to the defining the ports, references to required ECU or processor hardware elements shall be specified.			
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Designer	1		
Consumes	VFB AUTOSAR Standard Package	1	Use port blueprints in order to create ports with standardized application interfaces.	
Consumes	VFB Interfaces	1		
Consumes	VFB Types	1		
Consumes	ECU Resources Description	01		
Consumes	VFB Modes	0*		
Produces	ECU Abstraction Software Compo- nent	1		

Table 3.70: Define ECU Abstraction Component



3.2.1.9 Define Complex Driver Component

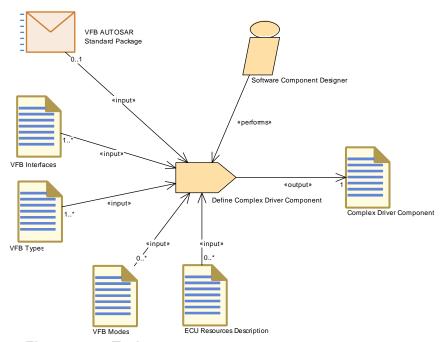


Figure 3.30: Task Define Complex Driver Component

Task Definition	Define Complex Dr	Define Complex Driver Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks				
Brief Description	Define a ComplexDe	eviceDriv	verSwComponentType on VFB level.		
Description	without Internal Beh	Define a ComplexDeviceDriverSwComponentType on VFB level. (i.e. without Internal Behavior and Implementation). In addition to the defining the ports, references to the required ECU or processor hardware elements shall be specified.			
Relation Type	Related Element	Mul.	Note		
Performed by	Software Component Designer	1			
Consumes	VFB Interfaces	1*			
Consumes	VFB Types	1*			
Consumes	VFB AUTOSAR Standard Package	01	Use port blueprints in order to create ports with standardized application interfaces.		
Consumes	ECU Resources Description	0*			
Consumes	VFB Modes	0*			
Produces	Complex Driver Component	1			

Table 3.71: Define Complex Driver Component



3.2.1.10 Define VFB NvBlock Software Component

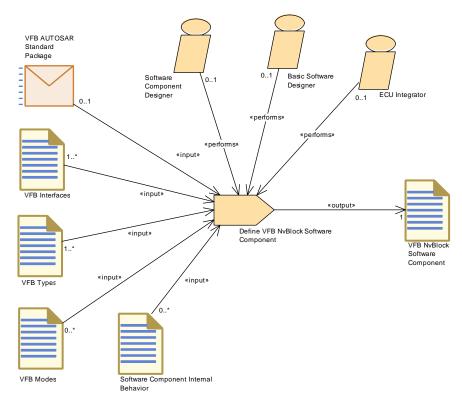


Figure 3.31: Task Define VFB NvBlock Software Component

Task Definition	Define VFB NvBlock Software Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks			
Brief Description				
Description	Define an NvBlockSwComponentType on VFB level. The NvBlockSwComponentType defines non volatile data which can be shared between SwComponentPrototypes. The non volatile data of the NvBlockSwComponentType are accessible via provided and required ports.			
Relation Type	Related Element	Mul.	Note	
Performed by	Basic Software Designer	01		
Performed by	ECU Integrator	01		
Performed by	Software Component Designer	01		
Consumes	VFB Interfaces	1*		
Consumes	VFB Types	1*		
Consumes	VFB AUTOSAR Standard Package	01		
Consumes	Software Component Internal Behavior	0*	This input is required to collect the requirements for the NvBlockNeeds from the using application software.	
Consumes	VFB Modes	0*		



Relation Type	Related Element	Mul.	Note
Produces	VFB NvBlock Soft- ware Component	1	

Table 3.72: Define VFB NvBlock Software Component

3.2.1.11 Define Wrapper Components to Integrate Legacy Software




Figure 3.32: Task Define Wrapper Components to Integrate Legacy Software

Task Definition	Define Wrapper Components to Integrate Legacy Software				
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks			
Brief Description	Define a wrapper component used to represent legacy software that is integrated into an AUTOSAR system.				
Description	integrated into an Al	Define a wrapper component used to represent legacy software that is integrated into an AUTOSAR system. For the VFB system, this mainly means to define the corresponding port interfaces and data elements.			
Relation Type	Related Element	Mul.	Note		
Performed by	Software Component Designer	1			
Consumes	VFB AUTOSAR Standard Package	01	Use port blueprints in order to create ports with standardized application interfaces.		
Consumes	VFB Interfaces	0*			
Consumes	VFB Modes	0*			
Consumes	VFB Types	0*			
Produces	VFB Non AUTOSA R Component	1			

Table 3.73: Define Wrapper Components to Integrate Legacy Software



3.2.1.12 Define VFB Interfaces




Figure 3.33: Task Define VFB Interfaces

Task Definition	Define VFB Interfac	Define VFB Interfaces		
Package	AUTOSAR Root::M2	2::Metho	dology::Methodology Library::VFB::Tasks	
Brief Description	Define a set of Port	Interface	e required by a system.	
Description		Define a set of Port Interfaces required by a VFB system, to describe the communication of data via SWC ports.		
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Designer	1		
Consumes	VFB Types	1*		
Consumes	VFB AUTOSAR Standard Package	01	Use standardized Port Interfaces as blueprints (as far as applicable) to create the corresponding elements of the actual project.	
Produces	VFB Interfaces	1*		

Table 3.74: Define VFB Interfaces



3.2.1.13 Define VFB Types

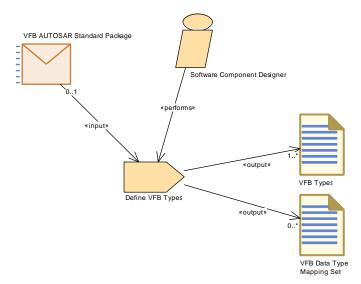


Figure 3.34: Task Define VFB Types

Task Definition	Define VFB Types		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks		
Brief Description	Define a set of data defined by AUTOSA		quired by a system, but not already
Description	Define a set of Autosar Data Types and related elements as far as visible on the VFB. Standardized types can be used as input in order to copy and refine them. The VFB Types will be used for specifying types of DataElements in Sender-Receiver PortInterfaces and argument/return values of Client-Server PortInterfaces.		
	This task inludes (optionally) also the creation of a VFB Data Type mapping Set between application and implementation data types.		
Relation Type	Related Element	Mul.	Note
Performed by	Software Component Designer	1	
Consumes	VFB AUTOSAR Standard Package	01	Use standardized elements (e.g. Data Types, Compu Methods) as blueprints (as far as applicable) to create the corresponding elements of the actual project.
Produces	VFB Types	1*	
Produces	VFB Data Type Mapping Set	0*	

Table 3.75: Define VFB Types



3.2.1.14 Define VFB Modes




Figure 3.35: Task Define VFB Modes

Task Definition	Define VFB Modes		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks		
Brief Description	Define modes that are used by the VFB components.		
Description	Define modes (mode groups and the modes they contain) that are used by the VFB components.		
Relation Type	Related Element Mul. Note		
Performed by	Software Component Designer	1	
Produces	VFB Modes	1*	

Table 3.76: Define VFB Modes



3.2.1.15 Define VFB Constants

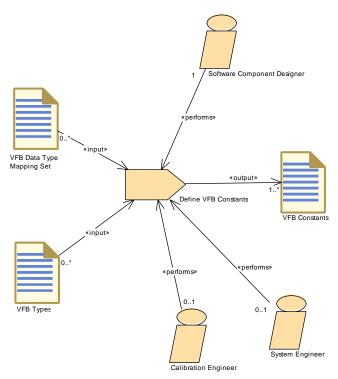


Figure 3.36: Task Define VFB Constants

Task Definition	Define VFB Consta	Define VFB Constants		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks			
Brief Description	Define one or more	VFB Co	nstants.	
Description	Define one or more VFB Constants as standalone artifact. Such constants can be referred in the specification of inital values at several places in the VFB descrption, such as port interfaces or declaration of local parameters or variables.			
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Designer	1		
Performed by	Calibration Engi- neer	01		
Performed by	System Engineer	01		
Consumes	VFB Data Type Mapping Set	0*		
Consumes	VFB Types	0*		
Produces	VFB Constants	1*		

Table 3.77: Define VFB Constants



3.2.1.16 Define VFB Timing

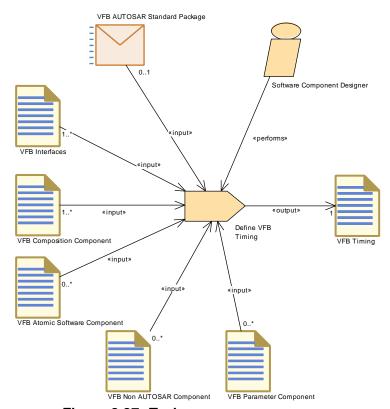


Figure 3.37: Task Define VFB Timing

Task Definition	Define VFB Timing		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks		
Brief Description	,	_	Description and TimingConstraints) for an tor a Composition Component
Description			Description and TimingConstraints) for an tor a Composition Component
Relation Type	Related Element	Mul.	Note
Performed by	Software Component Designer	1	
Consumes	VFB Composition Component	1*	
Consumes	VFB Interfaces	1*	
Consumes	VFB AUTOSAR Standard Package	01	
Consumes	VFB Atomic Soft- ware Component	0*	
Consumes	VFB Non AUTOSA R Component	0*	
Consumes	VFB Parameter Component	0*	
Produces	VFB Timing	1	

Table 3.78: Define VFB Timing



3.2.1.17 Define VFB Variants

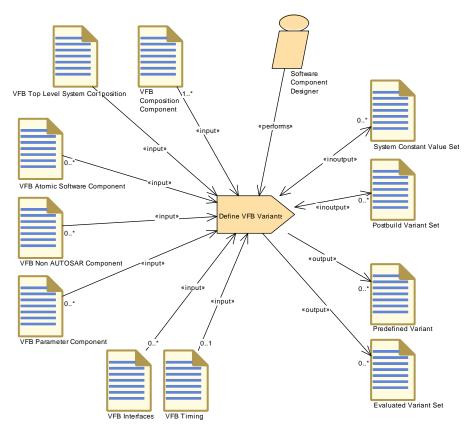


Figure 3.38: Task Define VFB Variants

Task Definition	Define VFB Variant	S	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks		
Brief Description	Define variants for th	ne artifad	cts of a VFB system.
Description	Define one or more variants for the artifacts of a VFB system. Defining one variant means creating a Predefined Variant related to the settings used by the VFB elements in scope. To do so, this task can make use of existing System Constant Value Sets and/or Postbuid Variant Sets or define new ones. Several Predefined Variants can be combined to one Evaluated Variant Set.		
Relation Type	Related Element	Mul.	Note
Performed by	Software Component Designer	1	
Consumes	VFB Top Level System Composi- tion	1	
Consumes	VFB Composition Component	1*	
Consumes	VFB Timing	01	
Consumes	VFB Atomic Soft- ware Component	0*	



Relation Type	Related Element	Mul.	Note
Consumes	VFB Interfaces	0*	
Consumes	VFB Non AUTOSA R Component	0*	
Consumes	VFB Parameter Component	0*	
In/out	Postbuild Variant Set	0*	
In/out	System Constant Value Set	0*	
Produces	Evaluated Variant Set	0*	
Produces	Predefined Variant	0*	

Table 3.79: Define VFB Variants

3.2.1.18 Define VFB Integration Connector

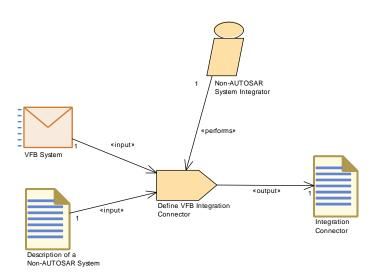


Figure 3.39: Task Define VFB Integration Connector



Task Definition	Define VFB Integra	tion Co	nnector	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks			
Brief Description	Define how the non- AUTOSAR system.	Define how the non-AUTOSAR system shall be connected to the AUTOSAR system.		
Description	the non-AUTOSAR s and format depend of defined.	The VFB Integration Connector is used to represent the connection of the non-AUTOSAR system and the AUTOSAR system. Its contents and format depend on the way in which the non-AUTOSAR system is defined.		
	connection are brough When the requirement be translated to the food only informally defined to the food only informally defined to the food of the fo	To define the VFB Integration Connector the requirements on the connection are brought into the format of the Integration Connector. When the requirements are defined in a proprietary format the have to be translated to the format of the Integration Connector. When they are only informally defined or are even more tangible the format of the Integration Connector can be used to elicit, formalize, and analyze the		
Relation Type	Related Element	Mul.	Note	
Performed by	Non-AUTOSAR System Integrator	1		
Consumes	Description of a Non-AUTOSAR System	1		
Consumes	VFB System	1		
Produces	Integration Con- nector	1		
Predecessor	Translate Non- Autosar Descrip- tion to Autosar Description	1		

Table 3.80: Define VFB Integration Connector



3.2.1.19 Translate Non-AUTOSAR Description to AUTOSAR Description

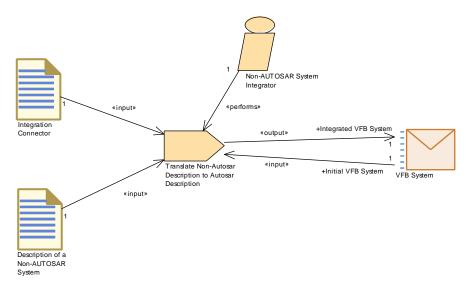


Figure 3.40: Task Translate Non-AUTOSAR Description to AUTOSAR Description

Task Definition	Translate Non-Auto	sar Des	scription to Autosar Description	
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Tasks		
Brief Description		Translate the description of the non-AUTOSAR system into a semantically equivalent AUTOSAR description (template).		
Description	into the AUTOSAR p system must be tran	In order to incorporate the development of the non-AUTOSAR system into the AUTOSAR process the Description of the non-AUTOSAR system must be translated into an AUTOSAR format. Typically this will be achieved by a translation tool, although in principle it might also be done manually.		
Relation Type	Related Element	Mul.	Note	
Performed by	Non-AUTOSAR System Integrator	1		
Consumes	Description of a Non-AUTOSAR System	1		
Consumes	Integration Con- nector	1		
Consumes	VFB System	1	Initial VFB System:	
Produces	VFB System	1	Integrated VFB System:	

Table 3.81: Translate Non-Autosar Description to Autosar Description



3.2.2 Work Products

3.2.2.1 VFB System

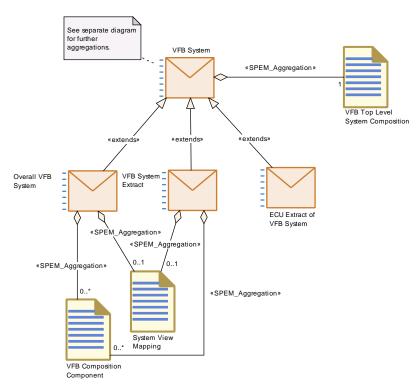


Figure 3.41: Overview on the different roles of Deliverables based on VFB System



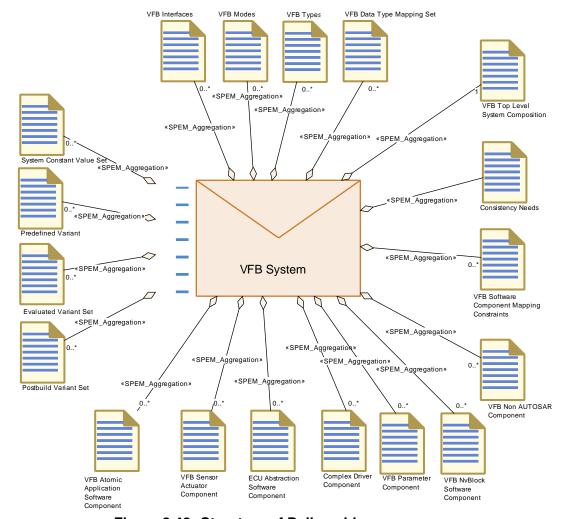


Figure 3.42: Structure of Deliverable VFB System

Deliverable	VFB System				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products				
Brief Description	Complete VFB view of a concrete system.				
Description	Delivery of a VFB view of a concrete system. i.e. the top level composition and all nested compositions and components. This element is the basis for several extensions according to the scope of the VFB which can be an Overall System, a System Extract or an ECU Extract. This deliverable may contain variation points in its XML artifacts which need to be bound in later steps of the methodology. If such variation points are present, the delivered VFB system may optionally include PredefinedVariants in order to predefine variants for later selection and an Evaluated Variant Set.				
Kind	Delivered				
Extended by	ECU Extract of VFB System, Overall VFB System, VFB System Extract				
Relation Type	Related Element Mul. Note				



Relation Type	Related Element	Mul.	Note
Aggregates	Consistency Needs	1	Correlation between a group of RunnableEntitys and a group of DataPrototypes.
Aggregates	VFB Top Level System Composi- tion	1	
Aggregates	Complex Driver Component	0*	
Aggregates	ECU Abstraction Software Compo- nent	0*	
Aggregates	Evaluated Variant Set	0*	
Aggregates	Postbuild Variant Set	0*	
Aggregates	Predefined Variant	0*	
Aggregates	System Constant Value Set	0*	
Aggregates	VFB Atomic Application Software Component	0*	
Aggregates	VFB Data Type Mapping Set	0*	
Aggregates	VFB Interfaces	0*	
Aggregates	VFB Modes	0*	
Aggregates	VFB Non AUTOSA R Component	0*	
Aggregates	VFB NvBlock Soft- ware Component	0*	
Aggregates	VFB Parameter Component	0*	
Aggregates	VFB Sensor Actuator Component	0*	
Aggregates	VFB Software Component Map- ping Constraints	0*	
Aggregates	VFB Types	0*	
Produced by	Extend Composition	1	extended system:
Produced by	Translate Non- Autosar Descrip- tion to Autosar Description	1	Integrated VFB System:



Relation Type	Related Element	Mul.	Note
Consumed by	Define Partial Flat Map	1	Various parts of a given VFB system will be used as input:
			 Refer to parameters and variables in port interfaces and their data types.
			 In order to define unique names, also other the component definitions not in the scope of the partial flat map might be checked.
			 Set a link to the context of the Flat Map, e.g. a VFB Composition.
Consumed by	Define VFB Integration Connector	1	
Consumed by	Define VFB Safety Information	1	
Consumed by	Extend Composition	1	initial system:
Consumed by	Extract the ECU Communication	1	Need as input in order to set up the Data Mapping.
Consumed by	Generate or Adjust System Flat Map	1	
Consumed by	Translate Non- Autosar Descrip- tion to Autosar Description	1	Initial VFB System:

Table 3.82: VFB System

3.2.2.2 Overall VFB System

Deliverable	Overall VFB System		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products		
Brief Description			
Description	Deliverable containing an overall VFB description. It must contain the VFB Top Level System Composition of the complete system.		
Kind	Delivered		
Extends	VFB System		
Relation Type	Related Element	Mul.	Note
Aggregated by	Abstract System Description	1	
Aggregated by	System Configura- tion Description	1	
Aggregated by	System Constraint Description	01	



Relation Type	Related Element	Mul.	Note
Aggregates	System View Map- ping	01	The Overall VFB System aggregates a potential mapping to the abstract or functional view of the system.
Aggregates	VFB Composition Component	0*	Further compositions below the top level composition.
Produced by	Develop a VFB System Descrip- tion	1	
Consumed by	Define Software Component Safety Information	1	
Consumed by	Develop Application Software	1	The application software needs to refer to the relevant elements of the overall VFB system such as Software Component Types, Port Interfaces and Data Types.
Consumed by	Develop System	01	Usually the System refers to elements of an overall VFB descriptions. But for the description of a legacy system, this input might be empty.
Consumed by	Flatten Software Composition	01	Read relevant elements starting from VFB Top Level System Composition in case transformation starts with the full system.
Consumed by	Generate or Adjust ECU Flat Map	01	Used to set the upstream references in case one starts from a complete system.

Table 3.83: Overall VFB System

3.2.2.3 VFB System Extract

Deliverable	VFB System Extract		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products		
Brief Description	The VFB description for the partial system.		
Description	The VFB description for a sub-system. It contains only those software components which belong to this sub-system. It should contain a VFB Top Level System Composition which has unconnected ports reflecting the connection points to the outer system.		
Kind	Delivered		
Extends	VFB System		
Relation Type	Related Element Mul. Note		
Aggregated by	System Extract	1	
Aggregates	System View Map- ping	01	The VFB System Extract aggregates a potential mapping to the abstract or functional view of the system.
Aggregates	VFB Composition Component	0*	Further compositions below the top level composition.



Relation Type	Related Element	Mul.	Note
Consumed by	Flatten Software Composition	01	Read relevant elements starting from VFB Top Level System Composition in case transformation starts from the system extract.
Consumed by	Generate or Adjust ECU Flat Map	01	Used to set the upstream references in case one starts from a system extract.

Table 3.84: VFB System Extract

3.2.2.4 VFB Top Level System Composition

Artifact	VFB Top Level System Composition		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products		
Brief Description	Highest Level Composition consisting of all components that make up the Virtual Functional Bus.		
Description	Highest Level Composition consisting of all components and their connectors that make up the VFB System Deliverable.		
	This composition is not allowed to have ports if it represents the top level composition of an Overall VFB System, but it may have unconnected ports (and port groups) if it is at the top of a System Extract or ECU Extract.		
Kind	AUTOSAR XML	AUTOSAR XML	
Relation Type	Related Element	Mul.	Note
Aggregated by	VFB System	1	
Produced by	Define VFB Top Level	1	
Consumed by	Assign Top Level Composition	1	
Consumed by	Define Software Component Map- ping Constraints	1	
Consumed by	Define VFB Component Constraints	1	
Consumed by	Define VFB Variants	1	
Consumed by	Deploy Software Component	1	
Use meta model element	CompositionSw ComponentType	1	

Table 3.85: VFB Top Level System Composition

3.2.2.5 VFB Composition Component



Artifact	VFB Composition Component		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work		
	Products		
Brief Description	Describes a set of VFB CompositionTypes.		
Description	Describes a set of CompositionComponentTypes, which may be nested. A VFB composition aggregates component types to encapsulate and abstract subsystem functionality. Compositions contain instances of components (other compositions and atomic components), as well as the connectors between them.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	Delivered Atomic Software Compo- nents	0*	In case the delivered atomic components make up one or more VFB Compositions, the composition description(s) shall be included in the delivery.
Aggregated by	Overall VFB System	0*	Further compositions below the top level composition.
Aggregated by	VFB System Ex- tract	0*	Further compositions below the top level composition.
Produced by	Define VFB Composition Component	1	
Produced by	Extend Composition	0*	
Consumed by	Set System Root	1	Only the reference to the artifact is needed
Consumed by	Define VFB Component Constraints	1*	
Consumed by	Define VFB Timing	1*	
Consumed by	Define VFB Variants	1*	
Consumed by	Define VFB Composition Component	0*	
Consumed by	Define VFB Top Level	0*	
Use meta model element	CompositionSw ComponentType	1	
Use meta model element	SwComponent Type	1	

Table 3.86: VFB Composition Component



3.2.2.6 VFB AUTOSAR Standard Package




Figure 3.43: Structure of Deliverable VFB AUTOSAR Standard Package

Deliverable	VFB AUTOSAR Sta	VFB AUTOSAR Standard Package				
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products				
Brief Description		Package with standardized AUTOSAR DataTypes, PortInterfaces, ComponentTypes (may include compositions), etc. on VFB level.				
Description	This deliverable is remethodology.	Package with standardized AUTOSAR elements needed on VFB level. This deliverable is released by AUTOSAR and is readonly within the				
Kind	Delivered					
Relation Type	Related Element	Mul.	Note			
Aggregates	AUTOSAR Plat- form Types	1				
Aggregates	AUTOSAR Specification of Application Interfaces	1				
Aggregates	AUTOSAR Standard Types	1				
Consumed by	Define ECU Abstraction Component	1	Use port blueprints in order to create ports with standardized application interfaces.			
Consumed by	Develop a VFB System Descrip- tion	1*				
Consumed by	Develop an Ab- stract System Description	1*				
Consumed by	Define Atomic Software Com- ponent Internal Behavior	01	Use standardized elements (e.g. Data Types) as blueprints (as far as applicable) to create the corresponding elements of the actual project.			



Relation Type	Related Element	Mul.	Note
Consumed by	Define Complex Driver Component	01	Use port blueprints in order to create ports with standardized application interfaces.
Consumed by	Define VFB Application Software Component	01	Use port blueprints in order to create ports with standardized application interfaces.
Consumed by	Define VFB Composition Component	01	Use port blueprints in order to create ports with standardized application interfaces.
Consumed by	Define VFB Interfaces	01	Use standardized Port Interfaces as blueprints (as far as applicable) to create the corresponding elements of the actual project.
Consumed by	Define VFB Nv Block Software Component	01	
Consumed by	Define VFB Pa- rameter Compo- nent	01	Use port blueprints in order to create ports with standardized application interfaces.
Consumed by	Define VFB Sensor or Actuator Component	01	Use port blueprints in order to create ports with standardized application interfaces.
Consumed by	Define VFB Timing	01	
Consumed by	Define VFB Types	01	Use standardized elements (e.g. Data Types, Compu Methods) as blueprints (as far as applicable) to create the corresponding elements of the actual project.
Consumed by	Define Wrapper Components to Integrate Legacy Software	01	Use port blueprints in order to create ports with standardized application interfaces.
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	01	
Consumed by	Generate Compo- nent Header File in Vendor Mode	01	
Consumed by	Generate Component Prebuild Data Set	01	

Table 3.87: VFB AUTOSAR Standard Package



3.2.2.7 AUTOSAR Specification of Application Interfaces

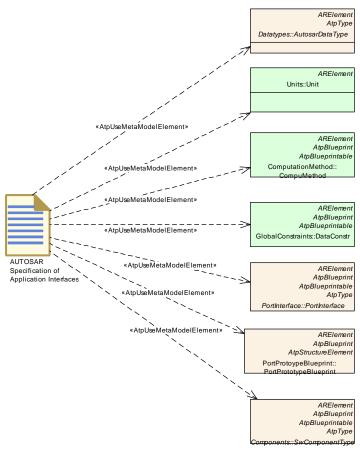


Figure 3.44: The AUTOSAR Specification of Application Interfaces

Artifact	AUTOSAR Specification of Application Interfaces			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	Definitions of the AU	TOSAR	standard appliction interfaces.	
Description	This includes standardized data types, port interfaces, units, port blueprints and example component types (including compositions) for the design of Application Software Components. Note that most of the content is not meant as direct input for defining a VFB system but as so-called blueprints: Blueprints need to be completed with company or project specific elements (e.g. a component type defined as blueprint may need additional ports or a data type defined as blueprint may need additional			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	VFB AUTOSAR Standard Package	1		
Use meta model element	AutosarDataType	1		
Use meta model element	CompuMethod	1		



Relation Type	Related Element	Mul.	Note
Use meta model element	DataConstr	1	
Use meta model element	PortInterface	1	
Use meta model element	PortPrototype Blueprint	1	
Use meta model element	SwComponent Type	1	
Use meta model element	Unit	1	

Table 3.88: AUTOSAR Specification of Application Interfaces

3.2.2.8 VFB Atomic Software Component

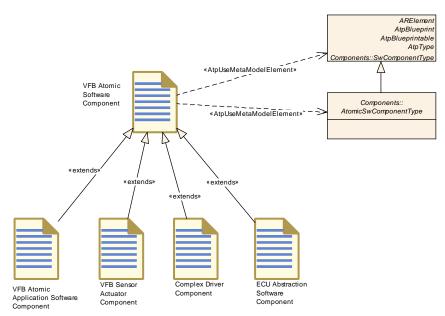


Figure 3.45: The Generic Work Product VFB Atomic Software Component

Artifact	VFB Atomic Software Component				
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	Description of an Ato	mic VF	B Component.		
Description	Internal Behavior. No this one. This artifac	The description of an Atomic Software Component Type without Internal Behavior. Note that there are more specific artifacts extending this one. This artifact is used to describe general use cases which are valid for all kind of Atomic Software Components.			
Kind	AUTOSAR XML				
Extended by		Complex Driver Component, ECU Abstraction Software Component, V FB Atomic Application Software Component, VFB Sensor Actuator Component			
Relation Type	Related Element Mul. Note				
Aggregated by	Delivered Atomic Software Compo- nents	1*			



Relation Type	Related Element	Mul.	Note
Produced by	Define Symbol Props for Types	0*	symbolProps: The symbolProps attribute redefines the software component type name used in the code of the RTE. This resolves name clashes among different software component types designed accidentally with the same shortName. Note that this output is a splitable element, so it can be added later without
			changing the VFB model.
Produced by	Extend Composition	0*	
Consumed by	Define VFB Component Constraints	2*	
Consumed by	Define Atomic Software Com- ponent Internal Behavior	1	
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	1	Meth.bindingTime = SystemDesignTime
Consumed by	Generate Component Header File in Vendor Mode	1	Meth.bindingTime = SystemDesignTime
Consumed by	Generate Component Prebuild Data Set	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Select Software Component Imple- mentation	1*	
Consumed by	Define Consistency Needs	0*	The description of an AtomicSoftwareComponentType without InternalBehavior.
Consumed by	Define VFB Composition Component	0*	
Consumed by	Define VFB Timing	0*	
Consumed by	Define VFB Top Level	0*	
Consumed by	Define VFB Variants	0*	
Use meta model element	AtomicSwCompo- nentType	1	
Use meta model element	SwComponent Type	1	

Table 3.89: VFB Atomic Software Component



3.2.2.9 VFB Atomic Application Software Component

Artifact	VFB Atomic Applic	ation S	oftware Component	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	Description of an Ato	omic VF	B Component.	
Description	The description of an Application Software Component Type. It is used to represent the ECU-independent application software.			
Kind	AUTOSAR XML			
Extends	VFB Atomic Softwar	e Comp	onent	
Relation Type	Related Element	Mul.	Note	
Aggregated by	VFB System	0*		
Produced by	Define VFB Application Software Component	1		
Use meta model element	ApplicationSw ComponentType	1		

Table 3.90: VFB Atomic Application Software Component

3.2.2.10 Complex Driver Component

Artifact	Complex Driver Co	mponei	nt		
Package	I	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work			
	Products	Products			
Brief Description	VFB Description of a	Comple	ex Driver Component.		
Description	Component that has is therefore linked to It uses the meta-mod ComplexDeviceDrive possibility to link from description provided	The Complex Driver Component is a special VFB Atomic Software Component that has direct access to hardware on an ECU and which is therefore linked to a specific ECU or specific hardware. It uses the meta-model element ComplexDeviceDriverSwComponentType which introduces the possibility to link from the software representation to its hardware description provided by the ECU Resource Template. It provides (non-standardized) AUTOSAR Interfaces via ports on VFB			
Kind	AUTOSAR XML				
Extends	VFB Atomic Software	e Comp	onent		
Relation Type	Related Element	Mul.	Note		
Aggregated by	VFB System	0*			
Produced by	Define Complex Driver Component	1			
Consumed by	Configure Debug	Configure Debug 01			
Consumed by	Map Software Component to BS W	01			



Relation Type	Related Element	Mul.	Note
Use meta model element	ComplexDevice DriverSwCompo- nentType	1	

Table 3.91: Complex Driver Component

3.2.2.11 ECU Abstraction Software Component

Artifact	ECU Abstraction S	oftware	Component	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	VFB Description of a	n ECU	Abstraction Software Component.	
Description	The ECU Abstraction Software Component is a special Atomic Software Component that sits between a component that wants to access ECU periphery (typically a Sensor Actuator Component) and the Microcontroller Abstraction.			
	It provides (non-standardized) AUTOSAR Interfaces via ports which represent the ECU periphery. The EcuAbstractionSwComponentType introduces the possibility to link from the software representation to its hardware description provided by the ECU Resource Template. During integration, an ECU Abstraction Software Component will be mapped to a BSW module which implements it and which will directly (without RTE) be connected to the Microcontroller Abstraction.			
Kind	AUTOSAR XML			
Extends	VFB Atomic Softwar	e Comp	onent	
Relation Type	Related Element	Mul.	Note	
Aggregated by	VFB System	0*		
Produced by	Define ECU Abstraction Component	1		
Consumed by	Map Software Component to BS W	01		
Use meta model element	EcuAbstractionSw ComponentType	1		

Table 3.92: ECU Abstraction Software Component

3.2.2.12 VFB Parameter Component



Artifact	VFB Parameter Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	A ParameterCompor		e defines parameters and characteristic ed Ports.	
Description	A ParameterSwComponentType defines parameters and characteristic values accessible via Provide Ports. The provided values are the same for all connected Component Prototypes. This is as opposed to private parameters which are only available within the scope of an Atomic Software Component			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	VFB System	0*		
Produced by	Define VFB Parameter Component	1		
Produced by	Extend Composition	0*		
Consumed by	Define VFB Composition Component	0*		
Consumed by	Define VFB Timing	0*		
Consumed by	Define VFB Top Level	0*		
Consumed by	Define VFB Variants	0*		
Use meta model element	ParameterSw ComponentType	1		

Table 3.93: VFB Parameter Component

3.2.2.13 VFB Sensor Actuator Component



Artifact	VFB Sensor Actuat	or Com	ponent	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	Describes a sensor or actuator component that exist at the VFB Level and represents the physical interface of an actual sensor or actuator hardware element.			
Description	A Sensor Actuator Software Component is an Atomic Software Component that makes the functionality of a sensor or actuator usable for other software components. That means that the Sensor Actuator Software Component provides to the application software components an interface for the physical values of the sensors and actuators. It is written for a concrete sensor or actuator and uses the ECU Abstraction interface. It references the description of the associated hardware elements.			
Kind	AUTOSAR XML			
Extends	VFB Atomic Softwar	e Comp	onent	
Relation Type	Related Element	Mul.	Note	
Aggregated by	Complete ECU Description	0*		
Aggregated by	VFB System	0*		
Produced by	Define VFB Sensor or Actuator Component	1		
Use meta model element	SensorActuatorSw ComponentType	1		

Table 3.94: VFB Sensor Actuator Component

3.2.2.14 VFB NvBlock Software Component

Artifact	VFB NvBlock Softv	are Co	mponent	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description				
Description	The VFB NvBlock Software Component defines non volatile data which can be shared between SwComponentPrototypes. The non volatile data of the VFB NvBlock Software Component are accessible via provided and required ports.			
Kind				
Relation Type	Related Element	Mul.	Note	
Aggregated by	VFB System	0*		
Produced by	Define VFB Nv Block Software Component	1		
Use meta model element	NvBlockSwCom- ponentType	1		

Table 3.95: VFB NvBlock Software Component



3.2.2.15 VFB Non AUTOSAR Component

Artifact	VFB Non AUTOSAR Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	A Component used to describe the non-autosar entities that exist at the VFB level.			
Description	A Component used the VFB level.	to descr	ibe the non-AUTOSAR entities that exist at	
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	VFB System	0*		
Produced by	Define Wrapper Components to Integrate Legacy Software	1		
Produced by	Extend Composition	0*		
Consumed by	Define VFB Composition Component	0*		
Consumed by	Define VFB Timing	0*		
Consumed by	Define VFB Top Level	0*		
Consumed by	Define VFB Variants	0*		
Use meta model element	SwComponent Type	1		

Table 3.96: VFB Non AUTOSAR Component

3.2.2.16 VFB Interfaces

Artifact	VFB Interfaces			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	Interfaces and related elements that form part of the VFB, but are not standardized by AUTOSAR.			
Description	Interfaces and related elements that form part of the VFB, but are not standardized by AUTOSAR.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Compo- nents	0*		
Aggregated by	VFB System	0*		
Produced by	Define VFB Interfaces	1*		



Relation Type	Related Element	Mul.	Note
Produced by	Extend Composition	0*	
Consumed by	Define ECU Abstraction Component	1	
Consumed by	Define Complex Driver Component	1*	
Consumed by	Define VFB Application Software Component	1*	
Consumed by	Define VFB Composition Component	1*	
Consumed by	Define VFB Nv Block Software Component	1*	
Consumed by	Define VFB Parameter Component	1*	
Consumed by	Define VFB Sensor or Actuator Component	1*	
Consumed by	Define VFB Timing	1*	
Consumed by	Define VFB Top Level	1*	
Consumed by	Define Consistency Needs	0*	Interfaces which are relevant for the consistency definition.
Consumed by	Define VFB Variants	0*	
Consumed by	Define Wrapper Components to Integrate Legacy Software	0*	
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	0*	Meth.bindingTime = SystemDesignTime
Consumed by	Generate Component Header File in Vendor Mode	0*	Meth.bindingTime = SystemDesignTime
Consumed by	Generate Component Prebuild Data Set	0*	Meth.bindingTime = CodeGenerationTime
Use meta model element	AutosarDataType	1	
Use meta model element	ModeDeclaration Group	1	
Use meta model element	PortInterface	1	

Table 3.97: VFB Interfaces



3.2.2.17 VFB Types

Artifact	VFB Types				
Package	AUTOSAR Root::M2 Products	:::Metho	dology::Methodology Library::VFB::Work		
Brief Description		Data types and related elements that form part of the VFB, but are not standardized by AUTOSAR.			
Description	computation method standardized by AUT standardized elemer specific information (computation method instances of this artification and they can also be splip possible to generate ApplicationDataType ApplicationDataType ApplicationDatatypes Note that this work p data types is maintaidefine particular Auto VFB Interfaces if the In the methodology t but also for related e	Description of AutosarDataTypes and related elements (e.g. units, computation methods, etc.) that form part of the VFB, but are not standardized by AUTOSAR. This may also include copies of standardized elements which have been completed with project specific information (e.g. with calibration access information or computation methods). A VFB system can contain several different instances of this artifact, which may fulfill different roles. AutosarDataTypes can come as so-called ApplicationDatatypes or ImplementationDataTypes. This package can contain both kinds but they can also be split into separate artifacts. However, since it is also possible to generate ImplementationDataTypes from ApplicationDataTypes, a VFB system can be completely defined with ApplicationDatatypes only. Note that this work product is meant for use cases, in which a set of data types is maintained as a separate artifact. It is also possible to define particular AutosarDataTypes as part of another artifact, e.g. of VFB Interfaces if the types are closely related to certain port interfaces. In the methodology this artifact stands not only for data type definitions, but also for related elements like addressing methods, units, computation methods, constraints. etc. This is done for simplicity,			
Kind	AUTOSAR XML				
Relation Type	Related Element	Mul.	Note		
Aggregated by	Delivered Atomic Software Compo- nents	0*			
Aggregated by	VFB System	0*			
Produced by	Define VFB Types	1*			
Produced by	Define Symbol Props for Types	0*	symbolProps: The symbolProps attribute redefines the implementation data type name used in the code of the RTE and/or the component. This resolves name clashes among different implementation data types designed accidentally with the same shortName. Note that this output is a splitable element, so it can be added later without changing the VFB model.		
Produced by	Extend Composition	0*	Granging the VI D model.		



Relation Type	Related Element	Mul.	Note
Consumed by	Define ECU Abstraction Com- ponent	1	
Consumed by	Define Complex Driver Component	1*	
Consumed by	Define VFB Application Software Component	1*	
Consumed by	Define VFB Composition Component	1*	
Consumed by	Define VFB Interfaces	1*	
Consumed by	Define VFB Nv Block Software Component	1*	
Consumed by	Define VFB Parameter Component	1*	
Consumed by	Define VFB Sensor or Actuator Component	1*	
Consumed by	Define VFB Top Level	1*	
Consumed by	Generate BSW Memory Mapping Header	1*	SwAddrMethod: Referred SwAddrMethods Meth.bindingTime = SystemDesignTime
Consumed by	Generate Compiler Configuration	1*	SwAddrMethod: Referred SwAddrMethods. They provide the default names for the compiler memory classes. Meth.bindingTime = SystemDesignTime
Consumed by	Generate SWC Memory Mapping Header	1*	SwAddrMethod: Referred SwAddrMethods Meth.bindingTime = SystemDesignTime
Consumed by	Configure Memmap Allocation	0*	SwAddrMethods: SwAddrMethods used for the generic mapping. Note that one SwAddrmethod can represent several memory sections.
Consumed by	Define Consistency Needs	0*	Data types which are relevant for the consistency definition.
Consumed by	Define VFB Constants	0*	
Consumed by	Define Wrapper Components to Integrate Legacy Software	0*	
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	0*	Meth.bindingTime = SystemDesignTime



Relation Type	Related Element	Mul.	Note
Consumed by	Generate Component Header File in Vendor Mode	0*	Meth.bindingTime = SystemDesignTime
Consumed by	Generate Component Prebuild Data Set	0*	Meth.bindingTime = CodeGenerationTime
Use meta model element	ApplicationData Type	1	
Use meta model element	AutosarDataType	1	
Use meta model element	CompuMethod	1	
Use meta model element	DataConstr	1	
Use meta model element	Implementation DataType	1	
Use meta model element	SwAddrMethod	1	
Use meta model element	Unit	1	

Table 3.98: VFB Types

3.2.2.18 VFB Data Type Mapping Set

Artifact	VFB Data Type Mapping Set			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	Mapping Set between Application and Implementation Data Types.			
Description	Mapping Set between	n Applic	cation and Implementation Data Types.	
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Compo- nents	0*		
Aggregated by	VFB System	0*		
Produced by	Define VFB Types	0*		
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	01	Meth.bindingTime = SystemDesignTime	
Consumed by	Generate Component Header File in Vendor Mode	01	Meth.bindingTime = SystemDesignTime	
Consumed by	Generate Component Prebuild Data Set	01	Meth.bindingTime = CodeGenerationTime	
Consumed by	Define VFB Constants	0*		
Use meta model element	DataTypeMapping Set	1		

Table 3.99: VFB Data Type Mapping Set



3.2.2.19 VFB Modes

Artifact	VFB Modes			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description	Modes declared here are non-AUTOSAR standard. They are modes that are managed by a software component acting as a application mode manager.			
Description	Desclaration of mode groups and of the modes they contain. Modes declared here are non-AUTOSAR standard. They are modes that are managed by an application software component acting as a mode manager.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Compo- nents	0*		
Aggregated by	VFB System	0*		
Produced by	Define VFB Modes	1*		
Produced by	Extend Composition	0*		
Consumed by	Define Complex Driver Component	0*		
Consumed by	Define ECU Abstraction Component	0*		
Consumed by	Define VFB Application Software Component	0*		
Consumed by	Define VFB Composition Component	0*		
Consumed by	Define VFB Nv Block Software Component	0*		
Consumed by	Define VFB Top Level	0*		
Consumed by	Define Wrapper Components to Integrate Legacy Software	0*		
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	0*	Meth.bindingTime = SystemDesignTime	
Consumed by	Generate Component Header File in Vendor Mode	0*	Meth.bindingTime = SystemDesignTime	
Consumed by	Generate Component Prebuild Data Set	0*	Meth.bindingTime = CodeGenerationTime	



Relation Type	Related Element	Mul.	Note
Use meta model element	ModeDeclaration Group	1	

Table 3.100: VFB Modes

3.2.2.20 VFB Constants

Artifact	VFB Constants	VFB Constants			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products				
Brief Description	Specification of consartifacts.	Specification of constant data for usage as initial values by other artifacts.			
Description	Specification of constant data for usage as initial values by other artifacts, e.g. initial values for calibration parameters or variable data elements provided in ports. By using the ConstantSpecification meta-class, such data can be standalone artifacts and thus be maintained independently of the components or interfaces to which they apply.				
Kind	AUTOSAR XML				
Relation Type	Related Element	Mul.	Note		
Produced by	Define VFB Constants	1*			
Use meta model element	ConstantSpecifica- tion	1			

Table 3.101: VFB Constants

3.2.2.21 VFB Software Component Mapping Constraints

Artifact	VFB Software Component Mapping Constraints					
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products					
Brief Description	A defined constraint on how certain components must be mapped (clustered or separated) to ECUs.					
Description	One or more defined constraints on how certain components must be mapped (clustered, separated or dedicated mapping). This defines constraints to which components need to be mapped to a single ECU, and which must be mapped to separate ECUs, without regard to any particular ECU or topology. Notes: The meta-model element SystemMapping allows to describe a collection of such constraints as one single artifact.					
Kind	AUTOSAR XML					
Relation Type	Related Element Mul. Note					
Aggregated by	VFB System	VFB System 0*				
Produced by	Define VFB Component Constraints	1*				



Relation Type	Related Element	Mul.	Note
Produced by	Extend Composition	0*	
Consumed by	Deploy Software Component	01	Constraints defined on the VFB level
Use meta model element	MappingConstraint	1	
Use meta model element	SystemMapping	1	The splitable element SystemMapping is the root for this artifact.

Table 3.102: VFB Software Component Mapping Constraints

3.2.2.22 VFB Timing

Artifact	VFB Timing			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description		Atomic Software Component or Composition Component TimingDescription and TimingConstraints		
Description	TimingDescription and TimingConstraints defined for an Atomic Software Component or a Composition Component			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Produced by	Define VFB Timing	1		
Consumed by	Define Software Component Timing	01		
Consumed by	Define System Timing	01		
Consumed by	Define VFB Variants	01		
Use meta model element	VfbTiming	1		

Table 3.103: VFB Timing

3.2.2.23 Description of a Non-AUTOSAR System



Artifact	Description of a No	Description of a Non-AUTOSAR System			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products				
Brief Description		View of the non-AUTOSAR system that contains the relevant information for its integration with the AUTOSAR system at VFB level			
Description	are relevant for its in level. The format of a platform that is employstem. It may not be non-AUTOSAR system contents of the description an AUTOSAR of SwComponent Description of the interfaces of information basis of the GENIVI Interface Definition Linterfaces that define It does neither define nor their connections	tegration the description in description. otainment platform anguage data tyee the constant of the constant o	ements of the non-AUTOSAR system that in with an AUTOSAR system at the VFB cription depends on the methodology or the development of the non-AUTOSAR need that the description of the less in an AUTOSAR format. Also the less in an AUTOSAR format. Also the less in an AUTOSAR format its details on that also addresses the VFB level, i.e. a less that also addresses the VFB level, i.e. a less that instance are specified with the Franca less. A Franca IDL description contains less, methods, attributes, and broadcasts. Imponents that implement these interfaces dition, the granularity of the data type than a data type description with the		
Kind	Custom				
Relation Type	Related Element	Mul.	Note		
Consumed by	Define VFB Integration Connector	1			
Consumed by	Translate Non- Autosar Descrip- tion to Autosar Description	1			

Table 3.104: Description of a Non-AUTOSAR System

3.2.2.24 Integration Connector



Artifact	Integration Connec	tor			
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::VFB::Work Products			
Brief Description		Specification of the connections of the elements of the non-AUTOSAR system with the elements of the AUTOSAR system			
Description	to be connected with instance the Descrip elements correspond would define how the contained in the AUT Integration Connected integration but not you non-AUTOSAR systematically systematically standard to be only very coarse gray. Connector will be us	which edition of the ding to please porter to say the container. See the container of the	elements of the non-AUTOSAR system are elements of the AUTOSAR system. If for the non-AUTOSAR system contains port instances, the integration connector is are connected with the port instances. SwComponent Description. In addition, the pecify information that is necessary for the ned in the Description of the in the Description of the in the non-AUTOSAR system contains at type descriptions the Integration information such that the is with the ones defined in the AUTOSAR can be checked.		
Kind	Custom	Custom			
Relation Type	Related Element	Mul.	Note		
Produced by	Define VFB Integration Connector	1			
Consumed by	Translate Non- Autosar Descrip- tion to Autosar Description	1			

Table 3.105: Integration Connector

3.3 System

This chapter contains the definition of work products and tasks used for the development of systems and sub-systems. For the definition of the relevant meta-model elements refer to [9] and [20].



3.3.1 Tasks

3.3.1.1 Set System Root

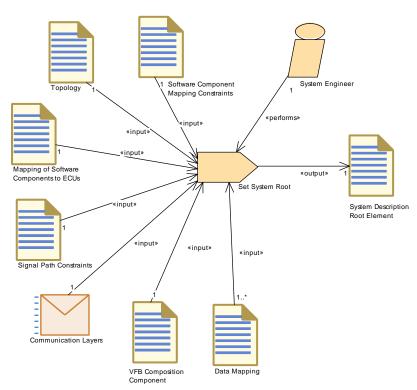


Figure 3.46: Set System Root

Task Definition	Set System Root	Set System Root		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks			
Brief Description				
Description	Set up the root elem	ent of a	system description.	
Relation Type	Related Element	Mul.	Note	
Performed by	System Engineer	1		
Consumes	Communication Layers	1	Only the reference to the artifact is needed	
Consumes	Mapping of Soft- ware Components to ECUs	1	Only the reference to the artifact is needed	
Consumes	Signal Path Con- straints	1	Only the reference to the artifact is needed	
Consumes	Software Component Mapping Constraints	1	Only the reference to the artifact is needed	
Consumes	Topology	1	Only the reference to the artifact is needed	
Consumes	VFB Composition Component	1	Only the reference to the artifact is needed	



Relation Type	Related Element	Mul.	Note
Consumes	Data Mapping	1*	Only the reference to the artifact is needed
Produces	System Description Root Element	1	Set up the root element, and the links to other artifacts

Table 3.106: Set System Root

3.3.1.2 Assign Top Level Composition

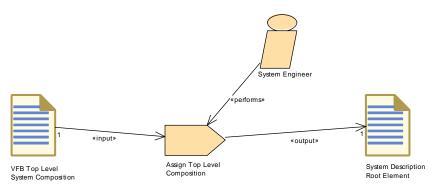


Figure 3.47: Assign Top Level Composition

Task Definition	Assign Top Level Composition				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks				
Brief Description					
Description	Assign a VFB Top Le	Assign a VFB Top Level Composition to the System Root			
Relation Type	Related Element	Mul.	Note		
Performed by	System Engineer	1			
Consumes	VFB Top Level System Composi- tion	1			
Produces	System Description Root Element	1			

Table 3.107: Assign Top Level Composition



3.3.1.3 Define ECU Description




Figure 3.48: Define ECU description

Task Definition	Define ECU Descri	ption			
Package	AUTOSAR Root::M2 Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks			
Brief Description	Define a particular E	CU's re	sources.		
Description	pins, connections.The of an ECU,e;g proceductuators. HW Elem within the ECU described on the Elements as parts or description of HW Elem PinGroups and HW HW PinGroups allow HWPins are arranged HW Pins.HW Connections.	Define a particular ECU's resources by describing Hardware Elements, pins, connections. The HW Elements are the main describing elements of an ECU,e;g processing units, memory, peripherals, sensors and actuators. HW Elements have a unique name and can be identified within the ECU description. HW Elements do not necessarily have to be described on the level of an ECU. It is possible to describe HW Elements as parts of other HW Elements. By this means, a hierarchical description of HW Elements can be created. HW Elements provide HW PinGroups and HW Pins for being interconnected among each others. HW PinGroups allow a rough description of how certain groups of HWPins are arranged. The detailed description can be done using the HW Pins.HW Connections are used to describe connection on several levels:connections between HW Elements, connections between HW			
Relation Type	Related Element	Mul.	Note		
Performed by	System Engineer	1			
Produces	ECU Resources Description	1*			

Table 3.108: Define ECU Description



3.3.1.4 Define System Topology

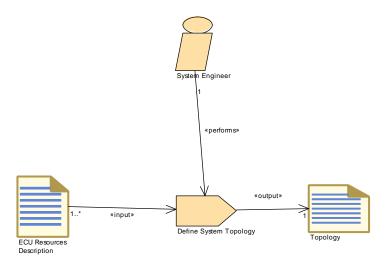


Figure 3.49: Define System Topology

Task Definition	Define System Top	Define System Topology		
Package	AUTOSAR Root::M2 Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks		
Brief Description	Select the ECUs and	Select the ECUs and how the they are interconnected by networks.		
Description	Define how the ECU	Define how the ECUs of a system are interconnected by networks.		
Relation Type	Related Element	Mul.	Note	
Performed by	System Engineer	1		
Consumes	ECU Resources Description	1*		
Produces	Topology	1		

Table 3.109: Define System Topology

3.3.1.5 Define Software Component Mapping Constraints

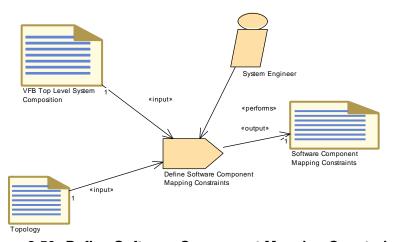


Figure 3.50: Define Software Component Mapping Constraints



Task Definition	Define Software Co	mpone	nt Mapping Constraints		
Package	AUTOSAR Root::M2 Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks			
Brief Description	together or separate	Define Constraints on software components that are clusterred together or separate, and how software components need to be assigned to a particular ECU or not.			
Description	phase. These consti description. Two cor	Define constraints on Software Components during the mapping phase. These constraints are described into the System Constraint description. Two constraints express the restrictions that Software Components impose each other when performing the mapping onto the ECUs.			
	the allocation of a pr ECU, especially if su view. In the same wa kind of redundancy, Thus, we call these	In fact, before the mapping process begins, it can be useful to impose the allocation of a predefined set of SW components onto the same ECU, especially if such a set is tightly linked from a functional point of view. In the same way, two critical SW components, performing some kind of redundancy, may be not suitable to run both on the same ECU. Thus, we call these two kinds of mapping constraints, respectively, ComponentClustering and ComponentSeparation.			
	The ComponentClustering constraint (also, clustering) is to be expressing that a certain set of SW components (atomic or not be mapped (allocated) onto the same ECU. This is some kind "execute together on same ECU" constraint.				
	for expressing that to mapped (allocated)	The ComponentSeparation constraint (also, separation) is to be used for expressing that two SW components (atomic or not) shall not be mapped (allocated) onto the same ECU. This is some kind of do not execute together on same ECU constraint.			
Relation Type	Related Element	Mul.	Note		
Performed by	System Engineer	1			
Consumes	Topology	1			
Consumes	VFB Top Level System Composi- tion	1			
Produces	Software Component Mapping Constraints	1			

Table 3.110: Define Software Component Mapping Constraints



3.3.1.6 Deploy Software Component

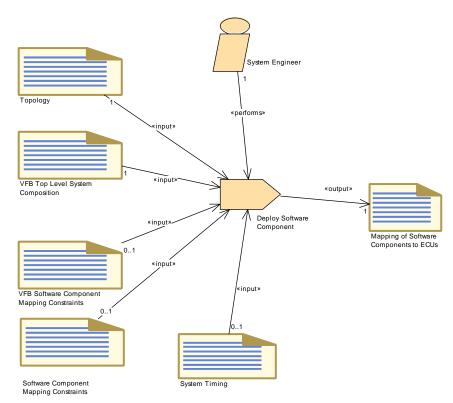


Figure 3.51: Deploy Software Component

Task Definition	Deploy Software Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks			
Brief Description	Deploy VFB Softwar	e Comp	onents to an ECU	
Description	Deploy each VFB So component.	oftware (Component to an ECU that will execute the	
Relation Type	Related Element	Mul.	Note	
Performed by	System Engineer	1		
Consumes	Topology	1		
Consumes	VFB Top Level System Composi- tion	1		
Consumes	Software Component Mapping Constraints	01	Constraints defined on the System level	
Consumes	System Timing	01		
Consumes	VFB Software Component Map- ping Constraints	01	Constraints defined on the VFB level	
Produces	Mapping of Soft- ware Components to ECUs	1		

Table 3.111: Deploy Software Component



3.3.1.7 Generate or Adjust System Flat Map

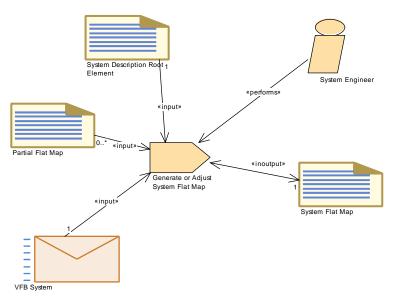


Figure 3.52: Generate or Adjust System Flat Map

Task Definition	Generate or Adjust	System	n Flat Map	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks			
Brief Description	Generates and/or adjust the unique names of component prototypes and MCD display data in the scope of system.			
Description			unique names of component prototypes scope of a System or System Extract.	
Relation Type	Related Element	Mul.	Note	
Performed by	System Engineer	1		
Consumes	System Description Root Element	1		
Consumes	VFB System	1		
Consumes	Partial Flat Map	0*	If Partial Flat Maps were delivered along with software components, they must be integrated into the System Flat Map:	
			 The instance refs used in a partial flat map must be taken over and adjusted to the context of the System or System Extract. 	
			 Name conflicts have to be resolved if several partial flat maps are merged. 	
In/out	System Flat Map	1		

Table 3.112: Generate or Adjust System Flat Map



3.3.1.8 Derive Communication Needs

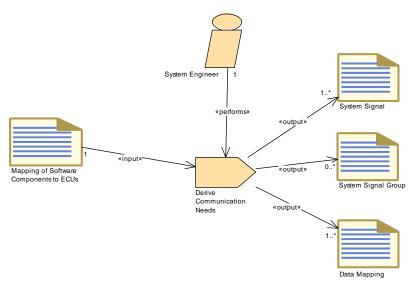


Figure 3.53: Derive Communication Needs

Task Definition	Derive Communication Needs				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks				
Brief Description	Define the signals used to exchange data & operations needed by software components over a network.				
Description	Define the signals used to exchange data & operations needed by software components over a network.				
Relation Type	Related Element	Related Element Mul. Note			
Performed by	System Engineer	1			
Consumes	Mapping of Soft- ware Components to ECUs	1			
Produces	Data Mapping	1*			
Produces	System Signal	1*			
Produces	System Signal Group	0*			

Table 3.113: Derive Communication Needs



3.3.1.9 Define Signal Path Constraints

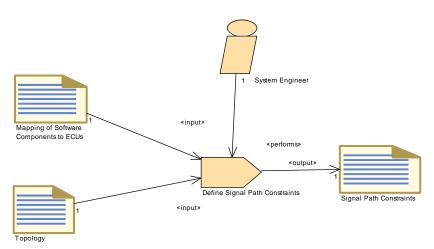


Figure 3.54: Define Signal Path Constraints

Task Definition	Define Signal Path	Constr	aints	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks			
Brief Description	signal between two	Additional guidelines for the System Generator, which specific way a signal between two Software Components should take in the network without defining in which frame and with which timing it is transmitted.		
Description	way a signal betwee	Define additional guidelines for the System Generator, which specific way a signal between two Software Components should take in the network without defining in which frame and with which timing it is transmitted.		
Relation Type	Related Element	Mul.	Note	
Performed by	System Engineer	1		
Consumes	Mapping of Soft- ware Components to ECUs	1		
Consumes	Topology	1		
Produces	Signal Path Con- straints	1		

Table 3.114: Define Signal Path Constraints



3.3.1.10 Define System Variants

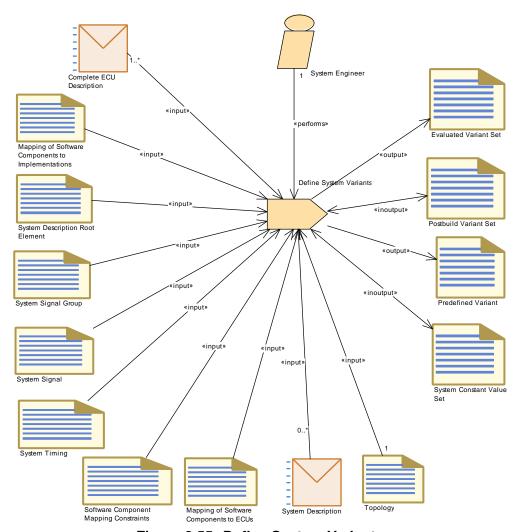


Figure 3.55: Define System Variants

Task Definition	Define System Variants		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks		
Brief Description	Define variants for the	ne artifac	cts of a System Description.
Description	Define variants for the artifacts of a System Description. Definition of a variant means in general to define its conditions and its latest binding time. Therefore one has to create a PredefinedVariant referring to the settings which are used by the system elements in scope. To do so, this task can make use of existing System Constant Value Set's and/or Postbuid Variant Set's or define new ones. Several PredefinedVariant's can be combined to one Evaluated Variant Set. This task can also be applied when designing a subsystem, therefore the System Extract is an optional input.		
Relation Type	Related Element	Mul.	Note
Performed by	System Engineer	1	



Relation Type	Related Element	Mul.	Note
Consumes	Mapping of Soft- ware Components to ECUs	1	
Consumes	Mapping of Soft- ware Components to Implementations	1	
Consumes	Software Component Mapping Constraints	1	
Consumes	System Description Root Element	1	
Consumes	System Signal	1	
Consumes	System Signal Group	1	
Consumes	System Timing	1	
Consumes	Topology	1	
Consumes	Complete ECU Description	1*	
Consumes	System Description	0*	
In/out	Postbuild Variant Set	1	
In/out	System Constant Value Set	1	
Produces	Evaluated Variant Set	1	
Produces	Predefined Variant	1	

Table 3.115: Define System Variants



3.3.1.11 Define System Timing

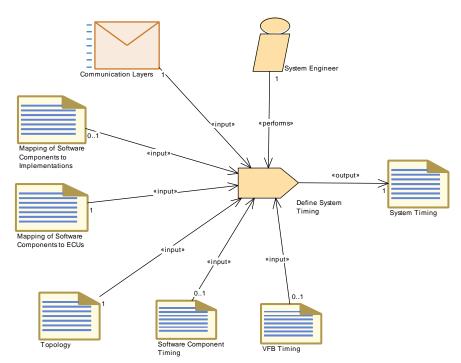


Figure 3.56: Define System Timing

Task Definition	Define System Tim	ing	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks		
Brief Description	Define SystemTiming for a concrete system taking the mapping of software components to ECUs and their implementation into account		
Description	Define SystemTiming (TimingDescription and TimingConstraints) for a concrete system taking the mapping of software components to ECUs and their implementation into account. This means that the resulting Communication Matrix (and its implication to the communication stack) can also be referenced by the timing specification to refine remote communication timing behavior.		
Relation Type	Related Element Mul. Note		
Performed by	System Engineer	1	
Consumes	Communication Layers	1	
Consumes	Mapping of Soft- ware Components to ECUs	1	
Consumes	Topology	1	
Consumes	Mapping of Soft- ware Components to Implementations	01	
Consumes	Software Component Timing	01	
Consumes	VFB Timing	01	
Produces	System Timing	1	



Relation Type Related Element Mul. Note

Table 3.116: Define System Timing

3.3.1.12 Extend Topology

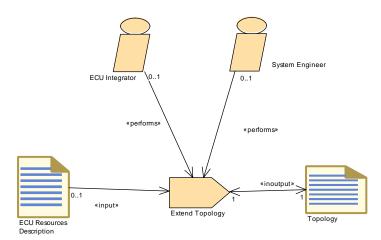


Figure 3.57: Extend Topology

Task Definition	Extend Topology		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks		
Brief Description	Extend the existing S	System [*]	Topology
Description	Extend the existing System Topology by describing how new ECUs will be connected to the existing one through the current network		
Relation Type	Related Element	Mul.	Note
Performed by	ECU Integrator	01	
Performed by	System Engineer	01	
Consumes	ECU Resources Description	01	
In/out	Topology	1	

Table 3.117: Extend Topology



3.3.1.13 Select Software Component Implementation

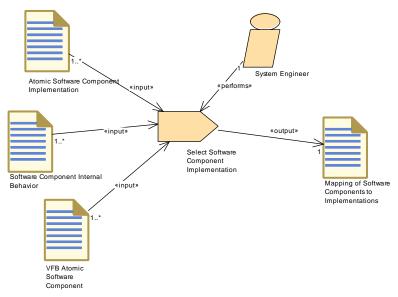


Figure 3.58: Select Software Component Implementation

Task Definition	Select Software Component Implementation		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks		
Brief Description	Select implementation	on for ar	Atomic Software Component.
Description	The system engineer selects an Atomic Software Component Implementation for each defined VFB Atomic Software Component		
Relation Type	Related Element Mul. Note		
Performed by	System Engineer	1	
Consumes	Atomic Software Component Imple- mentation	1*	
Consumes	Software Component Internal Behavior	1*	
Consumes	VFB Atomic Soft- ware Component	1*	
Produces	Mapping of Soft- ware Components to Implementations	1	

Table 3.118: Select Software Component Implementation



3.3.1.14 Select Design Time Variant




Figure 3.59: Select Design Time Variant

Task Definition	Select Design Time	• Varian	t		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks				
Brief Description	Select a system vari	Select a system variant at system design time.			
Description	Select a system variant at system design time. This could be done in different ways: Replace a model, which contains the variation points contributing to this particular variant and all the possible settings/elements, by a model, which does no more contain these variation points and which contains only the particular settings/elements selected for this variant. In order to document the selection for further process steps, it is also possible to keep the information about the selected variant and the variation points in the model by introducing a PredefinedVariant along with appropriate fixed settings of system constant values. In constrast to variant selection in later process steps, no code generation or compilation is involved at system design time, thus this task is just a transformation of one XML model into another one. This task can be applied to a complete system description, represented by a System Extract Meth.bindingTime = SystemDesignTime				
Relation Type	Related Element	Related Element Mul. Note			
Performed by	System Engineer	1			
Consumes	Complete ECU Description	1			
In/out	System Description	1			

Table 3.119: Select Design Time Variant



3.3.1.15 Define System View Mapping

The task Define System View Mapping (see Figure 3.60) creates the System View Mapping between two System Descriptions. Different cases can be separated:

- Mapping of different overall VFB systems the Abstract System Description and the System Configuration Description.
- Mapping of different structured System Extracts, e.g. System Extract delivered by a primary organization and the different structure (ECU System Description) of the secondary organization (see 2.5.4, 2.5.5).

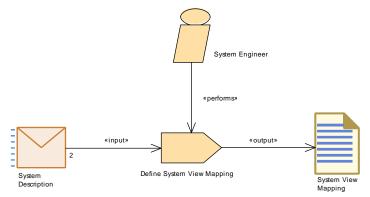


Figure 3.60: Define System View Mapping

Task Definition	Define System View Mapping		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks		
Brief Description	Map elements from	different	views on the system.
Description	This task creates the System View Mapping between two System Descriptions (Mapping of different structured system descriptions, e.g. system extract delivered by a primary organization and the different structure of the secondary organisation).		
Relation Type	Related Element	Mul.	Note
Performed by	System Engineer	1	
Consumes	System Description	2	
Produces	System View Map- ping	1	

Table 3.120: Define System View Mapping



3.3.1.16 Create Transformer Specification

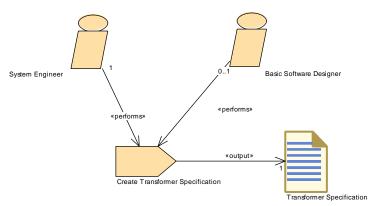


Figure 3.61: Create Transformer Specification

Task Definition	Create Transformer Specification			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks			
Brief Description				
Description	the specification is c System Engineer ha	In this task the specification of a transformer module is created. Since the specification is created as a part of the communication design, the System Engineer has to perform this task. Optionally a Basic Software Designer can support the creation of the specification.		
Relation Type	Related Element	Related Element Mul. Note		
Performed by	System Engineer	1		
Performed by	Basic Software Designer	01		
Produces	Transformer Speci- fication	1		

Table 3.121: Create Transformer Specification



3.3.1.17 Define Rapid Prototyping Scenario

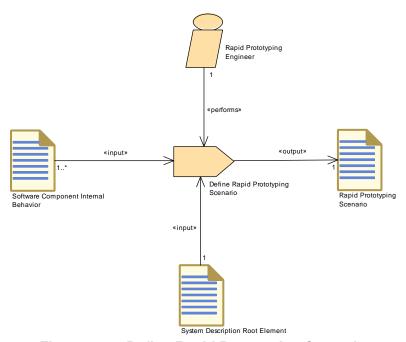


Figure 3.62: Define Rapid Prototyping Scenario

Task Definition	Define Rapid Prototyping Scenario			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Tasks			
Brief Description				
Description	Defines the rapid pro	ototyping	g scenario.	
Relation Type	Related Element	Mul.	Note	
Performed by	Rapid Prototyping Engineer	1		
Consumes	System Description Root Element	1		
Consumes	Software Component Internal Behavior	1*		
Produces	Rapid Prototyping Scenario	1		

Table 3.122: Define Rapid Prototyping Scenario



3.3.2 Work Products

3.3.2.1 System Description

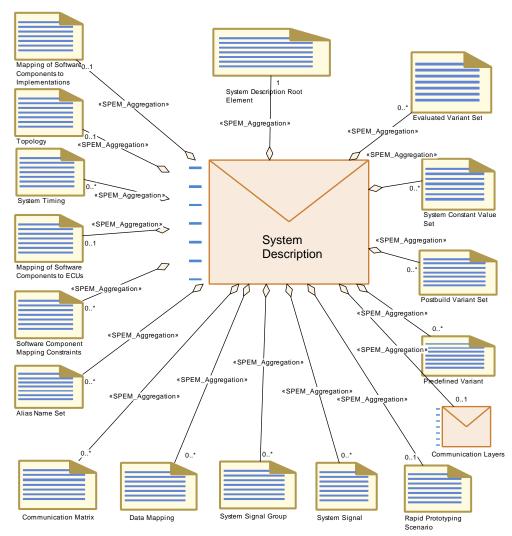


Figure 3.63: Structure of generic deliverable System Description



Deliverable	System Description	1				
Package	AUTOSAR Root::M2 Work products	2::Metho	dology::Methodology Library::System::			
Brief Description	Partial Extract of a S	System				
Description	Generic deliverable within the methodolo		ing a System. It is used in different roles			
	artifacts which need subsystem from a co variation points are p include PredefinedV	In each role, this deliverable may contain variation points in its ARXML artifacts which need to be bound in later steps, e.g. when defining a subsystem from a complete system or later for the single ECUs. If such variation points are present, the System Description may optionally include PredefinedVariants in order to predefine variants for later selection and an Evaluated Variant Set.				
	system description v "SYSTEM_DESCRII description with the represented by the c	Please note that this generic deliverable does not correspond to the system description with the system category "SYSTEM_DESCRIPTION" (see [TPS_SYST_01003]). The system description with the category "SYSTEM_DESCRIPTION" is represented by the deliverable "System Configuration Description".				
	category. In the Syst	This deliverable is equivalent to a description of a system with any category. In the System Template Specification "system description" is the most frequently used term for this kind of artifact.				
Kind	Delivered					
Extended by	Abstract System Des System Constraint D		, System Configuration Description, on, System Extract			
Relation Type	Related Element	Mul.	Note			
Aggregates	System Description Root Element	1				
Aggregates	Communication Layers	01				
Aggregates	Mapping of Soft- ware Components to ECUs	01				
Aggregates	Mapping of Soft- ware Components to Implementations	01				
Aggregates	Rapid Prototyping Scenario	01				
Aggregates	Topology	01				
Aggregates	Alias Name Set	0*				
Aggregates	Communication Matrix	0*				
Aggregates	Data Mapping	0*				
Aggregates	Evaluated Variant Set	0*				
Aggregates	Postbuild Variant Set	0*				
Aggregates	Predefined Variant	0*				
Aggregates	Software Component Mapping Constraints	0*				



Relation Type	Related Element	Mul.	Note
Aggregates	System Constant Value Set	0*	
Aggregates	System Signal	0*	
Aggregates	System Signal Group	0*	
Aggregates	System Timing	0*	
In/out	Select Design Time Variant	1	
Consumed by	Define System View Mapping	2	
Consumed by	Define System Safety Information	1	
Consumed by	Define Alias Names	01	Needed for definition of alias names with system, system extract or ECU scope, depending of the role of the System Description.
Consumed by	Define System Variants	0*	

Table 3.123: System Description

Deliverable	System Constraint	Descrip	otion		
Package	AUTOSAR Root::M2 Work products	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products			
Brief Description					
Description	input for setting up the System Configuration This deliverable corr	Contains the artifacts that describe System Constraints. It serves as an input for setting up the complete Abstract System Description and/or System Configuration Description. This deliverable corresponds to the system description with the system category "SYSTEM_CONSTRAINTS" (see [TPS_SYST_01003]).			
Kind	Delivered				
Extends	System Description				
Relation Type	Related Element	Mul.	Note		
Aggregates	Overall VFB System	01			
Aggregates	System Flat Map	01			
Consumed by	Develop System	01			
Consumed by	Develop an Ab- stract System Description	01	In the context of the "Develop an Abstract System Description" activity, the constraints for the abstract or functional view on the system can be provided by the "System Constraint Description".		

Table 3.124: System Constraint Description



Deliverable	System Configurat	ion Des	cription	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products			
Brief Description				
Description	Contains the artifacts that describe a complete AUTOSAR System. It is the basis for extracting descriptions for sub-systems or ECUs.			
		Note that System Extracts may be refined by details which are not present in the System Configuration.		
			s to the system description with the system RIPTION" (see [TPS_SYST_01003]).	
Kind	Delivered			
Extends	System Description			
Relation Type	Related Element	Mul.	Note	
Aggregates	Overall VFB System	1		
Aggregates	System Flat Map	01		
Produced by	Develop System	1*		
Consumed by	Generate System Extract	1		
Consumed by	Generate ECU Extract	01		

Table 3.125: System Configuration Description

Deliverable	System Extract					
Package	AUTOSAR Root::M2 Work products	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products				
Brief Description						
Description	complete System De decomposed and sti designing subsystem constraints. This deliverable corr	Contains the artifacts that describe a subsystem specific view on the complete System Description. Initially, the System Extract is not fully decomposed and still contains compositions. It is the basis for designing subsystems, e.g. by adding further ECUs within the given constraints. This deliverable corresponds to the system description with the system category "SYSTEM_EXTRACT" (see [TPS_SYST_01003]).				
Kind	Delivered					
Extended by	ECU System Descri	otion				
Extends	System Description					
Relation Type	Related Element	Mul.	Note			
Aggregates	VFB System Ex- tract	1				
Aggregates	System Flat Map	01				
Produced by	Develop System					
Produced by	Generate System Extract	0*				
Consumed by	Create ECU System Description	1				



Relation Type	Related Element	Mul.	Note
Consumed by	Develop Sub-Sys- tem	1	
Consumed by	Generate ECU Ex- tract	01	

Table 3.126: System Extract

Deliverable	ECU System Descr	iption				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products					
Brief Description						
Description	This System Description is used to describe the closed view on one ECU (note that an AUTOSAR ECU is defined being one microprocessor running one AUTOSAR Stack). It can be derived from a System Extract or it can be designed independently and mapped to a System Extract. The ECU System Description is not fully decomposed and still may contain compositions. It is refined during the activity Design Sub-System. This deliverable corresponds to the system description with the system category "ECU SYSTEM DESCRIPTION" (see [TPS SYST 01003]).					
Kind						
Extends	System Extract					
Relation Type	Related Element	Mul.	Note			
Produced by	Design Sub-System	1	System Extract refined during design of the corresponding sub-system with elements needed to generate ECU Extract(s).			
Produced by	Create ECU System Description	1*				
Consumed by	Design Sub-System	1	System Extract as generated from the outer system.			
Consumed by	Generate ECU Extract	01				

Table 3.127: ECU System Description

3.3.2.2 Abstract System Description



Deliverable	Abstract System D	escripti	on	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products			
Brief Description	Provides an abstract or functional view on the system			
Description	The Abstract System Description extends the general System Description and provides an abstract or functional view on the system to be developed. This deliverable corresponds to the system description with the system category "ABSTRACT SYSTEM DESCRIPTION" (see			
Kind	[TPS_SYST_01003] Delivered).		
Extends	System Description			
Relation Type	Related Element	Mul.	Note	
Aggregates	Overall VFB Sys-	1 1	Note	
Aggregates	tem	I		
Produced by	Develop an Ab- stract System Description	1*		
Consumed by	Develop System	0*	The abstract System Description is an optional input for the activity "Develop System". Please note, that in this step the Abstract System Description is refined to a System Description.	
Consumed by	Develop a VFB System Descrip- tion	0*	The abstract System Description is an optional input for the activity "Develop a VFB System Description". The VFB-related part of the Abstract System Description can be than refined to the concrete "Overall VFB System". Additionally, a mapping between those two views can be established.	

Table 3.128: Abstract System Description



3.3.2.3 Complete ECU Description




Figure 3.64: Complete ECU Description

Deliverable	Complete ECU Des	criptior	1		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products				
Brief Description		An ECU Description includes the resources it has available along with its corresponding ECU-specific software components.			
Description		An ECU Description includes the resources it has available along with its corresponding ECU-specific software components.			
Kind	Delivered				
Relation Type	Related Element	Mul.	Note		
Aggregates	ECU Resources Description	1			
Aggregates	VFB Sensor Actu- ator Component	0*			
Consumed by	Select Design Time Variant	1			
Consumed by	Define System Variants	1*			

Table 3.129: Complete ECU Description

3.3.2.4 System Description Root Element



Artifact	System Description Root Element				
Package		2::Metho	odology::Methodology Library::System::		
	Work products				
Brief Description	A System Descriptio	A System Description root element.			
Description	The System description defines the following major elements:				
	Topology : description of the Topology of the System.				
	containing all	 Software: description of the root software composition containing all software components in the System in a hierarchical structure. 			
	Communication used in the Sy		cription of all Communication elements		
	Mapping and Mapping Constraints: description of all mapping aspects (mapping of SW components to ECUs, mapping of data elements to signals, and mapping constraints).				
	The root element can be the basis for a System extract as well as for the whole System depending on which elements are aggregated.				
Kind	the whole System de				
	the whole System de AUTOSAR XML	ependin	g on which elements are aggregated.		
Kind Relation Type Aggregated by	the whole System de				
Relation Type	the whole System de AUTOSAR XML Related Element System Descrip-	ependin	g on which elements are aggregated.		
Relation Type Aggregated by	the whole System de AUTOSAR XML Related Element System Description Assign Top Level	Mul.	g on which elements are aggregated.		
Relation Type Aggregated by Produced by	the whole System de AUTOSAR XML Related Element System Description Assign Top Level Composition	Mul. 1	g on which elements are aggregated. Note Set up the root element, and the links to		
Relation Type Aggregated by Produced by Produced by	the whole System de AUTOSAR XML Related Element System Description Assign Top Level Composition Set System Root Define Rapid Pro-	Mul. 1 1	g on which elements are aggregated. Note Set up the root element, and the links to		
Relation Type Aggregated by Produced by Produced by Consumed by	the whole System de AUTOSAR XML Related Element System Description Assign Top Level Composition Set System Root Define Rapid Prototyping Scenario Define System	Mul. 1 1 1	g on which elements are aggregated. Note Set up the root element, and the links to		
Relation Type Aggregated by Produced by Produced by Consumed by Consumed by	the whole System de AUTOSAR XML Related Element System Description Assign Top Level Composition Set System Root Define Rapid Prototyping Scenario Define System Variants Flatten Software	Mul. 1 1 1 1	Note Set up the root element, and the links to other artifacts		

Table 3.130: System Description Root Element

3.3.2.5 System Mapping Overview

There are various artifacts which correspond to the mappings collected under the metamodel element SystemMapping. Figure 3.65 shows an overview. The details will be explained in the following sub-chapters.



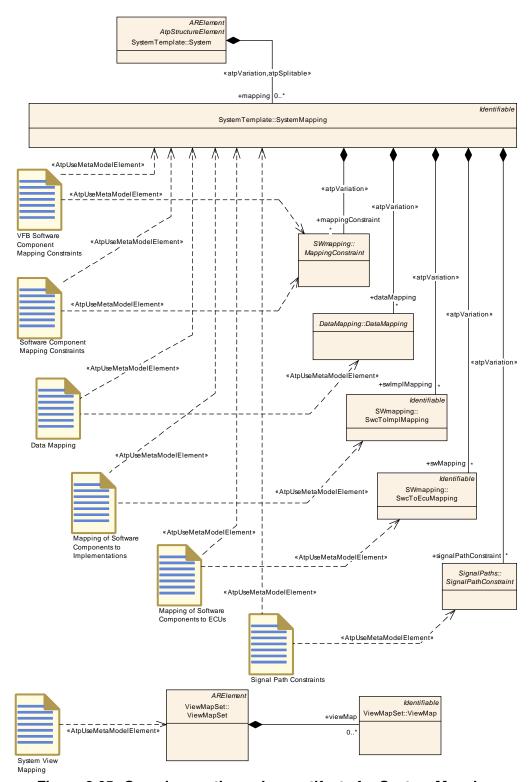


Figure 3.65: Overview on the various artifacts for System Mapping

3.3.2.6 Software Component Mapping Contraints



Artifact	Software Compone	nt Map	ping Constraints			
Package	AUTOSAR Root::M2 Work products	2::Metho	odology::Methodology Library::System::			
Brief Description	Defined constraints on how certain components must be mapped (clustered or separated).					
Description		Description of one or more constraints on Software Components during mapping to the ECUs. Three type of constraints have been defined:				
	The ComponentClustering constraint (also, clustering) is to be used for expressing that a certain set of SW components (atomic or not) must be mapped (allocated) onto the same ECU. This is some kind of "execute together on same ECU" constraint. The semantic of the clustering constraint is straightforward if all concerned SW components are atomic. Otherwise, it shall be interpreted as follows: all of the atomic SW components making up the composition must be mapped together onto the same ECU together with all other SW components (atomic or not) affected by the constraint. This also means that a clustering constraint can also refer to only a single composition. The ComponentSeparation constraint (also, separation) is to be used for expressing that two SW components (atomic or not) shall not be mapped (allocated) onto the same ECU. This is some kind of do not execute together on same ECU constraint. The semantic of the separation constraint is straightforward if one or both SW components are atomic. Otherwise, it shall be interpreted as follows: any of the atomic SW components making up the first composition, must not be mapped onto the same ECU with any atomic SW component from the second composition. As a consequence, and to preserve consistency, an atomic SW component instance cannot be part of two compositions concerned by the same separation constraint, i.e. the two compositions have to be disjoint with regards to component instances.					
			nt: The System Constraint Description has xclusive mapping of SW-Cs to one or more			
Kind	AUTOSAR XML					
Relation Type	Related Element	Mul.	Note			
Aggregated by	System Description	0*				
Produced by	Define Software Component Map- ping Constraints	1				
Consumed by	Define System Variants	1				
Consumed by	Set System Root	1	Only the reference to the artifact is needed			
Consumed by	Deploy Software Component	01	Constraints defined on the System level			
Use meta model element	MappingConstraint	1				
Use meta model element	SystemMapping	1	The splitable element SystemMapping is the root for this artifact.			

Table 3.131: Software Component Mapping Constraints



3.3.2.7 Data Mapping

Artifact	Data Mapping			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products			
Brief Description				
Description	Mapping of data prototypes from the VFB description to System signals.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	System Description	0*		
Produced by	Derive Communi- cation Needs	1*		
Consumed by	Define Signal PD Us	1		
Consumed by	Flatten Software Composition	1*		
Consumed by	Set System Root	1*	Only the reference to the artifact is needed	
Use meta model element	DataMapping	1		
Use meta model element	SystemMapping	1	The splitable element SystemMapping is the root for this artifact.	

Table 3.132: Data Mapping

3.3.2.8 Mapping of Software Components to ECUs

Artifact	Mapping of Software Components to ECUs			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products			
Brief Description	Describes the mapping of Software Components to the ECUs that are defined in the VFB context.			
Description	The VFB shows all Software Components independently of their deployment on individual ECUs. This work product defines for each Software Component the corresponding ECU on which the Software Component will be deployed and executed.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	System Description	01		
Produced by	Deploy Software Component	1		
Consumed by	Define Signal PD Us	1		
Consumed by	Define Signal Path Constraints	1		
Consumed by	Define System Timing	1		



Relation Type	Related Element	Mul.	Note
Consumed by	Define System Variants	1	
Consumed by	Derive Communication Needs	1	
Consumed by	Extract the ECU Communication	1	
Consumed by	Flatten Software Composition	1	
Consumed by	Set System Root	1	Only the reference to the artifact is needed
Use meta model element	SwcToEcuMap- ping	1	
Use meta model element	SystemMapping	1	The splitable element SystemMapping is the root for this artifact.

Table 3.133: Mapping of Software Components to ECUs

3.3.2.9 Mapping of Software Components to Implementations

Artifact	Mapping of Software Components to Implementations			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products			
Brief Description				
Description	Specifies the selection of software implementations for the atomic component prototypes. Because component prototypes can be located on different ECUs, it is possible to have different Implementations of two prototypes of the same AtomicComponentType in the system.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	System Description	01		
Produced by	Select Software Component Imple- mentation	1		
Consumed by	Define System Variants	1		
Consumed by	Define System Timing	01		
Use meta model element	SwcToImplMap- ping	1		
Use meta model element	SystemMapping	1	The splitable element SystemMapping is the root for this artifact	

Table 3.134: Mapping of Software Components to Implementations

3.3.2.10 Signal Path Constraints



Artifact	Signal Path Constr	aints			
Package	AUTOSAR Root::M2	2::Metho	dology::Methodology Library::System::		
	Work products				
Brief Description	Constraints on the P	ath that	should be used or not by Signals		
Description	One of the tasks of the System Generator is actually to calculate automatically the communication (signals) between the RTEs and define the needed frames for that communication. These definitions of the frames include implicitly the definition of the paths the AUTOSAR-Signals are transmitted through the system. Thereby the System Generator often has the choice between alternative ways through the system. There exist four different constraints for signals regarding the signal path:				
			ath describes that two signals must take Path) in the topology.		
			Path describes the way (Signal Path) that a n the topology, e.g. in case of safety critical		
	The PermissibleSignalPath describes the way (Signal Path) a signal can take in the topology. If more than one PermissibleSignalPath is defined for the same signal/operation attributes, any of them can be chosen.				
	The SeparateSignalPath describes that two or more signals must not take the same way (Signal Path) in the topology e.g. in case of redundant transmission. It is also possible that the same signal is aggregated two times by the SeparateSignalPath element to indicate that this signal should be transmitted redundantly over two different paths.				
Kind	AUTOSAR XML	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note		
Produced by	Define Signal Path Constraints	1			
Consumed by	Set System Root	1	Only the reference to the artifact is needed		
Use meta model element	SignalPathCon- straint	1			
Use meta model element	SystemMapping	1	The splitable element SystemMapping is the root for this artifact.		

Table 3.135: Signal Path Constraints

3.3.2.11 **Topology**



Artifact	Topology		
Package	AUTOSAR Root::M2 Work products	2::Metho	dology::Methodology Library::System::
Brief Description	The system topology, which may be reused in different systems.		
Description	Describes the topology of the system: A topology is formed by a number of EcuInstances that are interconnected to each other in order to form ensembles of ECUs and CommunicationClusters.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	System Description	01	
Produced by	Define System Topology	1	
In/out	Extend Topology	1	
Consumed by	Define Communi- cation Matrix	1	
Consumed by	Define Network Management	1	
Consumed by	Define Signal PD Us	1	
Consumed by	Define Signal Path Constraints	1	
Consumed by	Define Software Component Map- ping Constraints	1	
Consumed by	Define System Timing	1	
Consumed by	Define System Variants	1	
Consumed by	Define TP	1	
Consumed by	Deploy Software Component	1	
Consumed by	Extract ECU Topology	1	
Consumed by	Set System Root	1	Only the reference to the artifact is needed
Consumed by	Define Secured P DUs	01	
Use meta model element	Communication Cluster	1	
Use meta model element	Eculnstance	1	

Table 3.136: Topology

3.3.2.12 Ecu Resources Description



Artifact	ECU Resources De	scriptio	on		
Package		2::Metho	dology::Methodology Library::System::		
	Work products				
Brief Description	Definition of the resources available on an ECU.				
Description	Definition of the resources available on an ECU. It mainly contains a description of hardware elements (like physical memory sections or peripherals, pins, hardware connections) which need to be referred by a software component or a basic software description. The focus is to describe an already engineered piece of hardware, its content and structure. It is not in the focus of the ECU Resource Description to support the design of electronics hardware itself. In the XML it is represented as a set of HwDescriptionEntity -s				
Kind	AUTOSAR XML				
Relation Type	Related Element	Mul.	Note		
Aggregated by	Complete ECU Description	1			
Produced by	Define ECU Description	1*			
Consumed by	Define System Topology	1*			
Consumed by	Define BSW Interfaces	01			
Consumed by	Define ECU Abstraction Component	01			
Consumed by	Extend Topology	01			
Consumed by	Generate ECU Executable	01	may be used to set up build environment Meth.bindingTime = CompileTime		
Consumed by	Implement a BSW Module	01	Meth.bindingTime = SystemDesignTime		
Consumed by	Measure Component Resources	01			
Consumed by	Measure Resources	01			
Consumed by	Define Complex Driver Component	0*			
Consumed by	Define VFB Sensor or Actuator Component	0*			
Use meta model element	HwElement	1			

Table 3.137: ECU Resources Description

3.3.2.13 System Signal



Artifact	System Signal			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products			
Brief Description				
Description	The system signals allow to represent this communication view in a flattened structure, with (at least) one system signal defined for each data element sent or received by a SW component instance. If data has to be sent over gateways, there is still only one system signal representing this data. The representation of the data on the individual communication systems is done by the cluster signals.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	System Description	0*		
Produced by	Derive Communi- cation Needs	1*		
Consumed by	Define Signal PD Us	1		
Consumed by	Define System Variants	1		
Consumed by	Define RTE Fan- out	1*		
Consumed by	Extract the ECU Communication	0*		
Use meta model element	SystemSignal	1		

Table 3.138: System Signal

3.3.2.14 System Signal Group



Artifact	System Signal Gro	up		
Package	AUTOSAR Root::M2 Work products	2::Metho	dology::Methodology Library::System::	
Brief Description	A signal group refers to a set of signals that must always be kept together. A signal group is used to guarantee the atomic transfer of AUTOSAR composite data types.			
Description	The System Signal Group is representing a set of Signals that must be kept together. A signal group is to guarantee the transfer of AUTOSAR composite data types for sender receiver communication. The RTE is required to treat AUTOSAR signals transmitted using sender-receiver communication atomically. To achieve this, the "signal group" mechanisms shall be utilized. It is not possible to map a Variable Data Prototype with a composite datatype directly to a System Signal. The complex data type must be decomposed into single signals. As this set of single signals has to be treated as atomic, it is placed in a "signal group". It is also used in client server communication when the RTE maps a response to a corresponding operation request. The arguments, application errors, client identifier and sequence counter of an operation are mapped to System Signal of two dedicated SystemSignalGroup elements; one for the request and one for the response. The RTE Client Server Protocol is used to provide a specific semantics to each of these SystemSignalGroups and System Signal,			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	System Description	0*		
Produced by	Derive Communi- cation Needs	0*		
Consumed by	Define System Variants	1		
Consumed by	Extract the ECU Communication	0*		
Use meta model element	SystemSignal Group	1		

Table 3.139: System Signal Group

3.3.2.15 System Flat Map



Artifact	System Flat Map				
Package		2::Metho	dology::Methodology Library::System::		
	Work products				
Brief Description	Mapping of instance names to nested model elements. Use cases: Resolve name conflicts when flattening VFB software compositions; provide unique names and unique model references for measurement and calibration data.				
Description	The flat map is a list of elements, each element represents exactly one node (e.g. a component instance or data element) of the instance tree of a software system. The purpose of this element is to map the various nested representations of this instance to a flat representation and assign a unique name to it. The name will be unique in the scope to which this Flat Map belongs (which could be a whole System or a System Extract). Use case: The System Flat Map is defined in the context of a System or System Extract. It serves as a basis for generating an ECU Flat Map (or a Flat Map of a "child" System Extract). In the ECU Flat Map, the names will be used as display names for MCD tools or as names for component prototypes in a flattened software composition. For further				
	component prototype	es in a f			
Kind	component prototype	es in a f	lattened software composition. For further		
Kind Relation Type	component prototypinformation refer to t	es in a f	lattened software composition. For further		
	component prototypinformation refer to t	es in a f he desc	lattened software composition. For further ription of artifact ECU Flat Map.		
Relation Type	component prototyp information refer to t AUTOSAR XML Related Element System Configura-	es in a f he desc	lattened software composition. For further ription of artifact ECU Flat Map.		
Relation Type Aggregated by	component prototype information refer to the AUTOSAR XML Related Element System Configuration Description System Constraint	es in a f he desc Mul. 01	lattened software composition. For further ription of artifact ECU Flat Map.		
Relation Type Aggregated by Aggregated by	component prototype information refer to the AUTOSAR XML Related Element System Configuration Description System Constraint Description	es in a fhe desc	lattened software composition. For further ription of artifact ECU Flat Map.		
Relation Type Aggregated by Aggregated by Aggregated by	component prototype information refer to the AUTOSAR XML Related Element System Configuration Description System Constraint Description System Extract Generate or Adjust	es in a f he desc Mul. 01 01	lattened software composition. For further ription of artifact ECU Flat Map.		
Relation Type Aggregated by Aggregated by Aggregated by In/out	component prototype information refer to the AUTOSAR XML Related Element System Configuration Description System Constraint Description System Extract Generate or Adjust System Flat Map Add Documentation to the Software	mul. 01 01	Attened software composition. For further ription of artifact ECU Flat Map. Note Optional input in order to refer to unique		

Table 3.140: System Flat Map

3.3.2.16 System Timing



Artifact	System Timing			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products			
Brief Description	Concrete system's T	imingDe	escription and TimingConstraints	
Description	TimingDescription and TimingConstraints defined for a concrete system taking the mapping of software components to ECUs and their implementation into account. This means that the resulting Communication Matrix (and its implication to the communication stack) can also be referenced by the timing specification to refine remote communication timing behavior.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	System Description	0*		
Produced by	Define System Timing	1		
Consumed by	Define System Variants	1		
Consumed by	Extract ECU System Timing	1		
Consumed by	Deploy Software Component	01		
Use meta model element	SystemTiming	1		

Table 3.141: System Timing

3.3.2.17 System View Mapping

Artifact	System View Mapping					
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products					
Brief Description		The System View Mapping provide an mapping between different views on the system.				
Description	This artifact contains a set of system view mappings and provides an mapping between different views on the system, e.g. different overall VFB systems (e.g. abstract system description with system configuration description), or the overall VFB system with the VFB System Extract description.					
Kind	AUTOSAR XML					
Relation Type	Related Element	Mul.	Note			
Aggregated by	Overall VFB System	01	The Overall VFB System aggregates a potential mapping to the abstract or functional view of the system.			
Aggregated by	VFB System Extract	01	The VFB System Extract aggregates a potential mapping to the abstract or functional view of the system.			
Produced by	Define System View Mapping	1				
Use meta model element	ViewMapSet	1				

Table 3.142: System View Mapping



3.3.2.18 Transformer Design Bundle




Figure 3.66: Structure of deliverable Transformer Design Bundle

Deliverable	Transformer Design Bundle			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products			
Brief Description				
Description	This deliverable contains a specification of the transformer technology to be implemented by the BSWM developer. Furthermore it contains the Vendor specific parameter definition for the corresponding transformer.			
Kind	Delivered			
Relation Type	Related Element	Mul.	Note	
Aggregates	Transformer Specification	1		
Aggregates	BSW Module Vendor- Specific Configuration Pa- rameter Definition	01		
Produced by	Design Trans- former	1		
Produced by	Develop System	0*		
Consumed by	Develop Basic Software	0*		

Table 3.143: Transformer Design Bundle

3.3.2.19 Transformer Specification



Artifact	Transformer Specification		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Work products		
Brief Description			
Description	This artifact represents the functional specification of the Transformer to be implemented. The AUTOSAR methodology does not prescribe the format of this artifact.		
Kind	Custom		
Relation Type	Related Element	Mul.	Note
Aggregated by	Transformer Design Bundle	1	
Produced by	Create Trans- former Specifica- tion	1	

Table 3.144: Transformer Specification

3.3.2.20 Rapid Prototyping Scenario

Artifact	Rapid Prototyping	Scenari	0	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System::			
	Work products			
Brief Description	Description of the (required) bypass points and the hooks in the system.			
Description	Description of the (required) bypass points and the in the system and the corresponding hooks. This artifact contains the RptContainers with bypass points referencing things like parameterAccess (dataWriteAccess, dataReadAccess, dataSendPoint, dataReceivePointByValue, dataReceivePointByArgument, writtenLocalVariable, readLocalVariable, etc.) The hooks describe the link between the bypass points and the rapid prototyping algorithm.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	System Description	01		
Produced by	Define Rapid Prototyping Scenario	1		
Consumed by	Extract ECU Rapid Prototyping Sce- nario	1		
Use meta model element	RapidPrototyping Scenario	1		

Table 3.145: Rapid Prototyping Scenario

3.3.3 Communication Matrix and Communication Layers

This section contains the tasks and work products to set up the communication matrix and the communication layers as part of a system description.



3.3.3.1 Tasks

3.3.3.1.1 Define Communication Matrix

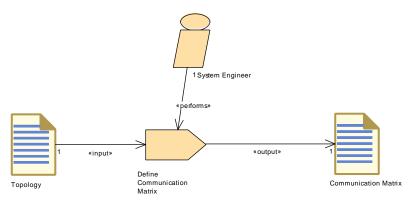


Figure 3.67: Define Communication Matrix

Task Definition	Define Communica	tion Ma	trix	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks			
Brief Description	The communication matrix contents are created or extended by adding communication definitions.			
Description	Define or extend Co	mmunic	ation Matrix.	
	Define the triggering of the Physical Channels and the mapping to the communication connector ports. In case of extension the original communication matrix contents (which were delivered as part of a system extract) are extended by adding communication definitions. The main use case is the extension of the communication matrix when refining a sub-system.			
Relation Type	Related Element	Mul.	Note	
Performed by	System Engineer	1		
Consumes	Topology	1		
Produces	Communication Matrix	1		

Table 3.146: Define Communication Matrix



3.3.3.1.2 Define Frames

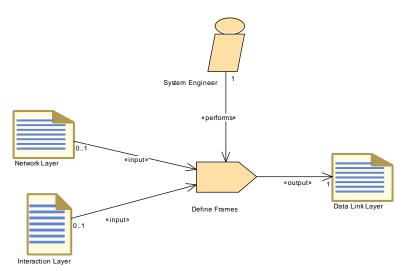


Figure 3.68: Define Frames

Task Definition	Define Frames				
Package		AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks			
Brief Description	Define Data Link La	Define Data Link Layer			
Description	the timing of Frames the mapping of Pdus Define the triggering	Define the Frame and assign it to a physical channel of a communication cluster. Determine the number, the type, the length and the timing of Frames that are sent or received by the ECUs. Describe the mapping of Pdus (I-Pdus, N-Pdus or NmPdus) into the frame. Define the triggering and the identification of a frame on the physical channel, on which it is sent.			
Relation Type	Related Element	Mul.	Note		
Performed by	System Engineer	1			
Consumes	Interaction Layer	01			
Consumes	Network Layer	01			
Produces	Data Link Layer	1			

Table 3.147: Define Frames



3.3.3.1.3 Define Signal PDUs

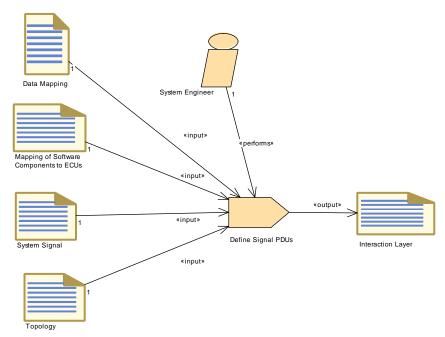


Figure 3.69: Define Signal PDUs

Task Definition	Define Signal PDUs	Define Signal PDUs			
Package	I	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks			
Brief Description	Define the I-PDU an	d their I	Signals		
Description	to a physical channe	Define the Signal Pdu that is handled by AUTOSAR COM and assign it to a physical channel of a communication cluster. Determine the length and the timing and describe the mapping of Signals into the Signal Pdu			
Relation Type	Related Element	Mul.	Note		
Performed by	System Engineer	1			
Consumes	Data Mapping	1			
Consumes	Mapping of Soft- ware Components to ECUs	1			
Consumes	System Signal	1			
Consumes	Topology	1			
Produces	Interaction Layer	1	ISignals		

Table 3.148: Define Signal PDUs



3.3.3.1.4 Define Secured PDUs

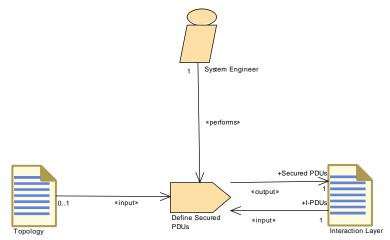


Figure 3.70: Define Secured PDUs

Task Definition	Define Secured PD	Define Secured PDUs			
Package	I	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks			
Brief Description	Define Secured PDI	Js			
Description	SecuredIPDUs are of established for IPDU SecuredPDUs corre	If a secured communication of a PDU over network is required, SecuredIPDUs are defined. A secured communication can be established for IPDUs from the Interaction Layer. In addition to the SecuredPDUs corresponding SecureCommunicationProperties are specified that describe how the PDU is secured (e.g. authentication algorithm)			
Relation Type	Related Element	Mul.	Note		
Performed by	System Engineer	1			
Consumes	Interaction Layer	1	I-PDUs: Authentic IPdu that will be secured against manipulation and replay attacks.		
Consumes	Topology	01			
Produces	Interaction Layer	1	Secured PDUs: Secured IPdu that contains payload of an Authentic IPdu supplemented by additional Authentication Information.		

Table 3.149: Define Secured PDUs



3.3.3.1.5 Define TP

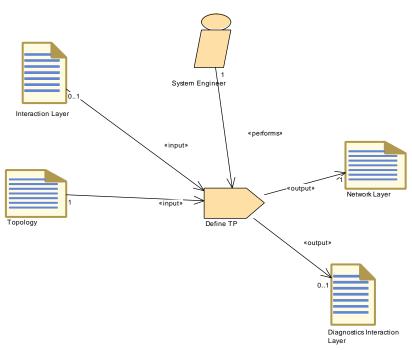


Figure 3.71: Define TP

Task Definition	Define TP			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks			
Brief Description	Define the Network	manage	ment and the N-PDUs	
Description	Define the N-PDU - Network Layer Protocol Data Unit (assembled and disassembled in a Transport Protocol module). If an I-PDU does not fit into one frame, a segmentation is needed and will be done through several N-PDUs by the Transport Protocol module. If large COM PDUs are transported by TP, the Interaction Layer should be the Input to the Define TP task. If Diagnostic is used then the Diagnostics Interaction Layer should be an output of Task Define TP.			
Relation Type	Related Element	Mul.	Note	
Performed by	System Engineer	1		
Consumes	Topology	1		
Consumes	Interaction Layer	01		
Produces	Network Layer	1		
Produces	Diagnostics Inter- action Layer	01		

Table 3.150: Define TP



3.3.3.1.6 Define Network Management

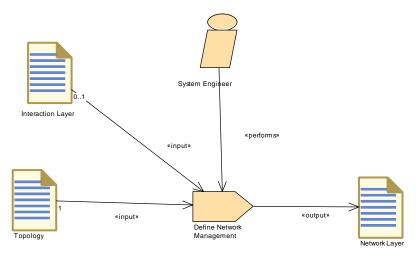


Figure 3.72: Define Network Management

Task Definition	Define Network Management			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks			
Brief Description				
Description	Define the Network Management that is responsible for the cluster wide coordinated switching of ECUs between operational modes (Network Mode, Bus-sleep Mode). Describe the Nm Pdus and configure the Nm Coordinator, the Nm Clusters and Nm Nodes.			
Relation Type	Related Element	Mul.	Note	
Performed by	System Engineer	1		
Consumes	Topology	1		
Consumes	Interaction Layer	01		
Produces	Network Layer	1		

Table 3.151: Define Network Management



3.3.3.1.7 Define PDU Gateway




Figure 3.73: Define PDU Gateway

Task Definition	Define PDU Gateway			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks			
Brief Description	Define the gateway for IPDUs			
Description	Define the gateways that are transferring the I-Pdus from one channel to the other in pairs. Each pair consist of a source and a target referencing to a IPduTriggering. In the case that a Pdu is being gatewayed to more than one channel of the same cluster, all of this gateway relationships shall be specified. Therefore, all affected IpduTriggerings must be described as gateway mappings.			
Relation Type	Related Element Mul. Note			
Performed by	System Engineer	1		
In/out	Interaction Layer	1		

Table 3.152: Define PDU Gateway

3.3.3.1.8 Define Signal Gateway




Figure 3.74: Define Signal Gateway



Task Definition	Define Signal Gate	way		
Package		AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks		
Brief Description				
Description		Define the Signal Gateway to describe the routing of signals and signal groups from one Physical Channel to another Physical Channel.		
Relation Type	Related Element	Related Element Mul. Note		
Performed by	System Engineer	1		
In/out	Interaction Layer	1		

Table 3.153: Define Signal Gateway

3.3.3.1.9 Define RTE Fan-out

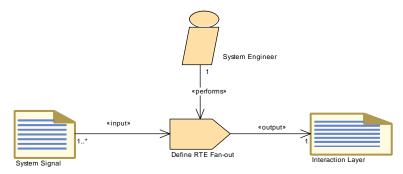


Figure 3.75: Define RTE Fan-out

Task Definition	Define RTE Fan-out		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks		
Brief Description	Define RTE fan-out which are the relation between ISignals and System Signal		
Description	The RTE supports a "signal fan-out" where the same signal (System Signal) is sent in different IPdus to multiple receivers. The Pdu Router supports the "PDU fan-out" where the same IPdu is sent to multiple destinations.		
Relation Type	Related Element	Mul.	Note
Performed by	System Engineer	1	
Consumes	System Signal	1*	
Produces	Interaction Layer	1	Link of ISignals to System Signals

Table 3.154: Define RTE Fan-out



3.3.3.1.10 Define Transformation Technology




Figure 3.76: Define Transformation Technology

Task Definition	Define Transformation Technology			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks			
Brief Description				
Description	Define the information required for the correct usage of the Transformer (e.g. DataTransformation and TransformationTechnology). This task produces a set of DataTransformationSets.			
Relation Type	Related Element Mul. Note			
	Interaction Layer	1		
	Interaction Layer	1		
Performed by	System Engineer	1		

Table 3.155: Define Transformation Technology

3.3.3.1.11 Define E2E Transformer Technology




Figure 3.77: Define E2E Transformer Technology



Task Definition	Define E2E Transformer Technology			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Tasks			
Brief Description	Define the E2E transformer technology.			
Description	This task defines the E2E transformer technology.			
Relation Type	Related Element Mul. Note			
Performed by	System Engineer	1		
Consumes	Interaction Layer	1	ISignals:	
Produces	Interaction Layer	1	E2E Transformer Technology:	

Table 3.156: Define E2E Transformer Technology

3.3.3.2 Work Products

3.3.3.2.1 Communication Layers

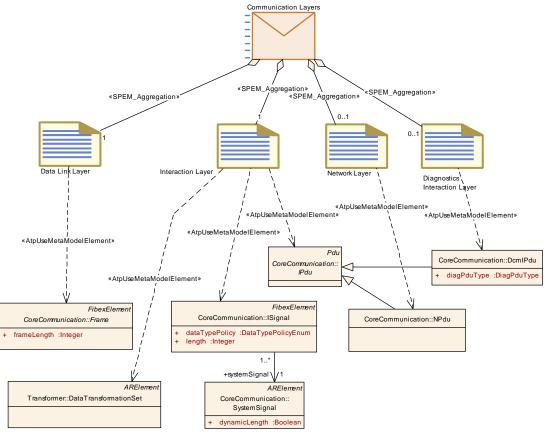


Figure 3.78: Communication Layers



Deliverable	Communication Layers		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Work products		
Brief Description	Communication Matrix		
Description	It's a container for the description elements of the communication layers		
Kind	Delivered		
Relation Type	Related Element	Mul.	Note
Aggregated by	System Description	01	
Aggregates	Data Link Layer	1	
Aggregates	Interaction Layer	1	
Aggregates	Diagnostics Inter- action Layer	01	
Aggregates	Network Layer	01	
Consumed by	Define System Timing	1	
Consumed by	Extract the ECU Communication	1	
Consumed by	Set System Root	1	Only the reference to the artifact is needed

Table 3.157: Communication Layers

3.3.3.2.2 Communication Matrix

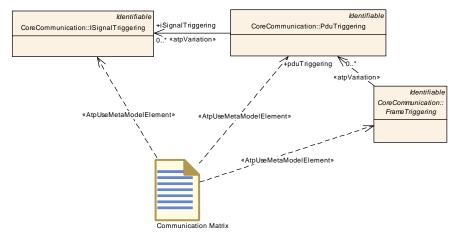


Figure 3.79: Communication Matrix



Artifact	Communication Matrix		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Work products		
Brief Description			
Description	Define the mapping of the triggering elements within the Physical Channels to the communication connector ports for the individual ECUs. Because the triggering elements are aggregated as splitable elements within the Physical Channels it is possible to define them in an artifact separated from the Topology.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	System Description	0*	
Produced by	Define Communi- cation Matrix		
Use meta model element	FrameTriggering 1		
Use meta model element	ISignalTriggering 1		
Use meta model element	PduTriggering	1	

Table 3.158: Communication Matrix

3.3.3.2.3 Data Link Layer

Artifact	Data Link Layer			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Work products			
Brief Description	Describes the frame	s that ar	e used in the Data Link Layer	
Description	Describes the layout of frames to be sent over communication channels. This definition belongs to the Data Link Layer. The Data Link Layer provides the functional and procedural means to transfer data between network entities. This layer is used to transmit data passed by an upper layer (PduR, Tp) between adjacent network nodes. In AUTOSAR the Drivers (FrDrv, CanDrv, LinDrv) and Interfaces (FrIf, CanIf, LinIf) belong to the Data Link Layer.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Communication Layers	1		
Produced by	Define Frames 1			
Use meta model element	Frame	1		

Table 3.159: Data Link Layer

3.3.3.2.4 Interaction Layer



Artifact	Interaction Layer		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Work products		
Brief Description	Describes the Signals of the Interaction Layer.		
Description	Describes the Signals of the Interaction Layer covering the COM Signals. The Interaction Layer packs one or more signals into assigned COM I-Pdus and passes them to the underlying layer for transfer between nodes in a network.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
	Define Transformation Technology	1	
	Define Transformation Technology	1	
Aggregated by	Communication Layers	1	
Produced by	Define E2E Trans- former Technology	1	E2E Transformer Technology:
Produced by	Define RTE Fan- out	1	Link of ISignals to System Signals
Produced by	Define Secured P DUs	1	Secured PDUs: Secured IPdu that contains payload of an Authentic IPdu supplemented by additional Authentication Information.
Produced by	Define Signal PD Us	1	ISignals
In/out	Define PDU Gate- way	1	
In/out	Define Signal Gateway	1	
Consumed by	Define E2E Trans- former Technology	1	ISignals:
Consumed by	Define Secured P DUs	1	I-PDUs: Authentic IPdu that will be secured against manipulation and replay attacks.
Consumed by	Define Frames	01	
Consumed by	Define Network Management	01	
Consumed by	Define TP	01	
Use meta model element	DataTransforma- tionSet	1	
Use meta model element	IPdu	1	
Use meta model element	ISignal	1	

Table 3.160: Interaction Layer

3.3.3.2.5 Diagnostics Interaction Layer



Artifact	Diagnostics Interaction Layer		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Work products		
Brief Description			
Description	Collection of DCM IPDUs.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	Communication Layers	01	
Produced by	Define TP 01		
Use meta model element	DcmlPdu	1	

Table 3.161: Diagnostics Interaction Layer

3.3.3.2.6 Network Layer

Artifact	Network Layer			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System:: Communication Matrix::Work products			
Brief Description	Describes the PDUs	of the N	Vetwork Layer.	
Description	Describes the PDUs of the Network Layer (N-PDUs and NM-PDUs). The Network Layer's main purposes are: • the segmentation and reassembly of I-PDUs and DCM I-PDUs that do not fit in one of the assigned N-PDUs • the definition of NM-PDUs			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Communication Layers	01		
Produced by	Define Network Management	1		
Produced by	Define TP 1			
Consumed by	Define Frames 01			
Use meta model element	NPdu 1			

Table 3.162: Network Layer



3.3.4 ECU Extract

3.3.4.1 Tasks

3.3.4.1.1 Extract ECU Topology

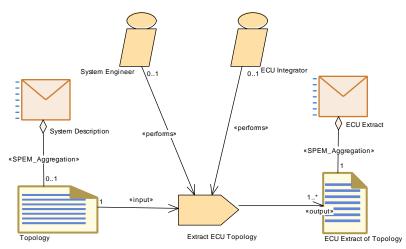


Figure 3.80: Extract ECU Topology

Task Definition	Extract ECU Topology		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Tasks		
Brief Description	Extract the topology	for a sin	gle ECU from the System Topology
Description	From the System or System Extract Topology, extract the topology for a single ECU.		
Relation Type	Related Element	Mul.	Note
Performed by	ECU Integrator	01	
Performed by	System Engineer	01	
Consumes	Topology	1	
Produces	ECU Extract of Topology	1*	

Table 3.163: Extract ECU Topology



3.3.4.1.2 Generate or Adjust ECU Flat Map

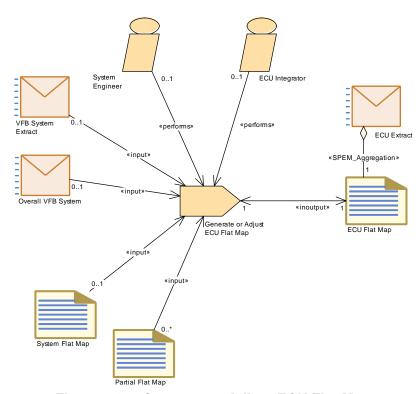


Figure 3.81: Generate or Adjust ECU Flat Map

Task Definition	Generate or Adjust	ECU F	at Map		
Package	AUTOSAR Root::M2 U Extract::Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Tasks			
Brief Description		Generates and/or adjust the unique names of component prototypes and MCD display data in the scope of a single ECU.			
Description	and MCD display da kept in the so-called The names can be g model elements of the Map, from partial Fla	Generates and/or adjust the unique names of component prototypes and MCD display data in the scope of a single ECU. This information is kept in the so-called ECU Flat Map. The names can be generated according to some rules (e.g. from model elements of the VFB system), taken over from the System Flat Map, from partial Flat Maps, or be manually defined. The task shall always result in an ECU Flat Map with unique names.			
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	01			
Performed by	System Engineer	01			
Consumes	Overall VFB System	01	Used to set the upstream references in case one starts from a complete system.		
Consumes	System Flat Map	01	Take over definitions of unique names from system level to ECU level.		
Consumes	VFB System Ex- tract	01	Used to set the upstream references in case one starts from a system extract.		



Relation Type	Related Element	Mul.	Note
Consumes	Partial Flat Map	0*	If Partial Flat Maps were delivered along with software components referring only to ECU internal information, they may be integrated into the ECU Flat Map directly, i.e. without needing the System Flat Map. • The instance refs used in a partial flat map must be taken over and adjusted to the context ECU Extract.
			 Name conflicts have to be resolved if several partial flat maps are merged.
In/out	ECU Flat Map	1	

Table 3.164: Generate or Adjust ECU Flat Map

3.3.4.1.3 Flatten Software Composition

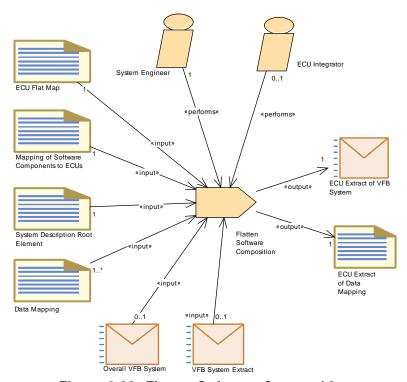


Figure 3.82: Flatten Software Composition



Task Definition	Flatten Software Co	omposi	tion		
Package	AUTOSAR Root::M2 U Extract::Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Tasks			
Brief Description	Extract and flatten th	ne ECU	Software Composition.		
Description	ComponentPrototyperepresentation (still variety) Flat representation reflat set of ComponentPrototype These can be predefined. The ECU Extract of	Generate the complete software composition in an ECU by copying ComponentPrototypes from the VFB description into a flat representation (still without service components). Flat representation means, that all compositions are removed and a "flat" set of ComponetPrototypes is generated. Due to the replication of ComponentPrototypes new names have to be generated for those. These can be predefined in the FlatMap which is an input to this task. The ECU Extract of Data Mapping is also created by this task, as the references to the Data Prototypes need to be created with respect to			
Relation Type	Related Element	Mul.	Note		
Performed by	System Engineer	1			
Performed by	ECU Integrator	01			
Consumes	ECU Flat Map	1			
Consumes	Mapping of Soft- ware Components to ECUs	1			
Consumes	System Description Root Element	1	find the top level composition		
Consumes	Data Mapping	1*			
Consumes	Overall VFB System	01	Read relevant elements starting from VFB Top Level System Composition in case transformation starts with the full system.		
Consumes	VFB System Extract	01	Read relevant elements starting from VFB Top Level System Composition in case transformation starts from the system extract.		
Produces	ECU Extract of Data Mapping	1			
Produces	ECU Extract of VF B System	1			

Table 3.165: Flatten Software Composition



3.3.4.1.4 Extract the ECU Communication

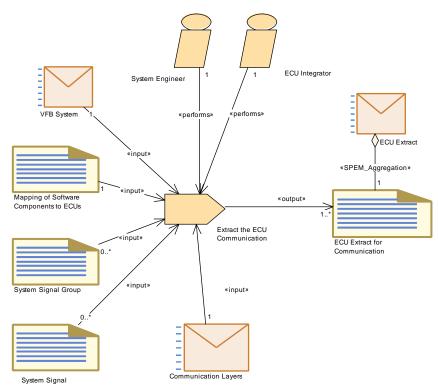


Figure 3.83: Extract the ECU Communication

Task Definition	Extract the ECU Co	mmuni	cation		
Package	AUTOSAR Root::M2 U Extract::Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Tasks			
Brief Description		The limited-scope communication matrices for an ECU to communicate on all networks on which it is directly connected.			
Description	The limited-scope co		cation matrices for an ECU to communicate s directly connected.		
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	1			
Performed by	System Engineer	1			
Consumes	Communication Layers	1			
Consumes	Mapping of Soft- ware Components to ECUs	1			
Consumes	VFB System	1	Need as input in order to set up the Data Mapping.		
Consumes	System Signal	0*			
Consumes	System Signal Group	0*			
Produces	ECU Extract for Communication	1*			

Table 3.166: Extract the ECU Communication



3.3.4.1.5 Extract the ECU Timing Model

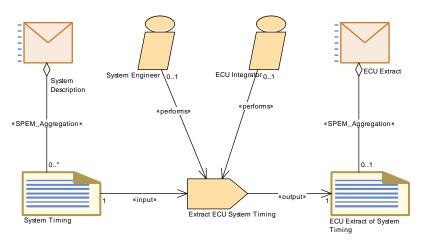


Figure 3.84: Extract the ECU System Timing Model

Task Definition	Extract ECU System Timing				
Package	AUTOSAR Root::M2 U Extract::Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Tasks			
Brief Description					
Description		Extract the System Timing Model for a particular ECU from the model for a complete system or system extract.			
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	01			
Performed by	System Engineer	01			
Consumes	System Timing	1			
Produces	ECU Extract of System Timing	1			

Table 3.167: Extract ECU System Timing



3.3.4.1.6 Extract the ECU System Variant Model

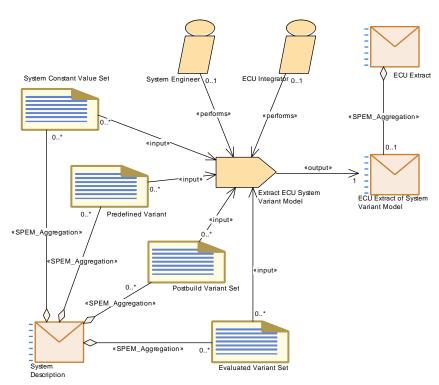


Figure 3.85: Extract the ECU System Variant Model

Task Definition	Extract ECU Syster	n Variaı	nt Model		
Package	AUTOSAR Root::M2 U Extract::Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Tasks			
Brief Description					
Description	describe variants fro	Extract the global model elements (ARElements) that are used to describe variants from system or system extract scope to a particular ECU scope. This applies to:			
	System Const	ant Valu	ue Set		
	 Postbuild Vari 	ant Set			
	 Predefined Value 	riant			
	 Evaluated Var 	Evaluated Variant Set			
	Thou are transforme				
Relation Type	Related Element	Mul.	as they are needed into the ECU Extract. Note		
Performed by	ECU Integrator	01	Note		
Performed by	System Engineer	01			
Consumes	Evaluated Variant Set	0*			
Consumes	Postbuild Variant Set	0*			
Consumes	Predefined Variant	0*			



Relation Type	Related Element	Mul.	Note
Consumes	System Constant Value Set	0*	
Produces	ECU Extract of System Variant Model	1	

Table 3.168: Extract ECU System Variant Model

3.3.4.1.7 Extract ECU Rapid Prototyping Scenario

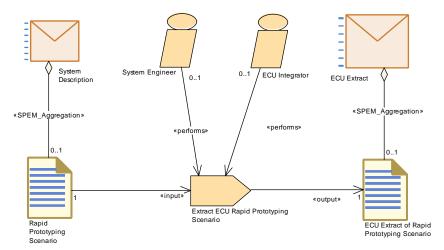


Figure 3.86: Extract ECU Rapid Prototyping Scenario

Task Definition	Extract ECU Rapid Prototyping Scenario		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Tasks		
Brief Description	Extracts the ECU Ra	apid Pro	totyping Scenario
Description	From the System Rapid Prototyping Scenario extract the entities relevant for the single ECU.		
Relation Type	Related Element	Mul.	Note
Performed by	ECU Integrator	01	
Performed by	System Engineer	01	
Consumes	Rapid Prototyping Scenario	1	
Produces	ECU Extract of Rapid Prototyping Scenario	1	

Table 3.169: Extract ECU Rapid Prototyping Scenario



3.3.4.2 Work Products

3.3.4.2.1 ECU Extract

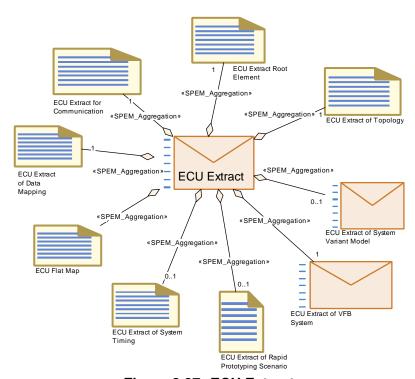


Figure 3.87: ECU Extract

Deliverable	ECU Extract				
Package		AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Work products			
Brief Description	A version of the Syst single ECU.	A version of the System Description, with information pertaining to a single ECU.			
Description	Description. The EC	A deliverable used to describe the ECU specific view on the System Description. The ECU Extract is fully decomposed and contains only Atomic Software Components. It is the basis for setting up the ECU Configuration.			
	A timing model is opt	A timing model is optionally included.			
	need to be bound for ECU extract may opt predefine variants for	This deliverable may contain variation points in its XML artifacts which need to be bound for the ECU. If such variation points are present, the ECU extract may optionally include Predefined Variants in order to predefine variants for later selection and an Evaluated Variant Set (this is expressed by artifact ECU Extract of System Variant Model).			
		This deliverable corresponds to the system description with the system category "ECU_EXTRACT" (see [TPS_SYST_01003]).			
Kind	Delivered	Delivered			
Relation Type	Related Element	Mul.	Note		
	Configure Trans- former	1			



Relation Type	Related Element	Mul.	Note
Aggregates	ECU Extract Root Element	1	
Aggregates	ECU Extract for Communication	1	
Aggregates	ECU Extract of Data Mapping	1	
Aggregates	ECU Extract of Topology	1	
Aggregates	ECU Extract of VF B System	1	
Aggregates	ECU Flat Map	1	
Aggregates	ECU Extract of Rapid Prototyping Scenario	01	
Aggregates	ECU Extract of System Timing	01	
Aggregates	ECU Extract of System Variant Model	01	
Produced by	Generate ECU Extract	1	
Produced by	Develop Sub-Sys- tem	1*	
Produced by	Develop System	1*	
Consumed by	Configure Com	1	
Consumed by	Configure Debug	1	
Consumed by	Configure Diagnostics	1	Application software requirements for diagnostics, especially SwcServiceDependency and ServiceNeeds.
Consumed by	Configure ECUC	1	
Consumed by	Configure Mode Management	1	Application software requirements for NvM, especially SwcServiceDependency and ServiceNeeds.
Consumed by	Configure NvM	1	Application software requirements for NvM, especially SwcServiceDependency and ServiceNeeds.
Consumed by	Configure RTE	1	Elements of the System Description and VFB Description are referred by the RTE configuration.
			Optional Input: ECU Extract of System Timing, e.g. execution order constraints.
Consumed by	Configure Watch- dog Manager	1	Application software requirements for WdgM, especially SwcServiceDependency and ServiceNeeds.
Consumed by	Connect Service Component	1	Find the ports on the application side to be connected to the Service Component.



Relation Type	Related Element	Mul.	Note
Consumed by	Define Integration Variant	1	
Consumed by	Generate Base Ecu Configuration	1	
Consumed by	Generate RTE	1	Find the VFB description of all Atomic Software Components on this ECU and the relevant parts of the system description. The ECU Flat Map is also an input. Meth.bindingTime = SystemDesignTime
Consumed by	Generate RTE Postbuild Dataset	1	Meth.bindingTime = LinkTime
Consumed by	Generate RTE Prebuild Dataset	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Generate Updated ECU Configuration	1	
Consumed by	Integrate Software for ECU	1	
Consumed by	Prepare ECU Configuration	1	
Consumed by	Update ECU Configuration	1	
Consumed by	Create MC Function Model	01	The ECU Flat Map can be used to define references to variables and parameters which are later visible in A2L.
			Furthermore, the ECU Extract can be used to find the relevant software components.
Consumed by	Create Service Component	01	Input information about the Service Ports and Service Dependencies of the software components.
Consumed by	Define ECU Tim- ing	01	Needed to set up links to the elements of the ECU extract.

Table 3.170: ECU Extract

3.3.4.2.2 ECU Extract Root Element

Artifact	ECU Extract Root Element			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Work products			
Brief Description				
Description	Extract of the System root element for a specific ECU.	Extract of the System root element for a specific ECU.		
Kind	AUTOSAR XML			
Extends	System			
Relation Type	Related Element Mul. Note			



Relation Type	Related Element	Mul.	Note
Aggregated by	ECU Extract	1	
Consumed by	Generate Rapid Prototyping Wrap- per	1	
Use meta model element	System	1	

Table 3.171: ECU Extract Root Element

3.3.4.2.3 ECU Extract of VFB System

Deliverable	ECU Extract of VFE	3 Syster	m
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Work products		
Brief Description	Contains the complete software composition in an ECU, copied from the VFB description into a flat representation, it is still without service components.		
Description	Contains the complete software composition in an ECU, copied from the VFB description into a flat representation, that means it is still without service components. Flat representation means, that all compositions have been removed and a "flat" set of ComponentPrototypes was generated (including their connectors) which are put into the top level composition of the ECU.		
Kind	Delivered		
Extends	VFB System		
Relation Type	Related Element	Mul.	Note
Aggregated by	ECU Extract	1	
Produced by	Flatten Software Composition	1	
Consumed by	Generate Rapid Prototyping Wrap- per	1	
Use meta model element	RootSwComposi- tionPrototype	1	

Table 3.172: ECU Extract of VFB System

3.3.4.2.4 ECU Extract of Data Mapping

Artifact	ECU Extract of Dat	а Маррі	ing	
Package		AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Work products		
Brief Description				
Description		ECU extract of the mapping of data prototypes from the (flattened) VFB description to System Signals.		
Kind	AUTOSAR XML	AUTOSAR XML		
Relation Type	Related Element	Related Element Mul. Note		
Aggregated by	ECU Extract	1		



Relation Type	Related Element	Mul.	Note
Produced by	Flatten Software Composition	1	
Use meta model element	DataMapping	1	

Table 3.173: ECU Extract of Data Mapping

3.3.4.2.5 ECU Extract of Topology

Artifact	ECU Extract of Topology		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Work products		
Brief Description	A view of the topolog	gy cente	red around a single ECU.
Description	A view of the topolog	gy cente	red around a single ECU.
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	ECU Extract	1	
Produced by	Extract ECU Topology	1*	
Use meta model element	Communication Cluster	1	
Use meta model element	Eculnstance	1	

Table 3.174: ECU Extract of Topology

3.3.4.2.6 ECU Extract for Communication

Artifact	ECU Extract for Co	ECU Extract for Communication				
Package		AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Work products				
Brief Description		A version of the System Communication Matrix work product, with information pertaining to a single ECU.				
Description	for communication with information needed	This artifact represents an extract of the System Description elements for communication with respect to a single ECU. It provides all information needed to let the ECU communicate on all networks on which it is directly connected.				
	It is extracted from the	nese sys	tem artifacts:			
	Communication	Communication Matrix				
	Communication	Communication Layers				
	System Signa	System Signal(s)				
	System Signa	System Signal Group(s)				
Kind	AUTOSAR XML	AUTOSAR XML				
Relation Type	Related Element	Mul.	Note			
Aggregated by	ECU Extract	1				



Relation Type	Related Element	Mul.	Note
Produced by	Extract the ECU Communication	1*	
Use meta model element	FibexElement	1	

Table 3.175: ECU Extract for Communication

3.3.4.2.7 ECU Extract of System Timing

Artifact	ECU Extract of System Timing		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC		
	U Extract::Work prod	ducts	
Brief Description			
Description	The extract of the Sy	stem Ti	ming for a particular ECU.
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	ECU Extract	01	
Produced by	Extract ECU Sys-	1	
	tem Timing		
Consumed by	Define ECU Tim-	01	
	ing		
Use meta model element	SystemTiming	1	

Table 3.176: ECU Extract of System Timing

3.3.4.2.8 ECU Extract of System Variant Model

Deliverable	ECU Extract of Sys	tem Va	riant Model	
Package		AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Work products		
Brief Description				
Description	An extract of the Sys	An extract of the System artifacts		
	System Cons	tant Valı	ue Set	
	Postbuld Varia	ant Set		
	Predefined Value	ariant		
	 Evaluated Valuated 	Evaluated Variant Set		
	It contains only the e	elements	s relevant for a particular ECU.	
Kind	Delivered			
Relation Type	Related Element	Mul.	Note	
Aggregated by	ECU Extract	01		
Aggregates	Evaluated Variant Set	0*		
Aggregates	Postbuild Variant Set	0*		



Relation Type	Related Element	Mul.	Note
Aggregates	Predefined Variant	0*	
Aggregates	System Constant Value Set	0*	
Produced by	Extract ECU System Variant Model	1	
Consumed by	Generate Rapid Prototyping Wrap- per	01	

Table 3.177: ECU Extract of System Variant Model

3.3.4.2.9 ECU Flat Map

Artifact	ECU Flat Map			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Work products			
Brief Description	Mapping of instance names to nested model elements. Use cases: Resolve name conflicts when flattening VFB software compositions; provide unique names for measurement and calibration data.			
Description	node (e.g. a compor of a software system various nested repre and assign a unique of a single ECU. (No	The flat map is a list of elements, each element represents exactly one node (e.g. a component instance or data element) of the instance tree of a software system. The purpose of this element is to map the various nested representations of this instance to a flat representation and assign a unique name to it. The name will be unique in the scope of a single ECU. (Note that additional alias names can be defined via artifact Alias Name Set.)		
	Use cases:			
	calibration. The which is produced to find	 Specify the display name of a data object for measurement and calibration. This serves as an input for the calibration support which is produced by the RTE generator. The RTE generator needs to find the attributes assigned to these data via the attached references. Specify a unique name for an instance of a component prototype in the ECU extract of the system description. This information is needed to set up the ECU extract. 		
	prototype in the			
		 Assign initial values to calibration parameters as input for the RTE generator. 		
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	ECU Extract	1		
In/out	Generate or Adjust ECU Flat Map	1		
Consumed by	Flatten Software Composition	1		
Consumed by	Generate Local M C Data Support	1	Meth.bindingTime = SystemDesignTime	



Relation Type	Related Element	Mul.	Note
Consumed by	Generate Rapid Prototyping Wrap- per	1	
Consumed by	Provide RTE Calibration Dataset	1	
Consumed by	Generate A2L	01	The ECU Flat Map is needed in case the A2L generator has to process an MC Function Model that relates to data in the ECU Flat Map.
Use meta model element	FlatInstanceDe- scriptor	1	

Table 3.178: ECU Flat Map

3.3.4.2.10 ECU Extract of Rapid Prototyping Scenario

Artifact	ECU Extract of Rap	ECU Extract of Rapid Prototyping Scenario			
Package	I	AUTOSAR Root::M2::Methodology::Methodology Library::System::EC U Extract::Work products			
Brief Description	Description of the (re	equired)	bypass points in the ECU.		
Description	Description of the (re	equired)	bypass points in the ECU.		
Kind	AUTOSAR XML	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note		
Aggregated by	ECU Extract	01			
Produced by	Extract ECU Rapid Prototyping Sce- nario	1			
In/out	Refine Rapid Prototyping Scenario	1			
Consumed by	Generate Rapid Prototyping Wrap- per	1			

Table 3.179: ECU Extract of Rapid Prototyping Scenario

3.4 Software Component

This chapter contains the definition of work products and tasks used for the development of a single software component against a given VFB description. For the definition of the relevant meta-model elements refer to [5].



3.4.1 Tasks

3.4.1.1 Define Software Component Internal Behavior

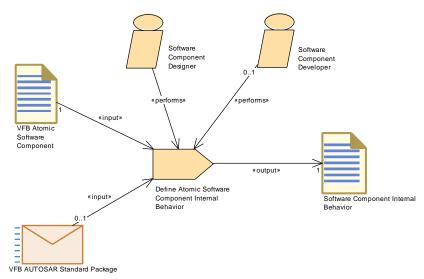


Figure 3.88: Define Software Component Internal Behavior

Task Definition	Define Atomic Soft	ware Co	omponent Internal Behavior	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks			
Brief Description	Define the InternalBehavior in relation to a given AtomicSoftwareComponentType			
Description	Define the InternalBehavior in relation to a given AtomicSoftwareComponentType so that an RTE API can be generated. This includes the definition of Runnables, RTE Events, Inter-Runnable variables, etc.			
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Designer	1		
Performed by	Software Component Developer	01		
Consumes	VFB Atomic Soft- ware Component	1		
Consumes	VFB AUTOSAR Standard Package	01	Use standardized elements (e.g. Data Types) as blueprints (as far as applicable) to create the corresponding elements of the actual project.	
Produces	Software Component Internal Behavior	1		

Table 3.180: Define Atomic Software Component Internal Behavior



3.4.1.2 Define Partial Flat Map

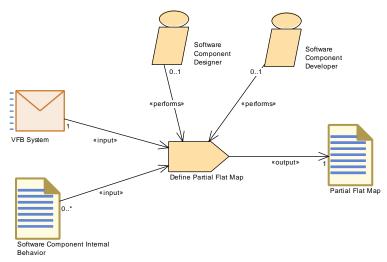


Figure 3.89: Define Partial Flat Map

Task Definition	Define Partial Flat I	Мар	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks		
Brief Description			
Description	Define a Partial Flat Map for an intended delivery of Atomic Software Components.		
Relation Type	Related Element	Mul.	Note
Performed by	Software Component Designer	01	
Performed by	Software Component Developer	01	
Consumes	VFB System	1	Various parts of a given VFB system will be used as input:
			 Refer to parameters and variables in port interfaces and their data types.
			 In order to define unique names, also other the component definitions not in the scope of the partial flat map might be checked.
			 Set a link to the context of the Flat Map, e.g. a VFB Composition.
Consumes	Software Component Internal Behavior	0*	Refer to parameter and variables defined in the Internal Behavior of one or more Atomic Software Components.
Produces	Partial Flat Map	1	

Table 3.181: Define Partial Flat Map



3.4.1.3 Define Software Component Timing

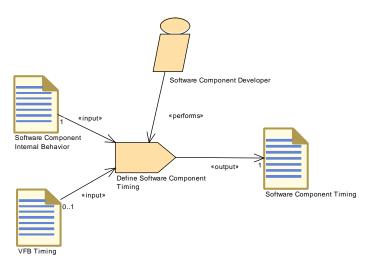


Figure 3.90: Define Software Component Timing

Task Definition	Define Software Co	mpone	nt Timing		
Package	AUTOSAR Root::M2 Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks			
Brief Description		Define SWCTiming (TimingDescription and TimingConstraints) for the Internal Behavior (RunnableEntities) of a Software Component			
Description	software component AtomicSWCompone In the former case, t constraints for the In In the latter case, tim	Define SWCTiming (TimingDescription and TimingConstraints) of a software component. A software component can either be of type AtomicSWComponentType or CompositionSWComponentType. In the former case, the task allows to describe timing description and constraints for the InternalBehavior of the AtomicSWComponentType. In the latter case, timing descriptions and constraints can be defined for all Atomic Software Components in the			
Relation Type	Related Element	Mul.	Note		
Performed by	Software Component Developer	1			
Consumes	Software Component Internal Behavior	1			
Consumes	VFB Timing	01			
Produces	Software Component Timing	1			

Table 3.182: Define Software Component Timing



3.4.1.4 Define SymbolProps for Types




Figure 3.91: Define SymbolProps for Types

Task Definition	Define SymbolProp	s for Ty	/pes		
Package	AUTOSAR Root::M2 Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks			
Brief Description	Define SymbolProps code.	Define SymbolProps for types in order to resolve name conflicts in the code.			
Description	software component code as well as in co	Redefines the symbols used by the RTE contract for the names of software component types and/or implementation data types (in the code as well as in certain header file names). This task is used to resolve name conflicts between different software components without changing the VFB model.			
Relation Type	Related Element	Mul.	Note		
Performed by	Software Compo- nent Developer	1			
Produces	VFB Atomic Soft- ware Component	0*	symbolProps: The symbolProps attribute redefines the software component type name used in the code of the RTE. This resolves name clashes among different software component types designed accidentally with the same shortName. Note that this output is a splitable element, so it can be added later without changing the VFB model.		



Relation Type	Related Element	Mul.	Note
Produces	VFB Types	0*	symbolProps: The symbolProps attribute redefines the implementation data type name used in the code of the RTE and/or the component. This resolves name clashes among different implementation data types designed accidentally with the same shortName.
			Note that this output is a splitable element, so it can be added later without changing the VFB model.

Table 3.183: Define SymbolProps for Types

3.4.1.5 Add Documentation to the Software Component

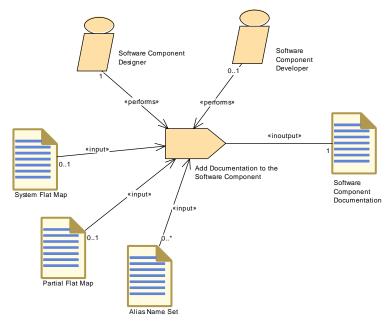


Figure 3.92: Add Documentation to the Software Component

Task Definition	Add Documentation to the Software Component		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks		
Brief Description	Add documentation to the Software Component		
Description	Add documentation to the Software Component describing the functionality, how to test it, the calibration uses, the maintenance and diagnosis issues.		
Relation Type	Related Element	Mul.	Note
Performed by	Software Component Designer	1	
Performed by	Software Component Developer	01	



Relation Type	Related Element	Mul.	Note
Consumes	Partial Flat Map	01	Optional input in order to refer to unique names defined in component or composition context.
Consumes	System Flat Map	01	Optional input in order to refer to unique names defined in system context.
Consumes	Alias Name Set	0*	Optional input in order to refer to unique names defined in an Alias Name Set (e.g. System Constants).
In/out	Software Component Documentation	1	

Table 3.184: Add Documentation to the Software Component

3.4.1.6 Generate Atomic Software Component Contract Header Files

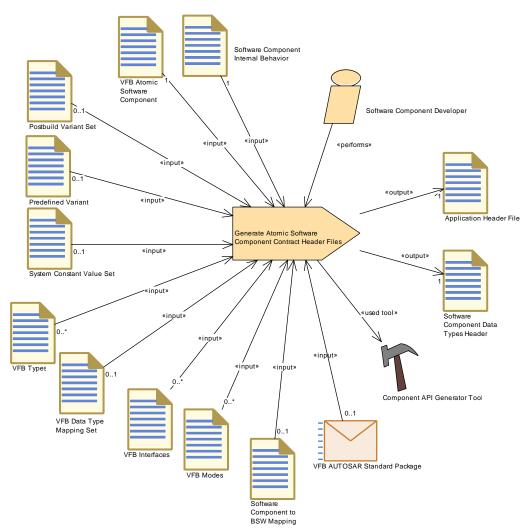


Figure 3.93: Generate Atomic Software Component Contract Header Files



Task Definition	Generate Atomic Software Component Contract Header Files				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks				
Brief Description	Generate the component contract header files.				
Description	Generate the component header files as part of the so-called "contract phase". These headers will allow to link the component lateron with the RTE. The header can still contain variants with later binding time, therefore the information about these variants is contained in the input to this task.				
	Meth.bindingTime =				
Relation Type	Related Element	Mul.	Note		
Performed by	Software Component Developer	1			
Consumes	Software Component Internal Behavior	1	Meth.bindingTime = SystemDesignTime		
Consumes	VFB Atomic Soft- ware Component	1	Meth.bindingTime = SystemDesignTime		
Consumes	Postbuild Variant Set	01			
Consumes	Predefined Variant	01			
Consumes	Software Component to BSW Mapping	01	If a Software Component is mapped to a BSW module description, this input is optionally needed already in the contract phase in order to ensure that the generated prototypes for runnables are consistent with the definitions in Software Component and BSW. Meth.bindingTime = SystemDesignTime		
Consumes	System Constant Value Set	01	Meth.bindingTime = SystemDesignTime		
Consumes	VFB AUTOSAR Standard Package	01			
Consumes	VFB Data Type Mapping Set	01	Meth.bindingTime = SystemDesignTime		
Consumes	VFB Interfaces	0*	Meth.bindingTime = SystemDesignTime		
Consumes	VFB Modes	0*	Meth.bindingTime = SystemDesignTime		
Consumes	VFB Types	0*	Meth.bindingTime = SystemDesignTime		
Produces	Application Header File	1	Meth.bindingTime = CodeGenerationTime		
Produces	Software Compo- nent Data Types Header	1	Meth.bindingTime = CodeGenerationTime		
Used tool	Component API Generator Tool	1			

Table 3.185: Generate Atomic Software Component Contract Header Files



3.4.1.7 Generate Component Header File in Vendor Mode

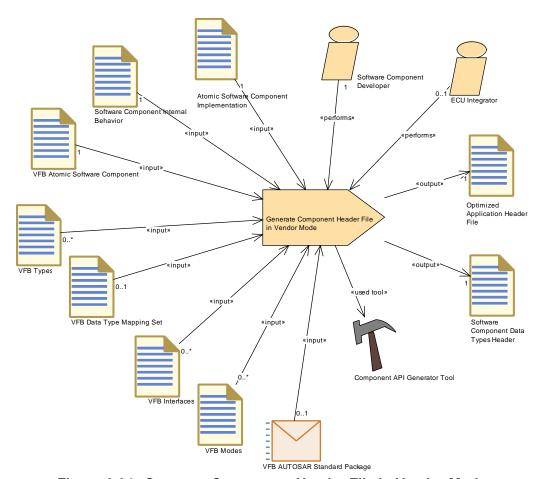


Figure 3.94: Generate Component Header File in Vendor Mode

Task Definition	Generate Component Header File in Vendor Mode				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks				
Brief Description	Generate an optimized component header file. This is achieved by using the RTE's vendor mode.				
Description	Generate an optimized component header file. This is achieved by using the RTE's vendor mode. Meth.bindingTime = CodeGenerationTime				
Relation Type	Related Element	Mul.	Note		
Performed by	Software Compo- nent Developer	1			
Performed by	ECU Integrator	01			
Consumes	Atomic Software Component Imple- mentation	1	Meth.bindingTime = SystemDesignTime		
Consumes	Software Component Internal Behavior	1	Meth.bindingTime = SystemDesignTime		



Relation Type	Related Element	Mul.	Note
Consumes	VFB Atomic Soft- ware Component	1	Meth.bindingTime = SystemDesignTime
Consumes	VFB AUTOSAR Standard Package	01	
Consumes	VFB Data Type Mapping Set	01	Meth.bindingTime = SystemDesignTime
Consumes	VFB Interfaces	0*	Meth.bindingTime = SystemDesignTime
Consumes	VFB Modes	0*	Meth.bindingTime = SystemDesignTime
Consumes	VFB Types	0*	Meth.bindingTime = SystemDesignTime
Produces	Optimized Application Header File	1	Meth.bindingTime = CodeGenerationTime
Produces	Software Compo- nent Data Types Header	1	Meth.bindingTime = CodeGenerationTime
Used tool	Component API Generator Tool	1	

Table 3.186: Generate Component Header File in Vendor Mode



3.4.1.8 Generate Component Prebuild Data Set

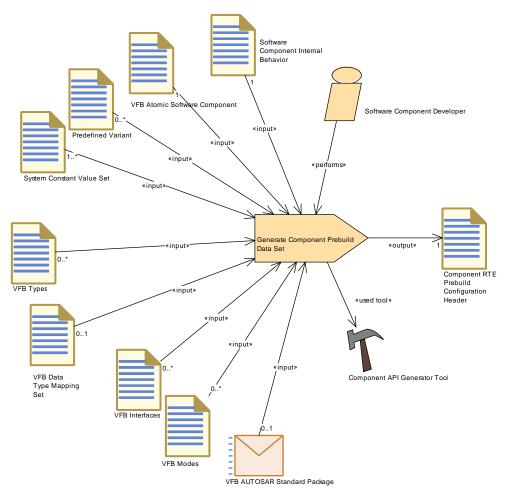


Figure 3.95: Generate Component Prebuild Data Set

Task Definition	Generate Compone	ent Preb	ouild Data Set	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks			
Brief Description	Prebuild Data Set Generation Phase for a software component: It binds all variations which need to be set after generation of the RTE contract header but before compilation of the component.			
Description	Prebuild Data Set Generation Phase for a software component: It binds all variations which need to be set after generation of the RTE contract header but before compilation of the component. The output is a configuration header which is used when compiling the component and the RTE as well. Meth.bindingTime = PreCompileTime			
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Developer	1		
Consumes	Software Component Internal Behavior	1	Meth.bindingTime = CodeGenerationTime	



Relation Type	Related Element	Mul.	Note
Consumes	VFB Atomic Soft- ware Component	1	Meth.bindingTime = CodeGenerationTime
Consumes	System Constant Value Set	1*	Meth.bindingTime = CodeGenerationTime
Consumes	VFB AUTOSAR Standard Package	01	
Consumes	VFB Data Type Mapping Set	01	Meth.bindingTime = CodeGenerationTime
Consumes	Predefined Variant	0*	
Consumes	VFB Interfaces	0*	Meth.bindingTime = CodeGenerationTime
Consumes	VFB Modes	0*	Meth.bindingTime = CodeGenerationTime
Consumes	VFB Types	0*	Meth.bindingTime = CodeGenerationTime
Produces	Component RTE Prebuild Configu- ration Header	1	Meth.bindingTime = PreCompileTime
Used tool	Component API Generator Tool	1	

Table 3.187: Generate Component Prebuild Data Set

3.4.1.9 Implement Atomic Software Component

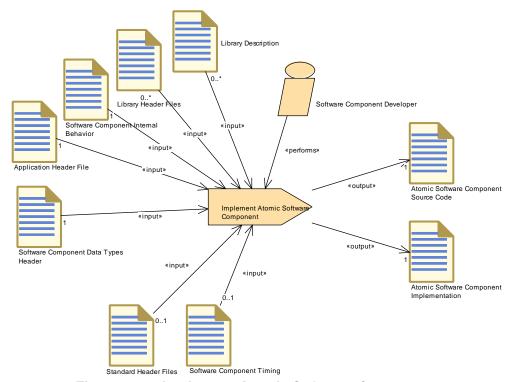


Figure 3.96: Implement Atomic Software Component



Task Definition	Implement Atomic Software Component				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks				
Brief Description	Implement the code of the AtomicSoftwareComponent and decribe the Implementation.				
Description	Implement the code of the AtomicSoftwareComponent against the generated component contract header. Document the basic information in the Implementation Description. Meth.bindingTime = CodeGenerationTime				
Relation Type	Related Element	Mul.	Note		
Performed by	Software Component Developer	1			
Consumes	Application Header File	1	Meth.bindingTime = SystemDesignTime		
Consumes	Software Compo- nent Data Types Header	1	Meth.bindingTime = SystemDesignTime		
Consumes	Software Component Internal Behavior	1	Meth.bindingTime = SystemDesignTime		
Consumes	Software Component Timing	01	Meth.bindingTime = SystemDesignTime		
Consumes	Standard Header Files	01	Meth.bindingTime = CodeGenerationTime		
Consumes	Library Description	0*	Meth.bindingTime = CodeGenerationTime		
Consumes	Library Header Files	0*	Meth.bindingTime = CodeGenerationTime		
Produces	Atomic Software Component Imple- mentation	1	Meth.bindingTime = CodeGenerationTime		
Produces	Atomic Soft- ware Component Source Code	1	Meth.bindingTime = CodeGenerationTime		

Table 3.188: Implement Atomic Software Component



3.4.1.10 Compile Atomic Software Component

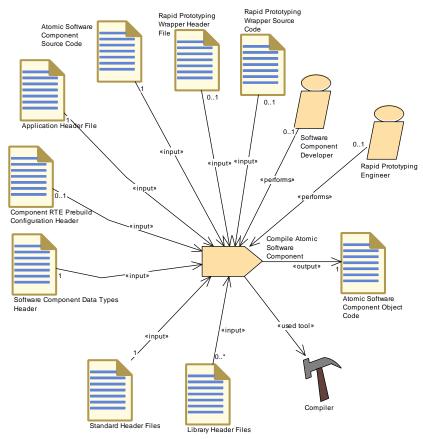


Figure 3.97: Compile Atomic Software Component

Task Definition	Compile Atomic Software Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks			
Brief Description	Compile the Atomics	Software	Component independently of an ECU.	
Description	Compile the Atomic Software Component independently of an ECU. In the context of Rapid Prototyping Wrapper compilation the task is performed by the Rapid Prototyping Engineer. Meth.bindingTime = CompileTime			
Relation Type	Related Element	Mul.	Note	
Performed by	Rapid Prototyping Engineer	01		
Performed by	Software Component Developer	01		
Consumes	Application Header File	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Atomic Soft- ware Component Source Code	1	Meth.bindingTime = CodeGenerationTime	



Relation Type	Related Element	Mul.	Note
Consumes	Software Component Data Types Header	1	Meth.bindingTime = CodeGenerationTime
Consumes	Standard Header Files	1	Meth.bindingTime = CodeGenerationTime
Consumes	Component RTE Prebuild Configuration Header	01	Meth.bindingTime = PreCompileTime
Consumes	Rapid Prototyping Wrapper Header File	01	
Consumes	Rapid Prototyping Wrapper Source Code	01	
Consumes	Library Header Files	0*	Meth.bindingTime = CodeGenerationTime
Produces	Atomic Software Component Object Code	1	The object file should include both code of the SWC and the E2E Protection Wrapper code (if present as an input). Meth.bindingTime = CompileTime
Used tool	Compiler	1	

Table 3.189: Compile Atomic Software Component

3.4.1.11 Map Software Component to BSW

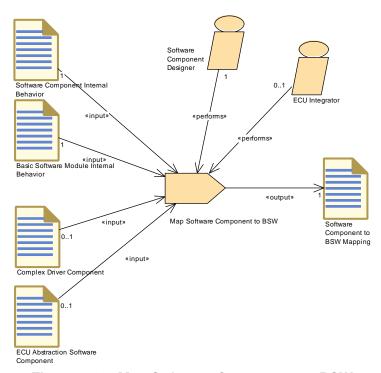


Figure 3.98: Map Software Component to BSW



Task Definition	Map Software Com	ponent	to BSW	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks			
Brief Description	Define the mapping Module.	betweer	a Software Component and a BSW	
Description	Define the mapping between a Software Component and a BSW Module. Required only for Complex Drivers and ECU Abstraction Components. Note that for Service Components, this mapping will be generated in the ECU integration phase, so the latter is not considered as a task in the responsibility of the BSW developer.			
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Designer	1		
Performed by	ECU Integrator	01		
Consumes	Basic Software Module Internal Behavior	1		
Consumes	Software Component Internal Behavior	1		
Consumes	Complex Driver Component	01		
Consumes	ECU Abstraction Software Compo- nent	01		
Produces	Software Component to BSW Mapping	1		

Table 3.190: Map Software Component to BSW



3.4.1.12 Measure Component Resources

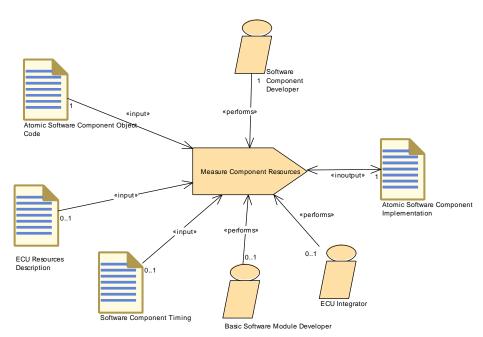


Figure 3.99: Measure Component Resources

Task Definition	Measure Component Resources		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks		
Brief Description	Measure the resource	ce consu	Imption of an Atomic Software Component
Description	Determine the resource consumption (memory, execution time) for a specific implementation of an Atomic Software Component in a certain context (ECU or test environment) and document the results in the Implementation description targeted at this specific platform. The ECU Resources Description is an optional input, because some results should be documented in relation to the hardware elements.		
Relation Type	Related Element	Mul.	Note
Performed by	Software Component Developer	1	
Performed by	Basic Software Module Developer	01	
Performed by	ECU Integrator	01	
Consumes	Atomic Software Component Object Code	1	
Consumes	ECU Resources Description	01	
Consumes	Software Component Timing	01	
In/out	Atomic Software Component Imple- mentation	1	



Relation Type Related Element Mul. Note	Relation Type	Related Element	Mul.	Note
---	---------------	-----------------	------	------

Table 3.191: Measure Component Resources

3.4.1.13 Recompile Component in ECU Context

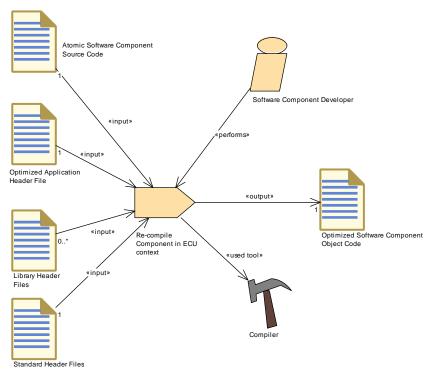


Figure 3.100: Recompile Component in ECU Context

Task Definition	Re-compile Compo	nent in	ECU context	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks			
Brief Description	Re-compile Compon	ent with	ECU-Configuration specific optimizations.	
Description	Re-compile Component with optimizations made by the RTE in the context of an ECU (so-called RTE implementation phase). Meth.bindingTime = CompileTime			
Relation Type	Related Element	Mul.	Note	
Performed by	Software Component Developer	1		
Consumes	Atomic Soft- ware Component Source Code	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Optimized Application Header File	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Standard Header Files	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Library Header Files	0*	Meth.bindingTime = CodeGenerationTime	



Relation Type	Related Element	Mul.	Note
Produces	Optimized Soft- ware Component Object Code	1	Meth.bindingTime = CompileTime
Used tool	Compiler	1	

Table 3.192: Re-compile Component in ECU context

3.4.1.14 Define Consistency Needs

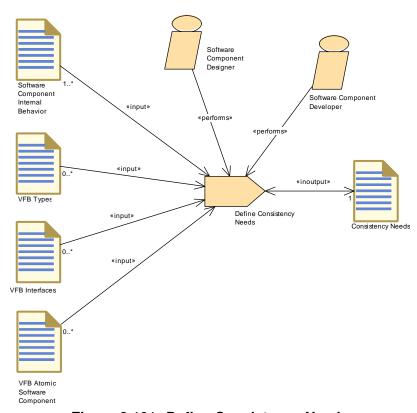


Figure 3.101: Define Consistency Needs

Task Definition	Define Consistency	Define Consistency Needs			
Package	AUTOSAR Root::M2 Tasks	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks			
Brief Description					
Description	and a group of Data defined first time at t	Defines the consistency relations between a group of RunnableEntitys and a group of DataPrototypes. The consistency relations can be defined first time at the design of an Atomic Software Component but can be added as well if Compositions are created.			
Relation Type	Related Element	Mul.	Note		
Performed by	Software Component Designer	1			
Performed by	Software Component Developer	1			



Relation Type	Related Element	Mul.	Note
Consumes	Software Component Internal Behavior	1*	Runnables the consistency is defined for.
Consumes	VFB Atomic Software Component	0*	The description of an AtomicSoftwareComponentType without InternalBehavior.
Consumes	VFB Interfaces	0*	Interfaces which are relevant for the consistency definition.
Consumes	VFB Types	0*	Data types which are relevant for the consistency definition.
In/out	Consistency Needs	1	The description of the correlation between a group of RunnableEntitys and a group of DataPrototypes. In order to allow incremental development and refinement the Consistency Needs artifact is also used as an input.

Table 3.193: Define Consistency Needs

3.4.1.15 Generate Rapid Prototyping Wrapper

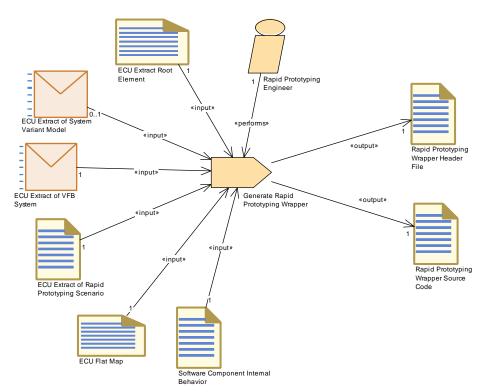


Figure 3.102: Generate Rapid Prototyping Wrapper



Task Definition	Generate Rapid Prototyping Wrapper		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Tasks		
Brief Description	Generate Rapid Prototyping Wrapper code.		
Description	Generate Rapid Prototyping Wrapper code. The header and source code are generated based on the Rapid Prototyping Scenario describing the bypass points and the RPT hooks.		
Relation Type	Related Element	Mul.	Note
Performed by	Rapid Prototyping Engineer	1	
Consumes	ECU Extract Root Element	1	
Consumes	ECU Extract of Rapid Prototyping Scenario	1	
Consumes	ECU Extract of VF B System	1	
Consumes	ECU Flat Map	1	
Consumes	Software Component Internal Behavior	1	
Consumes	ECU Extract of System Variant Model	01	
Produces	Rapid Prototyping Wrapper Header File	1	
Produces	Rapid Prototyping Wrapper Source Code	1	

Table 3.194: Generate Rapid Prototyping Wrapper



3.4.2 Work Products

3.4.2.1 Delivered Atomic Software Components

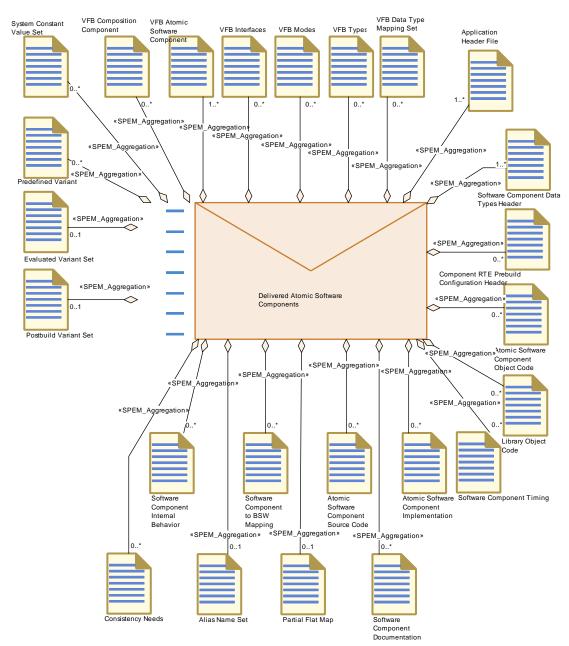


Figure 3.103: Delivered Atomic Software Components



Deliverable	Delivered Atomic S	oftware	e Components		
Package	AUTOSAR Root::M2 Work Products	2::Metho	odology::Methodology Library::Component::		
Brief Description	Delivery of a set of AtomicSoftwareComponents including their Implementation.				
Description	Complete description of a set of AtomicSoftwareComponents including Implementation (still standalone, not yet mapped to a specific ECU). The source or object code files are referred by the Implementation Description.				
			onents that make up the delivery may or (in the sense of the VFB).		
	the used interfaces a the delivered compo case, these parts co "readonly" during the	Note that the VFB descriptions of the components, compositions and the used interfaces are part of the deliverable too in order to describe the delivered components completely. However, depending on the use case, these parts could have been predefined and were treated as "readonly" during the component development. The same holds (optionally) for the Internal Behavior(s).			
	Implementation Data	In case of RTE generation a mapping set between Application and Implementation Data Types shall be included if Application Data Types are used. A Timing Model is included optionally.			
	The delivery can opt Set and the related a		also contain variants (an Evaluated Variant).		
Kind	Delivered				
Relation Type	Related Element	Mul.	Note		
Aggregates	Application Header File	1*			
Aggregates	Software Component Data Types Header	1*			
Aggregates	VFB Atomic Soft- ware Component	1*			
Aggregates	Alias Name Set	01	Alias names valid in the context of the delivered components.		
Aggregates	Evaluated Variant Set	01			
Aggregates	Partial Flat Map	01			
Aggregates	Postbuild Variant Set	01			
Aggregates	Atomic Software Component Imple- mentation	0*	If the delivery contains only VFB NvBlock Software Components, no implementation is contained as the code is generated as part of the RTE.		
Aggregates	Atomic Software Component Object Code	0*			
Aggregates	Atomic Soft- ware Component Source Code	0*			



Relation Type	Related Element	Mul.	Note
Aggregates	Component RTE Prebuild Configuration Header	0*	
Aggregates	Consistency Needs	0*	Correlation between a group of RunnableEntitys and a group of DataPrototypes.
Aggregates	Library Object Code	0*	
Aggregates	Predefined Variant	0*	
Aggregates	Software Component Documentation	0*	
Aggregates	Software Component Internal Behavior	0*	If the delivery contains only VFB NvBlock Software Components, the Internal Behavior is optional since it is needed only in special cases.
Aggregates	Software Component Timing	0*	
Aggregates	Software Component to BSW Mapping	0*	
Aggregates	System Constant Value Set	0*	
Aggregates	VFB Composition Component	0*	In case the delivered atomic components make up one or more VFB Compositions, the composition description(s) shall be included in the delivery.
Aggregates	VFB Data Type Mapping Set	0*	
Aggregates	VFB Interfaces	0*	
Aggregates	VFB Modes	0*	
Aggregates	VFB Types	0*	
Produced by	Develop Applica- tion Software	1*	
Consumed by	Configure RTE	1*	Required input:
			 References to all component implementation descriptions on this ECU
			SwcInternalBehavior (for example to map the runnables to tasks) which was used in the contract phase of the software components on this ECU



Relation Type	Related Element	Mul.	Note
Consumed by	Generate RTE	1*	Required input:
			 References to all component implementation descriptions on this ECU
			 SwcInternalBehavior which was used in the contract phase of the software components on this ECU
			 (optional) Software Component to BSW Mapping
			Meth.bindingTime = SystemDesignTime
Consumed by	Integrate Software for ECU	1*	
Consumed by	Define Alias Names	01	Needed for definition of alias names in the scope of delivered software components.
Consumed by	Create MC Function Model	0*	The component model may be used to derive an MC Function Model.

Table 3.195: Delivered Atomic Software Components

3.4.2.2 Software Component Internal Behavior

Artifact	Software Compone	nt Inter	nal Behavior		
Package	AUTOSAR Root::M2 Work Products	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description	aspects of a compor	Description of the InternalBehavor: It describes the RTE relevant aspects of a component, for example the runnable entities and the events they respond to.			
Description	Software Componen component, i.e. the r is used to generate t software generation the XML description)	Description of the Internal Behavor. The Internal Behavior of an Atomic Software Component describes the RTE relevant aspects of a component, i.e. the runnable entities and the events they respond to. It is used to generate the RTE but also as input for parts of the basic software generation (AUTOSAR Services). The Internal Behavior (i.e. the XML description) can only be used together with an Atomic Software Component Type to which it is related.			
Kind	AUTOSAR XML				
Relation Type	Related Element	Mul.	Note		
Aggregated by	Delivered Atomic Software Compo- nents	0*	If the delivery contains only VFB NvBlock Software Components, the Internal Behavior is optional since it is needed only in special cases.		
Produced by	Define Atomic Software Com- ponent Internal Behavior	1			



Relation Type	Related Element	Mul.	Note
Consumed by	Define Software Component Safety Information	1	
Consumed by	Define Software Component Timing	1	
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	1	Meth.bindingTime = SystemDesignTime
Consumed by	Generate Component Header File in Vendor Mode	1	Meth.bindingTime = SystemDesignTime
Consumed by	Generate Component Prebuild Data Set	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Generate Rapid Prototyping Wrap- per	1	
Consumed by	Implement Atomic Software Compo- nent	1	Meth.bindingTime = SystemDesignTime
Consumed by	Map Software Component to BS W	1	
Consumed by	Refine Rapid Prototyping Scenario	1	
Consumed by	Define Consistency Needs	1*	Runnables the consistency is defined for.
Consumed by	Define Rapid Prototyping Scenario	1*	
Consumed by	Select Software Component Imple- mentation	1*	
Consumed by	Generate Local M C Data Support	01	Meth.bindingTime = SystemDesignTime
Consumed by	Define Partial Flat Map	0*	Refer to parameter and variables defined in the Internal Behavior of one or more Atomic Software Components.
Consumed by	Define VFB Nv Block Software Component	0*	This input is required to collect the requirements for the NvBlockNeeds from the using application software.
Use meta model element	SwcInternalBehav- ior	1	

Table 3.196: Software Component Internal Behavior

3.4.2.3 Atomic Software Component Implementation



Artifact	Atomic Software C	ompone	ent Implementation			
Package	AUTOSAR Root::M2 Work Products	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products				
Brief Description	Description of an implementation for a single Atomic Software Component.					
Description	Component. It is post the same Software C implementation can XML artifact relates	Description of an implementation for a single Atomic Software Component. It is possible to have several different implementations for the same Software Component Internal Behavior, but only one implementation can be mapped to a particular ECU. In general, this XML artifact relates to one particular version of the code. It contains the version information as defined by the vendor.				
	artifacts, especially i required libraries, ge described by direct r ambiguous), but by r General Deliverable a reference is descri AutosarEngineering AUTOSAR_TPS_Ge	An implementation description may depend on several non-AUTOSAR artifacts, especially its own code files (source or object) but also required libraries, generator tools etc. These dependencies are not described by direct references to files (because this might be ambiguous), but by referring entries in the container catalog of the General Deliverable which contains the implementation artifacts. Such a reference is described via the metamodel element AutosarEngineeringObject (see AUTOSAR_TPS_GenericStructureTemplate.pdf for further description). This allows among other things to refer to a particular version of an artifact.				
W. J	description refer to AUTOSAR_TPS_BS		content of the implmementation leDescriptionTemplate.pdf.			
Kind	AUTOSAR XML		T A			
Aggregated by	Pelated Element Delivered Atomic Software Components	Mul. 0*	Note If the delivery contains only VFB NvBlock Software Components, no implementation is contained as the code is generated as part of the RTE.			
Produced by	Create Service Component	1	In order to generate the RTE, one needs to create a kind of dummy Implementation element for the Service Component, however this should not be filled with descriptive elements, e.g. resource consumption, as these are already defined by the Basic Software Module Implementation Description. Meth.bindingTime = SystemDesignTime			
Produced by	Implement Atomic Software Compo- nent	1	Meth.bindingTime = CodeGenerationTime			
Produced by	Measure Re- sources	0*	Add extensions to the Implementation Description. Meth.bindingTime = PostBuild			
In/out	Measure Component Resources	1				
Consumed by	Generate Compo- nent Header File in	1	Meth.bindingTime = SystemDesignTime			

— AUTOSAR CONFIDENTIAL —



Relation Type	Related Element	Mul.	Note
Consumed by	Generate SWC Memory Mapping Header	1	MemorySections: MemorySections defined for an Atomic Software Component. Meth.bindingTime = SystemDesignTime
Consumed by	Select Software Component Imple- mentation	1*	
Consumed by	Configure Memmap Allo- cation	0*	MemorySections:
Consumed by	Generate Compiler Configuration	0*	MemorySections: Find referred SwAddrMethods or specific memClassSymbols in the MemorySections defined for Atomic Software Components. Meth.bindingTime = SystemDesignTime
Use meta model element	Implementation	1	

Table 3.197: Atomic Software Component Implementation

3.4.2.4 Software Component Documentation

Artifact	Software Compone	nt Docu	umentation
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products		
Brief Description	Documentation dedi	cated to	a Software Component.
Description	Documentation of a dedicated Software Component. This documentation is following the ASAM FSX standard. In this documentation, you will find the SW Feature definition and description which define the physical functionality of the Swc, the SW test description which will contains suggestions and hints for the test of the software functionality of the Swc, the SW calibration notes which will give calibration instructions and hints for a calibration engineer, some maintenance, diagnosis and CARB notes which will bring general information, on the maintenance diagnosis and CARB issues on the Swc. For other description not listed previously, some notes (chapters) are left free for that. This artifact may also contain standalone documentation (meta-class Documentation) not aggregeted by a specific software component.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	Delivered Atomic Software Compo- nents	0*	
In/out	Add Documenta- tion to the Software Component	1	
Use meta model element	Documentation	1	
Use meta model element	SwComponent Documentation	1	



Relation Type Related Element Mul. Note	Relation Type	Related Element	Mul.	Note
---	---------------	-----------------	------	------

Table 3.198: Software Component Documentation

3.4.2.5 Software Component Timing

Artifact	Software Compone	nt Timi	ng	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description	Software Componen	ıt's Timir	ngDescription and TimingConstraints	
Description	TimingDescription and TimingConstraints of a software component. A software component can either be of type AtomicSWComponentType or CompositionSWComponentType.			
	In the former case, the SwcTiming allows to describe timing description and constraints for the InternalBehavior of the AtomicSWComponentType.			
			criptions and constraints can be defined for	
	all Atomic Software Components in the CompositionSWComponentType.			
Kind	AUTOSAR XML	ропеп	rype.	
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Components	0*	Note	
Produced by	Define Software Component Timing	1		
Consumed by	Define System Timing	01		
Consumed by	Implement Atomic Software Compo- nent	01	Meth.bindingTime = SystemDesignTime	
Consumed by	Measure Component Resources	01		
Use meta model element	SwcTiming	1		

Table 3.199: Software Component Timing

3.4.2.6 Software Component to BSW Mapping



Artifact	Software Compone	nt to B	SW Mapping	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description	Desribes how to map a software component to basic software elements (required in special cases only).			
Description	required to coordina AUTOSAR Service (te the A Compon	or to an BswInternalBehavior. This is PI generation and the scheduling for ents, ECU Abstraction Components and s by the RTE and the BSW scheduling	
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Compo- nents	0*		
Produced by	Map Software Component to BS W	1		
Produced by	Create Service Component	01	Meth.bindingTime = SystemDesignTime	
Consumed by	Generate Atomic Software Com- ponent Contract Header Files	01	If a Software Component is mapped to a BSW module description, this input is optionally needed already in the contract phase in order to ensure that the generated prototypes for runnables are consistent with the definitions in Software Component and BSW. Meth.bindingTime = SystemDesignTime	
Consumed by	Generate RTE	0*	This input is explicitly stated because the mapping may be created during ECU integration and thus is not necessarily part of the Delivered Atomic Software Components. Meth.bindingTime = SystemDesignTime	
Use meta model element	SwcBswMapping	1		

Table 3.200: Software Component to BSW Mapping

3.4.2.7 Partial Flat Map



Artifact	Partial Flat Map				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products				
Brief Description					
Description	The Partial Flat Map pre-defines Flat Map entries in the context of delivered software components. This allows the component developer to specify names of data instances for measurement and calibration. It has to be integrated into the System Flat Map. For more information on the Flat Map concept refer to artifact System Flat Map in the system domain.				
Kind	AUTOSAR XML				
Relation Type	Related Element	Mul.	Note		
Aggregated by	Delivered Atomic Software Compo- nents	01			
Produced by	Define Partial Flat Map	1			
Consumed by	Add Documenta- tion to the Software Component	01	Optional input in order to refer to unique names defined in component or composition context.		
Consumed by	Generate or Adjust ECU Flat Map	0*	If Partial Flat Maps were delivered along with software components referring only to ECU internal information, they may be integrated into the ECU Flat Map directly, i.e. without needing the System Flat Map.		
			 The instance refs used in a partial flat map must be taken over and adjusted to the context ECU Extract. 		
			 Name conflicts have to be resolved if several partial flat maps are merged. 		
Consumed by	Generate or Adjust System Flat Map	0*	If Partial Flat Maps were delivered along with software components, they must be integrated into the System Flat Map:		
			 The instance refs used in a partial flat map must be taken over and adjusted to the context of the System or System Extract. 		
			 Name conflicts have to be resolved if several partial flat maps are merged. 		
Use meta model element	FlatMap	1			

Table 3.201: Partial Flat Map



3.4.2.8 Application Header File

Artifact	Application Header File			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description	Header generated for an AtomicSoftwareComponentType in the RTE contract phase.			
Description	Header generated for an AtomicSoftwareComponentType in the RTE contract phase. It represents the complete source-code interface between the component code and RTE (calls into the RTE as well as prototypes called by the RTE). All communication of the component code with other components is routed through this header.			
Kind	Source Code			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Compo- nents	1*		
Produced by	Generate Atomic Software Com- ponent Contract Header Files	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Compile Atomic Software Compo- nent	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Implement Atomic Software Compo- nent	1	Meth.bindingTime = SystemDesignTime	
Consumed by	Compile ECU Source Code	1*	Meth.bindingTime = CodeGenerationTime	

Table 3.202: Application Header File

3.4.2.9 Software Component Data Types Header

Artifact	Software Component Data Types Header				
Package	AUTOSAR Root::M2 Work Products	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description	Software Component contract phase.	Software Component Data Types Header provided by the RTE in the contract phase.			
Description	contract phase. This	Software Component Data Types Header provided by the RTE in the contract phase. This includes data types, which were declared as part of the SWC description but not used in any ports or data elements.			
Kind	Source Code	Source Code			
Relation Type	Related Element	Mul.	Note		
Aggregated by	Delivered Atomic Software Compo- nents	1*			



Relation Type	Related Element	Mul.	Note
Produced by	Generate Atomic Software Com- ponent Contract Header Files	1	Meth.bindingTime = CodeGenerationTime
Produced by	Generate Component Header File in Vendor Mode	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile Atomic Software Compo- nent	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Implement Atomic Software Compo- nent	1	Meth.bindingTime = SystemDesignTime
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime

Table 3.203: Software Component Data Types Header

3.4.2.10 Component RTE Prebuild Configuration Header

Artifact	Component RTE Prebuild Configuration Header			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description	Generated header fill prebuild RTE contract		to resolve the prebuild variants in the for an SWC.	
Description	Generated header file used to resolve the prebuild variants of a software component in the prebuild RTE contract phase. Contains macros which resolve the variants when compiled with the module and the generated RTE.			
Kind	Bound Source Code	!		
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Compo- nents	0*		
Produced by	Generate Component Prebuild Data Set	1	Meth.bindingTime = PreCompileTime	
Consumed by	Compile Atomic Software Compo- nent	01	Meth.bindingTime = PreCompileTime	
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime	

Table 3.204: Component RTE Prebuild Configuration Header

3.4.2.11 Atomic Software Component Source Code



Artifact	Atomic Software Component Source Code		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products		
Brief Description	Source code implem	enting a	an Atomic Software Component Type
Description	Source code implementing an Atomic Software Component Type. In general it is independent from an ECU.		
Kind	Source Code		
Relation Type	Related Element	Mul.	Note
Aggregated by	Delivered Atomic Software Compo- nents	0*	
Produced by	Implement Atomic Software Compo- nent	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile Atomic Software Compo- nent	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Re-compile Component in ECU context	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime

Table 3.205: Atomic Software Component Source Code

3.4.2.12 Atomic Software Component Object Code

Artifact	Atomic Software Component Object Code			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description				
Description	Object Code of an A	tomic S	oftware Component.	
Kind	Object Code			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Compo- nents	0*		
Produced by	Compile Atomic Software Compo- nent	1	The object file should include both code of the SWC and the E2E Protection Wrapper code (if present as an input). Meth.bindingTime = CompileTime	
Consumed by	Measure Component Resources	1		
Consumed by	Generate ECU Ex- ecutable	0*	Meth.bindingTime = CompileTime	

Table 3.206: Atomic Software Component Object Code

3.4.2.13 Optimized Application Header File



Artifact	Optimized Application Header File			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description	Optimized applicatio	n heade	r file for a software component.	
Description	Application header fi in vendor mode.	Application header file for a software component optimized by the RTE in vendor mode.		
Kind	Source Code	Source Code		
Relation Type	Related Element	Mul.	Note	
Produced by	Generate Compo- nent Header File in Vendor Mode	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Re-compile Component in ECU context	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime	

Table 3.207: Optimized Application Header File

3.4.2.14 Optimized Software Component Object Code

Artifact	Optimized Software	Optimized Software Component Object Code			
Package	AUTOSAR Root::M2 Work Products	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description	The object code of a optimizations.	The object code of a software component compiled with ECU specific optimizations.			
Description	The object code of a optimizations.	The object code of a software component compiled with ECU specific optimizations.			
Kind	Object Code	Object Code			
Relation Type	Related Element	Mul.	Note		
Produced by	Re-compile Component in ECU context	1	Meth.bindingTime = CompileTime		

Table 3.208: Optimized Software Component Object Code

3.4.2.15 Consistency Needs



Artifact	Consistency Needs	;	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products		
Brief Description			
Description		l a grou _l	es the correlation between a group of o of DataPrototypes with the intended d for
	Stable data di	uring the	e execution of a group of RunnableEntitys.
	Coherent data consumption and propagation for a group of DataPrototypes.		
	The information can be defined first time at the design of an Atomic Software Component but can be added as well if Compositions are created. In order to allow incremental development the groups of Runnables and DataPrototypes can be distributed over several artifacts.		
Kind			
Relation Type	Related Element	Mul.	Note
Aggregated by	VFB System	1	Correlation between a group of RunnableEntitys and a group of DataPrototypes.
Aggregated by	Delivered Atomic Software Compo- nents	0*	Correlation between a group of RunnableEntitys and a group of DataPrototypes.
In/out	Define Consistency Needs	1	The description of the correlation between a group of RunnableEntitys and a group of DataPrototypes. In order to allow incremental development and refinement the Consistency Needs artifact is also used as an input.
Use meta model element	ConsistencyNeeds	1	

Table 3.209: Consistency Needs

3.4.2.16 Rapid Prototyping Wrapper Header File

Artifact	Rapid Prototyping Wrapper Header File				
Package	AUTOSAR Root::M2 Work Products	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products			
Brief Description					
Description	inputs and outputs o	This header replaces the RTE API in order to allow to read and modify inputs and outputs of the original SWC as well as to control execution of the original (and prototype) runnable.			
Kind	Source Code	Source Code			
Relation Type	Related Element	Related Element Mul. Note			
Produced by	Generate Rapid Prototyping Wrap- per	1			



Relation Type	Related Element	Mul.	Note
Consumed by	Compile Atomic Software Compo- nent	01	

Table 3.210: Rapid Prototyping Wrapper Header File

3.4.2.17 Rapid Prototyping Wrapper Source Code

Artifact	Rapid Prototyping	Wrappe	r Source Code
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Work Products		
Brief Description			
Description	A piece of code that is placed between software components and the RTE in order to provide rapid prototyping functionality. This code allows to encapsulate the SWC to bypass into the rapid prototyping component and may be implemented ad as a complex device driver and/or integration code.		
Kind	Source Code		
Relation Type	Related Element	Mul.	Note
Produced by	Generate Rapid Prototyping Wrap- per	1	
Consumed by	Compile Atomic Software Compo- nent	01	

Table 3.211: Rapid Prototyping Wrapper Source Code

3.4.3 Tools

3.4.3.1 Component API Generator Tool



Tool	Component API Ge	Component API Generator Tool			
Package	AUTOSAR Root::M2 Guidance	AUTOSAR Root::M2::Methodology::Methodology Library::Component:: Guidance			
Brief Description		Generates the software component contract header used to connect the software component to the RTE layer.			
Description	This guidance representation process.	This guidance represents the so-called contract phase of the RTE generation process.			
	component, p the internal be for a compone	 SWC Contract phase - a limited set of information about a component, principally the AUTOSAR Interface definitions and the internal behavior, is used to create an application header file for a component type. The application header file defines the "contract" between component and RTE. 			
	order to gene	BSW Contract phase - a similar use case for a BSW module in order to generate the module interlink header files, which are used to interface between the module and the BSW Scheduler.			
	pre-build varia	 Additional phases - for SWS and BSW as well - are used to bind pre-build variants in the contract headers of a single Software Component or BSW module. 			
Kind					
Relation Type	Related Element	Mul.	Note		
Used	Generate Atomic Software Com- ponent Contract Header Files	1			
Used	Generate BSW Module Prebuild Data Set	1			
Used	Generate BSWM Contract Header Files	1			
Used	Generate Compo- nent Header File in Vendor Mode	1			
Used	Generate Component Prebuild Data Set	1			

Table 3.212: Component API Generator Tool

3.5 Basic Software

This chapter contains the definition of work products and tasks used for the development of Basic Software modules. For the definition of the relevant meta-model elements refer to [8].



3.5.1 Tasks

3.5.1.1 Define BSW Types

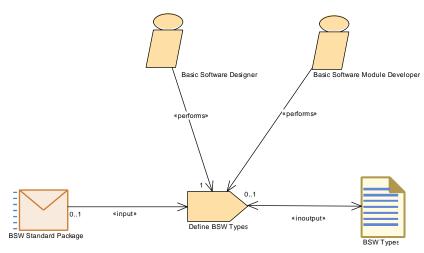


Figure 3.104: Define BSW Types

Task Definition	Define BSW Types			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks			
Brief Description	Define data types for	r usage	within the Basic Software.	
Description	A data type is typically based on elements standardized by AUTOSAR, therefore BSW Standard Package appears as a mandatory input.			
Relation Type	Related Element	Mul.	Note	
Performed by	Basic Software Designer	1		
Performed by	Basic Software Module Developer	1		
Consumes	BSW Standard Package	01		
In/out	BSW Types	1		

Table 3.213: Define BSW Types



3.5.1.2 Define BSW Entries

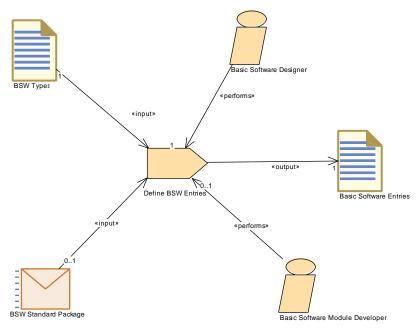


Figure 3.105: Define BSW Entries

Task Definition	Define BSW Entries	Define BSW Entries			
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks			
Brief Description	Define BswEntries (= Software.	Define BswEntries (= function signatures) for usage within the Basic Software.			
Description					
Relation Type	Related Element	Mul.	Note		
Performed by	Basic Software Designer	1			
Performed by	Basic Software Module Developer	1			
Consumes	BSW Types	1			
Consumes	BSW Standard Package	01			
Produces	Basic Software Entries	1			

Table 3.214: Define BSW Entries



3.5.1.3 Define BSW Interfaces

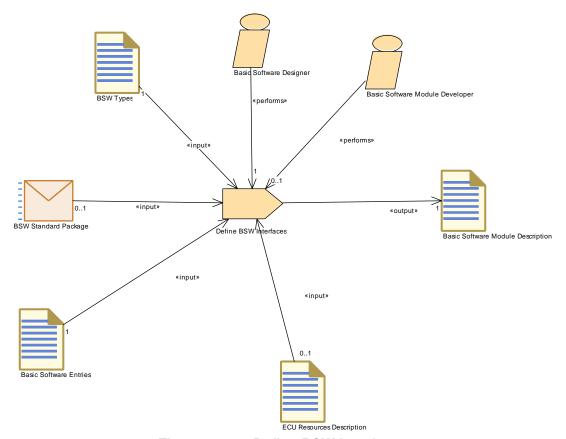


Figure 3.106: Define BSW Interfaces

Task Definition	Define BSW Interfa	Define BSW Interfaces		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks			
Brief Description	Define the interfaces	for a si	ngle BSW Module.	
Description	Define the interfaces for a particular BSW Module or cluster as part of the BSW Module Description. This includes an abstraction of the required and provided C-functions, as well as triggers and modes. Note that this task also exists for modules standardized by AUTOSAR, as it may be required to decide on optional or alternative elements and to add allowed project specific extensions.			
Relation Type	Related Element	Mul.	Note	
Performed by	Basic Software Designer	1		
Performed by	Basic Software Module Developer	1		
Consumes	BSW Types	1		
Consumes	Basic Software Entries	1		
Consumes	BSW Standard Package	01		
Consumes	ECU Resources Description	01		



Relation Type	Related Element	Mul.	Note
Produces	Basic Software Module Descrip- tion	1	

Table 3.215: Define BSW Interfaces

3.5.1.4 Define Vendor Specific Module Definition

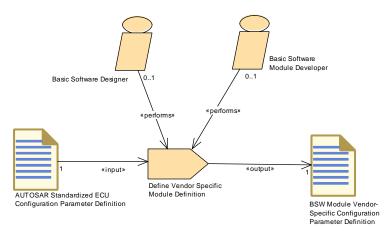


Figure 3.107: Define Vendor Specific Module Definition

Task Definition	Define Vendor Specific Module Definition		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks		
Brief Description			
Description	Define the Vendor Specific Module Definition (=Configuration Parameters).		
Relation Type	Related Element	Mul.	Note
Performed by	Basic Software Designer	01	
Performed by	Basic Software Module Developer	01	
Consumes	AUTOSAR Standardized ECU Configuration Parameter Definition	1	
Produces	BSW Module Vendor- Specific Configuration Parameter Definition	1	

Table 3.216: Define Vendor Specific Module Definition



3.5.1.5 Define BSW Behavior

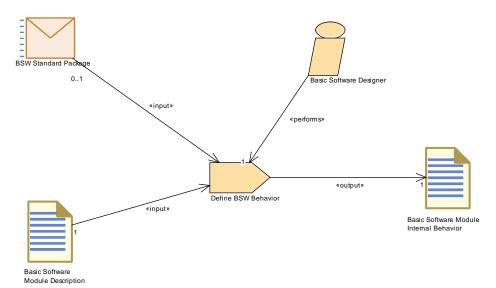


Figure 3.108: Define BSW Behavior

Task Definition	Define BSW Behav	Define BSW Behavior			
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks			
Brief Description	Define the BSW Beh	avior re	lated to a BSW Module Description.		
Description	task is required during generate the API to (variables or parametuse the AUTOSAR of	Define the BSW Behavior related to a BSW Module Description. This task is required during BSW module development in order to be able to generate the API to the BSW Scheduler. In addition, local data (variables or parameters) may be defined during this task in order to use the AUTOSAR data type system for module local data and to generate measurement & calibration support.			
Relation Type	Related Element	Mul.	Note		
Performed by	Basic Software Designer	1			
Consumes	Basic Software Module Descrip- tion	1			
Consumes	BSW Standard Package	01			
Produces	Basic Software Module Internal Behavior	1			

Table 3.217: Define BSW Behavior



3.5.1.6 Define BSW Module Timing

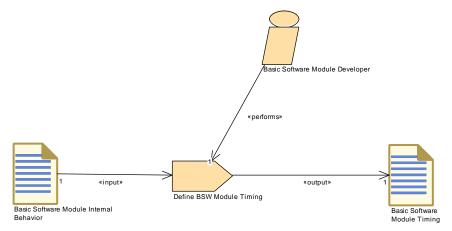


Figure 3.109: Define BSW Module Timing

Task Definition	Define BSW Modul	e Timin	g	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks			
Brief Description	Define BSWModuleTiming (TimingDescription and TimingConstraints) for the Internal Behavior (BSWModuleEntities) of a BSW module			
Description	Define BSWModuleTiming (TimingDescription and TimingConstraints) for the Internal Behavior (BSWModuleEntities) of a BSW module			
Relation Type	Related Element	Mul.	Note	
Performed by	Basic Software Module Developer	1		
Consumes	Basic Software Module Internal Behavior	1		
Produces	Basic Software Module Timing	1		

Table 3.218: Define BSW Module Timing



3.5.1.7 Generate BSW Contract Header Files

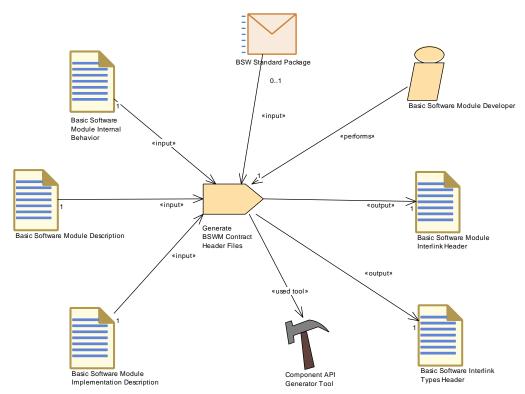


Figure 3.110: Generate BSW Contract Header Files

Task Definition	Generate BSWM Co	ontract	Header Files	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks			
Brief Description	Generate Basic Soft	waree M	Module Contract Header Files	
Description	Generate the header files needed for a BSW module as part of the so-called "contract phase". These headers will allow to link the module lateron with the RTE (namely the BSW Scheduler). Meth.bindingTime = CodeGenerationTime			
Relation Type	Related Element	Mul.	Note	
Performed by	Basic Software Module Developer	1		
Consumes	Basic Software Module Descrip- tion	1	Meth.bindingTime = SystemDesignTime	
Consumes	Basic Software Module Implemen- tation Description	1	Meth.bindingTime = SystemDesignTime	
Consumes	Basic Software Module Internal Behavior	1	Meth.bindingTime = SystemDesignTime	
Consumes	BSW Standard Package	01		



Relation Type	Related Element	Mul.	Note
Produces	Basic Software Interlink Types Header	1	Meth.bindingTime = CodeGenerationTime
Produces	Basic Software Module Interlink Header	1	Meth.bindingTime = CodeGenerationTime
Used tool	Component API Generator Tool	1	

Table 3.219: Generate BSWM Contract Header Files

3.5.1.8 Implement a BSW Module

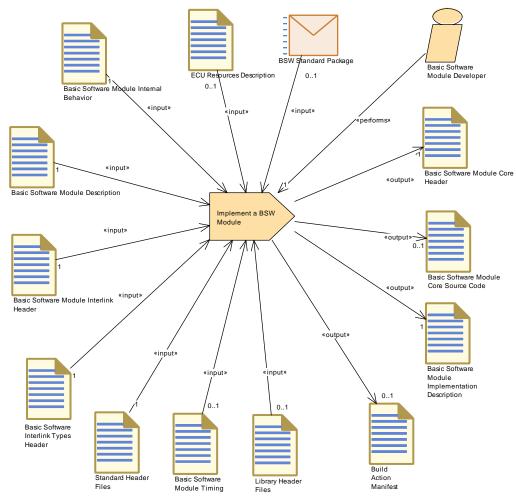


Figure 3.111: Implement a BSW Module



Task Definition	Implement a BSW M	odule			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks				
Brief Description	Implement the source	code	of a BSW module.		
Description	Implement the source code of a BSW module. This task is not described by AUTOSAR completely, but included for completeness of the AUTOSAR use cases. Note that specification of an AUTOSAR standard module imposes several requirements, e.g. the inclusion of certain header files, onto this task. In addition to the code, this task also produces the necessary XML descriptions. Optionally, a build action manifest may be created or modified in order to be used for code generation or further processing of the code.				
5 /	Meth.bindingTime = C				
Relation Type		Mul.	Note		
Performed by	Basic Software Module Developer	1			
Consumes	Basic Software Interlink Types Header	1	Meth.bindingTime = SystemDesignTime		
Consumes	Basic Software Module Descrip- tion	1	Meth.bindingTime = SystemDesignTime		
Consumes	Basic Software Module Interlink Header	1	Meth.bindingTime = SystemDesignTime		
Consumes	Basic Software Module Internal Behavior	1	Meth.bindingTime = SystemDesignTime		
Consumes	Standard Header Files	1	Meth.bindingTime = CodeGenerationTime		
Consumes	BSW Standard Package	01			
Consumes	Basic Software Module Timing	01	Meth.bindingTime = SystemDesignTime		
Consumes	ECU Resources Description	01	Meth.bindingTime = SystemDesignTime		
Consumes	Library Header Files	01	Meth.bindingTime = CodeGenerationTime		
Produces	Basic Software Module Core Header	1	Meth.bindingTime = CodeGenerationTime		
Produces	Basic Software Module Implemen- tation Description	1	Meth.bindingTime = CodeGenerationTime		



Relation Type	Related Element	Mul.	Note
Produces	Basic Software Module Core Source Code	01	The creation of source code is optional, since it might be generated completely in a later step based on the Build Action Manifest. Meth.bindingTime = CodeGenerationTime
Produces	Build Action Mani- fest	01	

Table 3.220: Implement a BSW Module

3.5.1.9 Develop BSW Module Generator




Figure 3.112: Develop BSW Module Generator

Task Definition	Develop BSW Module Generator		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks		
Brief Description			
Description	Develop a generator	for one	or more BSW modules.
Relation Type	Related Element	Mul.	Note
Performed by	Basic Software Module Developer	1	
Consumes	BSW Standard Package	1	
Consumes	BSW Module Vendor- Specific Configuration Pa- rameter Definition	0*	
Produces	BSW Module Generator	1	

Table 3.221: Develop BSW Module Generator



3.5.1.10 Create Library

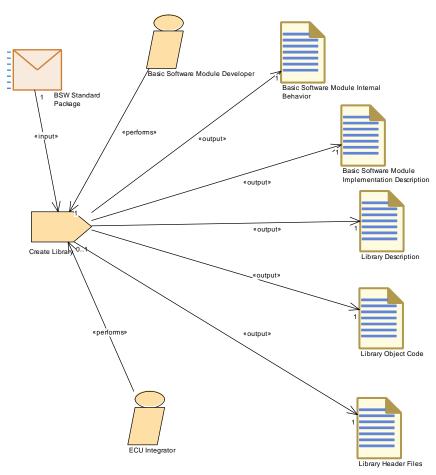


Figure 3.113: Create Library

Task Definition	Create Library	Create Library		
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks		
Brief Description	Create a library to be	e used v	vithin an Autosar ECU.	
Description	The task is the same is considered as a bastraction is used. XML descriptions of "dummy" BSW Behathe other two XML a	Create a non-standardized library to be used within an Autosar ECU. The task is the same for the basic software and application level, but it is considered as a basic software task because no VFB resp. RTE abstraction is used. The output includes source code, header file and XML descriptions of the interfaces and of the implementation. A "dummy" BSW Behavior must be created too in order to be able to link the other two XML artifacts. Meth.bindingTime = CodeGenerationTime		
Relation Type	Related Element	Mul.	Note	
Performed by	Basic Software Module Developer	1		
Performed by	ECU Integrator	1		
Consumes	BSW Standard Package	1	Used for standard types and specifications.	



Relation Type	Related Element	Mul.	Note
Produces	Basic Software Module Implemen- tation Description	1	Meth.bindingTime = CodeGenerationTime
Produces	Basic Software Module Internal Behavior	1	Meth.bindingTime = CodeGenerationTime
Produces	Library Description	1	Meth.bindingTime = CodeGenerationTime
Produces	Library Header Files	1	Meth.bindingTime = CodeGenerationTime
Produces	Library Object Code	1	Meth.bindingTime = CodeGenerationTime

Table 3.222: Create Library

3.5.1.11 Compile BSW Core Code

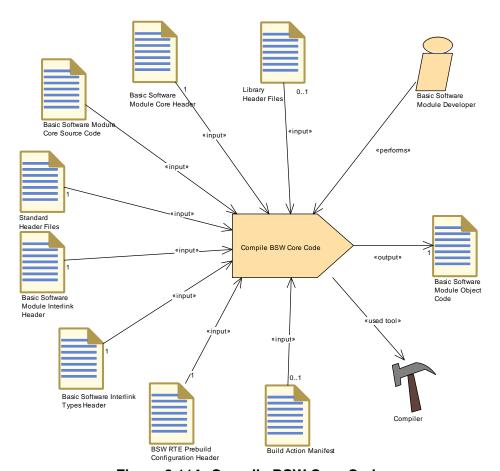


Figure 3.114: Compile BSW Core Code



Task Definition	Compile BSW Core Code			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks			
Brief Description	Compile the source code of a BSW modue without ECU specific configurations.			
Description	configurations. This BSW development to represent the "core of	Compile the source code of a BSW modue without ECU specific configurations. This task is mainly used to describe the use cases of BSW development for object code delivery. The output will only represent the "core code". During ECU integration, additional generated code may be added per module in response to ECU configuration.		
Relation Type	Related Element	Mul.	Note	
Performed by	Basic Software Module Developer	1		
Consumes	BSW RTE Pre- build Configuration Header	1	Meth.bindingTime = PreCompileTime	
Consumes	BSW Types	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Basic Software Interlink Types Header	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Basic Software Module Core Header	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Basic Software Module Core Source Code	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Basic Software Module Interlink Header	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Standard Header Files	1	Meth.bindingTime = CodeGenerationTime	
Consumes	Build Action Mani- fest	01	The compilation can optionally be controlled by a Build Action Manifest.	
Consumes	Library Header Files	01	Meth.bindingTime = CodeGenerationTime	
Produces	Basic Software Module Object Code	1	Meth.bindingTime = CompileTime	
Used tool	Compiler	1		

Table 3.223: Compile BSW Core Code



3.5.1.12 Generate BSW Module Prebuild Dataset

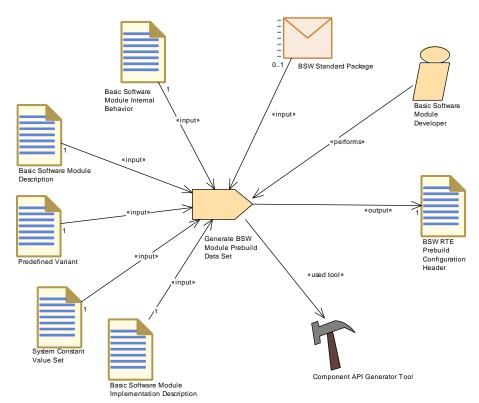


Figure 3.115: Generate BSW Module Prebuild Dataset

Task Definition	Generate BSW Mod	Generate BSW Module Prebuild Data Set			
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Tasks			
Brief Description	variations which nee	Prebuild Data Set Generation Phase for a BSW module: It binds all variations which need to be set after generation of the RTE contract header but before compilation of the module.			
Description	binds all variations we contract header but I settings must be def The output is a BSW is included by the contract header but I settings must be def	Prebuild Data Set Generation Phase for a basic software module: It binds all variations which need to be set after generation of the RTE contract header but before compilation of the module. The variant settings must be defined by the PredefinedVariant given as input. The output is a BSW Module RTE Prebuild Configuration Header which is included by the corresponding BSW Module Interlink Header, thereby resolving the variation points when compiled. Note that link time variants are not allowed here.			
Relation Type	Related Element	Mul.	Note		
Performed by	Basic Software Module Developer	1			
Consumes	Basic Software Module Descrip- tion	1	Meth.bindingTime = CodeGenerationTime		



Relation Type	Related Element	Mul.	Note
Consumes	Basic Software Module Implemen- tation Description	1	Meth.bindingTime = CodeGenerationTime
Consumes	Basic Software Module Internal Behavior	1	Meth.bindingTime = CodeGenerationTime
Consumes	Predefined Variant	1	
Consumes	System Constant Value Set	1	
Consumes	BSW Standard Package	01	
Produces	BSW RTE Pre- build Configuration Header	1	Meth.bindingTime = PreCompileTime
Used tool	Component API Generator Tool	1	

Table 3.224: Generate BSW Module Prebuild Data Set

3.5.2 Work Products

3.5.2.1 BSW Standard Package

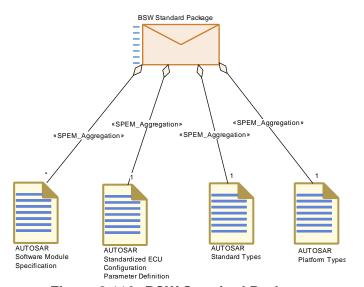


Figure 3.116: BSW Standard Package



Deliverable	BSW Standard Package		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	Package containing standard artifacts for BSW.		
Description	Contains the standard specifications and standard ARXML artifacts to be used within the AUTOSAR basic software and for the generation of the RTE. This deliverable is released by AUTOSAR and is readonly within the methodology.		
Kind	Delivered		
Relation Type	Related Element	Mul.	Note
Aggregates	AUTOSAR Plat- form Types	1	
Aggregates	AUTOSAR Standard Types	1	
Aggregates	AUTOSAR Standardized ECU Configuration Parameter Definition	1	
Aggregates	AUTOSAR Soft- ware Module Specification	0*	
Consumed by	Create Library	1	Used for standard types and specifications.
Consumed by	Design Basic Soft- ware	1	
Consumed by	Develop BSW Module	1	
Consumed by	Develop BSW Module Generator	1	
Consumed by	Develop Basic Software	1	
Consumed by	Define BSW Be- havior	01	
Consumed by	Define BSW Entries	01	
Consumed by	Define BSW Interfaces	01	
Consumed by	Define BSW Types	01	
Consumed by	Generate BSW Module Prebuild Data Set	01	
Consumed by	Generate BSWM Contract Header Files	01	
Consumed by	Implement a BSW Module	01	

Table 3.225: BSW Standard Package



3.5.2.2 BSW Module Bundle

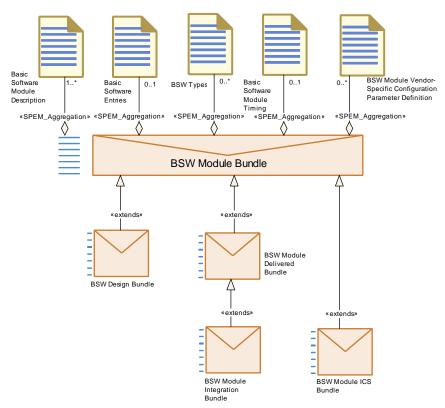


Figure 3.117: BSW Module Bundle

Deliverable	BSW Module Bund	le		
Package	AUTOSAR Root::M2 products	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description				
Description	I	Generic deliverable representing a bundle of one or more BSW modules. It is used as a basis for extended deliverables.		
			the ARXML definitions on the interface ic configuration parameter definition.	
	According to the role maybe blueprints co		extended deliverable, these elements or partially.	
Kind	Delivered			
Extended by	BSW Design Bundle S Bundle	, BSW N	Module Delivered Bundle, BSW Module IC	
Relation Type	Related Element	Mul.	Note	
Aggregates	Basic Software Module Descrip- tion	1*		
Aggregates	Basic Software Entries	01		
Aggregates	Basic Software Module Timing	01		



Relation Type	Related Element	Mul.	Note
Aggregates	BSW Module Vendor- Specific Configuration Pa- rameter Definition	0*	The configuration parameter definitions of the modules under test - needed for static check against the standardized configuration parameters.
Aggregates	BSW Types	0*	

Table 3.226: BSW Module Bundle

3.5.2.3 BSW Design Bundle

Deliverable	BSW Design Bundl	e	
Package	AUTOSAR Root::M2 products	2::Metho	dology::Methodology Library::Bsw::Work
Brief Description			
Description	A bundle of one or more BSW modules used in the design phase. It contains only definitions on the interface level. These elements maybe blueprints completely or partially.		
Kind	Delivered		
Extends	BSW Module Bundle)	
Relation Type	Related Element	Mul.	Note
Produced by	Design Basic Soft- ware	1*	
Consumed by	Develop BSW Module	1*	

Table 3.227: BSW Design Bundle



3.5.2.4 BSW Module ICS Bundle




Figure 3.118: BSW Module ICS Bundle

Deliverable	BSW Module ICS Bundle		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description			
Description	Deliverable containir (ICS) for one or more		nplementation Conformance Statement modules.
Kind	Delivered		
Extends	BSW Module Bundle)	
Relation Type	Related Element	Mul.	Note
Aggregates	Basic Software Module Implemen- tation Description	1	The administrative elements (e.g. version info) of the Implementation model needed for the conformance test.
Aggregates	Basic Software Module Object Code	1*	
Aggregates	BSW Module Pre- configured Config- uration	0*	The predefined configurations implemented by the modules under test. The modules under test are completely configured.

Table 3.228: BSW Module ICS Bundle



3.5.2.5 BSW Module Delivered Bundle

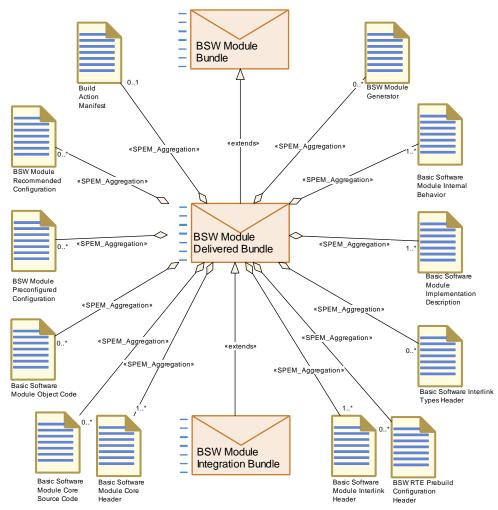


Figure 3.119: BSW Module Delivered Bundle

Deliverable	BSW Module Delive	ered Bu	ndle	
Package	AUTOSAR Root::M2 products	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description				
Description	integration (code and	Deliverable containing one or more BSW modules delivered for integration (code and ARXML descriptions). It can still contain blueprints for some of the elements which need to be extended during ECU integration.		
Kind	Delivered	Delivered		
Extended by	BSW Module Integra	BSW Module Integration Bundle		
Extends	BSW Module Bundle	BSW Module Bundle		
Relation Type	Related Element			
	Configure Trans- former	01		



Relation Type	Related Element	Mul.	Note
Aggregates	Basic Software Module Core Header	1*	
Aggregates	Basic Software Module Implemen- tation Description	1*	
Aggregates	Basic Software Module Interlink Header	1*	
Aggregates	Basic Software Module Internal Behavior	1*	
Aggregates	Build Action Mani- fest	01	The build action manifest to be used for the delivered basic software.
Aggregates	BSW Module Generator	0*	
Aggregates	BSW Module Pre- configured Config- uration	0*	
Aggregates	BSW Module Recommended Configuration	0*	
Aggregates	BSW RTE Pre- build Configuration Header	0*	
Aggregates	Basic Software Interlink Types Header	0*	
Aggregates	Basic Software Module Core Source Code	0*	
Aggregates	Basic Software Module Object Code	0*	
Produced by	Develop BSW Module	1	
Produced by	Develop Basic Software	1*	
Consumed by	Define Integration Variant	1*	
Consumed by	Generate Base Ecu Configuration	1*	Need vendor specific configuration parameters and their recommended or pre-configured values.
Consumed by	Generate Updated ECU Configuration	1*	
Consumed by	Integrate Software for ECU	1*	
Consumed by	Prepare ECU Configuration	1*	
Consumed by	Configure Com	01	



Relation Type	Related Element	Mul.	Note
Consumed by	Configure Diagnostics	01	Predefined or recommended configuration values, vendor specific parameters, ServiceNeeds defined by BSW.
Consumed by	Configure MCAL	01	
Consumed by	Configure Mode Management	01	Predefined or recommended configuration values, vendor specific parameters, ServiceNeeds defined by BSW.
Consumed by	Configure NvM	01	Predefined or recommended configuration values, vendor specific parameters, ServiceNeeds defined by BSW.
Consumed by	Configure Watch- dog Manager	01	Predefined or recommended configuration values, vendor specific parameters, ServiceNeeds defined by BSW.
Consumed by	Create Service Component	01	Required in order to define a mapping between SWC and BSW. In addition, the Build Action Manifest may be used.
Consumed by	Configure Debug	0*	
Consumed by	Configure ECUC	0*	
Consumed by	Configure IO Hard- ware abstraction	0*	
Consumed by	Configure OS	0*	OS Resources required by Basic Software. Optional Input: Basic Software Module Timing, e.g. execution order constraints.
Consumed by	Configure RTE	0*	Input from the BSW Module Description is needed related to Scheduling, Exclusive Areas, Triggers and Modes. Optional Input: Basic Software Module
			Timing, e.g. execution order constraints.

Table 3.229: BSW Module Delivered Bundle

3.5.2.6 AUTOSAR Software Module Specification



Artifact	AUTOSAR Software Module Specification		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	The standard sofware module specification.		
Description	Specification of a standardized Basic Software Module (SWS). It is published as a textual specification, but can be seen as a Basic Software Design bundle in the methodology, consisting mainly of blueprints. It may be published as ARXML in future releases of AUTOSAR.		
Kind	Text		
Relation Type	Related Element Mul. Note		
Aggregated by	BSW Standard 0* Package		

Table 3.230: AUTOSAR Software Module Specification

3.5.2.7 AUTOSAR Standard Types

Artifact	AUTOSAR Standard Types		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	Contains all the stan	dardize	d module definition parameters.
Description	ARXML description of the AUTOSAR standard types (e.g. Std ReturnType).		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Standard Package	1	
Aggregated by	VFB AUTOSAR Standard Package	1	
Use meta model element	Implementation DataType	1	

Table 3.231: AUTOSAR Standard Types

3.5.2.8 AUTOSAR Platform Types



Artifact	AUTOSAR Platform	Types	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	Contains all the stan	dardize	d module definition parameters.
Description	ARXML description of the standardized part of the AUTOSAR platform types. It consists of		
	 Implementation platform indep 		ypes for the platform types - this part is still
	Blueprints of the underlying BaseTypes. These have to be refined for each processor platform.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Standard Package	1	
Aggregated by	VFB AUTOSAR Standard Package	1	
Use meta model element	Implementation DataType	1	
Use meta model element	SwBaseType	1_	

Table 3.232: AUTOSAR Platform Types

3.5.2.9 BSW Module Generator

Artifact	BSW Module Generator		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description			
Description	A generator that comes as part of one or more delivered BSW modules. It can be put into a framework to let it generate a module's configuration code.		
Kind	Custom		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module De- livered Bundle	0*	
Produced by	Develop BSW Module Generator	1	
Consumed by	Generate BS W Configuration Code	01	This is an input in case a generator framework is used which has to run some module specific generator code.

Table 3.233: BSW Module Generator

3.5.2.10 AUTOSAR Standardized ECU Configuration Parameter Definition



Artifact	AUTOSAR Standardized ECU Configuration Parameter Definition		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	Contains all the stan	dardize	d module definition parameters.
Description	Contains all the standardized module definition parameters. These parameters must be referred by the vendor specific configuration of a specific module.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
	Configure Trans- former	01	
Aggregated by	BSW Standard Package	1	
Consumed by	Configure Debug	1	
Consumed by	Define Vendor Specific Module Definition	1	
Consumed by	Configure Com	01	
Consumed by	Configure Diag- nostics	01	
Consumed by	Configure ECUC	01	
Consumed by	Configure IO Hard- ware abstraction	01	
Consumed by	Configure MCAL	01	
Consumed by	Configure Mode Management	01	
Consumed by	Configure NvM	01	
Consumed by	Configure OS	01	
Use meta model element	EcucModuleDef	1	

Table 3.234: AUTOSAR Standardized ECU Configuration Parameter Definition

3.5.2.11 BSW Module Preconfigured Configuration

Artifact	BSW Module Preco	nfigure	d Configuration	
Package	AUTOSAR Root::M2 products	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	, ,	Configuration parameter values that are fixed to the object code and cannot be changed without recompilation.		
Description	code. They cannot b	Configuration parameter values that are pre-configured in the delivered code. They cannot be changed during the ECU integration of the code. Pre-configuration is possible for object and source code as well.		
Kind	AUTOSAR XML	AUTOSAR XML		
Relation Type	Related Element Mul. Note			
Aggregated by	BSW Module De- livered Bundle	0*		



Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module ICS Bundle	0*	The predefined configurations implemented by the modules under test. The modules under test are completely configured.
Produced by	Configure Compiler Memory Classes	1*	MemMap config for compiler memclasses: Set the parameter values that define generic MemClassSymbols (i.e. those not defined by modules or SWCs.). Set the parameter values that define the implementation behind all kind of MemClassSymbols (generic and local ones). Meth.bindingTime = SystemDesignTime
Produced by	Define Memory Addressing Modes	1*	MemMapAddressingModeSet: Meth.bindingTime = SystemDesignTime
Consumed by	Configure Memmap Allo- cation	1*	MemMapAddressingModeSet: Collection of compiler specific configuration elements for memory allocation and addressing modes.
Consumed by	Generate BSW Memory Mapping Header	1*	MemMapAddressingModeSet: Collection of compiler specific configuration elements for memory allocation. Meth.bindingTime = SystemDesignTime
Consumed by	Generate Compiler Configuration	1*	CompilerMemClassConfiguration: The parameters "MemMapCompilerMem-ClassSymbolImpl" and "MemMapGenericCompilerMem-ClassSymbolImpl" define the implementation behind a MemClassSymbol. Meth.bindingTime = SystemDesignTime
Consumed by	Generate SWC Memory Mapping Header	1*	MemMapAddressingModeSet: Collection of compiler specific configuration elements for memory allocation. Meth.bindingTime = SystemDesignTime
Use meta model element	EcucModuleCon- figurationValues	1	

Table 3.235: BSW Module Preconfigured Configuration

3.5.2.12 BSW Module Recommended Configuration



Artifact	BSW Module Reco	mmend	ed Configuration
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	Recommended "defa	ault" con	figuration parameter values.
Description	Set of configuration parameter values, which are recommended by the module vendor as a default, but are not mandatory for the integration. There can be more than one such set in order to allow for variable usage of the module. This artifact does not include values of so-called published parameters. These must always be given as Basic Software Module Preconfigured Configuration.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module De- livered Bundle	0*	
Use meta model element	EcucModuleCon- figurationValues	1	

Table 3.236: BSW Module Recommended Configuration

3.5.2.13 BSW Module Vendor Specific Configuration Parameter Definition

Artifact	BSW Module Vendo	or- Spec	cific Configuration Parameter Definition
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	Vendor specific para format of the parame		efinition for a module. This defines the tis values.
Description	Vendor specific parameter definition for a module. This defines the format of the parameters, not its values. In case of a standardized module, it redefines the existing standardized configuration parameter format (ModuleDef).		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	Transformer Design Bundle	01	
Aggregated by	BSW Module Bundle	0*	The configuration parameter definitions of the modules under test - needed for static check against the standardized configuration parameters.
Produced by	Define Vendor Specific Module Definition	1	
Consumed by	Configure RTE	1	The definitions for the module RTE
Consumed by	Develop BSW Module Generator	0*	
Consumed by	Generate BS W Configuration Code	0*	
Use meta model element	EcucModuleDef	1	

Table 3.237: BSW Module Vendor- Specific Configuration Parameter Definition



3.5.2.14 BSW Types

Artifact	BSW Types		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	Set of data types for usage within the Basic Software.		
Description			criptions) for usage by Basic Software ed by the Basic Software Module
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module Bundle	0*	
In/out	Define BSW Types	1	
Consumed by	Compile BSW Core Code	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Define BSW Entries	1	
Consumed by	Define BSW Inter- faces	1	
Use meta model element	AutosarDataType	1	

Table 3.238: BSW Types

3.5.2.15 Basic Software Entries

Artifact	Basic Software Ent	ries	
Package	AUTOSAR Root::M2 products	2::Metho	dology::Methodology Library::Bsw::Work
Brief Description	Set of signatures for calls between BSW modules.		
Description	Set of signatures for calls between BSW modules. Defining such a set as a separate artifact allows for a better reuse by several BSW modules. They are decribed in terms of the meta-model element BswModuleEntry which represents a C-function signature and associated properties.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module Bundle	01	
Produced by	Define BSW Entries	1	
Consumed by	Define BSW Inter- faces	1	
Use meta model element	BswModuleEntry	1	

Table 3.239: Basic Software Entries

3.5.2.16 Basic Software Module Description



Artifact	Basic Software Mo	dule De	scription
Package	AUTOSAR Root::M2 products	2::Metho	dology::Methodology Library::Bsw::Work
Brief Description	Description of a sing interfaces, depender		module or a module cluster in terms of its d module Id.
Description	triggers and modes) or a module cluster. module Id, which inc architecture (only many) Note that the descriptions and the company and the comp	and oth In additi licates the andatory otion of their In	(ingoing and outgoing C-function calls, er dependencies of a single BSW module ion, this artifacts defines the so-called ne role of the module within the v for standardized modules). The function signatures (so-called mplementationDataType can be factored as the function of the function of the factored mplementationDataType can be factored or the factored of the
W. J	improve their reuse.	itacts BS	SW Entries and BSW Types in order to
Kind	AUTOSAR XML Related Element	Mul.	Note
Relation Type Aggregated by	BSW Module Bun-	1*	Note
Aggregated by	dle	1	
Produced by	Define BSW Inter- faces	1	
Consumed by	Define BSW Behavior	1	
Consumed by	Generate BSW Module Prebuild Data Set	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Generate BSWM Contract Header Files	1	Meth.bindingTime = SystemDesignTime
Consumed by	Implement a BSW Module	1	Meth.bindingTime = SystemDesignTime
Consumed by	Generate BSW Memory Mapping Header	01	shortName: The BSW module's shortName is used as the first part of the generated file name, in case the default rule applies. Meth.bindingTime = SystemDesignTime
Use meta model element	BswModuleDe- scription	1	

Table 3.240: Basic Software Module Description

3.5.2.17 Basic Software Module Internal Behavior



Artifact	Basic Software Mo	dule Int	ernal Behavior
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work		
Dula (Dana a du tia a	products	ID de de d	and a DOW and I have BOW at all a
Brief Description	especially the sched		or of a BSW module or a BSW cluster, pect.
Description	code entities visible several different Bsw	by the B Internal	SSW module or a BSW cluster w.r.t. the SSW Scheduler. It is possible to have Behaviors referring to the same only one of them can be integrated on one
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module De- livered Bundle	1*	
Produced by	Create Library	1	Meth.bindingTime = CodeGenerationTime
Produced by	Define BSW Be- havior	1	
Consumed by	Define BSW Mod- ule Timing	1	
Consumed by	Generate BSW Module Prebuild Data Set	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Generate BSWM Contract Header Files	1	Meth.bindingTime = SystemDesignTime
Consumed by	Implement a BSW Module	1	Meth.bindingTime = SystemDesignTime
Consumed by	Map Software Component to BS W	1	
Consumed by	Generate Local M C Data Support	01	Meth.bindingTime = SystemDesignTime
Use meta model element	BswInternalBehav- ior	1	

Table 3.241: Basic Software Module Internal Behavior

3.5.2.18 Basic Software Module Implementation Description

Artifact	Basic Software Module Implementation Description
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products
Brief Description	Contains the implementation specific information of a module.
Description	Contains the implementation specific information of a module in addition to the generic specification given in Basic Software Module Description and Basic Software Module Internal Behavior.
Kind	AUTOSAR XML
Relation Type	Related Element Mul. Note



Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module ICS Bundle	1	The administrative elements (e.g. version info) of the Implementation model needed for the conformance test.
Aggregated by	BSW Module De- livered Bundle	1*	
Produced by	Create Library	1	Meth.bindingTime = CodeGenerationTime
Produced by	Implement a BSW Module	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Generate BSW Memory Mapping Header	1	infixes: Optional infixes (denoting instance and vendor ID) to be used within the created header file name. Meth.bindingTime = SystemDesignTime
Consumed by	Generate BSW Memory Mapping Header	1	DependencyOnArtifact: Can be used to override the default name of the memory mapping header file. Meth.bindingTime = SystemDesignTime
Consumed by	Generate BSW Memory Mapping Header	1	MemorySections: MemorySections defined for a BSW module. This input includes optional prefixes for memory sections overriding the default rule. Meth.bindingTime = SystemDesignTime
Consumed by	Generate BSW Module Prebuild Data Set	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Generate BSWM Contract Header Files	1	Meth.bindingTime = SystemDesignTime
Consumed by	Generate Compiler Configuration	1*	MemorySections: Find referred SwAddrMethods or specific memClassSymbols in the MemorySections defined for BSW modules. Meth.bindingTime = SystemDesignTime
Consumed by	Configure Memmap Allo- cation	0*	MemorySections:
Use meta model element	BswImplementa- tion	1	

Table 3.242: Basic Software Module Implementation Description

3.5.2.19 Build Action Manifest



Artifact	Build Action Manife	est	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	Describes the actions used to build certain artifacts from other artifacts.		
Description	(generate, compile, I Note: A build action basic software as we itself is however con- development.	ink). manifes ell as of	to build certain artifacts from other artifacts t can include the actions for processing of application software artifacts. The manifest as a product of basic software
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module De- livered Bundle	01	The build action manifest to be used for the delivered basic software.
Produced by	Implement a BSW Module	01	
Consumed by	Compile BSW Core Code	01	The compilation can optionally be controlled by a Build Action Manifest.
Consumed by	Compile ECU Source Code	01	The task may be controlled by a Build Action Manifest.
Consumed by	Connect Service Component	01	The task may be controlled by a Build Action Manifest.
Consumed by	Generate A2L	01	The task may be controlled by a Build Action Manifest.
Consumed by	Generate BS W Configuration Code	01	The task may be controlled by a Build Action Manifest.
Consumed by	Generate ECU Ex- ecutable	01	The task may be controlled by a Build Action Manifest.
Consumed by	Generate OS	01	The task may be controlled by a Build Action Manifest.
Consumed by	Generate RTE Postbuild Dataset	01	The task may be controlled by a Build Action Manifest.
Consumed by	Generate RTE Prebuild Dataset	01	The task may be controlled by a Build Action Manifest.
Use meta model element	BuildActionMani- fest	1	

Table 3.243: Build Action Manifest

3.5.2.20 Basic Software Module Timing



Artifact	Basic Software Mo	dule Tir	ning
Package	AUTOSAR Root::M2 products	2::Metho	dology::Methodology Library::Bsw::Work
Brief Description	BSW module's Timir	ngDescr	iption and TimingConstraints
Description			ngConstraints defined for the Internal (BSWModuleEntities)
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module Bundle	01	
Produced by	Define BSW Mod- ule Timing	1	
Consumed by	Define ECU Tim- ing	01	
Consumed by	Implement a BSW Module	01	Meth.bindingTime = SystemDesignTime
Use meta model element	BswModuleTiming	1	

Table 3.244: Basic Software Module Timing

3.5.2.21 Basic Software Module Core Header

Artifact	Basic Software Mo	dule Co	re Header
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products		
Brief Description	C-header files delive	red with	a BSW module.
Description	C-header file deliver by other modules.	ed with a	a BSW module. It may have to be included
Kind	Source Code		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module De- livered Bundle	1*	
Produced by	Implement a BSW Module	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile BSW Configuration Data	1	
Consumed by	Compile BSW Core Code	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile Configured BSW	1	
Consumed by	Compile Unconfigured BSW	1	
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime

Table 3.245: Basic Software Module Core Header

3.5.2.22 Basic Software Module Core Source Code



Artifact	Basic Software Mo	dule Co	re Source Code
Package	AUTOSAR Root::M2 products	:::Metho	dology::Methodology Library::Bsw::Work
Brief Description	The core source cod	le of a m	nodule provided by the vendor.
Description		not inclu	nodule provided by the vendor. "Core" de addtional source code, which may be uration process.
Kind	Source Code		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module De- livered Bundle	0*	
Produced by	Implement a BSW Module	01	The creation of source code is optional, since it might be generated completely in a later step based on the Build Action Manifest. Meth.bindingTime = CodeGenerationTime
Consumed by	Compile BSW Core Code	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile Configured BSW	1	
Consumed by	Compile Unconfigured BSW	1	
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime

Table 3.246: Basic Software Module Core Source Code

3.5.2.23 Basic Software Interlink Header

Artifact	Basic Software Mo	dule Int	erlink Header
Package	AUTOSAR Root::M2 products	2::Metho	dology::Methodology Library::Bsw::Work
Brief Description	Generated Header file used to link a BSW module with the BSW Scheduler.		
Description	Generated Header fi Scheduler during Co		to link a BSW module with the BSW hase.
Kind	Source Code		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module De- livered Bundle	1*	
Produced by	Generate BSWM Contract Header Files	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile BSW Core Code	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Implement a BSW Module	1	Meth.bindingTime = SystemDesignTime
Consumed by	Compile ECU Source Code	1*	Meth.bindingTime = CodeGenerationTime



Relation Type Related Element Mul. Note

Table 3.247: Basic Software Module Interlink Header

3.5.2.24 Basic Software Interlink Types Header

Artifact	Basic Software Interlink Types Header			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products			
Brief Description	Generated Header fi the BSW Scheduler	le with o	data types used to link a BSW module with	
Description	Generated Header fi the BSW Scheduler.	Generated Header file with data types used to link a BSW module with the BSW Scheduler.		
Kind	Source Code			
Relation Type	Related Element	Mul.	Note	
Aggregated by	BSW Module De- livered Bundle	0*		
Produced by	Generate BSWM Contract Header Files	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Compile BSW Core Code	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Implement a BSW Module	1	Meth.bindingTime = SystemDesignTime	
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime	

Table 3.248: Basic Software Interlink Types Header

3.5.2.25 BSW RTE Prebuild Configuration Header

Artifact	BSW RTE Prebuild	Config	uration Header	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products			
Brief Description	Generated header fill prebuild RTE contract		to resolve the prebuild variants in the for the BSW.	
Description	Generated header file used to resolve the prebuild variants of a basic software module in the prebuild RTE contract phase. Contains macros which resolve the variants when compiled with the module.			
Kind	Bound Source Code			
Relation Type	Related Element	Mul.	Note	
Aggregated by	BSW Module De- livered Bundle	0*		
Produced by	Generate BSW Module Prebuild Data Set	1	Meth.bindingTime = PreCompileTime	
Consumed by	Compile BSW Core Code	1	Meth.bindingTime = PreCompileTime	



Relation Type	Related Ele	ment	Mul.	Note
Consumed by	Compile	ECU	0*	Meth.bindingTime = PreCompileTime
	Source Code)		

Table 3.249: BSW RTE Prebuild Configuration Header

3.5.2.26 Basic Software Module Object Code

Artifact	Basic Software Mo	dule Ob	ject Code	
Package	AUTOSAR Root::M2	2::Metho	dology::Methodology Library::Bsw::Work	
	products			
Brief Description	Object code of a BS	W modu	ıle.	
Description	Object code of a BS	W modu	ıle.	
Kind	Object Code			
Relation Type	Related Element	Mul.	Note	
Aggregated by	BSW Module ICS	1*		
	Bundle			
Aggregated by	BSW Module De- livered Bundle	0*		
Produced by	Compile BSW Core Code	1	Meth.bindingTime = CompileTime	
Produced by	Compile Config- ured BSW	1		
Produced by	Compile Generated BSW	1		
Produced by	Compile Unconfigured BSW	1		
Consumed by	Link ECU Code after Precompile Configuration	1*		
Consumed by	Link ECU Code during Link Time Configuration	1*		
Consumed by	Generate ECU Executable	0*	for object code delivery Meth.bindingTime = CompileTime	

Table 3.250: Basic Software Module Object Code

3.5.2.27 Library Description



Artifact	Library Description			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products			
Brief Description	Description of a libra	ry in Au	tosar XML.	
Description	Description of a library in Autosar XML. This uses the same template as for describing Basic Software Modules, but with restricted content. Main purpose is to describe the C-interfaces of the library.			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Produced by	Create Library	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Implement Atomic Software Compo- nent	0*	Meth.bindingTime = CodeGenerationTime	
Use meta model element	BswModuleDe- scription	1		

Table 3.251: Library Description

3.5.2.28 Library Header Files

Artifact	Library Header Files				
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products				
Brief Description	These additional headers are typically needed for libraries that a component uses.				
Description	1		e typically needed for libraries that a s (e.g. a "math-libary").		
Kind	Source Code				
Relation Type	Related Element	Mul.	Note		
Produced by	Create Library	1	Meth.bindingTime = CodeGenerationTime		
Consumed by	Compile BSW Core Code	01	Meth.bindingTime = CodeGenerationTime		
Consumed by	Implement a BSW Module	01	Meth.bindingTime = CodeGenerationTime		
Consumed by	Compile Atomic Software Compo- nent	0*	Meth.bindingTime = CodeGenerationTime		
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime		
Consumed by	Implement Atomic Software Component	0*	Meth.bindingTime = CodeGenerationTime		
Consumed by	Re-compile Component in ECU context	0*	Meth.bindingTime = CodeGenerationTime		

Table 3.252: Library Header Files



3.5.2.29 Library Object Code

Artifact	Library Object Code			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Bsw::Work products			
Brief Description	The object code of a	lbrary.		
Description	The object code of a library, to be linked with other object code during a build of the ECU executable.			
Kind	Object Code			
Relation Type	Related Element	Mul.	Note	
Aggregated by	Delivered Atomic Software Compo- nents	0*		
Produced by	Create Library	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Generate ECU Executable	0*	for object code delivery Meth.bindingTime = CompileTime	

Table 3.253: Library Object Code

3.6 ECU Integration and Configuration

This chapter contains the definition of work products and tasks used for the integration and configuration of AUTOSAR software on an ECU. For the definition of the relevant meta-model elements refer to [10].

3.6.1 Tasks

3.6.1.1 Provide RTE Calibration Dataset

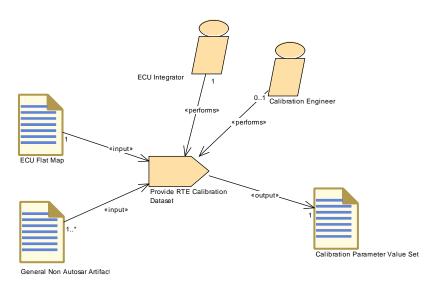


Figure 3.120: Provide RTE Calibration Dataset



Task Definition	Provide RTE Calibr	ation D	ataset		
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Provide a data set de the RTE code.	Provide a data set defining initial values for calibration parameters in the RTE code.			
Description	not part of the AUTC as a General Non Al The output of this tag format, which can be the RTE generator.	Since a model of the "downstream" calibration process of an ECU is not part of the AUTOSAR methodology, the input data are only shown as a General Non AUTOSAR Artifact. The output of this task is a set of calibration values in AUTOSAR format, which can be further processed within AUTOSAR, namely by the RTE generator. The calibration values have to be associated to the corresponding parameter specification via a reference to the ECU Flat			
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	1			
Performed by	Calibration Engi- neer	01			
Consumes	ECU Flat Map	1			
Consumes	General Non Autosar Artifact	1*	input from calibration process		
Produces	Calibration Parameter Value Set	1			

Table 3.254: Provide RTE Calibration Dataset

3.6.1.2 Define Integration Variant

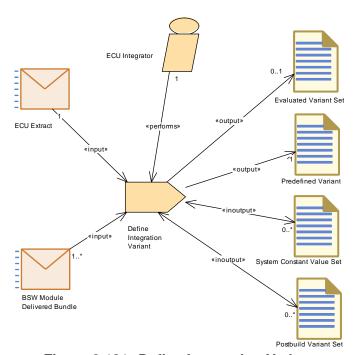


Figure 3.121: Define Integration Variant



Task Definition	Define Integration	/ariant			
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Define a variant for t	Define a variant for the artifacts integrated on an ECU.			
Description	adding a Predefined modules in scope. To Constant Value Set	Define a variant for the artifacts integrated on an ECU, this means adding a PredefinedVariant related to the ECU extract and the BSW modules in scope. To do so, this task can make use of existing System Constant Value Set and/or Postbuid Variant Sets or define new ones. Several PredefinedVariants can be combined to one Evaluated Variant Set.			
	allowed to be set at of ECU integration, i yet been resolved in Especially, variation	It is up to particular process definition to decide, which variants are allowed to be set at integration time. Technically, since this task is part of ECU integration, it can only resolve variation points which have not yet been resolved in the delivered ECU extract or BSW modules. Especially, variation points which have to be bound at system design time, should have been already resolved before.			
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	1			
Consumes	ECU Extract	1			
Consumes	BSW Module De- livered Bundle	1*			
In/out	Postbuild Variant Set	0*			
In/out	System Constant Value Set	0*			
Produces	Predefined Variant	1	Meth.bindingTime = SystemDesignTime		
Produces	Evaluated Variant Set	01	Meth.bindingTime = SystemDesignTime		

Table 3.255: Define Integration Variant



3.6.1.3 Generate Base ECU Configuration

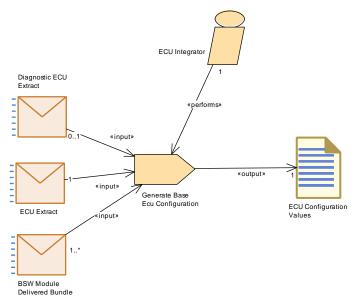


Figure 3.122: Generate Base ECU Configuration

Task Definition	Generate Base Ecu Configuration			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Generate an initial set of ECU configuration values based on the delivered ECU extract.			
Description	Create the ECU configuration module structure including an initial set of ECU configuration values. This is based on the delivered ECU extract and on the vendor specific configuration parameters and their recommended or pre-configured			
	values provided with the delivered BSW modules. Furthermore the diagnostic extract is used to create the initial configuration for diagnostic related modules, such as DCM and DEM. Meth.bindingTime = SystemDesignTime			
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	ECU Extract	1		
Consumes	BSW Module De- livered Bundle	1*	Need vendor specific configuration parameters and their recommended or pre-configured values.	
Consumes	Diagnostic ECU Extract	01		
Produces	ECU Configuration Values	1	Meth.bindingTime = SystemDesignTime	

Table 3.256: Generate Base Ecu Configuration



3.6.1.4 Generate Updated ECU Configuration

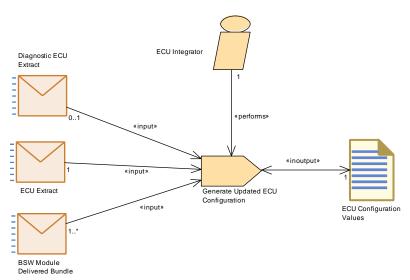


Figure 3.123: Generate Updated ECU Configuration

Task Definition	Generate Updated ECU Configuration			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Generates the update	ted ECU	configuration.	
Description	This task generates the updated ECU configuration based on the initial ECU configuration, the updated ECU Extract and optionally the Diagnostic Extract. Meth.bindingTime = SystemDesignTime			
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	ECU Extract	1		
Consumes	BSW Module De- livered Bundle	1*		
Consumes	Diagnostic ECU Extract	01		
In/out	ECU Configuration Values	1	The task "Generate Updated ECU Configuration" consumes the initial ECU configuration values and produces the updated ECU configuration values.	

Table 3.257: Generate Updated ECU Configuration



3.6.1.5 Define ECU Timing

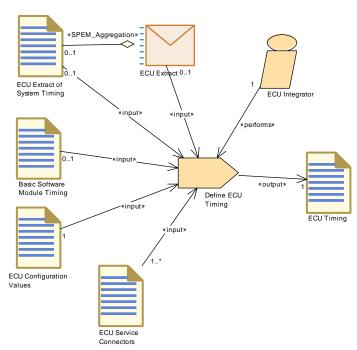


Figure 3.124: Define ECU Timing

Task Definition	Define ECU Timing				
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	concrete ECU taking	Define ECUTiming (TimingDescription and TimingConstraints) for a concrete ECU taking the ECU configuration and the ECU Software Composition (including their implementation) into account.			
Description	concrete ECU taking Composition (includi	Define ECUTiming (TimingDescription and TimingConstraints) for a concrete ECU taking the ECU configuration and the ECU Software Composition (including their implementation) into account. Meth.bindingTime = SystemDesignTime			
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	1			
Consumes	ECU Configuration Values	1			
Consumes	ECU Service Connectors	1*			
Consumes	Basic Software Module Timing	01			
Consumes	ECU Extract	01	Needed to set up links to the elements of the ECU extract.		
Consumes	ECU Extract of System Timing	01			
Produces	ECU Timing	1	Meth.bindingTime = SystemDesignTime		

Table 3.258: Define ECU Timing



3.6.1.6 Configure EcuC

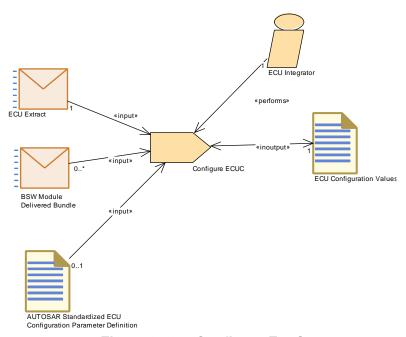


Figure 3.125: Configure EcuC



Task Definition	Configure ECUC			
Package	AUTOSAR Root::M2	2::Metho	dology::Methodology Library::Ecu::Tasks	
Brief Description	Set the general ECU	l configu	ration values.	
Description	parameters. These a related to a particula	Set the general ECU configuration values, the so-called EcuC parameters. These are the configuration parameters which are not related to a particular module, but are relevant for the ECU in general. The EcuC parameters consist of the following parts:		
	Collection of a	all Pdu o	bjects flowing through the Com-Stack.	
	implemented	using or	for the ECU (One partition will be ne OS application). The memory partitions ore doing the OS configuration.	
			edVariant elements which shall be applied riability during ECU Configuration.	
	segments (de SwAddrMetho each such Ec	 Collection of mappings between ECU hardware memory segments (defined in ECU Resources Description) and SwAddrMethod elements (defined in VFB Types). The name of each such EcucMemoryMappingElement could be used as to predefine the logical memory segment for the linker configuration. 		
	R4.0 rev.2, because been added which a SwAddrmethod. A re grained mapping is o	Note: The usage of EcucMemoryMappingElement is deprecated in R4.0 rev.2, because the configuration of the "MemMap" module has been added which allows a more fined grained memory mapping than SwAddrmethod. A relationship to hardware elements from this fine grained mapping is currently not provided. See task definition Configure Memmap Allocation.		
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	ECU Extract	1		
Consumes	AUTOSAR Standardized ECU Configuration Parameter Definition	01		
Consumes	BSW Module De- livered Bundle	0*		
In/out	ECU Configuration Values	1		

Table 3.259: Configure ECUC



3.6.1.7 Configure OS

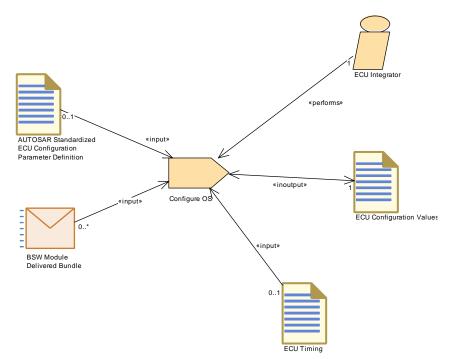


Figure 3.126: Configure OS



Task Definition	Configure OS			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description			g the Tasks, events, alarms, etc.	
Description	The OS configuration process may be highly iterative between RTE and OS, e.g. RTE needs some OsTasks or OsScheduleTables to map Runnables into them. To finalize a ECU Configuration the OS is the last BSW module to configure (with the exception of the debugger). To use multi-core ECUs the EcuC Configuration needs to be provided beforehand to the OS Configuration to map the cores. There cannot be specified a precedence which configuration parameter values should be set first for OsAlarm, OsApplication, OsCounter, OsIsr, OsOs, OsResource, OsScheduleTable, OsSpinlock, OsTask. This is dependent on the development and configuration process. Application + Basic Software requirements and fulfill those with OS artifacts.			
	Mandatory Inputs:			
	 RTE part of the 	e ECU	Configuration	
	 EcuC part of t 	he ECU	Configuration	
	Outputs: OS part of the ECU Configuration RTE part of the ECU Configuration The following steps are needed to perform the task: Map OS Configuration to Cores only in the case of multiple core ECU. Define the OSTasks and OSSchedule: Tables based on the events/runnables of the application & bsw components, create the OSTasks that will invoke them. Map Runnables into OSTasks and OSSchedule Tables: Assign all the runnables to the OSTasks Steps for "OsAlarm, OsApplication, OsCounter, OsIsr, OsOs, OsResource, OsScheduleTable, OsSpinlock, OsTask."			
	Meth.bindingTime =	System	DesignTime	
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	AUTOSAR Standardized ECU Configuration Parameter Definition	01		
Consumes	ECU Timing	01		



Relation Type	Related Element	Mul.	Note
Consumes	BSW Module De- livered Bundle	0*	OS Resources required by Basic Software.
			Optional Input: Basic Software Module Timing, e.g. execution order constraints.
In/out	ECU Configuration Values	1	

Table 3.260: Configure OS

3.6.1.8 Configure RTE

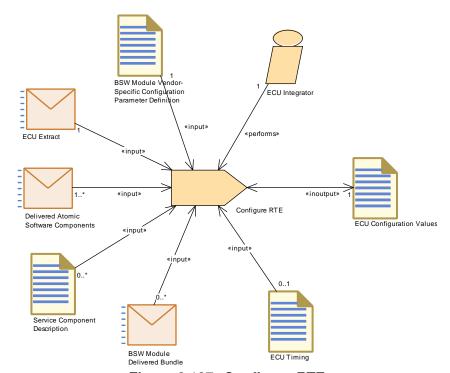


Figure 3.127: Configure RTE



Task Definition	Configure RTE			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Describes the steps RTE.	required	d to successfully configure the AUTOSAR	
Description	OS. The specificatio are configured in this RTE specific options data. Post-build variations	Configure the RTE to correctly interact with AUTOSAR COM and the OS. The specification of the OS objects used by the generated RTE are configured in this task. In addition, configuration includes setting RTE specific options and the handling of measurement and calibration data. Post-build variants which shall be supported by the RTE code must be referenced by the configuration.		
	RTE General Config Implementations 3.S Runnable needs to be to be invoked. 5.Map Areas 7.Select Impli Support 9.Configure needed if decisions	The following steps are usualy done to configure the RTE: 1.Setup RTE General Configuration 2.Select Software Component Implementations 3.Select BSW Module Implementations 4.Each Runnable needs to be assigned to an Operating System Task in order to be invoked. 5.Map BSW Executables to tasks 6.Resolve Exclusive Areas 7.Select Implicit Communication behavior 8.Select Calibration Support 9.Configure Non Volatile Memory Block Component (only needed if decisions on the configuration have to be taken during ECU Configuration) 10.Select the supported post-build variants		
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1	Note	
Consumes	BSW Module Vendor- Specific Configuration Parameter Definition	1	The definitions for the module RTE	
Consumes	ECU Extract	1	Elements of the System Description and VFB Description are referred by the RTE configuration. Optional Input: ECU Extract of System	
Congumos	Delivered Atomic	1*	Timing, e.g. execution order constraints. Required input:	
Consumes	Software Components	1	 References to all component implementation descriptions on this ECU SwcInternalBehavior (for example to map the runnables to tasks) which was used in the contract 	
	FOUT		phase of the software components on this ECU	
Consumes	ECU Timing	01	I have the first on the DOMAN At the Domain at	
Consumes	BSW Module De- livered Bundle	0*	Input from the BSW Module Description is needed related to Scheduling, Exclusive Areas, Triggers and Modes. Optional Input: Basic Software Module	
			Timing, e.g. execution order constraints.	



Relation Type	Related Element	Mul.	Note
Consumes	Service Component Description	0*	The Internal Behavior of Service Components contributes to the RTE configuration.
In/out	ECU Configuration Values	1	

Table 3.261: Configure RTE

3.6.1.9 Configure Watchdog Manager

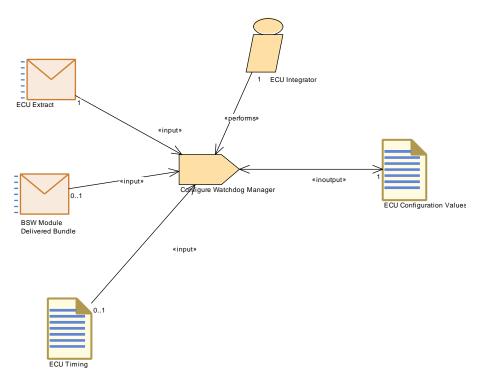


Figure 3.128: Configure Watchdog Manager

Task Definition	Configure Watchdo	Configure Watchdog Manager		
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks		
Brief Description	Describes the steps Manager	Describes the steps required to succesfully configure the Watchdog Manager		
Description	manager you need. can connect several	Configured Top-Down. Service needs determine what kind of watchdog manager you need. For each service need there is one interface. You can connect several of these interfaces to one watchdog manager Meth.bindingTime = SystemDesignTime		
Relation Type	Related Element	Related Element Mul. Note		
Performed by	ECU Integrator	1		
Consumes	ECU Extract	1	Application software requirements for WdgM, especially SwcServiceDependency and ServiceNeeds.	



Relation Type	Related Element	Mul.	Note
Consumes	BSW Module De- livered Bundle	01	Predefined or recommended configuration values, vendor specific parameters, ServiceNeeds defined by BSW.
Consumes	ECU Timing	01	
In/out	ECU Configuration Values	1	

Table 3.262: Configure Watchdog Manager

3.6.1.10 Configure Mode Management

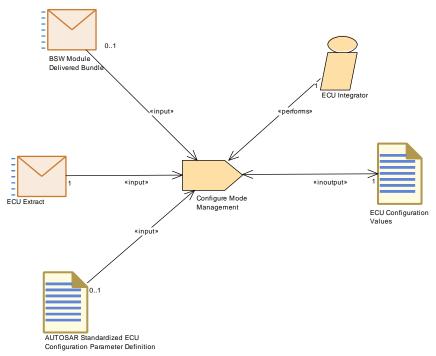


Figure 3.129: Configure Mode Management

Task Definition	Configure Mode Ma	Configure Mode Management		
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks		
Brief Description	Configure the Mode	Manage	ers in the Basic Software for this ECU.	
Description	the methodology libithough in practice it	Configure the Mode Managers in the Basic Software for this ECU. In the methodology library this is modeled as a single task (for simplicity) though in practice it may consist of several single tasks. Meth.bindingTime = SystemDesignTime		
Relation Type	Related Element	Related Element Mul. Note		
Performed by	ECU Integrator	1		
Consumes	ECU Extract	1	Application software requirements for NvM, especially SwcServiceDependency and ServiceNeeds.	



Relation Type	Related Element	Mul.	Note
Consumes	AUTOSAR Standardized ECU Configuration Parameter Definition	01	
Consumes	BSW Module De- livered Bundle	01	Predefined or recommended configuration values, vendor specific parameters, ServiceNeeds defined by BSW.
In/out	ECU Configuration Values	1	

Table 3.263: Configure Mode Management

3.6.1.11 Configure NvM

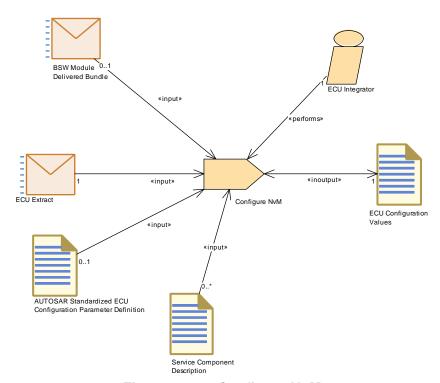


Figure 3.130: Configure NvM



Task Definition	Configure NvM	Configure NvM			
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Configure the NvM stack for this ECU.				
Description	modeled as a single	Configure the NvM stack for this ECU. In the methodology library this is modeled as a single task (for simplicity) though in practice it may consist of several single tasks.			
	Requirements for the	e configu	uration of NvM can be collected		
			ormation about ServiceDependencies and ECU Extract and BSW Modules		
	from existing	ECU co	nfiguration values		
	I	from Service Component Descriptions created for other Services (e.g. DEM) Math. binding Times - Contage Region Times			
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	1			
Consumes	ECU Extract	1	Application software requirements for NvM, especially SwcServiceDependency and ServiceNeeds.		
Consumes	AUTOSAR Standardized ECU Configuration Parameter Definition	01			
Consumes	BSW Module De- livered Bundle	01	Predefined or recommended configuration values, vendor specific parameters, ServiceNeeds defined by BSW.		
Consumes	Service Component Description	0*	The configuration of diagnostics, especially of the DEM, typically leads to the definition of additional data to be stored in NvM. One possibility to handle this is to create ServiceNeeds on the level ServiceComponentType which is then taken into account for the configuration of the NvM.		
In/out	ECU Configuration Values	1			

Table 3.264: Configure NvM



3.6.1.12 Configure Diagnostics

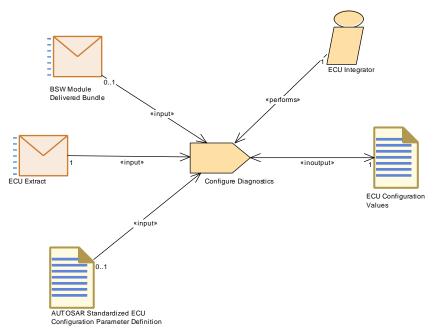


Figure 3.131: Configure Diagnostics

Task Definition	Configure Diagnostics			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Configure the diagno	ostic mo	dules for this ECU	
Description	Configure the diagnostic modules for this ECU. In the methodology library this is modeled as a single task (for simplicity) though in practice it may consist of several single tasks. Meth.bindingTime = SystemDesignTime			
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	ECU Extract	1	Application software requirements for diagnostics, especially SwcServiceDependency and ServiceNeeds.	
Consumes	AUTOSAR Standardized ECU Configuration Parameter Definition	01		
Consumes	BSW Module De- livered Bundle	01	Predefined or recommended configuration values, vendor specific parameters, ServiceNeeds defined by BSW.	
In/out	ECU Configuration Values	1	Configuration Values for DEM, DCM, DLT, FIM.	

Table 3.265: Configure Diagnostics



3.6.1.13 Create Service Component

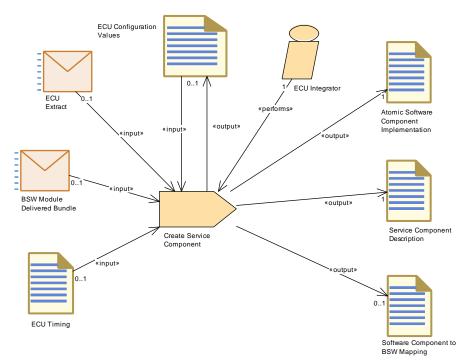


Figure 3.132: Create Service Component







Relation Type	Related Element Mul. Note			
Task Definition	Create Service Component			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Create an instances for all required Service Components, configure them, create necessary ports and connectors to the respective application software components. This completes the ECU Software Composition.			
Description	The ECU Extract contains all information about which components are mapped to a specific ECU. In a new "flat" Software Composition (meta-class RootSwCompositionPrototype) all other compositions have been removed. This has to be extended by an aggregation of the SwComponentPrototypes which describe the Services required by all application components on the ECU:			
	 For each mapped SwComponentPrototype of type AtomicSwComponentType, the PortPrototypes requiring a particular Service and the associated SwcServiceDependency-s and ServiceNeeds are collected. Based on this information, a ServiceSwComponentType and its prototype is created exactly once per service with the corresponding number of PortPrototypes, thus that all service-type PortPrototypes of the Application Components have their PortPrototype counterpart on the ServiceSwComponentType. 			
	 RTE generation requires that an InternalBehavior and Implementation is created for each ServiceSwComponentType. In particular, the port defined argument values required for the usage of some service interfaces are configured, and the required RunnableEntities and RTEEvents are set up. It is also required to define a mapping between elements of the generated SWC and existing or generated elements of the BSW module description. 			
	 The evaluation of the input might result in further ServiceNeeds to be added to the generated InternalBehavior - for example a ServiceSwComponentType created for the DEM might include ServiceNeeds for NVRAM blocks. It is assumed, that such interdependencies are incrementally resolved within this task fo all involved Service Components such that the outputs are consistent. Note that this is just one possibility to handle the situation - another option is to resolve the interdependencies only within the ECU configuration tasks (Configure Diagnostics, Configure NvM) without creating additional ServiceNeeds. 			
	Depending on the details of the configuration process for the particular module (namely which parts are generated or manually created), the steps described above can be done before, in parallel or after setting up the ECU configuration of the involved BSW modules. Likewise, the information used to create the ServiceSwComponentType(s) can composite configuration to the ECU Extract, or via the ECU Configuration. Therefore both artifacts are shown as optional input. The ECU Configuration is also an output, because a reference to the created SwComponentPrototype(s) must be entered here.			
34 of 503	The creation of connectors between the service and application components is a separate task Document ID 068: AUTOSAR_TR_Methodological contents and application components is a separate task			
	Meth.binding Eime ⊜ System Design Time			
Relation Type	Related Element Mul. Note			



Relation Type	Related Element	Mul.	Note
Performed by	ECU Integrator	1	
Consumes	BSW Module De- livered Bundle	01	Required in order to define a mapping between SWC and BSW.
			In addition, the Build Action Manifest may be used.
Consumes	ECU Configuration Values	01	The creation of Service Component details may depend on ECU configuration values, especially for the DCM.
Consumes	ECU Extract	01	Input information about the Service Ports and Service Dependencies of the software components.
Consumes	ECU Timing	01	Additional information for fine tuning configuration decisions.
Produces	Atomic Software Component Implementation	1	In order to generate the RTE, one needs to create a kind of dummy Implementation element for the Service Component, however this should not be filled with descriptive elements, e.g. resource consumption, as these are already defined by the Basic Software Module Implementation Description. Meth.bindingTime = SystemDesignTime
Produces	ECU Configuration Values	1	Enter links to the created SwComponentPrototypes. Meth.bindingTime = SystemDesignTime
Produces	Service Component Description	1	Meth.bindingTime = SystemDesignTime
Produces	Software Component to BSW Mapping	01	Meth.bindingTime = SystemDesignTime

Table 3.266: Create Service Component



3.6.1.14 Connect Service Component

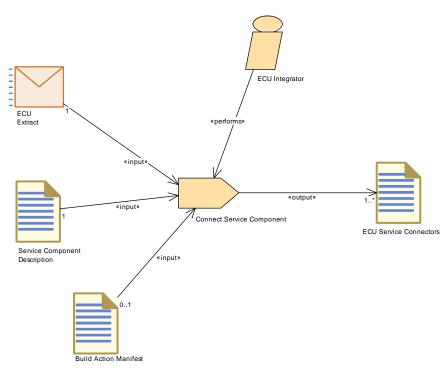


Figure 3.133: Connect Service Component

Task Definition	Connect Service C	Connect Service Component		
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks		
Brief Description				
Description	In order to connect the "isService"-ports of the application components to a particular ServiceSwComponentType, AssemblyConnectorPrototypes are generated. The ECU Extract with its RootSwCompositionPrototype, extended by the Service Components and their connectors, finally serves as input for generating the RTE.			
	Meth.bindingTime =	System	DesignTime	
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	ECU Extract	1	Find the ports on the application side to be connected to the Service Component.	
Consumes	Service Component Description	1	Required in order to define the connector links to the ports on the BSW side.	
Consumes	Build Action Mani- fest	01	The task may be controlled by a Build Action Manifest.	
Produces	ECU Service Con- nectors	1*	Meth.bindingTime = SystemDesignTime	

Table 3.267: Connect Service Component



3.6.1.15 Configure COM

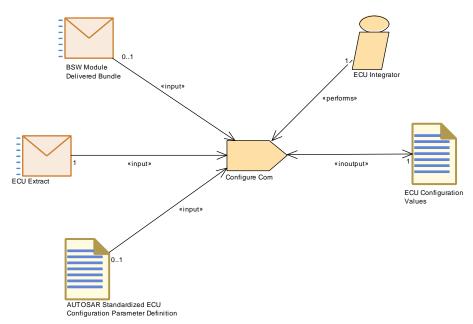


Figure 3.134: Configure COM



Task Definition	Configure Com				
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Configure the COM	Configure the COM stack modules within an ECU			
Description	of information that is Many parameter value the ECU extract. The that can not be derive this phase, e.g. Vender following steps will be configuration paramed Template Specification configuration paramed Templates (SWC Template). This rules ECU extract: A globe and is added to the finite that the ECU Extract all finite the global PDUs in the global PDUs. The last shandle IDs: The last shandle IDs: This can	The ECU Extract of the System Configuration contains the major part of information that is needed to configure the COM Stack modules. Many parameter values of the ECU configuration can be derived from the ECU extract. The missing ECU specific configuration parameters that can not be derived from the System Description need to be set in this phase, e.g. Vendor-Specific Configuration Parameters. The following steps will be needed to perform the task: 1- Derive configuration parameter values from ECU extract: The System Template Specification describes rules on how the individual ECU configuration parameters shall be derived from the Upstream Templates (SWC Template, System Template, ECU Resource Template). This rules shall be followed. 2- Derive global PDUs from ECU extract: A global PDU has to be configured for each I-PDU flow and is added to the PDU collection of the module EcuC. Derived from the ECU Extract all PDUs that traverse through the COM Stack have to be created. 3- Create PDU References from the BSW Module PDUs to the global PDUs in the module EcuC:As soon as these global PDUs are created the references from the local module PDUs to the appropriate global PDUs need to be configured. 4-Set Missing and Vendor-Specific Parameter Values need to be set 5-Set BSW Module specific PDU handle IDs:The last step is the assignment of the actual values for the Handle IDs. This can be achieved by an automatic tool which might be run directly before the generation of the module.			
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	1			
Consumes	ECU Extract	1			
Consumes	AUTOSAR Standardized ECU Configuration Parameter Definition	01			
Consumes	BSW Module De- livered Bundle	01			
In/out	ECU Configuration Values	1			

Table 3.268: Configure Com



3.6.1.16 Configure IO Hardware Abstraction

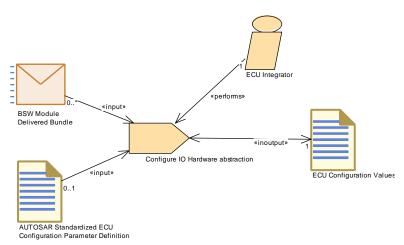


Figure 3.135: Configure IO Hardware Abstraction

Task Definition	Configure IO Hardy	Configure IO Hardware abstraction		
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks		
Brief Description	Configure I/O Hardw	are Abs	straction	
Description	Configure the I/O Ha	Configure the I/O Hardware Abstraction modules.		
	Meth.bindingTime =	Meth.bindingTime = SystemDesignTime		
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	AUTOSAR Stan- dardized ECU Configuration Pa- rameter Definition	01		
Consumes	BSW Module De- livered Bundle	0*		
In/out	ECU Configuration Values	1		

Table 3.269: Configure IO Hardware abstraction



3.6.1.17 Configure MCAL

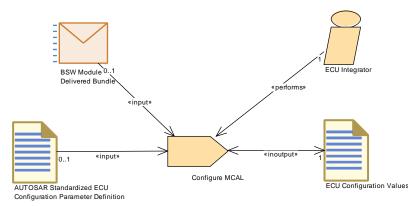


Figure 3.136: Configure MCAL

Task Definition	Configure MCAL			
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks		
Brief Description	Configure the Micro	controlle	r Abstraction Layer for this ECU.	
Description	Configure the Micro	controlle	r Abstraction Layer for this ECU.	
	Meth.bindingTime =	Meth.bindingTime = SystemDesignTime		
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	AUTOSAR Standardized ECU Configuration Parameter Definition	01		
Consumes	BSW Module De- livered Bundle	01		
In/out	ECU Configuration Values	1		

Table 3.270: Configure MCAL



3.6.1.18 Configure Debug

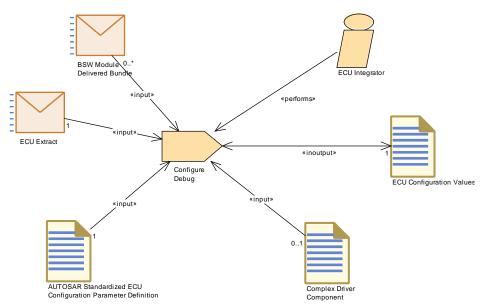


Figure 3.137: Configure Debug



Task Definition	Configure Debug			
Package	AUTOSAR Root::M2	2::Metho	dology::Methodology Library::Ecu::Tasks	
Brief Description	Configure the AUTOSARdebugger Module			
Description	The AUTOSAR Debugger Module (Dbg) handles the interaction between the Debugger Host and the AUTOSAR ECU. It is split into the "core" and the "communication" part. Each BSW has an ID & Each API has an ID. (e.g. module 84, api 5). The Debugger Host (shortly called Host) may be connected via			
	Existing community behavior of the ECU		uses which are also used for the functional	
	2. A dedicated debu of the ECU. (e.g. via		e which is not used for functional behavior ex Driver)	
	configured quite late	in the E before th	n on the debugged software, it is CU Configuration steps. Other modules be debug. Even after changes of the OS be updated as well.	
	The input to the Dbg Values description	ECU C	onfiguration are: 1. ECU Configuration	
	If existing communication buses are used, Dbg needs to transmit and receive I-Pdus which then are handled in the COM-Stack. Those I-Pdus need to be created / referenced.			
	Usage of OsAlarm			
	Usage of GptChannel (optional, for time stamping)			
	2. BSW Module Descriptions of the debugged modules in order to			
	identify which variables / functions can be debugged. Prerequisites are: The variables need to be placed in global accessible memory; the data types of these variables need to be defined in the header files.			
	Meth.bindingTime =	System	DesignTime	
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	AUTOSAR Standardized ECU Configuration Parameter Definition	1		
Consumes	ECU Extract	1		
Consumes	Complex Driver Component	01		
Consumes	BSW Module De- livered Bundle	0*		
In/out	ECU Configuration Values	1		

Table 3.271: Configure Debug



The task to configure the debug module consists of the following detailed steps (not shown in the table above due to formating reasons):

- 1. RTE VFB-Tracing if needed: The RTE ECU Configuration shall contain a "RteVfbTraceClientPrefix = Dbg".
- 2. Periodic Data Collection if needed: Configure the reference to the OsAlarm which will invoke the periodic data collection. Note that the OsAlarm needs to be configured in the Os ECU Configuration (before or after).
- 3. Timestamp Measurement if needed: Configure the size of the timestamp (16 or 32 bit) then configure the reference to the GptChannel which will provide the timestamp information. Note that the GptChannel needs to be configured in the Gpt ECU Configuration (before or after).
- 4. Configure the Buffering of the Debug: Size, Strategy (last-is-best/queued) and behavior.
- 5. AUTOSAR Communication stack: Configure the used Tx and Rx I-Pdus, the corresponding I-Pdus need to be configured in the EcuC Module and the rest of the COM-Stack. If Complex Driver is used for communication, configure Complex Driver.
- 6. Configure the to be debugged elements BSW only Prerequisite: The BSW Module shall be already configured and generated therefore there is an updated BSW-Module Description available of the actually generated BSW Module. The first work will be to get the list of traceable API calls out of the BSWMD of the BSW Module. Then select which API calls shall be traced (e.g. call "CanIf_Transmit" from the "PduR" to the "CanIf") and configure each trace function: buffering, timestamp.
- 7. Configure the to be debugged elements RTE only Prerequisite: The RTE has been generated, therefore there is an updated BSW-Module Description available of the actually generated RTE. Attention: The RTE shall not be re-configured after the Dbg has been configured, otherwise the Dbg needs to be re-configured as well. The first work will be get the list of available VFB-Trace functions out of the BSWMD of the RTE. Then, Select which VFB-Trace functions shall be traced (e.g. Rte_Dbg_Runnable_component_re_Start()), configure each VFB-Trace function: Buffering, Timestamp, in case of Rte-Com tracing: which Com-Signal is traced, in case of VFB-Signal tracing: which VariablePrototype is traced, in case of Client-Server tracing: which OperationPrototype is traced, in case of RunnableEntity tracing: which RunnableEntity is traced.
- 8. Configure the to be debugged elements BSW and RTE Prerequisite: The RTE has been generated, therefore there is an updated BSW-Module Description available . Attention: The RTE shall not be re-configured after the Dbg has been configured. The first step will be out of the BSWMD of the BSW and the RTE to extract the list of available debuggable variables and provide it to the Dbg configuration. Then, select which variables shall be debugged (e.g. internal states of the module), configure each individual DID with symbol name, optional size, optional absolute address, buffering, timestamp, collection frequency Note: Size and address (e.g. for an ECU register) could be resolved by the linker, hence optional here.



9. Generate the Dbg Module: Generate the c and header files of the Dbg, use the additional header files of the to be debugged modules in order to perform a "sizeof()" operation in the compiler, compile Dbg Module (and other to-be-debugged modules), analyze the object file in order to update the ECU Configuration Values description which additional information the length information for each DID (out of the sizeof() operation). Host application uses this information (ECU configuration of debug module, BSW module description of the debug module and the to-be-debugged modules) in order to send the correct DIDs.

3.6.1.19 Configure Transformer

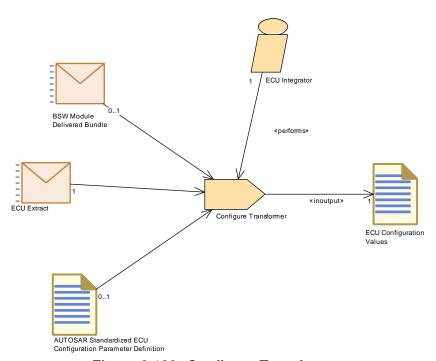


Figure 3.138: Configure Transformer

Task Definition	Configure Transformer		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks		
Brief Description			
Description	Configure the Transf	ormer m	nodules for this ECU.
Relation Type	Related Element	Mul.	Note
	ECU Extract	1	
	AUTOSAR Standardized ECU Configuration Parameter Definition	01	
	BSW Module De- livered Bundle	01	
Performed by	ECU Integrator	1	
In/out	ECU Configuration Values	1	



Relation Type	Related Element	Mul.	Note
Tiolation Type	riolatea =.ee		11010

Table 3.272: Configure Transformer

3.6.1.20 Generate BSW Configuration Code and Model Extensions

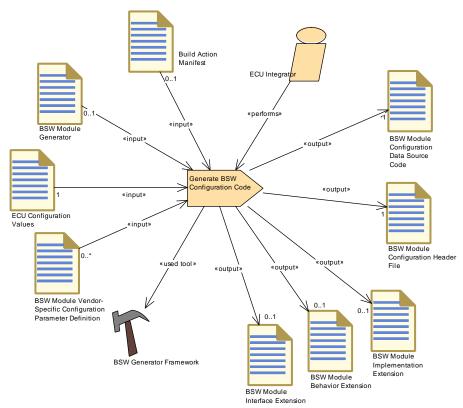


Figure 3.139: Generate BSW Code and model extensions



Task Definition	Generate BSW Cor	nfigurati	ion Code	
Package	AUTOSAR Root::M2 Config Classes::Tasl		dology::Methodology Library::Ecu::ECU	
Brief Description	Generate source code which implements configuration data for link- or compile-time configuration.			
Description	Description and crea specified configuration the configuration con for compile-time con into a header file (e.e.	A generator reads the relevant parameters from the ECU Configuration Description and creates a separate code file that implements the specified configuration. This task is used for link-time configuration, i.e. the configuration code can be produced at link-time of the core code or for compile-time configuration, if the configuration code cannot be put into a header file (e.g. for tables), even if the core code and the configuration code shall be compiled at the same time.		
	A header file may be	produc	ed in addition, to declare the data.	
		artifacts	nay produce extensions of the BSW as a result of configuration parameter gration time.	
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	ECU Configuration Values	1		
Consumes	BSW Module Generator	01	This is an input in case a generator framework is used which has to run some module specific generator code.	
Consumes	Build Action Mani- fest	01	The task may be controlled by a Build Action Manifest.	
Consumes	BSW Module Vendor- Specific Configuration Parameter Definition	0*		
Produces	BSW Module Configuration Data Source Code	1		
Produces	BSW Module Configuration Header File	1		
Produces	BSW Module Be- havior Extension	01		
Produces	BSW Module Implementation Extension	01		
Produces	BSW Module Inter- face Extension	01		
Used tool	BSW Generator Framework	1		

Table 3.273: Generate BSW Configuration Code



3.6.1.21 Generate Local MC Data Support

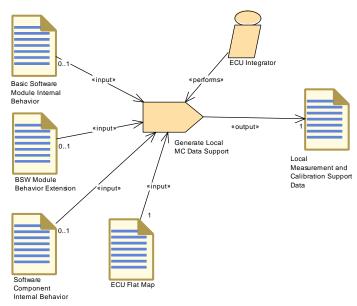


Figure 3.140: Generate Local MC Data Support

Task Definition	Generate Local MC	Generate Local MC Data Support			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks				
Brief Description	Generate Local MC	Support	Data		
Description	those parameters ar staticMemory), which component (in contract The declaration of loss Behavior of either a therefore these can Map is needed as in This task can be combut it is considered a Note that calibration	nd variate hare owe ast to the call variable consinut in or mbined was an inconditional data the alled by the constant of the constant in the case of the constant in the case of the case	at need software emulation support by the his task; they need to be processed by the		
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	1			
Consumes	ECU Flat Map	1	Meth.bindingTime = SystemDesignTime		
Consumes	BSW Module Be- havior Extension	01	Meth.bindingTime = SystemDesignTime		
Consumes	Basic Software Module Internal Behavior	01	Meth.bindingTime = SystemDesignTime		



Relation Type	Related Element	Mul.	Note
Consumes	Software Component Internal Behavior	01	Meth.bindingTime = SystemDesignTime
Produces	Local Measure- ment and Cali- bration Support Data	1	Meth.bindingTime = CodeGenerationTime

Table 3.274: Generate Local MC Data Support

3.6.1.22 Create MC Function Model

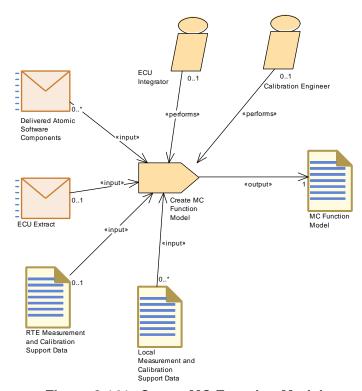


Figure 3.141: Create MC Function Model



Task Definition	Create MC Function	n Model	I		
Package	AUTOSAR Root::M2	2::Metho	dology::Methodology Library::Ecu::Tasks		
Brief Description	Define a model of M	cFunctio	ons.		
Description	and calibration data logical structure of sethis transformation at This task may be pethe model will be based. The task may also be generation of Measurit is possible (but not data only.	Create (manually or by generator) a functional model of measurement and calibration data on an ECU. Such a model may be derived from the logical structure of software components, ports etc. but the rules for this transformation are not standardized. This task may be performed before the RTE code is generated. Then the model will be based on the data defined in the ECU Flat Map. The task may also be performed at the same time as or after the generation of Measurement and Calibration Support Data. In this case it is possible (but not mandatory) to base the model on these support data only.			
Deletion Tons	feature) or another to	The task may be supported by the RTE generator (not a standardized feature) or another tool.			
Relation Type	Related Element	Mul.	Note		
Performed by	Calibration Engi- neer	01			
Performed by	ECU Integrator	01			
Consumes	ECU Extract	01	The ECU Flat Map can be used to define references to variables and parameters which are later visible in A2L. Furthermore, the ECU Extract can be used to find the relevant software components.		
Consumes	RTE Measurement and Calibration Support Data	01	Used if the MC Function Model shall refer to McDataInstances allocated by the RTE.		
Consumes	Delivered Atomic Software Compo- nents	0*	The component model may be used to derive an MC Function Model.		
Consumes	Local Measure- ment and Cali- bration Support Data	0*	Used if the MC Function Model shall refer to McDataInstances allocated by BSW modules without RTE support.		
Produces	MC Function Model	1			

Table 3.275: Create MC Function Model



3.6.1.23 Generate RTE

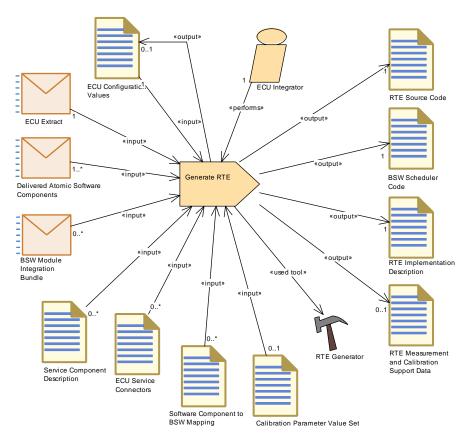


Figure 3.142: Generate RTE



Task Definition	Generate RTE					
Package	AUTOSAR Root::M2	::Metho	dology::Methodology Library::Ecu::Tasks			
Brief Description	Generate the RTE a	nd seve	ral further artifacts.			
Description	I	Generate the RTE and several further artifacts from the input XML descriptions in the scope of a given ECU:				
	RTE Core Sor	Core Source Code				
	BSW Schedul	BSW Scheduler CodeRTE Implementation Description				
	RTE Impleme					
	RTE Measure	ment ar	nd Calibration Support Data			
	configuration, espectused to pre-configuration the integrator in settion assumed to be completed build. A Predefined configuration, see tapoints at code generation assumed to be configuration.	ially for a parts of the parts	ck can also write into the ECU the configuration of the OS. This mode is of the ECU configuration. It shall support the configuration in an iterative way. The ECU configuration is not changed but his mode shall be used before the final in the input data (referred in the EcuC igure EcuC) can be used to bind variation the. For variation points with latest binding this is mandatory. Unbound variation the generated code.			
Relation Type	Related Element	Mul.	Note			
Performed by	ECU Integrator	1	Note			
Consumes	ECU Configuration Values	1	Meth.bindingTime = SystemDesignTime			
Consumes	ECU Extract	1				
		'	Find the VFB description of all Atomic Software Components on this ECU and the relevant parts of the system description.			
			Software Components on this ECU and the relevant parts of the system description. The ECU Flat Map is also an input. Meth.bindingTime = SystemDesignTime			
Consumes	Delivered Atomic Software Compo- nents	1*	Software Components on this ECU and the relevant parts of the system description. The ECU Flat Map is also an input.			
Consumes	Software Compo-		Software Components on this ECU and the relevant parts of the system description. The ECU Flat Map is also an input. Meth.bindingTime = SystemDesignTime Required input: • References to all component implementation descriptions on			
Consumes	Software Compo-		Software Components on this ECU and the relevant parts of the system description. The ECU Flat Map is also an input. Meth.bindingTime = SystemDesignTime Required input: References to all component implementation descriptions on this ECU SwcInternalBehavior which was used in the contract phase of the			
Consumes	Software Compo-		Software Components on this ECU and the relevant parts of the system description. The ECU Flat Map is also an input. Meth.bindingTime = SystemDesignTime Required input: References to all component implementation descriptions on this ECU SwcInternalBehavior which was used in the contract phase of the software components on this ECU (optional) Software Component to			
Consumes	Software Compo-		Software Components on this ECU and the relevant parts of the system description. The ECU Flat Map is also an input. Meth.bindingTime = SystemDesignTime Required input: References to all component implementation descriptions on this ECU SwcInternalBehavior which was used in the contract phase of the software components on this ECU (optional) Software Component to BSW Mapping			



Relation Type	Related Element	Mul.	Note
Consumes	BSW Module Integration Bundle	0*	Input for BSW scheduling, BSW mode and trigger declaration, BSW exclusive areas, BSW calibration parameters that need RTE support (for software emulation). Optionally, a Build Action Manifest maybe be used to control the generator steps. Meth.bindingTime = SystemDesignTime
Consumes	ECU Service Connectors	0*	Meth.bindingTime = SystemDesignTime
Consumes	Service Component Description	0*	Meth.bindingTime = SystemDesignTime
Consumes	Software Component to BSW Mapping	0*	This input is explicitly stated because the mapping may be created during ECU integration and thus is not necessarily part of the Delivered Atomic Software Components. Meth.bindingTime = SystemDesignTime
Produces	BSW Scheduler Code	1	Meth.bindingTime = CodeGenerationTime
Produces	RTE Implementa- tion Description	1	Meth.bindingTime = CodeGenerationTime
Produces	RTE Source Code	1	Meth.bindingTime = CodeGenerationTime
Produces	ECU Configuration Values	01	Optional output for the configuration of the OS. Meth.bindingTime = CodeGenerationTime
Produces	RTE Measurement and Calibration Support Data	01	Meth.bindingTime = CodeGenerationTime
Used tool	RTE Generator	1	

Table 3.276: Generate RTE



3.6.1.24 Generate Scheduler

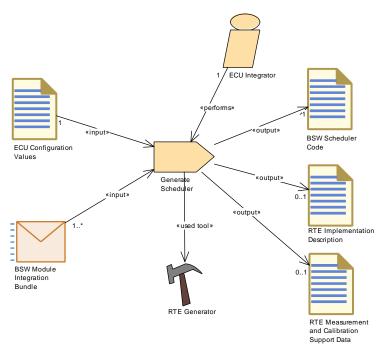


Figure 3.143: Generate Scheduler

Task Definition	Generate Scheduler			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Generate the BSW Scheduler			
Description	Optional task of the RTE generator which only produces the code of the BSW Scheduler and related artifacts. Meth.bindingTime = CodeGenerationTime			
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	ECU Configuration Values	1	Configuration values for the BSW Scheduler (subset of RTE configuration). Meth.bindingTime = SystemDesignTime	
Consumes	BSW Module Integration Bundle	1*	Input for BSW scheduling, BSW mode and trigger declaration, BSW exclusive areas, BSW calibration parameters that need support for software emulation. Optionally, a Build Action Manifest maybe be used to control the generator steps. Meth.bindingTime = SystemDesignTime	
Produces	BSW Scheduler Code	1	Meth.bindingTime = CodeGenerationTime	



Relation Type	Related Element	Mul.	Note
Produces	RTE Implementation Description	01	Creates a subset of the RTE implementation description that contains only the description of data owned by the BSW Scheduler. Meth.bindingTime = CodeGenerationTime
Produces	RTE Measurement and Calibration Support Data	01	Creates a subset of the measurement & calibration support data related only to the data owned by the BSW Scheduler. Meth.bindingTime = CodeGenerationTime
Used tool	RTE Generator	1	

Table 3.277: Generate Scheduler

3.6.1.25 Generate OS

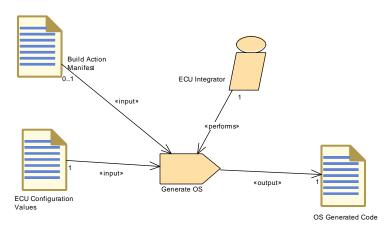


Figure 3.144: Generate OS

Task Definition	Generate OS			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Generate the OS Ge	nerated	Code files	
Description	Generate the OS Generated Code files using the OS configuration values from the ECU Configuration . Meth.bindingTime = CodeGenerationTime			
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	ECU Configuration Values	1	Meth.bindingTime = SystemDesignTime	
Consumes	Build Action Mani- fest	01	The task may be controlled by a Build Action Manifest.	
Produces	OS Generated Code	1	Meth.bindingTime = CodeGenerationTime	

Table 3.278: Generate OS



3.6.1.26 Generate RTE Prebuild Dataset

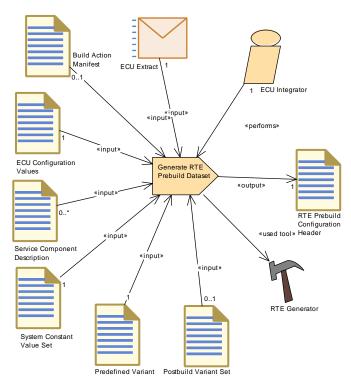


Figure 3.145: Generate RTE Prebuild Dataset

Task Definition	Generate RTE Preb	Generate RTE Prebuild Dataset			
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Prebuild Data Set Generation Phase for the RTE: It binds all variations which are later than code generation time				
Description	which are later than output is a configura The actually support	Prebuild Data Set Generation Phase for the RTE: It binds all variations which are later than code generation time but before build time. The output is a configuration header which is used for the build. The actually supported variant are defined by the PredefinedVariant referred in the EcuC configuration (see task Configure EcuC).			
	Meth.bindingTime =	PreCon	ppileTime		
Relation Type	Related Element	Mul.	Note		
Performed by	ECU Integrator	1			
Consumes	ECU Configuration Values	1	find the Predefiined Variant to be used Meth.bindingTime = CodeGenerationTime		
Consumes	ECU Extract	1	Meth.bindingTime = CodeGenerationTime		
Consumes	Predefined Variant	1			
Consumes	System Constant Value Set	1			
Consumes	Build Action Mani- fest	01	The task may be controlled by a Build Action Manifest.		



Relation Type	Related Element	Mul.	Note
Consumes	Postbuild Variant Set	01	
Consumes	Service Component Description	0*	Meth.bindingTime = CodeGenerationTime
Produces	RTE Prebuild Configuration Header	1	Meth.bindingTime = PreCompileTime
Used tool	RTE Generator	1	

Table 3.279: Generate RTE Prebuild Dataset

3.6.1.27 Compile ECU Source Code

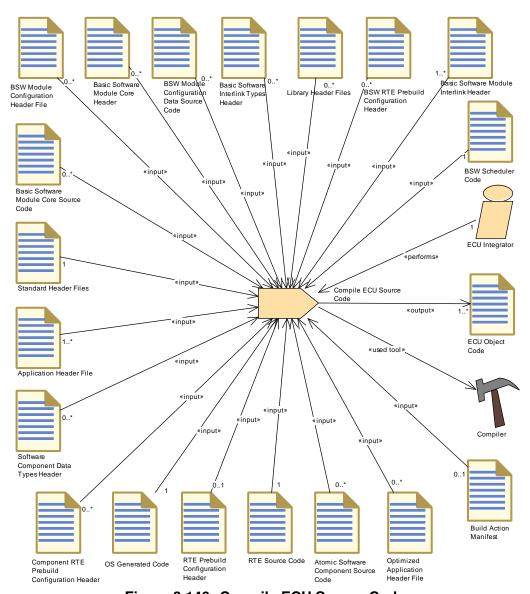


Figure 3.146: Compile ECU Source Code



Task Definition	Compile ECU Sour	ce Code	9		
Package	AUTOSAR Root::M2	2::Metho	dology::Methodology Library::Ecu::Tasks		
Brief Description	Compile Source Cod	de for ar	n ECU		
Description	Compile all the source code required for ECU integration, i.e. all source code except the code which is delivered as object code. Meth.bindingTime = CompileTime				
Relation Type	Related Element	Mul.	Note		
Performed by		1 1	Note		
Consumes	BSW Scheduler Code	1	Meth.bindingTime = CodeGenerationTime		
Consumes	OS Generated Code	1	Meth.bindingTime = CodeGenerationTime		
Consumes	RTE Source Code	1	Meth.bindingTime = CodeGenerationTime		
Consumes	Standard Header Files	1	Meth.bindingTime = CodeGenerationTime		
Consumes	Application Header File	1*	Meth.bindingTime = CodeGenerationTime		
Consumes	Basic Software Module Interlink Header	1*	Meth.bindingTime = CodeGenerationTime		
Consumes	Build Action Mani- fest	01	The task may be controlled by a Build Action Manifest.		
Consumes	RTE Prebuild Configuration Header	01	Meth.bindingTime = PreCompileTime		
Consumes	Atomic Soft- ware Component Source Code	0*	Meth.bindingTime = CodeGenerationTime		
Consumes	BSW Module Configuration Data Source Code	0*	Meth.bindingTime = CodeGenerationTime		
Consumes	BSW Module Configuration Header File	0*	Meth.bindingTime = CodeGenerationTime		
Consumes	BSW RTE Pre- build Configuration Header	0*	Meth.bindingTime = PreCompileTime		
Consumes	Basic Software Interlink Types Header	0*	Meth.bindingTime = CodeGenerationTime		
Consumes	Basic Software Module Core Header	0*	Meth.bindingTime = CodeGenerationTime		
Consumes	Basic Software Module Core Source Code	0*	Meth.bindingTime = CodeGenerationTime		
Consumes	Component RTE Prebuild Configu- ration Header	0*	Meth.bindingTime = CodeGenerationTime		



Relation Type	Related Element	Mul.	Note
Consumes	Library Header Files	0*	Meth.bindingTime = CodeGenerationTime
Consumes	Optimized Application Header File	0*	Meth.bindingTime = CodeGenerationTime
Consumes	Software Component Data Types Header	0*	Meth.bindingTime = CodeGenerationTime
Produces	ECU Object Code	1*	Meth.bindingTime = CompileTime
Used tool	Compiler	1	

Table 3.280: Compile ECU Source Code

3.6.1.28 Generate ECU Executable

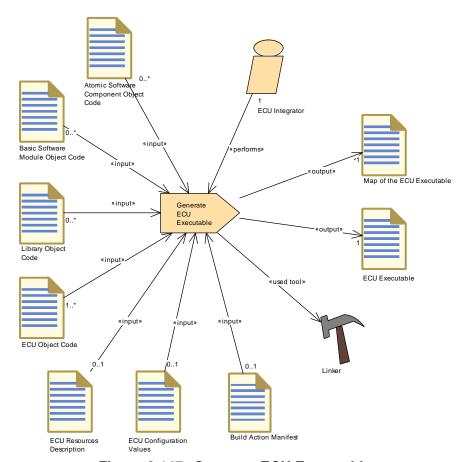


Figure 3.147: Generate ECU Executable



Task Definition	Generate ECU Exec	cutable			
Package	AUTOSAR Root::M2	::Metho	odology::Methodology Library::Ecu::Tasks		
Brief Description	Generate the execut linker configuration.	able cod	de of the ECU out of the object files and		
Description	development practice is more than a simple Configuration Descrice configured executable needed as input to the contains the informal implementations are	The steps to generate the code for an ECU resemble today's development practice. However, it is important to note that this activity is more than a simple linker step. Information from the ECU Configuration Description might be used to generate specially configured executable software. The ECU Configuration Description is needed as input to the Generate Executable activity, because it contains the information which BSW modules and SWC implementations are used to create the executable and further information about the memory mapping.			
		The output of this activity is the ECU Executable and the Map of Executable (which is typically the log file from linking the ECU Executable).			
	by AUTOSAR, there purposes. Note that overall picture, howe settings, make file et configuration before	The detailed input and output formats of this task are not standardized by AUTOSAR, therefore this task is only included for informative purposes. Note that ECU Configuration is shown as an input to get the overall picture, however in practice more specific artifacts (e.g. linker settings, make file etc.) will have to be generated out of the ECU configuration before the actual software build can be started. Especially, the information about the mapping of the physical memory sections to the memory section used in the software, which is described in the so-called EcuC parameter values, is needed in order to generate the linker settings.			
	sections to the mem- described in the so- to generate the linke	ory sect called E r setting	tion used in the software, which is cuC parameter values, is needed in order gs.		
Relation Type	sections to the mem- described in the so- to generate the linke Meth.bindingTime =	ory sect called E r setting LinkTim	tion used in the software, which is cuC parameter values, is needed in order gs.		
Relation Type Performed by	sections to the mem- described in the so- to generate the linke Meth.bindingTime = Related Element	ory sect called Ed r setting LinkTim <i>Mul.</i>	tion used in the software, which is cuC parameter values, is needed in order gs.		
Relation Type Performed by Consumes	sections to the mem- described in the so- to generate the linke Meth.bindingTime =	ory sect called E r setting LinkTim	tion used in the software, which is cuC parameter values, is needed in order gs.		
Performed by	sections to the mem- described in the so- to generate the linke Meth.bindingTime = Related Element ECU Integrator	ory sect called Ed r setting LinkTim <i>Mul.</i> 1	tion used in the software, which is cuC parameter values, is needed in order gs. ne Note from generated or delivered source code		
Performed by Consumes	sections to the mem- described in the so-co to generate the linke Meth.bindingTime = Related Element ECU Integrator ECU Object Code Build Action Manifest ECU Configuration Values	ory sect called Ed r setting LinkTim Mul. 1	tion used in the software, which is cuC parameter values, is needed in order gs. ne Note from generated or delivered source code Meth.bindingTime = CompileTime The task may be controlled by a Build Action Manifest. may be used to set up build environment Meth.bindingTime = CompileTime		
Performed by Consumes Consumes	sections to the mem- described in the so- to generate the linke Meth.bindingTime = Related Element ECU Integrator ECU Object Code Build Action Mani- fest ECU Configuration Values ECU Resources Description	ory sectocalled Edra setting LinkTim Mul. 1* 01 01	from generated or delivered source code Meth.bindingTime = CompileTime The task may be controlled by a Build Action Manifest. may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime		
Performed by Consumes Consumes Consumes	sections to the mem- described in the so- to generate the linke Meth.bindingTime = Related Element ECU Integrator ECU Object Code Build Action Mani- fest ECU Configuration Values ECU Resources Description Atomic Software Component Object Code	ory sectoral sections of the s	tion used in the software, which is cuC parameter values, is needed in order gs. ne Note from generated or delivered source code Meth.bindingTime = CompileTime The task may be controlled by a Build Action Manifest. may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment		
Performed by Consumes Consumes Consumes Consumes	sections to the mem- described in the so-coto generate the linke Meth.bindingTime = Related Element ECU Integrator ECU Object Code Build Action Manifest ECU Configuration Values ECU Resources Description Atomic Software Component Object	ory sectocalled Edra setting LinkTim Mul. 1* 01 01	from generated or delivered source code Meth.bindingTime = CompileTime The task may be controlled by a Build Action Manifest. may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime		
Performed by Consumes Consumes Consumes Consumes Consumes	sections to the mem- described in the so-c to generate the linke Meth.bindingTime = Related Element ECU Integrator ECU Object Code Build Action Manifest ECU Configuration Values ECU Resources Description Atomic Software Component Object Code Basic Software Module Object Code Library Object Code	ory sectoral sections of the section of the sections of the se	from generated or delivered source code Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime Meth.bindingTime = CompileTime for object code delivery Meth.bindingTime = CompileTime for object code delivery Meth.bindingTime = CompileTime		
Performed by Consumes Consumes Consumes Consumes Consumes Consumes Consumes	sections to the mem- described in the so-c to generate the linke Meth.bindingTime = Related Element ECU Integrator ECU Object Code Build Action Manifest ECU Configuration Values ECU Resources Description Atomic Software Component Object Code Basic Software Module Object Code Library Object	ory sectoral sections of the section of the sections of the se	tion used in the software, which is cuC parameter values, is needed in order gs. The Note from generated or delivered source code Meth.bindingTime = CompileTime The task may be controlled by a Build Action Manifest. may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime Meth.bindingTime = CompileTime Meth.bindingTime = CompileTime for object code delivery Meth.bindingTime = CompileTime		
Performed by Consumes Consumes Consumes Consumes Consumes Consumes Consumes Consumes	sections to the mem- described in the so-c to generate the linke Meth.bindingTime = Related Element ECU Integrator ECU Object Code Build Action Manifest ECU Configuration Values ECU Resources Description Atomic Software Component Object Code Basic Software Module Object Code Library Object Code	ory sectoral sections of the section of the sections of the se	from generated or delivered source code Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime may be used to set up build environment Meth.bindingTime = CompileTime Meth.bindingTime = CompileTime for object code delivery Meth.bindingTime = CompileTime for object code delivery Meth.bindingTime = CompileTime		



Relation Type	Related Element	Mul.	Note
Predecessor	Encapsulate SW-C	1	
Predecessor	Generate BSW and RTE	1	

Table 3.281: Generate ECU Executable

3.6.1.29 Generate RTE Postbuild Dataset

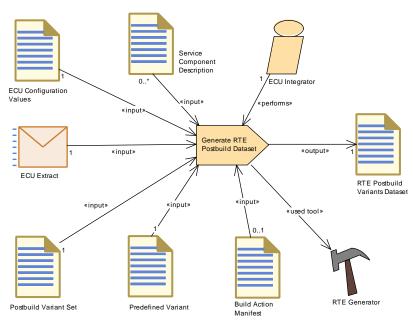


Figure 3.148: Generate RTE Postbuild Dataset

Task Definition	Generate RTE Post	Generate RTE Postbuild Dataset			
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description	Postbuild Data Set Generation Phase for the RTE: It binds all variations which are for postbuild time.				
Description	are for postbuild time build an image sepa The supported post-Predefined Variants r configuration. At run selection is done via The actual value for initialization is define	Data Set Generation Phase for the RTE: It binds all variations which are for postbuild time. The output is a data set which can be used to build an image separately from the main code. The supported post-build variants are defined by the Predefined Variants referred in the post-build section of the RTE configuration. At runtime, only one of those variants can be active. This selection is done via the initialization structure for the BSW Scheduler. The actual value for this iniialization structure used for runtime initialization is defined by the configuration of the ECU State Manager.			
Deletien Tone	Meth.bindingTime = PostBuild				
Relation Type	Related Element	Related Element Mul. Note			
Performed by	ECU Integrator	1			
Consumes	ECU Configuration Values	1	Meth.bindingTime = LinkTime		



Relation Type	Related Element	Mul.	Note
Consumes	ECU Extract	1	Meth.bindingTime = LinkTime
Consumes	Postbuild Variant Set	1	
Consumes	Predefined Variant	1	
Consumes	Build Action Manifest	01	The task may be controlled by a Build Action Manifest.
Consumes	Service Component Description	0*	Meth.bindingTime = LinkTime
Produces	RTE Postbuild Variants Dataset	1	Meth.bindingTime = PostBuild
Used tool	RTE Generator	1	

Table 3.282: Generate RTE Postbuild Dataset

3.6.1.30 Generate A2L

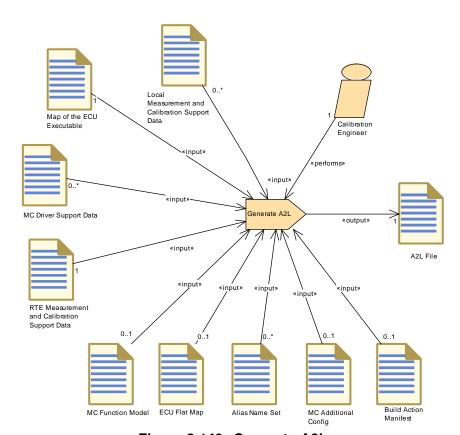


Figure 3.149: Generate A2L



Task Definition	Generate A2L			
Package	AUTOSAR Root::M2	2::Metho	dology::Methodology Library::Ecu::Tasks	
Brief Description	Generate the A2L Fi	le for an	ECU.	
Description	given by RTE Measu	The A2L File created by this task is the final representation of the data given by RTE Measurement and Calibration Support Data and Local Measurement and Calibration Support Data.		
	data location found i it replaces identifiers Finally is completes software (MC Driver	The main purpose of this task is to replace all symbolic information on data location found in these input data by actual addresses. Optionally, it replaces identifiers by alias names given in Alias Name Set(s). Finally is completes the A2L file with configuration from ECU driver software (MC Driver Support Data) and configuration not determined by AUTOSAR artifacts (MC Additional Configuration).		
	of the use cases. The shown as input in or that one needs addited	This task is not part of AUTOSAR, it is only included for completeness of the use cases. The Map of the ECU Executable (linker map file) is shown as input in order to illustrate the principle use case only. Note that one needs additional information, like the .ELF or .COFF file, to resolve addresses of elements of composite C-variables.		
Relation Type	Related Element	Mul.	Note	
Performed by	Calibration Engi- neer	1		
Consumes	Map of the ECU Executable	1		
Consumes	RTE Measurement and Calibration Support Data	1		
Consumes	Build Action Mani- fest	01	The task may be controlled by a Build Action Manifest.	
Consumes	ECU Flat Map	01	The ECU Flat Map is needed in case the A2L generator has to process an MC Function Model that relates to data in the ECU Flat Map.	
Consumes	MC Additional Config	01		
Consumes	MC Function Model	01	This input is needed if the keyword FUNCTION shall be supported in the generated A2L.	
Consumes	Alias Name Set	0*		
Consumes	Local Measure- ment and Cali- bration Support Data	0*		
Consumes	MC Driver Support Data	0*		
Produces	A2L File	1	Meth.bindingTime = CodeGenerationTime	

Table 3.283: Generate A2L



3.6.1.31 Measure Resources

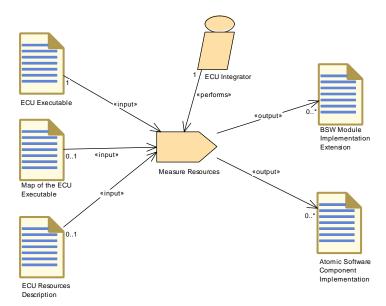


Figure 3.150: Measure Resources

Task Definition	Measure Resource	s		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description		Measure the resource consumption and update the implementation section of the Application SWC and BSW Module Descriptions.		
Description			umption and update the implementation VC and BSW Module Descriptions.	
Relation Type	Related Element	Mul.	Note	
Performed by	ECU Integrator	1		
Consumes	ECU Executable	1		
Consumes	ECU Resources Description	01		
Consumes	Map of the ECU Executable	01		
Produces	Atomic Software Component Imple- mentation	0*	Add extensions to the Implementation Description. Meth.bindingTime = PostBuild	
Produces	BSW Module Implementation Extension	0*	Meth.bindingTime = PostBuild	

Table 3.284: Measure Resources



3.6.1.32 Refine Rapid Prototyping Scenario

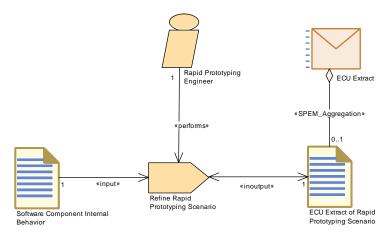


Figure 3.151: Refine Rapid Prototyping Scenario

Task Definition	Refine Rapid Proto	Refine Rapid Prototyping Scenario			
Package	AUTOSAR Root::M2	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Tasks			
Brief Description					
Description			formation in the Rapid Prototyping ooks or hook implementation decisions.		
Relation Type	Related Element	Related Element Mul. Note			
Performed by	Rapid Prototyping Engineer	1			
Consumes	Software Component Internal Behavior	1			
In/out	ECU Extract of Rapid Prototyping Scenario	1			
Predecessor	Generate ECU Extract	1			

Table 3.285: Refine Rapid Prototyping Scenario



3.6.2 Work Products

3.6.2.1 BSW Module Integration Bundle

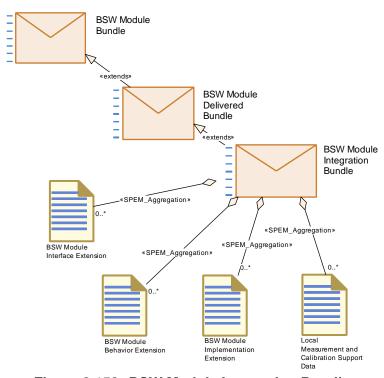


Figure 3.152: BSW Module Integration Bundle

Deliverable	BSW Module Integr	ration B	undle	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products			
Brief Description				
Description	Contains the BSW a during integration.	rtifacts f	for one or more BSW modules completed	
Kind	Delivered			
Extends	BSW Module Delivered Bundle			
Relation Type	Related Element	Related Element Mul. Note		
Aggregates	BSW Module Behavior Extension	0*		
Aggregates	BSW Module Implementation Extension	0*		
Aggregates	BSW Module Inter- face Extension	0*		
Aggregates	Local Measure- ment and Cali- bration Support Data	0*		



Relation Type	Related Element	Mul.	Note
Consumed by	Generate Sched- uler	1*	Input for BSW scheduling, BSW mode and trigger declaration, BSW exclusive areas, BSW calibration parameters that need support for software emulation.
			Optionally, a Build Action Manifest maybe be used to control the generator steps. Meth.bindingTime = SystemDesignTime
Consumed by	Generate RTE	0*	Input for BSW scheduling, BSW mode and trigger declaration, BSW exclusive areas, BSW calibration parameters that need RTE support (for software emulation).
			Optionally, a Build Action Manifest maybe be used to control the generator steps. Meth.bindingTime = SystemDesignTime

Table 3.286: BSW Module Integration Bundle

3.6.2.2 ECU Software Delivered




Figure 3.153: ECU Software Delivered



Deliverable	ECU Software Deliv	/ered		
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	All the work products	s that for	rm the deliverable of an AUTOSAR ECU.	
Description	All the work products software build.	All the work products that form the deliverable of an AUTOSAR ECU		
	consists of several p	ECU in this context means processor, so if an electronic control unit consists of several processors, one "ECU Software Delivered" will be needed for each processor. Note that the detailed format for all parts of this deliverable is not defined by AUTOSAR		
Kind	Delivered			
Relation Type	Related Element	Mul.	Note	
Aggregates	ECU Executable	1*		
Aggregates	A2L File	0*		
Aggregates	BSW Module Configuration Data Loadable to ECU Memory	0*		
Produced by	Integrate Software for ECU	1		

Table 3.287: ECU Software Delivered

3.6.2.3 Service Component Description

Artifact	Service Componen	Service Component Description		
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	I	Describes the RTE relevant part of an AUTOSAR Service on a given ECU in form of a ServcieComponentType with all its ports and an internal behavior.		
Description	ECU in form of a Sel internal behavior. Th configuration proces	Describes the RTE relevant part of an AUTOSAR Service on a given ECU in form of a ServiceComponentType with all its ports and an internal behavior. This artifact must be generated during the ECU configuration process, latest before the RTE is generated. It depends on the needs of the software components for this AUTOSAR Service.		
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Produced by	Create Service Component	1	Meth.bindingTime = SystemDesignTime	
Consumed by	Connect Service Component	1	Required in order to define the connector links to the ports on the BSW side.	



Relation Type	Related Element	Mul.	Note
Consumed by	Configure NvM	0*	The configuration of diagnostics, especially of the DEM, typically leads to the definition of additional data to be stored in NvM. One possibility to handle this is to create ServiceNeeds on the level ServiceComponentType which is then taken into account for the configuration of the NvM.
Consumed by	Configure RTE	0*	The Internal Behavior of Service Components contributes to the RTE configuration.
Consumed by	Generate RTE	0*	Meth.bindingTime = SystemDesignTime
Consumed by	Generate RTE Postbuild Dataset	0*	Meth.bindingTime = LinkTime
Consumed by	Generate RTE Prebuild Dataset	0*	Meth.bindingTime = CodeGenerationTime
Use meta model element	ServiceSwCompo- nentType	1	
Use meta model element	SwcInternalBehav- ior	1	

Table 3.288: Service Component Description

3.6.2.4 ECU Service Connectors

Artifact	ECU Service Conne	ectors	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	l e		e Components which complete the tion predefined in the ECU extract.
Description	The assembly connectors to the Service Components which complete the Software Composition predefined in the ECU extract. These connectores are added during ECU integration as a separate artifact to the already defined composition of Atomic Software Components.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Produced by	Connect Service Component	1*	Meth.bindingTime = SystemDesignTime
Consumed by	Define ECU Timing	1*	
Consumed by	Generate RTE	0*	Meth.bindingTime = SystemDesignTime
Use meta model element	AssemblySw Connector	1	

Table 3.289: ECU Service Connectors

3.6.2.5 **ECU Timing**



Artifact	ECU Timing		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	TimingDescription a	nd Timir	ngConstraints for a concrete ECU
Description	TimingDescription and TimingConstraints defined for a concrete ECU taking the ECU configuration and the ECU Software Composition (including their implementation) into account.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Produced by	Define ECU Timing	1	Meth.bindingTime = SystemDesignTime
Consumed by	Configure OS	01	
Consumed by	Configure RTE	01	
Consumed by	Configure Watch- dog Manager	01	
Consumed by	Create Service Component	01	Additional information for fine tuning configuration decisions.
Use meta model element	EcuTiming	1	

Table 3.290: ECU Timing

3.6.2.6 BSW Module Interface Extension

Artifact	BSW Module Interf	ace Ext	ension
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description			
Description	Additions to the BSW Module on the interface level during integration. It is used for example to add Basic Software Module Entries in response to the ECU configuration, for example callback declarations.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module Integration Bundle	0*	
Produced by	Generate BS W Configuration Code	01	
Use meta model element	BswModuleDe- scription	1	
Use meta model element	BswModuleEntry	1	

Table 3.291: BSW Module Interface Extension

3.6.2.7 BSW Module Behavior Extension



Artifact	BSW Module Behavior Extension		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description			
Description	Additions to the BSW Module on the behavior level during integration. It can for example be used to add local data declaration (constantMemory, staticMemory, perInstanceMemory) for debug or calibration purposes in response to configuration parameters.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module Integration Bundle	0*	
Produced by	Generate BS W Configuration Code	01	
Consumed by	Generate Local M C Data Support	01	Meth.bindingTime = SystemDesignTime
Use meta model element	BswInternalBehav- ior	1	

Table 3.292: BSW Module Behavior Extension

3.6.2.8 BSW Module Implementation Extension

Artifact	BSW Module Imple	mentati	on Extension
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description			
Description	Additions to the BSW Module on the implementation level during integration. It is used for example to add information on resource consumption.		
Kind	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note
Aggregated by	BSW Module Integration Bundle	0*	
Produced by	Generate BS W Configuration Code	01	
Produced by	Measure Re- sources	0*	Meth.bindingTime = PostBuild
Use meta model element	BswImplementa- tion	1	

Table 3.293: BSW Module Implementation Extension

3.6.2.9 ECU Configuration Values



Artifact	ECU Configuration	ECU Configuration Values		
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	The collection of all	configur	ation values for an ECU.	
Description	element which come	First of all, the ECU Configuration Values contain a link to the System element which comes with the ECU Extract thus it can be used as a root element for integration on this ECU. Furtheron, it contains a collection of all configuration values for an ECU, which is gradually filled. Starting with the root element EcucValueCollection it contains the actual configuration settings EcucModuleConfigurationValues for each module including the RTE. Note that due to their strong interrelation, these parts are not considered as separate artifacts in the use cases for ECU integration.		
	ECU, which is gradu EcucValueCollection EcucModuleConfigu Note that due to thei			
	EcuC-configuration: relevant for the whole need to know the un addition to the configuration and the contains a link and the adheres. This parames Standardized ECU Covendor specific external contains a link and the contain	A special set of configuration values is the so-called EcuC-configuration: It contains the configuration values which are relevant for the whole ECU. Tools that interpret the configuration values need to know the underlying parameter definition. Therefore, in addition to the configuration values, each EcucValueCollection contains a link and the version of the parameter definition to which it adheres. This parameter definition is either part of the AUTOSAR Standardized ECU Configuration Parameter Definition or, in case of vendor specific extensions, is given by the artifact Basic Software Module Vendor-Specific Configuration Parameter Definition.		
Kind	AUTOSAR XML	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note	
Draduood by	0 6			
Produced by	Configure Memmap Allocation	1	MemMapAllocation: Meth.bindingTime = SystemDesignTime	
Produced by	Memmap Allo-	1		
Produced by	Memmap Allocation Create Service		Meth.bindingTime = SystemDesignTime Enter links to the created SwComponentPrototypes.	
Produced by Produced by	Memmap Allocation Create Service Component Generate Base	1	Meth.bindingTime = SystemDesignTime Enter links to the created SwComponentPrototypes. Meth.bindingTime = SystemDesignTime	
•	Memmap Allocation Create Service Component Generate Base Ecu Configuration Prepare ECU Con-	1	Meth.bindingTime = SystemDesignTime Enter links to the created SwComponentPrototypes. Meth.bindingTime = SystemDesignTime	
Produced by Produced by Produced by	Memmap Allocation Create Service Component Generate Base Ecu Configuration Prepare ECU Configuration	1 1	Meth.bindingTime = SystemDesignTime Enter links to the created SwComponentPrototypes. Meth.bindingTime = SystemDesignTime Meth.bindingTime = SystemDesignTime Optional output for the configuration of the OS. Meth.bindingTime =	
Produced by Produced by Produced by Produced by In/out	Memmap Allocation Create Service Component Generate Base Ecu Configuration Prepare ECU Configuration Generate RTE Configure BSW	1 1 01	Meth.bindingTime = SystemDesignTime Enter links to the created SwComponentPrototypes. Meth.bindingTime = SystemDesignTime Meth.bindingTime = SystemDesignTime Optional output for the configuration of the OS. Meth.bindingTime =	
Produced by Produced by Produced by Produced by In/out In/out	Memmap Allocation Create Service Component Generate Base Ecu Configuration Prepare ECU Configuration Generate RTE Configure BSW and RTE	1 1 01	Meth.bindingTime = SystemDesignTime Enter links to the created SwComponentPrototypes. Meth.bindingTime = SystemDesignTime Meth.bindingTime = SystemDesignTime Optional output for the configuration of the OS. Meth.bindingTime =	
Produced by Produced by Produced by Produced by In/out In/out In/out	Memmap Allocation Create Service Component Generate Base Ecu Configuration Prepare ECU Configuration Generate RTE Configure BSW and RTE Configure Com	1 1 01	Meth.bindingTime = SystemDesignTime Enter links to the created SwComponentPrototypes. Meth.bindingTime = SystemDesignTime Meth.bindingTime = SystemDesignTime Optional output for the configuration of the OS. Meth.bindingTime =	
Produced by Produced by Produced by Produced by In/out In/out In/out In/out	Memmap Allocation Create Service Component Generate Base Ecu Configuration Prepare ECU Configuration Generate RTE Configure BSW and RTE Configure Com Configure Debug Configure Diag-	1 1 01	Meth.bindingTime = SystemDesignTime Enter links to the created SwComponentPrototypes. Meth.bindingTime = SystemDesignTime Meth.bindingTime = SystemDesignTime Optional output for the configuration of the OS. Meth.bindingTime = CodeGenerationTime Configuration Values for DEM, DCM,	
Produced by Produced by Produced by Produced by	Memmap Allocation Create Service Component Generate Base Ecu Configuration Prepare ECU Configuration Generate RTE Configure BSW and RTE Configure Com Configure Debug Configure Diagnostics	1 1 01	Meth.bindingTime = SystemDesignTime Enter links to the created SwComponentPrototypes. Meth.bindingTime = SystemDesignTime Meth.bindingTime = SystemDesignTime Optional output for the configuration of the OS. Meth.bindingTime = CodeGenerationTime Configuration Values for DEM, DCM,	



Relation Type	Related Element	Mul.	Note
In/out	Configure Mode Management	1	
In/out	Configure NvM	1	
In/out	Configure OS	1	
In/out	Configure RTE	1	
In/out	Configure Transformer	1	
In/out	Configure Watch- dog Manager	1	
In/out	Generate Updated ECU Configuration	1	The task "Generate Updated ECU Configuration" consumes the initial ECU configuration values and produces the updated ECU configuration values.
Consumed by	Define ECU Timing	1	
Consumed by	Generate BS W Configuration Code	1	
Consumed by	Generate BSW Memory Mapping Header	1	MemMapAllocation: Mapping of the abstract sections (SwAddressMethods for generic mapping resp. MemorySection Elements for specific mapping) to the compiler specific MemMapAddressingModes. Meth.bindingTime = SystemDesignTime
Consumed by	Generate BSW Postbuild Configu- ration Code	1	
Consumed by	Generate BSW Precompile Con- figuration Header	1	
Consumed by	Generate BSW Source Code	1	
Consumed by	Generate BSW and RTE	1	
Consumed by	Generate OS	1	Meth.bindingTime = SystemDesignTime
Consumed by	Generate RTE	1	Meth.bindingTime = SystemDesignTime
Consumed by	Generate RTE Postbuild Dataset	1	Meth.bindingTime = LinkTime
Consumed by	Generate RTE Prebuild Dataset	1	find the Predefiined Variant to be used Meth.bindingTime = CodeGenerationTime
Consumed by	Generate SWC Memory Mapping Header	1	MemMapAllocation: Mapipng of the abstract sections (SwAddressMethods for generic mapping resp. MemorySection Elements for specific mapping) to the compiler specific MemMapAddressingModes. Meth.bindingTime = SystemDesignTime



Relation Type	Related Element	Mul.	Note
Consumed by	Generate Sched- uler	1	Configuration values for the BSW Scheduler (subset of RTE configuration). Meth.bindingTime = SystemDesignTime
Consumed by	Create Service Component	01	The creation of Service Component details may depend on ECU configuration values, especially for the DCM.
Consumed by	Generate BSW Memory Mapping Header	01	moduleDescription: List of used BSW modules (EcucValueCollection.ecucValue.moduleDescription) Meth.bindingTime = SystemDesignTime
Consumed by	Generate Compiler Configuration	01	RteImplementationRef: Existence of SWCs could be identified by usage of the RTE ECU Configuration "RteSwComponentType.RteImplementationRef" Meth.bindingTime = SystemDesignTime
Consumed by	Generate Compiler Configuration	01	ModuleDescription: List of used BSW modules (EcucValueCollection.ecucValue.moduleDescription) Meth.bindingTime = SystemDesignTime
Consumed by	Generate ECU Ex- ecutable	01	may be used to set up build environment Meth.bindingTime = CompileTime
Consumed by	Generate SWC Memory Mapping Header	01	RteImplementationRef: Existence of SWCs could be identified by usage of the RTE ECU Configuration "RteSwComponentType.RteImplementationRef" Meth.bindingTime = SystemDesignTime
Use meta model element	EcucModuleCon- figurationValues	1	
Use meta model element	EcucValueCollection	1	

Table 3.294: ECU Configuration Values

3.6.2.10 RTE Implementation Description

Artifact	RTE Implementation Description			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products			
Brief Description	Implementation Description for the RTE, generated by the RTE generator.			
Description	Implementation Description for the RTE, generated by the RTE generator. Uses the format of BswImplementation. This artifact is required to provide information for other generators and the build process, namely debugging information, memory section. It aggregates also the support data for measurement and calibration, which is considered as a separate artifact.			
Kind	AUTOSAR XML			
Relation Type	Related Element Mul. Note			



Relation Type	Related Element	Mul.	Note
Produced by	Generate RTE	1	Meth.bindingTime = CodeGenerationTime
Produced by	Generate Sched- uler	01	Creates a subset of the RTE implementation description that contains only the description of data owned by the BSW Scheduler. Meth.bindingTime = CodeGenerationTime
Use meta model element	BswImplementa- tion	1	

Table 3.295: RTE Implementation Description

3.6.2.11 RTE Prebuild Configuration Header

Artifact	RTE Prebuild Confi	guratio	n Header		
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products			
Brief Description		RTE Prebuild Configuration Header File. It defines all variants for the RTE code which have to be bound later than code generation time but before build time.			
Description	variants for the RTE	RTE Prebuild Configuration Header File. It defines the setting of all variants for the RTE code (via macro code) which have to be bound later than code generation time but before build time.			
Kind	Bound Source Code	Bound Source Code			
Relation Type	Related Element	Related Element Mul. Note			
Produced by	Generate RTE Prebuild Dataset	1	Meth.bindingTime = PreCompileTime		
Consumed by	Compile ECU Source Code	01	Meth.bindingTime = PreCompileTime		

Table 3.296: RTE Prebuild Configuration Header

3.6.2.12 Calibration Parameter Value Set



Artifact	Calibration Parame	ter Valu	ie Set		
Package		2::Metho	dology::Methodology Library::Ecu::Work		
	Products				
Brief Description	Calibration Paramete	er Value	Setting		
Description	A set of calibration parameter values used to initialize the memory objects which implement calibration parameters. The values are specific for the software component instances in ECU scope. They will override any initial values defined for those parameters within the ECU Extract. The parameter values can be defined as ApplicationDataTypes or as ImplementationDataTypes which has several use cases. These two use cases are supported by the RTE generation phase:				
	 Parameter values defined as ImplementationDataTypes can be used as instance specific initialization for calibration parameters within components as soon as the respective ImplementationDataTypes are available (which must be the case for RTE generation anyhow). 				
	 Parameter values defined as ApplicationDataTypes can be used as instance specific initialization for calibration parameters which are only defined with ApplicationDataTypes. The next case is not modelled within AUTOSAR in detail: 				
	 Parameter values defined as ApplicationDataTypes can be used to exchange initial values with the component vendor not publishing the transformation algorithm between ApplicationDataTypes and ImplementationDataTypes 				
Kind	AUTOSAR XML				
Relation Type	Related Element	Mul.	Note		
Produced by	Provide RTE Calibration Dataset	1			
Consumed by	Generate RTE	01	Meth.bindingTime = SystemDesignTime		
Use meta model element	CalibrationParam- eterValueSet	1			

Table 3.297: Calibration Parameter Value Set

3.6.2.13 MC Function Model



Artifact	MC Function Mode				
Package	AUTOSAR Root::M2 Products	:::Metho	dology::Methodology Library::Ecu::Work		
Brief Description	A functional model to	A functional model to be used for A2L generation.			
Description	As set of nested McFunction elements to be used as input to generate A2L. Its purpose is to				
	assign calibra	tion para	ameters to a logical function		
	assign measu	rement	variables to a logical function		
	structure func	tions hie	erarchically		
Kind	It shall support the generation of the FUNCTION keyword and related elements defined in ASAM MCD-2 MC. An MC Function Model refers to the data descriptions in other AUTOSAR XML artifacts either via entries in the ECU Flat Map or via McDataInstances being part of Measurement and Calibration Support Data. AUTOSAR XML				
Relation Type	Related Element Mul. Note				
Produced by	Create MC Function Model	1			
Consumed by	Generate A2L	01	This input is needed if the keyword FUNCTION shall be supported in the generated A2L.		
Use meta model element	McFunction	1			

Table 3.298: MC Function Model

3.6.2.14 Local Measurement and Calibration Support Data



Artifact	Local Measuremen	t and C	alibration Support Data	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products			
Brief Description	Generated artifact, which supports the later generation of "A2L"-files for measurement and calibration data which are owned locally by a component or module.			
Description	Generated artifact which is used as an input for the later generation of "A2L"-files for measurement and calibration. It relates the measurment and calibration data listed in the ECU FlatMap to the C-variables used locally within a component or module (this is relevant only valid for those parameters and variables, which are not implemented by the RTE). In addition, it contains all configuration data which are relevant for the A2L generator (e.g. the access method to calibration data whithin a Complex Driver). This XML-artifact is linked via a (splitable) aggregation to the Implementation Description of the component or module, but it is considered as a separate artifact.			
Kind	AUTOSAR XML	AUTOSAR XML		
Relation Type	Related Element	Mul.	Note	
Aggregated by	BSW Module Integration Bundle	0*		
Produced by	Generate Local M C Data Support	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Create MC Function Model	0*	Used if the MC Function Model shall refer to McDataInstances allocated by BSW modules without RTE support.	
Consumed by	Generate A2L	0*		
Use meta model element	McSupportData	1		

Table 3.299: Local Measurement and Calibration Support Data

3.6.2.15 RTE Measurement and Calibration Support Data



Artifact	RTE Measurement	and Ca	libration Support Data	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products			
Brief Description	RTE generator output, which supports the later generation of "A2L"-files for the measurement and calibration data which are owned by the RTE.			
Description	RTE generator output, which is used as an input for the later generation of "A2L"-files for measurement and calibration. It relates the measurement and calibration data listed in the ECU FlatMap to the C-variables of the generated RTE code. For all these data it contains copies of the attributes which are relevant for A2L generation. In additions it contains all configuration data which are relevant for the A2L generator (namely the access method to calibration data which is supported by the RTE). This XML-artifact is linked via a (splitable) aggregation to the RTE Implementation Description, but is considered as a separate artifact. The most important attributes for each data instance are:			
		•	from the ECU Flat Map to be used as ay by the MC system.	
	 The category copied from the corresponding data type (ApplicationDataType if defined, otherwise ImplementationDataType) as far as applicable. 			
	 The symbol used in the programing language. It will be used to find out the actual memory address by the final generation tool with the help of linker generated information. 			
	 All aggregated and referred elements like Compute BaseType describing the data (with the exception Map) are completely copied from "upstream" informations. Therefore this artifact is a self-contained description be forwarded to the A2L generator without needing descriptions. 			
Kind	AUTOSAR XML			
Relation Type	Related Element	Mul.	Note	
Produced by	Generate RTE	01	Meth.bindingTime = CodeGenerationTime	
Produced by	Generate Sched- uler	01	Creates a subset of the measurement & calibration support data related only to the data owned by the BSW Scheduler. Meth.bindingTime = CodeGenerationTime	
Consumed by	Generate A2L	1		
Consumed by	Create MC Function Model	01	Used if the MC Function Model shall refer to McDataInstances allocated by the RTE.	
Use meta model element	McSupportData	1		

Table 3.300: RTE Measurement and Calibration Support Data



3.6.2.16 RTE Source Code

Artifact	RTE Source Code			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products			
Brief Description	Source code implem	entiing t	the RTE on a CPU.	
Description	Source code implem	enting t	he RTE on a CPU.	
	and configuration for code or source code standard definitions files: The RTE Head header files are not they appear with the AUTOSAR_SWS_RTE Apart from this, the frepresented as one RTE code can be part on the RTE vendor's	library of that are er File a explicitly RTE so TE.pdf. ille structioned softwar be possible.	ator can consist of both generated code code that may be supplied as either object configured and generated code reference defined in one of two standardized header and the Lifecycle Header File. These is shown in the methodology, as in all tasks burce code. For details refer to ture is not standardized, and therefore retifact in the methodology. In general, the d in several files. The partitioning depends the design and generation strategy. Sible to clearly identify code and header TE module.	
Kind	Source Code	Source Code		
Relation Type	Related Element	Related Element Mul. Note		
Produced by	Generate BSW and RTE	1		
Produced by	Generate RTE	1	Meth.bindingTime = CodeGenerationTime	
Consumed by	Compile ECU Source Code	1	Meth.bindingTime = CodeGenerationTime	

Table 3.301: RTE Source Code

3.6.2.17 BSW Scheduler Code

Artifact	BSW Scheduler Code		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	Generated Code imp	olementi	ng the BSW Scheduler.
Description	Generated Code implementing the BSW Scheduler. It can be source or macro code.		
Kind	Source Code		
Relation Type	Related Element	Mul.	Note
Produced by	Generate RTE	1	Meth.bindingTime = CodeGenerationTime
Produced by	Generate Sched- uler	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile ECU Source Code	1	Meth.bindingTime = CodeGenerationTime



Relation Type Related Element	Mul.	Note
-------------------------------	------	------

Table 3.302: BSW Scheduler Code

3.6.2.18 OS Generated Code

Artifact	OS Generated Code		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	OS configuration ger	nerated	code
Description	OS configuration generated code. OS configuration code are composed of header and C files. These will be compiled with the source code in the build process (see Compile Source Code).		
Kind	Source Code		
Relation Type	Related Element Mul. Note		
Produced by	Generate OS	1	Meth.bindingTime = CodeGenerationTime
Consumed by	Compile ECU Source Code	1	Meth.bindingTime = CodeGenerationTime

Table 3.303: OS Generated Code

3.6.2.19 RTE Postbuild Variants Dataset

Artifact	RTE Postbuild Varia	ants Da	taset	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products			
Brief Description	Generated code use	d to res	olve postbuild variants in the RTE.	
Description	Generated code use consists of a c-file ar		olve postbuild variants in the RTE. It ader file:	
	the declaration	The RTE generator must generate a Rte_PBCfg.c file containing the declarations and initializations of one or more RTE post build variants. Only one of these variants can be active at runtime.		
	 The RTE generator shall generate in the Rte_PBCfg.h file the SchM_ConfigType type declaration of the predefined post build variants data structure. This header file must be used by other RTE modules to resolve their runtime variabilities. 			
Kind	Bound Source Code	Bound Source Code		
Relation Type	Related Element Mul. Note			
Produced by	Generate RTE Postbuild Dataset	1	Meth.bindingTime = PostBuild	

Table 3.304: RTE Postbuild Variants Dataset

3.6.2.20 ECU Object Code



Artifact	ECU Object Code		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description			
Description	Object code file produced by compilation during ECU integration. To be distinguished from code files which are already delivered as object code for integration (see Basic Software Module Object Code or Atomic Software Component Object Code).		
Kind	Object Code		
Relation Type	Related Element	Mul.	Note
Produced by	Compile ECU Source Code	1*	Meth.bindingTime = CompileTime
Consumed by	Generate ECU Executable	1*	from generated or delivered source code Meth.bindingTime = CompileTime
Consumed by	Link ECU Code during Link Time Configuration	1*	

Table 3.305: ECU Object Code

3.6.2.21 ECU Executable

Artifact	ECU Executable		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	The executable image to download to an E		ining all the fully integrated software ready
Description	The executable image containing all the fully integrated software ready to download to an ECU. This work product and its format is not defined by AUTOSAR, it is only included for completeness of the use cases.		
Kind	Executable		
Relation Type	Related Element	Mul.	Note
Aggregated by	ECU Software De- livered	1*	
Produced by	Generate ECU Ex- ecutable	1	Meth.bindingTime = LinkTime
Produced by	Link ECU Code after Precompile Configuration	1	
Produced by	Link ECU Code during Link Time Configuration	1	
Consumed by	Measure Re- sources	1	

Table 3.306: ECU Executable

3.6.2.22 Map of the ECU Executable



Artifact	Map of the ECU Ex	Map of the ECU Executable		
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	Linker map file of the	excecu	utable.	
Description		Linker map file of the excecutable. This work product and its format is not defined by AUTOSAR, it is only included for completeness of the use cases.		
Kind	Text			
Relation Type	Related Element	Mul.	Note	
Produced by	Generate ECU Executable	1	Meth.bindingTime = LinkTime	
Consumed by	Generate A2L	1		
Consumed by	Measure Re- sources	01		

Table 3.307: Map of the ECU Executable

3.6.2.23 A2L File

Artifact	A2L File		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	Input file for measure	ment an	d calibration tools.
Description	Input file for measurement and calibration tools related to one ECU. This format is not in the scope of AUTOSAR, it is defined by the ASAM organization. The work product is only included for completeness of the use cases.		
Kind	Text		
Relation Type	Related Element	Mul.	Note
Aggregated by	ECU Software De- livered	0*	
Produced by	Generate A2L	1	Meth.bindingTime = CodeGenerationTime

Table 3.308: A2L File

3.6.2.24 MC Driver Support Data



Artifact	MC Driver Support	Data		
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description		Support data describing the specific access of a driver (e.g. XCP) for exchange of data for measurement and calibration.		
Description	XCP) in order to exc These are the so-ca This artifact shall be generator out of its E	Support data describing the specific access method of a driver (e.g. XCP) in order to exchange data for measurement and calibration. These are the so-called IF-DATA needed in the A2L files. This artifact shall be generated by a driver(e.g. XCP) specific generator out of its ECU configuration. This format is not defined by AUTOSAR. The work product is only included for completeness of the		
Kind	Custom	Custom		
Relation Type	Related Element	Mul.	Note	
Consumed by	Generate A2L	0*		

Table 3.309: MC Driver Support Data

3.6.2.25 MC Additional Config

Artifact	MC Additional Config			
Package	AUTOSAR Root::M2 Products	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::Work Products		
Brief Description	External configuration	n data r	nedded to generate the A2L file.	
Description	format is not defined	Additional configuration data needed to generate the A2L file. This format is not defined by AUTOSAR. The work product is only included for completeness of the use cases.		
Kind	Custom			
Relation Type	Related Element	Mul.	Note	
Consumed by	Generate A2L	01		

Table 3.310: MC Additional Config

3.6.3 Tools

3.6.3.1 RTE Generator

Tool	RTE Generator		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu:: Guidance		
Brief Description			
Description	RTE Generator used	for sev	eral tasks during ECU integration.
Kind			
Relation Type	Related Element	Mul.	Note
Used	Generate RTE	1	
Used	Generate RTE Postbuild Dataset	1	



Relation Type Related Ele	ement	Mul.	Note
Used Generate Prebuild Da	RTE ataset	1	
Used Generate uler	Sched-	1	

Table 3.311: RTE Generator

3.6.3.2 BSW Generator Framework

Tool	BSW Generator Fra	BSW Generator Framework			
Package	AUTOSAR Root::M2 Guidance	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu:: Guidance			
Brief Description					
Description		Framework that uses BSW generators that are being delivered as part of individual modules.			
Kind					
Relation Type	Related Element	Mul.	Note		
Used	Generate BS W Configuration Code	1			

Table 3.312: BSW Generator Framework

3.6.4 ECU Config Classes

3.6.4.1 Tasks

3.6.4.1.1 Compile Unconfigured Bsw

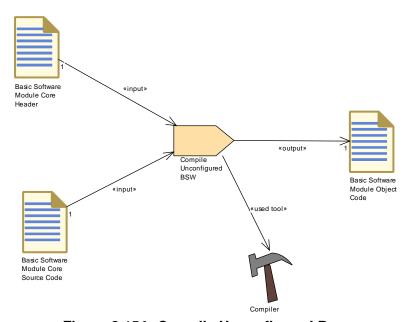


Figure 3.154: Compile Unconfigured Bsw



Task Definition	Compile Unconfigu	red BS	W		
Package		AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::ECU Config Classes::Tasks			
Brief Description	Compile unconfigure	ed BSW	to get a BSW Module Object Code.		
Description	any configuration da	ta when	is the usual step to compile files without no configuration is needed. This can be e, link or post-build time.		
Relation Type	Related Element	Mul.	Note		
Consumes	Basic Software Module Core Header	1			
Consumes	Basic Software Module Core Source Code	1			
Produces	Basic Software Module Object Code	1			
Used tool	Compiler	1			

Table 3.313: Compile Unconfigured BSW

3.6.4.1.2 Compile Configured Bsw

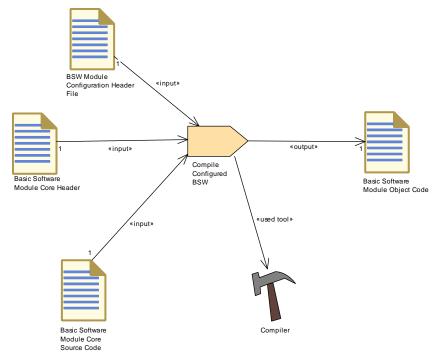


Figure 3.155: Compile Configured Bsw



Task Definition	Compile Configure	d BSW	
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::ECU Config Classes::Tasks		
Brief Description	Compile Configured	BSW to	get a BSW Module Object Code
Description	Compile Configured BSW to get a Basic Software Module Object Code used in the link steps. This Configured BSW is representing C files that have already included all needed configured data. This is done in the pre-compile time.		
Relation Type	Related Element	Mul.	Note
Consumes	BSW Module Configuration Header File	1	
Consumes	Basic Software Module Core Header	1	
Consumes	Basic Software Module Core Source Code	1	
Produces	Basic Software Module Object Code	1	
Used tool	Compiler	1	

Table 3.314: Compile Configured BSW

3.6.4.1.3 Compile BSW Configuration Data

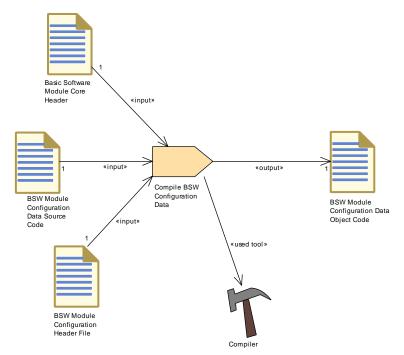


Figure 3.156: Compile BSW Configuration Data



Task Definition	Compile BSW Conf	Compile BSW Configuration Data			
Package	I	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::ECU Config Classes::Tasks			
Brief Description	Compile BSW Config	guration	Data during link time		
Description	configuration to get t	Compile BSW Configuration Data during link-time- or post-build configuration to get the Basic Software Module Configuration Data Object Code used in the link steps.			
Relation Type	Related Element	Mul.	Note		
Consumes	BSW Module Configuration Data Source Code	1			
Consumes	BSW Module Configuration Header File	1			
Consumes	Basic Software Module Core Header	1			
Produces	BSW Module Configuration Data Object Code	1			
Used tool	Compiler	1			

Table 3.315: Compile BSW Configuration Data

3.6.4.1.4 Compile Generated BSW

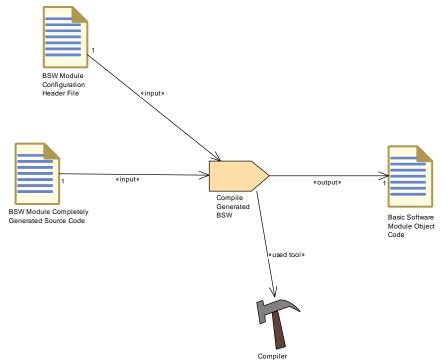


Figure 3.157: Compile Generated BSW



Task Definition	Compile Generated BSW			
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::ECU Config Classes::Tasks			
Brief Description	Compile generated E	3SW in t	the pre-compile time:	
Description	has been generated	Compile generated BSW in the pre-compile time: this generated BSW has been generated with a BSW Configuration generator which generates the complete configuration-specific code.		
Relation Type	Related Element	Mul.	Note	
Consumes	BSW Module Completely Gen- erated Source Code	1		
Consumes	BSW Module Configuration Header File	1		
Produces	Basic Software Module Object Code	1		
Used tool	Compiler	1		

Table 3.316: Compile Generated BSW

3.6.4.1.5 Generate BSW Precompile Configuration Header




Figure 3.158: Generate BSW Precompile Configuration Header

Task Definition	Generate BSW Pre	Generate BSW Precompile Configuration Header			
Package	I	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::ECU Config Classes::Tasks			
Brief Description	Generate BSW Pred	ompile (Configuration Header		
Description	for definition or decla	Generate BSW Pre-compile Configuration Header. The header is used for definition or declaration (in case source code is needed) of the pre-compile configuration data code.			
Relation Type	Related Element	Related Element Mul. Note			
Consumes	ECU Configuration Values	1			
Produces	BSW Module Configuration Header File	1			

Table 3.317: Generate BSW Precompile Configuration Header



3.6.4.1.6 Generate BSW Source Code

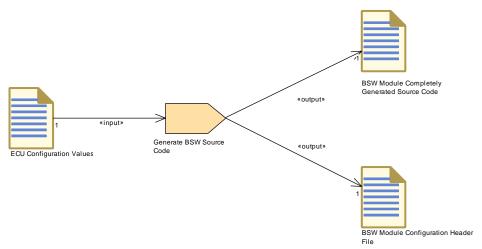


Figure 3.159: Generate BSW Source Code

Task Definition	Generate BSW Source Code		
Package	AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::ECU Config Classes::Tasks		
Brief Description	Generate the source configuration.	code o	f a module completely from its precompile
Description			f a BSW module completely from its header file may be produced in addition, if
Relation Type	Related Element	Mul.	Note
Consumes	ECU Configuration Values	1	
Produces	BSW Module Completely Gen- erated Source Code	1	
Produces	BSW Module Configuration Header File	1	

Table 3.318: Generate BSW Source Code



3.6.4.1.7 Generate BSW Configuration Code

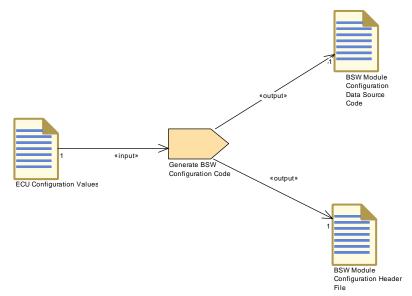


Figure 3.160: Generate BSW Configuration Code

Task Definition	Generate BSW Cor	ıfigurati	ion Code		
Package		AUTOSAR Root::M2::Methodology::Methodology Library::Ecu::ECU Config Classes::Tasks			
Brief Description		Generate source code which implements configuration data for link- or compile-time configuration.			
Description	Description and created specified configuration the configuration confor compile-time confints a header file (e.g. configuration code see A header file may be furthermore the ger	A generator reads the relevant parameters from the ECU Configuration Description and creates a separate code file that implements the specified configuration. This task is used for link-time configuration, i.e. the configuration code can be produced at link-time of the core code or for compile-time configuration, if the configuration code cannot be put into a header file (e.g. for tables), even if the core code and the configuration code shall be compiled at the same time. A header file may be produced in addition, to declare the data. Furthermore the generator may produce extensions of the BSW module description artifacts as a result of configuration parameter			
Relation Type	Related Element				
Performed by	ECU Integrator	1			
Consumes	ECU Configuration Values	1			
Consumes	BSW Module Generator	01	This is an input in case a generator framework is used which has to run some module specific generator code.		
Consumes	Build Action Mani- fest	01	The task may be controlled by a Build Action Manifest.		



Relation Type	Related Element	Mul.	Note
Consumes	BSW Module Vendor- Specific Configuration Pa- rameter Definition	0*	
Produces	BSW Module Configuration Data Source Code	1	
Produces	BSW Module Configuration Header File	1	
Produces	BSW Module Behavior Extension	01	
Produces	BSW Module Implementation Extension	01	
Produces	BSW Module Inter- face Extension	01	
Used tool	BSW Generator Framework	1	

Table 3.319: Generate BSW Configuration Code

3.6.4.1.8 Generate BSW Postbuild Configuration Code

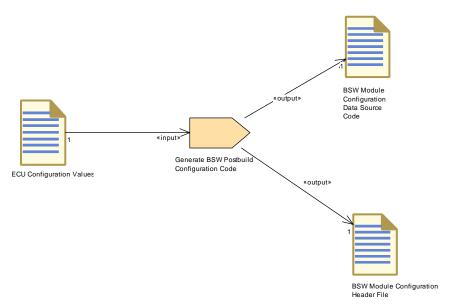


Figure 3.161: Generate BSW Postbuild Configuration Code



Task Definition	Generate BSW Pos	tbuild C	Configuration Code
Package	AUTOSAR Root::M2 Config Classes::Task		dology::Methodology Library::Ecu::ECU
Brief Description	Generate the code for configuration.	or data s	structures that can be used for postbuild
Description	Generate the source that can be used for		nd associated header for data structures d configuration.
Relation Type	Related Element	Mul.	Note
Consumes	ECU Configuration Values	1	
Produces	BSW Module Configuration Data Source Code	1	
Produces	BSW Module Configuration Header File	1	

Table 3.320: Generate BSW Postbuild Configuration Code

3.6.4.1.9 Link ECU after Precompile Configuration

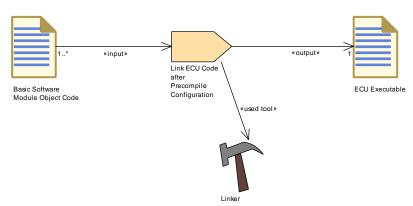


Figure 3.162: Link ECU after Precompile Configuration

Task Definition	Link ECU Code afte	er Preco	ompile Configuration
Package	AUTOSAR Root::M2 Config Classes::Tasl		dology::Methodology Library::Ecu::ECU
Brief Description	Link the ECU code in	n the pre	e-compile time Configuration Class
Description	Configuration Class.	All para	ules object code in the pre-compile ameters values for configurable elements are effective after compilation time.
Relation Type	Related Element	Mul.	Note
Consumes	Basic Software Module Object Code	1*	
Produces	ECU Executable	1	
Used tool	Linker	1	

Table 3.321: Link ECU Code after Precompile Configuration



3.6.4.1.10 Link ECU Code During Link Time Configuration

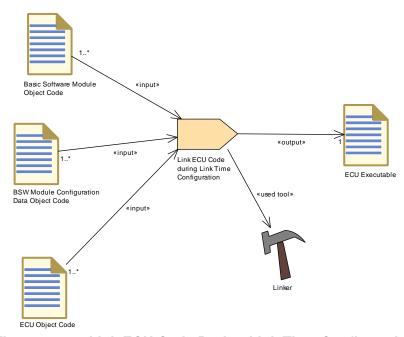


Figure 3.163: Link ECU Code During Link Time Configuration

Task Definition	Link ECU Code dur	ing Lin	k Time Configuration
Package	AUTOSAR Root::M2 Config Classes::Tasl		dology::Methodology Library::Ecu::ECU
Brief Description	Link ECU Code duri	ng Link	Time
Description	Link ECU Code duri	ng Link	Time
Relation Type	Related Element	Mul.	Note
Consumes	BSW Module Configuration Data Object Code	1*	
Consumes	Basic Software Module Object Code	1*	
Consumes	ECU Object Code	1*	
Produces	ECU Executable	1	
Used tool	Linker	1	

Table 3.322: Link ECU Code during Link Time Configuration



3.6.4.1.11 Link ECU Code During Post-build Time

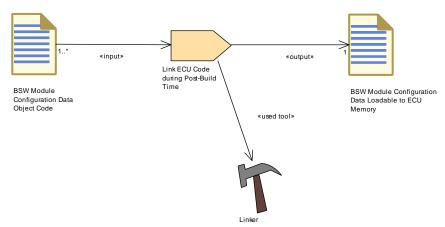


Figure 3.164: Link ECU Code During Post-build Time

Task Definition	Link ECU Code dur	ing Pos	st-Build Time
Package	AUTOSAR Root::M2 Config Classes::Tasl		dology::Methodology Library::Ecu::ECU
Brief Description	Link ECU Code duri	ng post-	build time loadable .
Description	are coming from con	figuratio	build time. The objects used for this link on data file that contain all configured e link is a hex file that will be loadable in
Relation Type	Related Element	Mul.	Note
Consumes	BSW Module Configuration Data Object Code	1*	
Produces	BSW Module Configuration Data Loadable to ECU Memory	1	
Used tool	Linker	1	

Table 3.323: Link ECU Code during Post-Build Time

3.6.4.2 Work Products

3.6.4.2.1 BSW Module Configuration Header File



Artifact	BSW Module Confi	guratio	n Header File
Package	AUTOSAR Root::M2 Config Classes::Wor		dology::Methodology Library::Ecu::ECU
Brief Description	C-header file genera	ted fron	n the configuration data of a BSW module.
Description	defining the data (on containing additional code only).	lly possi I declara	n the configuration data of a BSW module, ble for pre-compile configuration) or ations (needed by generated configuration
Kind	Bound Source Code		
Relation Type	Related Element	Mul.	Note
Produced by	Generate BS W Configuration Code	1	
Produced by	Generate BSW Postbuild Configu- ration Code	1	
Produced by	Generate BSW Precompile Configuration Header	1	
Produced by	Generate BSW Source Code	1	
Produced by	Generate BSW and RTE	1	
Consumed by	Compile BSW Configuration Data	1	
Consumed by	Compile Configured BSW	1	
Consumed by	Compile Generated BSW	1	
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime

Table 3.324: BSW Module Configuration Header File

3.6.4.2.2 BSW Module Completely Generated Source Code

Artifact	BSW Module Comp	letely C	Generated Source Code
Package	AUTOSAR Root::M2 Config Classes::Wor		dology::Methodology Library::Ecu::ECU cts
Brief Description	Generated BSW sou inclusion of pre-com		e implementing the complete module after configuration data.
Description		pilation	e implementing the complete module after configuration data. In this case, no core dule vendor.
Kind	Source Code		
Relation Type	Related Element	Mul.	Note
Produced by	Generate BSW Source Code	1	
Consumed by	Compile Gener- ated BSW	1	



|--|

Table 3.325: BSW Module Completely Generated Source Code

3.6.4.2.3 BSW Module Configuration Data Source Code

Artifact	BSW Module Confi	guratio	n Data Source Code
Package	AUTOSAR Root::M2 Config Classes::Wor		dology::Methodology Library::Ecu::ECU cts
Brief Description	BSW source code go only the data.	enerated	d from configuration data, implementing
Description	BSW source code go only the data.	enerated	d from configuration data, implementing
Kind	Bound Source Code		
Relation Type	Related Element	Mul.	Note
Produced by	Generate BS W Configuration Code	1	
Produced by	Generate BSW Postbuild Configu- ration Code	1	
Produced by	Generate BSW and RTE	1	
Consumed by	Compile BSW Configuration Data	1	
Consumed by	Compile ECU Source Code	0*	Meth.bindingTime = CodeGenerationTime

Table 3.326: BSW Module Configuration Data Source Code

3.6.4.2.4 BSW Module Configuration Data Object Code

Artifact	BSW Module Confi	guratio	n Data Object Code
Package	AUTOSAR Root::M2 Config Classes::Wor		dology::Methodology Library::Ecu::ECU cts
Brief Description	Generated data for li module.	nk-time	or postbuild configuration of a BSW
Description	Generated & compile configuration of a BS		guration data for link-time or postbuild ule.
Kind	Object Code		
Relation Type	Related Element	Mul.	Note
Produced by	Compile BSW Configuration Data	1	
Consumed by	Link ECU Code during Link Time Configuration	1*	
Consumed by	Link ECU Code during Post-Build Time	1*	



Relation Type Related Element Mul. Note	Relation Type	Related Element	Mul.	Note
---	---------------	-----------------	------	------

Table 3.327: BSW Module Configuration Data Object Code

3.6.4.2.5 BSW Module Configuration Data Loadable to ECU Memory

Artifact	BSW Module Confi	guratio	n Data Loadable to ECU Memory
Package	AUTOSAR Root::M2 Config Classes::Wor		dology::Methodology Library::Ecu::ECU cts
Brief Description	Generated loadable BSW module.	configur	ration data for post-build configuration of a
Description	Generated loadable BSW module.	configur	ration data for post-build configuration of a
Kind	Configuration Data S	Set	
Relation Type	Related Element	Mul.	Note
Aggregated by	ECU Software De- livered	0*	
Produced by	Link ECU Code during Post-Build Time	1	

Table 3.328: BSW Module Configuration Data Loadable to ECU Memory



A History of Constraints and Specification Items

A.1 Constraint History of this Document according to AUTOSAR R4.1.1

N/A

A.1.1 Added Specification Items in R4.1.1

Number	Heading
[TR_METH_00001]	Definition of Binding Time for Tasks
[TR_METH_00002]	Definition of Binding Time for Artifacts
[TR_METH_00003]	Definition of Binding Time for Artifacts in the context of particular tasks
[TR_METH_01000]	Domains of the AUTOSAR methodology
[TR_METH_01001]	AUTOSAR methodology assets
[TR_METH_01002]	AUTOSAR methodology use cases
[TR_METH_01003]	Scope of the AUTOSAR methodology
[TR_METH_01004]	Support for various stakeholders by the AUTOSAR methodology
[TR_METH_01005]	Restrictions of AUTOSAR methodology
[TR_METH_01006]	General AUTOSAR methodology concepts
[TR_METH_01007]	Method Library
[TR_METH_01008]	Method Library Element
[TR_METH_01009]	Relation of Method Library and Method Library Element to the SPEM
	meta model
[TR_METH_01010]	Overview of Method Library Elements
[TR_METH_01011]	Task Definition
[TR_METH_01012]	Task semantics
[TR_METH_01013]	Task usage
[TR_METH_01014]	Work Product Definition
[TR_METH_01015]	Relationship between Roles and Work Products
[TR_METH_01017]	Artifact Definition
[TR_METH_01018]	Kinds of Artifacts
[TR_METH_01019]	Properties of Artifacts
[TR_METH_01020]	Relationship between Artifacts and meta model elements
[TR_METH_01021]	Deliverable Definition
[TR_METH_01022]	Aggregation of Work Products
[TR_METH_01023]	Role Definition
[TR_METH_01024]	Role assignment
[TR_METH_01025]	Tool Definition
[TR_METH_01026]	Guidance definition
[TR_METH_01027]	Guidance kinds
[TR_METH_01028]	Usage of tables
[TR_METH_01029]	Capability Patterns definition
[TR_METH_01030]	Composition of Capability Patterns
[TR_METH_01031]	Adaptability of the AUTOSAR methodology
[TR_METH_01032]	Use case elements
[TR_METH_01033]	Definition of Activities
[TR_METH_01034]	Composition of Activities
[TR_METH_01035]	Definition of Processes
[TR_METH_01036]	Description of overall Use Cases



ITD METH 040071	D. 2. d. 2.2.
[TR_METH_01037]	Precise description of Use Cases
[TR_METH_01038]	Detailed description of the work flow
[TR_METH_01039]	AUTOSAR System development overview
[TR_METH_01040]	Support of different system views
[TR_METH_01041]	Abstract system
[TR_METH_01042]	Overall technical system
[TR_METH_01043]	Sub-System
[TR_METH_01044]	Development of a functional view on the system
[TR_METH_01045]	Development of the Overall VFB System
[TR_METH_01046]	Development of the system
[TR_METH_01047]	Two phase development approach
[TR_METH_01048]	The overall system
[TR_METH_01049]	Interaction between organizations
[TR_METH_01050]	Abstract System Description activity
[TR_METH_01051]	Creation of an overall abstract system
[TR_METH_01052]	Definition of a constraints in the context of an abstract system
[TR_METH_01053]	Definition of a System Description in the context of an abstract system
[TR_METH_01054]	Virtual Functional Bus
[TR_METH_01055]	Data Model Development activity
[TR_METH_01056]	Definition of the VFB
[TR_METH_01057]	Top-Down approach
[TR_METH_01058]	Bottom-Up approach
[TR_METH_01059]	Kinds of VFB Atomic Software Components
[TR_METH_01060]	Develop an Atomic Software Component activity
[TR_METH_01061] [TR_METH_01065]	Develop Application Software activity
[TR_METH_01065]	Develop System and Develop Sub-System activities Creation of a System Extract and a ECU Extract
[TR_METH_01067]	Abstract System Description deliverable
[TR_METH_01068]	Inputs and Output of the Design System activity
[TR_METH_01069]	Deployment of AUTOSAR Software Components
[TR_METH_01070]	Description of network signals
[TR_METH_01071]	Description of design constraints
[TR METH 01075]	Design Sub-System activity
[TR_METH_01076]	Collaboration between different organizations
[TR METH 01077]	Transformation changes during the Design Sub-System activity
[TR_METH_01078]	Mapping of different views
[TR METH 01079]	Use Case: Substitution of existing components
[TR_METH_01080]	Use Case: Mapping of requirements to the solution
[TR_METH_01081]	Use Case: Reorganization of the software structure
[TR_METH_01082]	Use Case: Description of changes between different versions of System De-
	scription s
[TR_METH_01083]	Design Basic Software activity
[TR_METH_01084]	Separation of design and development of basic software
[TR_METH_01085]	Develop BSW Module activity
[TR_METH_01086]	Integrate Software for ECU activity
[TR_METH_01087]	Scope of Integrate Software for ECU activity
[TR_METH_01088]	Prepare ECU Configuration activity
[TR_METH_01089]	Configure BSW and RTE activity
[TR_METH_01090]	Configure RTE task
[TR_METH_01091]	Configure Debug task
[TR_METH_01092]	Generating BSW modules, RTE, and OS source files
[TR_METH_01093]	Building ECU Executable
[TR_METH_01095]	Configuration Class: Pre-compile Time



[TR_METH_01096]	Generating header files only
[TR_METH_01097]	Generating header and source files
[TR_METH_01098]	Configuration Class: Link Time
[TR_METH_01099]	Generation and compilation of BSW Configuration Code
[TR_METH_01100]	Definition of configuration data
[TR_METH_01101]	Separate compilation of module source and configuration file
[TR_METH_01102]	Linking process
[TR_METH_01103]	Re-generation in case of configuration value changes
[TR_METH_01104]	Configuration Class: Post-build Time
[TR_METH_01105]	Generate BSW Postbuild Configuration Code
[TR_METH_01106]	Generate BSW Configuration Data Loadable
[TR_METH_01107]	Configuration Class: Post-build Time Selectable
[TR_METH_01108]	Generating multiple post-build configuration variants
[TR_METH_01109]	Producing ECU-specific deliverables
[TR_METH_01110]	Development of Software Components
[TR_METH_01111]	Development of Basic Software modules
[TR_METH_01112]	Integration of AUTOSAR ECUs
[TR_METH_01113]	Usage of hyperlinks
[TR_METH_01120]	Definition of Consistency Needs
[TR_METH_01121]	Building the AUTOSAR methodology document
[TR_METH_01122]	Relations between AUTOSAR Work Products
[TR_METH_01123]	Traceability to external artifacts
[TR_METH_01124]	Documentation of Work Products
[TR_METH_02000]	Use of AUTOSAR Services
[TR_METH_02001]	Define Cross-component Calibration Parameters activity
[TR_METH_02002]	Define Local Calibration Parameters activity
[TR_METH_02003]	Provide Unique Parameter Names activity
[TR_METH_02004]	Re-generate RTE and Calibration Support activity
[TR_METH_02005]	Memory sections for data and code
[TR_METH_02006]	E2E Protection
[TR_METH_02007]	Define E2E Protection Set activity
[TR_METH_02008]	Regenerate E2E Protection Wrapper activity
[TR_METH_02009]	Variation points in Variant Handling
[TR_METH_02010]	Predefined Variants in Variant Handling
[TR_METH_02011]	Types of binding times
[TR_METH_02012]	Definition of a binding time
[TR_METH_02013]	Latest Binding Time
[TR_METH_02014]	Actual Binding Time
[TR_METH_02015]	Definition of variants
[TR_METH_02016]	Evaluated Variant Set
[TR_METH_02017]	Use of Predefined Variant
[TR_METH_02018]	Choosing variants
[TR_METH_02020]	Definition of latest Binding Time for a variation point in the meta-model
[TR_METH_03000]	Name spaces via ARPackages
[TR_METH_03001]	Reasons for name conflicts in "downstream" artifacts
[TR_METH_03002]	Conflict solution at system design time
[TR_METH_03003]	Conflict solution at coding time
[TR_METH_03004]	Conflict solution at ECU integration time
[TR_METH_03005]	Conflict solution via SymbolProps
[TR_METH_03006]	Conflict solution via literal prefixes
[TR_METH_03007]	Conflict solution in names of runnable entities
[TR_METH_03008]	Conflict solution via FlatMap
[TR_METH_03009]	Conflict solution via AliasNameSet



[TR_METH_03010]	Conflict solution via API Infixes
-----------------	-----------------------------------

Table A.1: Added Specification Items in 4.1.1

A.2 Constraint History of this Document according to AUTOSAR R4.1.2

N/A

A.2.1 Added Specification Items in R4.1.2

Number	Heading
[TR_METH_01114]	Input sources for ECU Configuration
[TR_METH_01115]	A mix of parameters with different configuration classes within a BSW module
	is allowed
[TR_METH_01116]	ECU Configuration Value description contains the configuration of all BSW
	modules in a single ECU
[TR_METH_01117]	BSW implementation shall be chosen for each BSW module that is present in
	the ECU

Table A.2: Added Specification Items in 4.1.2

A.3 Constraint History of this Document according to AUTOSAR R4.1.3

N/A

A.3.1 Added Specification Items in R4.1.3

Number	Heading
[TR_METH_01125]	Create ECU System Description activity
[TR_METH_01126]	Using the System Extract as the structural basis for the ECU development
[TR_METH_01127]	Creating a new structure for the ECU development

Table A.3: Added Specification Items in 4.1.3

A.3.2 Changed Specification Items in R4.1.3

Number	Heading
[TR_METH_01049]	Interaction between organizations
[TR_METH_01066]	Creation of a System Extract and an ECU Extract
[TR_METH_01075]	Design Sub-System activity
[TR_METH_01076]	Collaboration between different organizations

Table A.4: Changed Specification Items in 4.1.3



A.4 Constraint History of this Document according to AUTOSAR R4.2.1

N/A

A.4.1 Added Specification Items in R4.2.1

Number	Heading
[TR_METH_01128]	Integration of Non AUTOSAR Systems in the context of an abstract system
[TR_METH_01129]	Integrate Non AUTOSAR System at VFB level activity
[TR_METH_01130]	Design Transformer activity
[TR_METH_01131]	Output of Design Transformer activity
[TR_METH_01132]	Definition of a Rapid Prototyping Scenario
[TR_METH_01133]	Content of Rapid Prototyping Scenario artifact
[TR_METH_01134]	Component wrapper method
[TR_METH_01135]	Direct buffer access method
[TR_METH_01136]	Content of Diagnostic Extract
[TR_METH_01137]	Diagnostic Extract category
[TR_METH_01138]	Decentralized configuration
[TR_METH_01139]	Roles
[TR_METH_01140]	Develop Diagnostic Abstract System Description activity
[TR_METH_01141]	Development of diagnostic requirements
[TR_METH_01142]	Diagnostic information in the context of SW-C development
[TR_METH_01143]	Integration of diagnostic information
[TR_METH_01144]	Activity Define Safety Information
[TR_METH_01145]	Creation of Safety Requirements
[TR_METH_01146]	Allocation of Safety Requirements
[TR_METH_01147]	Decomposition of Safety Requirements
[TR_METH_01148]	Definition of Safety Measures
[TR_METH_01149]	Definition of VFB relevant safety information
[TR_METH_01150]	Including different post-build variants
[TR_METH_01151]	Update ECU Configuration activity
[TR_METH_01153]	Configuration and Generation of the E2E Transformer
[TR_METH_01154]	Define E2E Transformer Technology Task

Table A.5: Added Specification Items in 4.2.1

A.4.2 Changed Specification Items in R4.2.1

Number	Heading
[TR_METH_01059]	Kinds of VFB Atomic Software Components
[TR_METH_01046]	Development of the system
[TR_METH_01065]	Develop System and Develop Sub-System activities
[TR_METH_01060]	Develop an Atomic Software Component activity
[TR_METH_01065]	Develop System and Develop Sub-System activities
[TR_METH_01104]	Configuration Class: Post-build Time
[TR_METH_01105]	Generate BSW Postbuild Configuration Code
[TR_METH_01108]	Generating multiple post-build configuration variants
[TR_METH_02006]	E2E Protection

Table A.6: Changed Specification Items in 4.2.1



A.4.3 Deleted Specification Items in R4.2.1

Number	Heading
[TR_METH_01106]	Generate BSW Configuration Data Loadable
[TR_METH_01107]	Configuration Class: Post-build Time Selectable
[TR_METH_02007]	Define E2E Protection Set activity
[TR_METH_02008]	Regenerate E2E Protection Wrapper activity

Table A.7: Deleted Specification Items in 4.2.1

A.5 Constraint History of this Document according to AUTOSAR R4.2.2

No changes.