

|                                   |                                    |
|-----------------------------------|------------------------------------|
| <b>Document Title</b>             | Specification of I-PDU Multiplexer |
| <b>Document Owner</b>             | AUTOSAR                            |
| <b>Document Responsibility</b>    | AUTOSAR                            |
| <b>Document Identification No</b> | 182                                |

|                                 |                  |
|---------------------------------|------------------|
| <b>Document Status</b>          | published        |
| <b>Part of AUTOSAR Standard</b> | Classic Platform |
| <b>Part of Standard Release</b> | R25-11           |

| Document Change History |         |                                  |                                                                                                                                                                                                                                                                      |
|-------------------------|---------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Date                    | Release | Changed by                       | Description                                                                                                                                                                                                                                                          |
| 2025-11-27              | R25-11  | AUTOSAR<br>Release<br>Management | <ul style="list-style-type: none"> <li>Introduced "maximum fill-up strategy" for ContainerPdus</li> <li>Clarified trigger conditions to transmit a ContainerIpdu</li> <li>Editorial changes</li> </ul>                                                               |
| 2024-11-27              | R24-11  | AUTOSAR<br>Release<br>Management | <ul style="list-style-type: none"> <li>No content changes</li> </ul>                                                                                                                                                                                                 |
| 2023-11-23              | R23-11  | AUTOSAR<br>Release<br>Management | <ul style="list-style-type: none"> <li>Added information about automatic handle IDs to configuration</li> <li>Changed document name to include "CP"</li> </ul>                                                                                                       |
| 2022-11-24              | R22-11  | AUTOSAR<br>Release<br>Management | <ul style="list-style-type: none"> <li>Improved retransmission of PDUs</li> <li>Clarified priority handling for contained PDUs</li> <li>Fixed error tables</li> <li>Converted to <math>\LaTeX</math></li> </ul>                                                      |
| 2021-11-25              | R21-11  | AUTOSAR<br>Release<br>Management | <ul style="list-style-type: none"> <li>Rework of assembly strategy of a ContainerIpdu that contains ContainedIpdu with Last-is-Best semantic</li> <li>Shorting of IPDUs if possible</li> <li>Avoid possible interpretation of queue bypass for containers</li> </ul> |





|            |        |                            |                                                                                                                                                                                                                                                                                                                                  |
|------------|--------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2020-11-30 | R20-11 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>Improved the structure of the Error sections</li> <li>Clarified <a href="#">IpduMRxDynamicPart</a> lower multiplicity</li> </ul>                                                                                                                                                          |
| 2019-11-28 | R19-11 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>Introduced BSW Distribution Concept (CONC 643) as draft</li> <li>Changed Document Status from Final to published</li> </ul>                                                                                                                                                               |
| 2018-10-31 | 4.4.0  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>Introduce priority for Tx ContainedIPdus with LastIsBest collection semantics</li> <li>Header File Cleanup</li> <li>Limitations on Container PDU with MDT</li> <li>minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation</li> </ul> |
| 2017-12-08 | 4.3.1  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>introduced static multiple-PDU-to-Container handling as draft</li> <li>revised error definitions</li> <li>minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation</li> </ul>                                                          |
| 2016-11-30 | 4.3.0  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>updated TX-confirmation handling</li> <li>added support for MetaData</li> <li>Com-Stack API harmonization</li> <li>minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation</li> </ul>                                                 |
| 2015-07-31 | 4.2.2  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation</li> </ul>                                                                                                                                                                    |
| 2014-10-31 | 4.2.1  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>Added Multiple PDU to Container Mapping</li> <li>Extension of <a href="#">IpduMSelectorFieldLength</a></li> </ul>                                                                                                                                                                         |





|            |       |                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------|-------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2014-03-31 | 4.1.3 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Editorial changes and minor corrections</li> <li>• No major functional change</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 2013-10-31 | 4.1.2 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Revised configuration structure of dynamic and static segments to enforce layout constraints already by the configuration structure</li> <li>• Few bug fixes and clarifications</li> <li>• Editorial changes</li> <li>• Removed chapter(s) on change documentation</li> </ul>                                                                                                                                                                                                                                                                                                                             |
| 2013-03-15 | 4.1.1 | AUTOSAR Administration     | <ul style="list-style-type: none"> <li>• Reworked according to the new SWS BSW General, harmonization of post-build configuration</li> <li>• Allowing reception of nothing but the static part</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 2011-12-22 | 4.0.3 | AUTOSAR Administration     | <ul style="list-style-type: none"> <li>• Minor bug fixes and editorial changes</li> <li>• Added configurable JIT-update</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 2010-09-30 | 3.1.5 | AUTOSAR Administration     | <ul style="list-style-type: none"> <li>• Updated: tables for mandatory and optional interfaces, [SWS_IpduM_00020], [SWS_IpduM_00027], [SWS_IpduM_00028], [SWS_IpduM_00032], [SWS_IpduM_00060], [SWS_IpduM_00068], [SWS_IpduM_00083], [SWS_IpduM_00104], [ECUC_IpduM_00112], [IPDUM117_Conf], [SWS_IpduM_00143] and [IPDUM154]</li> <li>• Removed: [IPDUM013], [IPDUM030], [IPDUM050_Conf], [IPDUM051_Conf], [IPDUM063], [IPDUM064], [IPDUM065], [IPDUM072], [IPDUM099] and [IPDUM154]</li> <li>• Added: re-compile configuration variant (Chapter 10), [ECUC_IpduM_00162], [ECUC_IpduM_00163], [ECUC_IpduM_00164] and [SWS_IpduM_00165]</li> </ul> |



△

|            |        |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------|--------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2010-02-02 | 3.1.4  | AUTOSAR Administration | <ul style="list-style-type: none"> <li>• Converted to <math>\LaTeX</math></li> <li>• Harmonization of FIBEX multiplexing and AUTOSAR multiplexing</li> <li>• Many small corrections based on conformance tests and validation activities</li> <li>• Legal disclaimer revised</li> </ul>                                                                                                                                             |
| 2008-08-13 | 3.1.1  | AUTOSAR Administration | <ul style="list-style-type: none"> <li>• Fixed generated figures and captions</li> </ul>                                                                                                                                                                                                                                                                                                                                            |
| 2007-12-21 | 3.0.1  | AUTOSAR Administration | <ul style="list-style-type: none"> <li>• SWS improvements by AUTOSAR Technical Office</li> <li>• Defined maximum I-PDU size for FlexRay to 254 bytes</li> <li>• Document meta information extended</li> <li>• Small layout adaptations made</li> </ul>                                                                                                                                                                              |
| 2007-01-24 | 2.1.15 | AUTOSAR Administration | <ul style="list-style-type: none"> <li>• Integrated into BSW Scheduler header file structure</li> <li>• Sequence diagrams clarified</li> <li>• Superfluous text removed</li> <li>• Maximum IPDU size clarified</li> <li>• Signature for <code>IpduM_Transmit</code> made consistent with rest of stack.</li> <li>• “Advice for users” revised</li> <li>• “Revision Inforawion” added</li> <li>• Legal disclaimer revised</li> </ul> |
| 2006-05-16 | 2.0    | AUTOSAR Administration | <ul style="list-style-type: none"> <li>• Initial release</li> </ul>                                                                                                                                                                                                                                                                                                                                                                 |

## Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

## Table of Contents

|         |                                               |    |
|---------|-----------------------------------------------|----|
| 1       | Introduction and functional overview          | 10 |
| 2       | Acronyms and Abbreviations                    | 11 |
| 3       | Related documentation                         | 12 |
| 3.1     | Input documents & related standards and norms | 12 |
| 3.2     | Related specification                         | 12 |
| 4       | Constraints and assumptions                   | 13 |
| 4.1     | Limitations                                   | 13 |
| 4.2     | Applicability to car domains                  | 13 |
| 4.3     | Applicability to safety related environments  | 13 |
| 5       | Dependencies to other modules                 | 14 |
| 5.1     | AUTOSAR OS                                    | 14 |
| 5.2     | RTE (BSW Scheduler)                           | 14 |
| 5.3     | PDU Router                                    | 15 |
| 5.4     | COM                                           | 15 |
| 5.5     | File structure                                | 16 |
| 5.5.1   | Code file structure                           | 16 |
| 6       | Requirements Tracing                          | 17 |
| 7       | Functional specification                      | 20 |
| 7.1     | General                                       | 20 |
| 7.2     | I-PDU Multiplexing                            | 20 |
| 7.2.1   | Definitions and Layout                        | 20 |
| 7.2.2   | General                                       | 22 |
| 7.2.3   | Initialization                                | 23 |
| 7.2.4   | Transmission                                  | 24 |
| 7.2.4.1 | Transmission request                          | 24 |
| 7.2.4.2 | Transmission trigger                          | 25 |
| 7.2.4.3 | Just-In-Time update of parts                  | 26 |
| 7.2.4.4 | Transmission confirmation                     | 27 |
| 7.2.5   | Reception                                     | 27 |
| 7.2.6   | Metadata handling                             | 28 |
| 7.3     | Multiple-PDU-to-Container handling            | 28 |
| 7.3.1   | Dynamic Container Layout                      | 29 |
| 7.3.2   | Static Container Layout                       | 30 |
| 7.3.3   | Transmission                                  | 31 |
| 7.3.3.1 | Transmission request                          | 31 |
| 7.3.3.2 | Transmission trigger condition                | 31 |
| 7.3.3.3 | Assembly of Container PDUs                    | 35 |
| 7.3.3.4 | Transmission confirmation                     | 37 |

|           |                                                               |    |
|-----------|---------------------------------------------------------------|----|
| 7.3.3.5   | Queueing                                                      | 38 |
| 7.3.3.6   | Last-is-Best collection semantics                             | 40 |
| 7.3.4     | Transmission of Dynamic Containers                            | 40 |
| 7.3.4.1   | Queued collection semantics                                   | 41 |
| 7.3.4.2   | Triggered Transmission and Last-is-Best semantics             | 42 |
| 7.3.4.2.1 | Order and re-sorting                                          | 43 |
| 7.3.5     | Transmission of Static Containers                             | 45 |
| 7.3.6     | Reception                                                     | 46 |
| 7.3.6.1   | Queueing                                                      | 48 |
| 7.3.7     | Reception of Dynamic Containers                               | 48 |
| 7.3.8     | Reception of Static Containers                                | 50 |
| 7.3.9     | Errorhandling                                                 | 50 |
| 7.3.10    | Metadata handling                                             | 51 |
| 7.4       | Basic Software Distribution                                   | 52 |
| 7.5       | Error Classification                                          | 53 |
| 7.5.1     | Development Errors                                            | 53 |
| 7.5.2     | Runtime Errors                                                | 53 |
| 7.5.3     | Production Errors                                             | 53 |
| 7.5.4     | Extended Production Errors                                    | 53 |
| 8         | API specification                                             | 54 |
| 8.1       | Imported types                                                | 54 |
| 8.2       | Type definitions                                              | 54 |
| 8.2.1     | IpduM_ConfigType                                              | 54 |
| 8.3       | Function definitions                                          | 55 |
| 8.3.1     | IpduM_Init                                                    | 55 |
| 8.3.2     | IpduM_GetVersionInfo                                          | 56 |
| 8.3.3     | IpduM_Transmit                                                | 56 |
| 8.4       | Callback notifications                                        | 57 |
| 8.4.1     | IpduM_RxIndication                                            | 57 |
| 8.4.2     | IpduM_TxConfirmation                                          | 58 |
| 8.4.3     | IpduM_TriggerTransmit                                         | 59 |
| 8.5       | Scheduled functions                                           | 60 |
| 8.6       | Expected interfaces                                           | 60 |
| 8.6.1     | Mandatory Interfaces                                          | 61 |
| 8.6.2     | Optional Interfaces                                           | 61 |
| 8.6.3     | Configurable interfaces                                       | 61 |
| 9         | Sequence diagrams                                             | 62 |
| 9.1       | Transmission of a multiplexed I-PDU and Transmit confirmation | 62 |
| 9.2       | Transmission of a multiplexed I-PDU without Trigger           | 64 |
| 9.3       | Reception of the multiplexed I-PDU                            | 64 |
| 9.4       | Trigger Transmit                                              | 66 |

|                                                                                 |     |
|---------------------------------------------------------------------------------|-----|
| 10 Configuration specification                                                  | 67  |
| 10.1 How to read this chapter                                                   | 67  |
| 10.2 Containers and configuration parameters                                    | 67  |
| 10.2.1 Configuration overview                                                   | 68  |
| 10.2.2 IpduM                                                                    | 69  |
| 10.2.3 IpduMConfig                                                              | 70  |
| 10.2.4 IpduMGeneral                                                             | 71  |
| 10.2.5 IpduMTxPathway                                                           | 77  |
| 10.2.6 IpduMTxRequest                                                           | 80  |
| 10.2.7 IpduMTxDynamicPart                                                       | 83  |
| 10.2.8 IpduMTxDynamicSegment                                                    | 85  |
| 10.2.9 IpduMTxStaticPart                                                        | 86  |
| 10.2.10 IpduMTxStaticSegment                                                    | 87  |
| 10.2.11 IpduMRxPathway                                                          | 88  |
| 10.2.12 IpduMRxIndication                                                       | 91  |
| 10.2.13 IpduMRxDynamicPart                                                      | 93  |
| 10.2.14 IpduMRxDynamicSegment                                                   | 94  |
| 10.2.15 IpduMRxStaticPart                                                       | 96  |
| 10.2.16 IpduMRxStaticSegment                                                    | 96  |
| 10.2.17 IpduMSelectorField                                                      | 97  |
| 10.2.18 IpduMContainerRxPdu                                                     | 101 |
| 10.2.19 IpduMContainedRxPdu                                                     | 104 |
| 10.2.20 IpduMContainerTxPdu                                                     | 109 |
| 10.2.21 IpduMContainedTxPdu                                                     | 113 |
| 10.2.22 IpduMMainFunctionRx                                                     | 118 |
| 10.2.23 IpduMMainFunctionTx                                                     | 119 |
| 10.3 Published Information                                                      | 120 |
| 10.3.1 IpduMPublishedInformation                                                | 121 |
| 10.4 Configuration Rules                                                        | 122 |
| 10.4.1 Selector Field                                                           | 122 |
| 10.4.2 Placement of static and dynamic parts                                    | 122 |
| 10.4.3 Multiple PDU to Container Mapping                                        | 123 |
| 10.4.4 Priority                                                                 | 124 |
| A Not applicable requirements                                                   | 126 |
| B Change History of AUTOSAR Traceable Items                                     | 127 |
| B.1 Traceable Item History of this Document According to AUTOSAR Release R25-11 | 127 |
| B.1.1 Added Specification Items in R25-11                                       | 127 |
| B.1.2 Changed Specification Items in R25-11                                     | 127 |
| B.1.3 Deleted Specification Items in R25-11                                     | 127 |
| B.1.4 Added Constraints in R25-11                                               | 127 |
| B.1.5 Changed Constraints in R25-11                                             | 127 |



|                                                                                                |     |
|------------------------------------------------------------------------------------------------|-----|
| B.1.6 Deleted Constraints in R25-11 . . . . .                                                  | 127 |
| B.2 Traceable Item History of this Document According to AUTOSAR Re-<br>lease R24-11 . . . . . | 128 |
| B.2.1 Added Specification Items in R24-11 . . . . .                                            | 128 |
| B.2.2 Changed Specification Items in R24-11 . . . . .                                          | 128 |
| B.2.3 Deleted Specification Items in R24-11 . . . . .                                          | 128 |
| B.2.4 Added Constraints in R24-11 . . . . .                                                    | 128 |
| B.2.5 Changed Constraints in R24-11 . . . . .                                                  | 128 |
| B.2.6 Deleted Constraints in R24-11 . . . . .                                                  | 128 |
| B.3 Traceable Item History of this Document According to AUTOSAR Re-<br>lease R23-11 . . . . . | 128 |
| B.3.1 Added Specification Items in R23-11 . . . . .                                            | 128 |
| B.3.2 Changed Specification Items in R23-11 . . . . .                                          | 128 |
| B.3.3 Deleted Specification Items in R23-11 . . . . .                                          | 129 |
| B.3.4 Added Constraints in R23-11 . . . . .                                                    | 129 |
| B.3.5 Changed Constraints in R23-11 . . . . .                                                  | 129 |
| B.3.6 Deleted Constraints in R23-11 . . . . .                                                  | 129 |

# 1 Introduction and functional overview

This specification describes the functionality, APIs and the configuration of the AUTOSAR Basic Software module I-PDU Multiplexer IpduM.

PDU multiplexing means using the same PCI (Protocol Control Information) of a PDU (Protocol Data Unit) with more than one unique layout of its SDU (Service Data Unit). A selector field is a piece of the SDU of the multiplexed PDU. It is used to distinguish the contents of the multiplexed PDUs from each other.

Multiplexing of PDUs is currently known from CAN, but is not restricted to this communication system.

On sender-side, the I-PDU Multiplexer module is responsible to combine appropriate I-PDUs from COM to new, multiplexed I-PDUs and send them back to the PDU Router. On receiver-side, it is responsible to interpret the content of multiplexed I-PDUs and provide COM with its appropriate separated I-PDUs taking into account the value of the selector field.

## 2 Acronyms and Abbreviations

The glossary below includes acronyms and abbreviations relevant to the I-PDU Multiplexer module that are not included in the [1, AUTOSAR glossary].

| Abbreviation / Acronym:  | Description:                                                                                                                            |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| COM I-PDU                | I-PDU assembled in the COM module out of COM Signals                                                                                    |
| contained I-PDU          | I-PDU assembled into or extracted from a Container PDU                                                                                  |
| Container PDU            | PDU containing I-PDUs and headers                                                                                                       |
| dynamic part             | see [2]                                                                                                                                 |
| instance of an I-PDU     | IpduM I-PDU with one specific layout and content                                                                                        |
| Instances of a Container | Instances of the same Container PDU                                                                                                     |
| IpduM                    | I-PDU Multiplexer                                                                                                                       |
| IpduM I-PDU              | I-PDU assembled in the IpduM module out of two COM I-PDUs                                                                               |
| multiplexed I-PDU        | see IpduM I-PDU                                                                                                                         |
| segment                  | The static or dynamic part may consist of more than one piece. These pieces are called segments. See also Chapter 7.2.1 and Figure 7.1. |
| selector field           | see [2]                                                                                                                                 |
| signal                   | see [3]                                                                                                                                 |
| signal group             | see [3]                                                                                                                                 |
| static part              | see [2]                                                                                                                                 |

**Table 2.1: Descriptions of abbreviations and acronyms used in this document**

## 3 Related documentation

### 3.1 Input documents & related standards and norms

- [1] Glossary  
AUTOSAR\_FO\_TR\_Glossary
- [2] Specification of I-PDU Multiplexer  
AUTOSAR\_CP\_SWS\_IPDUMultiplexer
- [3] Specification of Communication  
AUTOSAR\_CP\_SWS\_COM
- [4] General Specification of Basic Software Modules  
AUTOSAR\_CP\_SWS\_BSWGeneral
- [5] Functional safety of electrical/electronic/programmable electronic safety-related systems - Part 1: General requirements (see Functional Safety and IEC 61508)
- [6] Layered Software Architecture  
AUTOSAR\_CP\_EXP\_LayeredSoftwareArchitecture
- [7] Specification of RTE Software  
AUTOSAR\_CP\_SWS\_RTE
- [8] Requirements on I-PDU Multiplexer  
AUTOSAR\_CP\_RS\_IPDUMultiplexer
- [9] Specification of Diagnostic Event Manager  
AUTOSAR\_CP\_SWS\_DiagnosticEventManager
- [10] Specification of PDU Router  
AUTOSAR\_CP\_SWS\_PDURouter

### 3.2 Related specification

AUTOSAR provides a General Specification on Basic Software modules [4, SWS BSW General], which is also valid for I-PDU Multiplexer.

Thus, the specification SWS BSW General shall be considered as additional and required specification for I-PDU Multiplexer.

## 4 Constraints and assumptions

### 4.1 Limitations

For transmission of multiplexed I-PDUs, minimum delay time observation cannot be taken into account. For more details, see [3] and Chapter 7.2.4.1.

For transmission of container PDUs with static layout, minimum delay time cannot be ensured if two or more contained PDUs have each MDT configuration.

### 4.2 Applicability to car domains

No restrictions.

### 4.3 Applicability to safety related environments

This document has been created in absence of a safety case and a safety plan. Thus, the direct results of this document can only be used within safety relevant systems after repeating certain process steps as required in the [5, IEC 61508].

## 5 Dependencies to other modules

This chapter lists all the features from other modules that are used by the AUTOSAR IpduM and functionalities that are provided by AUTOSAR IpduM to other modules.

Because the IpduM module deals with PDUs that are either sourced or sunk by other modules, care must be taken that shared configuration items are consistent between the modules.

The IpduM is arranged next to the PDU Router in the layered architecture of AUTOSAR[6]; see Figure 5.1.

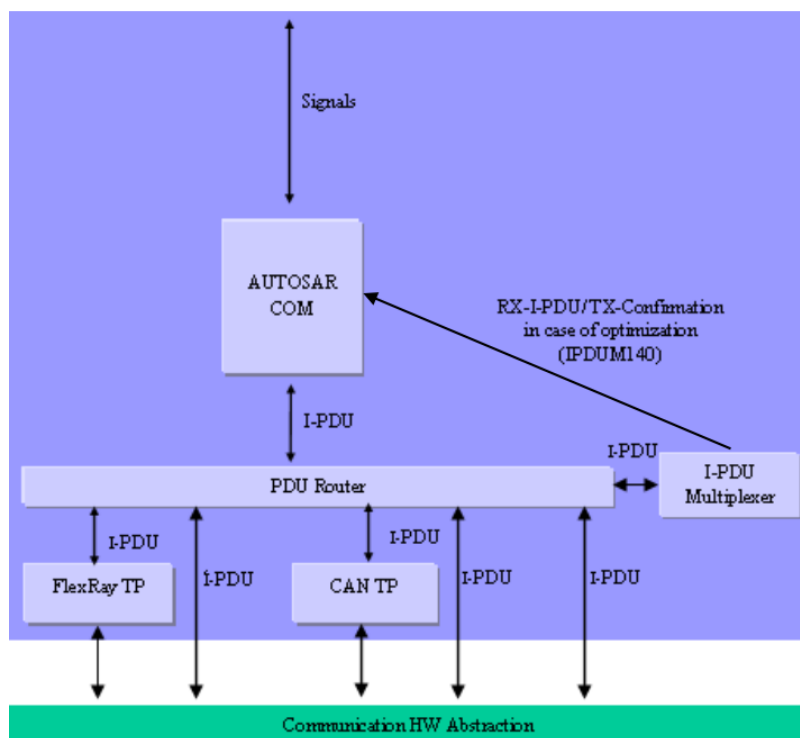


Figure 5.1: I-PDU Multiplexer in the AUTOSAR Architecture

### 5.1 AUTOSAR OS

[SWS\_IpduM\_00107]

Upstream requirements: [SRS\\_BSW\\_00429](#)

[The IpduM shall not directly access the AUTOSAR OS.]

### 5.2 RTE (BSW Scheduler)

The RTE includes the BSW-Scheduler (see [7]).

The IpduM module relies on the BSW-scheduler calling `IpduM_MainFunctionRx` and `IpduM_MainFunctionTx` at a period as configured in `IpduMMainRxTimeBase` or `IpduMMainTxTimeBase` respectively.

### 5.3 PDU Router

The following summarizes the functionality IpduM needs from the PDU Router (for more details see Chapter 8.6):

- indication of incoming multiplexed or contained I-PDUs
- sending interface for outgoing I-PDUs (Container or Multiplexed PDUs)
- confirmation of I-PDUs which went out

The following list summarizes the functionality provided by the IpduM module for the PDU Router module:

- indication interface for incoming I-PDUs, which are de-multiplexed and for incoming Container-PDUs, which are to be disassembled
- sending interface for to be multiplexed I-PDUs and I-PDUs, which are to be assembled into a Container PDU
- confirmation interface for transmitted I-PDUs

The configuration of the PDU Router module (e.g. look-up tables) must be such that the I-PDUs, which belong to multiplexed I-PDUs and represent a static or a dynamic part of a multiplexed I-PDU, are routed to the IpduM module.

The configuration of the PDU-Router module (e.g. look-up tables) must be such that the relevant I-PDUs are routed to IpduM. These are:

- I-PDUs, which belong to multiplexed I-PDUs and represent a static or a dynamic part of a multiplexed I-PDU
- I-PDUs, which consist of static and dynamic parts to be de-multiplexed
- I-PDUs, which are to be assembled into a Container PDU
- Container PDUs to be disassembled

### 5.4 COM

The configuration of the IpduM module relies on a corresponding configuration of the AUTOSAR COM module. For each multiplexed I-PDU, there need to be different I-PDUs for the static part and each layout of the dynamic part. For further information configured in the COM module, see Chapter 7.1 and especially Figure 7.1.

The IpduM further assumes that the correct selector field values are already contained in the COM's modules I-PDU representing the dynamic parts. See also [\[SWS\\_IpduM\\_00098\]](#).

The configuration of Container PDUs/ contained I-PDUs does not depend on the COM configuration.

## **5.5 File structure**

### **5.5.1 Code file structure**

This IpduM SWS does not define the code file structure completely.



## 6 Requirements Tracing

The following tables reference the requirements specified in [8] and links to the fulfillment of these. Please note that if column “Satisfied by” is empty for a specific requirement this means that this requirement is not fulfilled by this document.

| Requirement       | Description                                                                                                            | Satisfied by                                                                                                      |
|-------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| [SRS_BSW_00003]   | All software modules shall provide version and identification information                                              | [SWS_IpduM_00037]                                                                                                 |
| [SRS_BSW_00009]   | All Basic SW Modules shall be documented according to a common standard.                                               | [SWS_IpduM_00104] [SWS_IpduM_00105]                                                                               |
| [SRS_BSW_00101]   | The Basic Software Module shall be able to initialize variables and hardware in a separate initialization function     | [SWS_IpduM_00032] [SWS_IpduM_00033]                                                                               |
| [SRS_BSW_00323]   | All AUTOSAR Basic Software Modules shall check passed API parameters for validity                                      | [SWS_IpduM_00028]                                                                                                 |
| [SRS_BSW_00337]   | Classification of development errors                                                                                   | [SWS_IpduM_91003]                                                                                                 |
| [SRS_BSW_00344]   | BSW Modules shall support link-time configuration                                                                      | [SWS_IpduM_00032]                                                                                                 |
| [SRS_BSW_00357]   | For success/failure of an API call a standard return type shall be defined                                             | [SWS_IpduM_00102]                                                                                                 |
| [SRS_BSW_00369]   | All AUTOSAR Basic Software Modules shall not return specific development error codes via the API                       | [SWS_IpduM_00032] [SWS_IpduM_00037]<br>[SWS_IpduM_00040] [SWS_IpduM_00043]<br>[SWS_IpduM_00044] [SWS_IpduM_00060] |
| [SRS_BSW_00384]   | The Basic Software Module specifications shall specify at least in the description which other modules they require    | [SWS_IpduM_00140]                                                                                                 |
| [SRS_BSW_00405]   | BSW Modules shall support multiple configuration sets                                                                  | [SWS_IpduM_00032]                                                                                                 |
| [SRS_BSW_00406]   | API handling in uninitialized state                                                                                    | [SWS_IpduM_00084]                                                                                                 |
| [SRS_BSW_00407]   | Each BSW module shall provide a function to read out the version information of a dedicated module implementation      | [SWS_IpduM_00037]                                                                                                 |
| [SRS_BSW_00414]   | Init functions shall have a pointer to a configuration structure as single parameter                                   | [SWS_IpduM_91003]                                                                                                 |
| [SRS_BSW_00425]   | The BSW module description template shall provide means to model the defined trigger conditions of schedulable objects | [SWS_IpduM_00252]                                                                                                 |
| [SRS_BSW_00429]   | Access to OS is restricted                                                                                             | [SWS_IpduM_00107]                                                                                                 |
| [SRS_BSW_00438]   | Configuration data shall be defined in a structure                                                                     | [SWS_IpduM_00159]                                                                                                 |
| [SRS_BSW_00478]   | Timing limits of main functions                                                                                        | [SWS_IpduM_00252]                                                                                                 |
| [SRS_IpduM_02801] | The size in bits of the selector field shall be configurable                                                           | [SWS_IpduM_00173]                                                                                                 |
| [SRS_IpduM_02802] | The position of the selector field within the PDU shall be configurable                                                | [SWS_IpduM_00173]                                                                                                 |





| Requirement       | Description                                                                                                                                    | Satisfied by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [SRS_IpduM_02803] | It shall be possible not to assign a SDU layout to the unused selector field values                                                            | [SWS_IpduM_00011]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| [SRS_IpduM_02807] | The I-PDU Multiplexer module shall be designed in a way that it does not produce any additional runtime                                        | [SWS_IpduM_00097]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| [SRS_IpduM_02809] | The initial values of the static part shall be derived from the COM configuration                                                              | [SWS_IpduM_00067] [SWS_IpduM_00068]<br>[SWS_IpduM_00098] [SWS_IpduM_00143]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| [SRS_IpduM_02810] | The PduR shall be configured to send parts of multiplexed I-PDUs to the IPduM on sender side                                                   | [SWS_IpduM_00089] [SWS_IpduM_00090]<br>[SWS_IpduM_00091]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| [SRS_IpduM_02811] | There shall be three different triggering conditions configurable that define when the combined multiplexed I-PDUs are sent to the lower layer | [SWS_IpduM_00021] [SWS_IpduM_00168]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| [SRS_IpduM_02812] | The PduR shall be configured to send multiplexed I-PDUs for de-multiplexing to the IPduM after they were received from the lower layer         | [SWS_IpduM_00041] [SWS_IpduM_00042]<br>[SWS_IpduM_00086] [SWS_IpduM_00140]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| [SRS_IpduM_02813] | The PduR shall be configured to send confirmations related to multiplexed I-PDUs to IPduM after receiving them from the lower layer            | [SWS_IpduM_00022]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| [SRS_IpduM_02814] | The confirmation shall depend upon selector field                                                                                              | [SWS_IpduM_00087] [SWS_IpduM_00088]<br>[SWS_IpduM_00152]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| [SRS_IpduM_02816] | On sender side the IPduM shall combine the static and the appropriate dynamic part within IPduM                                                | [SWS_IpduM_00015] [SWS_IpduM_00017]<br>[SWS_IpduM_00169] [SWS_IpduM_00171]<br>[SWS_IpduM_00172] [SWS_IpduM_00223]<br>[SWS_IpduM_00224] [SWS_IpduM_00225]<br>[SWS_IpduM_00226]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| [SRS_IpduM_02817] | On receiver side the IPduM extracts the static and dynamic parts of the multiplexed I-PDU                                                      | [SWS_IpduM_00040] [SWS_IpduM_00224]<br>[SWS_IpduM_00227]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| [SRS_IpduM_02818] | The IPduM confirms to COM the static part of the multiplexed I-PDU and the dynamic part                                                        | [SWS_IpduM_00022]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| [SRS_IpduM_02820] | Dynamic I-PDU Mapping                                                                                                                          | [SWS_IpduM_00175] [SWS_IpduM_00179]<br>[SWS_IpduM_00180] [SWS_IpduM_00181]<br>[SWS_IpduM_00182] [SWS_IpduM_00183]<br>[SWS_IpduM_00184] [SWS_IpduM_00185]<br>[SWS_IpduM_00186] [SWS_IpduM_00187]<br>[SWS_IpduM_00188] [SWS_IpduM_00189]<br>[SWS_IpduM_00190] [SWS_IpduM_00191]<br>[SWS_IpduM_00192] [SWS_IpduM_00193]<br>[SWS_IpduM_00194] [SWS_IpduM_00195]<br>[SWS_IpduM_00196] [SWS_IpduM_00199]<br>[SWS_IpduM_00200] [SWS_IpduM_00201]<br>[SWS_IpduM_00202] [SWS_IpduM_00203]<br>[SWS_IpduM_00207] [SWS_IpduM_00208]<br>[SWS_IpduM_00210] [SWS_IpduM_00211]<br>[SWS_IpduM_00212] [SWS_IpduM_00213]<br>[SWS_IpduM_00214] [SWS_IpduM_00217]<br>[SWS_IpduM_00220] [SWS_IpduM_00228]<br>[SWS_IpduM_00229] [SWS_IpduM_00230] |



△

| Requirement       | Description                                                     | Satisfied by                                                                                                                                                                                                                                                                  |
|-------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   |                                                                 | <div>△</div> [SWS_IpduM_00231] [SWS_IpduM_00254]<br>[SWS_IpduM_00256] [SWS_IpduM_00257]<br>[SWS_IpduM_00261] [SWS_IpduM_00262]<br>[SWS_IpduM_00265] [SWS_IpduM_91004]                                                                                                         |
| [SRS_IpduM_02821] | The temporal order of I-PDUs shall be preserved                 | [SWS_IpduM_00209] [SWS_IpduM_00219]<br>[SWS_IpduM_00221] [SWS_IpduM_00222]<br>[SWS_IpduM_00260]                                                                                                                                                                               |
| [SRS_IpduM_02822] | Two different Header Sizes shall be supported                   | [SWS_IpduM_00177]                                                                                                                                                                                                                                                             |
| [SRS_IpduM_02823] | The position of I-PDUs inside a Container shall be dynamic      | [SWS_IpduM_00178] [SWS_IpduM_00248]<br>[SWS_IpduM_00249] [SWS_IpduM_00258]<br>[SWS_IpduM_00259] [SWS_IpduM_00264]                                                                                                                                                             |
| [SRS_IpduM_02824] | The ID used in the header shall be independent of the Container | [SWS_IpduM_00204] [SWS_IpduM_00205]<br>[SWS_IpduM_00206] [SWS_IpduM_00207]<br>[SWS_IpduM_00250] [SWS_IpduM_00251]                                                                                                                                                             |
| [SRS_IpduM_02825] | Static I-PDU Mapping                                            | [SWS_IpduM_00232] [SWS_IpduM_00233]<br>[SWS_IpduM_00234] [SWS_IpduM_00235]<br>[SWS_IpduM_00236] [SWS_IpduM_00237]<br>[SWS_IpduM_00238] [SWS_IpduM_00240]<br>[SWS_IpduM_00241] [SWS_IpduM_00242]<br>[SWS_IpduM_00245] [SWS_IpduM_00246]<br>[SWS_IpduM_00253] [SWS_IpduM_91004] |
| [SRS_IpduM_02827] | Handling of transmission trigger condition                      | [SWS_IpduM_00272] [SWS_IpduM_00273]<br>[SWS_IpduM_00274] [SWS_IpduM_00276]<br>[SWS_IpduM_00277] [SWS_IpduM_00278]<br>[SWS_IpduM_00279]                                                                                                                                        |

**Table 6.1: Requirements Tracing**

## 7 Functional specification

### 7.1 General

There are two different approaches of multiplexing several I-PDUs into one resulting PDU being transferred on the bus:

I-PDU Multiplexing means using the same I-PDU ID transferred from the PDU Router to the Communication Hardware Abstraction Layer with more than one unique layout of this I-PDU; see also [6].

Multiple PDU to Container Mapping means collecting several I-PDUs into one Container PDU. This Container PDU is then transferred via PduR as one (large) I-PDU. This way advantage of the larger frame sizes of newer bus systems can be taken, allowing an efficient usage of the bandwidth in combination with smaller I-PDU sizes (usually 8 bytes).

#### [SWS\_IpduM\_00097]

*Upstream requirements:* [SRS\\_IpduM\\_02807](#)

[The IpduM shall be implemented so that no other modules depend on it and that it is be possible to build a system without the IpduM module if it is not needed.]

### 7.2 I-PDU Multiplexing

#### 7.2.1 Definitions and Layout

A multiplexed I-PDU consists of a static part and a dynamic part, where the static part consists of zero or more signals or signal groups. The dynamic part consists of the selector field and one or more signals or signal groups; see Figure 7.1.

The dynamic part of an I-PDU is comparable with a union of the programming language C. Depending on the value of the selector field inside the I-PDU, the actual layout of the I-PDU is selected.


The position of the static and the dynamic part are configurable per I-PDU. The static and the dynamic part can be subdivided into different segments.

Only one selector field can be defined for each multiplexed I-PDU. The value of the selector field defines how the content of the dynamic part of the I-PDU will be interpreted. The selector field has a configurable size between 1 and 16 contiguous bits and its position can be defined by configuration, see [\[ECUC\\_IpduM\\_00054\]](#).


See Chapter [10.2.1](#) for an overview of the IpduM configuration. Chapter [10.4](#) defines the configuration rules.

Multiplexing of PDUs is originally known from CAN, but it is not restricted to this communication system. The IpduM is layered next to the PDU Router above the interface

layer (Communication Hardware Abstraction) in the AUTOSAR layer architecture and therefore this feature could be used for all bus systems, which can be handled by the PDU Router, for example FlexRay.

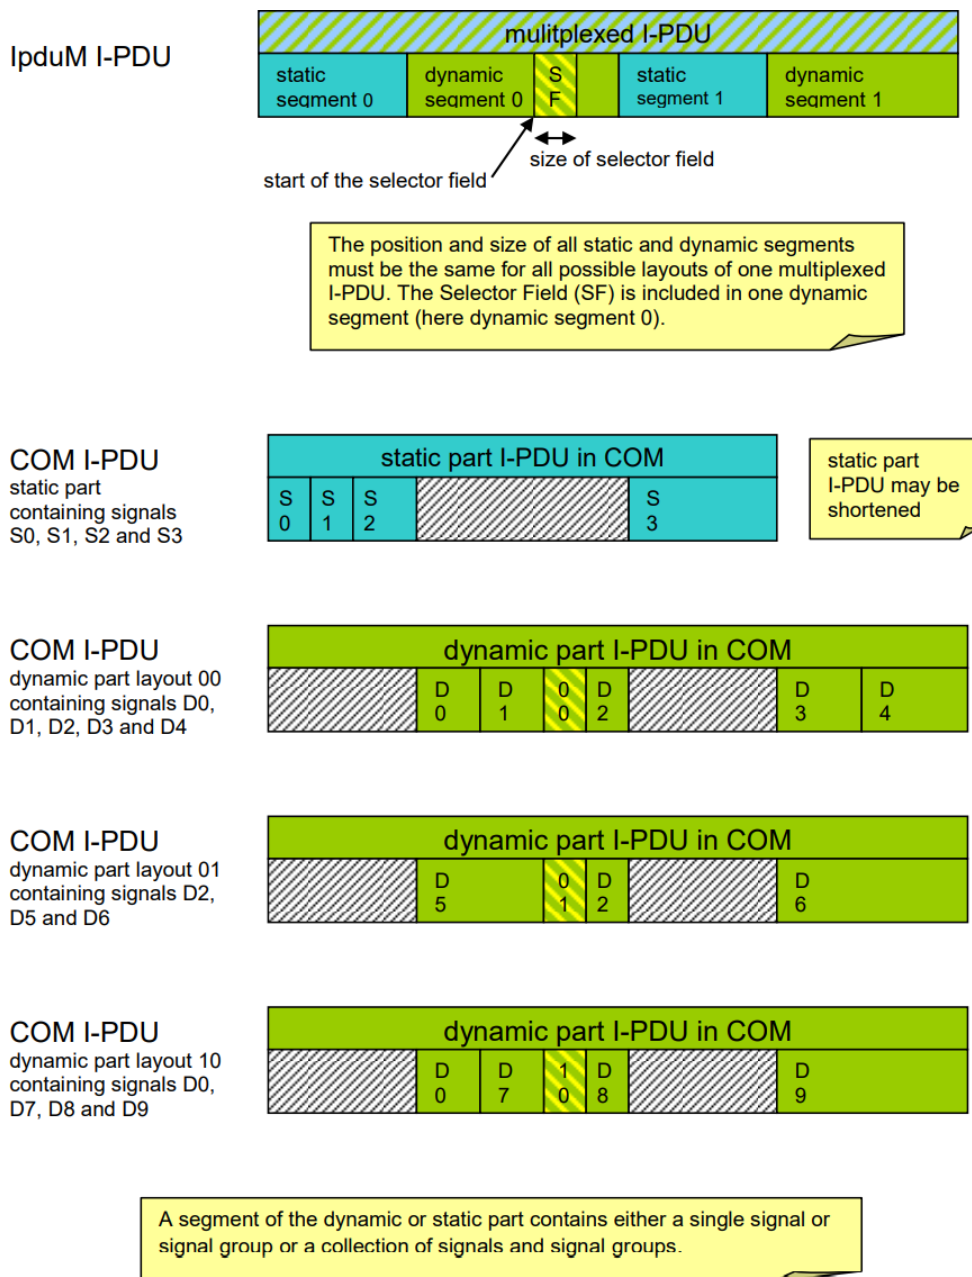

**Figure 7.1: Possible layout of a multiplexed I-PDU with shortened static part**

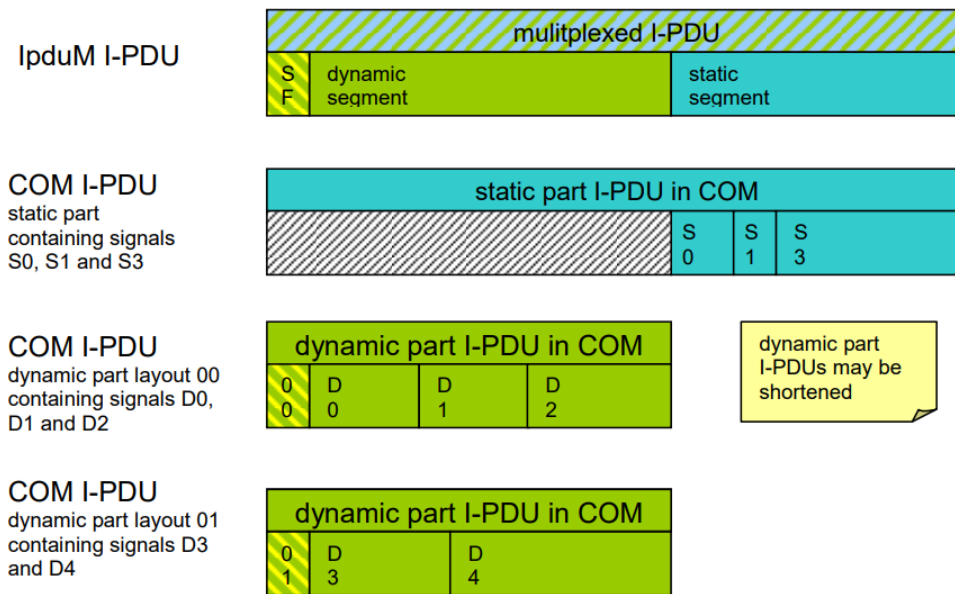

**Figure 7.2: Possible layout of a multiplexed I-PDU with shortened dynamic parts**

## 7.2.2 General

There is one COM I-PDU for the static part and one COM I-PDU for each layout of the dynamic part of one multiplexed IpduM I-PDU, so the IpduM combines at most two I-PDUs of COM.

### [SWS\_IpduM\_00098]

Upstream requirements: [SRS\\_IpduM\\_02809](#)

[The IpduM module shall not set the selector field.]

The IpduM module relies on the configuration of the COM module. For each dynamic layout, an I-PDU needs to be configured in COM. Such I-PDUs already have to contain the correct selector field value. The selector field values in COM can be initialized by configuring them as signals that are initialized with an init value but are never written after initialization.

### [SWS\_IpduM\_00173]

Upstream requirements: [SRS\\_IpduM\\_02801](#), [SRS\\_IpduM\\_02802](#)

[The IpduM shall respect the [IpduMByteOrder](#) when interpreting the selector field value.]

For a detailed description of the transmission and reception of a multiplexed I-PDU see Chapter [7.2.4](#) and [7.2.5](#).

**[SWS\_IpduM\_00140]**

*Upstream requirements:* [SRS\\_BSW\\_00384](#), [SRS\\_IpduM\\_02812](#)

[It shall be allowed to optimize the Rx- and Tx-Confirmation path from the IpduM module via the PDU Router module to the COM layer to call the COM API directly from the IpduM module without including the PDU Router. This shall be indicated by setting the published parameter [IpduMRxDirectComInvocation](#) to TRUE, see [\[ECUC\\_IpduM\\_00142\]](#).]

In case of the COM invocation, optimization as defined above `IpduM.c` needs to include `Com.h`.

**7.2.3 Initialization**

The IpduM module provides an initialization function [IpduM\\_Init](#) defined in [\[SWS\\_IpduM\\_00032\]](#). This function initializes all internal global variables and the buffers of the IpduM I-PDUs. For more details, see Chapter [8.3.1](#).

The environment of the IpduM shall call [IpduM\\_Init](#) before calling any other function of the IpduM module.

The implementer has to ensure that [IPDUM\\_E\\_UNINIT](#) is returned in development mode in case an API function (except [IpduM\\_MainFunctionTx](#), [IpduM\\_MainFunctionRx](#) and [IpduM\\_GetVersionInfo](#)) is called before the module is initialized.

For the I-PDU data transmission pathway through the IpduM module, a buffer is allocated inside the IpduM module. This buffer needs to be initialized because it might be transmitted before it has been fully populated with data by the COM module. The initialization data of this buffer is derived from the initial values of the COM module's configuration as follows:

**1. [SWS\_IpduM\_00067]**

*Upstream requirements:* [SRS\\_IpduM\\_02809](#)

[The IpduM shall initialize its internal transmit buffers with the configured pattern [IpduMIPduUnusedAreasDefault](#).]

**2. [SWS\_IpduM\_00068]**

*Upstream requirements:* [SRS\\_IpduM\\_02809](#)

[The initial signal values of the initial dynamic part shall be set according to initial values of the referenced COM I-PDU ([IpduMInitialDynamicPart](#) -> [IpduMTxDynamicPart](#) -> [IpduMTxDynamicPduRef](#)).]

### 3. [SWS\_IpduM\_00143]

*Upstream requirements:* [SRS\\_IpduM\\_02809](#)

[The initial signal values of the static part shall be set according to the initial values of the referenced COM I-PDU ([IpduMTxStaticPart](#) -> [IpduMTxStaticPduRef](#)).]

The selector field is contained within one segment of the initial dynamic part and therefore is initialized implicitly.

For optimization, the initial bit pattern for the buffer can be worked out at configuration-time and then copied at run-time.

## 7.2.4 Transmission

Inside COM, there are separated I-PDUs for the static part and one for each dynamic part of a multiplexed I-PDU.

The static part and the dynamic parts are treated in COM as separate I-PDUs with their own I-PDU IDs.

### [SWS\_IpduM\_00015]

*Upstream requirements:* [SRS\\_IpduM\\_02816](#)

[For a multiplexed I-PDU [IpduM](#) shall merge the corresponding two COM I-PDUs representing the associated static part and the last received dynamic part into one single [IpduM](#) I-PDU with a new unique I-PDU ID. [IpduM](#) shall send out this new [IpduM](#) I-PDU to the PDU Router module.]

See also [Figure 5.1](#).

For details about the trigger of the transmission, see Chapter [7.2.4.2](#).

All control functionalities like deadline monitoring of the COM I-PDUs and update-bit evaluation are out of the scope of the [IpduM](#) and have to be done by the COM layer. For details about the timing-behavior of the new combined I-PDU see Chapter [7.2.4.2](#).

### 7.2.4.1 Transmission request

The [IpduM](#) module provides an [IpduM\\_Transmit](#) function so that the PDU Router is able to initiate the transmission of an I-PDU; see [\[SWS\\_IpduM\\_00043\]](#).

### [SWS\_IpduM\_00017]

*Upstream requirements:* [SRS\\_IpduM\\_02816](#)

[The function [IpduM\\_Transmit](#) shall assemble the multiplexed I-PDU, using the related static and dynamic part, and transmit it according to the trigger conditions/ modes as defined in [\[SWS\\_IpduM\\_00021\]](#) and [\[ECUC\\_IpduM\\_00125\]](#).]



As defined in Chapter 7.2.3, each outgoing I-PDU has an initial value so that, should an I-PDU be transmitted by the IpduM module before both static and dynamic parts have been sent from COM to the IpduM, a value defined by the configuration is transmitted.

#### [SWS\_IpduM\_00152]

*Upstream requirements:* [SRS\\_IpduM\\_02814](#)

[As long as no transmission confirmation for the IpduM I-PDU is received (regardless of the result), the function [IpduM\\_Transmit](#) shall return `E_NOT_OK` for any new transmission request from the upper layer with a COM I-PDU belonging to the same IpduM I-PDU.]

The IpduM module relies here on a configured transmission configuration in the lower layer.

In case a multiplexed I-PDU is only triggered for sending by either updating the dynamic or static part, the non-triggering part might be overwritten if updated multiple times between two transmissions.

### 7.2.4.2 Transmission trigger

The IpduM module receives the static and the dynamic part of a multiplexed I-PDU by separated two transmission requests as two single COM I-PDUs from the PDU Router module.

#### [SWS\_IpduM\_00021]

*Upstream requirements:* [SRS\\_IpduM\\_02811](#)

[The IpduM module shall be configurable to send a transmission request for the new multiplexed I-PDU to the PDU Router because of the following trigger conditions/-modes:

- receiving a static part
- receiving a dynamic part
- receiving a static or a dynamic part
- does not trigger transmission because of receiving anything of this I-PDU ([IpduMTxTriggerMode](#) None) in case of `TriggerTransmit`

For configuration, see [\[ECUC\\_IpduM\\_00052\]](#).

The four trigger conditions/ modes defined by [\[SWS\\_IpduM\\_00021\]](#) allow controlling the transmission mode of the new assembled I-PDU by the transmission modes of the single I-PDUs sent by COM, see also [\[3\]](#).

Not all of four trigger conditions/ modes defined by [\[SWS\\_IpduM\\_00021\]](#) guarantee the minimum delay time between consecutive transmissions of different instances of multiplexed I-PDUs, because if the transmission is triggered by static and dynamic part

or only by the dynamic part, COM does not take care for the minimum delay time. COM treats the static part and the different dynamic parts as unrelated stand-alone I-PDUs.

The configuration "does not trigger transmission because of receiving anything" is needed if an I-PDU is only sent out because of a `TriggerTransmit` of a lower layer. With the API `IpduM_TriggerTransmit` it is possible for lower layers to trigger a send out of an I-PDU.

In case the `IpduMTxTriggerMode` is `None` and the lower layer triggers the transmission via `IpduM_TriggerTransmit`, the `IpduMTxConfirmationPduId` needs to be configured since this ID is also used for resolving the I-PDU in case of `IpduM_TriggerTransmit`, see also [ECUC\_IpduM\_00158].

### 7.2.4.3 Just-In-Time update of parts

Sometimes it may be unwanted that the `IpduM` module not just sends out the locally stored parts, since these parts may contain outdated information e.g. update-bits. Therefore, the `IpduM` supports a per part configurable just-in-time update mechanism.

#### [SWS\_IpduM\_00168]

*Upstream requirements:* [SRS\\_IpduM\\_02811](#)

[In case the transmission of a multiplexed I-PDU is triggered by the update of one part and `IpduMJitUpdate` is configured to true for the second part, the `IpduM` module shall update the second part via `PduR_IpduMTriggerTransmit` before the multiplexed I-PDU is sent out via `PduR_IpduMTransmit`.]

#### [SWS\_IpduM\_00169]

*Upstream requirements:* [SRS\\_IpduM\\_02816](#)

[In case the contents of a multiplexed I-PDU is requested via `IpduM_TriggerTransmit`, the `IpduM` module shall update all parts which have `IpduMJitUpdate` configured to true before returning the contents of the multiplexed I-PDU.]

#### [SWS\_IpduM\_00223]

*Upstream requirements:* [SRS\\_IpduM\\_02816](#)

[In case the `IpduM` shall update the dynamic part just-in-time, the latest dynamic part sent by the upper layer shall be updated or the dynamic part referenced by `IpduMInitialDynamicPart` if no dynamic part was sent before.]

#### [SWS\_IpduM\_00171]

*Upstream requirements:* [SRS\\_IpduM\\_02816](#)

[In case the transmission of a multiplexed I-PDU is triggered by the update of one part and `IpduMJitUpdate` is configured to true for the second part, the multiplexed I-PDU shall not be send if the JIT-update request via `PduR_IpduMTriggerTransmit` returns `E_NOT_OK`.]

**[SWS\_IpduM\_00172]**

*Upstream requirements:* [SRS\\_IpduM\\_02816](#)

[In case the contents of a multiplexed I-PDU is requested via [IpduM\\_TriggerTransmit](#) and [IpduMJitUpdate](#) is configured to true for any multiplexed part, [IpduM\\_TriggerTransmit](#) shall return `E_NOT_OK` if any of the JIT-update requests via [PduR\\_IpduMTriggerTransmit](#) return `E_NOT_OK`.]

**7.2.4.4 Transmission confirmation**

Transmission confirmations are given to the IpduM module by the PDU Router according to the configuration of the I-PDUs in the PDU Router.

**[SWS\_IpduM\_00022]**

*Upstream requirements:* [SRS\\_IpduM\\_02813](#), [SRS\\_IpduM\\_02818](#)

[If the IpduM receives a TxConfirmation for a specific IpduM I-PDU, it shall translate this confirmation into the corresponding confirmations for the COM I-PDUs, which were contained in the last sent out multiplexed IpduM I-PDU.]

Depending on the configuration of [IpduMTxDynamicConfirmation](#) and [IpduMTxStaticConfirmation](#), the IpduM will pass zero, one or two confirmations towards COM for one send request. The number of confirmations given to the upper layer does not depend on the [IpduMTxTriggerMode](#).

Examples:

- If neither [IpduMTxDynamicConfirmation](#) nor [IpduMTxStaticConfirmation](#) for the corresponding [IpduMTxRequest](#) is configured to true, no COM confirmation is generated.
- If [IpduMTxStaticConfirmation](#) is configured to true but and [IpduMTxDynamicConfirmation](#) is configured to false (or vice versa), then only one COM confirmation is generated.
- If both [IpduMTxStaticConfirmation](#) and [IpduMTxDynamicConfirmation](#) is configured to true, then two COM confirmations are generated; to the I-PDU representing the static part and the I-PDU representing the dynamic part.

In case two transmission confirmations are generated, they are obviously equal, since they are derived from the same I-PDUM transmission confirmation.

**7.2.5 Reception**

Every I-PDU which is received by the Communication Hardware Abstraction (CAN Interface, Lin Interface, FlexRay Interface) is given to the PDU Router. The PDU Router

routes multiplexed I-PDUs to the IpduM module. The IpduM module separately routes the static and dynamic parts of the multiplexed I-PDU to their destinations.

It is known at configuration-time which incoming I-PDU IDs correspond to multiplexed I-PDUs with a static part configured. The I-PDU ID is all that is necessary to work out if there is a static part present.

There are no requirements to handle or notify wrongly configured parts. Hence, if the received I-PDU contains segments not configured for reception on this ECU, they will be ignored silently. Furthermore, if an I-PDU is configured with a PduLength of 0, it will also be ignored silently, since no meaningful processing can be configured.

This situation might occur in a gateway setting, if a multiplexed I-PDU is always routed onto another bus by the PDU Router, but contains a signal in one dynamic part that must be passed to the application. In this case, the multiplexed PDU would have to be routed to the IpduM as well.

### 7.2.6 Metadata handling

The requirements of this section only apply if `IpduMMetaDataSupport` is configured to true.

#### [SWS\_IpduM\_00225]

*Upstream requirements:* [SRS\\_IpduM\\_02816](#)

[If `IpduMTxTriggerMode` is configured to a different value than `NONE`, the IpduM shall use the MetaData of the triggering part for sending of the multiplexed I-PDU.]

#### [SWS\_IpduM\_00226]

*Upstream requirements:* [SRS\\_IpduM\\_02816](#)

[If `IpduMTxTriggerMode` is configured to `NONE`, the IpduM shall use the MetaData of the last updated part for sending of the multiplexed I-PDU.]

#### [SWS\_IpduM\_00227]

*Upstream requirements:* [SRS\\_IpduM\\_02817](#)

[On receiver side the IpduM shall forward the received MetaData along with all demultiplexed parts.]

## 7.3 Multiple-PDU-to-Container handling

IpduM supports a mapping of several I-PDUs to one Container PDU. Both contained and Container PDUs are *regular* PDUs from PduR's point of view. The Container layout can either be dynamically defined using headers in front of the contained I-PDUs or statically without headers but defined static positions for contained I-PDUs.

IpduM relies on PduR being configured to forward send-PDUs mapped to a Container-PDU and received Container-PDUs to IpduM.

### 7.3.1 Dynamic Container Layout

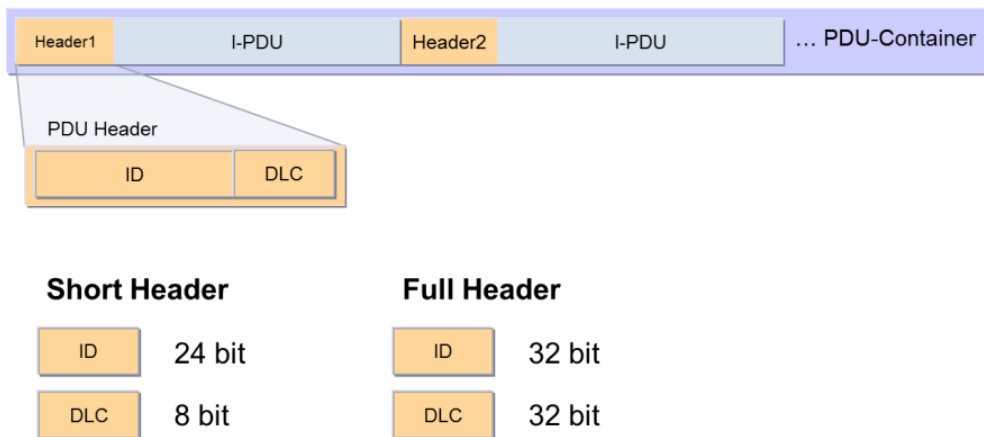


Figure 7.3: Layout of a dynamic Container

#### [SWS\_IpduM\_00175]

Status: DRAFT

Upstream requirements: [SRS\\_IpduM\\_02820](#)

[Inside a dynamic Container PDU IpduM shall place the header of a contained I-PDU in front of the contained I-PDU.]

See also Figure [7.3](#).

For dynamic Container PDUs, there is no configuration of the positions of contained I-PDUs inside the Container PDU, thus the position of an arbitrary contained I-PDU is determined by the length of payload (DLC) and headers of the preceding (added before) contained I-PDUs.

The number of I-PDUs contained in a Container PDU is limited by the maximum size of the Container PDU (PDULength of ECUC-PDU).

The following approaches regarding the order inside the Container I-PDU are possible:

- retained order (see [\[SWS\\_IpduM\\_00179\]](#) and [\[SWS\\_IpduM\\_00209\]](#)): the order of the contained I-PDUs inside the Container PDU will be retained. This way all contained I-PDUs are extracted in the same order as they have been put into the Container PDU.
- order by priority: the order of the contained I-PDUs inside the Container PDU is based on the configured priority.
- For Dynamic Container: Max fill-up strategy - the order of the contained I-PDUs inside a container PDU with last-is-best semantics is based on a mix to retain the

order by priority and by trying to fill-up a Container PDU to its maximum size of available contained I-PDUs.

The IpduM supports two different header sizes for dynamic Container PDUs (see [IpduMContainerHeaderSize](#)):

- [IPDUM\\_HEADERTYPE\\_SHORT](#) with 24 bit ID and 8 bit length
- [IPDUM\\_HEADERTYPE\\_LONG](#) with 32 bit ID and 32 bit length

The header sizes are configured per Container PDU via [IpduMContainerHeaderSize](#). Thus, it is valid for the whole Container PDU. Mixing of header sizes inside one Container PDU is not supported.

#### [SWS\_IpduM\_00177]

*Upstream requirements:* [SRS\\_IpduM\\_02822](#)

[Each I-PDU header shall consist of ID field and length field in the byte order determined by [IpduMHeaderByteOrder](#).]

#### [SWS\_IpduM\_00178]

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02823](#)

[Placing of headers and payloads of contained I-PDUs inside a dynamic Container PDU shall be contiguous without any gap.]

Rationale: This allows iterating over a Container PDU by considering the header size and payload lengths (DLC from header).

This has to be ensured by the implementation of the container collection algorithm, since contained I-PDUs have no dedicated (configured) position inside a Container PDU.

### 7.3.2 Static Container Layout

To enable the static container layout, the [IpduMContainerHeaderSize](#) of the Container PDU has to be configured to [IPDUM\\_HEADERTYPE\\_NONE](#).

#### [SWS\_IpduM\_00232]

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[If the [IpduMContainerHeaderSize](#) is set to [IPDUM\\_HEADERTYPE\\_NONE](#), the IpduM module shall statically place the contained I-PDUs within the Container PDU according to their configured [IpduMContainedPduOffset](#).]

For the Static Container Layout only contained I-PDUs with [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) is supported (see [ECUC\\_IpduM\\_00198](#)).

### 7.3.3 Transmission

The requirements within this section and its subsections apply to the transmission of Dynamic Containers and Static Containers. Deviations are explicitly mentioned.

#### 7.3.3.1 Transmission request

IpduM collects transmission requests for contained I-PDUs from the upper layers per Container PDU. Along with a transmission request the IpduM has to provide a buffer for the corresponding contained I-PDUs based on the configuration:

- In case the Container PDU has `IpduMContainedTxPduCollectionSemantics` set to `IPDUM_COLLECT_QUEUED`, the IpduM stores the corresponding contained I-PDU internally.
- In case the Container PDU has `IpduMContainedTxPduCollectionSemantics` set to `IPDUM_COLLECT_LAST_IS_BEST`, the IpduM has to store transmission requests. If a Container PDU is transmitted, the IpduM fetching the data of the contained I-PDUs according to the transmission requests from the I-PDU buffer of the corresponding upper layer.

Independent of the buffer strategy, if a transmission request for a Contained I-PDU is indicated, the specification use the term that a “transmission request of a contained I-PDU is assigned to a Container PDU”.

#### 7.3.3.2 Transmission trigger condition

The trigger condition for a transmission of a Container PDU is influenced by several configurable transmission trigger and by transmission trigger which could occur on runtime:

- `IpduMContainedTxPduTrigger`: `IPDUM_TRIGGER_ALWAYS`, `IPDUM_TRIGGER_NEVER`
- `IpduMContainerTxFirstContainedPduTrigger`
- `IpduMContainerTxSendTimeout`
- `IpduMContainedTxPduSendTimeout`
- Only for Dynamic Container: `IpduMContainerTxSizeThreshold`
- Only for Dynamic Container: Exceed maximum size of the Container PDU
- Only for Static Container: All contained I-PDUs of the same Container PDU were updated (see [[SWS\\_IpduM\\_00234](#)])



The first occurrence of a transmission trigger for an instance of a Container PDU triggers the transmission process. Any further occurrence of a transmission trigger to that instance of Container PDU will not impact the transmission process.

#### **[SWS\_IpduM\_00274] Behaviour for the occurrence of multiple assigned transmission requests**

*Upstream requirements:* [SRS\\_IpduM\\_02827](#)

[If a Container PDU has been triggered for transmission, then any further transmission trigger for that instance of Container PDU shall be ignored.]

The IpduM need to consider displacement of contained I-PDUs. Contained I-PDUs are called "displaced contained I-PDUs", if they fit in a Container PDU at the time when the transmission request occurred, but at assembly time of the Container PDU they could not be considered to be placed in that Container PDU, due to lacking of space. Displaced contained I-PDUs could potentially occur under either the following configuration constellations:

- Dynamic Container configured with [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) and contained I-PDU with dynamic PDU length
- Dynamic Container where priority handling for contained I-PDUs is enabled ([IpduMContainedTxPduPriorityHandling](#) set to TRUE)

Example for displacement of an contained I-PDU: A Container PDU is configured with [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) and a contained I-PDU with dynamic PDU length. A transmission request of the contained I-PDU with dynamic PDU length has already been assigned to the Container PDU. A further transmission request of a contained I-PDU occurs, that fills up the Container PDU to its maximum size, such that this contained PDU could be placed in this Container PDU. This would trigger the transmission of that Container PDU. In the mean time the length of the contained I-PDU with dynamic PDU length has been enlarged. The Container PDU is assembled, with result that the last contained I-PDU could not be considered for this Container PDU instance. Thus, the last contained I-PDU which had been placed in the Container PDU and fit in that Container PDU at the point in time when the transmission for that contained PDU was requested, is displaced at assembly time due to the enlarged contained I-PDU with dynamic PDU length.

The IpduM need to balance between configurable transmission trigger and transmission trigger that occurs on runtime (e.g. processing of time out handling) for a Container PDU. The following requirements reflect the transmission trigger condition rules.

#### **[SWS\_IpduM\_00276] Qualification of displaced contained I-PDUs**

*Upstream requirements:* [SRS\\_IpduM\\_02827](#)

[The IpduM shall qualify a contained I-PDU as displaced contained I-PDU, if a contained I-PDU had enough space to be placed in the Container PDU at time when the transmission request was assigned to that instance of Container PDU, but at the assembly time this contained I-PDU could not be considered, due to lack of space.



Displacement of contained I-PDUs shall be considered for either the following configuration constellations:

- Dynamic Container configured with `IPDUM_COLLECT_LAST_IS_BEST` and contained I-PDU with dynamic PDU length
- Dynamic Container where priority handling for contained I-PDUs is enabled (`IpduMContainedTxPduPriorityHandling` set to TRUE)

]

### **[SWS\_IpduM\_00272] Overruling time out handling**

*Upstream requirements:* [SRS\\_IpduM\\_02827](#)

[The following transmission trigger conditions shall always overrule the time out handling (see `IpduMContainerTxSendTimeout` and `IpduMContainedTxPduSendTimeout`) of a Container PDU:

- `IPDUM_TRIGGER_ALWAYS`
- `IpduMContainerTxFirstContainedPduTrigger`
- Only for Dynamic Container: `IpduMContainerTxSizeThreshold`
- Only for Dynamic Container: Exceed maximum size of the Container PDU
- Only for Static Container: All Contained PDUs of the same Container PDU were updated (see [\[SWS\\_IpduM\\_00234\]](#))

]

### **[SWS\_IpduM\_00273] Behaviour of an overruled and running time out timer**

*Upstream requirements:* [SRS\\_IpduM\\_02827](#)

[If a time out handling of a Container PDU is overruled and the time out timer is already running for this Container PDU, then the time out timer shall be canceled.]

### **[SWS\_IpduM\_00279] Remaining time out timer value of a canceled timer at a Container PDU instance**

*Upstream requirements:* [SRS\\_IpduM\\_02827](#)

[A time out timer value of a canceled timer shall remain at the Container PDU instance, where contained I-PDUs could potentially be displaced. If a time out timer already elapsed, then the remaining timer value shall be set to zero.]

### **[SWS\_IpduM\_00277] Time out handling for a new Container PDU instance, where a displaced contained I-PDUs is added**

*Upstream requirements:* [SRS\\_IpduM\\_02827](#)

[If a displaced contained I-PDU was shifted from a Container PDU instance where a remaining time out timer value is available and this displaced container I-PDU is placed in a new Container PDU instance, then the time out handling of the new Container PDU

instance shall continue with the remaining timer value of the previous Container PDU instance.]

**[SWS\_IpduM\_00278] Handling for displaced contained I-PDUs where the remaining time out timer value was set to zero**

*Upstream requirements:* [SRS\\_IpduM\\_02827](#)

[If a displaced contained I-PDU was shifted from an Container PDU instance where the remaining time out timer value was set to zero and this displaced container I-PDU is placed in a new Container PDU instance, then the new instance of a Container PDU shall immediately be triggered for transmission.]

Note: Handling of displaced contained I-PDUs could cause transmission bursts on the network

**[SWS\_IpduM\_00181]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When assigning a transmission request of a contained I-PDU to a Container PDU which has not been triggered yet, and if [IpduMContainedTxPduTrigger](#) is set to [IPDUM\\_TRIGGER\\_ALWAYS](#), the Container PDU shall be triggered immediately.]

**[SWS\_IpduM\_00201]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When assigning the first transmission request of a contained I-PDU to a Container PDU with the parameter [IpduMContainerTxFirstContainedPduTrigger](#) set to TRUE, the Container PDU shall be triggered for transmission.]

Note: A Container PDU with transmission trigger set to [IpduMContainerTxFirstContainedPduTrigger](#) could be used for example to request transmission for a time-triggered bus.

**[SWS\_IpduM\_00184]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When assigning the first transmission request of a contained I-PDU to a Container PDU and either [IpduMContainerTxSendTimeout](#) of the Container PDU or [IpduMContainedTxPduSendTimeout](#) of the contained I-PDU is configured greater than zero and this Container PDU was not already triggered for transmission (see [\[SWS\\_IpduM\\_00272\]](#)), the IpduM module shall start the transmission timer of the Container PDU. The timer shall be initialized with the smaller non zero value of [IpduMContainerTxSendTimeout](#) and [IpduMContainedTxPduSendTimeout](#).]

**[SWS\_IpduM\_00185]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When a transmission request of a contained I-PDU is assigned to a Container PDU and this Container PDU was not already triggered for transmission (see [\[SWS\\_IpduM\\_00272\]](#)), the transmission timer of the Container PDU shall be updated

with the contained I-PDU's timeout (`IpduMContainedTxPduSendTimeout`) if it is less than the remaining time of the Container PDU.]

**[SWS\_IpduM\_00186]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When the transmission timer of the Container PDU defined by [\[SWS\\_IpduM\\_00184\]](#) has elapsed, the Container PDU shall be triggered.]

Note: If neither the `IpduMContainedTxPduSendTimeout` nor the `IpduMContainerTxSendTimeout` is provided to the Container PDU and its Contained PDUs, the `IpduM` module will not trigger the Container PDU by the transmission timer of the Container PDU (no timeout-based triggering for the Container PDU).

**[SWS\_IpduM\_00180]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When assigning a transmission request of a contained I-PDU to a Container PDU that has not been triggered yet, and if the resulting payload of this Container PDU is bigger than `IpduMContainerTxSizeThreshold`, then the Container PDU shall be triggered.]

Note: The transmission trigger condition if exceeding the maximum size of the Container PDU is specified in [\[SWS\\_IpduM\\_00182\]](#), [\[SWS\\_IpduM\\_00183\]](#) and [\[SWS\\_IpduM\\_00231\]](#).

### 7.3.3.3 Assembly of Container PDUs

Please note, “assembly of a Container PDU” is a generic phrase to describe the delivery of a Container PDU to the lower layer. If queueing is used (see chapter [7.3.3.5](#)), then the phrase denote to fetch an instance of a Container PDU from the internal queue. If last is best collection semantic is used (see [7.3.3.6](#)), then the phrase denotes to fetch the data from the according upper layer.

According to the evaluated trigger conditions, a Container PDU is triggered for transmission. The transmission process depends on the configuration (`IPDUM_DIRECT` or `IPDUM_TRIGGERTRANSMIT`):

- In case `IpduMContainerTxTriggerMode` is set to `IPDUM_DIRECT`, the Container PDU is assembled when the trigger condition result in a transmission of the Container PDU.
- In case `IpduMContainerTxTriggerMode` is set to `IPDUM_TRIGGERTRANSMIT`, the Container PDU is assembled when the lower layer indicate via `IpduMTriggerTransmit` the readiness of the hardware to transmit the Container PDU.

Independent how the Container PDU is conveyed to the transmission hardware buffer, the trigger of a Container PDU result in a call of `PduR_IpduMTransmit`.

**[SWS\_IpduM\_00188]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When a Container PDU is triggered and [IpduMContainerTxTriggerMode](#) is set to [IPDUM\\_DIRECT](#), IpduM shall assemble the Container PDU and handle the transmission process with respect to the configuration for the transmission queue (please refer to [\[SWS\\_IpduM\\_00261\]](#) and [\[SWS\\_IpduM\\_00262\]](#)).]

**[SWS\_IpduM\_00254]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When a Container PDU is triggered and [IpduMContainerTxTriggerMode](#) is set to [IPDUM\\_TRIGGERTRANSMIT](#), IpduM shall invoke [PduR\\_IpduMTransmit](#) with [SduDataPtr](#) set to NULL and [SduLength](#) according to the following preconditions:

- For static Container PDUs the [SduLength](#) shall be calculated with respect to [IpduMPduUpdateBitPosition](#) (see [\[SWS\\_IpduM\\_00241\]](#)), [IpduMContainedPduOffset](#) (see [\[SWS\\_IpduM\\_00242\]](#)) and length of last contained I-PDU, if having dynamic PDU length configured (see [\[SWS\\_IpduM\\_00246\]](#)).
- For dynamic Container PDUs the [SduLength](#) shall be calculated as specified in [\[SWS\\_IpduM\\_00187\]](#).

]

**[SWS\_IpduM\_00256]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When a Container PDU has been triggered and [IpduMContainerTxTriggerMode](#) is set to [IPDUM\\_TRIGGERTRANSMIT](#), IpduM shall assemble the Container PDU in the context of the API call [IpduM\\_TriggerTransmit](#).]

Note:

- [\[SWS\\_IpduM\\_00189\]](#) has to be considered for the transmission process
- Container PDUs with [IpduMContainerTxTriggerMode](#) set to [IPDUM\\_TRIGGERTRANSMIT](#) are assembled in the context of [IpduM\\_TriggerTransmit](#). Therefore the IpduM has to consider the following points for call of [PduR\\_IpduMTransmit](#):
  - The [SduDataPtr](#) has to be set to NULL, to indicate that the Container is not assembled yet.
  - The [SduLength](#) has to be set to the length with respect to the current available transmission requests. This is the minimum requested length to be considered by the lower layer. In the subsequential corresponding [IpduM\\_TriggerTransmit](#) call, the lower layer has to provide an available buffer length which is equal or greater than the minimum requested length.

- Container PDUs with `IpduMContainerTxTriggerMode` set to `IPDUM_TRIGGERTRANSMIT`, transmission requests are continuously collected, even after a call of `PduR_IpduMTransmit`:
  - For contained I-PDUs where `IpduMContainedTxPduCollectionSemantics` set to `IPDUM_COLLECT_QUEUED`: Contained I-PDUs could be added to Container PDUs until the Container PDU is fetched (see [SWS\_IpduM\_00194]) or unless maximum size of the Container PDU is not exceeded.
  - For contained I-PDUs where `IpduMContainedTxPduCollectionSemantics` is set to `IPDUM_COLLECT_LAST_IS_BEST`: transmission requests or updates of contained PDUs are considered until the Container PDU is fetched (see [SWS\_IpduM\_00256]).
  - The calculated minimum requested `SduLength` of a Container PDU within the call of `PduR_IpduMTransmit` (requested `SduLength`) could be different from the calculated `SduLength` of a Container PDU, when the Container PDU is assembled within the call of `IpduM_TriggerTransmit` (actual `SduLength`):
    - \* If using `IpduMContainedTxPduCollectionSemantics` set to `IPDUM_COLLECT_QUEUED`, actual `SduLength` could be equal or greater as the requested `SduLength`.
    - \* If using `IpduMContainedTxPduCollectionSemantics` set to `IPDUM_COLLECT_LAST_IS_BEST`, actual `SduLength` could be equal, greater or shorter as the requested `SduLength`. A shorter length is possible, if a contained I-PDU with dynamic PDU length was updated to a shorter length after `PduR_IpduMTransmit` was called and before the corresponding call of `IpduM_TriggerTransmit`.

#### 7.3.3.4 Transmission confirmation

##### [SWS\_IpduM\_00189]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[The `IpduM` shall wait for the transmission confirmation (regardless of the result) of a Container PDU before invoking `PduR_IpduMTransmit` for the next instance of that Container PDU.]

Note: The `IpduM` module relies here on a configured transmission confirmation for that Container PDU in the lower layer.

**[SWS\_IpduM\_00196]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If the IpduM receives a transmission confirmation for a specific Container PDU, it shall translate this confirmation into the corresponding confirmations for those contained I-PDUs having [IpduMContainedTxPduConfirmation](#) set to TRUE and were contained in the last transmission of this specific Container PDU.

This shall result in multiple TxConfirmations, if the same contained I-PDU was present more than once in this transmitted specific Container PDU.]

**7.3.3.5 Queueing**

For contained I-PDUs where the [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_QUEUED](#) a queueing of Container PDUs can be used (see [\[SWS\\_IpduM\\_00260\]](#)). In this case more than one instance of a Container PDU has to be kept by the IpduM, up to [IpduMContainerQueueSize](#) instances can be stored in addition to the current instance. The current instance is one instance of the Container PDU that currently contained I-PDUs are being added to. After this instance has either been queued or copied to the lower layer, i.e. after a [TriggerTransmit](#) or [Transmit](#) API call depending on the configuration of [IpduMContainerTxTriggerMode](#), no more contained I-PDUs can be added to this instance.

Note: Queued collection semantics guarantees that every instance/value of the contained I-PDU is visible on the wire.

**[SWS\_IpduM\_00261]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If a PDU Container is queued for transmission, and [IpduMContainerQueueSize](#) is not set (or set to 1), IpduM shall call [PduR\\_IpduMTransmit](#).]

**[SWS\_IpduM\_00262]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If a PDU Container is queued for transmission, and [IpduMContainerQueueSize](#) is > 1, IpduM shall store the Container PDU in a queue.]

**[SWS\_IpduM\_00195]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If [PduR\\_IpduMTransmit](#) has returned [E\\_NOT\\_OK](#), the same transmit request shall be repeated during the next call to [IpduM\\_MainFunctionTx](#) up to [IpduMMaxTransmitRetries](#) times. The instance of that Container PDU is queued in the meantime.]

See also [\[SWS\\_IpduM\\_00199\]](#).

### [SWS\_IpduM\_00190]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[In case the transmission confirmation for that Container PDU was received, the IpduM shall invoke `PduR_IpduMTransmit` for the next oldest instance of that Container PDU during the next call to `IpduM_MainFunctionTx` at the latest.]

### [SWS\_IpduM\_00191]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[In case `IpduMContainerTxTriggerMode` is set to `IPDUM_DIRECT`, and `PduR_IpduMTransmit` returns `E_OK` for that Container PDU, IpduM shall remove that instance from the queue.]

In this case instances of a Container-PDU can be lost, if a queue inside CanIf is used since a newer instance could overwrite a previous one. Such last-is-best behavior might not be desired in this case.

### [SWS\_IpduM\_00199]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If creating a new instance of a Container PDU would exceed `IpduMContainerQueueSize` the oldest instance shall be discarded. If `IpduMContainerQueueSize` is not configured the local instance shall be discarded. In both cases `IPDUM_E_QUEUEOVFL` shall be reported to [9, DET] via `Det_ReportRuntimeError`.]

### [SWS\_IpduM\_00200]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If `IpduMContainerTxTriggerMode` is set to `IPDUM_TRIGGERTRANSMIT`, a Container PDU instance shall be dropped from the queue if it is fetched by `IpduM_TriggerTransmit`.]

### [SWS\_IpduM\_00265] Handling of discarded container PDUs

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If an instance of a container PDU was discarded (see [SWS\_IpduM\_00199]), then `PduR_IpduMTxConfirmation` shall be called with result `E_NOT_OK` for every contained PDU that has `IpduMContainedTxPduConfirmation` enabled within that respective instance.]

### [SWS\_IpduM\_00193]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If `IpduMContainerTxTriggerMode` is set to `IPDUM_TRIGGERTRANSMIT`, IpduM shall keep and provide buffered data until it is fetched by a call to `IpduM_TriggerTransmit`.]



**[SWS\_IpduM\_00194]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If [IpduMContainerTxTriggerMode](#) is set to [IPDUM\\_TRIGGERTRANSMIT](#), [IpduM\\_TriggerTransmit](#) shall copy the oldest Container PDU instance in the queue. If the queue is empty/non-existent, the current instance of the Container PDU is copied. If the current instance of the Container PDU is empty/non-existent as well, [E\\_NOT\\_OK](#) is returned by [IpduM\\_TriggerTransmit](#).]

**7.3.3.6 Last-is-Best collection semantics**

For Container PDUs where the [IpduMContainedTxPduCollectionSemantics](#) is set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) a queueing of Container PDUs is not supported (see [\[SWS\\_IpduM\\_00260\]](#)).

Note: As soon as a contained I-PDU is configured to use last-is-best semantics, the following points have to be considered:

- not necessarily all instances/values of this contained I-PDU are visible on the wire. This behaviour becomes worse if using FlexRay bus systems and the application scheduling are not synchronized with the FlexRay cycle. This could impact communication where sequence counters are used (e.g. E2E protected communication).
- Extended interrupt runtime has to be considered, if e.g. CAN to CAN routing is used and the routing is performed in the context of the receive interrupt, since this would include at least reception, forwarding of a PDU and assembly of a Container PDU.

**[SWS\_IpduM\_00220]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[For contained I-PDUs, with [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#), [IpduM](#) shall use [PduR\\_IpduMTriggerTransmit](#) to fetch the PDU data from its upper layer immediately before it transfers the container I-PDU to the lower layer.]

While it seems natural to use [IpduMContainedTxPduCollectionSemantics](#) [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) in combination with [IpduMContainerTxTriggerMode](#) [IPDUM\\_TRIGGERTRANSMIT](#), it may also be used in combination with [IPDUM\\_DIRECT](#).

**7.3.4 Transmission of Dynamic Containers**

The requirements within this chapter and its subchapters complement the transmission for Dynamic Containers and do not apply to Static Containers.



**[SWS\_IpduM\_00187]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If a Container PDU is assembled (see [\[SWS\\_IpduM\\_00188\]](#) and [\[SWS\\_IpduM\\_00256\]](#)), IpduM shall calculate the overall size of the Container PDU. The total size builds up by the total of all payloads of the contained I-PDUs plus the total length of the corresponding headers. The result shall be the payload size of the Container PDU.]

**[SWS\_IpduM\_00192]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If a Container PDU has [IpduMContainerTxTriggerMode](#) set to [IPDUM\\_DIRECT](#) and this Container PDU has been assembled and is passed to PduR, the Parameter [PduInfoPtr](#) shall contain a pointer to the assembled Container PDU in [SduDataPtr](#) and the total length (according to [\[SWS\\_IpduM\\_00187\]](#)) in [SduLength](#).]

**[SWS\_IpduM\_00257]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If a Container PDU has [IpduMContainerTxTriggerMode](#) set to [IPDUM\\_TRIGGERTRANSMIT](#) and this Container PDU has been assembled in the context of the [IpduM\\_TriggerTransmit](#) call, the Parameter [PduInfoPtr](#) shall be updated with the total length (according to [\[SWS\\_IpduM\\_00187\]](#)) in [SduLength](#).]

**7.3.4.1 Queued collection semantics**

The order regarding the transmission request of the contained I-PDU is retained within the resulting Container PDU, if the Container PDU has [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_QUEUED](#).

Due to the following requirements IpduM will make sure that instances of a contained I-PDU (same PDU-ID) are transmitted (passed to PduR inside their Container PDUs) in exactly the same order as they are passed to IpduM.

**[SWS\_IpduM\_00179]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When a contained I-PDU with [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_QUEUED](#) (see [\[ECUC\\_IpduM\\_00198\]](#)) is passed to IpduM via [IpduM\\_Transmit](#), IpduM shall identify the associated Container PDU and append the contained I-PDU to its payload even if a previous instance of the contained I-PDU is already present in that Container PDU.]

This way a Container PDU can include more than one instance of the same I-PDU. The resulting behavior is FIFO-like in order to preserve the order of I-PDU instances being transmitted. Thus, the upper layer(s) of the receiving IpduM can implement either last-is-best or FIFO semantics.

**[SWS\_IpduM\_00182]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If a contained I-PDU has [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_QUEUED](#) (see [\[ECUC\\_IpduM\\_00198\]](#)), the [IpduMContainerTx-TriggerMode](#) is set to [IPDUM\\_DIRECT](#) and adding this contained I-PDU would exceed the maximum size of the Container I-PDU, first the Container PDU shall be triggered. The contained I-PDU shall be added to a new instance of the Container PDU.]

**[SWS\_IpduM\_00183]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If a contained I-PDU has [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_QUEUED](#) (see [\[ECUC\\_IpduM\\_00198\]](#)), the [IpduMContainerTx-TriggerMode](#) is set to [IPDUM\\_TRIGGERTRANSMIT](#) and adding this contained I-PDU would exceed maximum size of the Container PDU, first the Container PDU shall be queued. Then the contained I-PDU shall be added to a new instance of the Container PDU.]

**7.3.4.2 Triggered Transmission and Last-is-Best semantics**

In case of contained I-PDUs with [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#), the [IpduM](#) collects and stores the transmission requests for the contained I-PDUs.

**[SWS\_IpduM\_00231]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If a contained I-PDU has [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#), the transmission request is updated and the total length of the payloads plus the corresponding headers of all contained I-PDUs which are requested for transmission would exceed the maximum size of the Container PDU, then the Container PDU shall be triggered.]

Note: the overall size of the updated I-PDUs could fluctuate, if contained I-PDUs have dynamic size configured. Exceeding maximum size of the Container PDU leads to trigger the Container PDU. In case the Container PDU is assembled in the context of the [IpduM\\_TriggerTransmit](#), then the length of contained I-PDU configured with dynamic length could be updated as long as the call of the [IpduM\\_TriggerTransmit](#) is pending. This could lead to two scenarios:

1. If current length < updated length of the Container I-PDU with dynamic length, then may be not all contained I-PDUs could be added to the next transmission of the Container PDU.
2. If current length > updated length of the Container I-PDU with dynamic length, then may be the primal trigger condition “exceeding the maximum size of the Container PDU” is not valid anymore

In both cases, the Container PDU is assembled and transmitted with the latest available contained I-PDU with respect to maximum size of the Container I-PDU (see [SWS\_IpduM\_00259]).

#### [SWS\_IpduM\_00222]

*Upstream requirements:* SRS\_IpduM\_02821

[If a contained I-PDU has `IpduMContainedTxPduCollectionSemantics IPDUM_COLLECT_LAST_IS_BEST`, the Container PDU is assembled and if a `PduR_IpduMTriggerTransmit` returns `E_NOT_OK` for a contained I-PDU, `IpduM` shall omit this contained I-PDU silently and proceed with the assembly of the Container PDU.]

Note: The associated Container PDU has to be transmitted anyway without the omitted contained I-PDU.

#### 7.3.4.2.1 Order and re-sorting

The order regarding the transmission request of the contained I-PDU is either retained or re-sorted within the resulting Container PDU:

- In case the priority for a contained I-PDU (see `IpduMContainedTxPduPriorityHandling`) is disabled, the `IpduM` retains the order of the contained I-PDUs according to the passed transmission requests for the first occurrence.
- In case the priority for a contained I-PDU (see `IpduMContainedTxPduPriorityHandling`) is enabled, the `IpduM` resorts the order of the contained I-PDUs according to following preconditions.
  - If `IpduMContainedTxPduPriorityHandling` is set to `TRUE` and `IpduMContainerTxPduMaxFillUpStrategy` is set to `FALSE`, the contained I-PDUs of the resulting Container PDUs are ordered by the configured priority.
  - If `IpduMContainedTxPduPriorityHandling` is set to `TRUE` and `IpduMContainerTxPduMaxFillUpStrategy` is set to `TRUE`, in the first step the contained I-PDUs of the resulting Container PDUs are ordered by the configured priority. If space is left over in the Container PDU, the remaining available contained I-PDUs (where transmission request is available) are also checked and placed in the Container PDU if they fit into the left over space.

Note: It is not allowed to set `IpduMContainedTxPduPriorityHandling` to `FALSE` and `IpduMContainerTxPduMaxFillUpStrategy` to `TRUE`, since `IpduMContainerTxPduMaxFillUpStrategy` is only possible if `IpduMContainedTxPduPriorityHandling` is set to `TRUE` (see dependency of [ECUC\_IpduM\_00220]).

### [SWS\_IpduM\_00221]

*Upstream requirements:* [SRS\\_IpduM\\_02821](#)

[When a transmission request of a contained I-PDU is assigned to a Container PDU, the contained I-PDU has [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) and [IpduMContainedTxPduPriorityHandling](#) is set to FALSE, the IpduM shall retain the order in which the transmission requests are passed to IpduM. That is, the contained I-PDU of the first passed transmission request is placed at the beginning at the container and so on. If a transmission request of the same contained I-PDU is passed multiple times, the IpduM shall store it only once at the position matching its first occurrence.]

Note: Multiple triggers of the same contained I-Pdu during collection of one Container PDU will result in a Container PDU which contains exactly one instance of this contained I-PDU, in case [IpduMContainedTxPduCollectionSemantics](#) is set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#).

### [SWS\_IpduM\_00249]

*Upstream requirements:* [SRS\\_IpduM\\_02823](#)

[When transmission requests of contained I-PDUs are assigned to a Container PDU, the contained I-PDUs with [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) and [IpduMContainedTxPduPriorityHandling](#) is set to TRUE, the IpduM shall collect the transmission request in respect to the [IpduMContainedTxPduPriority](#) (highest priority first and so on). Transmission requests of contained I-PDUs with the same [IpduMContainedTxPduPriority](#) shall be collected in the order the transmission request occurred.]

### [SWS\_IpduM\_00258]

*Upstream requirements:* [SRS\\_IpduM\\_02823](#)

[If a container PDU is assembled and the contained PDUs have [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#), the IpduM shall place the contained I-PDUs in the container I-PDU with respect to the configuration and resulting order according to [\[SWS\\_IpduM\\_00221\]](#) and [\[SWS\\_IpduM\\_00249\]](#).]

### [SWS\_IpduM\_00259]

*Upstream requirements:* [SRS\\_IpduM\\_02823](#)

[If a container PDU is assembled where the contained PDUs have [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) and [IpduMContainerTxPduMaxFillUpStrategy](#) is set to FALSE:  
When placing a contained I-PDU would exceed maximum size of the Container PDU, the IpduM shall finish the assembly process and keep the remaining transmission requests for the next transmission.]

**[SWS\_IpduM\_00264] Container PDU fill up strategy for Last-is-best contained I-PDUs**

*Upstream requirements:* [SRS\\_IpduM\\_02823](#)

[If a container PDU is assembled where the contained PDUs have `IpduMContainedTxPduCollectionSemantics` set to `IPDUM_COLLECT_LAST_IS_BEST` and the `IpduMContainerTxPduMaxFillUpStrategy` is set to `TRUE`:

When adding a contained I-PDU would exceed the maximum size of the Container PDU, the IpduM shall switch to iterating over the remaining transmission requests in the following order, adding all contained I-PDUs that fit in the remaining space in the container PDU:

1. Start with the oldest transmission request of the highest priority.
2. Continue through the transmission requests of the same priority unto the newest transmission request until a contained PDU does not fit.
3. Go to the next lower priority and continue with 2. until all transmission requests have been checked or the container PDU is full.

]

[\[SWS\\_IpduM\\_00264\]](#) effectively switches the behavior from strictly following FiFo and PDU priorities to filling the remaining space with any queued contained I-PDUs that will fit without reordering PDUs in the request queues.

Note: Using the maximum fill-up strategy (`IpduMContainerTxPduMaxFillUpStrategy` set to `TRUE`) may lead to a re-ordering of contained I-PDUs on the bus regarding their priority or the sequence of transmission requests. Priority inversion within a Container PDU is therefore a potential side effect of this strategy. Starvation of contained I-PDUs can be avoided by a suitable network communication design, especially by a careful assignment of contained I-PDUs.

### 7.3.5 Transmission of Static Containers

The requirements within this chapter and its subchapters complement the transmission for Static Containers and do not apply to Dynamic Containers.

**[SWS\_IpduM\_00234]**

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[For Container PDUs with static container layout and `IpduMContainerTxTriggerMode` is set to `IPDUM_DIRECT`, the IpduM shall trigger the Container PDU when all contained I-PDUs were updated by the upper layer.]

Since, Static Container might include not updated contained I-PDUs, there are means to detect the currentness of contained I-PDUs on receiver side. Either update-bits

for contained I-PDUs or an unused area default pattern might be configured. For the concrete configuration and configuration rules, see Chapter 10.

**[SWS\_IpduM\_00235]**

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[In case a contained I-PDU has a configured [IpduMPduUpdateBitPosition](#), the IpduM shall ensure that the update bit of this contained I-PDU is set if and only if the contained I-PDU was successfully updated.]

**[SWS\_IpduM\_00233]**

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[In case a Static Container has a configured [IpduMUnusedAreasDefault](#), the IpduM shall ensure that all not updated areas of the Container are set to the value of [IpduMUnusedAreasDefault](#) before the Container PDU is sent.]

This allows the IpduM to handle contained I-PDUs with dynamic length also within static containers. However, the receiving IpduM is not able to detect if the SWC or the sending IpduM set the [IpduMUnusedAreasDefault](#)-value. Hence, always the complete, thus eventually filled up contained I-PDU, will be received.

It must be observed, that some bus-systems (eg. CAN-FD and FlexRay) cannot transfer PDUs of arbitrary length and might fill up the sent I-PDU to the next possible length with their own default value. Hence, the configuration of the [IpduMUnusedAreasDefault](#) value and the bus-specific padding-pattern should be aligned.

**[SWS\_IpduM\_00253]**

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[When sending a Static Container PDU, the IPduM shall reduce the size of the Container PDU by omitting not updated data behind the last updated PDU and the last update bit.]

Caveat: By reducing the size of a Container PDU and applying a padding by the underlying bus, it is possible that on receiver side a contained PDU with the padding pattern of the bus is received. If this is not acceptable, it should be considered using update-bits for the contained PDUs or the system designer has to cope with this by other means.

### 7.3.6 Reception

There exist two possible ways how the reception of a received Container PDU can be processed by the IpduM:

- accept configured

- accept all (only for `IPDUM_HEADERTYPE_LONG` and `IPDUM_HEADERTYPE_SHORT`)

**[SWS\_IpduM\_00202]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If `IpduMContainerPduProcessing` is set to `IPDUM_PROCESSING_IMMEDIATE`, the processing of the received Container PDUs shall be executed in the context of `IpduM_RxIndication`. Otherwise, it is deferred to the next call to `IpduM_MainFunctionRx`. All deferred Container PDUs shall be processed in the order of their reception.]

**[SWS\_IpduM\_00203]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If by a call of `IpduM_RxIndication` a Container PDU is received, the contained I-PDUs shall be extracted.]

**[SWS\_IpduM\_00205]**

*Upstream requirements:* [SRS\\_IpduM\\_02824](#)

[If for the received Container PDU the configuration parameter `IpduMContainerRxAcceptContainedPdu` is set to `IPDUM_ACCEPT_CONFIGURED`, `IpduM` shall expect and match only contained I-PDUs (`IpduMContainedRxPdu`) that reference the `IpduMContainerRxPdu` in `IpduMContainedRxInContainerPduRef`.]

Note that it is well possible to define several `IpduMContainedRxPdus` with the same `IpduMContainedRxPduLongHeaderId/IpduMContainedRxPduShortHeaderId` as long as the `IpduMContainedRxPdus` are assigned to different `IpduMContainerRxPdus` (via `IpduMContainedRxInContainerPduRef`) with each `IpduMContainerRxPdu` having `IpduMContainerRxAcceptContainedPdu = IPDUM_ACCEPT_CONFIGURED`.

**[SWS\_IpduM\_00250]**

*Upstream requirements:* [SRS\\_IpduM\\_02824](#)

[For an `IpduMContainerRxPdu` with `IpduMContainerRxAcceptContainedPdu = IPDUM_ACCEPT_CONFIGURED` and `IpduMContainerHeaderSize = IPDUM_HEADERTYPE_LONG` or `IPDUM_HEADERTYPE_SHORT` the following constraint applies:

- `IpduMContainedRxPdus` with an `IpduMContainedRxInContainerPduRef` to that specific `IpduMContainerRxPdu` shall have unique `IpduMContainedRxPduLongHeaderId` or `IpduMContainedRxPduShortHeaderId`, respectively, defined in the context of that `IpduMContainerRxPdu`.

]



#### [SWS\_IpduM\_00209]

*Upstream requirements:* [SRS\\_IpduM\\_02821](#)

[Each contained I-PDU shall be notified to PduR via `PduR_IpduMRxIndication`. IpduM shall indicate the contained I-PDUs in the same order as the I-PDUs are located inside the Container PDU.]

### 7.3.6.1 Queueing

#### [SWS\_IpduM\_00211]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If a Container PDU is received and `IpduMContainerPduProcessing` is set to `IPDUM_PROCESSING_DEFERRED`, the Container PDU shall be queued.]

#### [SWS\_IpduM\_00212]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If receiving a new instance of a Container PDU would exceed `IpduMContainerQueueSize` the oldest instance shall be discarded and `IPDUM_E_QUEUEOVFL` shall be reported to [9, DET] via `Det_ReportRuntimeError`.]

### 7.3.7 Reception of Dynamic Containers

The requirements within this chapter and its subchapters complement the reception of Dynamic Containers and do not apply to Static Containers.

#### [SWS\_IpduM\_00204]

*Upstream requirements:* [SRS\\_IpduM\\_02824](#)

[For each contained I-PDU of a received Container PDU where the `IpduMContainerRxPdu` has `IpduMContainerRxAcceptContainedPdu = IPDUM_ACCEPT_ALL` the ID from the PDU header shall be used to identify the corresponding contained I-PDU:

- If the received Container PDU uses long or short header (`IpduMContainerHeaderSize = IPDUM_HEADERTYPE_LONG` or `IPDUM_HEADERTYPE_SHORT`, respectively) the ID shall be compared with the `IpduMContainedRxPduLongHeaderId` or `IpduMContainedRxPduShortHeaderId`, respectively, in the set of `IpduMContainedRxPdus` which do not have an `IpduMContainedRxInContainerPduRef` defined.

]



#### [SWS\_IpduM\_00206]

*Upstream requirements:* [SRS\\_IpduM\\_02824](#)

[For a received Container PDU with `IpduMContainerRxAcceptContainedPdu = IPDUM_ACCEPT_ALL`, `IpduM` shall expect and match only `IpduMContainedRxPdus` which do not have an `IpduMContainedRxInContainerPduRef` defined.]

#### [SWS\_IpduM\_00251]

*Upstream requirements:* [SRS\\_IpduM\\_02824](#)

[All `IpduMContainedRxPdus` with no `IpduMContainedRxInContainerPduRef` and a defined `IpduMContainedRxPduLongHeaderId` or `IpduMContainedRxPduShortHeaderId`, shall have a unique `IpduMContainedRxPduLongHeaderId` or `IpduMContainedRxPduShortHeaderId`, respectively.]

Note that due to [\[SWS\\_IpduM\\_00206\]](#) it is NOT allowed to define several `IpduMContainedRxPdus` with the same `IpduMContainedRxPduShortHeaderId` / `IpduMContainedRxPduLongHeaderId` and no assignment to `IpduMContainerRxPdu` (no `IpduMContainedRxInContainerPduRef` defined).

Note that it is well possible to have two `IpduMContainedRxPdus` with no assignment to `IpduMContainerRxPdu` (no `IpduMContainedRxInContainerPduRef` defined) which have the same header id value defined, as long as one `IpduMContainedRxPdu` has an `IpduMContainedRxPduShortHeaderId` defined and the other `IpduMContainedRxPdu` has an `IpduMContainedRxPduLongHeaderId` defined.

Note that due to two ways how `IpduMContainedRxPdus` can interact with `IpduMContainerRxPdu` (`IPDUM_ACCEPT_CONFIGURED` and `IPDUM_ACCEPT_ALL` definition at the `IpduMContainerRxPdu`) it is well possible that `IpduMContainedRxPdus` with the same `IpduMContainedRxPduShortHeaderId` / `IpduMContainedRxPduLongHeaderId` exist as long as the constraints defined in [\[SWS\\_IpduM\\_00250\]](#), [\[SWS\\_IpduM\\_00251\]](#) are fulfilled.

#### [SWS\_IpduM\_00207]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#), [SRS\\_IpduM\\_02824](#)

[If a contained I-PDU of a received `IpduMContainerRxPdu` with `IpduMContainerRxAcceptContainedPdu = IPDUM_ACCEPT_ALL` can not be matched according to [\[SWS\\_IpduM\\_00206\]](#) then this contained I-PDU shall be discarded silently.]

#### [SWS\_IpduM\_00208]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[For each contained I-PDU the length given in its header shall be used as the length of the corresponding I-PDU.]

**[SWS\_IpduM\_00210]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When processing a received Container PDU and detecting a header containing the ID 0 the processing for this Container PDU shall be stopped and the remaining bytes shall be ignored.]

Rationale: A header ID of 0 means that Container PDU has been filled with padding bytes and no further data is contained.

[\[SWS\\_IpduM\\_00210\]](#) does not mean that always a 0 has to be expected at the end of the payload.

**7.3.8 Reception of Static Containers**

The requirements within this chapter and its subchapters complement the reception of Static Containers and do not apply to Dynamic Containers.

In order for the receiving IpduM module to be able to determine which of the PDUs in a received Static Container have actually been updated on the transmitter side, additional update information, so called PDU update bits within the Container Pdu, can be configured per contained I-PDU (see [\[ECUC\\_IpduM\\_00207\]](#)).

**[SWS\_IpduM\_00236]**

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[In case a received contained I-PDU has a configured update bit, the IpduM module shall only process and indicate it to the upper layer if its received update-bit is set.]

The above requirement results in silently ignoring contained I-PDUs with configured but not set update bits.

With respect to [\[SWS\\_IpduM\\_00236\]](#) expected contained I-PDUs without a configured update-bit are always processed and indicated to the upper layer. They are assumed allways valid.

**7.3.9 Errorhandling**

There are bus systems where it is not possible to set an arbitrary size for the transmitted L-PDU (e.g. CanFD). The valid payload length of a Container PDU can be derived from the contained headers. Therefore, the difference to the actual length of the Container PDU can be considered padding.

Assumption is that underlying bus modules are configured such that the padded values do not build up a valid header.

**[SWS\_IpduM\_00213]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[When processing a received Container PDU and detecting a header where the payload length exceeds the remaining bytes of the container the processing for this Container PDU shall be stopped and the remaining bytes shall be ignored. Furthermore, [IPDUM\\_E\\_HEADER](#) shall be reported to [9, DET] via `Det_ReportRuntimeError`.]

A header with a payload length greater than the remaining byte is invalid. No further header is to be expected behind it.

**[SWS\_IpduM\_00214]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[If the remaining bytes in a Container PDU are less than the configured [IpduMContainerHeaderSize](#) the remaining bytes shall be ignored.]

**[SWS\_IpduM\_00237]**

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[When processing a received Container PDU with [IpduMContainerHeaderSize](#) set to [IPDUM\\_HEADERTYPE\\_NONE](#), the IpduM shall ignore all contained PDUs that are according to their configuration not or not completely contained in the received Container PDU. Such contained I-PDUs shall not be indicated to the upper layer. If Development Error Detection is configured ([IpduMDevErrorDetect](#)) [IPDUM\\_E\\_CONTAINER](#) shall be reported to [9, DET] via `Det_ReportError`.]

### 7.3.10 Metadata handling

The requirements of this section only apply if [IpduMMetaDataSupport](#) is configured to true.

**[SWS\_IpduM\_00228]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[In case a Container PDU supports MetaData, the IpduM shall use the MetaData last collected from the contained I-PDUs when sending the Container PDU.]

**[SWS\_IpduM\_00229]**

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[In case the IpduM receives a Container PDU with MetaData, the IpduM shall forward the MetaData of the Container PDU along with all contained I-PDU that support MetaData.]

The IpduM does not rearrange MetaData. Thus, it only supports contained I-PDUs assigned to the same Container PDUs, which have no MetaData or have the same MetaDataType, see [[SWS\\_IpduM\\_00230](#)].

## 7.4 Basic Software Distribution

In order to provide a load distribution amongst different partitions (cores), the different parts of the Com-Stack shall be allocated to the different partitions. Hereby it shall be supported that such a partitioning happens on a per-network-type basis, i.e., the FlexRay, CAN, and Ethernet part of the Com-Stack shall be locatable onto different distinct partitions (cores).

In order to support such a flexible allocation with reducing the amount of cross-partition communication (and thus (potentially blocking) synchronization) the main threads of execution in the IpduM module (namely the respective MainFunctions) can be split into different MainFunctions (at least one per partition). This way the flow of reception / transmission stays within the scope of a single network (and thus within a single partition) and therefore does not require special multi- partition capable communication and synchronization primitives.

In order to manage different timing requirements each MainFunction instance defines its time base individually.

### [SWS\_IpduM\_00252]

*Status:* DRAFT

*Upstream requirements:* [SRS\\_BSW\\_00425](#), [SRS\\_BSW\\_00478](#)

[IpduM Container Pdu shall be processed within the MainFunction, which is referenced by the Container Pdu configuration parameters (i.e. [IpduMContainerRxPdu](#) and [IpduMContainerTxPdu](#)).]

## 7.5 Error Classification

### 7.5.1 Development Errors

#### [SWS\_IpduM\_91003] Definition of development errors in module IpduM

Upstream requirements: [SRS\\_BSW\\_00337](#), [SRS\\_BSW\\_00414](#)

[

| Type of error                                                                                                               | Related error code    | Error value |
|-----------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------|
| API service called with wrong parameter                                                                                     | IPDUM_E_PARAM         | 0x10        |
| NULL pointer checking                                                                                                       | IPDUM_E_PARAM_POINTER | 0x11        |
| API service (except IpduM_MainFunctionTx, IpduM_MainFunctionRx and IpduM_GetVersionInfo) used without module initialization | IPDUM_E_UNINIT        | 0x20        |
| Invalid configuration set selection                                                                                         | IPDUM_E_INIT_FAILED   | 0x21        |

]

### 7.5.2 Runtime Errors

#### [SWS\_IpduM\_91004] Definition of runtime errors in module IpduM

Upstream requirements: [SRS\\_IpduM\\_02820](#), [SRS\\_IpduM\\_02825](#)

[

| Type of error                          | Related error code | Error value |
|----------------------------------------|--------------------|-------------|
| Erroneous header detected              | IPDUM_E_HEADER     | 0x30        |
| Container Queue overflow               | IPDUM_E_QUEUEOVFL  | 0x31        |
| Partly or erroneous container received | IPDUM_E_CONTAINER  | 0x32        |

]

### 7.5.3 Production Errors

There are no production errors.

### 7.5.4 Extended Production Errors

There are no extended production errors.

## 8 API specification

### [SWS\_IpduM\_00028]

Upstream requirements: [SRS\\_BSW\\_00323](#)

[If [IpduMDevErrorDetect](#) is configured to TRUE, all IpduM APIs shall check their input parameters and report detected errors to [9, DET] via [Det\\_ReportError](#). [IPDUM\\_E\\_PARAM](#) shall be reported for normal parameters and [IPDUM\\_E\\_PARAM\\_POINTER](#) for pointer parameters.]

### 8.1 Imported types

This chapter lists all imported types and the corresponding modules.

#### [SWS\_IpduM\_00102] Definition of imported datatypes of module IpduM

Upstream requirements: [SRS\\_BSW\\_00357](#)

[

| Module  | Header File      | Imported Type       |
|---------|------------------|---------------------|
| Comtype | ComStack_Types.h | PduIdType           |
|         | ComStack_Types.h | PduInfoType         |
|         | ComStack_Types.h | PduLengthType       |
| Std     | Std_Types.h      | Std_ReturnType      |
|         | Std_Types.h      | Std_VersionInfoType |

]

### 8.2 Type definitions

#### 8.2.1 IpduM\_ConfigType

#### [SWS\_IpduM\_00159] Definition of datatype IpduM\_ConfigType

Upstream requirements: [SRS\\_BSW\\_00438](#)

[

|                      |                                                                                                      |
|----------------------|------------------------------------------------------------------------------------------------------|
| <b>Name</b>          | IpduM_ConfigType                                                                                     |
| <b>Kind</b>          | Structure                                                                                            |
| <b>Description</b>   | This is the type of the data structure containing the initialization data for the I-PDU multiplexer. |
| <b>Available via</b> | IpduM.h                                                                                              |

]

## 8.3 Function definitions

This is a list of functions provided for upper layer modules.

### 8.3.1 IpduM\_Init

#### [SWS\_IpduM\_00032] Definition of API function IpduM\_Init

Upstream requirements: [SRS\\_BSW\\_00344](#), [SRS\\_BSW\\_00405](#), [SRS\\_BSW\\_00101](#), [SRS\\_BSW\\_00369](#)

|                           |                                                                                                                                                                                                                                    |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [                         |                                                                                                                                                                                                                                    |
| <b>Service Name</b>       | IpduM_Init                                                                                                                                                                                                                         |
| <b>Syntax</b>             | <pre>void IpduM_Init (     const IpduM_ConfigType* config )</pre>                                                                                                                                                                  |
| <b>Service ID [hex]</b>   | 0x00                                                                                                                                                                                                                               |
| <b>Sync/Async</b>         | Synchronous                                                                                                                                                                                                                        |
| <b>Reentrancy</b>         | Non Reentrant                                                                                                                                                                                                                      |
| <b>Parameters (in)</b>    | config      Implementation specific structure with configuration parameters.                                                                                                                                                       |
| <b>Parameters (inout)</b> | None                                                                                                                                                                                                                               |
| <b>Parameters (out)</b>   | None                                                                                                                                                                                                                               |
| <b>Return value</b>       | None                                                                                                                                                                                                                               |
| <b>Description</b>        | <p>Initializes the I-PDU Multiplexer.</p> <p>In configurations, in which IpduM is assigned to more than one partition (i.e. IpduM_Main Functions are mapped to partitions), IpduM may provide one init function per partition.</p> |
| <b>Available via</b>      | IpduM.h                                                                                                                                                                                                                            |

]

#### [SWS\_IpduM\_00033]

Upstream requirements: [SRS\\_BSW\\_00101](#)

[The function [IpduM\\_Init](#) shall initialize all module-related global variables.]

#### [SWS\_IpduM\_00084]

Upstream requirements: [SRS\\_BSW\\_00406](#)

[The behavior of the IpduM is unspecified until a correct call to [IpduM\\_Init](#) is made.]

### 8.3.2 IpduM\_GetVersionInfo

#### [SWS\_IpduM\_00037] Definition of API function IpduM\_GetVersionInfo

Upstream requirements: [SRS\\_BSW\\_00407](#), [SRS\\_BSW\\_00369](#), [SRS\\_BSW\\_00003](#)

|                           |                                                                               |                                                                   |
|---------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------|
| <b>Service Name</b>       | IpduM_GetVersionInfo                                                          |                                                                   |
| <b>Syntax</b>             | <pre>void IpduM_GetVersionInfo (     Std_VersionInfoType* versioninfo )</pre> |                                                                   |
| <b>Service ID [hex]</b>   | 0x01                                                                          |                                                                   |
| <b>Sync/Async</b>         | Synchronous                                                                   |                                                                   |
| <b>Reentrancy</b>         | Reentrant                                                                     |                                                                   |
| <b>Parameters (in)</b>    | None                                                                          |                                                                   |
| <b>Parameters (inout)</b> | None                                                                          |                                                                   |
| <b>Parameters (out)</b>   | versioninfo                                                                   | Pointer to where to store the version information of this module. |
| <b>Return value</b>       | None                                                                          |                                                                   |
| <b>Description</b>        | Service returns the version information of this module.                       |                                                                   |
| <b>Available via</b>      | IpduM.h                                                                       |                                                                   |

### 8.3.3 IpduM\_Transmit

#### [SWS\_IpduM\_00043] Definition of API function IpduM\_Transmit

Upstream requirements: [SRS\\_BSW\\_00369](#)

|                           |                                                                                                       |                                                                |
|---------------------------|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| <b>Service Name</b>       | IpduM_Transmit                                                                                        |                                                                |
| <b>Syntax</b>             | <pre>Std_ReturnType IpduM_Transmit (     PduIdType TxPduId,     const PduInfoType* PduInfoPtr )</pre> |                                                                |
| <b>Service ID [hex]</b>   | 0x49                                                                                                  |                                                                |
| <b>Sync/Async</b>         | Synchronous                                                                                           |                                                                |
| <b>Reentrancy</b>         | Reentrant for different PduIds. Non reentrant for the same PduId.                                     |                                                                |
| <b>Parameters (in)</b>    | TxPduId                                                                                               | Identifier of the PDU to be transmitted                        |
|                           | PduInfoPtr                                                                                            | Length of and pointer to the PDU data and pointer to MetaData. |
| <b>Parameters (inout)</b> | None                                                                                                  |                                                                |
| <b>Parameters (out)</b>   | None                                                                                                  |                                                                |
| <b>Return value</b>       | Std_ReturnType                                                                                        | E_OK: Transmit request has been accepted.                      |
|                           |                                                                                                       | E_NOT_OK: Transmit request has not been accepted.              |
| <b>Description</b>        | Requests transmission of a PDU.                                                                       |                                                                |
| <b>Available via</b>      | IpduM.h                                                                                               |                                                                |

For a detailed description read Chapter [7.2.4.1](#).



## 8.4 Callback notifications

### 8.4.1 IpduM\_RxIndication

#### [SWS\_IpduM\_00040] Definition of callback function IpduM\_RxIndication

Upstream requirements: [SRS\\_BSW\\_00369](#), [SRS\\_IpduM\\_02817](#)

|                           |                                                                                                 |                                                                                                                                                   |
|---------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Service Name</b>       | IpduM_RxIndication                                                                              |                                                                                                                                                   |
| <b>Syntax</b>             | <pre>void IpduM_RxIndication (     PduIdType RxPduId,     const PduInfoType* PduInfoPtr )</pre> |                                                                                                                                                   |
| <b>Service ID [hex]</b>   | 0x42                                                                                            |                                                                                                                                                   |
| <b>Sync/Async</b>         | Synchronous                                                                                     |                                                                                                                                                   |
| <b>Reentrancy</b>         | Reentrant for different PduIds. Non reentrant for the same PduId.                               |                                                                                                                                                   |
| <b>Parameters (in)</b>    | RxPduId                                                                                         | ID of the received PDU.                                                                                                                           |
|                           | PduInfoPtr                                                                                      | Contains the length (SduLength) of the received PDU, a pointer to a buffer (SduDataPtr) containing the PDU, and the MetaData related to this PDU. |
| <b>Parameters (inout)</b> | None                                                                                            |                                                                                                                                                   |
| <b>Parameters (out)</b>   | None                                                                                            |                                                                                                                                                   |
| <b>Return value</b>       | None                                                                                            |                                                                                                                                                   |
| <b>Description</b>        | Indication of a received PDU from a lower layer communication interface module.                 |                                                                                                                                                   |
| <b>Available via</b>      | IpduM.h                                                                                         |                                                                                                                                                   |

#### [SWS\_IpduM\_00041]

Upstream requirements: [SRS\\_IpduM\\_02812](#)

[If there is a static part configured in a multiplexed SDU received from the PDU Router, the function [IpduM\\_RxIndication](#) transforms the incoming I-PDU ID into the correct I-PDU ID for the static part's destination and then forwards the SDU via the PDU Router, see [PduR\\_IpduMRxIndication](#) in the [10, SWS PDU Router].]

#### [SWS\_IpduM\_00042]

Upstream requirements: [SRS\\_IpduM\\_02812](#)

[When a multiplexed I-PDU is received from the PDU Router the function [IpduM\\_RxIndication](#) uses the incoming I-PDU ID and the selector field to find out the correct I-PDU ID for the dynamic part's destination and then forwards the I-PDU via the PDU Router, see [PduR\\_IpduMRxIndication](#) in the [10, SWS PDU Router].]

#### [SWS\_IpduM\_00217]

Upstream requirements: [SRS\\_IpduM\\_02820](#)

[When a Container PDU is received from the PDU Router, the function [IpduM\\_RxIndication](#) forwards the contained I-PDUs via the PDU Router, using [PduR\\_IpduMRxIndication](#) (see [SWS\_IpduM\_00105]).]

### [SWS\_IpduM\_00086]

Upstream requirements: [SRS\\_IpduM\\_02812](#)

[The function [IpduM\\_RxIndication](#) shall be callable in interrupt context, e.g. from receive interrupt.]

## 8.4.2 IpduM\_TxConfirmation

### [SWS\_IpduM\_00044] Definition of callback function IpduM\_TxConfirmation

Upstream requirements: [SRS\\_BSW\\_00369](#)

[

|                           |                                                                                                                      |                                                                          |
|---------------------------|----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>Service Name</b>       | IpduM_TxConfirmation                                                                                                 |                                                                          |
| <b>Syntax</b>             | <pre>void IpduM_TxConfirmation (     PduIdType TxPduId,     Std_ReturnType result )</pre>                            |                                                                          |
| <b>Service ID [hex]</b>   | 0x40                                                                                                                 |                                                                          |
| <b>Sync/Async</b>         | Synchronous                                                                                                          |                                                                          |
| <b>Reentrancy</b>         | Reentrant for different PduIds. Non reentrant for the same PduId.                                                    |                                                                          |
| <b>Parameters (in)</b>    | TxPduId                                                                                                              | ID of the PDU that has been transmitted.                                 |
|                           | result                                                                                                               | E_OK: The PDU was transmitted. E_NOT_OK: Transmission of the PDU failed. |
| <b>Parameters (inout)</b> | None                                                                                                                 |                                                                          |
| <b>Parameters (out)</b>   | None                                                                                                                 |                                                                          |
| <b>Return value</b>       | None                                                                                                                 |                                                                          |
| <b>Description</b>        | The lower layer communication interface module confirms the transmission of a PDU, or the failure to transmit a PDU. |                                                                          |
| <b>Available via</b>      | IpduM.h                                                                                                              |                                                                          |

]

### [SWS\_IpduM\_00088]

Upstream requirements: [SRS\\_IpduM\\_02814](#)

[The function [IpduM\\_TxConfirmation](#) shall translate the confirmation received from the PDU Router into confirmations for the I-PDUs which were contained in the sent multiplexed I-PDU or Container PDU.]

These confirmations are given again to the PDU Router that has to route them to COM.

### [SWS\_IpduM\_00087]

Upstream requirements: [SRS\\_IpduM\\_02814](#)

[The function [IpduM\\_TxConfirmation](#) shall be callable in interrupt context, e.g. from a transmit interrupt.]

### 8.4.3 IpduM\_TriggerTransmit

#### [SWS\_IpduM\_00060] Definition of callback function IpduM\_TriggerTransmit

Upstream requirements: [SRS\\_BSW\\_00369](#)

|                           |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                     |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Service Name</b>       | IpduM_TriggerTransmit                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                     |
| <b>Syntax</b>             | <pre>Std_ReturnType IpduM_TriggerTransmit (     PduIdType TxPduId,     PduInfoType* PduInfoPtr )</pre>                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                     |
| <b>Service ID [hex]</b>   | 0x41                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                     |
| <b>Sync/Async</b>         | Synchronous                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                     |
| <b>Reentrancy</b>         | Reentrant for different PduIds. Non reentrant for the same PduId.                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                     |
| <b>Parameters (in)</b>    | TxPduId                                                                                                                                                                                                                                                                                                                                                                              | ID of the SDU that is requested to be transmitted.                                                                                                                                                                  |
| <b>Parameters (inout)</b> | PduInfoPtr                                                                                                                                                                                                                                                                                                                                                                           | Contains a pointer to a buffer (SduDataPtr) to where the SDU data shall be copied, and the available buffer size in SduLength. On return, the service will indicate the length of the copied SDU data in SduLength. |
| <b>Parameters (out)</b>   | None                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                     |
| <b>Return value</b>       | Std_ReturnType                                                                                                                                                                                                                                                                                                                                                                       | E_OK: SDU has been copied and SduLength indicates the number of copied bytes.<br>E_NOT_OK: No SDU data has been copied. PduInfoPtr must not be used since it may contain a NULL pointer or point to invalid data.   |
| <b>Description</b>        | Within this API, the upper layer module (called module) shall check whether the available data fits into the buffer size reported by PduInfoPtr->SduLength. If it fits, it shall copy its data into the buffer provided by PduInfoPtr->SduDataPtr and update the length of the actual copied data in PduInfoPtr->SduLength. If not, it returns E_NOT_OK without changing PduInfoPtr. |                                                                                                                                                                                                                     |
| <b>Available via</b>      | IpduM.h                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                     |

#### [SWS\_IpduM\_00090]

Upstream requirements: [SRS\\_IpduM\\_02810](#)

[Within the function [IpduM\\_TriggerTransmit](#), the IpduM shall copy the contents of its I-PDU transmit buffer to the PDU buffer given by [PduInfoPtr->SduDataPtr](#) and update [PduInfoPtr->SduLength](#) with length of the copied data accordingly.]

#### [SWS\_IpduM\_00091]

Upstream requirements: [SRS\\_IpduM\\_02810](#)

[The IpduM shall take care about the data consistency during providing the data.]

Use case: This function is used e.g. by the LIN Master for sending out a LIN frame. In this case, the trigger transmit can be initiated by the Master schedule table itself or a received LIN header.

This function is also used by the FlexRay Interface for requesting PDUs to be sent in static part (synchronous to the FlexRay global time).

**[SWS\_IpduM\_00089]**

Upstream requirements: [SRS\\_IpduM\\_02810](#)

[The function [IpduM\\_TriggerTransmit](#) shall be callable in interrupt context.]

## 8.5 Scheduled functions

Many of the functions of the IpduM module are called synchronous in the context of the upper layer (for transmission) and in the context of the lower layer (for reception). However, some functionality is excuted deferred. Therefore, it is performed in either [IpduM\\_MainFunctionTx](#) or [IpduM\\_MainFunctionRx](#), dependent on the respective functionality is associated to the sender or receiver side respectively.

**[SWS\_IpduM\_91002] Definition of scheduled function IpduM\_MainFunctionTx [**

|                         |                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Service Name</b>     | IpduM_MainFunctionTx                                                                                                                                                                                                                                                                                                                                       |
| <b>Syntax</b>           | <pre>void IpduM_MainFunctionTx (<br/>    void<br/>)</pre>                                                                                                                                                                                                                                                                                                  |
| <b>Service ID [hex]</b> | 0x12                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>      | This function performs the processing of the transmission activities that are not directly handled within the calls from PduR.<br>Per configured IpduMMainFunctionTx instance one IpduM_MainFunctionTx_<shortName> shall be implemented. Hereby <shortName> is the short name of the IpduMMainFunctionTx configuration container in the ECU configuration. |
| <b>Available via</b>    | IpduM_SchM.h                                                                                                                                                                                                                                                                                                                                               |

]

**[SWS\_IpduM\_91001] Definition of scheduled function IpduM\_MainFunctionRx [**

|                         |                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Service Name</b>     | IpduM_MainFunctionRx                                                                                                                                                                                                                                                                                                                                    |
| <b>Syntax</b>           | <pre>void IpduM_MainFunctionRx (<br/>    void<br/>)</pre>                                                                                                                                                                                                                                                                                               |
| <b>Service ID [hex]</b> | 0x11                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>      | This function performs the processing of the reception activities that are not directly handled within the calls from PduR.<br>Per configured IpduMMainFunctionRx instance one IpduM_MainFunctionRx_<shortName> shall be implemented. Hereby <shortName> is the short name of the IpduMMainFunctionRx configuration container in the ECU configuration. |
| <b>Available via</b>    | IpduM_SchM.h                                                                                                                                                                                                                                                                                                                                            |

]

## 8.6 Expected interfaces

In this chapter, all interfaces required from other modules are listed.

### 8.6.1 Mandatory Interfaces

This chapter defines all interfaces that are required to fulfill the core functionality of the module.

#### [SWS\_IpduM\_00104] Definition of mandatory interfaces required by module IpduM

Upstream requirements: [SRS\\_BSW\\_00009](#)

[

| API Function           | Header File | Description                                                                                           |
|------------------------|-------------|-------------------------------------------------------------------------------------------------------|
| Det_ReportRuntimeError | Det.h       | Service to report runtime errors. If a callout has been configured then this callout shall be called. |

]

### 8.6.2 Optional Interfaces

This chapter defines all interfaces that are required to fulfill an optional functionality of the module.

#### [SWS\_IpduM\_00105] Definition of optional interfaces requested by module IpduM

Upstream requirements: [SRS\\_BSW\\_00009](#)

[

| API Function              | Header File  | Description                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Det_ReportError           | Det.h        | Service to report development errors.                                                                                                                                                                                                                                                                                                                                                |
| PduR_IpduMRxIndication    | PduR_IpduM.h | Indication of a received PDU from a lower layer communication interface module.                                                                                                                                                                                                                                                                                                      |
| PduR_IpduMTransmit        | PduR_IpduM.h | Requests transmission of a PDU.                                                                                                                                                                                                                                                                                                                                                      |
| PduR_IpduMTriggerTransmit | PduR_IpduM.h | Within this API, the upper layer module (called module) shall check whether the available data fits into the buffer size reported by PduInfoPtr->SduLength. If it fits, it shall copy its data into the buffer provided by PduInfoPtr->SduDataPtr and update the length of the actual copied data in PduInfoPtr->SduLength. If not, it returns E_NOT_OK without changing PduInfoPtr. |
| PduR_IpduMTxConfirmation  | PduR_IpduM.h | The lower layer communication interface module confirms the transmission of a PDU, or the failure to transmit a PDU.                                                                                                                                                                                                                                                                 |

]


### 8.6.3 Configurable interfaces

Not applicable.

## 9 Sequence diagrams

### 9.1 Transmission of a multiplexed I-PDU and Transmit confirmation

The following sequence chart shows a transmit request initiated by the COM layer. The transmit request is for an I-PDU which has to be transmitted within a multiplexed I-PDU. In the IpduM module is configured that this transmitted I-PDU triggers the sending of the multiplexed I-PDU.

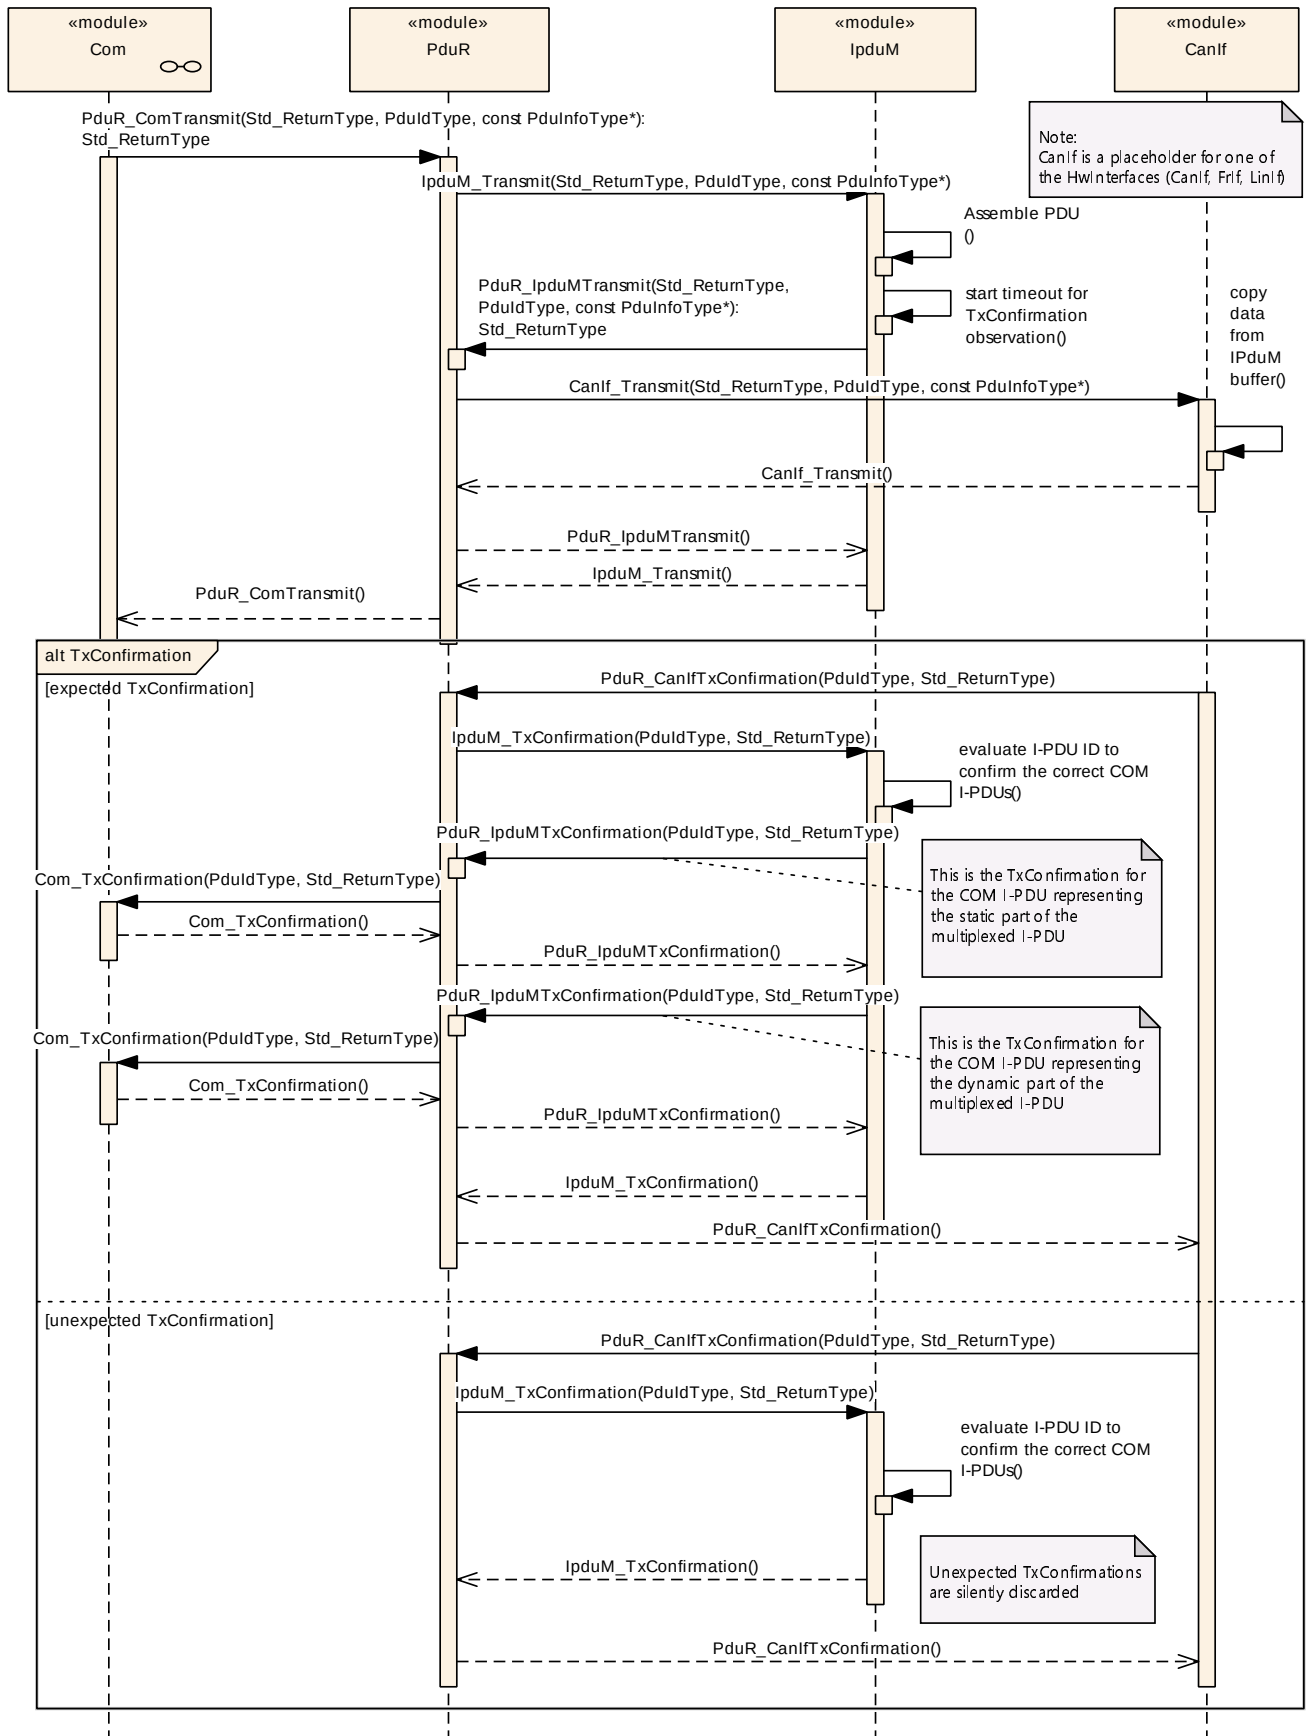

**Figure 9.1: Transmission and confirmation of multiplexed I-PDU with triggering**

## 9.2 Transmission of a multiplexed I-PDU without Trigger

The following sequence chart shows a transmit request initiated by the COM layer. Because of the configuration of the IpduM, no transmit request for the IpduM I-PDU takes place. For configuration see [ECUC\_IpduM\_00052].


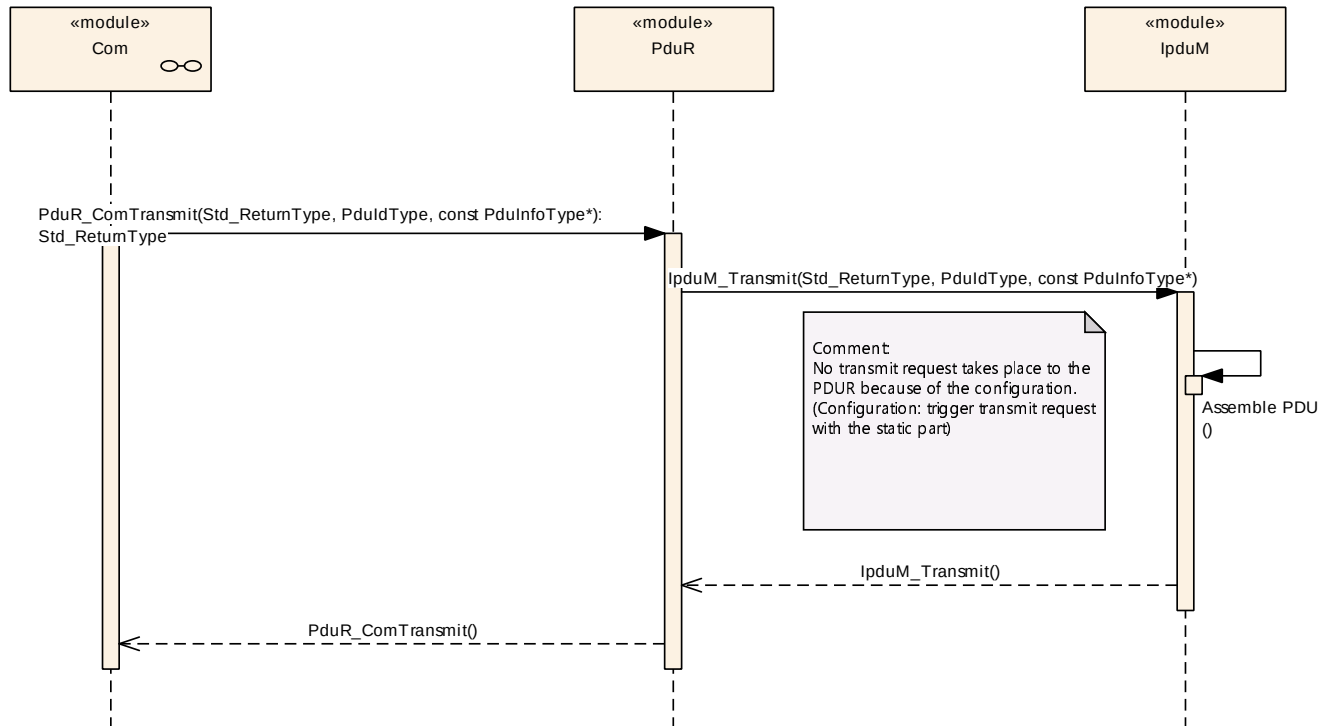


Figure 9.2: Transmission of a multiplexed I-PDU without triggering

## 9.3 Reception of the multiplexed I-PDU

The following sequence chart shows a reception of a multiplexed I-PDU. The I-PDU contains a static and a dynamic part and both are configured to create an RxIndication to the PDU Router module.




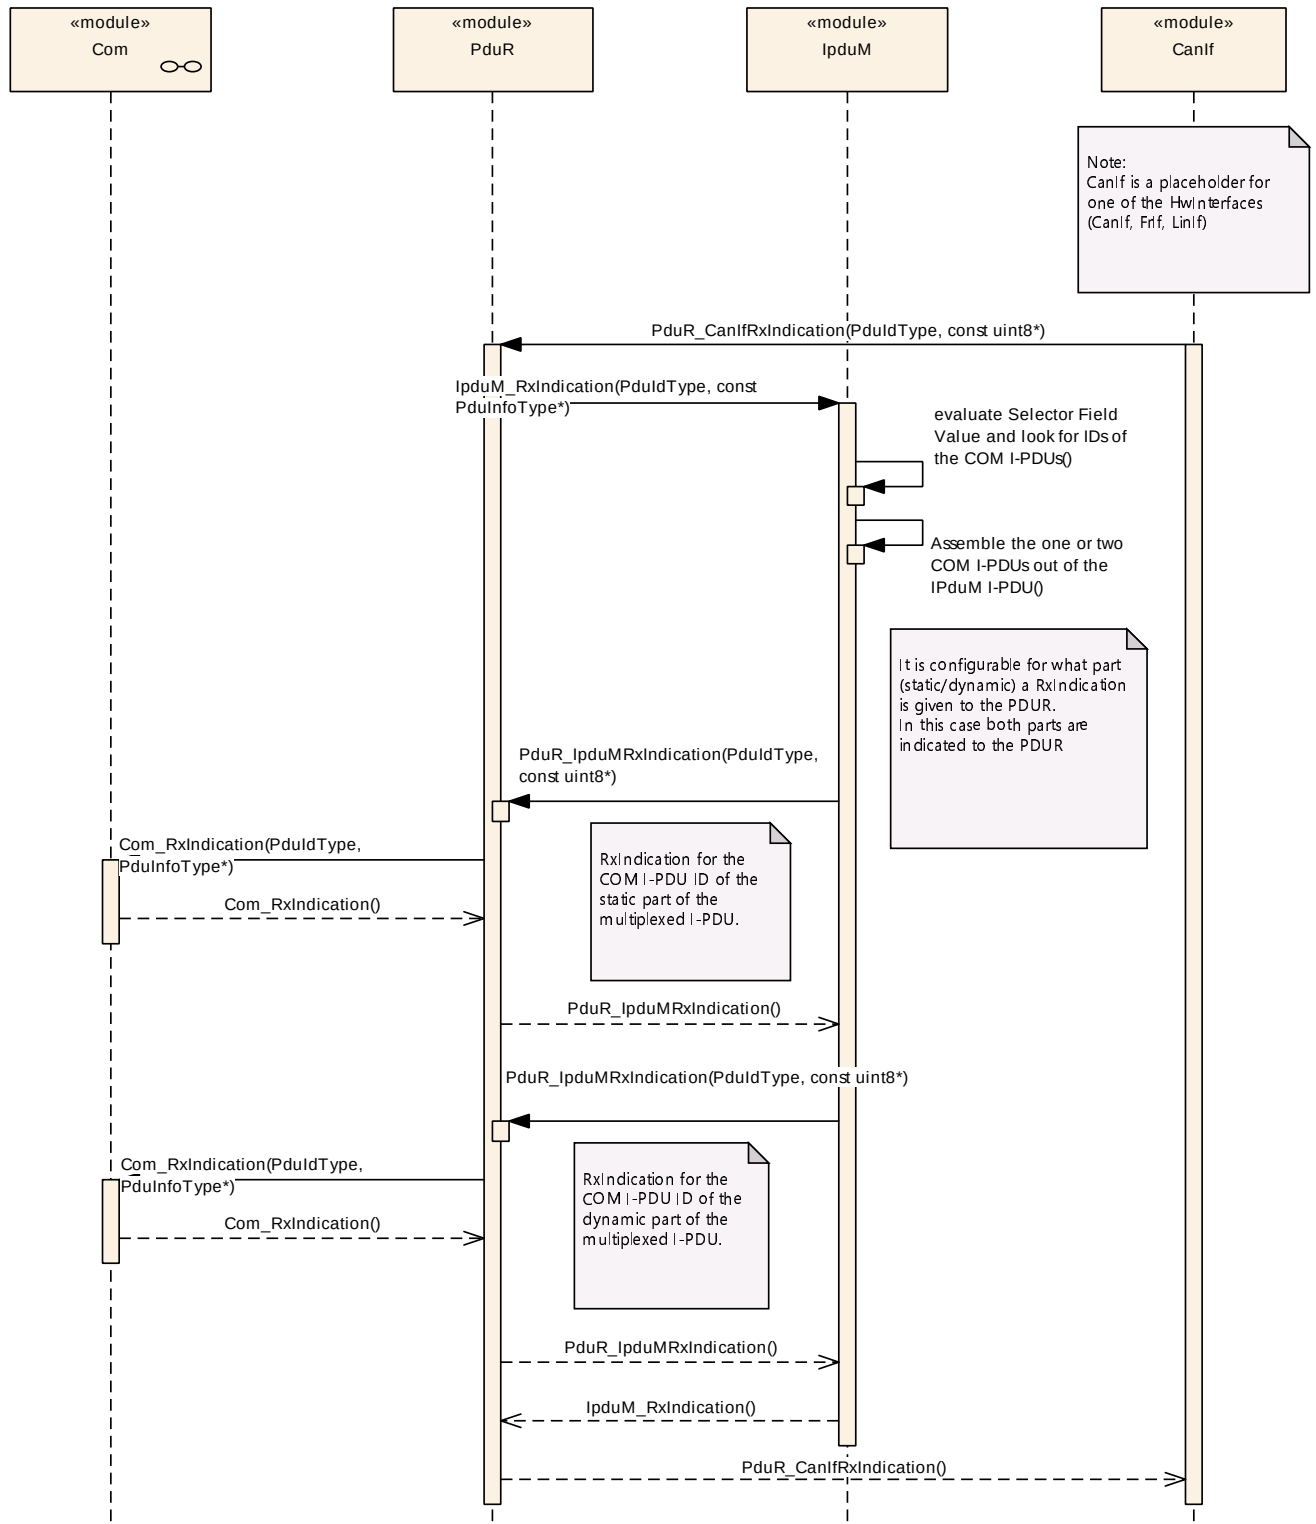

**Figure 9.3: Reception of a multiplexed I-PDU**

## 9.4 Trigger Transmit

The following sequence chart shows a Trigger Transmit request from an interface layer.

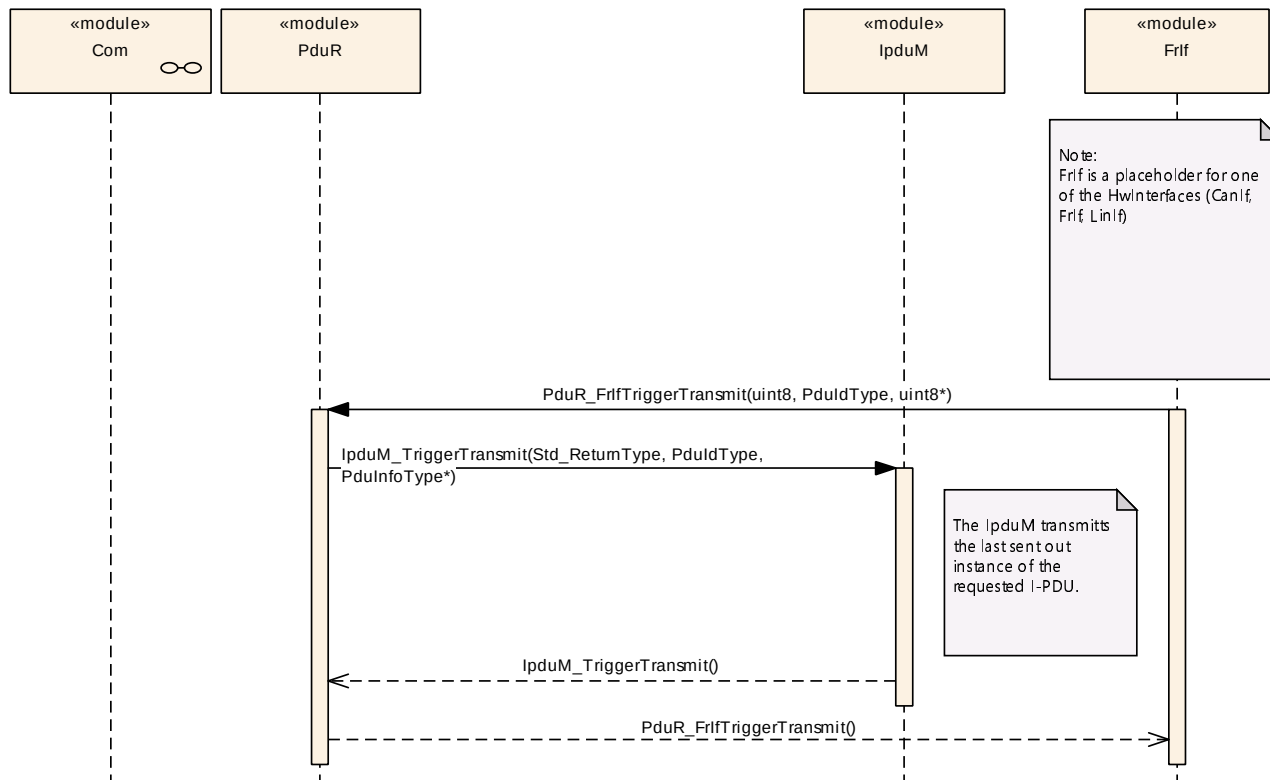

**Figure 9.4: Trigger Transmit request from interface layer**

## 10 Configuration specification

In general, this chapter defines configuration parameters and their clustering into containers. In order to support the specification Chapter 10.1 describes fundamentals. It also specifies a template (table) you shall use for the parameter specification. We intend to leave Chapter 10.1 in the specification to guarantee comprehension.

Chapter 10.2 specifies the structure (containers) and the parameters of the module IpduM.

Chapter 10.3 specifies published information of the module IpduM.

### 10.1 How to read this chapter

For details refer to [4] Chapter 10.1 *"Introduction to configuration specification"*.

### 10.2 Containers and configuration parameters

The following chapters summarize all configuration parameters. The detailed meanings of the parameters describe Chapter 7 and Chapter 8.

## 10.2.1 Configuration overview

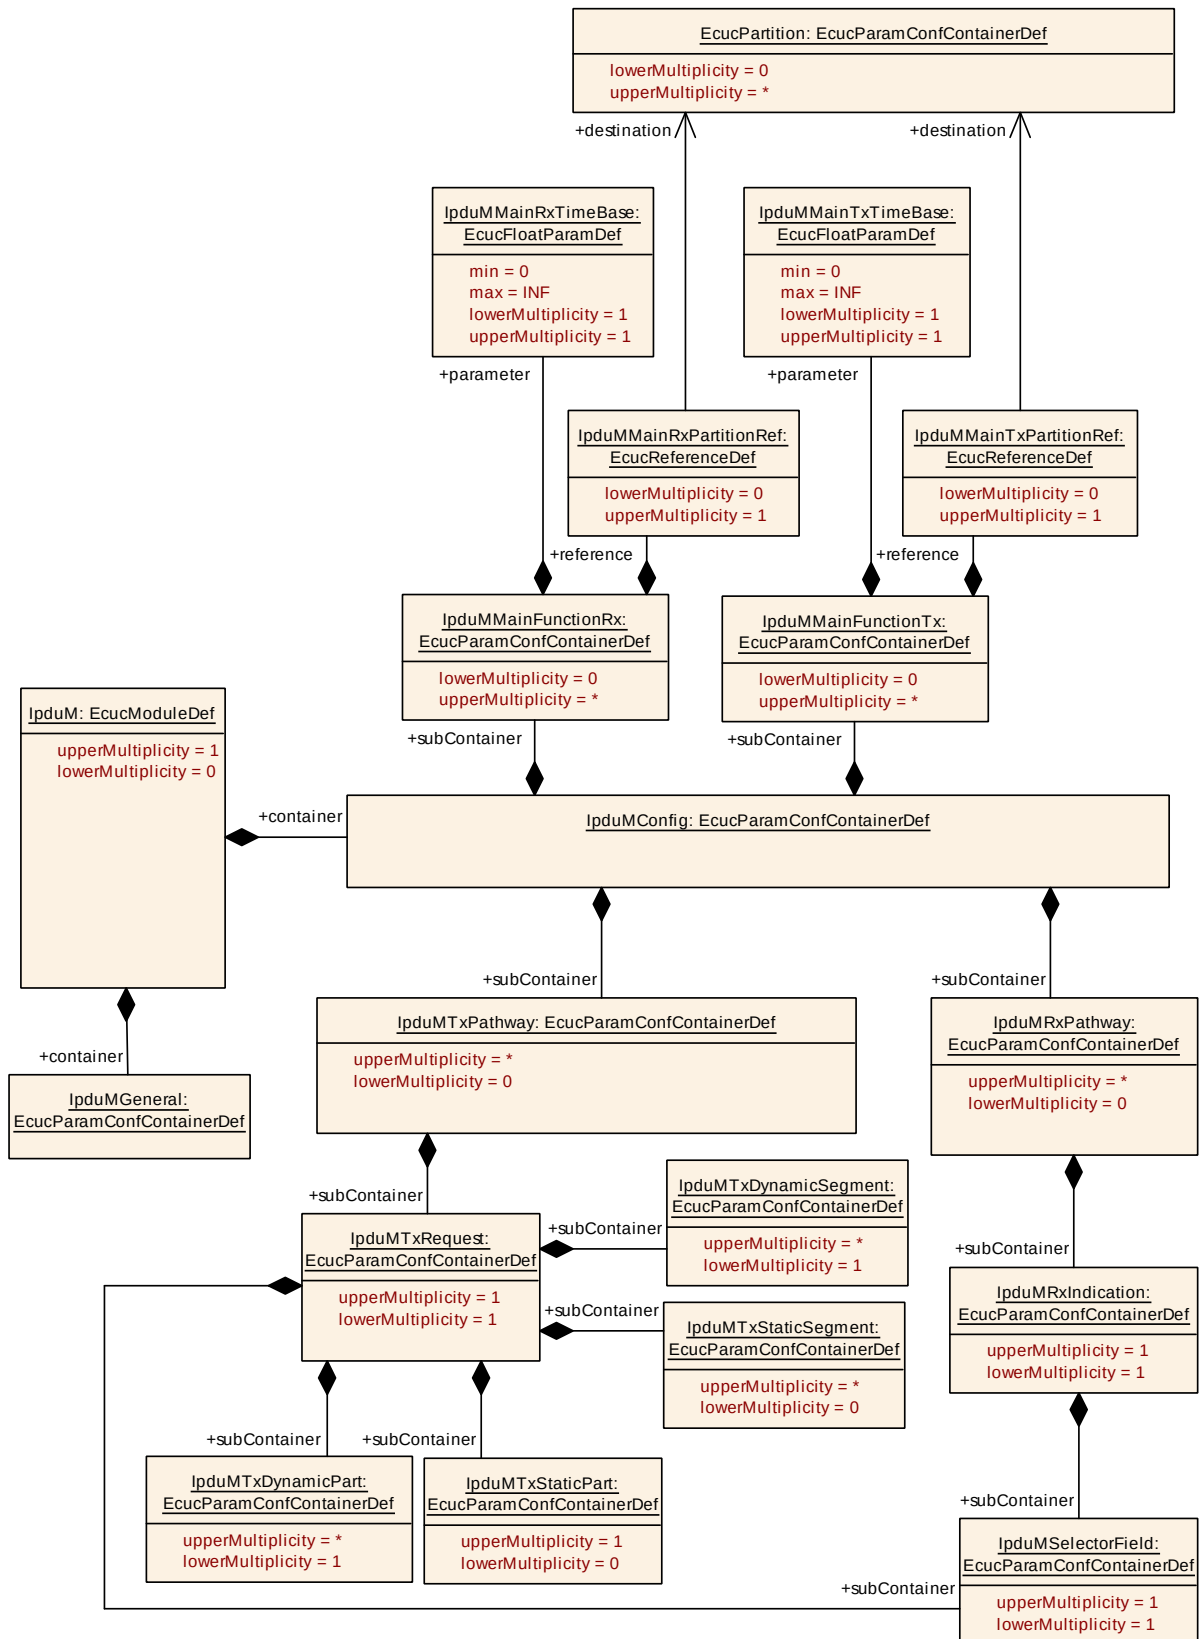


Figure 10.1: IpduM Configuration Overview (for I-PDU Multiplexing)

## 10.2.2 IpduM

### [ECUC\_IpduM\_00204] Definition of EcucModuleDef IpduM [

|                            |                                                            |
|----------------------------|------------------------------------------------------------|
| Module Name                | IpduM                                                      |
| Description                | Configuration of the IpduM (Ipdu Multiplexer) module.      |
| Post-Build Variant Support | true                                                       |
| Supported Config Variants  | VARIANT-LINK-TIME, VARIANT-POST-BUILD, VARIANT-PRE-COMPILE |

| Included Containers                       |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Container Name                            | Multiplicity | Dependency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <a href="#">IpduMConfig</a>               | 1            | This container contains the sub containers of the IpduM module. <ul style="list-style-type: none"> <li>The IpduMTxPathway subcontainer includes information about sent I-PDUs.</li> <li>The IpduMRxPathway includes information about received I-PDUs.</li> <li>The IpduMContainerTxPdu and IpduMContainedTxPdu include information about the sending of ContainerPdus.</li> <li>The IpduMContainerRxPdu and IpduMContainedRxPdu include information about the reception of ContainerPdus.</li> </ul> |
| <a href="#">IpduMGeneral</a>              | 1            | Contains the general configuration parameters of IpduM.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <a href="#">IpduMPublishedInformation</a> | 1            | Additional published parameters not covered by Common PublishedInformation container. Note that these parameters do not have any configuration class setting, since they are published information.                                                                                                                                                                                                                                                                                                   |

]

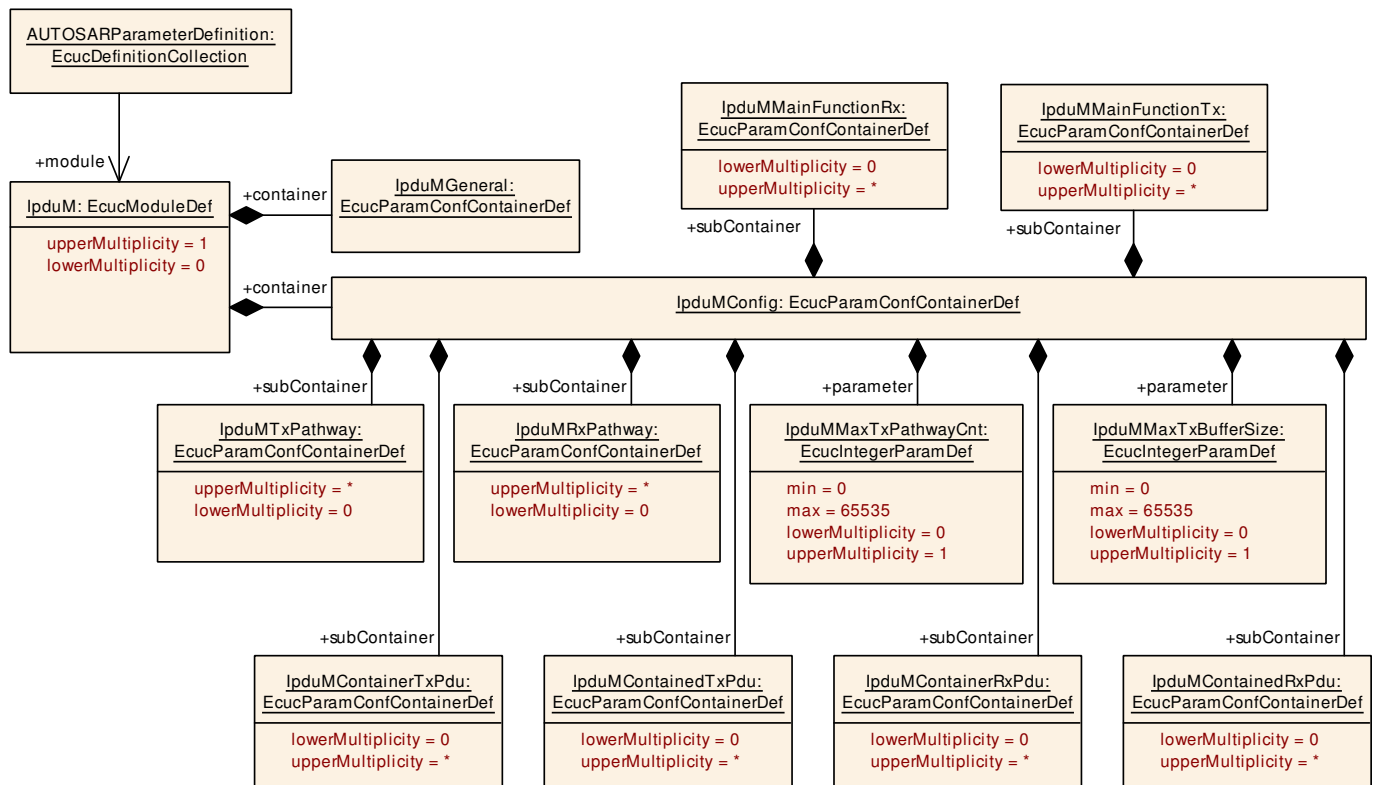


Figure 10.2: IpduM

### 10.2.3 IpduMConfig

#### [ECUC\_IpduM\_00059] Definition of EcucParamConfContainerDef IpduMConfig [

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Container Name           | IpduMConfig                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Parent Container         | <a href="#">IpduM</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description              | <p>This container contains the sub containers of the IpduM module.</p> <ul style="list-style-type: none"> <li>The IpduMTxPathway subcontainer includes information about sent I-PDUs.</li> <li>The IpduMRxPathway includes information about received I-PDUs.</li> <li>The IpduMContainerTxPdu and IpduMContainedTxPdu include information about the sending of ContainerPdus.</li> <li>The IpduMContainerRxPdu and IpduMContainedRxPdu include information about the reception of ContainerPdus.</li> </ul> |
| Multiplicity             | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Configuration Parameters |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

| Included Parameters                  |              |                    |
|--------------------------------------|--------------|--------------------|
| Parameter Name                       | Multiplicity | ECUC ID            |
| <a href="#">IpduMMaxTxBufferSize</a> | 0..1         | [ECUC_IpduM_00166] |
| <a href="#">IpduMMaxTxPathwayCnt</a> | 0..1         | [ECUC_IpduM_00165] |

| Included Containers                 |              |                                                                                                                                                                |
|-------------------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Container Name                      | Multiplicity | Dependency                                                                                                                                                     |
| <a href="#">IpduMContainedRxPdu</a> | 0..*         | Configuration of a received contained Pdu.                                                                                                                     |
| <a href="#">IpduMContainedTxPdu</a> | 0..*         | Configuration of a sender ContainedPdu.                                                                                                                        |
| <a href="#">IpduMContainerRxPdu</a> | 0..*         | Configuration of a receiver ContainerPdu which may collect several ContainedPdus.                                                                              |
| <a href="#">IpduMContainerTxPdu</a> | 0..*         | Configuration of a transmitted container Pdu.                                                                                                                  |
| <a href="#">IpduMMainFunctionRx</a> | 0..*         | Each element of this container defines one instance IpduM_MainFunctionRx, in case multi-core distribution feature is active.                                   |
| <a href="#">IpduMMainFunctionTx</a> | 0..*         | Each element of this container defines one instance IpduM_MainFunctionTx, in case multi-core distribution feature is active (mutual exclusive to ComTimeBase). |
| <a href="#">IpduMRxPathway</a>      | 0..*         | includes information about received I-PDUs                                                                                                                     |
| <a href="#">IpduMTxPathway</a>      | 0..*         | includes information about sent I-PDUs                                                                                                                         |

]

#### [ECUC\_IpduM\_00166] Definition of EcucIntegerParamDef IpduMMaxTxBufferSize [

|                                 |                                                                                                                                                   |  |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Parameter Name                  | IpduMMaxTxBufferSize                                                                                                                              |  |
| Parent Container                | <a href="#">IpduMConfig</a>                                                                                                                       |  |
| Description                     | Maximum total size of all Tx buffers. This parameter is needed only in case of post-build loadable implementation using static memory allocation. |  |
| Multiplicity                    | 0..1                                                                                                                                              |  |
| Type                            | EcucIntegerParamDef                                                                                                                               |  |
| Range                           | 0 .. 65535                                                                                                                                        |  |
| Default value                   | –                                                                                                                                                 |  |
| Post-Build Variant Multiplicity | false                                                                                                                                             |  |





|                                  |                  |   |                                          |
|----------------------------------|------------------|---|------------------------------------------|
| Post-Build Variant Value         | false            |   |                                          |
| Multiplicity Configuration Class | Pre-compile time | X | VARIANT-PRE-COMPILE                      |
|                                  | Link time        | X | VARIANT-LINK-TIME,<br>VARIANT-POST-BUILD |
|                                  | Post-build time  | – |                                          |
| Value Configuration Class        | Pre-compile time | X | VARIANT-PRE-COMPILE                      |
|                                  | Link time        | X | VARIANT-LINK-TIME,<br>VARIANT-POST-BUILD |
|                                  | Post-build time  | – |                                          |
| Dependency                       |                  |   |                                          |

### [ECUC\_IpduM\_00165] Definition of EcucIntegerParamDef IpduMMaxTxPathwayCnt

|                                  |                                                                                                                                                  |   |                                          |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------------------------------|
| Parameter Name                   | IpduMMaxTxPathwayCnt                                                                                                                             |   |                                          |
| Parent Container                 | <a href="#">IpduMConfig</a>                                                                                                                      |   |                                          |
| Description                      | Maximum number of transmitted IPdus. This parameter is needed only in case of post-build loadable implementation using static memory allocation. |   |                                          |
| Multiplicity                     | 0..1                                                                                                                                             |   |                                          |
| Type                             | EcucIntegerParamDef                                                                                                                              |   |                                          |
| Range                            | 0 .. 65535                                                                                                                                       |   |                                          |
| Default value                    | –                                                                                                                                                |   |                                          |
| Post-Build Variant Multiplicity  | false                                                                                                                                            |   |                                          |
| Post-Build Variant Value         | false                                                                                                                                            |   |                                          |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                 | X | VARIANT-PRE-COMPILE                      |
|                                  | Link time                                                                                                                                        | X | VARIANT-LINK-TIME,<br>VARIANT-POST-BUILD |
|                                  | Post-build time                                                                                                                                  | – |                                          |
| Value Configuration Class        | Pre-compile time                                                                                                                                 | X | VARIANT-PRE-COMPILE                      |
|                                  | Link time                                                                                                                                        | X | VARIANT-LINK-TIME,<br>VARIANT-POST-BUILD |
|                                  | Post-build time                                                                                                                                  | – |                                          |
| Dependency                       |                                                                                                                                                  |   |                                          |

## 10.2.4 IpduMGeneral

### [ECUC\_IpduM\_00130] Definition of EcucParamConfContainerDef IpduMGeneral

|                          |                                                         |
|--------------------------|---------------------------------------------------------|
| Container Name           | IpduMGeneral                                            |
| Parent Container         | <a href="#">IpduM</a>                                   |
| Description              | Contains the general configuration parameters of IpduM. |
| Multiplicity             | 1                                                       |
| Configuration Parameters |                                                         |

| Included Parameters                                  |              |                    |
|------------------------------------------------------|--------------|--------------------|
| Parameter Name                                       | Multiplicity | ECUC ID            |
| <a href="#">IpduMContainedTxPduPriorityHandling</a>  | 0..1         | [ECUC_IpduM_00209] |
| <a href="#">IpduMContainerTxPduMaxFillUpStrategy</a> | 0..1         | [ECUC_IpduM_00220] |
| <a href="#">IpduMDevErrorDetect</a>                  | 1            | [ECUC_IpduM_00132] |
| <a href="#">IpduMHeaderByteOrder</a>                 | 0..1         | [ECUC_IpduM_00197] |
| <a href="#">IpduMMaxTransmitRetries</a>              | 1            | [ECUC_IpduM_00219] |
| <a href="#">IpduMMetaDataSupport</a>                 | 0..1         | [ECUC_IpduM_00205] |
| <a href="#">IpduMStaticPartExists</a>                | 1            | [ECUC_IpduM_00133] |
| <a href="#">IpduMVersionInfoApi</a>                  | 1            | [ECUC_IpduM_00134] |

No Included Containers

]

### [ECUC\_IpduM\_00209] Definition of EcucBooleanParamDef IpduMContainedTxPduPriorityHandling [

|                                  |                                                                                                                                                                              |   |              |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name                   | IpduMContainedTxPduPriorityHandling                                                                                                                                          |   |              |
| Parent Container                 | <a href="#">IpduMGeneral</a>                                                                                                                                                 |   |              |
| Description                      | This parameter enables/disables handling of priority for IpduMContainedTxPdu's with IpduMContainedTxPduCollectionSemantics IPDUM_LAST_IS_BEST. true: enabled false: disabled |   |              |
| Multiplicity                     | 0..1                                                                                                                                                                         |   |              |
| Type                             | EcucBooleanParamDef                                                                                                                                                          |   |              |
| Default value                    | false                                                                                                                                                                        |   |              |
| Post-Build Variant Multiplicity  | false                                                                                                                                                                        |   |              |
| Post-Build Variant Value         | false                                                                                                                                                                        |   |              |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                             | X | All Variants |
|                                  | Link time                                                                                                                                                                    | – |              |
|                                  | Post-build time                                                                                                                                                              | – |              |
| Value Configuration Class        | Pre-compile time                                                                                                                                                             | X | All Variants |
|                                  | Link time                                                                                                                                                                    | – |              |
|                                  | Post-build time                                                                                                                                                              | – |              |
| Dependency                       |                                                                                                                                                                              |   |              |

]

### [ECUC\_IpduM\_00220] Definition of EcucBooleanParamDef IpduMContainerTxPduMaxFillUpStrategy [

|                                 |                                                                                                                                                                                                                                   |  |  |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Parameter Name                  | IpduMContainerTxPduMaxFillUpStrategy                                                                                                                                                                                              |  |  |
| Parent Container                | <a href="#">IpduMGeneral</a>                                                                                                                                                                                                      |  |  |
| Description                     | This parameter enables/disables handling of the maximum fill up strategy for IpduMContainerTxPdu's that contain IpduMContainedTxPdu with IpduMContainedTxPduCollectionSemantics IPDUM_LAST_IS_BEST. true: enabled false: disabled |  |  |
| Multiplicity                    | 0..1                                                                                                                                                                                                                              |  |  |
| Type                            | EcucBooleanParamDef                                                                                                                                                                                                               |  |  |
| Default value                   | false                                                                                                                                                                                                                             |  |  |
| Post-Build Variant Multiplicity | false                                                                                                                                                                                                                             |  |  |







|                                         |                                                                                                                                                                                        |   |              |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| <b>Post-Build Variant Value</b>         | false                                                                                                                                                                                  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                                                                                                                                                | X | All Variants |
|                                         | <b>Link time</b>                                                                                                                                                                       | – |              |
|                                         | <b>Post-build time</b>                                                                                                                                                                 | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                                                                                                                                                | X | All Variants |
|                                         | <b>Link time</b>                                                                                                                                                                       | – |              |
|                                         | <b>Post-build time</b>                                                                                                                                                                 | – |              |
| <b>Dependency</b>                       | This parameter is only valid if IpduMContainedTxPduPriorityHandling is set to TRUE and IpduMContainerHeaderSize of the linked IpduMContainerTxPdu is not set to IPDUM_HEADERTYPE_NONE. |   |              |

### [ECUC\_IpduM\_00132] Definition of EcucBooleanParamDef IpduMDevErrorDetect

|                                  |                                                                                                                                                                                                                                    |   |              |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| <b>Parameter Name</b>            | IpduMDevErrorDetect                                                                                                                                                                                                                |   |              |
| <b>Parent Container</b>          | <a href="#">IpduMGeneral</a>                                                                                                                                                                                                       |   |              |
| <b>Description</b>               | Switches the development error detection and notification on or off.<br><ul style="list-style-type: none"> <li>• true: detection and notification is enabled.</li> <li>• false: detection and notification is disabled.</li> </ul> |   |              |
| <b>Multiplicity</b>              | 1                                                                                                                                                                                                                                  |   |              |
| <b>Type</b>                      | EcucBooleanParamDef                                                                                                                                                                                                                |   |              |
| <b>Default value</b>             | false                                                                                                                                                                                                                              |   |              |
| <b>Post-Build Variant Value</b>  | false                                                                                                                                                                                                                              |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                                                                                                                                                                                            | X | All Variants |
|                                  | <b>Link time</b>                                                                                                                                                                                                                   | – |              |
|                                  | <b>Post-build time</b>                                                                                                                                                                                                             | – |              |
| <b>Dependency</b>                |                                                                                                                                                                                                                                    |   |              |

### [ECUC\_IpduM\_00197] Definition of EcucEnumerationParamDef IpduMHeaderByteOrder

|                           |                                                                               |                                                                  |              |
|---------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------|--------------|
| Parameter Name            | IpduMHeaderByteOrder                                                          |                                                                  |              |
| Parent Container          | <a href="#">IpduMGeneral</a>                                                  |                                                                  |              |
| Description               | This parameter defines the ByteOrder of the headers inside a Container I-PDU. |                                                                  |              |
| Multiplicity              | 0..1                                                                          |                                                                  |              |
| Type                      | EcucEnumerationParamDef                                                       |                                                                  |              |
| Range                     | IPDUM_BIG_ENDIAN                                                              | Headers inside a Container I-PDU shall be ordered big endian.    |              |
|                           | IPDUM_LITTLE_ENDIAN                                                           | Headers inside a Container I-PDU shall be ordered little endian. |              |
| Post-Build Variant Value  | false                                                                         |                                                                  |              |
| Value Configuration Class | Pre-compile time                                                              | X                                                                | All Variants |
|                           | Link time                                                                     | –                                                                |              |
|                           | Post-build time                                                               | –                                                                |              |
| Dependency                |                                                                               |                                                                  |              |

### [ECUC\_IpduM\_00219] Definition of EcucIntegerParamDef IpduMMaxTransmitRetries

|                           |                                                                                                    |   |              |
|---------------------------|----------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMMaxTransmitRetries                                                                            |   |              |
| Parent Container          | <a href="#">IpduMGeneral</a>                                                                       |   |              |
| Description               | Maximum number of retries to send a container message in case PduR_IPduMTransmit returns E_NOT_OK. |   |              |
| Multiplicity              | 1                                                                                                  |   |              |
| Type                      | EcucIntegerParamDef                                                                                |   |              |
| Range                     | 0 .. 65535                                                                                         |   |              |
| Default value             | 10                                                                                                 |   |              |
| Post-Build Variant Value  | false                                                                                              |   |              |
| Value Configuration Class | Pre-compile time                                                                                   | X | All Variants |
|                           | Link time                                                                                          | – |              |
|                           | Post-build time                                                                                    | – |              |
| Dependency                |                                                                                                    |   |              |

### [ECUC\_IpduM\_00205] Definition of EcucBooleanParamDef IpduMMetaDataSupport

|                                  |                                                                                                 |   |              |
|----------------------------------|-------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name                   | IpduMMetaDataSupport                                                                            |   |              |
| Parent Container                 | <a href="#">IpduMGeneral</a>                                                                    |   |              |
| Description                      | This parameter enables/disables the support of meta-data feature. true: enabled false: disabled |   |              |
| Multiplicity                     | 0..1                                                                                            |   |              |
| Type                             | EcucBooleanParamDef                                                                             |   |              |
| Default value                    | false                                                                                           |   |              |
| Post-Build Variant Multiplicity  | false                                                                                           |   |              |
| Post-Build Variant Value         | false                                                                                           |   |              |
| Multiplicity Configuration Class | Pre-compile time                                                                                | X | All Variants |
|                                  | Link time                                                                                       | – |              |
|                                  | Post-build time                                                                                 | – |              |
| Value Configuration Class        | Pre-compile time                                                                                | X | All Variants |
|                                  | Link time                                                                                       | – |              |
|                                  | Post-build time                                                                                 | – |              |
| Dependency                       |                                                                                                 |   |              |

### [ECUC\_IpduM\_00133] Definition of EcucBooleanParamDef IpduMStaticPartExists

|                  |                                                                                                                                                                                                                                                                                                          |  |  |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Parameter Name   | IpduMStaticPartExists                                                                                                                                                                                                                                                                                    |  |  |
| Parent Container | <a href="#">IpduMGeneral</a>                                                                                                                                                                                                                                                                             |  |  |
| Description      | This is to allow optimizations in the case the IpduM will never be used with a static part. Note that this is a pre-compile option. If this is set to False then it will not be possible to add static parts after compilation.<br>True: A static part may exist. False: A static part will never exist. |  |  |
| Multiplicity     | 1                                                                                                                                                                                                                                                                                                        |  |  |





|                           |                     |   |              |
|---------------------------|---------------------|---|--------------|
| Type                      | EcucBooleanParamDef |   |              |
| Default value             | –                   |   |              |
| Post-Build Variant Value  | false               |   |              |
| Value Configuration Class | Pre-compile time    | X | All Variants |
|                           | Link time           | – |              |
|                           | Post-build time     | – |              |
| Dependency                |                     |   |              |


]

## [ECUC\_IpduM\_00134] Definition of EcucBooleanParamDef IpduMVersionInfoApi

[

|                           |                                                                                                                              |   |              |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMVersionInfoApi                                                                                                          |   |              |
| Parent Container          | <a href="#">IpduMGeneral</a>                                                                                                 |   |              |
| Description               | Active/Deactivate the version information API.<br>true: version information activated false: version information deactivated |   |              |
| Multiplicity              | 1                                                                                                                            |   |              |
| Type                      | EcucBooleanParamDef                                                                                                          |   |              |
| Default value             | false                                                                                                                        |   |              |
| Post-Build Variant Value  | false                                                                                                                        |   |              |
| Value Configuration Class | Pre-compile time                                                                                                             | X | All Variants |
|                           | Link time                                                                                                                    | – |              |
|                           | Post-build time                                                                                                              | – |              |
| Dependency                |                                                                                                                              |   |              |

]

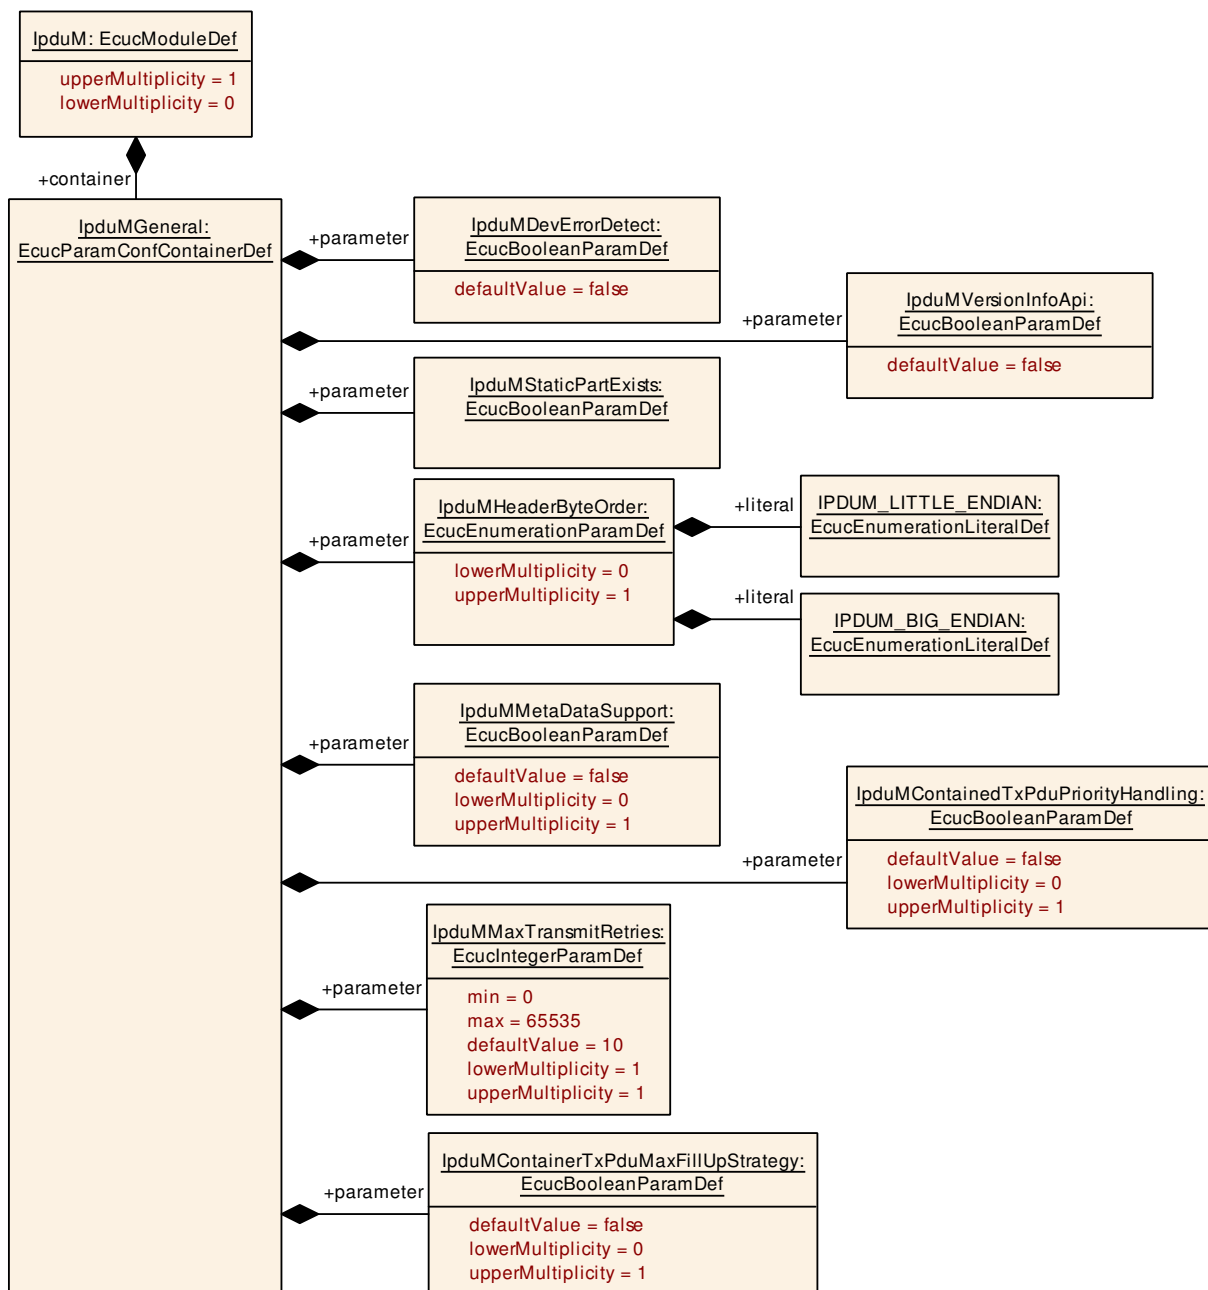

**Figure 10.3: IpduMGeneral**

## 10.2.5 IpduMTxPathway

**[ECUC\_IpduM\_00070] Definition of EcucParamConfContainerDef IpduMTxPathway** [

|                                         |                                                                               |   |                     |
|-----------------------------------------|-------------------------------------------------------------------------------|---|---------------------|
| <b>Container Name</b>                   | IpduMTxPathway                                                                |   |                     |
| <b>Parent Container</b>                 | <a href="#">IpduMConfig</a>                                                   |   |                     |
| <b>Description</b>                      | Contains the configuration parameters transmitted I-PDUs by the IpduM module. |   |                     |
| <b>Multiplicity</b>                     | 0..*                                                                          |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                                                                          |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                                       | X | VARIANT-PRE-COMPILE |
|                                         | <b>Link time</b>                                                              | X | VARIANT-LINK-TIME   |
|                                         | <b>Post-build time</b>                                                        | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |                                                                               |   |                     |

**No Included Parameters**

| Included Containers            |              |                               |
|--------------------------------|--------------|-------------------------------|
| Container Name                 | Multiplicity | Dependency                    |
| <a href="#">IpduMTxRequest</a> | 1            | configuration for a TxRequest |

]

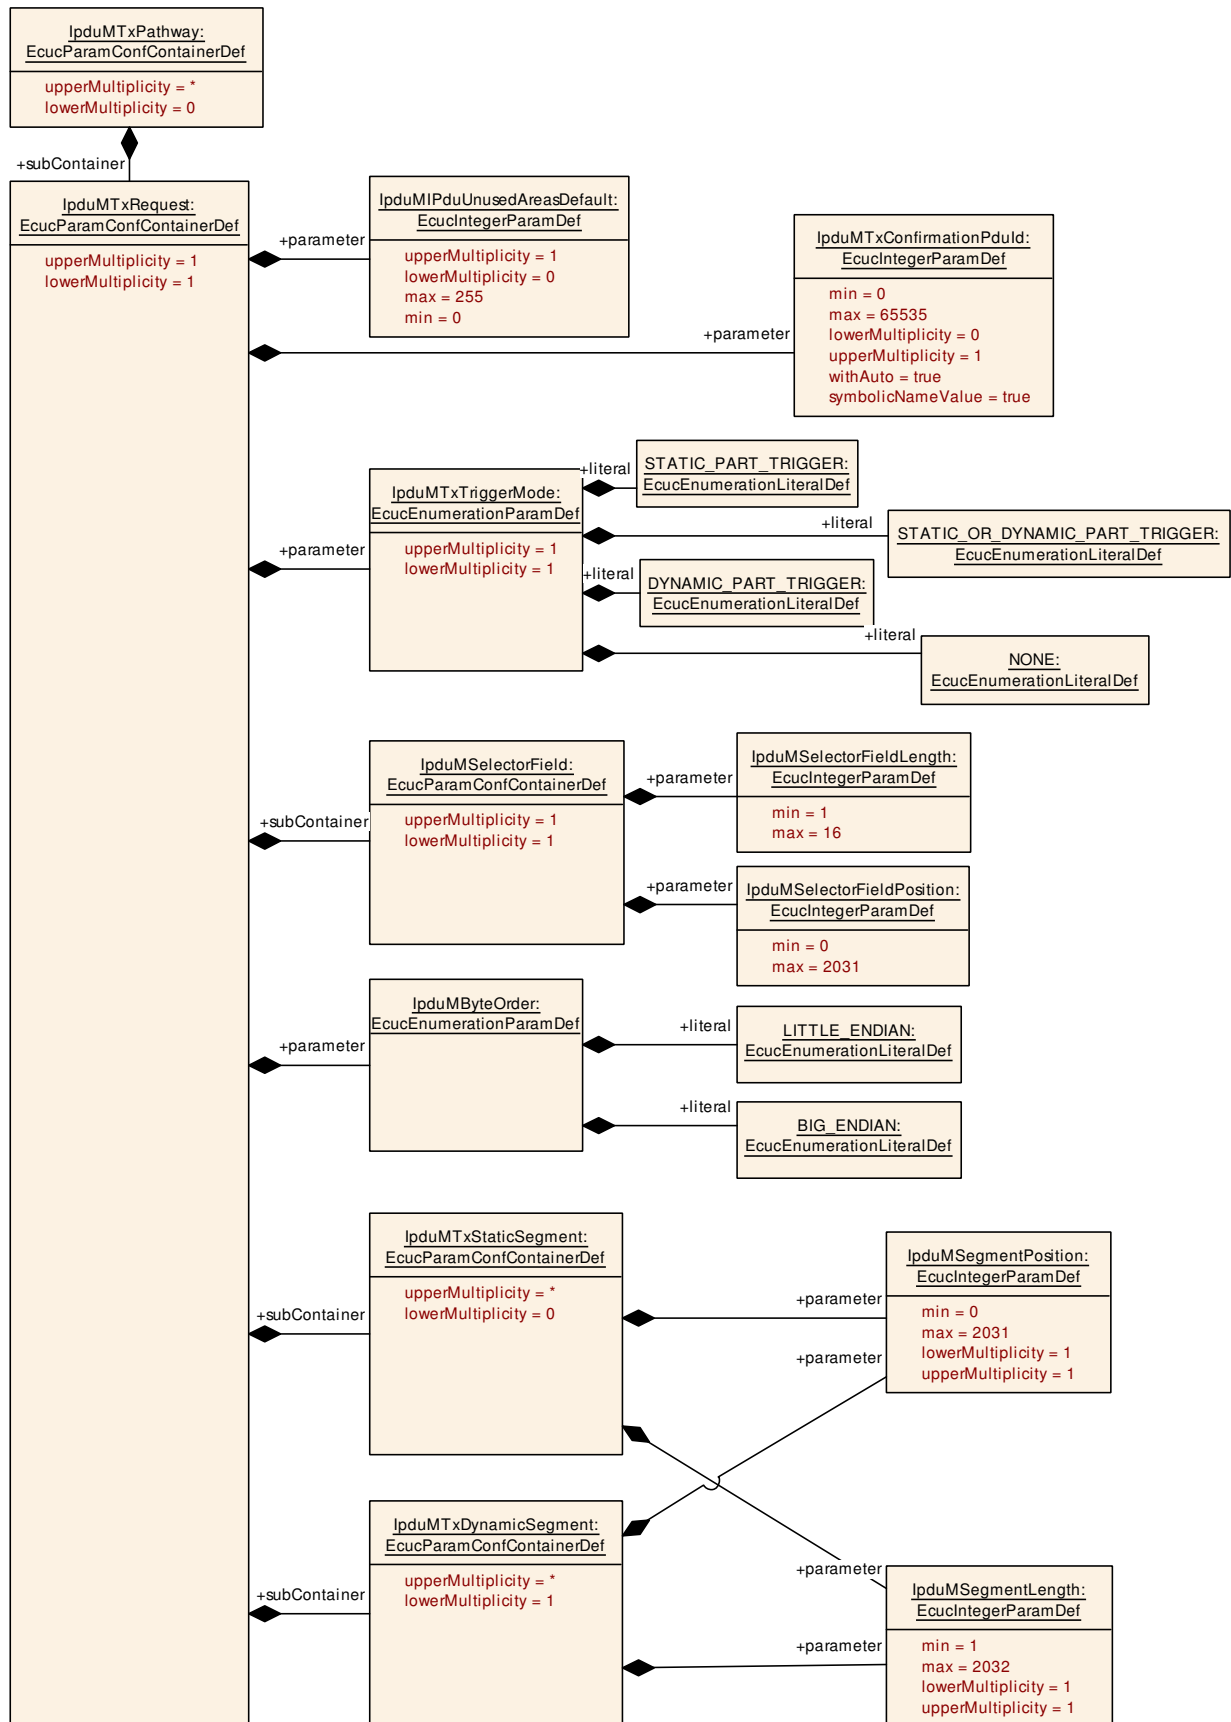


Figure 10.4: IpduMTxPathwayRequest part 1

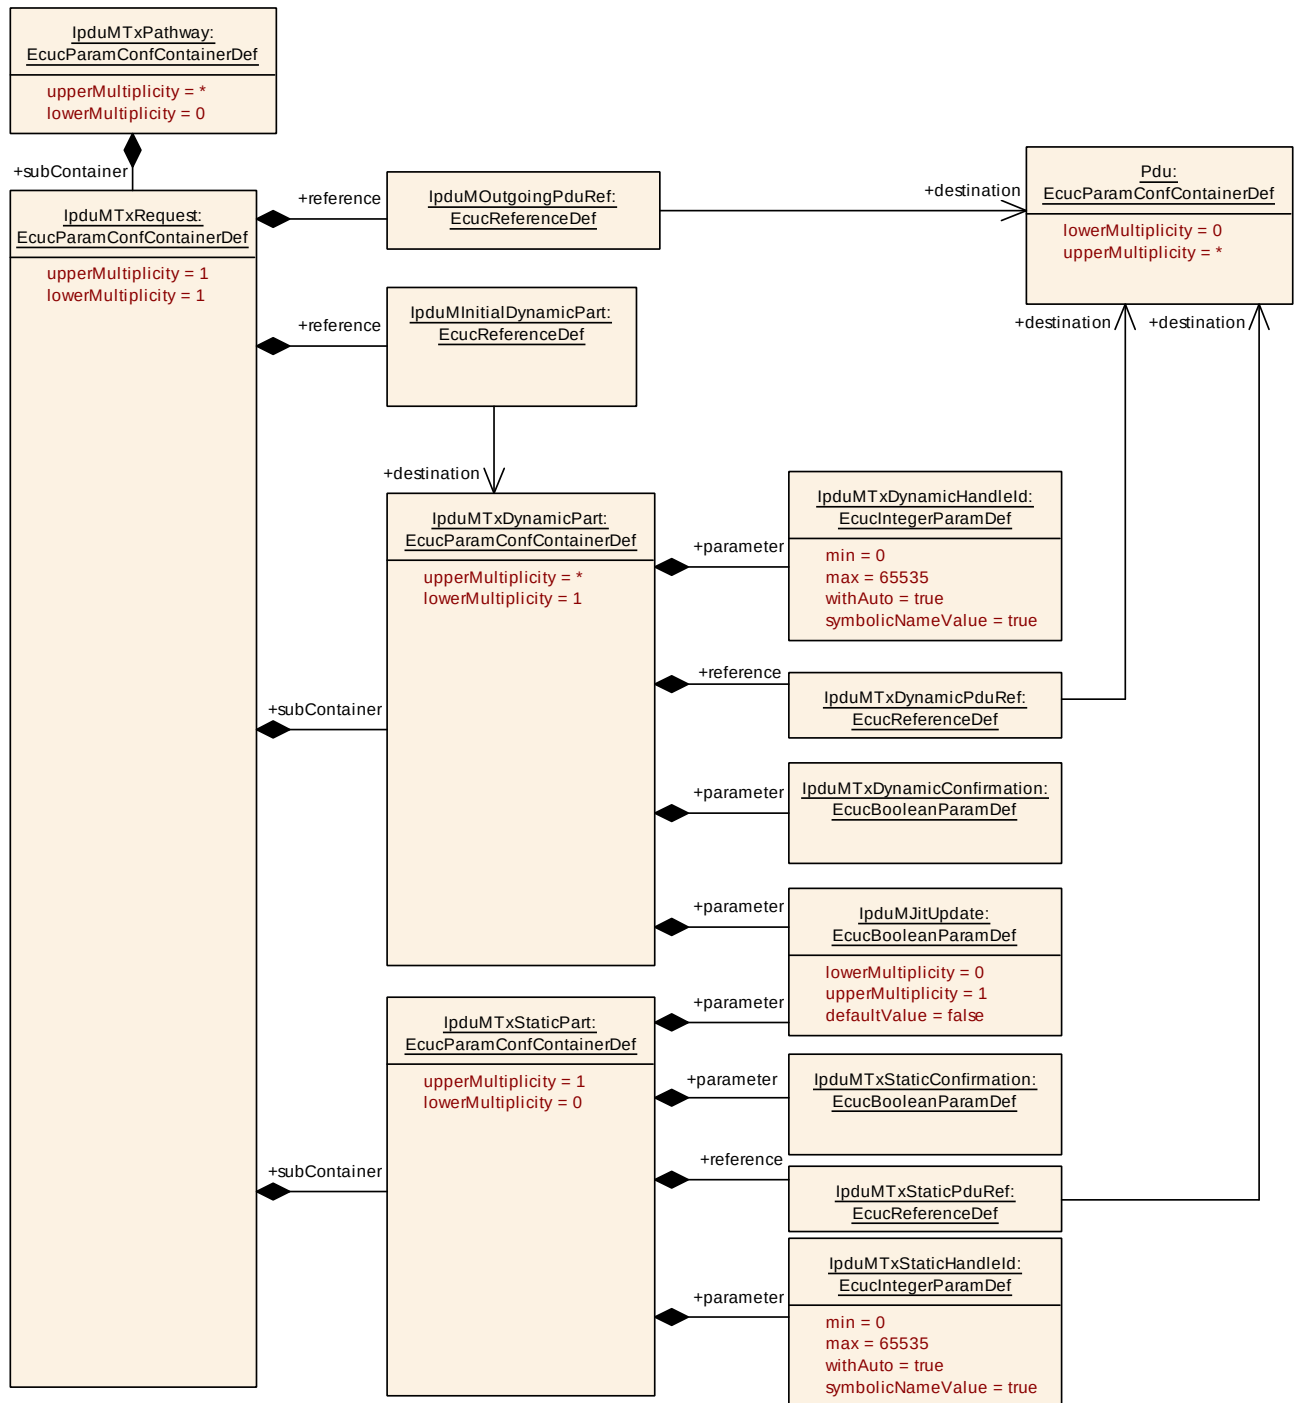


Figure 10.5: IpduMTxPathwayRequest part 2

## 10.2.6 IpduMTxRequest

### [ECUC\_IpduM\_00052] Definition of EcucParamConfContainerDef IpduMTxRequest

|                                 |                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Container Name</b>           | IpduMTxRequest                                                                                                                                                                                                    |
| <b>Parent Container</b>         | <a href="#">IpduMTxPathway</a>                                                                                                                                                                                    |
| <b>Description</b>              | This container is used to specify the configuration for Transmit requests. There will be one instance of this container for each I-PDU that can be requested for transmission (the outgoing I-PDUs) by the IpduM. |
| <b>Multiplicity</b>             | 1                                                                                                                                                                                                                 |
| <b>Configuration Parameters</b> |                                                                                                                                                                                                                   |

| Included Parameters                         |              |                    |
|---------------------------------------------|--------------|--------------------|
| Parameter Name                              | Multiplicity | ECUC ID            |
| <a href="#">IpduMByteOrder</a>              | 1            | [ECUC_IpduM_00162] |
| <a href="#">IpduMIPduUnusedAreasDefault</a> | 0..1         | [ECUC_IpduM_00121] |
| <a href="#">IpduMTxConfirmationPduld</a>    | 0..1         | [ECUC_IpduM_00158] |
| <a href="#">IpduMTxTriggerMode</a>          | 1            | [ECUC_IpduM_00125] |
| <a href="#">IpduMInitialDynamicPart</a>     | 1            | [ECUC_IpduM_00157] |
| <a href="#">IpduMOutgoingPduRef</a>         | 1            | [ECUC_IpduM_00120] |

| Included Containers                   |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Container Name                        | Multiplicity | Dependency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <a href="#">IpduMSelectorField</a>    | 1            | Specifies the position of the selector field in the outgoing I-PDU.                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <a href="#">IpduMTxDynamicPart</a>    | 1..*         | This (These) included container(s) must exist for each unique selector field value for this outgoing IpduM I-PDU.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <a href="#">IpduMTxDynamicSegment</a> | 1..*         | The dynamic part of the multiplexed outgoing I-Pdu (referenced by IpduMOutgoingPduRef) can be separated into several segments. For each segment one IpduMTxDynamicSegment container shall be created that contains the location and the length of the segment.<br>Please note that each configured segment will be copied out of the source I-Pdu that is referenced in the IpduMTxDynamicPart container and will be copied to the same location in the multiplexed outgoing I-Pdu. The segment layout for all dynamic Parts is always identical. |
| <a href="#">IpduMTxStaticPart</a>     | 0..1         | This included container configures the static part, if present.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <a href="#">IpduMTxStaticSegment</a>  | 0..*         | The static part of the multiplexed outgoing I-Pdu (referenced by IpduMOutgoingPduRef) can be separated into several segments. For each segment one IpduMTxStaticSegment container shall be created that contains the location and the length of the segment. Please note that each segment in the source I-Pdu that is referenced in the IpduMTxStaticPart container will be copied to the same location in the multiplexed outgoing I-Pdu.                                                                                                       |

」

For parameter table [ECUC\_IpduM\_00162] [IpduMByteOrder](#), see definition below container [IpduMRxIndication](#).



## [ECUC\_IpduM\_00121] Definition of EcucIntegerParamDef IpduMIPduUnusedAreasDefault [

|                                  |                                                                                                                                            |   |                     |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name                   | IpduMIPduUnusedAreasDefault                                                                                                                |   |                     |
| Parent Container                 | <a href="#">IpduMTxRequest</a>                                                                                                             |   |                     |
| Description                      | IpduM module fills not used areas of an I-PDU with this bit-pattern If this attribute is omitted the IpduM module does not fill the I-PDU. |   |                     |
| Multiplicity                     | 0..1                                                                                                                                       |   |                     |
| Type                             | EcucIntegerParamDef                                                                                                                        |   |                     |
| Range                            | 0 .. 255                                                                                                                                   |   |                     |
| Default value                    | –                                                                                                                                          |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                       |   |                     |
| Post-Build Variant Value         | true                                                                                                                                       |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                           | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                  | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                            | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                                                                                                           | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                  | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                            | X | VARIANT-POST-BUILD  |
| Dependency                       |                                                                                                                                            |   |                     |

]

## [ECUC\_IpduM\_00158] Definition of EcucIntegerParamDef IpduMTxConfirmationPduId [

|                                  |                                                                                                                                                                                                                                                          |   |              |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name                   | IpduMTxConfirmationPduld                                                                                                                                                                                                                                 |   |              |
| Parent Container                 | <a href="#">IpduMTxRequest</a>                                                                                                                                                                                                                           |   |              |
| Description                      | Handle Id used by the PduR for confirmation (IpduM_TxConfirmation) and for Trigger Transmit (IpduM_TriggerTransmit). The existence of this parameter is essential for the PduR generation tool to actually find a symbolicNameValue for the OutgoingPdu. |   |              |
| Multiplicity                     | 0..1                                                                                                                                                                                                                                                     |   |              |
| Type                             | EcucIntegerParamDef (Symbolic Name generated for this parameter)                                                                                                                                                                                         |   |              |
| Range                            | 0 .. 65535                                                                                                                                                                                                                                               |   |              |
| Default value                    | –                                                                                                                                                                                                                                                        |   |              |
| Post-Build Variant Multiplicity  | false                                                                                                                                                                                                                                                    |   |              |
| Post-Build Variant Value         | false                                                                                                                                                                                                                                                    |   |              |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                                                                                         | X | All Variants |
|                                  | Link time                                                                                                                                                                                                                                                | – |              |
|                                  | Post-build time                                                                                                                                                                                                                                          | – |              |
| Value Configuration Class        | Pre-compile time                                                                                                                                                                                                                                         | X | All Variants |
|                                  | Link time                                                                                                                                                                                                                                                | – |              |
|                                  | Post-build time                                                                                                                                                                                                                                          | – |              |
| Dependency                       | withAuto = true                                                                                                                                                                                                                                          |   |              |

]

## [ECUC\_IpduM\_00125] Definition of EcucEnumerationParamDef IpduMTxTrigger Mode

|                           |                                                                                  |                                                                                                                                   |                     |
|---------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Parameter Name            | IpduMTxTriggerMode                                                               |                                                                                                                                   |                     |
| Parent Container          | <a href="#">IpduMTxRequest</a>                                                   |                                                                                                                                   |                     |
| Description               | Selects whether to send the multiplexed I-PDU immediately or at some later date. |                                                                                                                                   |                     |
| Multiplicity              | 1                                                                                |                                                                                                                                   |                     |
| Type                      | EcucEnumerationParamDef                                                          |                                                                                                                                   |                     |
| Range                     | DYNAMIC_PART_TRIGGER                                                             | Writing the I-PDU representing the dynamic part does trigger a sending of the I-PDU.                                              |                     |
|                           | NONE                                                                             | Only the buffer in the IpduM are written but not send is triggered, used for IpduM I-PDUs which are requested by TriggerTransmit. |                     |
|                           | STATIC_OR_DYNAMIC_PART_TRIGGER                                                   | Writing the I-PDU representing the static or the dynamic part does trigger a sending of the I-PDU.                                |                     |
|                           | STATIC_PART_TRIGGER                                                              | Writing the I-PDU representing the static part does trigger a sending of the I-PDU.                                               |                     |
| Post-Build Variant Value  | true                                                                             |                                                                                                                                   |                     |
| Value Configuration Class | Pre-compile time                                                                 | X                                                                                                                                 | VARIANT-PRE-COMPILE |
|                           | Link time                                                                        | X                                                                                                                                 | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                  | X                                                                                                                                 | VARIANT-POST-BUILD  |
| Dependency                |                                                                                  |                                                                                                                                   |                     |

## [ECUC\_IpduM\_00157] Definition of EcucReferenceDef IpduMInitialDynamicPart

|                           |                                                                                           |   |                     |
|---------------------------|-------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMInitialDynamicPart                                                                   |   |                     |
| Parent Container          | <a href="#">IpduMTxRequest</a>                                                            |   |                     |
| Description               | Reference to the dynamic part that shall be used to initialize this multiplexed TX-I-PDU. |   |                     |
| Multiplicity              | 1                                                                                         |   |                     |
| Type                      | Reference to <a href="#">IpduMTxDynamicPart</a>                                           |   |                     |
| Post-Build Variant Value  | true                                                                                      |   |                     |
| Value Configuration Class | Pre-compile time                                                                          | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                 | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                           | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                           |   |                     |

## [ECUC\_IpduM\_00120] Definition of EcucReferenceDef IpduMOutgoingPduRef

|                           |                                                                                                                                                                     |   |                     |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMOutgoingPduRef                                                                                                                                                 |   |                     |
| Parent Container          | <a href="#">IpduMTxRequest</a>                                                                                                                                      |   |                     |
| Description               | Reference to the PDU defining the outgoing I-PDU. When the outgoing I-PDU is sent this is the I-PDU ID to give it. It is the IpduM I-PDU ID of the assembled I-PDU. |   |                     |
| Multiplicity              | 1                                                                                                                                                                   |   |                     |
| Type                      | Reference to Pdu                                                                                                                                                    |   |                     |
| Post-Build Variant Value  | true                                                                                                                                                                |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                                    | X | VARIANT-PRE-COMPILE |





|            |                 |   |                    |
|------------|-----------------|---|--------------------|
|            | Link time       | X | VARIANT-LINK-TIME  |
|            | Post-build time | X | VARIANT-POST-BUILD |
| Dependency |                 |   |                    |

]

## 10.2.7 IpduMTxDynamicPart

### [ECUC\_IpduM\_00056] Definition of EcucParamConfContainerDef IpduMTxDynamicPart [

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |   |                     |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Container Name                   | IpduMTxDynamicPart                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |   |                     |
| Parent Container                 | <a href="#">IpduMTxRequest</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |                     |
| Description                      | Configuration parameters for an instance of a TxRequest call into the IpduM. When a Tx Request with the IpduMTxDynamicHandleId is received by the IpduM, all segments (defined in the IpduMDynamicSegment container) are copied from the incoming I-PDU into the outgoing I-PDU buffer and then the send mode honored. This container is used by the dynamic part of a TxRequest configuration. Therefore, for each outgoing I-PDU there will be one instance of this container for the dynamic part. |   |                     |
| Multiplicity                     | 1..*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |   |                     |

| Included Parameters                        |              |                    |
|--------------------------------------------|--------------|--------------------|
| Parameter Name                             | Multiplicity | ECUC ID            |
| <a href="#">IpduMJitUpdate</a>             | 0..1         | [ECUC_IpduM_00167] |
| <a href="#">IpduMTxDynamicConfirmation</a> | 1            | [ECUC_IpduM_00163] |
| <a href="#">IpduMTxDynamicHandleId</a>     | 1            | [ECUC_IpduM_00127] |
| <a href="#">IpduMTxDynamicPduRef</a>       | 1            | [ECUC_IpduM_00126] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

]

### [ECUC\_IpduM\_00167] Definition of EcucBooleanParamDef IpduMJitUpdate [

|                                 |                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------|
| Parameter Name                  | IpduMJitUpdate                                                                                          |
| Parent Container                | <a href="#">IpduMTxDynamicPart</a> , <a href="#">IpduMTxStaticPart</a>                                  |
| Description                     | If configured to true fetch the data of this part Just-In-Time via the triggerTransmit API of the PduR. |
| Multiplicity                    | 0..1                                                                                                    |
| Type                            | EcucBooleanParamDef                                                                                     |
| Default value                   | false                                                                                                   |
| Post-Build Variant Multiplicity | true                                                                                                    |





|                                  |                  |   |                     |
|----------------------------------|------------------|---|---------------------|
| Post-Build Variant Value         | true             |   |                     |
| Multiplicity Configuration Class | Pre-compile time | X | VARIANT-PRE-COMPILE |
|                                  | Link time        | X | VARIANT-LINK-TIME   |
|                                  | Post-build time  | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time | X | VARIANT-PRE-COMPILE |
|                                  | Link time        | X | VARIANT-LINK-TIME   |
|                                  | Post-build time  | X | VARIANT-POST-BUILD  |
| Dependency                       |                  |   |                     |

### [ECUC\_IpduM\_00163] Definition of EcucBooleanParamDef IpduMTxDynamicConfirmation

|                           |                                                                                                                                                                         |   |                     |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMTxDynamicConfirmation                                                                                                                                              |   |                     |
| Parent Container          | <a href="#">IpduMTxDynamicPart</a>                                                                                                                                      |   |                     |
| Description               | A transmit request can be confirmed by the lower layer. If this parameter is set to true a confirmation of the I-PDU in COM representing the dynamic part is generated. |   |                     |
| Multiplicity              | 1                                                                                                                                                                       |   |                     |
| Type                      | EcucBooleanParamDef                                                                                                                                                     |   |                     |
| Default value             | –                                                                                                                                                                       |   |                     |
| Post-Build Variant Value  | true                                                                                                                                                                    |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                                        | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                                               | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                                         | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                                                                                         |   |                     |

### [ECUC\_IpduM\_00127] Definition of EcucIntegerParamDef IpduMTxDynamicHandleId

|                           |                                                                                                                                                                                   |   |              |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMTxDynamicHandleId                                                                                                                                                            |   |              |
| Parent Container          | <a href="#">IpduMTxDynamicPart</a>                                                                                                                                                |   |              |
| Description               | This defines an incoming handle id. When the handle of an incoming Tx Request matches this id, the configured dynamic segments are copied and the IpduMTxTrigger Mode is honored. |   |              |
| Multiplicity              | 1                                                                                                                                                                                 |   |              |
| Type                      | EcucIntegerParamDef (Symbolic Name generated for this parameter)                                                                                                                  |   |              |
| Range                     | 0 .. 65535                                                                                                                                                                        |   |              |
| Default value             | –                                                                                                                                                                                 |   |              |
| Post-Build Variant Value  | false                                                                                                                                                                             |   |              |
| Value Configuration Class | Pre-compile time                                                                                                                                                                  | X | All Variants |
|                           | Link time                                                                                                                                                                         | – |              |
|                           | Post-build time                                                                                                                                                                   | – |              |
| Dependency                | withAuto = true                                                                                                                                                                   |   |              |

## [ECUC\_IpduM\_00126] Definition of EcucReferenceDef IpduMTxDynamicPduRef

|                           |                                                                                                           |   |                     |
|---------------------------|-----------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMTxDynamicPduRef                                                                                      |   |                     |
| Parent Container          | <a href="#">IpduMTxDynamicPart</a>                                                                        |   |                     |
| Description               | Reference to the Pdu representation in the ECU Configuration Description exchange file to be transmitted. |   |                     |
| Multiplicity              | 1                                                                                                         |   |                     |
| Type                      | Reference to Pdu                                                                                          |   |                     |
| Post-Build Variant Value  | true                                                                                                      |   |                     |
| Value Configuration Class | Pre-compile time                                                                                          | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                 | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                           | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                           |   |                     |

## 10.2.8 IpduMTxDynamicSegment

## [ECUC\_IpduM\_00168] Definition of EcucParamConfContainerDef IpduMTxDynamicSegment

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |   |                     |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Container Name                   | IpduMTxDynamicSegment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |                     |
| Parent Container                 | <a href="#">IpduMTxRequest</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |   |                     |
| Description                      | <p>The dynamic part of the multiplexed outgoing I-Pdu (referenced by IpduMOutgoingPduRef) can be separated into several segments. For each segment one IpduMTxDynamicSegment container shall be created that contains the location and the length of the segment.</p> <p>Please note that each configured segment will be copied out of the source I-Pdu that is referenced in the IpduMTxDynamicPart container and will be copied to the same location in the multiplexed outgoing I-Pdu. The segment layout for all dynamic Parts is always identical.</p> |   |                     |
| Multiplicity                     | 1..*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |   |                     |

| Included Parameters                  |              |                    |
|--------------------------------------|--------------|--------------------|
| Parameter Name                       | Multiplicity | ECUC ID            |
| <a href="#">IpduMSegmentLength</a>   | 1            | [ECUC_IpduM_00114] |
| <a href="#">IpduMSegmentPosition</a> | 1            | [ECUC_IpduM_00159] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

For parameter table [ECUC\_IpduM\_00114] [IpduMSegmentLength](#), see definition below container [IpduMRxDynamicSegment](#).

For parameter table [ECUC\_IpduM\_00159] [IpduMSegmentPosition](#), see definition below container [IpduMRxDynamicSegment](#).

### 10.2.9 IpduMTxStaticPart

#### [ECUC\_IpduM\_00082] Definition of EcucParamConfContainerDef IpduMTxStaticPart

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |   |                     |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Container Name                   | IpduMTxStaticPart                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |   |                     |
| Parent Container                 | <a href="#">IpduMTxRequest</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |                     |
| Description                      | Configuration parameters for an instance of a Tx_Request call into the IpduM. When a Tx Request with the IpduMTxStaticHandleId is received by the IpduM, all segments (defined in the IpduMStaticSegment container) are copied from the incoming I-PDU into the outgoing I-PDU buffer and then the send mode honored. This container is used for the static part of a TxRequest configuration. Therefore, for each outgoing I-PDU there will be one instance of this container for the static part if it exists. |   |                     |
| Multiplicity                     | 0..1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |   |                     |

| Included Parameters                       |              |                    |
|-------------------------------------------|--------------|--------------------|
| Parameter Name                            | Multiplicity | ECUC ID            |
| <a href="#">IpduMJitUpdate</a>            | 0..1         | [ECUC_IpduM_00167] |
| <a href="#">IpduMTxStaticConfirmation</a> | 1            | [ECUC_IpduM_00164] |
| <a href="#">IpduMTxStaticHandleId</a>     | 1            | [ECUC_IpduM_00129] |
| <a href="#">IpduMTxStaticPduRef</a>       | 1            | [ECUC_IpduM_00128] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

For parameter table [ECUC\_IpduM\_00167] [IpduMJitUpdate](#), see definition below container [IpduMTxDynamicPart](#).

#### [ECUC\_IpduM\_00164] Definition of EcucBooleanParamDef IpduMTxStaticConfirmation

|                          |                                                                                                                                                                        |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameter Name           | IpduMTxStaticConfirmation                                                                                                                                              |
| Parent Container         | <a href="#">IpduMTxStaticPart</a>                                                                                                                                      |
| Description              | A transmit request can be confirmed by the lower layer. If this parameter is set to true a confirmation of the I-PDU in COM representing the static part is generated. |
| Multiplicity             | 1                                                                                                                                                                      |
| Type                     | EcucBooleanParamDef                                                                                                                                                    |
| Default value            | —                                                                                                                                                                      |
| Post-Build Variant Value | true                                                                                                                                                                   |





|                           |                  |   |                     |
|---------------------------|------------------|---|---------------------|
| Value Configuration Class | Pre-compile time | X | VARIANT-PRE-COMPILE |
|                           | Link time        | X | VARIANT-LINK-TIME   |
|                           | Post-build time  | X | VARIANT-POST-BUILD  |
| Dependency                |                  |   |                     |

└

### [ECUC\_IpduM\_00129] Definition of EcucIntegerParamDef IpduMTxStaticHandleId

|                           |                                                                                                                                                                                  |   |              |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMTxStaticHandleId                                                                                                                                                            |   |              |
| Parent Container          | <a href="#">IpduMTxStaticPart</a>                                                                                                                                                |   |              |
| Description               | This defines an incoming handle id. When the handle of an incoming Tx Request matches this id, the configured static segments are copied and the IpduMTxTrigger Mode is honored. |   |              |
| Multiplicity              | 1                                                                                                                                                                                |   |              |
| Type                      | EcucIntegerParamDef (Symbolic Name generated for this parameter)                                                                                                                 |   |              |
| Range                     | 0 .. 65535                                                                                                                                                                       |   |              |
| Default value             | –                                                                                                                                                                                |   |              |
| Post-Build Variant Value  | false                                                                                                                                                                            |   |              |
| Value Configuration Class | Pre-compile time                                                                                                                                                                 | X | All Variants |
|                           | Link time                                                                                                                                                                        | – |              |
|                           | Post-build time                                                                                                                                                                  | – |              |
| Dependency                | withAuto = true                                                                                                                                                                  |   |              |

└

### [ECUC\_IpduM\_00128] Definition of EcucReferenceDef IpduMTxStaticPduRef

|                           |                                                                                                           |   |                     |
|---------------------------|-----------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMTxStaticPduRef                                                                                       |   |                     |
| Parent Container          | <a href="#">IpduMTxStaticPart</a>                                                                         |   |                     |
| Description               | Reference to the Pdu representation in the ECU Configuration Description exchange file to be transmitted. |   |                     |
| Multiplicity              | 1                                                                                                         |   |                     |
| Type                      | Reference to Pdu                                                                                          |   |                     |
| Post-Build Variant Value  | true                                                                                                      |   |                     |
| Value Configuration Class | Pre-compile time                                                                                          | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                 | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                           | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                           |   |                     |

└

## 10.2.10 IpduMTxStaticSegment

### [ECUC\_IpduM\_00171] Definition of EcucParamConfContainerDef IpduMTxStaticSegment

|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                              |   |                     |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| <b>Container Name</b>                   | IpduMTxStaticSegment                                                                                                                                                                                                                                                                                                                                                                                                                                         |   |                     |
| <b>Parent Container</b>                 | <a href="#">IpduMTxRequest</a>                                                                                                                                                                                                                                                                                                                                                                                                                               |   |                     |
| <b>Description</b>                      | <p>The static part of the multiplexed outgoing I-Pdu (referenced by IpduMOutgoingPdu Ref) can be separated into several segments. For each segment one IpduMTxStatic Segment container shall be created that contains the location and the length of the segment.</p> <p>Please note that each segment in the source I-Pdu that is referenced in the IpduMTx StaticPart container will be copied to the same location in the multiplexed outgoing I-Pdu.</p> |   |                     |
| <b>Multiplicity</b>                     | 0..*                                                                                                                                                                                                                                                                                                                                                                                                                                                         |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                                                                                                                                                                                                                                                                                                                                                                                                                                                         |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                                                                                                                                                                                                                                                                                                                                                                                                                      | X | VARIANT-PRE-COMPILE |
|                                         | <b>Link time</b>                                                                                                                                                                                                                                                                                                                                                                                                                                             | X | VARIANT-LINK-TIME   |
|                                         | <b>Post-build time</b>                                                                                                                                                                                                                                                                                                                                                                                                                                       | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |                                                                                                                                                                                                                                                                                                                                                                                                                                                              |   |                     |

| Included Parameters                  |              |                    |
|--------------------------------------|--------------|--------------------|
| Parameter Name                       | Multiplicity | ECUC ID            |
| <a href="#">IpduMSegmentLength</a>   | 1            | [ECUC_IpduM_00114] |
| <a href="#">IpduMSegmentPosition</a> | 1            | [ECUC_IpduM_00159] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

For parameter table [ECUC\_IpduM\_00114] [IpduMSegmentLength](#), see definition below container [IpduMRxDynamicSegment](#).

For parameter table [ECUC\_IpduM\_00159] [IpduMSegmentPosition](#), see definition below container [IpduMRxDynamicSegment](#).

### 10.2.11 IpduMRxPathway

[ECUC\_IpduM\_00071] Definition of EcucParamConfContainerDef IpduMRxPathway [

|                                         |                                                                            |   |                     |
|-----------------------------------------|----------------------------------------------------------------------------|---|---------------------|
| <b>Container Name</b>                   | IpduMRxPathway                                                             |   |                     |
| <b>Parent Container</b>                 | <a href="#">IpduMConfig</a>                                                |   |                     |
| <b>Description</b>                      | Contains the configuration parameters received I-PDUs by the IpduM module. |   |                     |
| <b>Multiplicity</b>                     | 0..*                                                                       |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                                                                       |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                                    | X | VARIANT-PRE-COMPILE |
|                                         | <b>Link time</b>                                                           | X | VARIANT-LINK-TIME   |
|                                         | <b>Post-build time</b>                                                     | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |                                                                            |   |                     |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|



| Included Containers               |              |                                |
|-----------------------------------|--------------|--------------------------------|
| Container Name                    | Multiplicity | Dependency                     |
| <a href="#">IpduMRxIndication</a> | 1            | configuration for RxIndication |

]

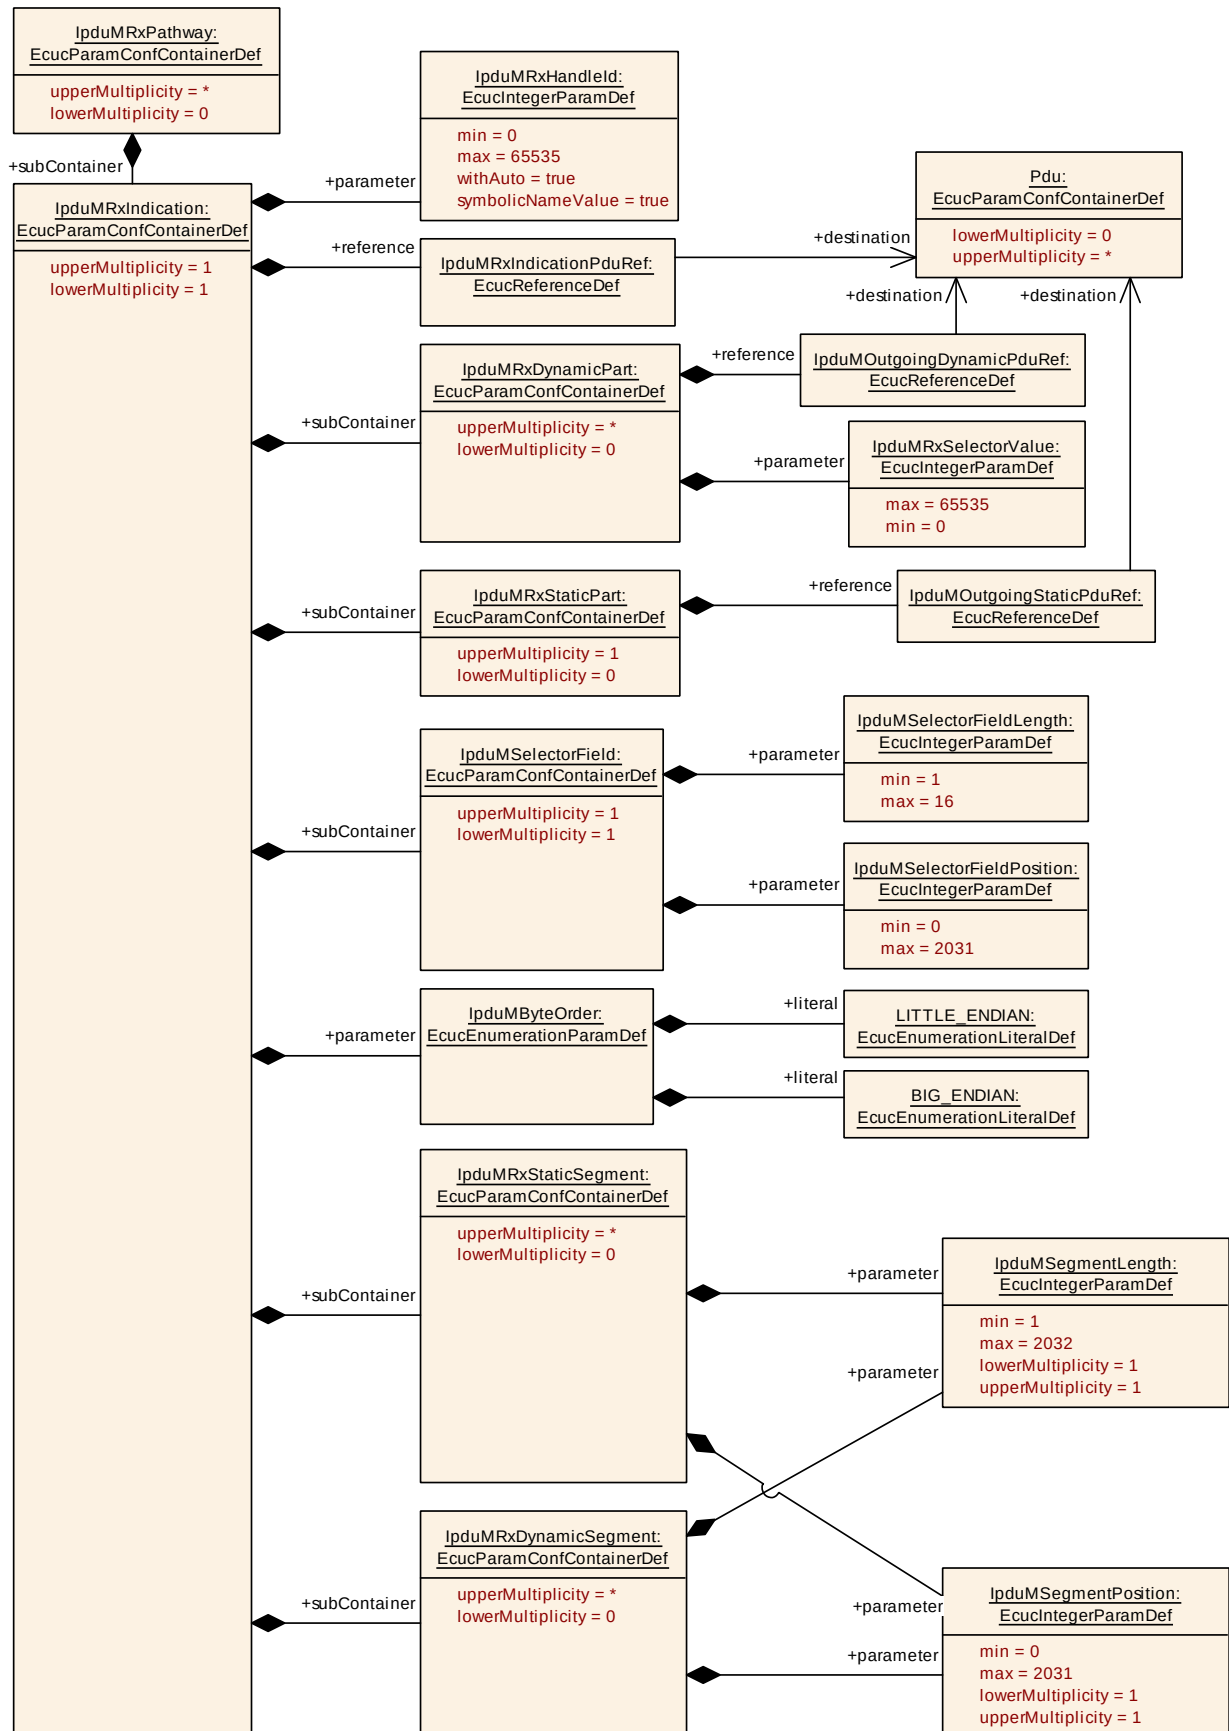


Figure 10.6: IpduMRxPathwayIndication

## 10.2.12 IpduMRxIndication

### [ECUC\_IpduM\_00047] Definition of EcucParamConfContainerDef IpduMRxIndication

|                                 |                                                             |
|---------------------------------|-------------------------------------------------------------|
| <b>Container Name</b>           | IpduMRxIndication                                           |
| <b>Parent Container</b>         | <a href="#">IpduMRxPathway</a>                              |
| <b>Description</b>              | Contains the configuration for incoming RxIndication calls. |
| <b>Multiplicity</b>             | 1                                                           |
| <b>Configuration Parameters</b> |                                                             |

| Included Parameters                     |              |                    |
|-----------------------------------------|--------------|--------------------|
| Parameter Name                          | Multiplicity | ECUC ID            |
| <a href="#">IpduMByteOrder</a>          | 1            | [ECUC_IpduM_00162] |
| <a href="#">IpduMRxHandleId</a>         | 1            | [ECUC_IpduM_00109] |
| <a href="#">IpduMRxIndicationPduRef</a> | 1            | [ECUC_IpduM_00108] |

| Included Containers                   |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Container Name                        | Multiplicity | Dependency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <a href="#">IpduMRxDynamicPart</a>    | 0..*         | Each of these containers contains the configuration for one value of the selector field for the incoming I-PDU's dynamic part.                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <a href="#">IpduMRxDynamicSegment</a> | 0..*         | The dynamic part of the multiplexed incoming I-Pdu (referenced by IpduMRxIndicationPduRef) can be separated into several segments. For each segment one IpduMRxDynamicSegment container shall be created that contains the location and the length of the segment.<br>Please note that each configured segment will be copied into the destination I-Pdu that is referenced in the IpduMRxDynamicPart container and will be copied from the same location in the multiplexed incoming I-Pdu. The segment layout for all dynamic Parts is always identical. |
| <a href="#">IpduMRxStaticPart</a>     | 0..1         | This contains the configuration for the incoming I-PDU's static part. If the incoming I-PDU has no static part then this is omitted.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <a href="#">IpduMRxStaticSegment</a>  | 0..*         | The static part of the multiplexed incoming I-Pdu (referenced by IpduMRxIndicationPduRef) can be separated into several segments. For each segment one IpduMRxStaticSegment container shall be created that contains the location and the length of the segment.<br>Please note that each configured segment will be copied into the destination I-Pdu that is referenced in the IpduMRxStaticPart container and will be copied from the same location in the multiplexed incoming I-Pdu.                                                                  |
| <a href="#">IpduMSelectorField</a>    | 1            | This contains the location of the selector field. At run-time, the selector field is used to select which dynamic part is unpacked.                                                                                                                                                                                                                                                                                                                                                                                                                        |

## [ECUC\_IpduM\_00162] Definition of EcucEnumerationParamDef IpduMByteOrder

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |   |                     |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMByteOrder                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |   |                     |
| Parent Container          | <a href="#">IpduMRxIndication</a> , <a href="#">IpduMTxRequest</a>                                                                                                                                                                                                                                                                                                                                                                                                                                       |   |                     |
| Description               | This parameter defines the ByteOrder for all segments (static and dynamic part) and for the selectorField within the MultiplexedPdu.<br>The absolute position of a segment in the MultiplexedIPdu is determined by the definition of the ByteOrder parameter: If BIG_ENDIAN is specified, the Segment Position indicates the bit position of the most significant bit in an IPDU. If LITTLE_ENDIAN is specified, the SegmentPosition indicates the bit position of the least significant bit in an IPDU. |   |                     |
| Multiplicity              | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |                     |
| Type                      | EcucEnumerationParamDef                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |   |                     |
| Range                     | BIG_ENDIAN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | – |                     |
|                           | LITTLE_ENDIAN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | – |                     |
| Post-Build Variant Value  | true                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |   |                     |

## [ECUC\_IpduM\_00109] Definition of EcucIntegerParamDef IpduMRxHandleId

|                           |                                                                                                                                                                             |   |              |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMRxHandleId                                                                                                                                                             |   |              |
| Parent Container          | <a href="#">IpduMRxIndication</a>                                                                                                                                           |   |              |
| Description               | This is the I-PDU ID of the incoming I-PDU. If an incoming RxIndication's I-PDU ID matches this value then it is unpacked according to the specification in this container. |   |              |
| Multiplicity              | 1                                                                                                                                                                           |   |              |
| Type                      | EcucIntegerParamDef (Symbolic Name generated for this parameter)                                                                                                            |   |              |
| Range                     | 0 .. 65535                                                                                                                                                                  |   |              |
| Default value             | –                                                                                                                                                                           |   |              |
| Post-Build Variant Value  | false                                                                                                                                                                       |   |              |
| Value Configuration Class | Pre-compile time                                                                                                                                                            | X | All Variants |
|                           | Link time                                                                                                                                                                   | – |              |
|                           | Post-build time                                                                                                                                                             | – |              |
| Dependency                | withAuto = true                                                                                                                                                             |   |              |

## [ECUC\_IpduM\_00108] Definition of EcucReferenceDef IpduMRxIndicationPduRef

|                          |                                                                                                  |  |  |
|--------------------------|--------------------------------------------------------------------------------------------------|--|--|
| Parameter Name           | IpduMRxIndicationPduRef                                                                          |  |  |
| Parent Container         | <a href="#">IpduMRxIndication</a>                                                                |  |  |
| Description              | Reference to the received Pdu representation in the ECU Configuration Description exchange file. |  |  |
| Multiplicity             | 1                                                                                                |  |  |
| Type                     | Reference to Pdu                                                                                 |  |  |
| Post-Build Variant Value | true                                                                                             |  |  |





|                           |                  |   |                     |
|---------------------------|------------------|---|---------------------|
| Value Configuration Class | Pre-compile time | X | VARIANT-PRE-COMPILE |
|                           | Link time        | X | VARIANT-LINK-TIME   |
|                           | Post-build time  | X | VARIANT-POST-BUILD  |
| Dependency                |                  |   |                     |

### 10.2.13 IpduMRxDynamicPart

#### [ECUC\_IpduM\_00048] Definition of EcucParamConfContainerDef IpduMRxDynamicPart

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |   |                     |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Container Name                   | IpduMRxDynamicPart                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |   |                     |
| Parent Container                 | <a href="#">IpduMRxIndication</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |   |                     |
| Description                      | <p>This container contains the configuration for the dynamic part of incoming RxIndication calls. When an incoming received I-PDU's selector field matches the IpduMRxSelector Value, the new outgoing I-PDU for the dynamic part is constructed as defined by the segments (defined in the IpduMDynamicSegment container) and sent out with the I-PDU ID referenced by IpduMOutgoingDynamicPduRef.</p> <p>In case no dynamic part shall be extracted from this received I-PDU this container does not exist. This use-case can occur in case a MultiplexedIPdu is received by an ECU which is only interested in the static part of the MultiplexedIPdu.</p> |   |                     |
| Multiplicity                     | 0..*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |   |                     |

| Included Parameters                        |              |                    |
|--------------------------------------------|--------------|--------------------|
| Parameter Name                             | Multiplicity | ECUC ID            |
| <a href="#">IpduMRxSelectorValue</a>       | 1            | [ECUC_IpduM_00113] |
| <a href="#">IpduMOutgoingDynamicPduRef</a> | 1            | [ECUC_IpduM_00112] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

#### [ECUC\_IpduM\_00113] Definition of EcucIntegerParamDef IpduMRxSelectorValue

|                  |                                                           |  |
|------------------|-----------------------------------------------------------|--|
| Parameter Name   | IpduMRxSelectorValue                                      |  |
| Parent Container | <a href="#">IpduMRxDynamicPart</a>                        |  |
| Description      | This is the selector value that this container refers to. |  |
| Multiplicity     | 1                                                         |  |
| Type             | EcucIntegerParamDef                                       |  |
| Range            | 0 .. 65535                                                |  |





|                           |                  |   |                     |
|---------------------------|------------------|---|---------------------|
| Default value             | –                |   |                     |
| Post-Build Variant Value  | true             |   |                     |
| Value Configuration Class | Pre-compile time | X | VARIANT-PRE-COMPILE |
|                           | Link time        | X | VARIANT-LINK-TIME   |
|                           | Post-build time  | X | VARIANT-POST-BUILD  |
| Dependency                |                  |   |                     |

]

### [ECUC\_IpduM\_00112] Definition of EcucReferenceDef IpduMOutgoingDynamicPduRef [

|                           |                                                                                                                                                            |   |                     |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMOutgoingDynamicPduRef                                                                                                                                 |   |                     |
| Parent Container          | <a href="#">IpduMRxDynamicPart</a>                                                                                                                         |   |                     |
| Description               | When the new I-PDU is sent out it is sent with this I-PDU ID. Reference to the sent PDU representation in the ECU Configuration Description exchange file. |   |                     |
| Multiplicity              | 1                                                                                                                                                          |   |                     |
| Type                      | Reference to Pdu                                                                                                                                           |   |                     |
| Post-Build Variant Value  | true                                                                                                                                                       |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                           | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                                  | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                            | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                                                                            |   |                     |

]

## 10.2.14 IpduMRxDynamicSegment

### [ECUC\_IpduM\_00170] Definition of EcucParamConfContainerDef IpduMRxDynamicSegment [

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |                     |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Container Name                   | IpduMRxDynamicSegment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |   |                     |
| Parent Container                 | <a href="#">IpduMRxIndication</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |   |                     |
| Description                      | <p>The dynamic part of the multiplexed incoming I-Pdu (referenced by IpduMRxIndication PduRef) can be separated into several segments. For each segment one IpduMRxDynamicSegment container shall be created that contains the location and the length of the segment.</p> <p>Please note that each configured segment will be copied into the destination I-Pdu that is referenced in the IpduMRxDynamicPart container and will be copied from the same location in the multiplexed incoming I-Pdu. The segment layout for all dynamic Parts is always identical.</p> |   |                     |
| Multiplicity                     | 0..*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |                     |

| Included Parameters                  |              |                    |
|--------------------------------------|--------------|--------------------|
| Parameter Name                       | Multiplicity | ECUC ID            |
| <a href="#">IpduMSegmentLength</a>   | 1            | [ECUC_IpduM_00114] |
| <a href="#">IpduMSegmentPosition</a> | 1            | [ECUC_IpduM_00159] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

]

## [ECUC\_IpduM\_00114] Definition of EcucIntegerParamDef IpduMSegmentLength

[

|                           |                                                                                                                                                             |   |                     |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMSegmentLength                                                                                                                                          |   |                     |
| Parent Container          | <a href="#">IpduMRxDynamicSegment</a> , <a href="#">IpduMRxStaticSegment</a> , <a href="#">IpduMTxDynamicSegment</a> , <a href="#">IpduMTxStaticSegment</a> |   |                     |
| Description               | Length of the segment in bits.                                                                                                                              |   |                     |
| Multiplicity              | 1                                                                                                                                                           |   |                     |
| Type                      | EcucIntegerParamDef                                                                                                                                         |   |                     |
| Range                     | 1 .. 2032                                                                                                                                                   |   |                     |
| Default value             | –                                                                                                                                                           |   |                     |
| Post-Build Variant Value  | true                                                                                                                                                        |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                            | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                                   | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                             | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                                                                             |   |                     |

]

## [ECUC\_IpduM\_00159] Definition of EcucIntegerParamDef IpduMSegmentPosition

[

|                           |                                                                                                                                                             |   |                     |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMSegmentPosition                                                                                                                                        |   |                     |
| Parent Container          | <a href="#">IpduMRxDynamicSegment</a> , <a href="#">IpduMRxStaticSegment</a> , <a href="#">IpduMTxDynamicSegment</a> , <a href="#">IpduMTxStaticSegment</a> |   |                     |
| Description               | Segments bit position in the multiplexed Pdu.                                                                                                               |   |                     |
| Multiplicity              | 1                                                                                                                                                           |   |                     |
| Type                      | EcucIntegerParamDef                                                                                                                                         |   |                     |
| Range                     | 0 .. 2031                                                                                                                                                   |   |                     |
| Default value             | –                                                                                                                                                           |   |                     |
| Post-Build Variant Value  | true                                                                                                                                                        |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                            | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                                   | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                             | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                                                                             |   |                     |

]

### 10.2.15 IpduMRxStaticPart

#### [ECUC\_IpduM\_00049] Definition of EcucParamConfContainerDef IpduMRxStaticPart

|                                  |                                                                                                                                                                                                                                                                                                                        |   |                     |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Container Name                   | IpduMRxStaticPart                                                                                                                                                                                                                                                                                                      |   |                     |
| Parent Container                 | <a href="#">IpduMRxIndication</a>                                                                                                                                                                                                                                                                                      |   |                     |
| Description                      | This container contains the configuration for the static part of incoming RxIndication calls. On reception, the new outgoing I-PDU for the static part is constructed as defined by the segments (defined in the IpduMStaticSegment container) and sent out with the I-PDU ID referenced by IpduMOutgoingStaticPduRef. |   |                     |
| Multiplicity                     | 0..1                                                                                                                                                                                                                                                                                                                   |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                                                                                                                                                                                   |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                       | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                                                                                                                                              | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                                                                                                                                                        | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |                                                                                                                                                                                                                                                                                                                        |   |                     |

| Included Parameters                       |              |                    |
|-------------------------------------------|--------------|--------------------|
| Parameter Name                            | Multiplicity | ECUC ID            |
| <a href="#">IpduMOutgoingStaticPduRef</a> | 1            | [ECUC_IpduM_00115] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

#### [ECUC\_IpduM\_00115] Definition of EcucReferenceDef IpduMOutgoingStaticPduRef

|                           |                                                                                                                                                            |   |                     |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMOutgoingStaticPduRef                                                                                                                                  |   |                     |
| Parent Container          | <a href="#">IpduMRxStaticPart</a>                                                                                                                          |   |                     |
| Description               | When the new I-PDU is sent out it is sent with this I-PDU ID. Reference to the sent Pdu representation in the ECU Configuration Description exchange file. |   |                     |
| Multiplicity              | 1                                                                                                                                                          |   |                     |
| Type                      | Reference to Pdu                                                                                                                                           |   |                     |
| Post-Build Variant Value  | true                                                                                                                                                       |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                           | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                                  | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                            | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                                                                            |   |                     |

### 10.2.16 IpduMRxStaticSegment

#### [ECUC\_IpduM\_00169] Definition of EcucParamConfContainerDef IpduMRxStaticSegment



|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |                     |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| <b>Container Name</b>                   | IpduMRxStaticSegment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |                     |
| <b>Parent Container</b>                 | <a href="#">IpduMRxIndication</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |   |                     |
| <b>Description</b>                      | <p>The static part of the multiplexed incoming I-Pdu (referenced by IpduMRxIndicationPdu Ref) can be separated into several segments. For each segment one IpduMRxStatic Segment container shall be created that contains the location and the length of the segment.</p> <p>Please note that each configured segment will be copied into the destination I-Pdu that is referenced in the IpduMRxStaticPart container and will be copied from the same location in the multiplexed incoming I-Pdu.</p> |   |                     |
| <b>Multiplicity</b>                     | 0..*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | X | VARIANT-PRE-COMPILE |
|                                         | <b>Link time</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | X | VARIANT-LINK-TIME   |
|                                         | <b>Post-build time</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |                     |

| Included Parameters                  |              |                    |
|--------------------------------------|--------------|--------------------|
| Parameter Name                       | Multiplicity | ECUC ID            |
| <a href="#">IpduMSegmentLength</a>   | 1            | [ECUC_IpduM_00114] |
| <a href="#">IpduMSegmentPosition</a> | 1            | [ECUC_IpduM_00159] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

For parameter table [\[ECUC\\_IpduM\\_00114\]](#) [IpduMSegmentLength](#), see definition below container [IpduMRxDynamicSegment](#).

For parameter table [\[ECUC\\_IpduM\\_00159\]](#) [IpduMSegmentPosition](#), see definition below container [IpduMRxDynamicSegment](#).

### 10.2.17 IpduMSelectorField

**[ECUC\_IpduM\_00054] Definition of EcucParamConfContainerDef IpduMSelector Field** [

|                          |                                                                    |
|--------------------------|--------------------------------------------------------------------|
| Container Name           | IpduMSelectorField                                                 |
| Parent Container         | <a href="#">IpduMRxIndication</a> , <a href="#">IpduMTxRequest</a> |
| Description              | This contains the location and the length of the selector field.   |
| Multiplicity             | 1                                                                  |
| Configuration Parameters |                                                                    |

| Included Parameters                        |              |                    |
|--------------------------------------------|--------------|--------------------|
| Parameter Name                             | Multiplicity | ECUC ID            |
| <a href="#">IpduMSelectorFieldLength</a>   | 1            | [ECUC_IpduM_00160] |
| <a href="#">IpduMSelectorFieldPosition</a> | 1            | [ECUC_IpduM_00161] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

## [ECUC\_IpduM\_00160] Definition of EcucIntegerParamDef IpduMSelectorFieldLength

|                           |                                       |   |                     |
|---------------------------|---------------------------------------|---|---------------------|
| Parameter Name            | IpduMSelectorFieldLength              |   |                     |
| Parent Container          | <a href="#">IpduMSelectorField</a>    |   |                     |
| Description               | Length of the selector field in bits. |   |                     |
| Multiplicity              | 1                                     |   |                     |
| Type                      | EcucIntegerParamDef                   |   |                     |
| Range                     | 1 .. 16                               |   |                     |
| Default value             | –                                     |   |                     |
| Post-Build Variant Value  | true                                  |   |                     |
| Value Configuration Class | Pre-compile time                      | X | VARIANT-PRE-COMPILE |
|                           | Link time                             | X | VARIANT-LINK-TIME   |
|                           | Post-build time                       | X | VARIANT-POST-BUILD  |
| Dependency                |                                       |   |                     |

## [ECUC\_IpduM\_00161] Definition of EcucIntegerParamDef IpduMSelectorFieldPosition

|                           |                                                                                                                                                |   |                     |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMSelectorFieldPosition                                                                                                                     |   |                     |
| Parent Container          | <a href="#">IpduMSelectorField</a>                                                                                                             |   |                     |
| Description               | Selector field bit position in the multiplexed Pdu.<br>Range: 0..63 for CAN/ LIN I-PDUs, 0..511 for CAN FD I-PDUs, 0..2031 for FlexRay I-PDUs. |   |                     |
| Multiplicity              | 1                                                                                                                                              |   |                     |
| Type                      | EcucIntegerParamDef                                                                                                                            |   |                     |
| Range                     | 0 .. 2031                                                                                                                                      |   |                     |
| Default value             | –                                                                                                                                              |   |                     |
| Post-Build Variant Value  | true                                                                                                                                           |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                               | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                      | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                                                                |   |                     |

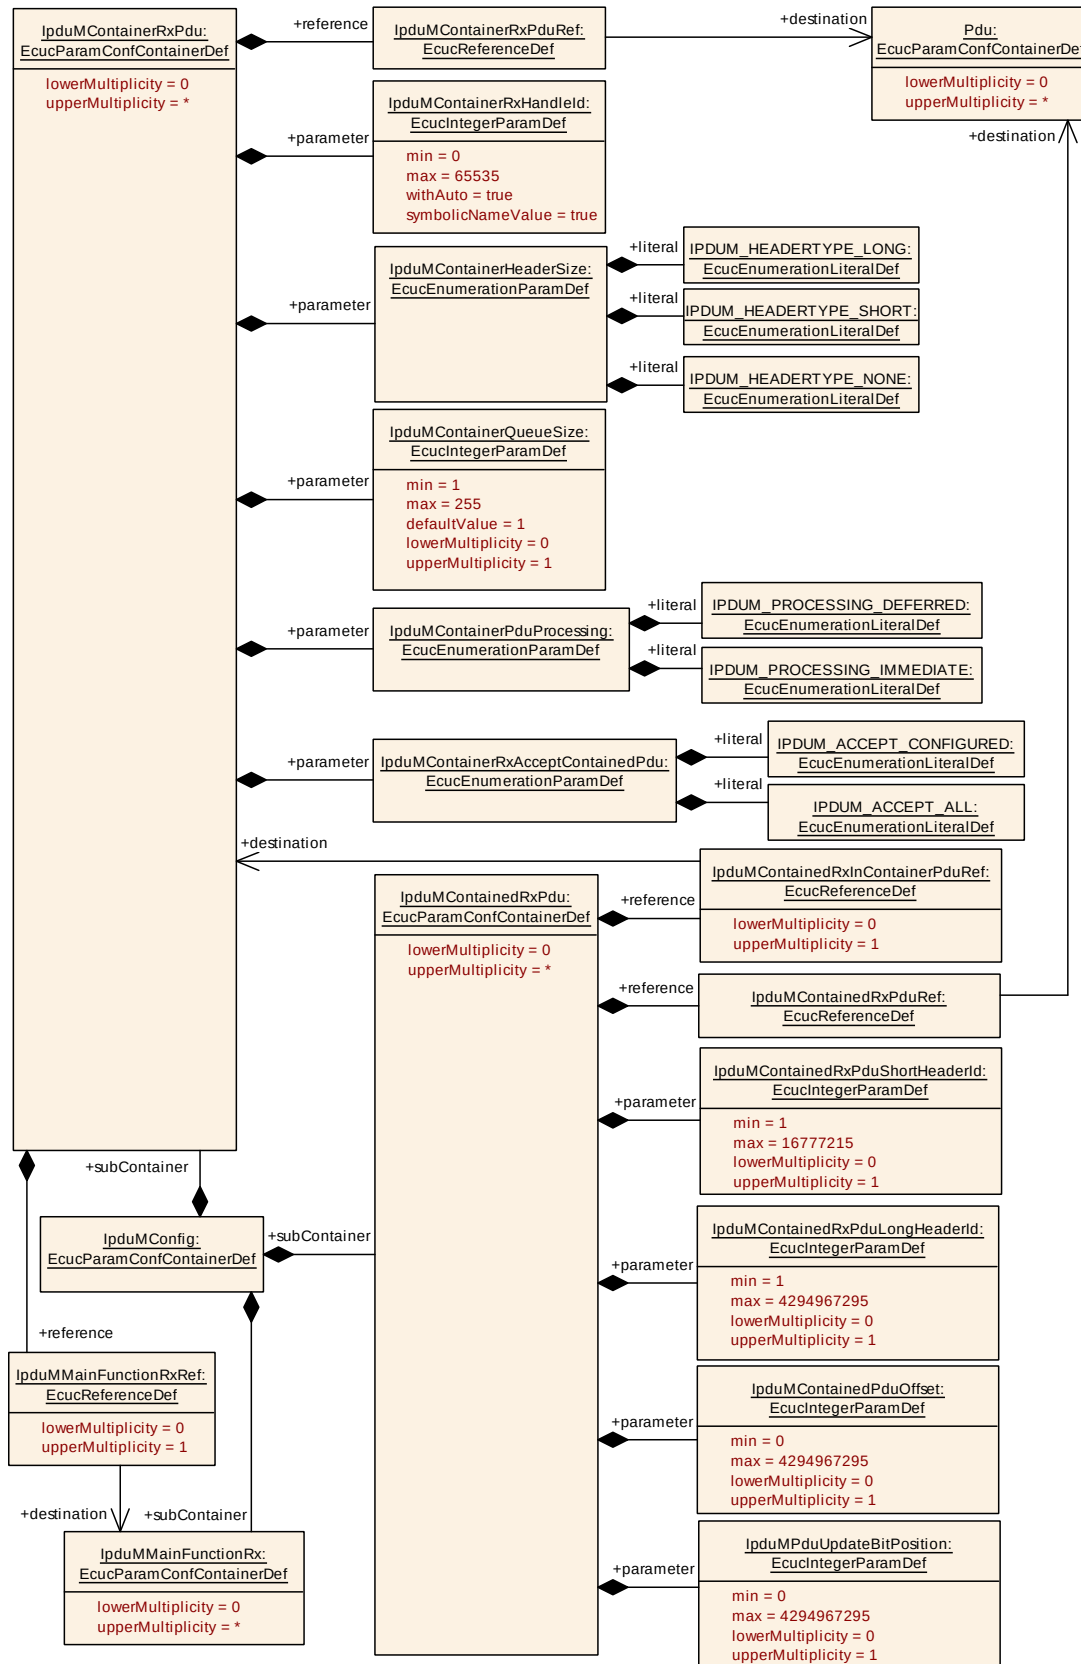


Figure 10.7: Configuration Overview RxContainer

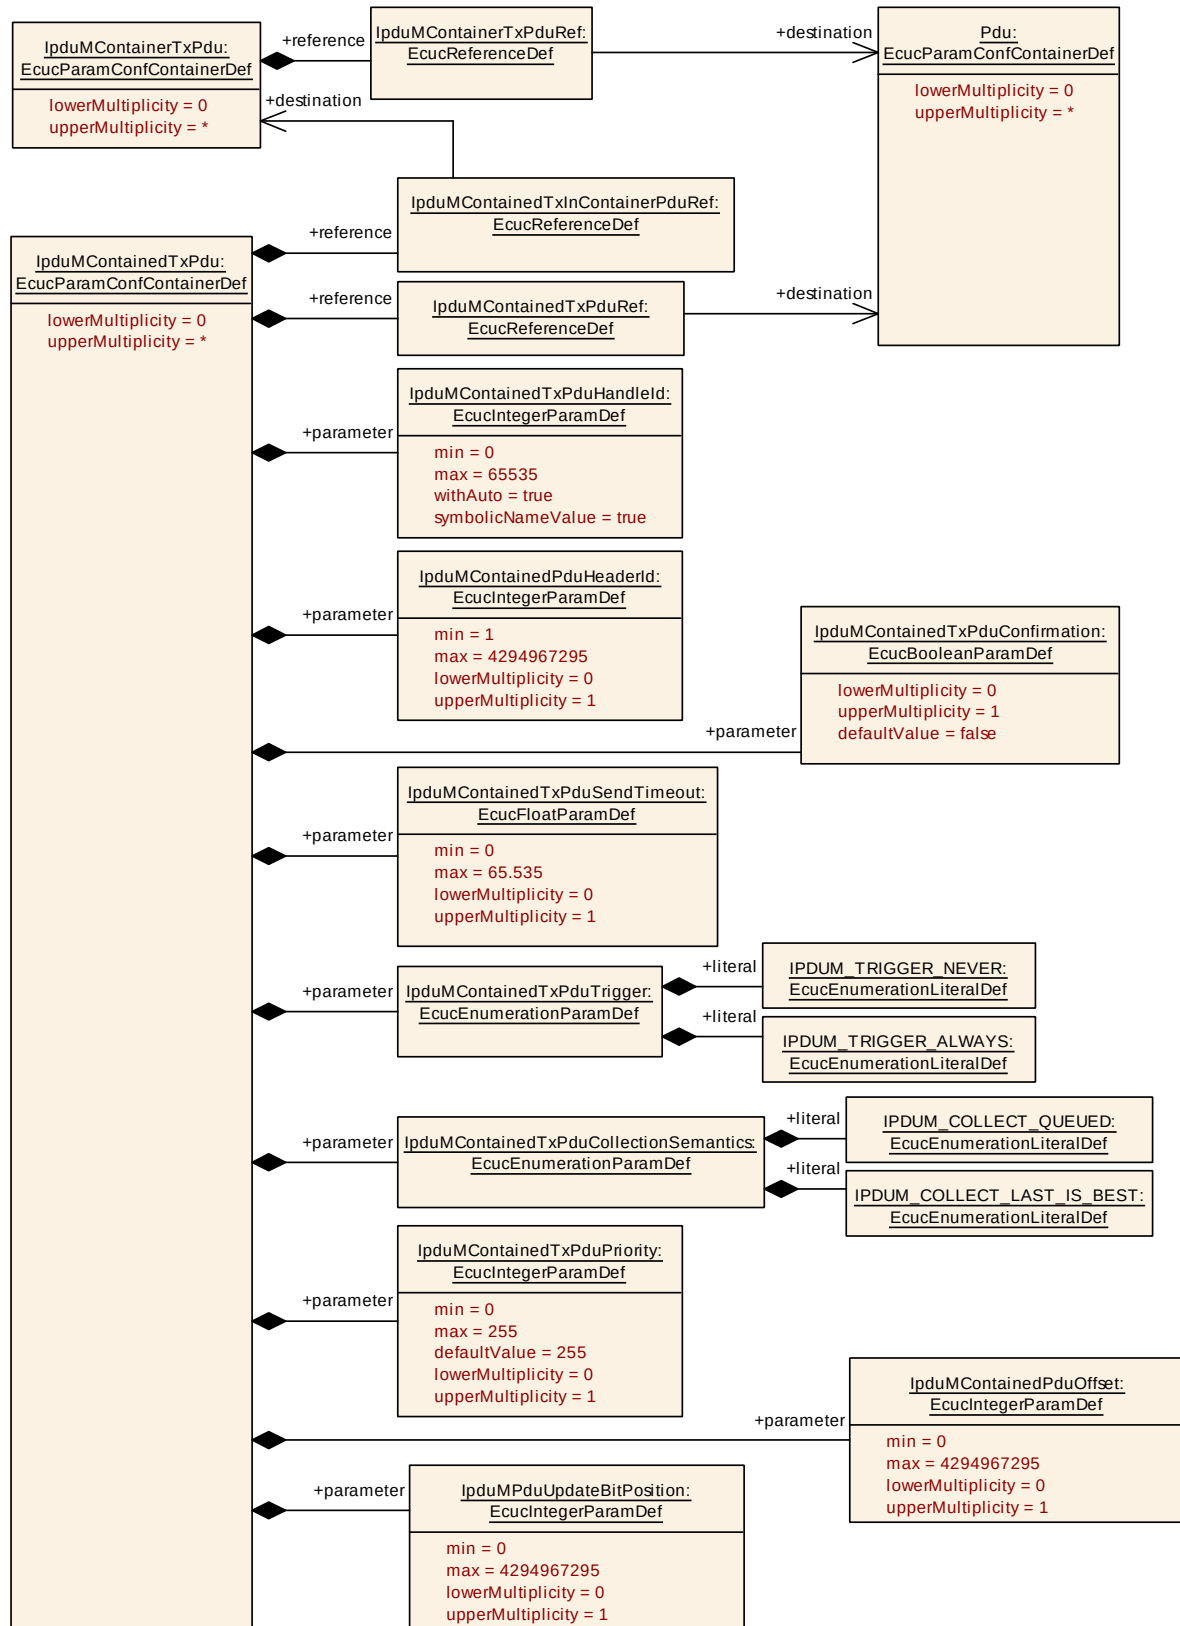


Figure 10.8: Configuration Overview Contained Rx Pdu

## 10.2.18 IpduMContainerRxPdu

### [ECUC\_IpduM\_00188] Definition of EcucParamConfContainerDef IpduMContainerRxPdu

|                                  |                                                                                   |   |                     |
|----------------------------------|-----------------------------------------------------------------------------------|---|---------------------|
| Container Name                   | IpduMContainerRxPdu                                                               |   |                     |
| Parent Container                 | <a href="#">IpduMConfig</a>                                                       |   |                     |
| Description                      | Configuration of a receiver ContainerPdu which may collect several ContainedPdus. |   |                     |
| Multiplicity                     | 0..*                                                                              |   |                     |
| Post-Build Variant Multiplicity  | true                                                                              |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                  | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                         | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                   | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |                                                                                   |   |                     |

| Included Parameters                                |              |                    |
|----------------------------------------------------|--------------|--------------------|
| Parameter Name                                     | Multiplicity | ECUC ID            |
| <a href="#">IpduMContainerHeaderSize</a>           | 1            | [ECUC_IpduM_00183] |
| <a href="#">IpduMContainerPduProcessing</a>        | 1            | [ECUC_IpduM_00184] |
| <a href="#">IpduMContainerQueueSize</a>            | 0..1         | [ECUC_IpduM_00185] |
| <a href="#">IpduMContainerRxAcceptContainedPdu</a> | 1            | [ECUC_IpduM_00186] |
| <a href="#">IpduMContainerRxHandleId</a>           | 1            | [ECUC_IpduM_00187] |
| <a href="#">IpduMContainerRxPduRef</a>             | 1            | [ECUC_IpduM_00189] |
| <a href="#">IpduMMainFunctionRxRef</a>             | 0..1         | [ECUC_IpduM_00212] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

### [ECUC\_IpduM\_00183] Definition of EcucEnumerationParamDef IpduMContainerHeaderSize

|                           |                                                                           |                                                                                                                |                     |
|---------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------|
| Parameter Name            | IpduMContainerHeaderSize                                                  |                                                                                                                |                     |
| Parent Container          | <a href="#">IpduMContainerRxPdu</a> , <a href="#">IpduMContainerTxPdu</a> |                                                                                                                |                     |
| Description               | Defines the layout of the header information (header id and length).      |                                                                                                                |                     |
| Multiplicity              | 1                                                                         |                                                                                                                |                     |
| Type                      | EcucEnumerationParamDef                                                   |                                                                                                                |                     |
| Range                     | IPDUM_HEADERTYPE_LONG                                                     | Header size is 64 bit: <ul style="list-style-type: none"><li>• Header Id 32 bit</li><li>• Dlc 32 bit</li></ul> |                     |
|                           | IPDUM_HEADERTYPE_NONE                                                     | Static Container Layout<br><b>Tags:</b> atp.Status=draft                                                       |                     |
|                           | IPDUM_HEADERTYPE_SHORT                                                    | Header size is 32 bit: <ul style="list-style-type: none"><li>• Header Id 24 bit</li><li>• Dlc 8 bit</li></ul>  |                     |
| Post-Build Variant Value  | true                                                                      |                                                                                                                |                     |
| Value Configuration Class | Pre-compile time                                                          | X                                                                                                              | VARIANT-PRE-COMPILE |
|                           | Link time                                                                 | X                                                                                                              | VARIANT-LINK-TIME   |





|            |                 |   |                    |
|------------|-----------------|---|--------------------|
|            | Post-build time | X | VARIANT-POST-BUILD |
| Dependency |                 |   |                    |

## [ECUC\_IpduM\_00184] Definition of EcucEnumerationParamDef IpduMContainerPduProcessing

|                           |                                                                                                                                                                  |   |                     |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMContainerPduProcessing                                                                                                                                      |   |                     |
| Parent Container          | <a href="#">IpduMContainerRxPdu</a>                                                                                                                              |   |                     |
| Description               | Defines whether the handling of this ContainerPdu shall be done in the context of the caller (IMMEDIATE) or in the next call to IpduM_MainFunctionRx (DEFERRED). |   |                     |
| Multiplicity              | 1                                                                                                                                                                |   |                     |
| Type                      | EcucEnumerationParamDef                                                                                                                                          |   |                     |
| Range                     | IPDUM_PROCESSING_DEFERRED                                                                                                                                        | – |                     |
|                           | IPDUM_PROCESSING_IMMEDIATE                                                                                                                                       | – |                     |
| Post-Build Variant Value  | true                                                                                                                                                             |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                                 | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                                        | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                                  | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                                                                                  |   |                     |

## [ECUC\_IpduM\_00185] Definition of EcucIntegerParamDef IpduMContainerQueueSize

|                                  |                                                                                                               |   |                     |
|----------------------------------|---------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name                   | IpduMContainerQueueSize                                                                                       |   |                     |
| Parent Container                 | <a href="#">IpduMContainerRxPdu</a> , <a href="#">IpduMContainerTxPdu</a>                                     |   |                     |
| Description                      | Defines a local queue for handling of each ContainerPdu. Defined in number of instances of this ContainerPdu. |   |                     |
| Multiplicity                     | 0..1                                                                                                          |   |                     |
| Type                             | EcucIntegerParamDef                                                                                           |   |                     |
| Range                            | 1 .. 255                                                                                                      |   |                     |
| Default value                    | 1                                                                                                             |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                          |   |                     |
| Post-Build Variant Value         | true                                                                                                          |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                              | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                     | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                               | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                                                                              | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                     | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                               | X | VARIANT-POST-BUILD  |
| Dependency                       |                                                                                                               |   |                     |

## [ECUC\_IpduM\_00186] Definition of EcucEnumerationParamDef IpduMContainerRxAcceptContainedPdu

|                           |                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                  |                     |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Parameter Name            | IpduMContainerRxAcceptContainedPdu                                                                                                                                      |                                                                                                                                                                                                                                                                                                  |                     |
| Parent Container          | <a href="#">IpduMContainerRxPdu</a>                                                                                                                                     |                                                                                                                                                                                                                                                                                                  |                     |
| Description               | Defines for the received IpduMContainerRxPdu whether the list of referencing Ipdu MContainedRxPdus (via the reference IpduMContainedPduContainerRefRx) is a closed set. |                                                                                                                                                                                                                                                                                                  |                     |
| Multiplicity              | 1                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                  |                     |
| Type                      | EcucEnumerationParamDef                                                                                                                                                 |                                                                                                                                                                                                                                                                                                  |                     |
| Range                     | IPDUM_ACCEPT_ALL                                                                                                                                                        | The IpduMContainedRxPdus which are referencing this IpduMContainerRxPdu are expected inside this IpduMContainerRxPdu, but there may also occur other Pdus inside this Ipdu MContainerRxPdu as well. This also supports the case where no IpduMContainedRxPdu references the IpduMContainerRxPdu. |                     |
|                           | IPDUM_ACCEPT_CONFIGURED                                                                                                                                                 | Only the IpduMContainedRxPdus which are referencing this IpduMContainerRxPdu are expected inside this IpduMContainerRxPdu.                                                                                                                                                                       |                     |
| Post-Build Variant Value  | true                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                  |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                                        | X                                                                                                                                                                                                                                                                                                | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                                               | X                                                                                                                                                                                                                                                                                                | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                                         | X                                                                                                                                                                                                                                                                                                | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                  |                     |

## [ECUC\_IpduM\_00187] Definition of EcucIntegerParamDef IpduMContainerRxHandleId

|                           |                                                                  |   |              |
|---------------------------|------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMContainerRxHandleId                                         |   |              |
| Parent Container          | <a href="#">IpduMContainerRxPdu</a>                              |   |              |
| Description               | Handle Id used by the PduR for RxIndication.                     |   |              |
| Multiplicity              | 1                                                                |   |              |
| Type                      | EcucIntegerParamDef (Symbolic Name generated for this parameter) |   |              |
| Range                     | 0 .. 65535                                                       |   |              |
| Default value             | —                                                                |   |              |
| Post-Build Variant Value  | false                                                            |   |              |
| Value Configuration Class | Pre-compile time                                                 | X | All Variants |
|                           | Link time                                                        | — |              |
|                           | Post-build time                                                  | — |              |
| Dependency                | withAuto = true                                                  |   |              |

## [ECUC\_IpduM\_00189] Definition of EcucReferenceDef IpduMContainerRxPduRef

|                  |                                                                                |
|------------------|--------------------------------------------------------------------------------|
| Parameter Name   | IpduMContainerRxPduRef                                                         |
| Parent Container | <a href="#">IpduMContainerRxPdu</a>                                            |
| Description      | Reference to the Pdu which represents the container and is used for reception. |



△

|                                  |                         |   |                     |
|----------------------------------|-------------------------|---|---------------------|
| <b>Multiplicity</b>              | 1                       |   |                     |
| <b>Type</b>                      | Reference to Pdu        |   |                     |
| <b>Post-Build Variant Value</b>  | true                    |   |                     |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | VARIANT-PRE-COMPILE |
|                                  | <b>Link time</b>        | X | VARIANT-LINK-TIME   |
|                                  | <b>Post-build time</b>  | X | VARIANT-POST-BUILD  |
| <b>Dependency</b>                |                         |   |                     |

]

### [ECUC\_IpduM\_00212] Definition of EcucReferenceDef IpduMMainFunctionRxRef

[

|                                         |                                                                                                                                            |   |              |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| <b>Parameter Name</b>                   | IpduMMainFunctionRxRef                                                                                                                     |   |              |
| <b>Parent Container</b>                 | <a href="#">IpduMContainerRxPdu</a>                                                                                                        |   |              |
| <b>Description</b>                      | Reference to the IpduM_MainFunctionRx instance this container PDU belongs to. Mandatory, if more than one IpduM_MainFunctionRx is defined. |   |              |
| <b>Multiplicity</b>                     | 0..1                                                                                                                                       |   |              |
| <b>Type</b>                             | Reference to <a href="#">IpduMMainFunctionRx</a>                                                                                           |   |              |
| <b>Post-Build Variant Multiplicity</b>  | true                                                                                                                                       |   |              |
| <b>Post-Build Variant Value</b>         | true                                                                                                                                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                                                                                                    | X | All Variants |
|                                         | <b>Link time</b>                                                                                                                           | – |              |
|                                         | <b>Post-build time</b>                                                                                                                     | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                                                                                                    | X | All Variants |
|                                         | <b>Link time</b>                                                                                                                           | – |              |
|                                         | <b>Post-build time</b>                                                                                                                     | – |              |
| <b>Dependency</b>                       |                                                                                                                                            |   |              |

]

## 10.2.19 IpduMContainedRxPdu

### [ECUC\_IpduM\_00174] Definition of EcucParamConfContainerDef IpduMContainedRxPdu

[

|                                         |                                            |   |                     |
|-----------------------------------------|--------------------------------------------|---|---------------------|
| <b>Container Name</b>                   | IpduMContainedRxPdu                        |   |                     |
| <b>Parent Container</b>                 | <a href="#">IpduMConfig</a>                |   |                     |
| <b>Description</b>                      | Configuration of a received contained Pdu. |   |                     |
| <b>Multiplicity</b>                     | 0..*                                       |   |                     |
| <b>Post-Build Variant Multiplicity</b>  | true                                       |   |                     |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                    | X | VARIANT-PRE-COMPILE |
|                                         | <b>Link time</b>                           | X | VARIANT-LINK-TIME   |
|                                         | <b>Post-build time</b>                     | X | VARIANT-POST-BUILD  |
| <b>Configuration Parameters</b>         |                                            |   |                     |



| Included Parameters                               |              |                    |
|---------------------------------------------------|--------------|--------------------|
| Parameter Name                                    | Multiplicity | ECUC ID            |
| <a href="#">IpduMContainedPduOffset</a>           | 0..1         | [ECUC_IpduM_00206] |
| <a href="#">IpduMContainedRxPduLongHeaderId</a>   | 0..1         | [ECUC_IpduM_00203] |
| <a href="#">IpduMContainedRxPduShortHeaderId</a>  | 0..1         | [ECUC_IpduM_00202] |
| <a href="#">IpduMPduUpdateBitPosition</a>         | 0..1         | [ECUC_IpduM_00207] |
| <a href="#">IpduMContainedRxInContainerPduRef</a> | 0..1         | [ECUC_IpduM_00173] |
| <a href="#">IpduMContainedRxPduRef</a>            | 1            | [ECUC_IpduM_00175] |

No Included Containers

## [ECUC\_IpduM\_00206] Definition of EcucIntegerParamDef IpduMContainedPdu Offset

Status: DRAFT

|                           |                                                                                                                                                                              |   |                     |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMContainedPduOffset                                                                                                                                                      |   |                     |
| Parent Container          | <a href="#">IpduMContainedRxPdu</a> , <a href="#">IpduMContainedTxPdu</a>                                                                                                    |   |                     |
| Description               | Static offset (in bytes) of the ContainedPdu.<br>Tags: atp.Status=draft                                                                                                      |   |                     |
| Multiplicity              | 0..1                                                                                                                                                                         |   |                     |
| Type                      | EcucIntegerParamDef                                                                                                                                                          |   |                     |
| Range                     | 0 .. 4294967295                                                                                                                                                              |   |                     |
| Default value             | –                                                                                                                                                                            |   |                     |
| Post-Build Variant Value  | true                                                                                                                                                                         |   |                     |
| Value Configuration Class | Pre-compile time                                                                                                                                                             | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                                                                                                    | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                                                                                              | X | VARIANT-POST-BUILD  |
| Dependency                | - only valid if IpduMContainerHeaderSize is set to IPDUM_HEADERTYPE_NONE. -<br>only the ContainedPdu with the highest offset within a ContainerPdu may have variable length. |   |                     |

## [ECUC\_IpduM\_00203] Definition of EcucIntegerParamDef IpduMContainedRxPduLongHeaderId

|                                 |                                                                                   |  |  |
|---------------------------------|-----------------------------------------------------------------------------------|--|--|
| Parameter Name                  | IpduMContainedRxPduLongHeaderId                                                   |  |  |
| Parent Container                | <a href="#">IpduMContainedRxPdu</a>                                               |  |  |
| Description                     | LongHeader Id which is part of the ContainerPdu when this ContainedPdu is inside. |  |  |
| Multiplicity                    | 0..1                                                                              |  |  |
| Type                            | EcucIntegerParamDef                                                               |  |  |
| Range                           | 1 .. 4294967295                                                                   |  |  |
| Default value                   | –                                                                                 |  |  |
| Post-Build Variant Multiplicity | true                                                                              |  |  |
| Post-Build Variant Value        | true                                                                              |  |  |





|                                  |                                                                        |   |                     |
|----------------------------------|------------------------------------------------------------------------|---|---------------------|
| Multiplicity Configuration Class | Pre-compile time                                                       | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                              | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                        | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                                       | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                              | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                        | X | VARIANT-POST-BUILD  |
| Dependency                       | Only valid if IpduMContainerHeaderSize is set to IPDUM_HEADERTYPE_LONG |   |                     |

## [ECUC\_IpduM\_00202] Definition of EcucIntegerParamDef IpduMContainedRxPduShortHeaderId

|                                  |                                                                                    |   |                     |
|----------------------------------|------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name                   | IpduMContainedRxPduShortHeaderId                                                   |   |                     |
| Parent Container                 | <a href="#">IpduMContainedRxPdu</a>                                                |   |                     |
| Description                      | ShortHeader Id which is part of the ContainerPdu when this ContainedPdu is inside. |   |                     |
| Multiplicity                     | 0..1                                                                               |   |                     |
| Type                             | EcucIntegerParamDef                                                                |   |                     |
| Range                            | 1 .. 16777215                                                                      |   |                     |
| Default value                    | –                                                                                  |   |                     |
| Post-Build Variant Multiplicity  | true                                                                               |   |                     |
| Post-Build Variant Value         | true                                                                               |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                   | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                          | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                    | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                                                   | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                          | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                    | X | VARIANT-POST-BUILD  |
| Dependency                       | Only valid if IpduMContainerHeaderSize is set to IPDUM_HEADERTYPE_SHORT            |   |                     |

## [ECUC\_IpduM\_00207] Definition of EcucIntegerParamDef IpduMPduUpdateBitPosition

Status: DRAFT

|                          |                                                                                                                                                                          |  |  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Parameter Name           | IpduMPduUpdateBitPosition                                                                                                                                                |  |  |
| Parent Container         | <a href="#">IpduMContainedRxPdu</a> , <a href="#">IpduMContainedTxPdu</a>                                                                                                |  |  |
| Description              | This value specifies where the PDU's Update-Bit is stored in the Container PDU (bit location of PDU's Update-Bit in the Container PDU).<br><b>Tags:</b> atp.Status=draft |  |  |
| Multiplicity             | 0..1                                                                                                                                                                     |  |  |
| Type                     | EcucIntegerParamDef                                                                                                                                                      |  |  |
| Range                    | 0 .. 4294967295                                                                                                                                                          |  |  |
| Default value            | –                                                                                                                                                                        |  |  |
| Post-Build Variant Value | true                                                                                                                                                                     |  |  |





|                           |                                                                           |   |                     |
|---------------------------|---------------------------------------------------------------------------|---|---------------------|
| Value Configuration Class | Pre-compile time                                                          | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                 | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                           | X | VARIANT-POST-BUILD  |
| Dependency                | - only valid if IpduMContainerHeaderSize is set to IPDUM_HEADERTYPE_NONE. |   |                     |

### [ECUC\_IpduM\_00173] Definition of EcucReferenceDef IpduMContainedRxInContainerPduRef

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |   |                     |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name                   | IpduMContainedRxInContainerPduRef                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |   |                     |
| Parent Container                 | <a href="#">IpduMContainedRxPdu</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |   |                     |
| Description                      | Optional reference to an IpduMContainerRxPdu this IpduMContainedRxPdu may be received in.<br>If this IpduMContainedRxPdu shall be received in exactly one IpduMContainerRxPdu with IpduMContainerRxAcceptContainedPdu=IPDUM_ACCEPT_CONFIGURED then the IpduMContainedRxInContainerPduRef shall be defined.<br>If this IpduMContainedRxPdu can be received in any IpduMContainerRxPdu with IpduMContainerRxAcceptContainedPdu=IPDUM_ACCEPT_ALL then the IpduMContainedRxInContainerPduRef shall NOT be defined. |   |                     |
| Multiplicity                     | 0..1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |   |                     |
| Type                             | Reference to <a href="#">IpduMContainerRxPdu</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |   |                     |
| Post-Build Variant Value         | true                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | X | VARIANT-POST-BUILD  |
| Dependency                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |   |                     |

### [ECUC\_IpduM\_00175] Definition of EcucReferenceDef IpduMContainedRxPduRef

|                           |                                                                                               |   |                     |
|---------------------------|-----------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMContainedRxPduRef                                                                        |   |                     |
| Parent Container          | <a href="#">IpduMContainedRxPdu</a>                                                           |   |                     |
| Description               | Reference to the Pdu which represents this ContainedPdu and is used for reception indication. |   |                     |
| Multiplicity              | 1                                                                                             |   |                     |
| Type                      | Reference to Pdu                                                                              |   |                     |
| Post-Build Variant Value  | true                                                                                          |   |                     |
| Value Configuration Class | Pre-compile time                                                                              | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                     | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                               | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                               |   |                     |

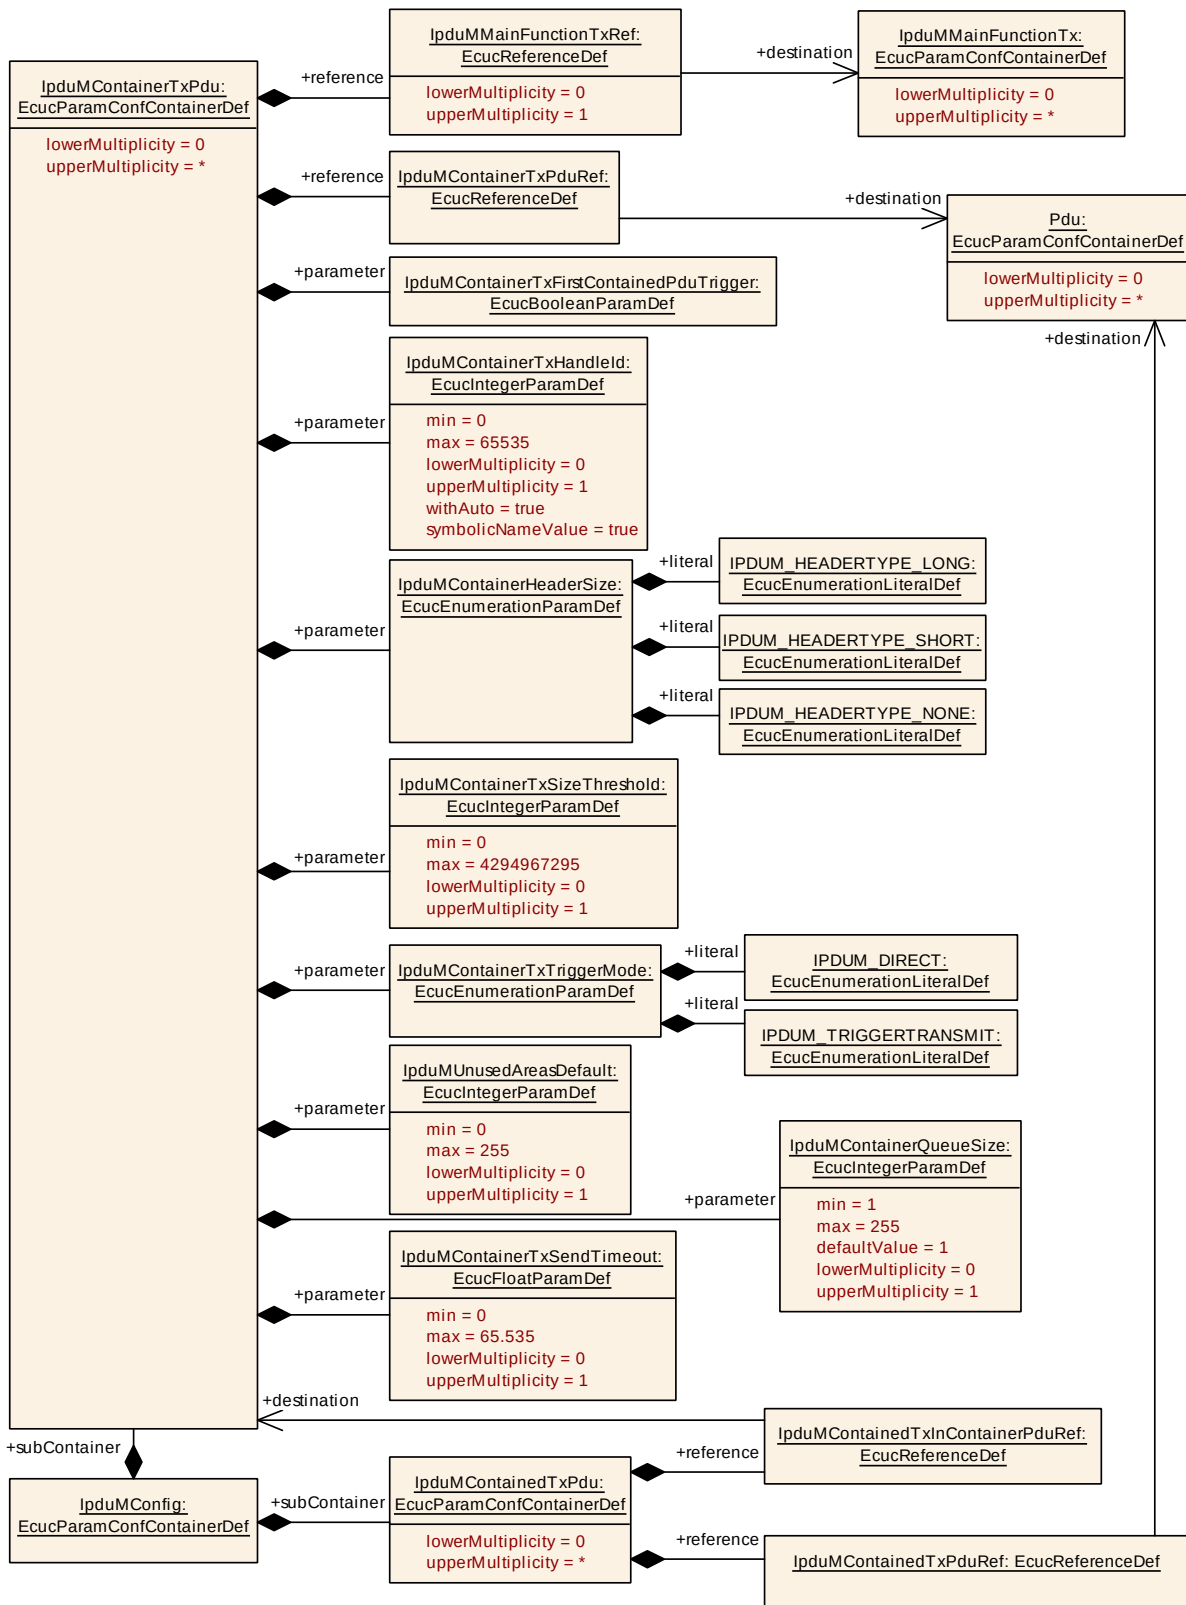


Figure 10.9: Configuration Overview TxContainer

## 10.2.20 IpduMContainerTxPdu

### [ECUC\_IpduM\_00192] Definition of EcucParamConfContainerDef IpduMContainerTxPdu

|                                  |                                               |   |                     |
|----------------------------------|-----------------------------------------------|---|---------------------|
| Container Name                   | IpduMContainerTxPdu                           |   |                     |
| Parent Container                 | <a href="#">IpduMConfig</a>                   |   |                     |
| Description                      | Configuration of a transmitted container Pdu. |   |                     |
| Multiplicity                     | 0..*                                          |   |                     |
| Post-Build Variant Multiplicity  | true                                          |   |                     |
| Multiplicity Configuration Class | Pre-compile time                              | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                     | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                               | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |                                               |   |                     |

| Included Parameters                                      |              |                    |
|----------------------------------------------------------|--------------|--------------------|
| Parameter Name                                           | Multiplicity | ECUC ID            |
| <a href="#">IpduMContainerHeaderSize</a>                 | 1            | [ECUC_IpduM_00183] |
| <a href="#">IpduMContainerQueueSize</a>                  | 0..1         | [ECUC_IpduM_00185] |
| <a href="#">IpduMContainerTxFirstContainedPduTrigger</a> | 1            | [ECUC_IpduM_00199] |
| <a href="#">IpduMContainerTxHandleId</a>                 | 0..1         | [ECUC_IpduM_00191] |
| <a href="#">IpduMContainerTxSendTimeout</a>              | 0..1         | [ECUC_IpduM_00194] |
| <a href="#">IpduMContainerTxSizeThreshold</a>            | 0..1         | [ECUC_IpduM_00195] |
| <a href="#">IpduMContainerTxTriggerMode</a>              | 1            | [ECUC_IpduM_00196] |
| <a href="#">IpduMUnusedAreasDefault</a>                  | 0..1         | [ECUC_IpduM_00208] |
| <a href="#">IpduMContainerTxPduRef</a>                   | 1            | [ECUC_IpduM_00193] |
| <a href="#">IpduMMainFunctionTxRef</a>                   | 0..1         | [ECUC_IpduM_00214] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

]

For parameter table [ECUC\_IpduM\_00183] [IpduMContainerHeaderSize](#), see definition below container [IpduMContainerRxPdu](#).

For parameter table [ECUC\_IpduM\_00185] [IpduMContainerQueueSize](#), see definition below container [IpduMContainerRxPdu](#).

### [ECUC\_IpduM\_00199] Definition of EcucBooleanParamDef IpduMContainerTxFirstContainedPduTrigger

|                  |                                                                                                                                       |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Parameter Name   | IpduMContainerTxFirstContainedPduTrigger                                                                                              |
| Parent Container | <a href="#">IpduMContainerTxPdu</a>                                                                                                   |
| Description      | Defines if the transmission of this IpduMContainerTxPdu shall be requested right after the first IpduMContainedTxPdu was put into it. |
| Multiplicity     | 1                                                                                                                                     |
| Type             | EcucBooleanParamDef                                                                                                                   |
| Default value    | —                                                                                                                                     |





|                           |                  |   |                     |
|---------------------------|------------------|---|---------------------|
| Post-Build Variant Value  | true             |   |                     |
| Value Configuration Class | Pre-compile time | X | VARIANT-PRE-COMPILE |
|                           | Link time        | X | VARIANT-LINK-TIME   |
|                           | Post-build time  | X | VARIANT-POST-BUILD  |
| Dependency                |                  |   |                     |

]

### [ECUC\_IpduM\_00191] Definition of EcucIntegerParamDef IpduMContainerTxHandleId

|                                  |                                                                                            |   |              |
|----------------------------------|--------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name                   | IpduMContainerTxHandleId                                                                   |   |              |
| Parent Container                 | <a href="#">IpduMContainerTxPdu</a>                                                        |   |              |
| Description                      | Handle Id used by the PduR for TxConfirmation and for TriggerTransmit of the ContainerPdu. |   |              |
| Multiplicity                     | 0..1                                                                                       |   |              |
| Type                             | EcucIntegerParamDef (Symbolic Name generated for this parameter)                           |   |              |
| Range                            | 0 .. 65535                                                                                 |   |              |
| Default value                    | –                                                                                          |   |              |
| Post-Build Variant Multiplicity  | false                                                                                      |   |              |
| Post-Build Variant Value         | false                                                                                      |   |              |
| Multiplicity Configuration Class | Pre-compile time                                                                           | X | All Variants |
|                                  | Link time                                                                                  | – |              |
|                                  | Post-build time                                                                            | – |              |
| Value Configuration Class        | Pre-compile time                                                                           | X | All Variants |
|                                  | Link time                                                                                  | – |              |
|                                  | Post-build time                                                                            | – |              |
| Dependency                       | withAuto = true                                                                            |   |              |

]

### [ECUC\_IpduM\_00194] Definition of EcucFloatParamDef IpduMContainerTxSendTimeout

|                                  |                                                                                                                                                                           |   |                     |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name                   | IpduMContainerTxSendTimeout                                                                                                                                               |   |                     |
| Parent Container                 | <a href="#">IpduMContainerTxPdu</a>                                                                                                                                       |   |                     |
| Description                      | When this timeout expires the ContainerPdu is triggered for sending. The respective timer is started when the first Pdu is put into the ContainerPdu. Defined in seconds. |   |                     |
| Multiplicity                     | 0..1                                                                                                                                                                      |   |                     |
| Type                             | EcucFloatParamDef                                                                                                                                                         |   |                     |
| Range                            | [0 .. 65.535]                                                                                                                                                             |   |                     |
| Default value                    | —                                                                                                                                                                         |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                                      |   |                     |
| Post-Build Variant Value         | true                                                                                                                                                                      |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                          | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                 | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                           | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                                                                                                                                          | X | VARIANT-PRE-COMPILE |





|            |                 |   |                    |
|------------|-----------------|---|--------------------|
|            | Link time       | X | VARIANT-LINK-TIME  |
|            | Post-build time | X | VARIANT-POST-BUILD |
| Dependency |                 |   |                    |

### [ECUC\_IpduM\_00195] Definition of EcucIntegerParamDef IpduMContainerTxSize Threshold

|                                  |                                                                                                                                                                                               |   |                     |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name                   | IpduMContainerTxSizeThreshold                                                                                                                                                                 |   |                     |
| Parent Container                 | <a href="#">IpduMContainerTxPdu</a>                                                                                                                                                           |   |                     |
| Description                      | Defines the size threshold in bytes which, when exceeded, triggers the sending of the ContainerPdu although the maxium Pdu size (PduLength parameter of Pdu object) has not been reached yet. |   |                     |
| Multiplicity                     | 0..1                                                                                                                                                                                          |   |                     |
| Type                             | EcucIntegerParamDef                                                                                                                                                                           |   |                     |
| Range                            | 0 .. 4294967295                                                                                                                                                                               |   |                     |
| Default value                    | –                                                                                                                                                                                             |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                                                          |   |                     |
| Post-Build Variant Value         | true                                                                                                                                                                                          |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                              | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                     | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                               | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                                                                                                                                                              | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                                                     | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                                               | X | VARIANT-POST-BUILD  |
| Dependency                       | only valid if IpduMContainerHeaderSize is set to IPDUM_HEADERTYPE_SHORT or IPDUM_HEADERTYPE_LONG                                                                                              |   |                     |

### [ECUC\_IpduM\_00196] Definition of EcucEnumerationParamDef IpduMContainer TxTriggerMode

|                           |                                                                    |                                                                            |                     |
|---------------------------|--------------------------------------------------------------------|----------------------------------------------------------------------------|---------------------|
| Parameter Name            | IpduMContainerTxTriggerMode                                        |                                                                            |                     |
| Parent Container          | <a href="#">IpduMContainerTxPdu</a>                                |                                                                            |                     |
| Description               | Defines whether this ContainerPdu is fetched via trigger transmit. |                                                                            |                     |
| Multiplicity              | 1                                                                  |                                                                            |                     |
| Type                      | EcucEnumerationParamDef                                            |                                                                            |                     |
| Range                     | IPDUM_DIRECT                                                       | The IpduM sends this ContainerPdu when this ContainerPdu is triggered.     |                     |
|                           | IPDUM_TRIGGERTRANSMIT                                              | This ContainerPdu is stored in the IpduM and fetched via trigger transmit. |                     |
| Post-Build Variant Value  | true                                                               |                                                                            |                     |
| Value Configuration Class | Pre-compile time                                                   | X                                                                          | VARIANT-PRE-COMPILE |
|                           | Link time                                                          | X                                                                          | VARIANT-LINK-TIME   |
|                           | Post-build time                                                    | X                                                                          | VARIANT-POST-BUILD  |
| Dependency                |                                                                    |                                                                            |                     |

## [ECUC\_IpduM\_00208] Definition of EcucIntegerParamDef IpduMUnusedAreasDefault

Status: DRAFT

[

|                                 |                                                                                                                                        |   |                     |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name                  | IpduMUnusedAreasDefault                                                                                                                |   |                     |
| Parent Container                | <a href="#">IpduMContainerTxPdu</a>                                                                                                    |   |                     |
| Description                     | IpduM fills not updated areas of the Container PDU with this byte-pattern.<br><b>Tags:</b> atp.Status=draft                            |   |                     |
| Multiplicity                    | 0..1                                                                                                                                   |   |                     |
| Type                            | EcucIntegerParamDef                                                                                                                    |   |                     |
| Range                           | 0 .. 255                                                                                                                               |   |                     |
| Default value                   | –                                                                                                                                      |   |                     |
| Post-Build Variant Multiplicity | false                                                                                                                                  |   |                     |
| Post-Build Variant Value        | true                                                                                                                                   |   |                     |
| Value Configuration Class       | Pre-compile time                                                                                                                       | X | VARIANT-PRE-COMPILE |
|                                 | Link time                                                                                                                              | X | VARIANT-LINK-TIME   |
|                                 | Post-build time                                                                                                                        | X | VARIANT-POST-BUILD  |
| Dependency                      | Only valid if IpduMContainerHeaderSize is set to IPDUM_HEADERTYPE_NONE / should be aligned to bus-specific padding value if available. |   |                     |

]

## [ECUC\_IpduM\_00193] Definition of EcucReferenceDef IpduMContainerTxPduRef

[

|                           |                                                                                   |   |                     |
|---------------------------|-----------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMContainerTxPduRef                                                            |   |                     |
| Parent Container          | <a href="#">IpduMContainerTxPdu</a>                                               |   |                     |
| Description               | Reference to the Pdu which represents the container and is used for transmission. |   |                     |
| Multiplicity              | 1                                                                                 |   |                     |
| Type                      | Reference to Pdu                                                                  |   |                     |
| Post-Build Variant Value  | true                                                                              |   |                     |
| Value Configuration Class | Pre-compile time                                                                  | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                         | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                   | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                   |   |                     |

]

## [ECUC\_IpduM\_00214] Definition of EcucReferenceDef IpduMMainFunctionTxRef

[

|                                 |                                                                                                                                            |  |  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Parameter Name                  | IpduMMainFunctionTxRef                                                                                                                     |  |  |
| Parent Container                | <a href="#">IpduMContainerTxPdu</a>                                                                                                        |  |  |
| Description                     | Reference to the IpduM_MainFunctionTx instance this container PDU belongs to. Mandatory, if more than one IpduM_MainFunctionTx is defined. |  |  |
| Multiplicity                    | 0..1                                                                                                                                       |  |  |
| Type                            | Reference to <a href="#">IpduMMainFunctionTx</a>                                                                                           |  |  |
| Post-Build Variant Multiplicity | true                                                                                                                                       |  |  |

▽





|                                  |                  |   |              |
|----------------------------------|------------------|---|--------------|
| Post-Build Variant Value         | true             |   |              |
| Multiplicity Configuration Class | Pre-compile time | X | All Variants |
|                                  | Link time        | – |              |
|                                  | Post-build time  | – |              |
| Value Configuration Class        | Pre-compile time | X | All Variants |
|                                  | Link time        | – |              |
|                                  | Post-build time  | – |              |
| Dependency                       |                  |   |              |

└

### 10.2.21 IpduMContainedTxPdu

[ECUC\_IpduM\_00177] Definition of EcucParamConfContainerDef IpduMContainedTxPdu

|                                  |                                         |   |                     |
|----------------------------------|-----------------------------------------|---|---------------------|
| Container Name                   | IpduMContainedTxPdu                     |   |                     |
| Parent Container                 | <a href="#">IpduMConfig</a>             |   |                     |
| Description                      | Configuration of a sender ContainedPdu. |   |                     |
| Multiplicity                     | 0..*                                    |   |                     |
| Post-Build Variant Multiplicity  | true                                    |   |                     |
| Multiplicity Configuration Class | Pre-compile time                        | X | VARIANT-PRE-COMPILE |
|                                  | Link time                               | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                         | X | VARIANT-POST-BUILD  |
| Configuration Parameters         |                                         |   |                     |

| Included Parameters                                    |              |                    |
|--------------------------------------------------------|--------------|--------------------|
| Parameter Name                                         | Multiplicity | ECUC ID            |
| <a href="#">IpduMContainedPduHeaderId</a>              | 0..1         | [ECUC_IpduM_00172] |
| <a href="#">IpduMContainedPduOffset</a>                | 0..1         | [ECUC_IpduM_00206] |
| <a href="#">IpduMContainedTxPduCollectionSemantics</a> | 1            | [ECUC_IpduM_00198] |
| <a href="#">IpduMContainedTxPduConfirmation</a>        | 0..1         | [ECUC_IpduM_00178] |
| <a href="#">IpduMContainedTxPduHandleId</a>            | 1            | [ECUC_IpduM_00179] |
| <a href="#">IpduMContainedTxPduPriority</a>            | 0..1         | [ECUC_IpduM_00210] |
| <a href="#">IpduMContainedTxPduSendTimeout</a>         | 0..1         | [ECUC_IpduM_00181] |
| <a href="#">IpduMContainedTxPduTrigger</a>             | 1            | [ECUC_IpduM_00182] |
| <a href="#">IpduMPduUpdateBitPosition</a>              | 0..1         | [ECUC_IpduM_00207] |
| <a href="#">IpduMContainedTxInContainerPduRef</a>      | 1            | [ECUC_IpduM_00176] |
| <a href="#">IpduMContainedTxPduRef</a>                 | 1            | [ECUC_IpduM_00180] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

└

## [ECUC\_IpduM\_00172] Definition of EcucIntegerParamDef IpduMContainedPdu HeaderId

|                           |                                                                                                   |   |                     |
|---------------------------|---------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMContainedPduHeaderId                                                                         |   |                     |
| Parent Container          | <a href="#">IpduMContainedTxPdu</a>                                                               |   |                     |
| Description               | Header Id which is part of the ContainerPdu when this ContainedPdu is inside.                     |   |                     |
| Multiplicity              | 0..1                                                                                              |   |                     |
| Type                      | EcucIntegerParamDef                                                                               |   |                     |
| Range                     | 1 .. 4294967295                                                                                   |   |                     |
| Default value             | –                                                                                                 |   |                     |
| Post-Build Variant Value  | true                                                                                              |   |                     |
| Value Configuration Class | Pre-compile time                                                                                  | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                         | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                   | X | VARIANT-POST-BUILD  |
| Dependency                | only valid if IpduMContainerHeaderSize is set to IPDUM_HEADERTYPE_SHORT or IPDUM_HEADERTYPE_LONG. |   |                     |

For parameter table [\[ECUC\\_IpduM\\_00206\] IpduMContainedPduOffset](#), see definition below container [IpduMContainedRxPdu](#).

## [ECUC\_IpduM\_00198] Definition of EcucEnumerationParamDef IpduMContainedTxPduCollectionSemantics

|                           |                                                                                                       |                                                                                                                      |                     |
|---------------------------|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------|
| Parameter Name            | IpduMContainedTxPduCollectionSemantics                                                                |                                                                                                                      |                     |
| Parent Container          | <a href="#">IpduMContainedTxPdu</a>                                                                   |                                                                                                                      |                     |
| Description               | Defines whether this IpduMContainedTxPdu shall be collected using a last-is-best or queued semantics. |                                                                                                                      |                     |
| Multiplicity              | 1                                                                                                     |                                                                                                                      |                     |
| Type                      | EcucEnumerationParamDef                                                                               |                                                                                                                      |                     |
| Range                     | IPDUM_COLLECT_LAST_IS_BEST                                                                            | The IpduMContainedTxPdu data will be fetched via TriggerTransmit just before the transmission executes.              |                     |
|                           | IPDUM_COLLECT_QUEUED                                                                                  | The IpduMContainedTxPdu data will instantly be stored to the IpduMContainerTxPdu in the context of the Transmit API. |                     |
| Post-Build Variant Value  | true                                                                                                  |                                                                                                                      |                     |
| Value Configuration Class | Pre-compile time                                                                                      | X                                                                                                                    | VARIANT-PRE-COMPILE |
|                           | Link time                                                                                             | X                                                                                                                    | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                                       | X                                                                                                                    | VARIANT-POST-BUILD  |
| Dependency                |                                                                                                       |                                                                                                                      |                     |

## [ECUC\_IpduM\_00178] Definition of EcucBooleanParamDef IpduMContainedTxPduConfirmation

|                                  |                                                                                                                                                                                                                                                                                       |   |              |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name                   | IpduMContainedTxPduConfirmation                                                                                                                                                                                                                                                       |   |              |
| Parent Container                 | <a href="#">IpduMContainedTxPdu</a>                                                                                                                                                                                                                                                   |   |              |
| Description                      | This Parameter determines whether for this contained I-PDU a TxConfirmation shall be provided. If set to TRUE a TxConfirmation is issued. It is not used when an I-PDU is requested using the trigger transmit API.<br>If this Parameter is omitted, the default value shall be used. |   |              |
| Multiplicity                     | 0..1                                                                                                                                                                                                                                                                                  |   |              |
| Type                             | EcucBooleanParamDef                                                                                                                                                                                                                                                                   |   |              |
| Default value                    | false                                                                                                                                                                                                                                                                                 |   |              |
| Post-Build Variant Multiplicity  | false                                                                                                                                                                                                                                                                                 |   |              |
| Post-Build Variant Value         | false                                                                                                                                                                                                                                                                                 |   |              |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                      | X | All Variants |
|                                  | Link time                                                                                                                                                                                                                                                                             | – |              |
|                                  | Post-build time                                                                                                                                                                                                                                                                       | – |              |
| Value Configuration Class        | Pre-compile time                                                                                                                                                                                                                                                                      | X | All Variants |
|                                  | Link time                                                                                                                                                                                                                                                                             | – |              |
|                                  | Post-build time                                                                                                                                                                                                                                                                       | – |              |
| Dependency                       |                                                                                                                                                                                                                                                                                       |   |              |

## [ECUC\_IpduM\_00179] Definition of EcucIntegerParamDef IpduMContainedTxPduHandleId

|                           |                                                                  |   |              |
|---------------------------|------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMContainedTxPduHandleId                                      |   |              |
| Parent Container          | <a href="#">IpduMContainedTxPdu</a>                              |   |              |
| Description               | Handle Id of the ContainedPdu.                                   |   |              |
| Multiplicity              | 1                                                                |   |              |
| Type                      | EcucIntegerParamDef (Symbolic Name generated for this parameter) |   |              |
| Range                     | 0 .. 65535                                                       |   |              |
| Default value             | –                                                                |   |              |
| Post-Build Variant Value  | false                                                            |   |              |
| Value Configuration Class | Pre-compile time                                                 | X | All Variants |
|                           | Link time                                                        | – |              |
|                           | Post-build time                                                  | – |              |
| Dependency                | withAuto = true                                                  |   |              |

## [ECUC\_IpduM\_00210] Definition of EcucIntegerParamDef IpduMContainedTxPduPriority

|                  |                                                                                                                  |  |  |
|------------------|------------------------------------------------------------------------------------------------------------------|--|--|
| Parameter Name   | IpduMContainedTxPduPriority                                                                                      |  |  |
| Parent Container | <a href="#">IpduMContainedTxPdu</a>                                                                              |  |  |
| Description      | Defines a priority of a ContainedTxPdu. 255 represents the lowest priority and 0 represent the highest priority. |  |  |
| Multiplicity     | 0..1                                                                                                             |  |  |





|                                  |                                                                                                                  |   |                     |
|----------------------------------|------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Type                             | EcucIntegerParamDef                                                                                              |   |                     |
| Range                            | 0 .. 255                                                                                                         |   |                     |
| Default value                    | 255                                                                                                              |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                             |   |                     |
| Post-Build Variant Value         | true                                                                                                             |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                 | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                        | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                  | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                                                                                 | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                        | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                  | X | VARIANT-POST-BUILD  |
| Dependency                       | The IpduMContainedTxPduPriority shall only be considered if IpduMContainedTxPdu PriorityHandling is set to TRUE. |   |                     |



### [ECUC\_IpduM\_00181] Definition of EcucFloatParamDef IpduMContainedTxPdu SendTimeout

|                                  |                                                                                                                                                                   |   |                     |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name                   | IpduMContainedTxPduSendTimeout                                                                                                                                    |   |                     |
| Parent Container                 | <a href="#">IpduMContainedTxPdu</a>                                                                                                                               |   |                     |
| Description                      | Defines a ContainedPdu specific sender timeout which can reduce the ContainerPdu timer when this ContainedPdu is put inside the ContainerPdu. Defined in seconds. |   |                     |
| Multiplicity                     | 0..1                                                                                                                                                              |   |                     |
| Type                             | EcucFloatParamDef                                                                                                                                                 |   |                     |
| Range                            | [0 .. 65.535]                                                                                                                                                     |   |                     |
| Default value                    | –                                                                                                                                                                 |   |                     |
| Post-Build Variant Multiplicity  | true                                                                                                                                                              |   |                     |
| Post-Build Variant Value         | true                                                                                                                                                              |   |                     |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                                  | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                         | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                   | X | VARIANT-POST-BUILD  |
| Value Configuration Class        | Pre-compile time                                                                                                                                                  | X | VARIANT-PRE-COMPILE |
|                                  | Link time                                                                                                                                                         | X | VARIANT-LINK-TIME   |
|                                  | Post-build time                                                                                                                                                   | X | VARIANT-POST-BUILD  |
| Dependency                       |                                                                                                                                                                   |   |                     |



### [ECUC\_IpduM\_00182] Definition of EcucEnumerationParamDef IpduMContainedTxPduTrigger

|                  |                                                                    |                                                             |  |
|------------------|--------------------------------------------------------------------|-------------------------------------------------------------|--|
| Parameter Name   | IpduMContainedTxPduTrigger                                         |                                                             |  |
| Parent Container | <a href="#">IpduMContainedTxPdu</a>                                |                                                             |  |
| Description      | Defines whether this Pdu triggers the sending of the ContainerPdu. |                                                             |  |
| Multiplicity     | 1                                                                  |                                                             |  |
| Type             | EcucEnumerationParamDef                                            |                                                             |  |
| Range            | IPDUM_TRIGGER_ALWAYS                                               | This Pdu directly triggers the sending of the ContainerPdu. |  |





|                           |                     |                                                                                                                                      |                     |
|---------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------------------|
|                           | IPDUM_TRIGGER_NEVER | This Pdu does not triggers the sending of the ContainerPdu (other trigger criteria might still trigger sending of the ContainerPdu). |                     |
| Post-Build Variant Value  | true                |                                                                                                                                      |                     |
| Value Configuration Class | Pre-compile time    | X                                                                                                                                    | VARIANT-PRE-COMPILE |
|                           | Link time           | X                                                                                                                                    | VARIANT-LINK-TIME   |
|                           | Post-build time     | X                                                                                                                                    | VARIANT-POST-BUILD  |
| Dependency                |                     |                                                                                                                                      |                     |

└

For parameter table [ECUC\_IpduM\_00207] [IpduMPduUpdateBitPosition](#), see definition below container [IpduMContainedRxPdu](#).

### [ECUC\_IpduM\_00176] Definition of EcucReferenceDef IpduMContainedTxInContainerPduRef

|                           |                                                                                |   |                     |
|---------------------------|--------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMContainedTxInContainerPduRef                                              |   |                     |
| Parent Container          | <a href="#">IpduMContainedTxPdu</a>                                            |   |                     |
| Description               | Reference to the container Pdu which this contained Pdu shall be collected in. |   |                     |
| Multiplicity              | 1                                                                              |   |                     |
| Type                      | Reference to <a href="#">IpduMContainerTxPdu</a>                               |   |                     |
| Post-Build Variant Value  | true                                                                           |   |                     |
| Value Configuration Class | Pre-compile time                                                               | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                      | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                |   |                     |

└

### [ECUC\_IpduM\_00180] Definition of EcucReferenceDef IpduMContainedTxPduRef

|                           |                                                                                       |   |                     |
|---------------------------|---------------------------------------------------------------------------------------|---|---------------------|
| Parameter Name            | IpduMContainedTxPduRef                                                                |   |                     |
| Parent Container          | <a href="#">IpduMContainedTxPdu</a>                                                   |   |                     |
| Description               | Reference to the Pdu which represents this ContainedPdu and is used for transmission. |   |                     |
| Multiplicity              | 1                                                                                     |   |                     |
| Type                      | Reference to Pdu                                                                      |   |                     |
| Post-Build Variant Value  | true                                                                                  |   |                     |
| Value Configuration Class | Pre-compile time                                                                      | X | VARIANT-PRE-COMPILE |
|                           | Link time                                                                             | X | VARIANT-LINK-TIME   |
|                           | Post-build time                                                                       | X | VARIANT-POST-BUILD  |
| Dependency                |                                                                                       |   |                     |

└

## 10.2.22 IpduMMainFunctionRx

### [ECUC\_IpduM\_00211] Definition of EcucParamConfContainerDef IpduMMainFunctionRx

|                                  |                                                                                                                              |   |              |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Container Name                   | IpduMMainFunctionRx                                                                                                          |   |              |
| Parent Container                 | <a href="#">IpduMConfig</a>                                                                                                  |   |              |
| Description                      | Each element of this container defines one instance IpduM_MainFunctionRx, in case multi-core distribution feature is active. |   |              |
| Multiplicity                     | 0..*                                                                                                                         |   |              |
| Post-Build Variant Multiplicity  | true                                                                                                                         |   |              |
| Multiplicity Configuration Class | Pre-compile time                                                                                                             | X | All Variants |
|                                  | Link time                                                                                                                    | – |              |
|                                  | Post-build time                                                                                                              | – |              |
| Configuration Parameters         |                                                                                                                              |   |              |

| Included Parameters                     |              |                    |
|-----------------------------------------|--------------|--------------------|
| Parameter Name                          | Multiplicity | ECUC ID            |
| <a href="#">IpduMMainRxTimeBase</a>     | 1            | [ECUC_IpduM_00216] |
| <a href="#">IpduMMainRxPartitionRef</a> | 0..1         | [ECUC_IpduM_00215] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

### [ECUC\_IpduM\_00216] Definition of EcucFloatParamDef IpduMMainRxTimeBase

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |   |              |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMMainRxTimeBase                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |   |              |
| Parent Container          | <a href="#">IpduMMainFunctionRx</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |   |              |
| Description               | <p>The period between successive calls to according instance of IpduM_MainFunctionRx in seconds. This parameter may be used by the IpduM generator to transform the values of the reception related timing configuration parameters of the IpduM module to internal implementation specific counter or tick values. The IpduM module's internal timing handling is implementation specific.</p> <p>The IpduM module (generator) may rely on the fact that IpduM_MainFunctionRx is scheduled according to the value configured here.</p> |   |              |
| Multiplicity              | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |   |              |
| Type                      | EcucFloatParamDef                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |   |              |
| Range                     | ]0 .. INF[                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |   |              |
| Default value             | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |   |              |
| Post-Build Variant Value  | false                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |              |
| Value Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | X | All Variants |
|                           | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | — |              |
|                           | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | — |              |
| Dependency                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |   |              |

## [ECUC\_IpduM\_00215] Definition of EcucReferenceDef IpduMMainRxPartitionRef

|                                  |                                                                                             |   |              |
|----------------------------------|---------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name                   | IpduMMainRxPartitionRef                                                                     |   |              |
| Parent Container                 | <a href="#">IpduMMainFunctionRx</a>                                                         |   |              |
| Description                      | Reference to EcucPartition, where the according IpduM_MainFunction instance is assigned to. |   |              |
| Multiplicity                     | 0..1                                                                                        |   |              |
| Type                             | Reference to EcucPartition                                                                  |   |              |
| Post-Build Variant Multiplicity  | false                                                                                       |   |              |
| Post-Build Variant Value         | false                                                                                       |   |              |
| Multiplicity Configuration Class | Pre-compile time                                                                            | X | All Variants |
|                                  | Link time                                                                                   | – |              |
|                                  | Post-build time                                                                             | – |              |
| Value Configuration Class        | Pre-compile time                                                                            | X | All Variants |
|                                  | Link time                                                                                   | – |              |
|                                  | Post-build time                                                                             | – |              |
| Dependency                       |                                                                                             |   |              |

### 10.2.23 IpduMMainFunctionTx

## [ECUC\_IpduM\_00213] Definition of EcucParamConfContainerDef IpduMMainFunctionTx

|                                  |                                                                                                                                                                |   |              |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Container Name                   | IpduMMainFunctionTx                                                                                                                                            |   |              |
| Parent Container                 | <a href="#">IpduMConfig</a>                                                                                                                                    |   |              |
| Description                      | Each element of this container defines one instance IpduM_MainFunctionTx, in case multi-core distribution feature is active (mutual exclusive to ComTimeBase). |   |              |
| Multiplicity                     | 0..*                                                                                                                                                           |   |              |
| Post-Build Variant Multiplicity  | true                                                                                                                                                           |   |              |
| Multiplicity Configuration Class | Pre-compile time                                                                                                                                               | X | All Variants |
|                                  | Link time                                                                                                                                                      | – |              |
|                                  | Post-build time                                                                                                                                                | – |              |
| Configuration Parameters         |                                                                                                                                                                |   |              |

| Included Parameters                     |              |                    |
|-----------------------------------------|--------------|--------------------|
| Parameter Name                          | Multiplicity | ECUC ID            |
| <a href="#">IpduMMainTxTimeBase</a>     | 1            | [ECUC_IpduM_00218] |
| <a href="#">IpduMMainTxPartitionRef</a> | 0..1         | [ECUC_IpduM_00217] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

## [ECUC\_IpduM\_00218] Definition of EcucFloatParamDef IpduMMainTxTimeBase

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |              |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMMainTxTimeBase                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |   |              |
| Parent Container          | <a href="#">IpduMMainFunctionTx</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |   |              |
| Description               | <p>The period between successive calls to IpduM_MainFunctionTx in seconds. This parameter may be used by the IpduM generator to transform the values of the reception related timing configuration parameters of the IpduM module to internal implementation specific counter or tick values. The IpduM module's internal timing handling is implementation specific.</p> <p>The IpduM module (generator) may rely on the fact that IpduM_MainFunctionTx is scheduled according to the value configured here.</p> |   |              |
| Multiplicity              | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |   |              |
| Type                      | EcucFloatParamDef                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |   |              |
| Range                     | ]0 .. INF[                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |   |              |
| Default value             | –                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |   |              |
| Post-Build Variant Value  | false                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |   |              |
| Value Configuration Class | Pre-compile time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | X | All Variants |
|                           | Link time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | – |              |
|                           | Post-build time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | – |              |
| Dependency                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |   |              |

## [ECUC\_IpduM\_00217] Definition of EcucReferenceDef IpduMMainTxPartitionRef

|                                  |                                                                                             |   |              |
|----------------------------------|---------------------------------------------------------------------------------------------|---|--------------|
| Parameter Name                   | IpduMMainTxPartitionRef                                                                     |   |              |
| Parent Container                 | <a href="#">IpduMMainFunctionTx</a>                                                         |   |              |
| Description                      | Reference to EcucPartition, where the according IpduM_MainFunction instance is assigned to. |   |              |
| Multiplicity                     | 0..1                                                                                        |   |              |
| Type                             | Reference to EcucPartition                                                                  |   |              |
| Post-Build Variant Multiplicity  | false                                                                                       |   |              |
| Post-Build Variant Value         | false                                                                                       |   |              |
| Multiplicity Configuration Class | Pre-compile time                                                                            | X | All Variants |
|                                  | Link time                                                                                   | – |              |
|                                  | Post-build time                                                                             | – |              |
| Value Configuration Class        | Pre-compile time                                                                            | X | All Variants |
|                                  | Link time                                                                                   | – |              |
|                                  | Post-build time                                                                             | – |              |
| Dependency                       |                                                                                             |   |              |

## 10.3 Published Information

For details refer to [4] Chapter 10.3 “Published Information”.



### 10.3.1 IpduMPublishedInformation

#### [ECUC\_IpduM\_00141] Definition of EcucParamConfContainerDef IpduMPublishedInformation [

|                          |                                                                                                                                                                                                    |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Container Name           | IpduMPublishedInformation                                                                                                                                                                          |
| Parent Container         | <a href="#">IpduM</a>                                                                                                                                                                              |
| Description              | Additional published parameters not covered by CommonPublishedInformation container. Note that these parameters do not have any configuration class setting, since they are published information. |
| Multiplicity             | 1                                                                                                                                                                                                  |
| Configuration Parameters |                                                                                                                                                                                                    |

| Included Parameters                        |              |                    |
|--------------------------------------------|--------------|--------------------|
| Parameter Name                             | Multiplicity | ECUC ID            |
| <a href="#">IpduMRxDirectComInvocation</a> | 1            | [ECUC_IpduM_00142] |


|                        |
|------------------------|
| No Included Containers |
|------------------------|

]

#### [ECUC\_IpduM\_00142] Definition of EcucBooleanParamDef IpduMRxDirectComInvocation [

|                           |                                                                                       |   |              |
|---------------------------|---------------------------------------------------------------------------------------|---|--------------|
| Parameter Name            | IpduMRxDirectComInvocation                                                            |   |              |
| Parent Container          | <a href="#">IpduMPublishedInformation</a>                                             |   |              |
| Description               | If set to TRUE the COM invocation optimization as defined in IPDUM140 is implemented. |   |              |
| Multiplicity              | 1                                                                                     |   |              |
| Type                      | EcucBooleanParamDef                                                                   |   |              |
| Default value             | –                                                                                     |   |              |
| Post-Build Variant Value  | false                                                                                 |   |              |
| Value Configuration Class | Published Information                                                                 | X | All Variants |
| Dependency                |                                                                                       |   |              |

]

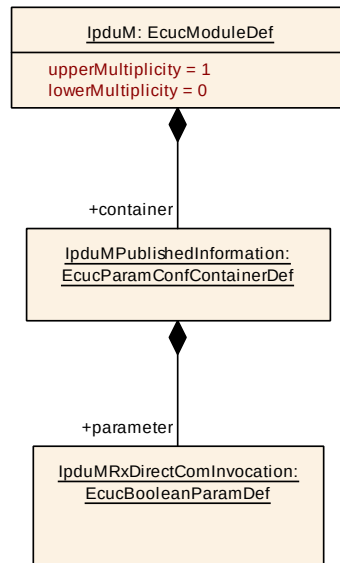

**Figure 10.10: IpduMPublishedInformation**

## 10.4 Configuration Rules

### 10.4.1 Selector Field

#### [SWS\_IpduM\_00011]

*Upstream requirements:* [SRS\\_IpduM\\_02803](#)

[The number of values used of the selector field, i.e. values used to distinguish between different I-PDU layouts, does not have to be the whole range of possible values.]

Example: The size of a selector field with 3 bits leads to  $2^3$  possible selector field values; it shall be allowed to use only an arbitrary subset of these values. The used subset needs no to be contiguous.

### 10.4.2 Placement of static and dynamic parts

#### [SWS\_IpduM\_00224]

*Upstream requirements:* [SRS\\_IpduM\\_02816](#), [SRS\\_IpduM\\_02817](#)

[All static and dynamic parts shall be configured to allocate exactly the same bits in the multiplexed and the de-multiplexed I-PDUs.]

The above requirement assures that the IpduM does not need to shift or swap any bits or bytes but is able to construct the (de-) multiplexed I-PDUs by masking and copying operations. The IpduM handles all segments as opaque data and performs no endianness or sign conversion of the copied data.

### 10.4.3 Multiple PDU to Container Mapping

#### [SWS\_IpduM\_00219]

*Upstream requirements:* [SRS\\_IpduM\\_02821](#)

[IpduM shall reject configurations in which the transmit properties (see [IpduMContainedTxPduCollectionSemantics](#)) of the contained I-PDUs which are assigned to a specific Container PDU are mixed. A Container PDU shall contain either solely I-PDUs with [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) or solely I-PDUs with [IPDUM\\_COLLECT\\_QUEUED](#) semantic.]

Container PDUs that have only I-PDUs assigned with [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) semantic to can be realized buffer efficiently.

#### [SWS\_IpduM\_00260]

*Upstream requirements:* [SRS\\_IpduM\\_02821](#)

[IpduM shall reject configurations in which contained I-PDUs have [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#) and the according Container PDU has queue ([IpduMContainerQueueSize](#) is available) configured.]

#### [SWS\_IpduM\_00230]

*Upstream requirements:* [SRS\\_IpduM\\_02820](#)

[IpduM shall reject configurations in which contained I-PDU supporting MetaData have a different MetaDataType from the MetaDataType of the Container PDU.]

The above requirement implies that multiple contained I-PDUs supporting MetaData assigned to the same Container PDU have the same MetaDataType.

**[SWS\_IpduM\_CONSTR\_00271] Reject configuration with time out value and first trigger at the Container PDU** [IpduM shall reject configurations in which the same Container PDU have [IpduMContainerTxFirstContainedPduTrigger](#) is set to TRUE and [IpduMContainerTxSendTimeout](#) configured.]

#### [SWS\_IpduM\_00238]

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[For a Container PDU with [IpduMContainerHeaderSize](#) set to [IPDUM\\_HEADERTYPE\\_NONE](#), all contained I-PDUs shall have [IpduMContainedTxPduCollectionSemantics](#) set to [IPDUM\\_COLLECT\\_LAST\\_IS\\_BEST](#).]

#### [SWS\_IpduM\_00241]

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[For a Container PDU with [IpduMContainerHeaderSize](#) set to [IPDUM\\_HEADERTYPE\\_NONE](#), all contained I-PDUs shall have a configured [IpduMContainedPduOffset](#).]

#### [SWS\_IpduM\_00242]

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[For a Container PDU with [IpduMContainerHeaderSize](#) set to [IPDUM\\_HEADERTYPE\\_NONE](#) and [IpduMUnusedAreasDefault](#) not set, all contained I-PDUs shall have a configured [IpduMPduUpdateBitPosition](#).]

#### [SWS\_IpduM\_00240]

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[Contained I-PDUs with a configured [IpduMPduUpdateBitPosition](#) shall only be assigned to Container PDUs with [IpduMContainerHeaderSize](#) set to [IPDUM\\_HEADERTYPE\\_NONE](#).]

#### [SWS\_IpduM\_00246]

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[Only the last contained IPdu (according to [IpduMContainedPduOffset](#)) of a ContainerIPdu with static container layout (i.e. [IpduMContainerHeaderSize](#) set to [IPDUM\\_HEADERTYPE\\_NONE](#)) may be a dynamic length PDU (i.e. a PDU that at run-time may exhibit a length different from the one statically configured via [Pdu.length](#) of the respective Pdu). All other contained PDUs of a ContainerIPdu with static container layout have to be static length PDUs.]

This constraint is in line with similar constraints in Com ([SWS\_Com\_CONSTR\_00754] and [SWS\_Com\_CONSTR\_00755]) and in the FrIf ([SWS\_FrIf\_05244]).

#### [SWS\_IpduM\_00245]

*Status:* DRAFT

*Upstream requirements:* [SRS\\_IpduM\\_02825](#)

[All [IpduMPduUpdateBitPositions](#) shall be configured to their own not otherwise occupied bit position.]

### 10.4.4 Priority

[SWS\_IpduM\_CONSTR\_00263] [The [IpduMContainedTxPduPriorityHandling](#) shall be set to `TRUE`, if at least one [IpduMContainerTxPdu](#) is referenced

by at least two `IpduMContainedTxPdu` via `IpduMContainedTxInContainerPduRef` and the configured `IpduMContainedTxPduPriority` of those `IpduMContainedTxPdu` differ from each other.]

Note: If all `IpduMContainedTxPdu` which refer to the same `IpduMContainerTxPdu` have the same `IpduMContainedTxPduPriority` set and this applies to all configured `IpduMContainedTxPdus`, then a prioritization cannot be performed. In this case, this is even true, if the configured `IpduMContainedTxPduPriority` differ per `IpduMContainerTxPdu`.

#### [SWS\_IpduM\_00248]

*Upstream requirements:* [SRS\\_IpduM\\_02823](#)

[All contained I-Pdus with Collection Semantic `IPDUM_COLLECT_LAST_IS_BEST` and `IpduMContainedTxPduPriorityHandling` is set to `TRUE`, shall have an `IpduMContainedTxPduPriority`. If the `IpduMContainedTxPduPriority` is not configured, the `IpduMContainedTxPduPriority` shall be set to default value 255 (lowest available priority).]

## A Not applicable requirements

### [SWS\_IpduM\_NA\_00001]

*Upstream requirements:* SRS\_BSW\_00168, SRS\_BSW\_00170, SRS\_BSW\_00171, SRS\_BSW\_00336, SRS\_BSW\_00339, SRS\_BSW\_00375, SRS\_BSW\_00386, SRS\_BSW\_00383, SRS\_BSW\_00388, SRS\_BSW\_00389, SRS\_BSW\_00390, SRS\_BSW\_00392, SRS\_BSW\_00393, SRS\_BSW\_00395, SRS\_BSW\_00403, SRS\_BSW\_00416, SRS\_BSW\_00417, SRS\_BSW\_00419, SRS\_BSW\_00422, SRS\_BSW\_00423, SRS\_BSW\_00427, SRS\_BSW\_00432, SRS\_BSW\_00433, SRS\_BSW\_00437, SRS\_BSW\_00461, SRS\_BSW\_00469, SRS\_BSW\_00471, SRS\_BSW\_00472, SRS\_BSW\_00490, SRS\_BSW\_00491

[These requirements are not applicable to this specification.]

## B Change History of AUTOSAR Traceable Items

Please note that the lists in this chapter also include traceable items that have been removed from the specification in a later version. These items do not appear as hyperlinks in the document.

### B.1 Traceable Item History of this Document According to AUTOSAR Release R25-11

#### B.1.1 Added Specification Items in R25-11

[\[ECUC\\_IpduM\\_00220\]](#) [\[SWS\\_IpduM\\_00264\]](#) [\[SWS\\_IpduM\\_00265\]](#) [\[SWS\\_IpduM\\_00272\]](#) [\[SWS\\_IpduM\\_00273\]](#) [\[SWS\\_IpduM\\_00274\]](#) [\[SWS\\_IpduM\\_00276\]](#) [\[SWS\\_IpduM\\_00277\]](#) [\[SWS\\_IpduM\\_00278\]](#) [\[SWS\\_IpduM\\_00279\]](#)

#### B.1.2 Changed Specification Items in R25-11

[\[ECUC\\_IpduM\\_00130\]](#) [\[SWS\\_IpduM\\_00184\]](#) [\[SWS\\_IpduM\\_00185\]](#) [\[SWS\\_IpduM\\_00201\]](#) [\[SWS\\_IpduM\\_00259\]](#)

#### B.1.3 Deleted Specification Items in R25-11

none

#### B.1.4 Added Constraints in R25-11

[\[SWS\\_IpduM\\_CONSTR\\_00271\]](#)

#### B.1.5 Changed Constraints in R25-11

none

#### B.1.6 Deleted Constraints in R25-11

none

## **B.2 Traceable Item History of this Document According to AUTOSAR Release R24-11**

### **B.2.1 Added Specification Items in R24-11**

none

### **B.2.2 Changed Specification Items in R24-11**

none

### **B.2.3 Deleted Specification Items in R24-11**

none

### **B.2.4 Added Constraints in R24-11**

none

### **B.2.5 Changed Constraints in R24-11**

none

### **B.2.6 Deleted Constraints in R24-11**

none

## **B.3 Traceable Item History of this Document According to AUTOSAR Release R23-11**

### **B.3.1 Added Specification Items in R23-11**

none

### **B.3.2 Changed Specification Items in R23-11**

[\[SWS\\_IpduM\\_00232\]](#) [\[SWS\\_IpduM\\_00235\]](#) [\[SWS\\_IpduM\\_00241\]](#) [\[SWS\\_IpduM\\_00254\]](#)



### **B.3.3 Deleted Specification Items in R23-11**

none

### **B.3.4 Added Constraints in R23-11**

none

### **B.3.5 Changed Constraints in R23-11**

none

### **B.3.6 Deleted Constraints in R23-11**

none