Document Title	Software Component Template
Document Category	Template specification (TPS)
Document UID	62
Document Status	published
Part of AUTOSAR Standard	Classic Platform
Part of Standard Release	R26-11

Document Change History

Date	Release	Changed by	Description
2026-11-26	R26-11	AUTOSAR Release Management	• Remove V2X Support • Improve description of record layouts • Improve description of data dependencies • various corrections / clarifications / editorial changes
2025-11-27	R25-11	AUTOSAR Release Management	• Introduce RunnableEntry argument • Remove End-to-End wrapper • add imposition time for AP • minor corrections / clarifications / editorial changes
2024-11-27	R24-11	AUTOSAR Release Management	• Improve calibration data description • Add further constraints to refine model semantics • minor corrections / clarifications / editorial changes
2023-11-23	R23-11	AUTOSAR Release Management	• Improve data type configuration • minor corrections / clarifications / editorial changes
2022-11-24	R22-11	AUTOSAR Release Management	• Support for service discovery • Clarification of the role of SwBaseType • minor corrections / clarifications / editorial changes

▽

△

2021-11-25	R21-11	AUTOSAR Release Management	• Introduction of imposition times for constraints • Clean-up of diagnostics service needs • New writing strategy for NvRAM • minor corrections / clarifications / editorial changes
2020-11-30	R20-11	AUTOSAR Release Management	• In-place Strategy for Array Data Type • New Service Use Cases • Optimization of Return Type for RTE APIs • minor corrections / clarifications / editorial changes
2019-11-28	R19-11	AUTOSAR Release Management	• Support for optimized access to coding data • Support for meta-data on application level • Support for optimized storing of bitfields in NvRAM • minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation • Changed Document Status from Final to published
2018-10-31	4.4.0	AUTOSAR Release Management	• Support for optional elements in structured data types • Improved description of service use cases • minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation
2017-12-08	4.3.1	AUTOSAR Release Management	• minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation

▽

△

2016-11-30	4.3.0	AUTOSAR Release Management	• Improved support for Unions • Improved upstream mapping • Improved description of service use cases • Minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation
2015-07-31	4.2.2	AUTOSAR Release Management	• Minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation
2014-10-31	4.2.1	AUTOSAR Release Management	• Efficient NV data handling • Introduction of data transformation • Support for variable-size Arrays of arbitrary data types • Support for ASIL/QM development • Minor corrections / clarifications / editorial changes; For details please refer to the BWCStatement
2014-03-31	4.1.3	AUTOSAR Release Management	• Various fixes and clarifications
2013-10-31	4.1.2	AUTOSAR Release Management	• Various fixes and clarifications
2013-03-15	4.1.1	AUTOSAR Administration	• Introduction of PRPortPrototype • Definition of implicit communication behavior • Support for the formal analysis of resource locking • Introduction of refined scheduling of RunnableEntitys • Get information about activating RTEEvent • Connection of Mode Managers and Mode Users with different number of ModeDeclarations • Support activation of RunnableEntitys on remote ECUs • Support for ModeTransition

▽

△

			△ • Support for the definition of the network representation of composite data types • `ServiceNeeds` for diagnostics over IP • Various fixes and clarifications
2011-12-22	4.0.3	AUTOSAR Administration	• Added `CompuMethod` categories SCALE_LINEAR_AND_TEXTTABLE and SCALE_RATIONAL_ AND_TEXTTABLE ([TPS_SWCT_01877]) • Clarification concerning the usage of invalid values • Revised support for data filters • Support for partial networking • Support for the specification of local connections between software-components • Improved description of service needs • Change history of constraints and specification items • Miscellaneous improvements and clarifications • “Support for Standardization” moved to [1, TPS Standardization Template]
2011-04-15	4.0.2	AUTOSAR Administration	• Remove restriction on data type of inter-runnable variables • Rework end-to-end communication protection • Add more constraints on the usage of the meta-model • Various fixes and clarifications

▽

△

2009-12-18	4.0.1	AUTOSAR Administration	• New requirements tracing table • Support for fixed data exchange • Implementation of meta-model cleanup • Fundamental revision of the data type concept • Support for variant handling • Support for end-to-end communication protection • Support for documentation • Support for stopping and restarting of software-components • Support for triggered events • Support for explicit mapping of interface elements • Revised concept of mode management • Support for integrity and scaling at ports • Support for standardization within AUTOSAR
2008-08-13	3.1.1	AUTOSAR Administration	• Improved support for on-board diagnostics • Small layout adaptations made
2007-12-21	3.0.1	AUTOSAR Administration	• Improved support for measurement and calibration • Improved semantics of delegation ports • Introduction of abstract memory classes • Document meta information extended • Small layout adaptations made
2007-01-24	2.1.15	AUTOSAR Administration	• Harmonization of the document with other specifications (e.g. RTE) • Introduction of a new concept to support calibration and measurement - harmonized with RTE • Description of needs of the Software Component Template toward AUTOSAR services and of the interaction of the Software Component Template and services (on XML level)

▽

△

			△ • Legal disclaimer revised • Release notes added • “Advice for users” added • “Revision information” added
2006-05-16	2.0.0	AUTOSAR Administration	• Second
2005-05-31	1.0.0	AUTOSAR Administration	• Initial release

Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

Table of Contents

1 Introduction 33
1.1 Overview . . . 33
1.2 Scope . . . 33
1.3 Organization of the Meta-Model . . . 34
1.4 Structure of the Template . . . 36
1.4.1 Description of Software Components on VFB Level . . . 36
1.4.2 Description of Software Components on RTE Level . . . 36
1.4.3 Descriptions of Software Components on Implementation Level . . . 37
1.5 Document Conventions . . . 37
1.6 About Tables . . . 39
2 Conceptual Aspects 40
2.1 Introduction . . . 40
2.2 The Encapsulation Principle . . . 40
2.3 Measurement and Calibration . . . 41
2.3.1 Basic Approach of Measurement and Calibration . . . 41
2.3.2 Calibration Parameters Overview . . . 41
2.3.3 Using Calibration Parameters . . . 42
2.3.3.1 Sharing Calibration Parameters within Compositions . . . 43
2.3.3.2 Sharing Calibration Parameters between SwComponentPrototypes of the same SwComponentType . . . 44
2.3.3.3 Providing Instance-Individual Characteristic Data . . . 45
2.4 Runtime and Data Consistency Aspects . . . 46
2.4.1 Background: the Issues . . . 46
2.4.1.1 Mutual Exclusion with Semaphores . . . 47
2.4.1.2 Interrupt Disabling . . . 47
2.4.1.3 Priority Ceiling . . . 47
2.4.1.4 Implicit Communication by means of Variable Copies . . . 47
2.4.2 Data Consistency at Runtime . . . 48
2.4.3 Modeling Aspects of Data Consistency . . . 49
2.5 Variant Handling in the Software Component Template . . . 50
2.6 Communication Specification of Composition Component Types . . . 50
2.6.1 Rationale . . . 51
2.7 PRPortPrototype . . . 52
2.7.1 Use Case 1 . . . 52
2.7.2 Use Case 2 . . . 52
2.7.3 Use Case 3 . . . 53
2.7.4 Solution . . . 54
2.8 Variable-size Array Data Types . . . 54
2.8.1 Overview and Use cases . . . 54
2.8.1.1 “Old-world” dynamic-size Arrays . . . 54

2.8.1.2 “New-world” variable-size Arrays . . . 56
2.8.2 Modeling Aspects regarding Application Data Types . . . 58
2.8.3 Modeling Aspects regarding Implementation Data Types . . . 59
2.9 Optional Elements in Structures . . . 60
2.9.1 Background . . . 60
3 Software Components 62
3.1 Introduction . . . 62
3.2 Software Component . . . 63
3.2.1 Overview . . . 63
3.2.2 Port Prototype . . . 64
3.2.3 Atomic Software Component Type . . . 69
3.2.4 Parameter Software Component Type . . . 71
3.2.5 Symbolic Name of a Software Component . . . 71
3.3 Composition Software Component Type . . . 73
3.3.1 Overview . . . 73
3.3.2 Software Component Prototype . . . 73
3.3.3 Software Connector . . . 77
3.3.4 Instantiation-specific RTE Events . . . 83
4 Communication among Software Components 86
4.1 Introduction . . . 86
4.2 Port Interface Overview . . . 86
4.3 Port Interface Details . . . 93
4.3.1 Sender Receiver Communication . . . 93
4.3.1.1 Sender Receiver Interface . . . 93
4.3.1.2 Communication Patterns for Sender Receiver Communication 95
4.3.1.3 Invalidation Policy . . . 96
4.3.1.4 Meta-data on the Application Software Level . . . 98
4.3.2 Client Server Communication . . . 101
4.3.2.1 Client Server Interface . . . 101
4.3.2.2 Error Handling in Client/Server Communication . . . 107
4.3.3 External Trigger Event Communication . . . 109
4.3.4 Mode Communication . . . 112
4.3.4.1 Mode Switch Interface . . . 112
4.3.4.2 Data Types used for Mode Communication . . . 115
4.3.4.3 Relevance for Measurement and Calibration . . . 117
4.3.5 Parameter Communication . . . 118
4.4 Port Interface Mapping and Data Scaling . . . 118
4.4.1 Port Interface Mapping . . . 120
4.4.1.1 Mapping of Sender Receiver Interface, Parameter Interface and Non Volatile Data Interface Elements . . . 124
4.4.1.2 Mapping of Client Server Interface Elements . . . 127
4.4.1.3 Mapping of Mode Interface Elements . . . 132

4.4.1.4 Mapping of Trigger Interface Elements . . . 136
4.4.1.5 Mapping of Elements of a composite Data Type . . . 138
4.4.2 Data Conversion . . . 144
4.4.2.1 Linear Data Scaling . . . 145
4.4.2.2 Table Conversion . . . 146
4.4.3 Relevance for Data Transformation . . . 152
4.5 Port Annotation . . . 155
4.5.1 Introduction . . . 155
4.5.2 SenderReceiverAnnotation . . . 156
4.5.3 ClientServerAnnotation . . . 159
4.5.4 Annotation for the I/O Hardware Abstraction Layer . . . 160
4.5.5 Parameter Port Annotation . . . 163
4.5.6 Mode Port Annotation . . . 163
4.5.7 Trigger Port Annotation . . . 164
4.5.8 Non Volatile Data Port Annotation . . . 165
4.5.9 Delegated Port Annotations . . . 165
4.5.10 General Annotation . . . 167
4.6 Communication Specification . . . 168
4.6.1 Communication Specification for Sender-Receiver Communication 173
4.6.1.1 Receiver Communication Specification . . . 174
4.6.1.2 Sender Communication Specification . . . 182
4.6.1.3 Data Filter . . . 187
4.6.1.4 Communication between Application and NV Block Software Components . . . 189
4.6.1.5 Communication behavior to be implemented by the Software Component . . . 191
4.6.1.6 Communication behavior to be implemented by the Com Handler . . . 196
4.6.2 Communication Specification for Client-Server Communication . . 199
4.6.2.1 Client ComSpec . . . 199
4.6.2.2 Server ComSpec . . . 200
4.6.3 Communication Specification for Mode Switch Communication . . 202
4.6.3.1 Mode Switch Sender ComSpec . . . 202
4.6.3.2 Mode Switch Receiver ComSpec . . . 204
4.6.4 Communication Specification for Parameter Communication . . . 204
4.6.5 Communication Specification for NV Data Communication 206
4.6.5.1 NV Require ComSpec . . . 206
4.6.5.2 NV Provide ComSpec . . . 207
4.6.6 Configuration of Data Transformation . . . 208
4.7 Port Groups within Software Component Types . . . 216
4.8 Partial Networking . . . 217
4.8.1 VFC Control Ports . . . 218
4.8.2 VFC Status Ports . . . 219

4.9 Formal Definition of implicit Communication Behavior . . . 220
4.9.1 Consistency Needs on Receiver Side . . . 225
4.9.2 Consistency Needs on Sender Side . . . 225
4.9.3 Consistency Needs for Senders and Receivers of the Same Data inside a RunnableEntityGroup . . . 226
5 Data Description 227
5.1 Introduction . . . 227
5.2 Data Types . . . 232
5.2.1 Overview . . . 232
5.2.2 Data Type Mapping . . . 233
5.2.2.1 Overview . . . 233
5.2.2.2 Advanced Topics . . . 237
5.2.3 Data Categories . . . 241
5.2.4 Application Data Type . . . 246
5.2.4.1 Application Primitive Data Types . . . 248
5.2.4.2 Application Composite Data Types . . . 255
5.2.5 Implementation Data Type . . . 266
5.2.5.1 Overview . . . 266
5.2.5.2 Modeling of Type Reference using Implementation Data Type 274
5.2.5.3 Modeling of Structure using Implementation Data Type . . . 276
5.2.5.4 Modeling of Union using Implementation Data Type . . . 279
5.2.5.5 Modeling of Array using Implementation Data Type . . . 280
5.2.5.6 Modeling of Pointer using Implementation Data Type . . . 290
5.2.6 Base Type . . . 293
5.2.6.1 Big Picture . . . 293
5.2.6.2 Category . . . 297
5.2.6.3 Native Declaration . . . 298
5.2.6.4 Base Type Size . . . 298
5.2.6.5 Base Type Encoding . . . 299
5.2.6.6 Relation between Base Type Size, Base Type Encoding and Internal Constraint . . . 301
5.2.6.7 Byte Order and Memory Alignment . . . 302
5.2.7 Data Type Terminology . . . 304
5.2.7.1 Primitive Type . . . 304
5.2.7.2 Compound Primitive Data Type . . . 305
5.2.7.3 Integral Primitive Type . . . 306
5.2.7.4 Variable-Size Array Data Type . . . 307
5.2.7.5 Wrapped Union Data Type . . . 307
5.2.7.6 Optional Element Structure . . . 309
5.2.7.7 Compu Scale Literal . . . 310
5.3 Data Prototypes . . . 310
5.3.1 Overview . . . 310
5.3.2 Data Constraints for Data Prototypes typed by Array DataTypes . 317

5.3.3 Reference to Data Prototypes . . . 321
5.3.3.1 AUTOSAR Variable Ref . . . 321
5.3.3.2 AUTOSAR Parameter Ref . . . 323
5.3.3.3 Modeling Approach . . . 324
5.3.3.4 Access into Variable Data Prototype typed by an Implementation Data Type . . . 328
5.3.3.5 Access into Parameter Data Prototype typed by an Implementation Data Type . . . 330
5.4 Properties of Data Definitions . . . 332
5.4.1 Overview . . . 332
5.4.2 Invalid Value . . . 347
5.4.3 Properties for Measurement . . . 355
5.4.4 Properties of Curves and Maps . . . 357
5.4.4.1 Specification of grouped Axes . . . 364
5.4.4.2 Specification of fix Axes . . . 366
5.4.5 Setting an Axis Input Value . . . 369
5.4.6 Setting a Group Axis . . . 374
5.4.7 Specifying Data Dependencies . . . 379
5.4.8 Precedence of data properties with respect to data elements, axis elements, computation methods, units . . . 381
5.5 Elements used in Properties of Data Definitions . . . 386
5.5.1 Computation Methods . . . 386
5.5.1.1 Overview . . . 386
5.5.1.2 Limits of Computation Methods . . . 394
5.5.1.3 Units in the context of Computation Methods . . . 396
5.5.1.4 Symbols in Computation Methods . . . 396
5.5.1.5 Display Format in Computation Methods . . . 398
5.5.1.6 Category Values in the context of a CompuMethod . . . 399
5.5.1.7 Applicability of Attributes in the context of a CompuMethod . . . 400
5.5.1.8 Compu Method and Autosar Data Type . . . 402
5.5.1.9 Compu Method and A2L . . . 404
5.5.2 Physical Dimensions . . . 405
5.5.3 Units and Unit Groups . . . 408
5.5.4 Data Constraints . . . 412
5.5.4.1 Physical Limits . . . 417
5.5.4.2 Internal Limits . . . 418
5.5.5 Addressing Methods . . . 419
5.5.6 Record Layouts . . . 428
5.5.6.1 Specifying Record Layouts . . . 428
5.5.6.2 RecordLayouts and DataTypes . . . 435
5.5.6.3 Record Layouts and Interpolation Routines . . . 436
5.5.6.4 Design Record Layouts . . . 437
5.5.6.5 Recipes for Record Layouts . . . 438
5.5.7 Display Presentation . . . 448

5.6 Specification of Constant Values . . . 449
5.6.1 Overview . . . 449
5.6.2 Reference to Constant . . . 457
5.6.3 Constant Specification Mapping . . . 458
5.6.4 Values for Variable-Size Array . . . 464
5.6.5 Values for Compound Primitive Data Types . . . 467
5.6.6 Values for TEXTTABLE . . . 479
5.6.7 Values for BITFIELD_TEXTTABLE . . . 480
5.6.8 Values for Strings . . . 481
5.6.8.1 String is modeled by ApplicationDataType . . . 481
5.6.8.2 String is modeled by ImplementationDataType . . . 481
5.6.9 Specification of Values based on Rules . . . 481
5.6.9.1 Support for primitive Data Types . . . 481
5.6.9.2 Support for composite Data Types . . . 490
5.6.9.3 Support for compound primitive Data Types . . . 492
5.7 Initial Values . . . 493
5.7.1 Overview . . . 493
5.7.2 Initial Value Representation . . . 495
5.7.3 Initial Values For Calibration Parameters . . . 497
5.7.4 Initial Value for optional Element . . . 498
5.7.4.1 Initial Value for optional Application Record Element . . . 498
5.7.4.2 Initial Value for optional Implementation Data Type Element . . . 500
6 Compatibility 502
6.1 Introduction . . . 502
6.2 Compatibility of Data Types . . . 502
6.2.1 Application Data Type . . . 502
6.2.1.1 Application Primitive Data Type . . . 502
6.2.1.2 Application Composite Data Type . . . 503
6.2.2 Implementation Data Type . . . 504
6.2.3 Compatibility of Software Base Type . . . 506
6.2.4 Compatibility of Software Data Definition Properties . . . 506
6.2.4.1 Compatibility of Units . . . 507
6.2.4.2 Compatibility of Physical Dimensions . . . 509
6.2.4.3 Compatibility of Data Constraints . . . 510
6.2.4.4 Compatibility in the Case of ImplementationDataType . . . 511
6.2.4.5 Compatibility of Compu Methods . . . 513
6.2.4.6 Software Text Properties . . . 515
6.2.5 Compatibility of Application Data Type and Implementation Data Type . . . 516
6.2.5.1 General Rule . . . 516
6.2.5.2 Category VALUE . . . 517
6.2.5.3 Category ARRAY, VAL_BLK . . . 517
6.2.5.4 Category STRUCTURE . . . 518

6.2.5.5 Category BOOLEAN 518
6.2.5.6 Category COM_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, CUBE_5 519
6.2.5.7 Forbidden Mappings 519
6.3 Compatibility of Variable Data Prototypes and Parameter Data Prototypes 521
6.4 Compatibility of Sender Receiver Interfaces, Parameter Interfaces and Non Volatile Data Interfaces 522
6.4.1 Connection of Required and Provided Port via AssemblySwConnector 523
6.4.2 Connection of Inner and Outer Port via DelegationSwConnector . 523
6.4.3 Connection of Required and Provided Port via PassThroughSwConnector 525
6.4.4 Compatibility of ParameterDataPrototype and VariableDataPrototype depending on PortInterface Type 526
6.5 Compatibility of Mode Switch Interfaces 527
6.5.1 Connection of Required and Provided Port via AssemblySwConnector 527
6.5.2 Connection of Inner and Outer Port via DelegationSwConnector . 528
6.5.3 Connection of Outer and Outer Port via PassThroughSwConnector 528
6.6 Compatibility of Mode Declaration Group Prototypes 529
6.7 Compatibility of Mode Declaration Groups 529
6.8 Compatibility of Argument Prototypes 531
6.9 Compatibility of Application Errors 531
6.10 Compatibility of Client/Server Operations 532
6.11 Compatibility of Client Server Interfaces 532
6.11.1 Connection of Required and Provided Port via AssemblySwConnector 532
6.11.2 Connection of Inner and Outer Port via DelegationSwConnector . 533
6.11.3 Connection of Outer and Outer Port via PassThroughSwConnector 534
6.12 Compatibility of Trigger Interfaces 534
6.12.1 Connection of Required and Provided Port via AssemblySwConnector 534
6.12.2 Connection of Inner and Outer Port via DelegationSwConnector . 535
6.12.3 Connection of Outer and Outer Port via PassThroughSwConnector 536
6.13 Compatibility of Trigger 536
6.14 Entire Delegation of a Provided Port Prototype 536
6.14.1 Split and Merge of PortInterface Elements 539
6.15 Compatibility in the Case of a Flat ECU Extract 539

7 Internal Behavior 541
7.1 Introduction 541
7.2 Runnable Entity 546
7.2.1 Concurrency and Reentrancy of a RunnableEntity that cannot be Invoked Concurrently 553

7.2.2 Concurrency and Reentrancy of a RunnableEntity that can be Invoked Concurrently . . . 554
7.2.3 Timed Activation of Runnable Entities . . . 555
7.2.4 Additional Remarks and Clarifications . . . 557
7.2.4.1 Reentrancy and Multiple Instantiation . . . 557
7.2.4.2 Reentrancy and “Library Functions” . . . 557
7.2.4.3 Compatibility of Client Server Operations triggering the same Runnable Entity . . . 557
7.2.4.4 Categories of Runnable Entities . . . 559
7.2.4.5 Arguments of a Runnable Entity . . . 560
7.2.5 Activation Reason of a Runnable Entity . . . 563
7.2.6 Runnable Entity for Initialization Purpose . . . 566
7.3 RTE Event . . . 567
7.3.1 Defining an Event . . . 575
7.3.2 Defining how to Respond to an Event . . . 577
7.4 Communication among Runnable Entities . . . 579
7.4.1 Description Possibility 1: Exclusive Area . . . 579
7.4.1.1 Entire Runnable Runs in the Exclusive Area . . . 582
7.4.1.2 Runnable would Dynamically Enter and Leave the Exclusive Area . . . 583
7.4.1.3 Configuration of API Generation . . . 583
7.4.2 Description Possibility 2: Inter-Runnable Variable . . . 585
7.4.3 Inter Runnable Triggering . . . 588
7.5 Data Access of Runnable Entities . . . 589
7.5.1 RunnableEntities and Sender Receiver Communication . . . 592
7.5.1.1 Terminology . . . 593
7.5.1.2 Data Access . . . 593
7.5.1.3 Explicit Sending and Receiving . . . 596
7.5.1.4 Implicit Sending and Receiving . . . 600
7.5.1.5 DataSendCompletedEvent . . . 601
7.5.1.6 DataWriteCompletedEvent . . . 602
7.5.1.7 DataReceivedEvent . . . 602
7.5.1.8 DataReceiveErrorEvent . . . 603
7.5.2 RunnableEntities and Client Server Communication . . . 604
7.5.2.1 Invoking an Operation . . . 604
7.5.2.2 Providing an Implementation of an Operation . . . 610
7.5.2.3 Reacting on Data Transformation Errors . . . 611
7.5.3 RunnableEntities and External Trigger Event Communication . . . 611
7.5.3.1 Trigger Source . . . 611
7.5.3.2 Trigger Sink . . . 613
7.5.4 RunnableEntities and Parameter Access . . . 613
7.5.4.1 Instantiation Data Def Props . . . 615
7.5.5 RunnableEntities and Mode Communication . . . 617

7.6 Port API Options . . . 618
7.6.1 Enable to Take Address . . . 620
7.6.2 Indirect API Generation . . . 621
7.6.3 Port Defined Argument Value . . . 621
7.6.4 Supported Features . . . 623
7.6.4.1 Buffer Locking . . . 623
7.7 Per Instance Memory . . . 624
7.7.1 Per Instance Memory typed by “C” Data Types . . . 625
7.7.2 Per Instance Memory typed by AUTOSAR Data Types . . . 627
7.8 Static Memory and Constant Memory . . . 627
7.9 Included AUTOSAR Data Types . . . 629
7.10 Included Mode Declaration Groups . . . 630
7.11 Service Needs . . . 631
7.11.1 Overview . . . 631
7.11.2 Assignment of Service Needs to Ports and Data . . . 633
7.11.2.1 Swc Service Dependency . . . 633
7.11.2.2 Mixed Usage of Different Kinds of Service Needs . . . 640
7.11.2.3 Same Kind of Service Needs used in Service Use Case . . . 642
7.12 Variation Point Proxy . . . 644

8 Implementation 650

9 Mode Management 656
9.1 Declaration of Modes . . . 656
9.2 Modes and Events . . . 662
9.3 Initialization / Finalization . . . 666
9.4 Mode Error Behavior . . . 667
9.5 Summary Meta-Model Excerpt Related to Modes . . . 670

10 ECU Abstraction and Complex Drivers 672
10.1 Introduction . . . 672
10.2 High Level Hardware and Software Architecture . . . 672
10.3 Interfaces and APIs . . . 675
10.3.1 ECU Abstraction and its AUTOSAR Interfaces . . . 675
10.4 Sensors/Actuators . . . 676
10.5 I/O Hardware Abstraction . . . 677
10.6 Complex Driver . . . 679

11 Services 685
11.1 Overview: Generation of Service-related Model Elements . . . 685
11.2 Service Software Component Type . . . 688
11.3 Service Proxy Component Type . . . 692
11.4 Non-Volatile Memory . . . 694
11.4.1 Introduction . . . 694
11.4.2 NvBlockComponent . . . 695

11.4.3 Software-Components using *NVRAM data* of NvBlockComponents 697
11.4.4 Software-Components connected to NvBlockComponents 700
11.4.5 NvBlockDescriptor 701
11.4.5.1 Writing Strategies 704
11.4.5.2 NvBlockNeeds 710
11.4.5.3 RAM Block and ROM Block 713
11.4.5.4 NvBlockDataMapping 714
11.4.5.5 Client Server Ports 721
11.4.6 BulkNvDataDescriptor 723
11.4.7 SwcInternalBehavior of an NvBlockSwComponentType 725
12 Software Component Documentation 729
12.1 Introduction 729
13 Service Dependencies and Service Use Cases 733
13.1 Overview 733
13.2 NvM Service Dependencies 733
13.2.1 NvM Use Case: Permanent RAM Block 734
13.2.2 NvM Use Case: `Temporary RAM Block` 735
13.2.3 NvM Use Case: RAM Block with explicit synchronization using Mirror Interfaces 736
13.2.4 NvM Use Case: Software-Components using Nv Data provided by `NvBlockSwComponentType` (not ServiceSwComponent of NvM) 738
13.2.5 NvM Use Case: Software-Components using Nv Data provided by `NvBlockSwComponentType` with individual settings in NvBlockNeeds 739
13.3 Watchdog Service Dependencies 740
13.3.1 Watchdog Service Use Case: Local Supervision 740
13.3.2 Watchdog Service Use Case: *Global Supervision Status* notification 741
13.3.3 Watchdog Service Use Case: Control global supervision or get global supervision status 742
13.3.4 Watchdog Service Use Case: Software-component wants to obtain the status of a local supervision 743
13.3.5 Watchdog Service Use Case: Software-component wants to report a checkpoint 744
13.4 COM Manager Service Needs 744
13.4.1 ComM Use Case: read current ComM Mode 745
13.4.2 ComM Use Case: request ComM Mode 746
13.4.3 ComM Use Case: Software-Component acts as a Mode Manager that influences the ECU State 746
13.4.4 Read PNC ComM Mode 747
13.5 ECU State Manager Service Needs 747
13.5.1 EcuM Use Case: read current ECU Mode 748
13.5.2 EcuM Use Case: request a certain ECU state 748

13.5.3 EcuM Use Case: select Shutdown Target . . . 749
13.5.4 EcuM Use Case: select Boot Target . . . 749
13.6 BswM . . . 750
13.6.1 Partial Networking . . . 750
13.6.2 Mode Manager . . . 751
13.6.3 Mode User . . . 753
13.6.4 Mode Requester . . . 754
13.6.5 Service Oriented Use Cases . . . 754
13.6.5.1 `PortGroup` supports Relation between Software-Component and service Instance . . . 755
13.6.5.2 General Server interaction . . . 757
13.6.5.3 General Client interaction . . . 758
13.6.5.4 Event Reception Without Subscription . . . 760
13.6.5.5 Use Case: Server Service Offer . . . 761
13.6.5.6 Use Case: Server Service Subscription Status . . . 762
13.6.5.7 Use Case: Client Event / Method Subscription . . . 764
13.6.5.8 Use Case: Client Event and Method Subscription Status . . . 765
13.7 Crypto Service Dependencies . . . 766
13.7.1 Overview . . . 766
13.7.2 Crypto Service Use Cases . . . 768
13.7.2.1 Crypto Service Use Case: Hash calculation . . . 768
13.7.2.2 Crypto Service Use Case: MAC calculation . . . 769
13.7.2.3 Crypto Service Use Case: MAC verification . . . 769
13.7.2.4 Crypto Service Use Case: generation of random numbers . . . 770
13.7.2.5 Crypto Service Use Case: Encryption with Authenticated Encryption with Associated Data (AEAD) . . . 771
13.7.2.6 Crypto Service Use Case: Decryption with Authenticated Encryption with Associated Data (AEAD) . . . 771
13.7.2.7 Crypto Service Use Case: encryption . . . 772
13.7.2.8 Crypto Service Use Case: decryption . . . 773
13.7.2.9 Crypto Service Use Case: signature generation . . . 773
13.7.2.10 Crypto Service Use Case: signature verification . . . 774
13.7.2.11 Crypto Service Use Case: usage of key management . . . 775
13.7.3 Crypto Service Job Use Cases . . . 775
13.7.3.1 Crypto Service Use Case: usage of job API to set key valid . . . 775
13.7.3.2 Crypto Service Use Case: usage of job API to create a random seed . . . 776
13.7.3.3 Crypto Service Use Case: usage of job API to generate a key . . . 776
13.7.3.4 Crypto Service Use Case: usage of job API to derive a key . . . 777
13.7.3.5 Crypto Service Use Case: usage of job API to execute calculation of the public value for key exchange . . . 778
13.7.3.6 Crypto Service Use Case: usage of job API to execute calculation of shared secret for key exchange . . . 778

13.7.3.7 Crypto Service Use Case: usage of job API to execute certificate parsing . . . 779
13.7.3.8 Crypto Service Use Case: usage of job API to execute certificate verification . . . 780
13.7.3.9 Crypto Service Use Case: Wrap plain-text key using AES algorithms . . . 780
13.7.3.10 Crypto Service Use Case: Unwrap cipher-text using AES algorithms . . . 781
13.7.4 Crypto Key Management Use Cases . . . 781
13.7.4.1 KeyM Service Use Case: Atomic Software-Component wants check a certificate on KeyM . . . 782
13.7.4.2 KeyM Service Use Case: Atomic Software-Component wants to retrieve a certificate from KeyM . . . 782
13.7.4.3 KeyM Service Use Case: Atomic Software-Component wants to retrieve elements of a certificate from KeyM . . . 783
13.7.4.4 KeyM Service Use Case: Atomic Software-Component wants to check the existence of a certificate from KeyM . . . 783
13.7.4.5 KeyM Service Use Case: Atomic Software-Component wants to store a (derived) key in KeyM . . . 784
13.7.4.6 KeyM Service Use Case: Atomic Software-Component wants to store a container with (encrypted) keys in KeyM . . . 785
13.7.4.7 KeyM Service Use Case: Atomic Software-Component wants to verify if cryptographic operation was executed using a specific key . . . 785
13.8 Diagnostic Service Dependency . . . 786
13.8.1 Development Approach . . . 787
13.8.2 Function Inhibition Needs . . . 787
13.8.2.1 Function Inhibition Manager Service use Case: read function permission . . . 788
13.8.2.2 Function Inhibition Manager Use Case: react on suppressed or unavailable events . . . 789
13.8.2.3 Function Inhibition Manager Use Case: Atomic Software-Component wants to get notified when FID state changes . . . 790
13.8.2.4 Function Inhibition Manager Use Case: Atomic Software-Component wants to query the list of diagnostic events that are inhibiting a FID . . . 790
13.8.3 Diagnostic Event Needs . . . 791
13.8.3.1 Dem Service Use Case: diagnostic monitor, debouncing by Dem . . . 801
13.8.3.2 Dem Service Use Case: diagnostic monitor, debouncing by SWC . . . 802
13.8.3.3 Dem Service Use Case: Atomic Software-Component provides Information about Operation Cycles . . . 802
13.8.3.4 Dem Service Use Case: Atomic Software-Component enables Reporting of Dtcs In General . . . 803

13.8.3.5 Dem Service Use Case: Atomic Software-Component enables Storage of Subsequent DTCs . . . 804
13.8.3.6 Dem Service Use Case: retrieve Information of the Lamp Status . . . 804
13.8.3.7 Dem Service Use Case: DEM provides Information that the Fault Storage Overflows . . . 805
13.8.3.8 Dem Service Use Case: Atomic Software-Component suppresses the Storage of DTCs . . . 806
13.8.3.9 Dem Service Use Case: Atomic Software-Component informs that the PTO is active . . . 806
13.8.3.10 Dem Service Use Case: Atomic Software-Component needs Information about any DTC Status Change . . . 807
13.8.3.11 Dem Service Use Case: Call Operation if the Data of a given Diagnostic Event changes (I) . . . 808
13.8.3.12 Dem Service Use Case: Call Operation if the Data or Status of any Diagnostic Event Changes (II) . . . 808
13.8.3.13 Dem Service Use Case: Atomic Software-Component provides Data for Diagnostic Purposes . . . 809
13.8.3.14 Dem Service Use Case: Atomic Software-Component gets Information about a specific DTC . . . 810
13.8.3.15 Dem Service Use Case: Atomic Software-Component wants to be triggered on Monitor Status Changes . . . 811
13.8.3.16 Dem Service Use Case: Write Parameter Identifier (PID) by Atomic Software-Component . . . 811
13.8.3.17 Dem Service Use Case: Read Parameter Identifier by Atomic Software-Component . . . 812
13.8.3.18 Dem Service Use Case: Diagnostic Monitor provides Monitor Data, debouncing by Dem . . . 812
13.8.3.19 Dem Service Use Case: Diagnostic Monitor provides Monitor Data, debouncing by Atomic Software-Component . . . 813
13.8.3.20 Dem Service Use Case: Atomic Software-Component checks whether an Event is suppressed . . . 814
13.8.3.21 Dem Service Use Case: Atomic Software-Component wants Information about DTC Clearance . . . 815
13.8.3.22 Dem Service Use Case: Atomic Software-Component wants to reset a Degradation State . . . 816
13.8.3.23 Dem Service Use Case: Atomic Software-Component wants to clear a DTC . . . 817
13.8.3.24 Dem Service Use Case: Atomic Software-Component wants to contribute data to an Extended Data Record of a DTC . . . 818
13.8.4 Diagnostic Communication Needs . . . 818
13.8.4.1 Dcm Service Use Case: read/write current values by Client Server Interface . . . 823
13.8.4.2 Dcm Service Use Case: read/write current values of specific DID by Client Server Interface . . . 824

13.8.4.3 Dcm Service Use Case: read/write current values by Sender Receiver Interface or Nv Data Interface . . . 825
13.8.4.4 Dcm Service Use Case: read/write entire DID by Sender Receiver Interface or Nv Data Interface . . . 826
13.8.4.5 Dcm Service Use Case: start/stop or request Routine Results 827
13.8.4.6 Dcm Service Use Case: IO control by Client Server Interface 828
13.8.4.7 Dcm Service Use Case: IO control by Sender Receiver Interface . . . 828
13.8.4.8 Dcm Service Use Case: Access to Protocol, Session and Security Information . . . 831
13.8.4.9 Dcm Service Use Case: Verify the Access to Security Level . 832
13.8.4.10 Dcm Service Use Case: Service Request Notification 833
13.8.4.11 Dcm Service Use Case: read/write and IOCtrl current Values by Client Server Interface . . . 834
13.8.4.12 Dcm Service Use Case: Atomic Software-Component acts as a “File Server” to a Diagnostic Tester . . . 834
13.8.4.13 Dem Service Use Case: Deliver Authentication Notification . 835
13.8.5 OBD related Needs . . . 836
13.8.5.1 Dem Service Use Case: In-Use-Monitor Performance Ratio calculation . . . 839
13.8.5.2 Dcm Service Use Case: read Parameter Identifier via Diagnostic Services by Client Server Interface . . . 840
13.8.5.3 Dcm Service Use Case: read Parameter Identifier via Diagnostic Services by Sender Receiver Interface . . . 840
13.8.5.4 Dcm Service Use Case: Request Vehicle Information 841
13.8.5.5 Dem Service Use Case: Read DTR Data from SW-C for OBD Service $06 . . . 842
13.8.5.6 Dcm Service Use Case: request Control of On-Board System, Test or Component . . . 842
13.8.5.7 Dem Service Use Case: In-Use-Monitoring Performance Ratio Denominator Interface . . . 843
13.8.5.8 Dem Service Use Case: SW-C sets DTR for OBD Service $06 844
13.8.6 Diagnostics over IP . . . 846
13.8.6.1 DoIP Service Use Case: GID Synchronization can be necessary if the ECU is DoIP Gid Synchronization Master . . . 848
13.8.6.2 DoIP Service Use Case: Vehicle Information is broadcast or can be requested by the Tester . . . 849
13.8.6.3 DoIP Service Use Case: Tester could also request the Power Status with respect to Diagnostics . . . 849
13.8.6.4 DoIP Service Use Case: Routing Activation Mechanism is used which can lead to additional Impact regarding Authentication or Confirmation . . . 850
13.8.6.5 DoIP Service Use Case: a DoIP Entity needs to be informed when an External Tester is attached or activated. . . . 850

13.8.6.6 Service Use Case: Set and reset Warning Indicator Request Bit . . . 851
13.8.6.7 DoIP Service Use Case: Atomic Software-Component provides the further Action Byte to the DoIP Service Component 852
13.8.7 Miscellaneous Diagnostic Service Use-Cases . . . 853
13.8.7.1 Dcm Service Use Case: DiagnosticSessionControl . . . 853
13.8.7.2 Dcm Service Use Case: EcuReset . . . 853
13.8.7.3 Dcm Service Use Case: EcuReset ModeRapidPowerShutDown 854
13.8.7.4 Dcm Service Use Case: CommunicationControl . . . 854
13.8.7.5 Dcm Service Use Case: ControlDTCSetting . . . 855
13.8.7.6 Dcm Service Use Case: SecurityAccess . . . 855
13.8.7.7 Service Use Case: Atomic Software-Component implements a Hardware Shutdown . . . 856
13.8.7.8 Service Use Case: Upload and Download of Data . . . 857
13.9 Diagnostic Log and Trace Dependency . . . 858
13.9.1 Dlt Use Case: Atomic Software-Component transmits Debug Information . . . 858
13.10 Synchronized Time-Base Manager Dependency . . . 859
13.10.1 StbM Use Case: start Timer and potentially get notified about its Expiration . . . 860
13.10.2 StbM Use Case: Atomic Software-Component wants to get Notifications of Status Changes . . . 861
13.10.3 StbM Use Case: Process Time Snapshot obtained from Global Time slave for Diagnostics Purposes . . . 861
13.10.4 StbM Use Case: Atomic Software-Component represents a Global Time Master . . . 862
13.10.5 StbM Use Case: Atomic Software-Component represents a Global Time Slave . . . 863
13.10.6 StbM Use Case: Atomic Software-Component analyzes Predictions about the Time Synchronization Process . . . 864
13.10.7 StbM Use Case: Software-Component wants to initiate the Cloning of a Time Base . . . 864
13.11 Secure On-Board Communication . . . 865
13.11.1 SecOc Use Case: obtain the Verification Status of Secure Communication . . . 865
13.11.2 SecOc Use Case: Atomic Software-Component retires from Secure Communication for a given Period . . . 866
13.11.3 SecOc Use Case: deliver Freshness to SecOC I . . . 867
13.11.4 SecOc Use Case: deliver Freshness to SecOC II . . . 867
13.11.5 SecOc Use Case: deliver Freshness to SecOC III . . . 868
13.11.6 SecOc Use Case: enable the Sending of Pdus even if Computation of the MAC is not possible . . . 869
13.11.7 SecOc Use Case: Receive Notification about an Authentication Attempt . . . 869

13.11.8 SecOc Use Case: deliver Freshness to SecOC IV 870
13.12 J1939 Communication 871
13.12.1 J1939RM Use Case: Atomic Software-Component sends Requests to the Bus 871
13.12.2 J1939RM Use Case: Atomic Software-Component accepts Requests from the Bus 872
13.12.3 J1939Dcm wants to retrieve Calibration Verification Numbers from an Atomic Software-Component 873
13.13 Error Tracer 873
13.13.1 Error Tracer Use Case: report Failure 875
13.14 Intrusion Detection System Manager 875
13.14.1 IdsM Service Use Case: Atomic Software-Component reports Security Event 876
13.14.2 IdsM Service Use Case: Atomic Software-Component sets or retrieves Security Event Reporting Mode 877
13.14.3 IdsM Service Use Case: Atomic Software-Component provides Custom Time Stamp to IdsM 878
13.15 Charge Manager 878
13.15.1 ChrgM Use Case: ChrgM requests Message Data from Atomic Software-Component 879
13.15.2 ChrgM Use Case: ChrgM sends Message Response to Atomic Software-Component 879
13.15.3 ChrgM Use Case: ChrgM sends Error Notification to Atomic Software-Component 880
13.15.4 ChrgM Use Case: ChrgM provides Connection Setup Parameters to the Atomic Software-Component 880
13.16 General Purpose Time Services 881
13.16.1 General Purpose Time Service Use Case 881
14 Rapid Prototyping Scenarios 883
14.1 Definition of Rapid Prototyping Scenario 883
14.2 Usage of RptContainers on M1 886
14.3 Usage of Ability to split into partial Models for RptContainers on M1 . . 888
14.4 Modifications of the Meta-Model for supporting the RPT scenario . . . 888
A Reference Material 891
A.1 Abbreviations 891
A.2 Imposition Times of Constraints 892
B Examples 894
B.1 Examples of Data Types 894
B.1.1 Definition of a String Data Type 894
B.1.1.1 UTF-8 String 894
B.1.1.2 UTF-16 String 899
B.1.2 Definition of an Index Data Type 902

B.1.3 Definition of variable-size Arrays . . . 904
B.1.4 Definition of a Wrapped Union Data Type . . . 906
B.1.5 Definition of a Multi-Dimensional Array Data Type . . . 907
B.1.6 Definition of “Typedefs” . . . 908
B.1.7 Definition of Base Type for Arrays . . . 910
B.1.8 Definition of Optional Elements and the Availability Bitfield . . . 911
B.1.9 Usage of ArVariableInImplementationDataInstanceRef . . . 912
B.2 Examples of Data Properties . . . 913
B.2.1 Definition of a Data Dependency . . . 913
B.2.2 Definition of Unit and Physical Dimension . . . 915
B.2.3 Definition of Record Layout . . . 916
B.2.4 Definition of Record Layout of a Curve . . . 921
B.2.5 Usage of Group Axis in the context of a Parameter Access . . . 922
B.2.6 Definition of Fix Axis . . . 923
B.3 Examples for the specification of constant Values . . . 924
B.3.1 Constant Specification for category CURVE . . . 924
B.3.2 Constant Specification for category MAP . . . 925
B.3.3 Constant Specification for category MAP with two STD_AXIS . . . 926
B.3.4 Constant Specification for category COM_AXIS . . . 927
B.3.5 Value specification for BITFIELD_TEXTTABLE . . . 928
B.3.6 Value specification for MAP depending on Record Layout . . . 928
B.3.6.1 Row-First . . . 929
B.3.6.2 Column-First . . . 931
B.3.7 Rule-based Value Specification . . . 932
B.3.8 Rule-based Value Specification for Elements of primitive Data Type 933
B.3.9 Rule-based Value Specification for Elements of composite Data Type . . . 933
B.3.10 Rule-based Value Specification for an Array of compound primitive Objects . . . 940
B.4 Examples of Compu Methods . . . 943
B.4.1 Compu Method representing an Enumeration . . . 943
B.4.2 Compu Method representing a Linear Conversion . . . 944
B.4.3 Compu Method representing a Linear Conversion with Text-Table . 944
B.4.4 Conversion specified by a rational function . . . 945
B.4.5 Compu Method representing a BITFIELD_TEXTTABLE . . . 946
B.5 Compatibility Examples . . . 948
B.5.1 Compatibility on Assembly Level . . . 949
B.5.1.1 Valid Use . . . 949
B.5.1.2 Invalid Use . . . 950
B.5.2 Compatibility on Delegation Level . . . 950
B.5.2.1 Valid Use . . . 950
B.5.2.2 Invalid Use . . . 953
B.5.3 Software-Components connected to NvBlockComponents . . . 954

B.5.3.1 Invalid Connection according to constr_1417 . . . 954
B.5.3.2 Invalid Connection according to constr_1418 . . . 955
B.6 Rapid Prototyping Examples . . . 955
B.6.1 Definition of Rapid Prototyping Scenario . . . 955
C Supported Special Use Cases 957
C.1 Asymmetric Data Transformation between a Software-Component and a Complex Driver . . . 957
C.1.1 Overview . . . 957
C.1.2 Modeling Aspects . . . 958
D Modeling of InstanceRef 960
D.1 Introduction . . . 960
D.2 Modeling . . . 961
D.2.1 Components and Compositions . . . 961
D.2.2 Definition of implicit Communication Behavior . . . 974
D.2.3 Internal Behavior . . . 981
E Mentioned Class Tables 986
F Glossary 1032
G Change History of AUTOSAR Traceable Items 1035
G.1 Traceable item history of this document according to AUTOSAR Release R4.0.1 . . . 1035
G.1.1 Changed Constraints in R4.0.1 . . . 1035
G.1.2 Added Constraints in R4.0.1 . . . 1035
G.1.3 Deleted Constraints in R4.0.1 . . . 1040
G.2 Traceable item history of this document according to AUTOSAR Release R4.0.2 . . . 1041
G.2.1 Changed Constraints in R4.0.2 . . . 1041
G.2.2 Added Constraints in R4.0.2 . . . 1041
G.2.3 Deleted Constraints in R4.0.2 . . . 1042
G.3 Traceable item history of this document according to AUTOSAR Release R4.0.3 . . . 1042
G.3.1 Changed Constraints in R4.0.3 . . . 1042
G.3.2 Added Constraints in R4.0.3 . . . 1043
G.3.3 Added Specification Items in R4.0.3 . . . 1045
G.3.4 Deleted Constraints in R4.0.3 . . . 1061
G.3.5 Deleted Specification Items in R4.0.3 . . . 1061
G.4 Traceable item history of this document according to AUTOSAR Release R4.1.1 . . . 1062
G.4.1 Changed Constraints in R4.1.1 . . . 1062
G.4.2 Added Constraints in R4.1.1 . . . 1063
G.4.3 Changed Specification Items in R4.1.1 . . . 1066
G.4.4 Added Specification Items in R4.1.1 . . . 1066

G.4.5 Deleted Constraints in R4.1.1 . . . 1070
G.4.6 Deleted Specification Items in R4.1.1 . . . 1070
G.5 Traceable item history of this document according to AUTOSAR Release R4.1.2 . . . 1070
G.5.1 Changed Constraints in R4.1.2 . . . 1070
G.5.2 Added Constraints in R4.1.2 . . . 1071
G.5.3 Changed Specification Items in R4.1.2 . . . 1072
G.5.4 Added Specification Items in R4.1.2 . . . 1072
G.5.5 Deleted Constraints in R4.1.2 . . . 1073
G.5.6 Deleted Specification Items in R4.1.2 . . . 1073
G.6 Traceable item history of this document according to AUTOSAR Release R4.1.3 . . . 1074
G.6.1 Added Traceables in R4.1.3 . . . 1074
G.6.2 Changed Traceables in R4.1.3 . . . 1074
G.6.3 Deleted Traceables in R4.1.3 . . . 1074
G.6.4 Added Constraints in R4.1.3 . . . 1074
G.6.5 Changed Constraints in R4.1.3 . . . 1075
G.6.6 Deleted Constraints in R4.1.3 . . . 1075
G.7 Traceable item history of this document according to AUTOSAR Release R4.2.1 . . . 1075
G.7.1 Added Traceables in R4.2.1 . . . 1075
G.7.2 Changed Traceables in R4.2.1 . . . 1078
G.7.3 Deleted Traceables in R4.2.1 . . . 1079
G.7.4 Added Constraints in R4.2.1 . . . 1079
G.7.5 Changed Constraints in R4.2.1 . . . 1080
G.7.6 Deleted Constraints in R4.2.1 . . . 1081
G.8 Traceable item history of this document according to AUTOSAR Release R4.2.2 . . . 1081
G.8.1 Added Traceables in R4.2.2 . . . 1081
G.8.2 Changed Traceables in R4.2.2 . . . 1082
G.8.3 Deleted Traceables in R4.2.2 . . . 1083
G.8.4 Added Constraints in R4.2.2 . . . 1083
G.8.5 Changed Constraints in R4.2.2 . . . 1084
G.8.6 Deleted Constraints in R4.2.2 . . . 1085
G.9 Traceable item history of this document according to AUTOSAR Release R4.3.0 . . . 1085
G.9.1 Added Traceables in R4.3.0 . . . 1085
G.9.2 Changed Traceables in R4.3.0 . . . 1088
G.9.3 Deleted Traceables in R4.3.0 . . . 1089
G.9.4 Added Constraints in R4.3.0 . . . 1090
G.9.5 Changed Constraints in R4.3.0 . . . 1092
G.9.6 Deleted Constraints in R4.3.0 . . . 1093
G.10 Traceable item history of this document according to AUTOSAR Release R4.3.1 . . . 1093

G.10.1 Added Specification Items in R4.3.1 . . . 1093
G.10.2 Changed Specification Items in R4.3.1 . . . 1094
G.10.3 Deleted Specification Items in R4.3.1 . . . 1094
G.10.4 Added Constraints in R4.3.1 . . . 1095
G.10.5 Changed Constraints in R4.3.1 . . . 1095
G.10.6 Deleted Constraints in R4.3.1 . . . 1096
G.11 Traceable item history of this document according to AUTOSAR Release R4.4.0 . . . 1096
G.11.1 Added Specification Items in R4.4.0 . . . 1096
G.11.2 Changed Specification Items in R4.4.0 . . . 1098
G.11.3 Deleted Specification Items in R4.4.0 . . . 1100
G.11.4 Added Constraints in R4.4.0 . . . 1100
G.11.5 Changed Constraints in R4.4.0 . . . 1101
G.11.6 Deleted Constraints in R4.4.0 . . . 1102
G.12 Traceable item history of this document according to AUTOSAR Release R19-11 . . . 1102
G.12.1 Added Specification Items in R19-11 . . . 1102
G.12.2 Changed Specification Items in R19-11 . . . 1103
G.12.3 Deleted Specification Items in R19-11 . . . 1104
G.12.4 Added Constraints in R19-11 . . . 1104
G.12.5 Changed Constraints in R19-11 . . . 1105
G.12.6 Deleted Constraints in R19-11 . . . 1106
G.13 Traceable item history of this document according to AUTOSAR Release R20-11 . . . 1106
G.13.1 Added Specification Items in R20-11 . . . 1106
G.13.2 Changed Specification Items in R20-11 . . . 1107
G.13.3 Deleted Specification Items in R20-11 . . . 1108
G.13.4 Added Constraints in R20-11 . . . 1108
G.13.5 Changed Constraints in R20-11 . . . 1113
G.13.6 Deleted Constraints in R20-11 . . . 1113
G.14 Traceable item history of this document according to AUTOSAR Release R21-11 . . . 1113
G.14.1 Added Specification Items in R21-11 . . . 1113
G.14.2 Changed Specification Items in R21-11 . . . 1114
G.14.3 Deleted Specification Items in R21-11 . . . 1115
G.14.4 Added Constraints in R21-11 . . . 1115
G.14.5 Changed Constraints in R21-11 . . . 1115
G.14.6 Deleted Constraints in R21-11 . . . 1133
G.15 Traceable item history of this document according to AUTOSAR Release R22-11 . . . 1134
G.15.1 Added Specification Items in R22-11 . . . 1134
G.15.2 Changed Specification Items in R22-11 . . . 1135
G.15.3 Deleted Specification Items in R22-11 . . . 1136
G.15.4 Added Constraints in R22-11 . . . 1137

G.15.5 Changed Constraints in R22-11 1137
G.15.6 Deleted Constraints in R22-11 1139
G.16 Traceable item history of this document according to AUTOSAR Release R23-11 1139
G.16.1 Added Specification Items in R23-11 1139
G.16.2 Changed Specification Items in R23-11 1140
G.16.3 Deleted Specification Items in R23-11 1141
G.16.4 Added Constraints in R23-11 1141
G.16.5 Changed Constraints in R23-11 1142
G.16.6 Deleted Constraints in R23-11 1142
G.16.7 Added Advisories in R23-11 1142
G.16.8 Changed Advisories in R23-11 1142
G.16.9 Deleted Advisories in R23-11 1142
G.17 Traceable item history of this document according to AUTOSAR Release R24-11 1143
G.17.1 Added Specification Items in R24-11 1143
G.17.2 Changed Specification Items in R24-11 1143
G.17.3 Deleted Specification Items in R24-11 1144
G.17.4 Added Constraints in R24-11 1145
G.17.5 Changed Constraints in R24-11 1146
G.17.6 Deleted Constraints in R24-11 1148
G.17.7 Added Advisories in R24-11 1148
G.17.8 Changed Advisories in R24-11 1148
G.17.9 Deleted Advisories in R24-11 1148
G.18 Traceable item history of this document according to AUTOSAR Release R25-11 1148
G.18.1 Added Specification Items in R25-11 1148
G.18.2 Changed Specification Items in R25-11 1149
G.18.3 Deleted Specification Items in R25-11 1150
G.18.4 Added Constraints in R25-11 1151
G.18.5 Changed Constraints in R25-11 1152
G.18.6 Deleted Constraints in R25-11 1152
G.18.7 Added Advisories in R25-11 1154
G.18.8 Changed Advisories in R25-11 1154
G.18.9 Deleted Advisories in R25-11 1154
G.19 Traceable item history of this document according to AUTOSAR Release R26-11 1154
G.19.1 Added Specification Items in R26-11 1154
G.19.2 Changed Specification Items in R26-11 1154
G.19.3 Deleted Specification Items in R26-11 1155
G.19.4 Added Constraints in R26-11 1155
G.19.5 Changed Constraints in R26-11 1156
G.19.6 Deleted Constraints in R26-11 1156
G.19.7 Added Advisories in R26-11 1156

G.19.8 Changed Advisories in R26-11 1157
G.19.9 Deleted Advisories in R26-11 1157
H Upstream Mapping 1158
H.1 Introduction 1158
H.2 BswM 1159
H.3 Com 1164
H.4 Dcm 1179
H.5 Dem 1198
H.6 EcuC 1207
H.7 MemMap 1212
H.8 NvM 1213
H.9 Os 1220
H.10 Rte 1221
H.11 SecOC 1228
H.12 SwCluC 1229
H.13 WdgM 1230
I Non-Splitable Elements in the Scope of this Document 1231
J Variation Points in the Scope of this Document 1236

References

[1] Standardization Template
AUTOSAR_FO_TPS_StandardizationTemplate

[2] Specification of RTE Software
AUTOSAR_CP_SWS_RTE

[3] Virtual Functional Bus
AUTOSAR_CP_TR_VFB

[4] Methodology for Classic Platform
AUTOSAR_CP_TR_Methodology

[5] Layered Software Architecture
AUTOSAR_CP_EXP_LayeredSoftwareArchitecture

[6] Basic Software Module Description Template
AUTOSAR_CP_TPS_BSWModuleDescriptionTemplate

[7] Specification of Timing Extensions for Classic Platform
AUTOSAR_CP_TPS_TimingExtensions

[8] Specification of ECU Resource Template
AUTOSAR_CP_TPS_ECUResourceTemplate

[9] System Template
AUTOSAR_CP_TPS_SystemTemplate

[10] Generic Structure Template
AUTOSAR_FO_TPS_GenericStructureTemplate

[11] Supplementary material of general blueprints for AUTOSAR
AUTOSAR_CP_TR_GeneralBlueprintsSupplement

[12] Specification of Manifest
AUTOSAR_AP_TPS_ManifestSpecification

[13] ISO 10646:2012 – Information technology – Universal Coded Character Set (UCS)
https://www.iso.org

[14] Specification of ECU Configuration
AUTOSAR_CP_TPS_ECUConfiguration

[15] ASAM MCD-2 MC (ASAP2 / A2L)
http://www.asam.net
ASAM_AE_MCD-2_MC_BS_V1-7-1.pdf

[16] Specification of I/O Hardware Abstraction
AUTOSAR_CP_SWS_IOHardwareAbstraction

[17] ISO 17356-4: Road vehicles – Open interface for embedded automotive applica-

tions – Part 4: OSEK/VDX Communication (COM)

[18] Specification of Communication Manager
AUTOSAR_CP_SWS_COMManager

[19] Specification of Basic Software Mode Manager
AUTOSAR_CP_SWS_BSWModeManager

[20] Specification of Communication
AUTOSAR_CP_SWS_COM

[21] Diagnostic Extract Template
AUTOSAR_CP_TPS_DiagnosticExtractTemplate

[22] Log And Trace Template
AUTOSAR_FO_TPS_LogAndTrace

[23] Security Extract Template
AUTOSAR_FO_TPS_SecurityExtractTemplate

[24] Specification of Platform Types for Classic Platform
AUTOSAR_CP_SWS_PlatformTypes

[25] ISO/IEC 9899:1999
https://www.iso.org

[26] AUTOSAR XML Schema Production Rules
AUTOSAR_FO_TPS_XMLSchemaProductionRules

[27] MSR-SW
http://www.msr-wg.de/medoc/download/msrsw/v230/msrsw_v230-eadoc-
-en/msrsw_v2_3_0.sl-eadoc.pdf

[28] ASAM MCD 2 Harmonized Data Objects Version 1.1
harmonized-data-objects-V1.1.pdf

[29] Collection of blueprints for AUTOSAR M1 models
AUTOSAR_FO_MOD_GeneralBlueprints

[30] ISO 26262:2018 Road vehicles -– Functional Safety
https://www.iso.org

[31] ASAM AE Calibration Data Format V2.0.0
http://www.asam.net
ASAM-AE-CDF-V2_0_0-Users-Guide.pdf

[32] Specification of Operating System
AUTOSAR_CP_SWS_OS

[33] Specification of ECU Configuration Parameters (XML)
AUTOSAR_CP_MOD_ECUConfigurationParameters

[34] MISRA C:2025 Guidelines for the use of the C language in critical systems, ISBN-
13: 978-1911700197

[35] Glossary
AUTOSAR_FO_TR_Glossary

[36] Specification of NVRAM Manager
AUTOSAR_CP_SWS_NVRAMManager

[37] ASAM AE Functional Specification Exchange Format V1.0.0
http://www.asam.net
AE-FSX_V1.0.0.pdf

[38] Specification of Watchdog Manager
AUTOSAR_CP_SWS_WatchdogManager

[39] Specification of ECU State Manager
AUTOSAR_CP_SWS_ECUStateManager

[40] Advanced Encryption Standard (AES) Key Wrap Algorithm
https://tools.ietf.org/html/rfc3394

[41] Specification of Function Inhibition Manager
AUTOSAR_CP_SWS_FunctionInhibitionManager

[42] Specification of Diagnostic Event Manager
AUTOSAR_CP_SWS_DiagnosticEventManager

[43] Specification of Diagnostic Communication Manager
AUTOSAR_CP_SWS_DiagnosticCommunicationManager

[44] ISO 13400 – Road vehicles – Diagnostic communication over Internet Protocol (DoIP)
https://www.iso.org

[45] Specification of Diagnostic Log and Trace
AUTOSAR_CP_SWS_DiagnosticLogAndTrace

[46] Specification of Synchronized Time-Base Manager
AUTOSAR_CP_SWS_SynchronizedTimeBaseManager

[47] Specification of Secure Onboard Communication
AUTOSAR_CP_SWS_SecureOnboardCommunication

[48] Specification of a Request Manager for SAE J1939
AUTOSAR_CP_SWS_SAEJ1939RequestManager

[49] Specification of Default Error Tracer
AUTOSAR_CP_SWS_DefaultErrorTracer

[50] Specification of SOME/IP Transformer
AUTOSAR_CP_SWS_SOMEIPTransformer

[51] Software Process Engineering Meta-Model Specification
http://www.omg.org/spec/SPEM/2.0/

1 Introduction

for R26-11

Note: The life cycle of the stereotype ≪atpSplitable≫ will end with the AUTOSAR Release R26-11. Any remaining references to ≪atpSplitable≫ in this document will be removed in release R27-05.

1.1 Overview

This document contains the specification of the AUTOSAR Software-Component Template.

In this context, the term software-component refers to a formally described piece of software existing that needs the [2, SWS RTE] for execution.

Please note that the general ideas behind the semantics of application software-components have been described in the specification of the [3, AUTOSAR Virtual Functional Bus]. The latter, however, represents conceptual work that strongly influences but does not totally govern the formal definition of software-components.

Note further that this document does not provide any "best practice" recommendations of software-component modeling nor does it require or enforce a certain methodology. Note however, that the methodology aspect is covered by the specification of the [4, TR Methodology].

Although it is beyond any doubt reasonable to use a suitable AUTOSAR Authoring Tool for dealing with AUTOSAR software-components, this specification does not make any assumptions nor does it give recommendations regarding the tooling.

Please note that parts of this document are also relevant for the *AUTOSAR adaptive platform*. This relation is formally specified by the definition of constraints. In particular, constraints announce a relevance for the *AUTOSAR adaptive platform* by defining a respective imposition time. As a random example, please refer to [constr_1035].

1.2 Scope

As already mentioned in Chapter 1.1, the Scope of this document is the description of AUTOSAR software-components. This work covers the following three aspects:

- A general description of SwComponentTypes using PortPrototypes and PortInterfaces, i.e. this document defines the SwComponentType as an entity which can be described through PortPrototypes which provide or require PortInterfaces.
- A description of CompositionSwComponentTypes which are sub-systems consisting out of connected instances of software-components, i.e. software-

components may be defined in the form of hierarchical subsystems which in turn consist of software-components again. The description of such hierarchical structures is in scope of this document.

- A description of `AtomicSwComponentType` which is implemented as a piece of software that can be mapped to an AUTOSAR ECU.
  An `AtomicSwComponentType` therefore shows up in the ECU Software Architecture depicted in Figure 1.1. In this figure, the green (vertically striped) and blue (diagonally striped) borders show the aspects that are described by the `Software-Component Template`.

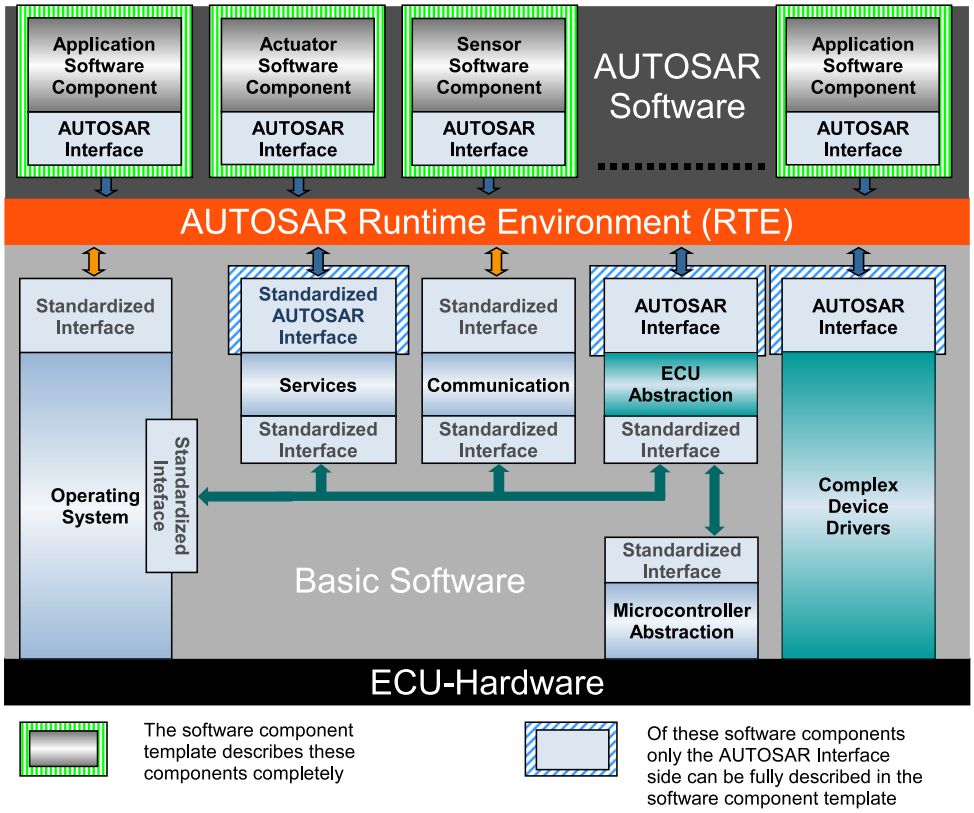

Figure 1.1: Scope of this document in the [5, TR Layered Software Architecture]

Aspects of AUTOSAR Basic Software not relevant for the RTE are out of scope; these are covered by the [6, TPS Basic Software Module Description Template].

Also, the document does not cover aspects of timing analysis with respect to the execution of AUTOSAR software-components. This issue is explained in the [7, TPS Timing Extensions].

1.3 Organization of the Meta-Model

Figure 1.2 sketches the overall structure of the meta-model which formally defines the vocabulary required to describe AUTOSAR software-components. As the diagram points out, other template specifications (e.g. [8, TPS Ecu Resource Template] and [9,

TPS System Template]) also use the same modeling approach in order to define an overall consistent model of AUTOSAR software description.

The dashed arrows in the diagram describe dependencies in terms of import-relationships between the packages within the meta-model. For example, the package `SWComponentTemplate` imports meta-classes defined in the packages [10, TPS Generic Structure Template] and [8, TPS Ecu Resource Template].

Please note that this specification document will (with some well-defined exceptions) mostly discuss meta-model elements defined in the package `SWComponentTemplate`.

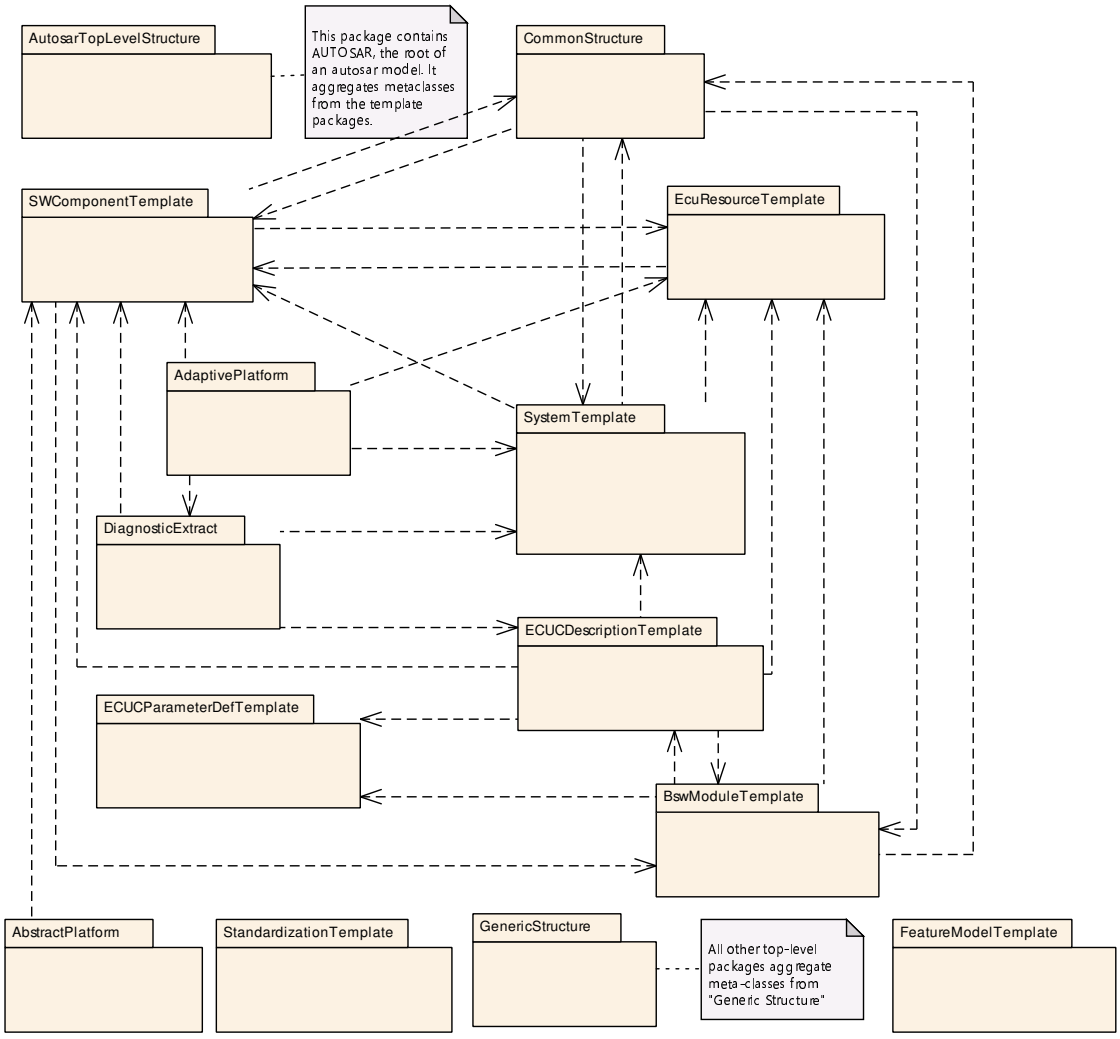

Figure 1.2: Structure of the meta-model

For clarification, please note that the package `GenericStructure` contains some fundamental infrastructure meta-classes and common patterns that are described in [10, TPS Generic Structure Template]. As these are used by all other template specification the dependency associations are not depicted in the diagram for the sake of clarity.

1.4 Structure of the Template

AUTOSAR software-components are described on three distinctive levels, as shown in Figure 1.3.

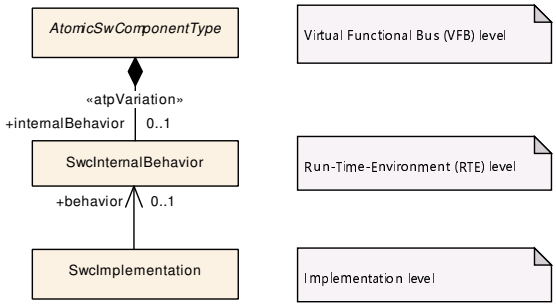

Figure 1.3: The description of a software-component is done on three levels

1.4.1 Description of Software Components on VFB Level

The highest (most abstract) description level is the [3, EXP Virtual Functional Bus]. In this document SwComponentTypes are described with the means of DataTypes, PortInterfaces, PortPrototypes, and connections between them.

At this level, the fundamental communication properties of components and their communication relationships among each other are expressed.

In the diagram depicted in Figure 1.3, this aspect is expressed by means of the description of AtomicSwComponentType[1].

1.4.2 Description of Software Components on RTE Level

The middle level allows for behavior description of a given AtomicSwComponentType. The SwcInternalBehavior is modeled according to AUTOSAR RTE concepts, e.g. RTEEvents and, in terms of executable units, the RunnableEntitys.

For instance, for a ClientServerOperation defined in the scope of a particular ClientServerInterface on the VFB, the behavior specifies which RunnableEntity is activated as a consequence of the invocation of the specific ClientServerOperation.

As sketched by Figure 1.3, there may be zero or one SwcInternalBehaviors aggregated by a given AtomicSwComponentType.

[1] To avoid clutter and require additional up-front information about the meta-model, CompositionSwComponentTypes have not been added to the diagram.

1.4.3 Descriptions of Software Components on Implementation Level

The lowest level of description specifies the implementation (i.e. in terms of the AUTOSAR meta-model: the SwcImplementation) of a given SwcInternalBehavior description. More precisely, the RunnableEntitys of such a behavior are mapped to code (source code or object code).

There may be different SwcImplementations that reference a specific SwcInternalBehavior description, e.g. in different programming languages, or with differently optimized code.

Please note that Implementation has been described in previous versions of this document. In response to the evolution of the AUTOSAR standard, the description of the Implementation aspect has been moved to the "CommonStructure" (see Figure 1.2) because it is also used for creating the [6, TPS Basic Software Module Description Template].

The SwcImplementation still remains in the scope of this document as it exclusively covers aspects of software-components rather than basic software modules.

1.5 Document Conventions

Technical terms are typeset in mono spaced font, e.g. PortPrototype. As a general rule, plural forms of technical terms are created by adding "s" to the singular form, e.g. PortPrototypes. By this means the document resembles terminology used in the AUTOSAR XML Schema.

This document contains constraints in textual form that are distinguished from the rest of the text by a unique numerical constraint ID, a headline, and the actual constraint text starting after the ⌈ character and terminated by the ⌋ character.

The purpose of these constraints is to literally constrain the interpretation of the AUTOSAR meta-model such that it is possible to detect violations of the standardized behavior implemented in an instance of the meta-model (i.e. on M1 level).

Makers of AUTOSAR tools are encouraged to add the numerical ID of a constraint that corresponds to an M1 modeling issue as part of the diagnostic message issued by the tool.

The attributes of the classes introduced in this document are listed in form of class tables. They have the form shown in the example of the top-level element AUTOSAR:

Please note that constraints are not supposed to be enforceable at any given time in an AUTOSAR workflow. During the development of a model, constraints may legitimately be violated because an incomplete model will obviously show inconsistencies.

However, at specific points in the workflow, constraints shall be enforced as a safeguard against misconfiguration.

The points in the workflow where constraints shall be enforced, sometimes also known as the “imposition time” of the constraint, are different for each model category, e.g. on the classic platform, the constraints defined for software-components are typically enforced prior to the generation of the RTE while the constraints against the definition of an Ecu extract shall be applied when the Ecu configuration for the Com stack is created.

For each document, possible imposition times of constraints are defined and the imposition times are typically mentioned in the constraint themselves to give a proper orientation for implementers of AUTOSAR authoring tools.

Let `AUTOSAR` be an example of a typical class table. The first rows in the table have the following meaning:

Class: The name of the class as defined in the UML model.

Package: The UML package the class is defined in. This is only listed to help locating the class in the overall meta model.

Note: The comment the modeler gave for the class (class note). Stereotypes and UML tags of the class are also denoted here.

Base Classes: If applicable, the list of direct base classes.

The headers in the table have the following meaning:

Attribute: The name of an attribute of the class. Note that AUTOSAR does not distinguish between class attributes and owned association ends.

Type: The type of an attribute of the class.

Mul.: The assigned multiplicity of the attribute, i.e. how many instances of the given data type are associated with the attribute.

Kind: Specifies, whether the attribute is aggregated in the class (`aggr` aggregation), an UML attribute in the class (`attr` primitive attribute), or just referenced by it (`ref` reference). Instance references are also indicated (`iref` instance reference) in this field.

Note: The comment the modeler gave for the class attribute (role note). Stereotypes and UML tags of the class are also denoted here.

Please note that the chapters that start with a letter instead of a numerical value represent the appendix of the document. The purpose of the appendix is to support the explanation of certain aspects of the document and does not represent binding conventions of the standard.

The verbal forms for the expression of obligation specified in [TPS_STDT_00053] shall be used to indicate requirements, see [1, Standardization Template].

Please note: By intent, TPS documents (and their traceable items) do not trace up to an RS (requirement item).

1.6 About Tables

There is a number of tables in this document that describe the applicability or multiplicity of model elements. These tables contain empty cells, which represent a “not applicable” meaning. Model elements that correspond to an empty cell shall not exist in the context described by the respective table cell.

If the value of a table cell shall indicate that that either the existence or multiplicity of the represented model element shall be ignored anyway, the table cell gets the content “d/c” for “don’t care”. This means that if the respective model element exists, it shall be ignored in the downstream processing of the model.

2 Conceptual Aspects

2.1 Introduction

To keep the description of relevant meta-model elements compact, the discussion and explanation of conceptual aspects is concentrated in this chapter.

Reading this chapter is not a prerequisite for understanding the subsequent chapters. It provides a central place for the detailed description of conceptual aspects used in various other chapters of this document.

The actual explanation of the concept of a software component starts in Chapter 3.

2.2 The Encapsulation Principle

The guiding principle behind the definition of an AUTOSAR software-component is that it represents a self-contained entity.

This means that every software-component shall be Independent from another software-component in terms of the configuration using the AUTOSAR meta-model and the contract for the code that implements the behavior of the software-component.

This does not mean that software-component cannot share configuration elements with other software-components (it typically has to, for example the usage of a `PortInterface`, see Chapter 4.2), it means that one software-component shall not be defined by the content of another software-component.

There are references, which are only meant to target elements within the same software-component. For example `RTEEvent.startOnEvent` (see Chapter 7.3) is meant to refer to a `RunnableEntity` (see Chapter 7.2) within the same software-component.

Creating such a reference that targets an element in another software-component would violate the encapsulation principle.

Please note that there are some constraints (for example, [constr_1087] and [constr_1088]) to avoid the creation of prominent cases of a violation of the encapsulation principle.

As an arbitrary example, consider the references to `PortPrototype` (see Chapter 3.2.2) in the context of the modeling of a `SwcServiceDependency` (see Chapter 7.11.2.1), specifically the `RoleBasedPortAssignment` (see Chapter 7.11.2.1).

This reference is designed to never leave the scope of the enclosing software-component, as sketched in Figure 2.1.

Directing such a reference into the scope of another software-component would break the encapsulation principle, as sketched in Figure 2.2.

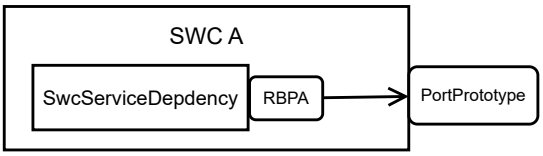

Figure 2.1: Valid usage of reference from the context of `SwcServiceDependency` to `PortPrototype`

In this example, the software-components “B” is no longer self contained because it would only be complete if software-component “A” exists in the same model. An independent usage of “B” is therefore impossible.

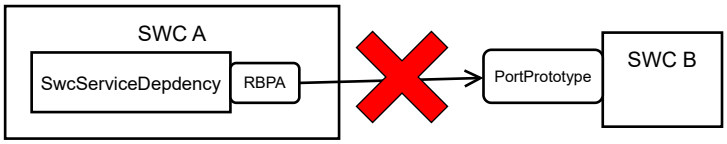

Figure 2.2: Invalid usage of reference from the context of `SwcServiceDependency` to `PortPrototype` of another software-component

Summary: the general rule is that a reference that is owned by a model element that is part of a software-component shall not refer to a model element that is owned by another software-component.

2.3 Measurement and Calibration

2.3.1 Basic Approach of Measurement and Calibration

When performing the calibration process with an MCD tool (Measurement, Calibration, and Diagnostic), the calibration engineer needs specific insight into the data within the CPU at runtime.

This insight is provided by access to ECU internal variables (also called measurements) as well as to calibration parameters (sometimes also called characteristic values). For more details, refer to [TPS_SWCT_01418].

The description of measurement variables and calibration parameters is basically the same. In AUTOSAR, both ultimately appear as `DataPrototype`s.

2.3.2 Calibration Parameters Overview

A `Calibration Parameter` is a parameter that characterizes the dynamics of a control algorithm. From a software implementation point of view, it is a variable with read-only access during the normal operation of an ECU.

`Calibration Parameter`s (some examples are sketched in Figure 2.3) are specialized `DataPrototype` entities in terms of their associated type but are used similarly.

[TPS_SWCT_01418] Ways to define a calibration parameter ⌈This means that `CalibrationParameter`s can be defined

- individually for a `SwComponentPrototype` in the `SwcInternalBehavior` of a `SwComponentType` via an aggregation of an `ParameterDataPrototype` in the role of `perInstanceParameter` (similar to the supported variants of *per-instance memory*).
- sharing between all `SwComponentPrototype`s of the same `SwComponentType` in its `SwcInternalBehavior` via an aggregation of an `ParameterDataPrototype` in the role of `sharedParameter` or `constantMemory`.
- for several `SwComponentPrototype`s (using the port-/interface-concept with `ParameterInterface`s).

⌋

Note:

- The definition of `perInstanceParameter` is further described in Chapter 2.3.3.3.
- Chapter 2.3.3.2 provides more information about the definition of `sharedParameter` or `constantMemory`.
- For more information on the definition of `ParameterInterface`, refer to Chapter 2.3.3.1.

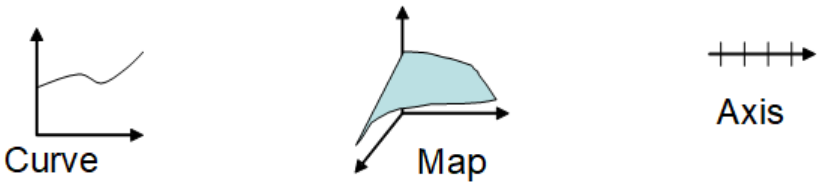

Figure 2.3: Some categories of calibration parameters

Note that the structure of various calibration objects is visualized in the [11, TR General Blueprints Supplement].

2.3.3 Using Calibration Parameters

As mentioned above, a `ParameterDataPrototype` can be used in the context of `SwcInternalBehavior` as well as in the context of `PortPrototype`s.

2.3.3.1 Sharing Calibration Parameters within Compositions

To make calibration parameters visible to other SwComponentTypes, a dedicated ParameterSwComponentType (see Figure 3.4) that inherits from SwComponentType has to be used as a SwComponentPrototype within a CompositionSwComponentType.

[TPS_SWCT_01420] SwComponentType requiring access to shared calibration parameters needs RPortPrototype typed by a ParameterInterface ⌈Every SwComponentType requiring access to shared calibration parameters will have an RPortPrototype typed by a ParameterInterface.

The definition of this shared calibration access in the context of a CompositionSwComponentType will be defined by creating a SwConnector between the relevant SwComponentPrototypes.⌋

Class	**ParameterSwComponentType**			
Note	The ParameterSwComponentType defines parameters and characteristic values accessible via provided Ports. The provided values are the same for all connected SwComponentPrototypes **Tags:** atp.recommendedPackage=SwComponentTypes			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *SwComponentType*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
constant Mapping	ConstantSpecification MappingSet	*	ref	Reference to the ConstantSpecificationMapping to be applied for the particular ParameterSwComponentType **Tags:** atp.Splitkey=constantMapping
dataType Mapping	DataTypeMappingSet	*	ref	Reference to the DataTypeMapping to be applied for the particular ParameterSwComponentType **Tags:** atp.Splitkey=dataTypeMapping
instantiation DataDefProps	InstantiationDataDef Props	*	aggr	The purpose of this is that within the context of a given SwComponentType some data def properties of individual instantiations can be modified. The aggregation of InstantiationDataDefProps is subject to variability with the purpose to support the conditional existence of PortPrototypes **Stereotypes:** atpVariation **Tags:** atp.Splitkey=instantiationDataDefProps, instantiationData DefProps.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

Table 2.1: ParameterSwComponentType

[TPS_SWCT_01421] ParameterInterface is not restricted to parameters which can actually be calibrated ⌈Note that a ParameterInterface is not restricted to parameters which can actually be calibrated.

It can be used whenever there shall be no write access to the data during normal operation of the software, i.e. only constant data are visible over the interface.⌋

Class	**ParameterInterface**			
Note	A parameter interface declares a number of parameter and characteristic values to be exchanged between parameter components and software components. **Tags:** atp.recommendedPackage=PortInterfaces			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *DataInterface*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *PortInterface*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
parameter	ParameterData Prototype	*	aggr	The ParameterDataPrototype of this ParameterInterface. **Tags:** atp.Splitkey=parameter, parameter.shortName

Table 2.2: ParameterInterface

The compatibility rules for ParameterInterfaces are described in Chapter 6.4; the compatibility rules for ParameterDataPrototypes are described in Chapter 6.4.4.

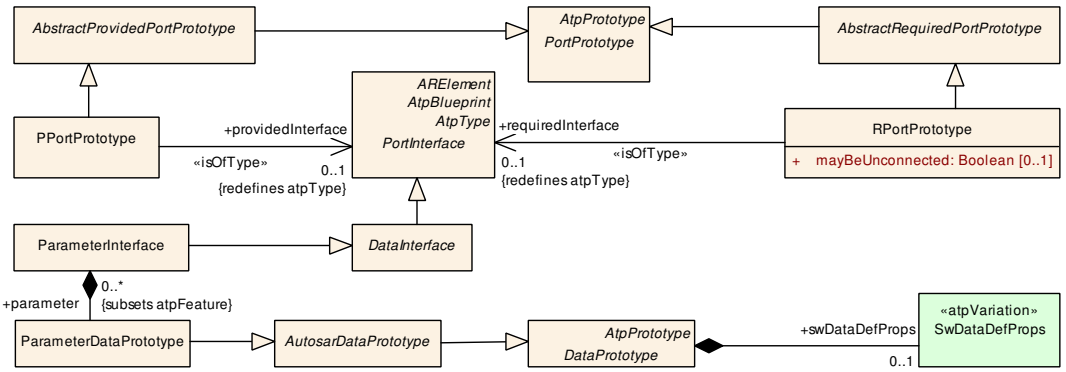

Figure 2.4: ParameterInterface

[TPS_SWCT_01422] Delegation of PortPrototypes typed by a ParameterInterface ⌈Access to shared calibration parameters can be provided and required even over CompositionSwComponentTypes using DelegationSwConnectors and AssemblySwConnectors.

This means that each access to calibration parameters between SwComponentPrototypes is explicitly visible.

If a SwConnector spans two different ECUs after the mapping of SwComponentPrototypes, the system generation process has to ensure the proper allocation of the ParameterDataPrototype. The calibration system has to cope with setting the parameter synchronously on the affected ECUs.⌋

2.3.3.2 Sharing Calibration Parameters between SwComponentPrototypes of the same SwComponentType

To share calibration parameters between several SwComponentPrototypes of the same SwComponentType, a ParameterDataPrototype is attached to an SwcInternalBehavior in sharedParameter role (see [TPS_SWCT_01418]).

When the SwcInternalBehavior is aggregated by an AtomicSwComponentType, the actual values of the ParameterDataPrototype are identical for all SwComponentPrototypes.

[TPS_SWCT_01423] **ParameterDataPrototype aggregated in the role constantMemory** ⌈Additionally, it is possible to describe the implementation of shared characteristic values via a ParameterDataPrototype which is attached to an SwcInternalBehavior in the role constantMemory.

Unlike the ParameterDataPrototype in sharedParameter role, this kind of memory is not instantiated by the RTE.

This approach enables more efficient implementations (especially for software components provided as object code) by avoiding the additional indirection caused by the RTE's component data structure.⌋

This kind of memory reduces the dependencies of the software component's implementation on generated RTE code, which is desirable for safety-related functionalities.

Nevertheless, the information about these characteristic values has to be taken into account for the A2L file generation.

A typical example of this kind of code sharing between instances is the handling of two lambda sensors in multiple cylinder-bank engines, where (at least) two SwComponentPrototypes for each lambda sensor will use the very same Calibration Parameters.

2.3.3.3 Providing Instance-Individual Characteristic Data

[TPS_SWCT_01424] **ParameterDataPrototype aggregated in the role perInstanceParameter** ⌈For the provision of instance-specific calibration parameters, a ParameterDataPrototype is owned by a SwcInternalBehavior in the role perInstanceParameter.

If the SwcInternalBehavior is attached to an AtomicSwComponentType, the actual calibration values are specific for each SwComponentPrototype.⌋

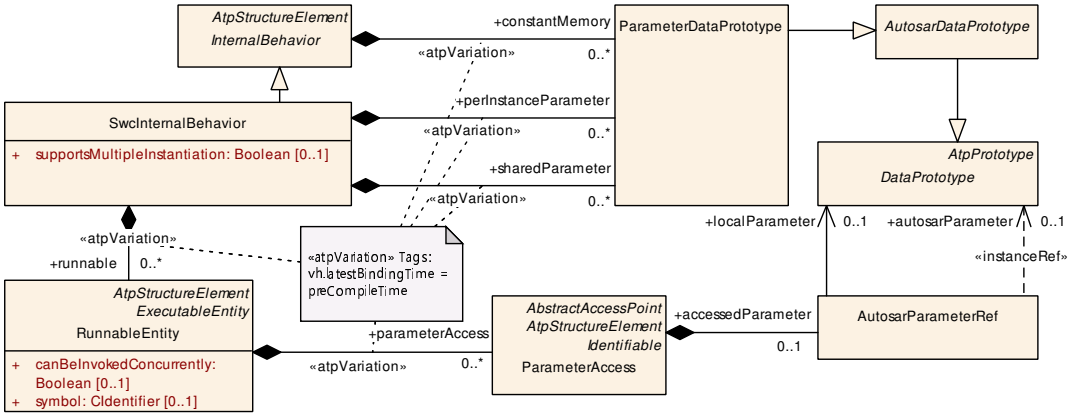

Figure 2.5: ParameterDataPrototypes in internal behavior

2.4 Runtime and Data Consistency Aspects

2.4.1 Background: the Issues

This section provides some background information and lists possible strategies concerning the implementation of the RunnableEntitys and the RTE with respect to efficient communication between the RunnableEntitys.

The communication among RunnableEntitys can be implemented very efficiently by means of "sharing memory"[1].

This is technically feasible because it is guaranteed that the RunnableEntitys within an AtomicSwComponentType are always gathered on a specific processing unit (in other words: distribution is not an option).

Note that the purpose of communication among the RunnableEntitys is to establish a data flow scheme. The latter is a very popular pattern in the application of control theory to automotive embedded systems.

If "global variables" are used for establishing internal communication among RunnableEntitys, they acquire the semantics of so-called state messages.

Nevertheless, directly sharing memory between RunnableEntitys requires solving a serious problem: the guarantee of data consistency among communicating RunnableEntitys.

The RunnableEntitys will indeed be mapped to tasks so that one RunnableEntity of an AtomicSwComponentType may be preempted by a different RunnableEntity of the same AtomicSwComponentType.

Note that a purist approach to data consistency applies not only to single accesses of concurrently accessed variables.

Rather, the value of a concurrently accessed variable (with state-message semantics) shall not be changed unintentionally during the run-time of a RunnableEntity.

The following paragraphs describe some common strategies that can be used to ensure the required data consistency. This document does not attempt to describe the benefits or drawbacks of these approaches.

[1] Note that the term "sharing memory" can be interpreted on different levels. In the C language, for example, it is possible to use variables with external linkage (a.k.a. "global variables", although this term is not officially defined by the C language) for the purpose of inter-Runnable communication.

2.4.1.1 Mutual Exclusion with Semaphores

Multi-threaded operating systems provide mutexes (mutual exclusion semaphores) that protect access to an exclusive resource that is used from within several tasks.

The RTE could use these OS-provided mutexes to make sure that the `RunnableEntity`s sharing a memory space would never run concurrently. The RTE would make sure the task running the `RunnableEntity` has taken an appropriate mutex before accessing the memory shared between the `RunnableEntity`s.

2.4.1.2 Interrupt Disabling

Another alternative would be the disabling of interrupts during the run-time of `RunnableEntity`s or at least for a period in time identical to the interval from the first to the last use of a concurrently accessed variable in a `RunnableEntity`. This approach could lead to seriously non-deterministic execution timing.

2.4.1.3 Priority Ceiling

Priority ceiling allows for a non-blocking protection of shared resources. Provided that the priority scheme is static, the AUTOSAR OS is capable of temporarily raising the priority of a task that attempts to access a shared resource to the highest priority of all tasks that would ever attempt to access the resource.

By this means, it is technically impossible for a task in temporary possession of a resource to be preempted by a task that attempts to access the same resource.

2.4.1.4 Implicit Communication by means of Variable Copies

Another alternative is to use copies of concurrently accessed variables with state message semantics. Note that this approach directly corresponds to the semantics of "implicit" sender-receiver communication (see Chapter 7.5.1.2).

This means in particular that for a concurrently used variable a copy is created on which a `RunnableEntity` can work without any danger of data inconsistency.

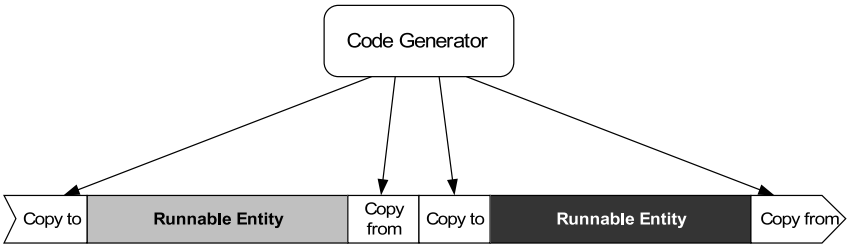

Figure 2.6: Generation of copy routines around `RunnableEntity`s

This concept requires additional code to write the value of the concurrently accessed variable to the copy before the RunnableEntity that accesses the variable is executed. The value of the copy shall be written back to the concurrently accessed variable after the RunnableEntity has been terminated.

This concept is sketched in Figure 2.6. Since manually maintaining the copy routines would be too expensive and error-prone, it is a good idea to leave the creation of the additional code to a suitable code generator.

The additional copy-routines, as sketched in Figure 2.6, already protect the particular RunnableEntitys from unintended changes of concurrently accessed variables.

It would, however, be possible to further optimize the process by reducing the additional code at the beginning and end of each task (see Figure 2.7).

2.4.2 Data Consistency at Runtime

In addition, copy routines will only be inserted where appropriate, e.g. a copy routine for writing the value of a copy back to the concurrently accessed variable will only be inserted if the RunnableEntity has write-access to the concurrently used variable.

Note that the copy routines shall temporarily ensure that the copy process is not interrupted, so that the values can be copied consistently from and to the concurrently accessed variable.

These periods, however, are expected to be very short compared with the overall run-time consumption of the RunnableEntity and thus should not have a significant impact on the run-time behavior.

Further optimization criteria can be applied, for example: it is perfectly safe (as sketched in Figure 2.7) to avoid creating copies for RunnableEntitys that are scheduled in the task with the highest priority of all tasks that access a certain concurrently accessed variable (via contained RunnableEntitys).

In order to keep the application code free of any dependencies on the code generation, access to concurrently accessed variables will be guarded by macros that are later resolved by the code generator.

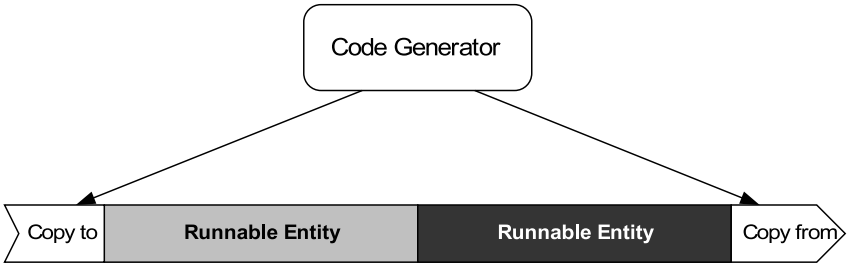

Figure 2.7: Optimized insertion of copy routines

The presence of the guard macros directly supports reuse on the level of source code. Reuse on the level of object code is only possible if the scheduling scenario (in terms of the assignment of RunnableEntitys to priority levels) does not change.

This concept can only be implemented properly with a code generator if the variables in question can be identified. In other words, the description of an AtomicSwComponentType has to expose all concurrently accessed variables to the outside world.

2.4.3 Modeling Aspects of Data Consistency

The intrinsic meaning of the terms “explicit communication” and “implicit communication” is explained in Chapter 7.5.1.1.

It would be fair to say that the distinction between implicit and explicit communication establishes a usage pattern in the application domain, i.e. in the world of the developer of AUTOSAR software components and their implementation.

There is another facet to this subject, however, namely the question of how this pattern is implemented in the meta-model. With respect to the application of the pattern for port-based communication, the details can be found in Chapter 7.5.1.2, more specifically in Chapter 7.5.1.3.

The internal communication based on so-called “inter-runnable variables” is described in Chapter 7.4.2.

Reading the respective text sections shows that the two applications of the pattern are modeled differently. The port-based communication uses the VariableAccess to formalize different roles of accessing communication elements.

Some roles used for this purpose imply explicit communication (e.g. dataSendPoint) and some represent implicit communication (e.g. dataWriteAccess).

The important point about using the VariableAccess, however, is that the modeling of communication roles is abstracted from the actual communication elements and represents a uniform (meaning: it can refer to the target directly or by a so-called InstanceRef) modeling approach that is applied for all use cases[2].

Admittedly, this is handled differently for the internal communication. Here, the additional layer of abstraction is not used (although it would have been technically feasible to do so) in favor of a clear separation of “inter-runnable variables with implicit behavior” and “inter-runnable variables with explicit behavior” in the RTE.

The implementation of different communication roles (i.e. implicit vs. explicit) is realized by directly aggregating VariableDataPrototype in the roles explicitInterRunnableVariable and implicitInterRunnableVariable.

[2]On a related note, the same pattern is also applied to non-communication-related data access, implemented by ParameterAccess

On the other hand, access to internal communication **never** requires the use of an InstanceRef and therefore the abstraction might be considered unnecessary overhead that clutters the M1 model.

2.5 Variant Handling in the Software Component Template

The Software Component Template supports the creation of *Variant*s in a subset of its model elements. The full list of model elements that support variation can be found in Appendix J.

The use of variation points in the scope of this document does not only affect the model; it also has an impact on the behavior of the RTE. An example of this effect is given in [TPS_SWCT_01440].

[TPS_SWCT_01040] SwConnector exists depending on a *PostBuild* condition ⌈A SwConnector that exists depending on a *PostBuild* condition has an impact on the behavior of API function calls that apply to a PortPrototype to which the SwConnector is attached.

If the SwConnector does not exist, the behavior of the RTE API functions needs to take this caveat into account.

This means that the RTE implementation of this PortPrototype resembles the behavior of an unconnected PortPrototype.⌋

More details can be found in the [2, SWS RTE].

[TPS_SWCT_01041] API functions of non-existing SwConnectors are still part of the software component's implementation ⌈If SwConnectors do not exist, the corresponding API functions are still part of the software component's implementation. It is not possible to remove the API functions in a *PostBuild* step.

Therefore, the latest reasonable Binding Time for the conditional existence of a PortPrototype is preCompileTime.⌋

More details about the AUTOSAR Variant Handling Concept can be found in the [10, TPS Generic Structure Template].

2.6 Communication Specification of Composition Component Types

[TPS_SWCT_01088] ComSpecs defined by CompositionSwComponentTypes ⌈It shall be possible to attach ComSpecs to PortPrototypes owned by CompositionSwComponentTypes.⌋

2.6.1 Rationale

ComSpecs (explained in detail in Chapter 4.6) attached to a PortPrototype owned by an AtomicSwComponentType have a direct impact on the generation of the RTE.

The RTE Generator, on the other hand, does not consider the existence of CompositionSwComponentTypes.

Nevertheless, there are cases in which the definition of a ComSpec attached to a PortPrototype owned by a CompositionSwComponentType makes sense.

For example, an OEM may submit the definition of a CompositionSwComponentType to a supplier for adding details and implementing the behavior. In this case, the OEM may point out that, from its point of view, sender initValues and receiver initValues apply to the elements of PortInterfaces used to type the delegation PortPrototypes.

The idea is that the supplier takes over the initValues attached to the delegation PortPrototypes and *copies* them to the PortPrototypes owned by SwComponentPrototypes of the CompositionSwComponentType.

[TPS_SWCT_01568] Consideration of RPortComSpec or PPortComSpec depending on the ownership ⌈The RTE Generator shall take the attributes of the RPortComSpec or PPortComSpec of the PortPrototypes owned by AtomicSwComponentTypes or ParameterSwComponentTypes and ignore the attributes of the RPortComSpec or PPortComSpec attached to PortPrototypes owned by CompositionSwComponentType.⌋

Therefore, the initValues of the delegation PortPrototypes are taken as *mere templates* for the detailing of PortPrototypes connected to them.

It is not required that the initValues of the delegated PortPrototype and of the PortPrototype connected by means of a DelegationSwConnector match.

Although this would make sense in many cases, it is still left to the supplier to decide the specific initValues applicable inside the CompositionSwComponentType.

On the other hand, requiring that the initValues defined on the surface of a CompositionSwComponentType and those inside it are always consistent might effectively prevent reuse of existing AtomicSwComponentTypes.

Note that the ability to define a ComSpec in the context of a CompositionSwComponentType implies that it shall be possible to define mappings of ApplicationDataTypes used in a PortInterface to their corresponding ImplementationDataTypes.

For this purpose, the CompositionSwComponentType owns a DataTypeMappingSet in the role dataTypeMapping and a ConstantSpecificationMappingSet in the role constantValueMapping.



Figure 2.8: Specification of data type mapping for `CompositionSwComponentType`

2.7 PRPortPrototype

In some cases `SwComponentType`s need to read and write the same piece of data. One of the most prominent examples for this use case is the `NvBlockSwComponentType` that reads and writes blocks of NvRAM.

Without the ability to combine read and write semantics in a single `PortPrototype`, workarounds have to be implemented that come with a certain footprint on memory and processing time.

2.7.1 Use Case 1

Without the ability to define combined read and write semantics, the definition of a combination of an `RPortPrototype` and a `PPortPrototype` is required for reading and writing the applicable data, as sketched in Figure 2.9.

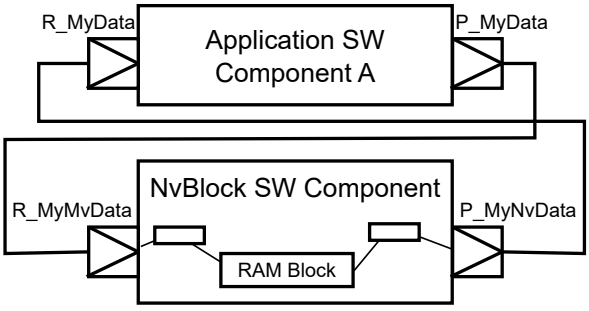

Figure 2.9: Use Case 1 for the existence of `PRPortPrototype`

Technically, this read and write access is related to the same data item in an `NVRAM Block`. This requires a consistent connection of the `PortPrototype`s between an `NvBlockSwComponentType` and `ApplicationSwComponentType` as well as a consistent mapping of the corresponding `RPortPrototype` and a `PPortPrototype` of the `NvBlockSwComponentType` and the related element of the `ramBlock`.

2.7.2 Use Case 2

It may happen that a `SwComponentType` needs to consume the same data that it produces, as exemplified in Figure 2.10.

If the only way to achieve this was the connection of a PPortPrototype to an RPortPrototype of the same SwComponentType, then the creator of the SwComponentType cannot enforce this connection, as it is created on a higher level of abstraction in the context of a CompositionSwComponentType.

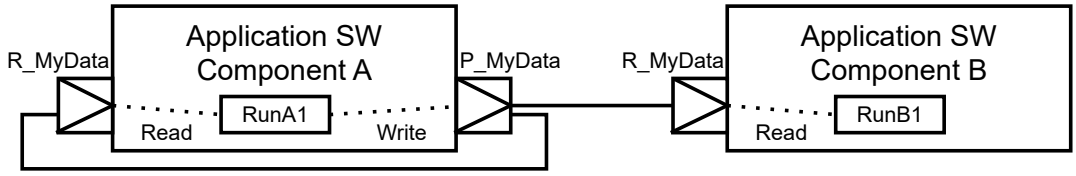

Figure 2.10: Use Case 2 for the existence of PRPortPrototype

In other words, it is impossible to fully specify the semantics of the otherwise self-contained SwComponentType.

This means that in the best case only one buffer for the data is needed. But depending on the mapping of RunnableEntitys to OS tasks additional buffers may need to be allocated by the RTE to fully implement the implicit communication pattern.

As an alternative, the ApplicationSwComponentType could use inter-runnable variables but, unfortunately, this inhibits any optimization in the RTE and will consume additional RAM. In contrast to the previous approach, at least two buffers are needed.

2.7.3 Use Case 3

In this scenario, several ApplicationSwComponentTypes are iterating over the same large set of data, as sketched in Figure 2.11.

This means that each ApplicationSwComponentType implements one out of many steps of a complex data processing algorithm applied to the same piece of data.

For example, this scenario may apply to video signal processing in camera applications. Typically, such applications will **not** be distributed over several ECUs.

In this case, allocating several buffers in the RTE is required to implement the individual connections between the ApplicationSwComponentTypes.

In most cases, the processing has to be executed at a certain point in time in a dedicated order.

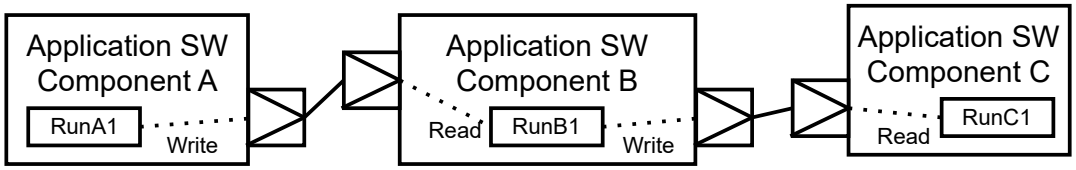

Figure 2.11: Use Case 3 for the existence of PRPortPrototype

2.7.4 Solution

The solution to the above-mentioned use cases is the ability to define a PortPrototype that can read and write the same piece of data. This solves both the described problem of resource consumption and the problem of having to define multiple PortPrototypes as outlets for the same piece of data item.

The technical details of the definition of PRPortPrototype are explained in Chapter 3.2.2 and Chapter 4.2.

2.8 Variable-size Array Data Types

2.8.1 Overview and Use cases

AUTOSAR supports the definition of array data types where the size of the actual payload varies at run-time. As far as the configuration is concerned, it is possible to specify a maximum number of array elements that shall not be exceeded at run-time.

In order to properly understand the approach, it is necessary to understand that the support for Variable-Size Array Data Types has been introduced in two waves that each had a different motivation.

2.8.1.1 "Old-world" dynamic-size Arrays

In the first wave, the support for Variable-Size Array Data Types was limited to data types that basically boil down to an array where the base type is an unsigned integer data type with a length of exactly one byte.

The main use cases for this scenario are derived from diagnostics requirements as well as support for the J1939 communication protocol.

In both cases the actual length of a Variable-Size Array Data Type could be determined from the context, i.e. either by the diagnostic basic-software module or by the implementation of the J1939 TP.

For the lack of a better terminology, this specification distinguishes between "old-world" dynamic-size arrays and "new-world" Variable-Size Array Data Types. It will be necessary to clearly define the characteristics that allow for a disambiguation between the "old-world" dynamic-size arrays and "new-world" Variable-Size Array Data Types.

[TPS_SWCT_01641] Definition of an "old-world" dynamic-size array data type by means of an ApplicationArrayDataType ⌈An ApplicationArrayDataType that **doesn't define** attribute dynamicArraySizeProfile **and** that aggregates an ApplicationArrayElement where attribute arraySizeSemantics exists and is set to the value variableSize shall be considered an "old-world" dynamic-size array data type.⌋

Please note that [TPS_SWCT_01641] can't go any deeper into the specifics of the given data type because it is intentionally focused on ApplicationDataTypes. There are use cases where the distinction between "old-world" dynamic-size arrays and "new-world" Variable-Size Array Data Types shall be done in the absence of a corresponding ImplementationDataType.

In general, the disambiguation becomes multi-faceted (but not necessarily easier) if the definition of a corresponding ImplementationDataType is available (see [TPS_SWCT_01642]).

[TPS_SWCT_01642] Definition of an "old-world" dynamic-size array data type by means of an ImplementationDataType ⌈An ImplementationDataType that (after all type references are resolved) fulfills all the following conditions shall be considered an "old-world" dynamic-size array data type:

- The value of attribute category is set to ARRAY
- The ImplementationDataType doesn't define the attribute dynamicArraySizeProfile
- The ImplementationDataType aggregates a subElement where
  - attribute arraySizeSemantics exists and is set to the value variableSize
  - attribute arraySizeHandling does not exist
- One of the following conditions applies:
  - subElement.category is set to VALUE or TYPE_REFERENCE that eventually boils down to VALUE and the attribute subElement.swDataDefProps.baseType.baseTypeDefinition.baseTypeSize is set to the value 8 and the attribute baseTypeEncoding is set to NONE.
  - subElement.category is set to TYPE_REFERENCE and the attribute subElement.swDataDefProps.implementationDataType literally represents the Platform Data Type named uint8.
  - subElement.category is set to TYPE_REFERENCE and the attribute subElement.swDataDefProps.implementationDataType.shortName is set to uint8 and subElement.swDataDefProps.baseType.baseTypeDefinition.nativeDeclaration does not exist.

⌋

By and large, the defining characteristics for "old-world" dynamic-size arrays is the **absence** of a definition of the attributeApplicationArrayDataType.dynamicArraySizeProfile or ImplementationDataType.dynamicArraySizeProfile.

By regulation of [constr_1387], “old-world” dynamic-size arrays are not supported for transmission by means of a data transformer. The only supported kind of Variable-Size Array Data Type that can be transmitted using a data transformer is the “new-world” variable-size arrays.

2.8.1.2 “New-world” variable-size Arrays

In contrast to this, the second wave of support for Variable-Size Array Data Types was motivated by the application software layer itself.

Here, the situation is entirely different because the actual size cannot be determined by any context software module. The application itself is responsible for maintaining the proper length of a Variable-Size Array Data Type at run-time.

As a consequence, the specification of the actual array size at run-time needs to be reflected by the structure of the data types used for hosting the Variable-Size Array Data Type.

[TPS_SWCT_01644] Definition of a “new-world” variable-size array data type by means of an ApplicationArrayDataType ⌈An ApplicationArrayDataType that fulfills all the following conditions shall be considered an “new-world” dynamic-size array data type.

- The ApplicationArrayDataType **defines** attribute ApplicationArrayDataType.dynamicArraySizeProfile.
- ApplicationArrayDataType aggregates an ApplicationArrayElement that **defines** attribute ApplicationArrayElement.arraySizeHandling.

⌋

[TPS_SWCT_01645] Definition of a “new-world” variable-size array data type by means of an ImplementationDataType ⌈An ImplementationDataType that fulfills all the following conditions shall be considered an “new-world” dynamic-size array data type.

- The ImplementationDataType **defines** attribute ImplementationDataType.dynamicArraySizeProfile.
- ImplementationDataType aggregates an ImplementationDataTypeElement that **defines** attribute ImplementationDataTypeElement.arraySizeHandling.

⌋

In contrast to the first use case described above, the application-motivated Variable-Size Array Data Type cannot be limited in terms of the base type of the array data type, i.e. limiting the underlying data type to an unsigned integer data type with a length of exactly one byte is not an option.

On top of that, several possible structures of Variable-Size Array Data Types have been required. This aspect is depicted in Figure 2.12.

[TPS_SWCT_01636] Definition of profiles for the definition of Variable-Size Array Data Types ⌈The possible variants for Variable-Size Array Data Types are:

Linear The data type of the elements of the Variable-Size Array Data Type itself does not consist of a Variable-Size Array Data Type.

This case corresponds to the possible value **VSA_LINEAR** of attribute dynamicArraySizeProfile.

Square The data type of the elements of the Variable-Size Array Data Type itself consists of Variable-Size Array Data Types where the maximum number of elements in all "second order" arrays is **identical** to the maximum number of elements in the "first order" array.

This case corresponds to the possible value **VSA_SQUARE** of attribute dynamicArraySizeProfile.

Rectangular The data type of the elements of the Variable-Size Array Data Type itself consists of Variable-Size Array Data Types where the maximum number of elements in "second order" arrays is **identical** but this value is typically **not identical**[3] to the maximum number of elements in the "first order" array.

This case corresponds to the possible value **VSA_RECTANGULAR** of attribute dynamicArraySizeProfile.

Fully Flexible The data type of the elements of the Variable-Size Array Data Type itself consists of Variable-Size Array Data Types where the maximum number of elements in "second order" arrays is **not necessarily identical** with each other and (obviously) **not necessarily identical** to the maximum number of elements in the "first order" array.

This case corresponds to the possible value **VSA_FULLY_FLEXIBLE** of attribute dynamicArraySizeProfile.

⌋

The described cases directly correspond to the portrayal of different kinds of variable-size arrays in Figure 2.12:

- The value VSA_LINEAR corresponds to the tag (a).
- The value VSA_SQUARE corresponds to the tag (b).
- The value VSA_RECTANGULAR corresponds to the tag (c).
- The value VSA_FULLY_FLEXIBLE corresponds to the tag (d).

[3] If it was, the case boils down to the rectangular scenario tagged (b).

Please note that the leaf elements in a Variable-Size Array Data Type doesn't have to be primitive data types. As mentioned before, it is possible to define multiple-dimension Variable-Size Array Data Types.

The "terminal" elements can be recognized as such in that they don't establish further Variable-Size Array Data Types.

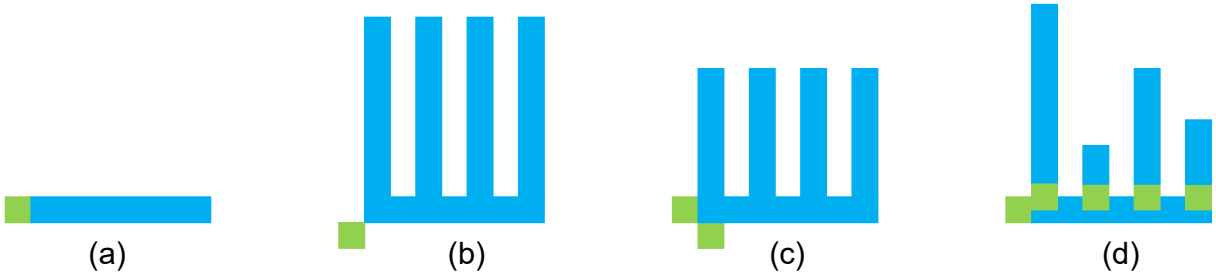

Figure 2.12: Structural variety of array data types with variable size

Please note further that the modeling of Variable-Size Array Data Types is a complex step governed by a collection of rules and constraints.

It is the expressed intent of this specification to keep the complexity of the rule set as low as possible while still providing the user with a powerful modeling framework.

The major consequence of this conclusion is to keep the modeling as straightforward as possible; in other words: intentionally cut away certain modeling variants for which acceptable workarounds within the modeling framework itself exist.

One concrete example for such a restriction is that for ImplementationDataTypes, Variable-Size Array Data Types can only be defined on the level of an AutosarDataType.

It is intentionally not supported to define a Variable-Size Array Data Type on the level of an ImplementationDataTypeElement because the intended semantics can be realized by assigning the value TYPE_REFERENCE to the ImplementationDataTypeElement.category and then let it reference to another ImplementationDataType that in turn implements the Variable-Size Array Data Type.

2.8.2 Modeling Aspects regarding Application Data Types

In the context of the AUTOSAR layered data type concept, the level of ApplicationDataTypes is not concerned about the structure of how the Variable-Size Array Data Types.

In other words, aspects of the implementation of this kind of data type is intentionally abstracted as much as possible in order to support the idea behind the definition of ApplicationDataTypes as a concept that is independent of an implementation to the applicable degree.

Consequently, the support for Variable-Size Array Data Types on the level of ApplicationDataTypes requires the addition of a couple of additional attributes. Details can be found in Chapter 5.2.4.2.

If a Variable-Size Array Data Type is modeled on the level of Application-DataType it is necessary to also provide a companion ImplementationDataType as well as a DataTypeMap that refers to both the ApplicationDataType and the ImplementationDataType.

The contrary is **not applicable**, i.e. it is possible to define a Variable-Size Array Data Type with only an ImplementationDataType, see [TPS_SWCT_01622].

2.8.3 Modeling Aspects regarding Implementation Data Types

On the other hand, the data type used for the actual hosting of the Variable-Size Array Data Type corresponds directly to the level of the ImplementationData-Type.

Here, it is possible to define how an ImplementationDataType can be used to define a Variable-Size Array Data Type.

The definition of ImplementationDataType in the AUTOSAR meta-model comes with a certain level of generic nature the support for Variable-Size Array Data Types on this level comes as a mixture of dedicated attributes in the meta-model and a set of recipes how to support different use cases of Variable-Size Array Data Types.

This means that the definition of ImplementationDataTypes for the purpose of creating Variable-Size Array Data Types only has a chance to take off if the structure of these data types is replicated in different implementations of AUTOSAR software.

Therefore, AUTOSAR defines a common way of how ImplementationDataTypes for the purpose of creating Variable-Size Array Data Types shall be defined such that the ImplementationDataType shall be of category STRUCTURE with the following sub-elements:

1. A numerical value that determines the actual size. This element shall be called the Size Indicator throughout this document.
2. An array of the base-type of the Variable-Size Array Data Type that implements the payload of the Variable-Size Array Data Type. The dimension of the array shall be defined such that the intended maximum number of elements fits in.

A Size Indicator of a Variable-Size Array Data Type holds the number of valid elements of the array. This information is necessary for the RTE to handle the array efficiently.

On the sender-side this indicator is actively updated by the software-component, which is the only instance that knows how many elements of the array are valid.

So the number of valid elements and the `Size Indicator` have to be kept consistent by the application. When the software-component sends the data over to the RTE, the RTE hands the data over to the transformer.

The transformer may evaluate the `Size Indicator` (depends on the transformer) and only work on the valid array elements. The output of the transformer can vary in length and only contain necessary data. Therefore, it can be more resource saving.

On the receiver side, the last transformer in the execution order restores the data elements of the array and the value of the `Size Indicator`. This output is handed over by the RTE to the software-component. The application is now aware of the number of valid elements in the array.

The details of how `ImplementationDataType`s need to be modeled for the implementation of `Variable-Size Array Data Type`s can be found in Chapter 5.2.5 and a couple of examples is available in the Chapter B.1.3.

2.9 Optional Elements in Structures

2.9.1 Background

The *AUTOSAR classic platform* supports the use of a `TLV`[4] data encoding on the SOME/IP transport layer. `TLV` is typically used where at least a part of the transmitted data is only *optionally* present and filled with meaningful values.

In other words: an optional part of a data structure may exist and carry meaningful values in one instance of data transmission and be completely missing in another instance of the data transmission.

The receiving software needs to be able to identify whether the optional part exists and read its value accordingly.

The receiving software also needs to be able to continue executing meaningfully if the optional part of such a data structure does not exist in the specific communication instance.

Consequently, it is necessary to be able to precisely identify the parts of a data structure that may become optional for specific instances of data transmission.

In terms of the AUTOSAR meta-model, the identification could - in principle - be attached at various levels of abstraction:

`AutosarDataType` In this case the optionality that is only needed for communication purposes would still exist in all other usages of data types. This seems unbalanced.

[4] This abbreviation stands for tag-length-value

Admittedly, the definition of different optionality configurations for the same data type may lead to a set of structurally identical data types that only vary in terms of optionality. The existence of variation points may help to mitigate this effect, though.

PortInterface In this case the optionality is defined where it is actually required. However, different optionality could - in principle - be defined for DataPrototypes typed by the same AutosarDataType.

This would lead to an increased effort for the definition of C data types in the context of the same PortInterface.

Additional constraints have been identified in the context of the definition of RTE APIs of the AUTOSAR classic platform that ultimately render this option not viable.

ComSpec In this case (for more information please refer to Chapter 4.6) the definition of optionality would be even more specific than the definition on the level of PortInterfaces.

On top of that, the task of defining optionality is, in the vast majority of cases, performed by an OEM, whereas the model definition on the level of ComSpec requires the existence of SwComponentTypes, and this definition is in many cases in the domain of a supplier.

As a result of this consideration, AUTOSAR has opted to implement the concept of defining optionality on the level of the AutosarDataType.

3 Software Components

3.1 Introduction

The detailed introduction of all aspects of the `Software Component Template` at once is considered too complex. This chapter therefore provides an overview of the main conceptual aspects of software components, ports, and interfaces.

The overview will then be broken down into further details in Chapter 4.

One goal of the AUTOSAR concept is to support reusability at the level of application software.

In other words, it should be possible to reuse existing artifacts to create further model elements instead of being forced to create every single modeling detail from scratch.

One consequence of this approach is the use of the so-called type-prototype pattern, as described in the [10, TPS Generic Structure Template].

The type-prototype pattern is implemented by references from prototypes to types that are decorated with the ≪`isOfType`≫. The existence of such references is governed by [constr_2633], see [10, TPS Generic Structure Template].

Among other things, this concept allows creating hierarchical structures of software components with arbitrary complexity. However, creating the hierarchical structures themselves does not affect the run-time behavior of the overall system.

The actual behavior is defined entirely within the individual software components.

This conclusion is supported by the understanding that software components are developed against the so-called `Virtual Functional Bus` (VFB), an abstract communication channel without direct dependency on ECUs and communication buses.

The VFB does not provide any means for expressing a hierarchy of software components.

Of course, the use of the VFB has further consequences for the design of software components, which shall not directly call the operating system or the communication hardware.

As a result, software components can be deployed to actual ECUs at a late stage in the development process.

To make the description more precise, the following text uses accurate meta-model terms instead of the rather vague terminology of “composition” and “software component”.

3.2 Software Component

3.2.1 Overview

Application software within AUTOSAR is organized in self-contained units called AtomicSwComponentTypes. Such AtomicSwComponentTypes encapsulate the implementation of their functionality and behavior and merely expose well-defined connection points, called PortPrototypes, to the outside world.

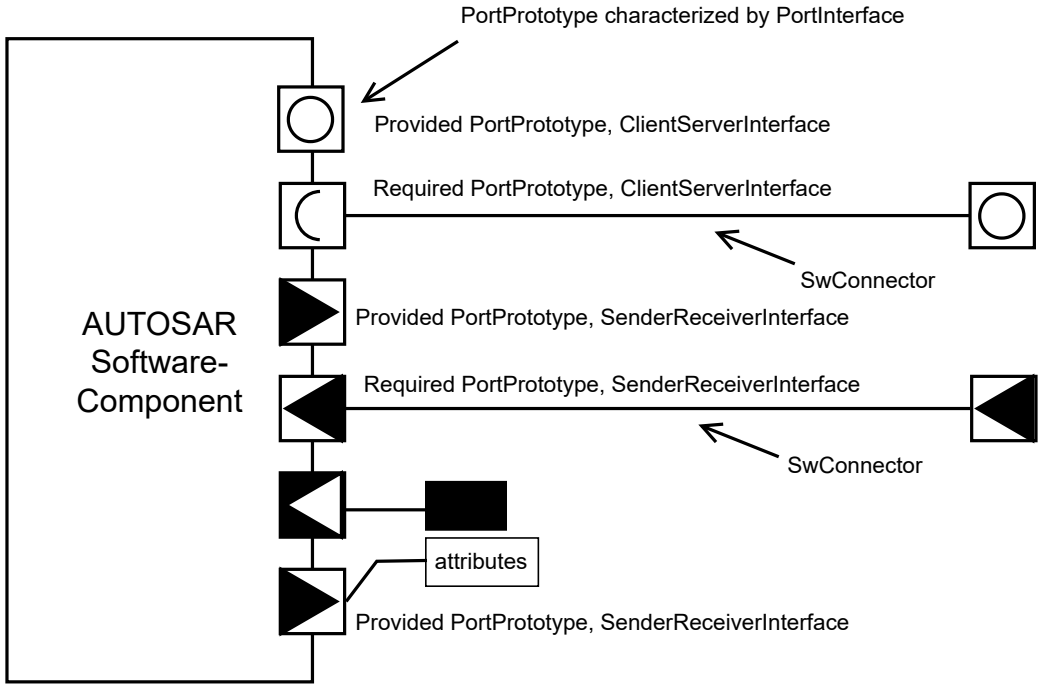

Figure 3.1: Exemplary graphical representation of software components in AUTOSAR

An exemplary graphical appearance of AUTOSAR software components according to the [3, TR Virtual Functional Bus] is depicted in Figure 3.1.

Class	***SwComponentType*** (abstract)			
Note	Base class for AUTOSAR software components.			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Subclasses	*AtomicSwComponentType*, CompositionSwComponentType, ParameterSwComponentType			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	*SwComponentType* (abstract)			
consistency Needs	ConsistencyNeeds	*	aggr	This represents the collection of ConsistencyNeeds owned by the enclosing SwComponentType. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=consistencyNeeds, consistencyNeeds.shortName, consistencyNeeds.variationPoint.shortLabel vh.latestBindingTime=preCompileTime This Attribute is only used by the AUTOSAR Classic Platform.
port	PortPrototype	*	aggr	The PortPrototypes through which this SwComponentType can communicate. The aggregation of PortPrototype is subject to variability with the purpose to support the conditional existence of PortPrototypes. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=port, port.shortName, port.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
portGroup	PortGroup	*	aggr	A port group being part of this component. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=portGroup, portGroup.shortName, portGroup.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
swcMapping Constraint	SwComponentMapping Constraints	*	ref	Reference to constraints that are valid for this SwComponentType. **Tags:** atp.Splitkey=swcMappingConstraint This Attribute is only used by the AUTOSAR Classic Platform.
swComponent Documentation	SwComponent Documentation	0..1	aggr	This adds a documentation to the SwComponentType. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=swComponentDocumentation, swComponentDocumentation.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=-10
unitGroup	UnitGroup	*	ref	This allows for the specification of which UnitGroups are relevant in the context of referencing SwComponentType. **Tags:** atp.Splitkey=unitGroup This Attribute is only used by the AUTOSAR Classic Platform.

Table 3.1: SwComponentType

3.2.2 Port Prototype

Please note that PortPrototypes of a SwComponentType are supposed to be used for attaching SwConnectors that establish an actual connection between SwComponentPrototypes (see Chapter 3.3).

[TPS_SWCT_01002] **SwComponentTypes may only interact by means of their PortPrototypes** ⌈AtomicSwComponentTypes (and also the more general SwComponentTypes may only interact by means of their PortPrototypes). Hidden

communication dependencies that are *not* expressed by means of PortPrototypes are strictly forbidden.⌋

Therefore, software components are in theory exchangeable as long as they implement the same functionality and provide the same public communication interface to the remaining system.

[TPS_SWCT_01111] PortPrototypes need an additional model artifact, the PortInterface ⌈Please note that PortPrototypes actually need an additional model artifact, the PortInterface, for fully describing the details of the PortPrototype.⌋

The concept of the PortInterface as another means for establishing a high degree of re-usability is described in Chapter 4.2.

Class	***PortPrototype*** (abstract)			
Note	Base class for the ports of an AUTOSAR software component. The aggregation of PortPrototypes is subject to variability with the purpose to support the conditional existence of ports.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	*AbstractProvidedPortPrototype*, *AbstractRequiredPortPrototype*			
Aggregated by	*AtpClassifier*.atpFeature, *SwComponentType*.port			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
clientServer Annotation	ClientServerAnnotation	*	aggr	Annotation of this PortPrototype with respect to client/ server communication. **Tags:** atp.Splitkey=clientServerAnnotation
delegatedPort Annotation	DelegatedPort Annotation	0..1	aggr	Annotations on this delegated port. **Tags:** atp.Splitkey=delegatedPortAnnotation
ioHwAbstraction Server Annotation	IoHwAbstractionServer Annotation	*	aggr	Annotations on this IO Hardware Abstraction port. **Tags:** atp.Splitkey=ioHwAbstractionServerAnnotation
modePort Annotation	ModePortAnnotation	*	aggr	Annotations on this mode port. **Tags:** atp.Splitkey=modePortAnnotation
nvDataPort Annotation	NvDataPortAnnotation	*	aggr	Annotations on this non voilatile data port. **Tags:** atp.Splitkey=nvDataPortAnnotation
parameterPort Annotation	ParameterPort Annotation	*	aggr	Annotations on this parameter port. **Tags:** atp.Splitkey=parameterPortAnnotation
senderReceiver Annotation	SenderReceiver Annotation	*	aggr	Collection of annotations of this ports sender/receiver communication. **Tags:** atp.Splitkey=senderReceiverAnnotation
triggerPort Annotation	TriggerPortAnnotation	*	aggr	Annotations on this trigger port. **Tags:** atp.Splitkey=triggerPortAnnotation

Table 3.2: PortPrototype

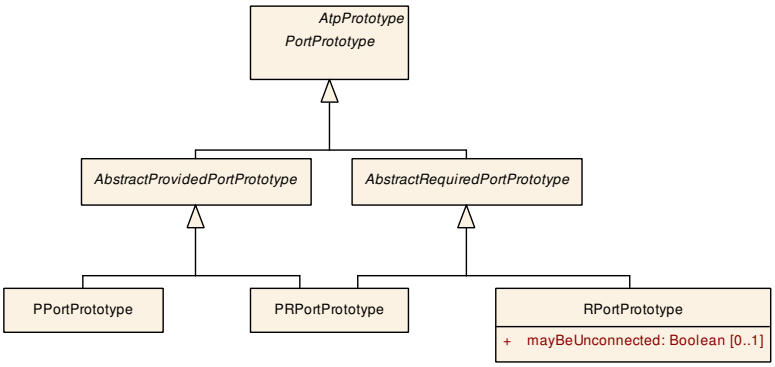

Figure 3.2: Overview of `PortPrototype`

[TPS_SWCT_01112] Semantics of `PortPrototype`s ⌈`PortPrototype`s can have the following semantics:

- A require-port (in technical terms: `RPortPrototype`) requires certain services or data.
- A provide-port (or `PPortPrototype`), on the other hand, provides services or data.
- A provide-require-port (or `PRPortPrototype`) combines the ability to provide and require services or data in one entity.

⌋

The semantics of `PortPrototype` is also depicted in Figure 3.2.

[TPS_SWCT_01573] A `PRPortPrototype` is never considered unconnected ⌈A `PRPortPrototype` is never considered unconnected, even if there are no `SwConnector`s actually referring to it.⌋

Please note that [TPS_SWCT_01573] represents the immediate consequence of the semantics defined in [TPS_SWCT_01112].

[TPS_SWCT_01113] Connecting two `PortPrototype`s ⌈Two `SwComponentPrototype`s are ultimately connected by hooking up a `PPortPrototype` or `PRPortPrototype` of one `SwComponentPrototype` to a compatible `RPortPrototype` or `PRPortPrototype` of the other `SwComponentPrototype`.⌋

Please find more information concerning the definition of “compatibility” in Chapter 6.

Class	***AbstractRequiredPortPrototype*** (abstract)
Note	This abstract class provides the ability to become a required PortPrototype.
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *PortPrototype*, *Referrable*
Subclasses	PRPortPrototype, RPortPrototype
Aggregated by	*AtpClassifier*.atpFeature, *SwComponentType*.port

▽

△

Class	**AbstractRequiredPortPrototype** (abstract)			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
requiredCom Spec	RPortComSpec	*	aggr	Required communication attributes, one for each interface element. **Tags:** atp.Splitkey=requiredComSpec, requiredCom Spec.dataElement, requiredComSpec.getter, required ComSpec.modeGroup, requiredComSpec.operation, requiredComSpec.parameter, requiredComSpec.setter, requiredComSpec.shortLabel, requiredComSpec.variable

Table 3.3: AbstractRequiredPortPrototype

Class	**AbstractProvidedPortPrototype** (abstract)			
Note	This abstract class provides the ability to become a provided PortPrototype.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *PortPrototype*, *Referrable*			
Subclasses	PPortPrototype, PRPortPrototype			
Aggregated by	*AtpClassifier*.atpFeature, *SwComponentType*.port			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
providedCom Spec	PPortComSpec	*	aggr	Provided communication attributes per interface element (data element or operation). **Tags:** atp.Splitkey=providedComSpec, providedCom Spec.dataElement, providedComSpec.getter, provided ComSpec.modeGroup, providedComSpec.operation, providedComSpec.parameter, providedComSpec.setter, providedComSpec.variable

Table 3.4: AbstractProvidedPortPrototype

Class	**RPortPrototype**			
Note	Component port requiring a certain port interface.			
Base	*ARObject*, *AbstractRequiredPortPrototype*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *PortPrototype*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, *SwComponentType*.port			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
mayBe Unconnected	Boolean	0..1	attr	If set to true, this attribute indicates that the enclosing `RPortPrototype` may be left unconnected and that this aspect has explicitly been considered in the software-component's design. This Attribute is only used by the AUTOSAR Classic Platform.
required Interface	PortInterface	0..1	tref	The interface that this port requires. **Stereotypes:** isOfType **Tags:** atp.Splitkey=requiredInterface

Table 3.5: RPortPrototype

The existence of the reference in the role `RPortPrototype.requiredInterface` is governed by [constr_2633].

Class	PPortPrototype			
Note	Component port providing a certain port interface.			
Base	*ARObject*, *AbstractProvidedPortPrototype*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *PortPrototype*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, *SwComponentType*.port			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
provided Interface	PortInterface	0..1	tref	The interface that this port provides. **Stereotypes:** isOfType **Tags:** atp.Splitkey=providedInterface

Table 3.6: PPortPrototype

The existence of the reference in the role `PPortPrototype.providedInterface` is governed by [constr_2633].

Class	PRPortPrototype			
Note	This kind of PortPrototype can take the role of both a required and a provided PortPrototype.			
Base	*ARObject*, *AbstractProvidedPortPrototype*, *AbstractRequiredPortPrototype*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *PortPrototype*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, *SwComponentType*.port			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
provided Required Interface	PortInterface	0..1	tref	This represents the `PortInterface` used to type the `PRPortPrototype`. **Stereotypes:** isOfType **Tags:** atp.Splitkey=providedRequiredInterface

Table 3.7: PRPortPrototype

The existence of the reference in the role `PRPortPrototype.providedRequiredInterface` is governed by [constr_2633].

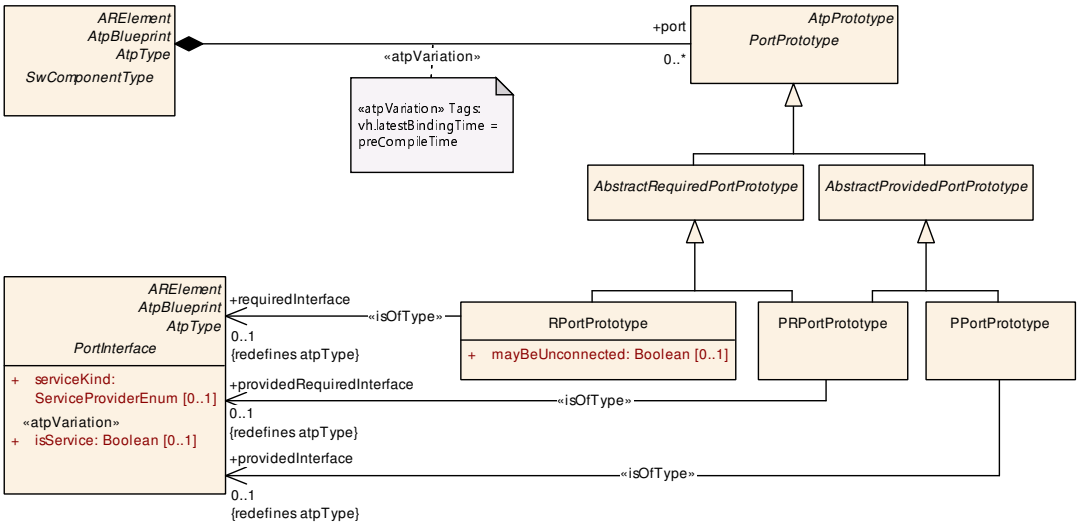

Figure 3.3: Components and Ports

[TPS_SWCT_01096] **`PortGroup`** ⌈`PortPrototype`s can be logically grouped into `PortGroup`s. This mechanism is used for implementing mode management features.⌋

Further explanations about the semantics of meta-class PortGroup can be found in Chapter 4.7.

There are cases where an RPortPrototype is intentionally left unconnected. Such a scenario would typically be reported if the RTE Generator is executed in strict mode.

By means of setting attribute RPortPrototype.mayBeUnconnected, the designer of the respective software component has the ability to express that the "open" RPortPrototype is part of the final design and shall not be reported, even in strict mode.

The attribute can be used in combination with an RPortPrototype and any kind of PortInterface.

Note that the attribute applies to the entire RPortPrototype, not to individual elements of the applicable PortInterface.

In other words, the attribute does not affect the case where e.g. only one dataElement of several sender/receiver RPortPrototype is left unconsidered, as described by [TPS_SWCT_01101].

Please note that using RPortPrototype.mayBeUnconnected is potentially dangerous, because it removes a warning, and this can be harmful if a legitimate warning is suppressed by mistake.

It is therefore advised to use RPortPrototype.mayBeUnconnected with care.

3.2.3 Atomic Software Component Type

[TPS_SWCT_01108] Added value of an AtomicSwComponentType ⌈As mentioned before, the term AtomicSwComponentType is a specific form of the general concept of the SwComponentType. The added value of an AtomicSwComponentType is that it can aggregate an InternalBehavior.⌋

More information regarding the semantics of InternalBehavior can be found in Chapter 7.

[TPS_SWCT_01109] Adding the SwcInternalBehavior in a later process step ⌈The aggregation of SwcInternalBehavior is stereotyped ≪atpSplitable≫ to allow for adding the SwcInternalBehavior in a later process step. In other words, it is possible to completely develop the VFB view of a software component and later add more details like InternalBehavior.⌋

There are several specialized SwComponentTypes to describe specific software components used in different parts of the [5, EXP Layered Software Architecture]. Further details are mentioned in Chapter 10 and Chapter 11.

The ApplicationSwComponentType is a specialization of AtomicSwComponentType for representing hardware-independent application software. The ParameterSwComponentType is a specialization of SwComponentType that, in contrast to AtomicSwComponentType, cannot aggregate SwcInternalBehavior.

Class	***AtomicSwComponentType*** (abstract)			
Note	An atomic software component is atomic in the sense that it cannot be further decomposed and distributed across multiple ECUs.			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *SwComponentType*			
Subclasses	ApplicationSwComponentType, ComplexDeviceDriverSwComponentType, EcuAbstractionSwComponentType, NvBlockSwComponentType, SensorActuatorSwComponentType, ServiceProxySwComponentType, ServiceSwComponentType			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
internalBehavior	SwcInternalBehavior	0..1	aggr	The SwcInternalBehaviors owned by an AtomicSwComponentType can be located in a different physical file. Therefore the aggregation is <<atpSplitable>>. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=internalBehavior, internalBehavior.shortName, internalBehavior.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
symbolProps	SymbolProps	0..1	aggr	This represents the SymbolProps for the AtomicSwComponentType. **Tags:** atp.Splitkey=symbolProps, symbolProps.shortName

Table 3.8: AtomicSwComponentType

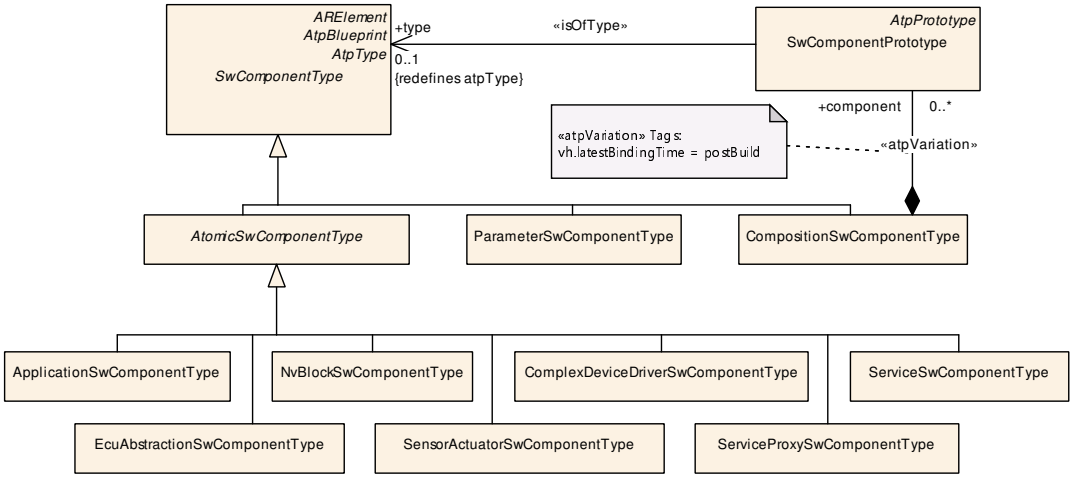

Figure 3.4: Overview of Software Component Types

The purpose of the NvBlockSwComponentType is described in detail in Chapter 11.4.2. The ServiceSwComponentType is described in Chapter 11.2. Furthermore, the EcuAbstractionSwComponentType and the ComplexDeviceDriverSwComponentType are discussed in detail in Chapter 10.

A description of the ServiceProxySwComponentType can be found in Chapter 11.3 while the SensorActuatorSwComponentType is described in Chapter 10.4.

Class	**ApplicationSwComponentType**			
Note	The `ApplicationSwComponentType` is used to represent the application software. **Tags:** atp.recommendedPackage=SwComponentTypes			
Base	*ARElement*, *ARObject*, *AtomicSwComponentType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *Collectable Element*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *SwComponentType*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 3.9: ApplicationSwComponentType

3.2.4 Parameter Software Component Type

[constr_1092] Restrictions for the `ParameterSwComponentType`

Imposition time: CP: `IT_CpgExe`

⌈The following restrictions exist for a `ParameterSwComponentType`:

- it shall never aggregate a `SwcInternalBehavior` and
- the only aggregated `PortPrototype`s shall be `PPortPrototype`s of type `ParameterInterface`.

⌋

[TPS_SWCT_01847] Define role-specific data properties of elements of composite data types used for the definition of calibration parameters ⌈A `ParameterSwComponentType` shall have the ability to aggregate `InstantiationDataDefProps`. By this means it is possible to define role-specific data properties of elements of composite data types used for the definition of calibration parameters in the scope of a `ParameterSwComponentType`.⌋

For more information about this aspect, please refer to Chapter 7.5.4.

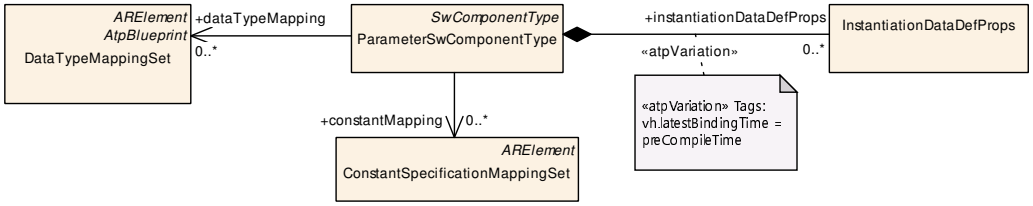

Figure 3.5: Details of `ParameterSwComponentType`

3.2.5 Symbolic Name of a Software Component

Please note that an `AtomicSwComponentType` manifests itself in the source code of an RTE into which an instance of the `AtomicSwComponentType` is deployed. This implies potential naming conflicts if instances of `AtomicSwComponentType` that have identical `shortName`s are deployed into a specific RTE.

[TPS_SWCT_01110] Symbolic name of a software-component ⌈To mitigate this potential hazard, it is possible to provide the AtomicSwComponentType along with an accompanying symbolic name that can be used for resolving the name clash. The symbolic name is provided by means of the attribute symbol of the meta-class SymbolProps owned by AtomicSwComponentType in the role symbolProps.⌋

Please note that more information about the symbolic name provided by means of the attribute symbol of the meta-class SymbolProps owned by AtomicSwComponentType in the role symbolProps can be found in Figure 3.6.

For more detailed information about how SymbolProps can be used to mitigate name clashes occurring during the integration of software components on an AUTOSAR ECU, please refer to the [4, AUTOSAR Methodology].

[TPS_SWCT_01000] Usage of attribute symbol of the symbolProps ⌈In particular, the RTE generator shall take over the value of the attribute symbol of the symbolProps owned by a given AtomicSwComponentType. If and only if symbolProps is not defined, the RTE generator shall take the shortName of the AtomicSwComponentType. For the generation of symbols for RunnableEntitys [TPS_SWCT_01001] shall be observed.⌋

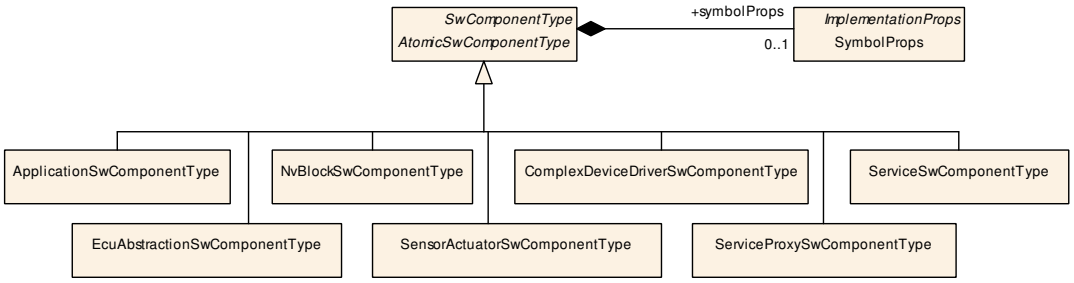

Figure 3.6: Overview of AtomicSwComponentType

[TPS_SWCT_01001] Prefix symbols generated for the RunnableEntity ⌈If and only if the attribute symbol of a symbolProps owned by an AtomicSwComponentType exists, its value shall also be taken for prefixing the symbols generated for the RunnableEntitys owned by the AtomicSwComponentType.⌋

Note: if symbolProps is not defined, the behavior of the RTE generator is fully backward compatible, i.e. existing implementations of RunnableEntitys do not have to be touched in order to conform with this version of the AUTOSAR standard.

This is a further measure to mitigate the risk of potential name clashes in the RTE code.

[TPS_SWCT_01635] Naming conventions may support the effectiveness of SymbolProps ⌈Of course, there is a residual risk that even in the presence of SymbolProps name clashes may still occur.

Therefore, the definition of naming conventions may facilitate the avoidance of name clashes to a further degree.⌋

3.3 Composition Software Component Type

3.3.1 Overview

[TPS_SWCT_01032] **CompositionSwComponentType** ⌈The purpose of an AUTOSAR CompositionSwComponentType is to allow the encapsulation of specific functionality by aggregating existing software components.⌋

[TPS_SWCT_01033] **Nested definition of CompositionSwComponentTypes** ⌈Since a CompositionSwComponentType is also a SwComponentType, it again may be aggregated in further CompositionSwComponentTypes.⌋

This recursive relation is formally expressed in Figure 3.7.

It is important to understand that while compositions allow for (sub-) system abstraction, they are solely an *architectural element for the implementation of model scalability*. They simply group existing software components and thereby reduce complexity when viewing or designing logical software architecture.

Therefore, the definition of CompositionSwComponentTypes has no effect on how software components interact with the Virtual Functional Bus (VFB). CompositionSwComponentTypes do not add any new functionality to what is already provided by the software components they aggregate.

[TPS_SWCT_01034] **CompositionSwComponentTypes do not have any binary footprint** ⌈As the main consequence, CompositionSwComponentTypes do not have any binary footprint in the ECU software.⌋

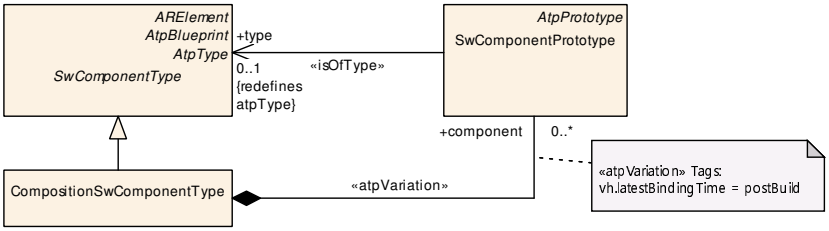

Figure 3.7: The recursive relation of software components and compositions

3.3.2 Software Component Prototype

[TPS_SWCT_01035] **CompositionSwComponentType aggregates SwComponentPrototypes** ⌈In terms of the AUTOSAR meta-model, a composition of software components realized by the meta-class CompositionSwComponentType

aggregates SwComponentPrototypes which, in turn, are typed by a SwComponentType.⌋

Please note that a CompositionSwComponentType is also a SwComponentType.

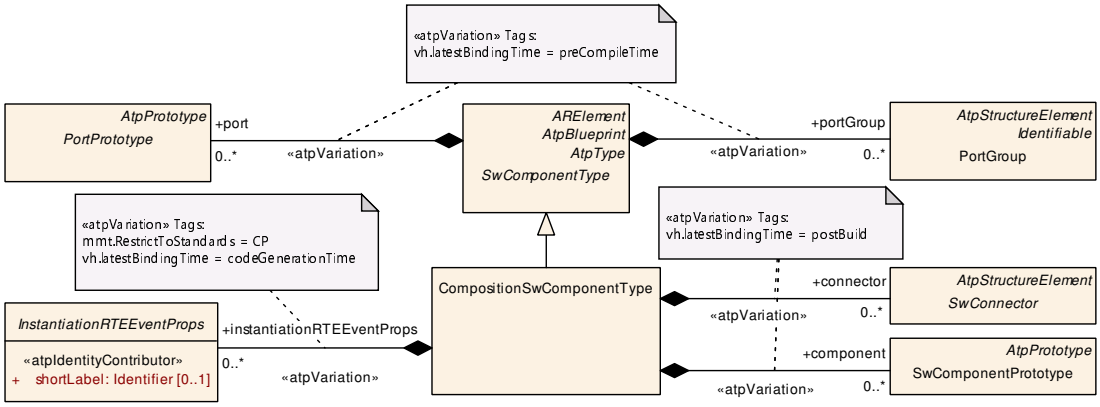

Figure 3.8: Composition and the meta-classes aggregated

[TPS_SWCT_01036] **SwComponentPrototype implements a specific role** ⌈Therefore, a SwComponentPrototype implements the use of a SwComponentType in a specific *role*.⌋

[TPS_SWCT_01037] Arbitrary numbers of SwComponentPrototypes can be created ⌈In general, arbitrary numbers of SwComponentPrototypes that refer to specific SwComponentTypes can be created.⌋

The existence of the reference in the role SwComponentPrototype.type is governed by [constr_2633].

Example 3.1

A SwComponentPrototype "LeftDoorControl" fulfills the role of implementing the SwComponentType "DoorControl" for the left door of a vehicle while the SwComponentPrototype "RightDoorControl" fulfills the role of implementing the SwComponentType "DoorControl" for the right door.

[TPS_SWCT_01080] Delegation ports ⌈Note that being a SwComponentType, a CompositionSwComponentType also exposes PortPrototypes to the outside world. However, the PortPrototypes are only delegated and do not play the same role as PortPrototypes attached to AtomicSwComponentTypes.⌋

Class	**CompositionSwComponentType**
Note	A CompositionSwComponentType aggregates SwComponentPrototypes (that in turn are typed by SwComponentType)s as well as SwConnectors for primarily connecting SwComponentPrototypes among each others and towards the surface of the CompositionSwComponentType. By this means, a hierarchical structures of software-components can be created. **Tags:** atp.recommendedPackage=SwComponentTypes

▽

△

Class	CompositionSwComponentType			
Base	ARElement, ARObject, AtpBlueprint, AtpClassifier, AtpType, CollectableElement, Identifiable, MultilanguageReferrable, PackageableElement, Referrable, SwComponentType			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
component	SwComponent Prototype	*	aggr	The instantiated components that are part of this composition. The aggregation of SwComponentPrototype is subject to variability with the purpose to support the conditional existence of a SwComponentPrototype. Please be aware: if the conditional existence of SwComponentPrototypes is resolved post-build, the deselected SwComponentPrototypes are still contained in the ECUs build but the instances are inactive in that they are not scheduled by the RTE. The use case for having 0 components owned by the CompositionSwComponentType could be to deliver an empty CompositionSwComponentType to e.g. a supplier for filling the internal structure. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=component, component.shortName, component.variationPoint.shortLabel vh.latestBindingTime=postBuild
connector	SwConnector	*	aggr	SwConnectors have the principal ability to establish a connection among PortPrototypes. They can have many roles in the context of a CompositionSwComponentType. Details are refined by subclasses. The aggregation of SwConnectors is subject to variability with the purpose to support variant data flow. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=connector, connector.shortName, connector.variationPoint.shortLabel vh.latestBindingTime=postBuild
constantValue Mapping	ConstantSpecification MappingSet	*	ref	Reference to the ConstantSpecificationMapping to be applied for initValues of PPortComSpecs and RPortComSpec. **Tags:** atp.Splitkey=constantValueMapping
dataType Mapping	DataTypeMappingSet	*	ref	Reference to the DataTypeMappingSet to be applied for the used ApplicationDataTypes in PortInterfaces. Background: when developing subsystems it may happen that ApplicationDataTypes are used on the surface of CompositionSwComponentTypes. In this case it would be reasonable to be able to also provide the intended mapping to the ImplementationDataTypes. However, this mapping shall be informal and not technically binding for the implementors mainly because the RTE generator is not concerned about the CompositionSwComponentTypes. Rationale: if the mapping of ApplicationDataTypes on the delegated and inner PortPrototype matches then the mapping to ImplementationDataTypes is not impacting compatibility. **Tags:** atp.Splitkey=dataTypeMapping

▽

△

Class	**CompositionSwComponentType**			
instantiation RTEEventProps	InstantiationRTEEvent Props	*	aggr	This allows to define instantiation specific properties for RTE Events, in particular for instance specific scheduling. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=instantiationRTEEventProps, instantiation RTEEventProps.shortLabel, instantiationRTEEvent Props.variationPoint.shortLabel vh.latestBindingTime=codeGenerationTime This Attribute is only used by the AUTOSAR Classic Platform.
physical Dimension Mapping	PhysicalDimension MappingSet	0..1	ref	This reference identifies the `PhysicalDimensionMappingSet` that is applicable in the context of the enclosing `CompositionSwComponentType`. The `PhysicalDimensionMapping`s contained in the `PhysicalDimensionMappingSet` shall be taken into account for the assessment of the compatibility of `PhysicalDimension`s in the context of creation of a `PortInterfaceMapping` in the scope of the `CompositionSwComponentType`. **Tags:** atp.Splitkey=physicalDimensionMapping

Table 3.10: CompositionSwComponentType

Class	**SwComponentPrototype**			
Note	Role of a software component within a composition.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, CompositionSwComponentType.component			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
type	SwComponentType	0..1	tref	Type of the instance. **Stereotypes:** isOfType **Tags:** atp.Splitkey=type

Table 3.11: SwComponentPrototype

[TPS_SWCT_01081] Implications of being a delegation port ⌈Being a `PortPrototype` attached to a `CompositionSwComponentType` has the following implications:

- The delegation has to follow the rules for basic compatibility.
- By creating `PortPrototype`s on the surface of a specific `CompositionSwComponentType`, it is explicitly decided whether the contents of an "inner" port contained in the `CompositionSwComponentType` is exposed to the outside world.

⌋

Please note that the rules for compatibility are described in Chapter 6.

Please note further that the semantics of the delegation of `PortPrototype`s are similar to encapsulation mechanisms like public and private members in object-oriented programming languages.

One implication of the concept of CompositionSwComponentType is that the application software of an entire vehicle is eventually represented by one CompositionSwComponentType. This so-called top-level composition has a special role in the context of the [9, System Template].

However, please note that a top-level composition might have (unconnected) PortPrototypes in order to allow for reuse as part of another system.

[constr_1035] Recursive definition of CompositionSwComponentType

Imposition time: CP: IT_CompSwcT, AP: IT_BefAraApiGen

⌈The recursive definition of a CompositionSwComponentType that eventually contains a SwComponentPrototype typed by the same CompositionSwComponentType shall not be feasible.⌋

3.3.3 Software Connector

[TPS_SWCT_01079] SwConnector ⌈Note that CompositionSwComponentType also aggregates the abstract meta-class SwConnector for connecting the contained SwComponentPrototypes with each other.⌋

More information can be found in Figure 3.8.

CompositionSwComponentTypes contain three kinds of SwConnectors:

- **[TPS_SWCT_01082] AssemblySwConnector** ⌈AssemblySwConnectors interconnect PortPrototypes of SwComponentPrototypes that are part of the CompositionSwComponentType.⌋

- **[TPS_SWCT_01083] DelegationSwConnector** ⌈DelegationSwConnectors connect from “inner” PortPrototypes to delegated “outer” PortPrototypes.⌋

  [TPS_SWCT_01084] Outer PortPrototype is referenced by multiple DelegationSwConnectors ⌈In the case that an outer PortPrototype is referenced by multiple DelegationSwConnectors, the semantics is the multiplication of the AssemblySwConnectors referencing the outer PortPrototype.⌋

- PassThroughSwConnector, see [TPS_SWCT_01507].

[constr_1086] SwConnector between two specific PortPrototypes

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈Each pair of PortPrototypes can only be connected by exactly one SwConnector.⌋

In other words, it is not supported to create two different SwConnectors that connect the same pair of PortPrototypes.

[TPS_SWCT_01638] Existence of SwConnector between two PRPortPrototypes ⌈[constr_1086] applies also in the case that two PRPortPrototypes are connected with each other. In particular, the roles

- AssemblySwConnector.requester
- AssemblySwConnector.provider
- PassThroughSwConnector.providedOuterPort
- PassThroughSwConnector.requiredOuterPort

do **not** establish a direction in this case.⌋

To clarify, [TPS_SWCT_01638] means that the SwConnector represents the ability for bidirectional communication between the two PRPortPrototypes.

[constr_1087] AssemblySwConnector inside CompositionSwComponentType

Imposition time: CP: IT_CompSwcT

⌈An AssemblySwConnector owned by a specific CompositionSwComponentType shall only connect PortPrototypes of SwComponentPrototypes that are owned by the same CompositionSwComponentType.⌋

[constr_1088] DelegationSwConnector inside CompositionSwComponentType

Imposition time: CP: IT_CompSwcT

⌈A DelegationSwConnector owned by a specific CompositionSwComponentType shall only connect a PortPrototype of a SwComponentPrototype that is owned by the same CompositionSwComponentType that also owns the connected delegation PortPrototype.⌋

In the context of attaching a DelegationSwConnector to an inner PRPortPrototype there is some ambiguity to be considered. In particular, from a formal point of view it would be feasible to use **either** a PPortInCompositionInstanceRef **or** a RPortInCompositionInstanceRef.

The ability to use one or the other meta-class arbitrarily is considered confusing. Therefore, [TPS_SWCT_01515] has been defined to remove the unnecessary degree of freedom.

[TPS_SWCT_01515] PPortInCompositionInstanceRef shall be used for attaching DelegationSwConnector to an inner PRPortPrototype ⌈For attaching a DelegationSwConnector to an inner PRPortPrototype, the meta-class PPortInCompositionInstanceRef shall be used.⌋

[constr_1100] Unconnected `RPortPrototype` typed by a `DataInterface`

Imposition time: CP: `IT_RteGen`

⌈For any element in an unconnected `RPortPrototype` typed by a `DataInterface`, there shall be a `requiredComSpec` that defines an `initValue`.⌋

One specific use case for `SwConnector`s is exemplified by Figure 3.9 and Figure 3.10.

A specific `CompositionSwComponentType` exists in two variants. One (more complex) variant foresees the existence of a `SwComponentPrototype` inside the `CompositionSwComponentType` (depicted by Figure 3.9), while the other, because it implements simpler semantics, does not need the `SwComponentPrototype`.

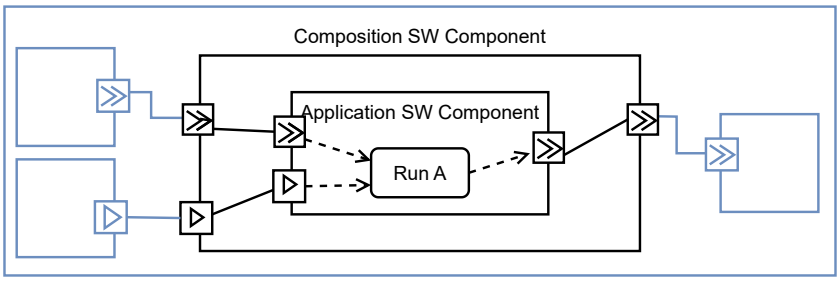

Figure 3.9: Software component exists inside composition

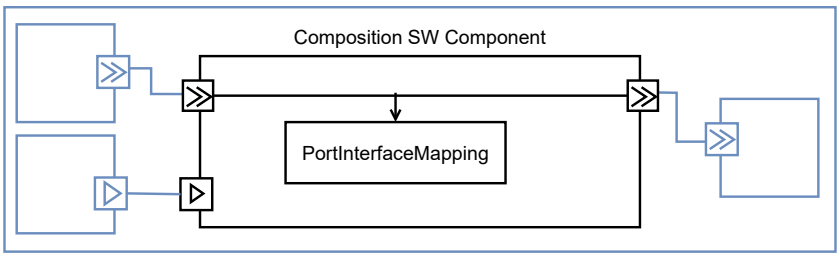

Figure 3.10: Lack of software component inside composition provides a use case for `PassThroughSwConnector`

Class	***SwConnector*** (abstract)			
Note	The base class for connectors between ports. Connectors have to be identifiable to allow references from the system constraint template.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	AssemblySwConnector, DelegationSwConnector, PassThroughSwConnector			
Aggregated by	*AtpClassifier*.atpFeature, CompositionSwComponentType.connector			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	SwConnector (abstract)			
mapping	PortInterfaceMapping	0..1	ref	Reference to a PortInterfaceMapping specifying the mapping of unequal named PortInterface elements of the two different PortInterfaces typing the two PortPrototypes which are referenced by the SwConnector. **Tags:** atp.Splitkey=mapping

Table 3.12: SwConnector

Class	AssemblySwConnector			
Note	AssemblySwConnectors are exclusively used to connect SwComponentPrototypes in the context of a CompositionSwComponentType.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *SwConnector*			
Aggregated by	*AtpClassifier*.atpFeature, CompositionSwComponentType.connector			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
provider	AbstractProvidedPort Prototype	0..1	iref	Instance of providing port. **Tags:** atp.Splitkey=provider, provider.contextComponent, provider.targetPPort **InstanceRef implemented by:** PPortInComposition InstanceRef
requester	AbstractRequiredPort Prototype	0..1	iref	Instance of requiring port. **Tags:** atp.Splitkey=requester, requester.context Component, requester.targetRPort **InstanceRef implemented by:** RPortInComposition InstanceRef

Table 3.13: AssemblySwConnector

[constr_10520] Multiplicity of AssemblySwConnector.provider

Imposition time: CP: IT_CompSwcT

⌈For each AssemblySwConnector, the reference AssemblySwConnector.provider shall exist.⌋

[constr_10521] Multiplicity of AssemblySwConnector.requester

Imposition time: CP: IT_CompSwcT

⌈For each AssemblySwConnector, the reference AssemblySwConnector.requester shall exist.⌋

Class	DelegationSwConnector			
Note	A delegation connector delegates one inner PortPrototype (a port of a component that is used inside the composition) to a outer PortPrototype of compatible type that belongs directly to the composition (a port that is owned by the composition).			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *SwConnector*			
Aggregated by	*AtpClassifier*.atpFeature, CompositionSwComponentType.connector			
Attribute	**Type**	**Mult.**	**Kind**	**Note**

▽

△

Class	DelegationSwConnector			
innerPort	PortPrototype	0..1	iref	The port that belongs to the ComponentPrototype in the composition **Tags:** atp.Splitkey=innerPort, innerPort.context Component, innerPort.targetPPort, innerPort.targetRPort **InstanceRef implemented by:** PortInCompositionType InstanceRef
outerPort	PortPrototype	0..1	ref	The port that is located on the outside of the Composition Type **Tags:** atp.Splitkey=outerPort

Table 3.14: DelegationSwConnector

[constr_1860] Multiplicity of `DelegationSwConnector.innerPort`

Imposition time: CP: `IT_CompSwcT`

⌈For each `DelegationSwConnector`, the reference `DelegationSwConnector.innerPort` shall exist.⌋

[constr_1861] Multiplicity of `DelegationSwConnector.outerPort`

Imposition time: CP: `IT_CompSwcT`

⌈For each `DelegationSwConnector`, the reference `DelegationSwConnector.outerPort` shall exist.⌋

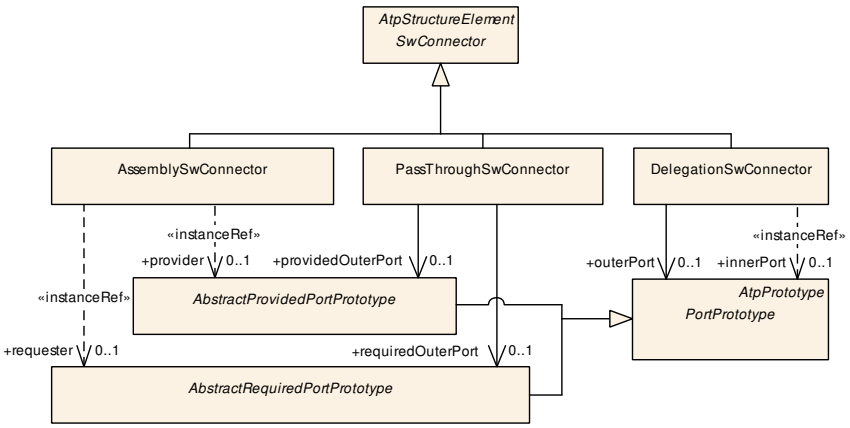

Figure 3.11: Connectors

Without the ability to define a `PassThroughSwConnector` the second variant could only be implemented by defining a dummy `SwComponentPrototype` inside the `CompositionSwComponentType`.

However, the dummy `SwComponentPrototype` would need to define `RunnableEntity`s that are created for the sole purpose of being able to pass the data from (e.g. for sender-receiver communication) `RPortPrototype`s to `PPortPrototype`s.

This would not only be cumbersome, it would also obviously require additional resources (memory and code) at run-time. Plus, the existence of additional `RunnableEntity`s also unnecessarily increases the propagation delay of information flowing around inside the ECU.

[TPS_SWCT_01507] The role of PassThroughSwConnector ⌈PassThroughSwConnector can be used to connect PortPrototypes owned by the same CompositionSwComponentType. In other words, PassThroughSwConnector creates a bypass inside a CompositionSwComponentType from the requiredOuterPort to the providedOuterPort (or vice versa) without involving SwComponentPrototypes.⌋

[constr_1252] Creation of a loop involving a PassThroughSwConnector is not allowed

Imposition time: CP: IT_CompSwcT

⌈A PassThroughSwConnector is not allowed if the required outer PortPrototype is directly or indirectly connected to the provided outer PortPrototype without the placement of a SwComponentPrototype typed by an AtomicSwComponentType in the chain of SwConnectors.⌋

In other words, according to [constr_1252] it is not allowed to create an "infinite loop" by means of a PassThroughSwConnector and at least one AssemblySwConnector that connects the requiredOuterPort to the providedOuterPort.

Class	**PassThroughSwConnector**			
Note	This kind of SwConnector can be used inside a CompositionSwComponentType to connect two delegation PortPrototypes.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *SwConnector*			
Aggregated by	*AtpClassifier*.atpFeature, CompositionSwComponentType.connector			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
providedOuterPort	AbstractProvidedPortPrototype	0..1	ref	This represents the provided outer delegation PortPrototype of the PassThroughSwConnector. **Tags:** atp.Splitkey=providedOuterPort
requiredOuterPort	AbstractRequiredPortPrototype	0..1	ref	This represents the required outer delegation PortPrototype of the PassThroughSwConnector. **Tags:** atp.Splitkey=requiredOuterPort

Table 3.15: PassThroughSwConnector

[constr_1862] Multiplicity of PassThroughSwConnector.requiredOuterPort

Imposition time: CP: IT_CompSwcT, AP: IT_BefAraApiGen

⌈For each PassThroughSwConnector, the reference PassThroughSwConnector.requiredOuterPort shall exist.⌋

[constr_1863] Multiplicity of PassThroughSwConnector.providedOuterPort

Imposition time: CP: IT_CompSwcT, AP: IT_BefAraApiGen

⌈For each PassThroughSwConnector, the reference PassThroughSwConnector.providedOuterPort shall exist.⌋

[TPS_SWCT_01843] Value of PassThroughSwConnector.category ⌈Meta-class PassThroughSwConnector can be used in different contexts:

- The PassThroughSwConnector is designed to implement VFB communication and therefore is considered in the generation of the RTE. In this case the attribute PassThroughSwConnector.category should either not exist or should be set to the value VFB.
- The PassThroughSwConnector is used to support the early design of a signal/service translation. At some point, the early design is replaced by actual ApplicationSwComponentTypes that ultimately implement the intended communication path sketched by the early design on the VFB.

  For more details about designing a signal/service translation by means of aPassThroughSwConnector, please refer to the [9, System Template]. To indicate the use of the PassThroughSwConnector for the early design purpose, the value of the attribute PassThroughSwConnector.category should be set to S2S_DESIGN.

⌋

Please note that, on the AUTOSAR adaptive platform, the PassThroughSwConnector is also used for the design of a signal/service translation in a way that is very similar to the approach described in the [9, System Template]. More details can be found in the [12, TPS Manifest Specification].

3.3.4 Instantiation-specific RTE Events

[TPS_SWCT_02507] Instantiation-specific RTEEvents ⌈It is possible to specify instantiation-specific properties of an RTEEvent by applying InstantiationRTEEventProps in the role instantiationRTEEventProps.

This allows the same ApplicationSwComponentType to be used in different timing scenarios. Even if the scheduling is an issue of the SwcInternalBehavior, the instance-specific definition of timing needs to be specified on the level of a CompositionSwComponentType.⌋

As an example of [TPS_SWCT_02507], please consider a software component that implements a closed-loop control algorithm.

This software component can potentially be deployed to “slow” and “fast” control scenarios. As the actual time base of the control algorithm is derived from the scheduling implemented in the RTE, it obviously facilitates the overall design if the timing can be defined at “instance” level.

[constr_1233] InstantiationTimingEventProps shall only reference TimingEvent

Imposition time: CP: IT_RteGen

⌈An InstantiationTimingEventProps shall only reference TimingEvent in the role refinedEvent. A reference to other kinds of RTEEvents is not supported.⌋

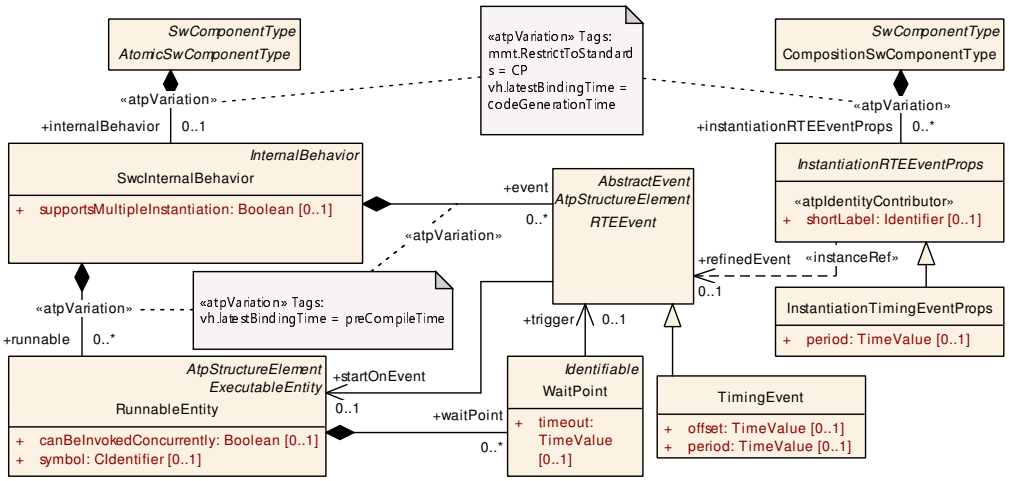

Figure 3.12: Instantiation-specific properties of RTEEvents

Class	**InstantiationTimingEventProps**			
Note	This meta-class represents the ability to refine a timing event for particular instances of a software component. This approach supports an instance specific timing.			
Base	*ARObject*, *InstantiationRTEEventProps*			
Aggregated by	CompositionSwComponentType.instantiationRTEEventProps			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
period	TimeValue	0..1	attr	This attribute represents the value of the refined activation period.

Table 3.16: InstantiationTimingEventProps

[constr_1864] Multiplicity of `InstantiationRTEEventProps.refinedEvent`

Imposition time: CP: `IT_RteGen`

⌈For each `InstantiationRTEEventProps`, the instance-reference in the role `refinedEvent` shall exist.⌋

Please note that the attribute `shortLabel` only contributes to model semantics if the ability to split the definition of the aggregation`CompositionSwComponentType.instantiationRTEEventProps` over several physical files is actually used[1].

More explanation about the ability to split models over physical files can be found in the [10, TPS Generic Structure Template].

Class	***InstantiationRTEEventProps*** (abstract)
Note	This meta-class represents the ability to refine the properties of `RTEEvent`s for particular instances of a software component.
Base	*ARObject*
Subclasses	InstantiationTimingEventProps
Aggregated by	CompositionSwComponentType.instantiationRTEEventProps

▽

[1] In which case the `shortLabel` serves as part of the splitkey

△

Class	***InstantiationRTEEventProps*** (abstract)			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
refinedEvent	RTEEvent	0..1	iref	This instance ref denotes the Timing Event for which the period shall be refined on an instance level. **Tags:** atp.Splitkey=refinedEvent, refinedEvent.context ComponentPrototype, refinedEvent.targetEvent **InstanceRef implemented by:** InstanceEventIn CompositionInstanceRef
shortLabel	Identifier	0..1	attr	The main purpose of the shortLabel is to contribute to the splitability. **Stereotypes:** atpIdentityContributor

Table 3.17: InstantiationRTEEventProps

4 Communication among Software Components

4.1 Introduction

Besides the dominant communication patterns

- *client/server* (operation-based) communication and
- *sender/receiver* (data-based) communication,

further communication patterns are supported:

- *trigger* communication,
- *mode* communication, and
- *parameter* "communication".

For each of the mentioned patterns, dedicated PortInterfaces (an overview is presented in chapter Chapter 4.2, for more details see Chapter 4.3) exist. It is also possible to configure the dynamic communication behavior on the level of individual PortPrototypes by means of a so-called "communication specification" (short "ComSpec") (see Chapter 4.6).

[TPS_SWCT_01516] PortInterface describes the static structure of information interchange ⌈PortInterfaces are limited to the description of the static structure of the exchanged information; the dynamic attributes relevant for communication are attached to PortPrototypes.⌋

An important aspect that contributes to the reusability of software components in different contexts is discussed in chapter Chapter 4.4.

Furthermore, this chapter describes the grouping of PortPrototypes in the form of a PortGroup (see Chapter 4.7) and the application of this mechanism to the definition of *partial networks*, as described in Chapter 4.8.

Finally, the configuration of the communication behavior for implicit communication is described, see Chapter 4.9.

4.2 Port Interface Overview

[TPS_SWCT_01025] The role of PortPrototypes in the AUTOSAR architecture ⌈A PortPrototype mainly contributes the functionality of being a *connection point* to the AUTOSAR concept.

The details, i.e. with respect to what kind of information is actually transported between two PortPrototypes is defined by the PortInterface.⌋

[TPS_SWCT_01026] The role of PortInterfaces in the AUTOSAR architecture ⌈PortInterfaces are used to support a design-by-contract work-flow, i.e. a PortInterface provides means to formally verify structural and dynamic compatibility between software components.⌋

In other words: PortInterfaces (see Figure 4.2) represent a pivotal point in the AUTOSAR concept.

Please note that a PortInterface creates a name space for the information contained. This allows for defining the details of a specific PortInterface without having to care for possible side effects on other PortInterfaces. Again, this property of the AUTOSAR concept directly supports re-usability.

[TPS_SWCT_01027] Different flavors of PortInterfaces ⌈Within the AUTOSAR concept, different flavors of PortInterfaces are defined:

- SenderReceiverInterface
- NvDataInterface
- ParameterInterface
- ModeSwitchInterface
- ClientServerInterface
- TriggerInterface

⌋

[TPS_SWCT_01069] DataInterface is defined as abstract base class ⌈Please note that the conceptual relationship of SenderReceiverInterface, NvDataInterface, and ParameterInterface is expressed by the definition of the abstract base class DataInterface.⌋

Please find more details about the specialization of the PortInterface concept in Chapter 4.3.2 and Chapter 4.3.1.

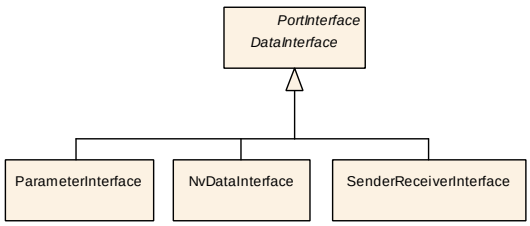

Figure 4.1: DataInterface as an abstract base class

[TPS_SWCT_01070] PortInterface acts as a *type* for a PortPrototype ⌈From an abstract point of view, a PortInterface acts as a *type* for a PortPrototype. This means in particular that several PortPrototypes can be typed by the same PortInterface.⌋

Class	***PortInterface*** (abstract)			
Note	Abstract base class for an interface that is either provided or required by a port of a software component.			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Subclasses	ClientServerInterface, *DataInterface*, ModeSwitchInterface, TriggerInterface			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
isService	Boolean	0..1	attr	This flag is set if the `PortInterface` is to be used for communication between an • `ApplicationSwComponentType` or • `ServiceProxySwComponentType` or • `SensorActuatorSwComponentType` or • `ComplexDeviceDriverSwComponentType` • `ServiceSwComponentType` • `EcuAbstractionSwComponentType` and a `ServiceSwComponentType` (namely an AUTOSAR Service) located on the same ECU. Otherwise the flag is not set. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=blueprintDerivationTime This Attribute is only used by the AUTOSAR Classic Platform.
serviceKind	ServiceProviderEnum	0..1	attr	This attribute provides further details about the nature of the applied service. This Attribute is only used by the AUTOSAR Classic Platform.

Table 4.1: PortInterface

Class	***DataInterface*** (abstract)			
Note	The purpose of this meta-class is to act as an abstract base class for subclasses that share the semantics of being concerned about data (as opposed to e.g. operations).			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *PortInterface*, *Referrable*			
Subclasses	NvDataInterface, ParameterInterface, SenderReceiverInterface			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 4.2: DataInterface

Of course, this aspect facilitates the creation of valid connections between software components dramatically. By using a specific `PortInterface` for typing particular `PortPrototype`s the latter are eligible for being connected to each other by definition.

However, the creation of a valid connection does not need to be based on the usage of identical `PortInterface`s. It is also possible to use different, but *compatible* `PortInterface`s. The details about compatibility of `PortInterface`s are described in chapter Chapter 6.

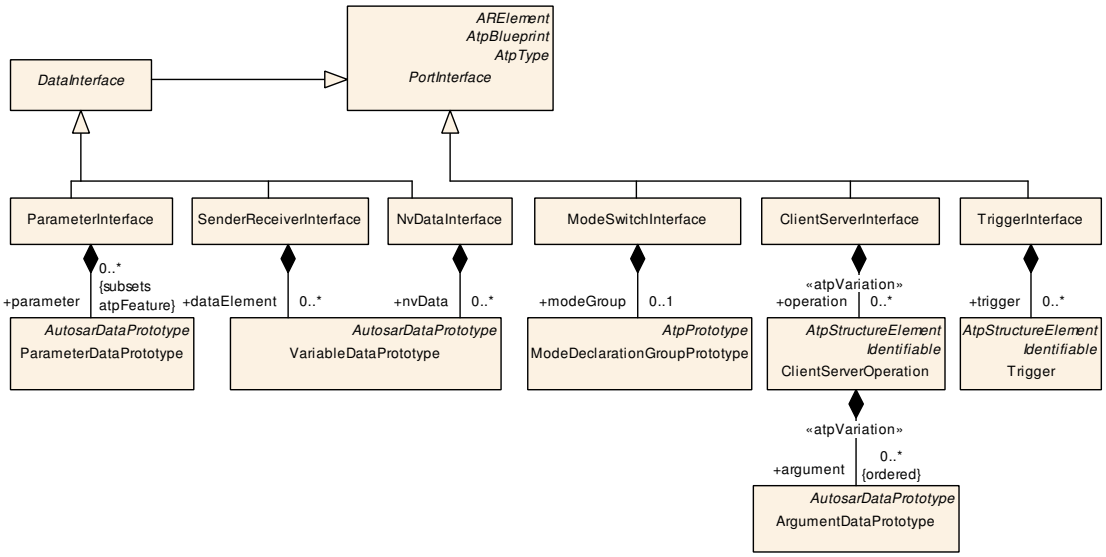

Figure 4.2: PortInterfaces in the AUTOSAR meta-model

[constr_1036] Connect kinds of PortInterfaces

Imposition time: CP: IT_RteGen

⌈It shall not be possible to connect PortPrototypes typed by PortInterfaces of different kinds.

Subclasses of DataInterface make an exception to this rule and can be used for creating connections to each other.⌋

For clarification, a connection between a PortPrototype typed by a SenderReceiverInterface and a PortPrototype typed by a ClientServerInterface shall not be possible. However, the creation of a connection between a PortPrototype typed by a SenderReceiverInterface and a PortPrototype typed by a ParameterInterface is supported.

[constr_1137] Applicability of ParameterInterface

Imposition time: CP: IT_CpgExe

⌈A PPortPrototype typed by a ParameterInterface can **only** be owned by a ParameterSwComponentType or a CompositionSwComponentType.⌋

Please note that PortInterfaces also play an important role in the context of defining so-called AUTOSAR services. In particular, by means of the attribute isService a PortInterface can define whether it is supposed to be used in the context of an AUTOSAR service and in addition to this it may define (by means of the attribute serviceKind) what kind of service is intended.

The creation of an AssemblySwConnector between PortPrototypes where the respective PortInterfaces have set attribute isService to true puts requirements on the nature of the enclosing SwComponentTypes.

For example, it does not make sense to establish a service communication between two SwComponentPrototypes that each are typed by ApplicationSwComponentTypes. For service communication, at least one of the participating SwComponentPrototypes has be to be typed by a ServiceSwComponentType.

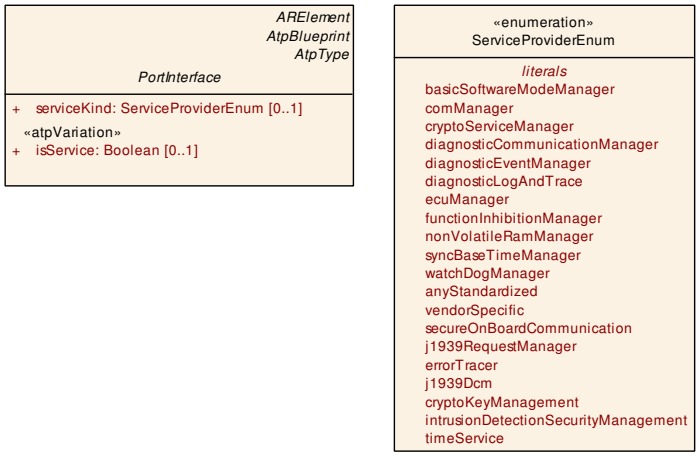

Figure 4.3: PortInterfaces and AUTOSAR services

[constr_10067] Creation of AssemblySwConnector for service communication

Imposition time: CP: IT_RteGen

⌈If an AssemblySwConnector is created between two PortPrototypes and the affected PortInterfaces set the attribute isService to the value true, then at least one of the SwComponentPrototypes shall be typed by a ServiceSwComponentType.⌋

The information contained in serviceKind can be used in various ways. The primary intent is to distinguish between the usage of standardized AUTOSAR services from the usage of a vendor-specific service. This information may have an impact on the development- and build process of software components that use the PortInterface.

In addition, it is also possible to use the information contained in serviceKind for filtering the presentation of an AUTOSAR model in an AUTOSAR authoring tool and e.g. display the nature of the service PortPrototypes independently of the content of the corresponding PortInterface.

[TPS_SWCT_01003] Inconsistencies regarding the value of serviceKind and the actual implementation of the PortInterface ⌈In the case of inconsistencies between the value of serviceKind and the actual implementation of the PortInterface the implementation of the PortInterface wins over the value of attribute PortInterface.serviceKind (which, for the intended purpose shall be considered an annotation rather than a semantically binding information).⌋

[TPS_SWCT_01004] Specific default value if serviceKind is not defined ⌈if the attribute serviceKind is not defined in the context of a specific PortInterface the default value anyStandardized shall be assumed.⌋

[constr_1174] PortInterfaces used in the context of CompositionSwComponentTypes cannot refer to AUTOSAR services

Imposition time: CP: IT_CompSwcT

⌈CompositionSwComponentTypes shall not own PortPrototypes typed by PortInterfaces where the attribute isService is set to true.⌋

Enumeration	**ServiceProviderEnum**
Note	This represents a list of possible service providers.
Aggregated by	*PortInterface*.serviceKind
Literal	***Description***
anyStandardized	This value means that the specific nature is either unknown or it is not important for the given purpose. This is also the default value for any attribute of type ServiceProviderEnum. **Tags:** atp.EnumerationLiteralIndex=0
basicSoftwareMode Manager	The service relates to the Basic Software Mode Manager (BswM). **Tags:** atp.EnumerationLiteralIndex=1
comManager	The service relates to the COM Manager (ComM). **Tags:** atp.EnumerationLiteralIndex=2
cryptoKey Management	The service relates to the Key Manager (KeyM). **Tags:** atp.EnumerationLiteralIndex=23
cryptoService Manager	The service relates to the Crypto Service Manager (CsM). **Tags:** atp.EnumerationLiteralIndex=3
defaultErrorTracer	The service relates to the Default Error Tracer (DET). **Tags:** atp.EnumerationLiteralIndex=4
diagnostic Communication Manager	The service relates to the Diagnostic Communication Manager (DCM). **Tags:** atp.EnumerationLiteralIndex=6
diagnosticEvent Manager	The service relates to the Diagnostic Event Manager (DEM). **Tags:** atp.EnumerationLiteralIndex=7
diagnosticLogAnd Trace	The service relates to the Diagnostic Log and Trace (DLT). **Tags:** atp.EnumerationLiteralIndex=8
ecuManager	The service relates to the ECU Manager (EcuM). **Tags:** atp.EnumerationLiteralIndex=9
errorTracer	This service relates to the error tracer. **Tags:** atp.EnumerationLiteralIndex=18
functionInhibition Manager	The service relates to the Function Inhibition Manager (FIM). **Tags:** atp.EnumerationLiteralIndex=10
intrusionDetection Security Management	The service relates to the intrusion detection security management (IdsM). **Tags:** atp.EnumerationLiteralIndex=24
j1939Dcm	This service relates to the J1939 Dcm. **Tags:** atp.EnumerationLiteralIndex=22
j1939Request Manager	The service relates to the J1939Rm. **Tags:** atp.EnumerationLiteralIndex=11
nonVolatileRam Manager	The service relates to the Non-Volatile RAM Manager (NvM). **Tags:** atp.EnumerationLiteralIndex=12

▽

△

Enumeration	ServiceProviderEnum
secureOnBoard Communication	The service relates to the SecOc module. **Tags:** atp.EnumerationLiteralIndex=14
syncBaseTime Manager	The service relates to the Sync Time Base Manager (StbM). **Tags:** atp.EnumerationLiteralIndex=15
timeService	The service relates to the provision of general-purpose timers. **Tags:** atp.EnumerationLiteralIndex=25
vendorSpecific	This value denotes a vendor-specific service. **Tags:** atp.EnumerationLiteralIndex=16
watchDogManager	The service relates to the Watchdog Manager (WdgM). **Tags:** atp.EnumerationLiteralIndex=17

Table 4.3: ServiceProviderEnum

Please find more details about the relation of `PortInterface`s to AUTOSAR services in Chapter 11.

The usage of value encodings (for more information please refer to Chapter 5.2.6) is limited within the context of `PortInterface`s.

[constr_10383] Supported value encodings for `SwBaseType` in the context of `PortInterface`s where attribute `isService` is set to `false`

Imposition time: CP: `IT_CpgExe`

⌈The supported value encodings for the usage within a `PortInterface` where attribute `isService` is set to `false` are:

- `2C`: Two's complement
- `IEEE754`: floating-point numbers
- `ISO-8859-1`: single-byte coded character
- `ISO-8859-2`: single-byte coded character
- `WINDOWS-1252`: single-byte coded character
- `UTF-8`: UCS Transformation Format 8
- `UTF-16`: Character encoding for Unicode code points based on 16 bit code units, see [13, ISO 10646]
- `UCS-2`: Universal Character Set 2
- `NONE`: Unsigned Integer
- `BOOLEAN`: This represents an integer to be interpreted as boolean.

⌋

Please note that the limitation formulated in [constr_10383] is **only applicable for non-service communication**. Service-level communication can utilize further encodings, as documented in [TPS_SWCT_01845].

[constr_1046] Applicability of [TPS_SWCT_01845]

Imposition time: CP: IT_CpgExe

⌈[TPS_SWCT_01845] applies **only** if the value of the attribute isService is set to false.⌋

[constr_1295] PortInterfaces and category DATA_REFERENCE

Imposition time: CP: IT_CpgExe

⌈A DataPrototype defined in the context of a PortInterface used by an

- ApplicationSwComponentType or
- SensorActuatorSwComponentType

that is (after potential indirections via TYPE_REFERENCE are resolved) either typed by or mapped to an ImplementationDataType of category DATA_REFERENCE shall only be used if either the provider or the requester of the information represents

- a ServiceSwComponentType,
- a ComplexDeviceDriverSwComponentType,
- a ParameterSwComponentType,
- an NvBlockSwComponentType, or
- an EcuAbstractionSwComponentType.

⌋

Please note that the wording ("DataPrototype") in [constr_1295] indicates that it covers the existence of (after all indirections are resolved) ImplementationDataType of category DATA_REFERENCE on all levels, including deep in a potential deeply nested type hierarchy.

Please note further that [constr_1295] corresponds to [SWS_Rte_07670].

4.3 Port Interface Details

4.3.1 Sender Receiver Communication

4.3.1.1 Sender Receiver Interface

[TPS_SWCT_01114] **SenderReceiverInterface** ⌈SenderReceiverInterfaces allow the specification of the typically asynchronous communication pattern in which a sender provides data that is required by one or more receivers.

While the actual communication takes place via the respective PortPrototypes, a SenderReceiverInterface allows formally describing what kind of information is sent and received.⌋

A SenderReceiverInterface focuses on the description of information items represented by VariableDataPrototypes (see Chapter 5.3).

A VariableDataPrototype aggregated in the role of dataElement represents an atomic[1] piece of information transmitted among PortPrototypes typed by a SenderReceiverInterface.

Class	**SenderReceiverInterface**			
Note	A sender/receiver interface declares a number of data elements to be sent and received. **Tags:** atp.recommendedPackage=PortInterfaces			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *DataInterface*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *PortInterface*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataElement	VariableDataPrototype	*	aggr	The data elements of this SenderReceiverInterface. **Tags:** atp.Splitkey=dataElement, dataElement.shortName
invalidationPolicy	InvalidationPolicy	*	aggr	InvalidationPolicy for a particular dataElement **Tags:** atp.Splitkey=invalidationPolicy
metaDataItemSet	MetaDataItemSet	*	aggr	This aggregation defines fixed sets of meta-data items associated with dataElements of the enclosing SenderReceiverInterface **Tags:** atp.Splitkey=metaDataItemSet

Table 4.4: SenderReceiverInterface

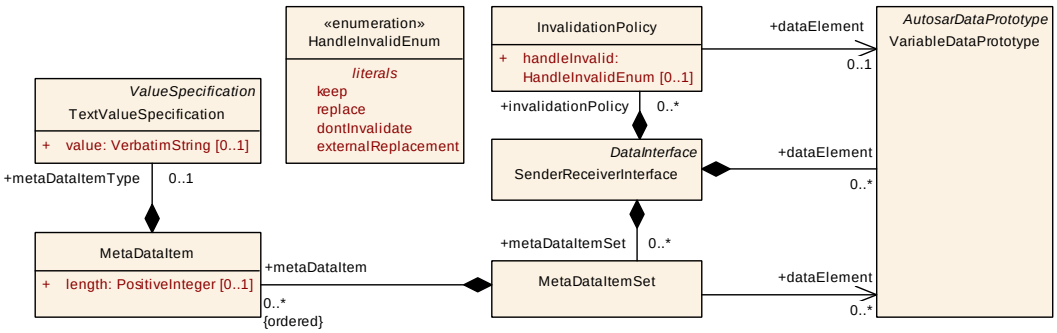

Figure 4.4: dataElements of a SenderReceiverInterface

Note that a SenderReceiverInterface provides a name space for the definition of VariableDataPrototypes.

In terms of the AUTOSAR meta-model, this aspect is indicated by the inheritance relation to DataPrototype (which in turn inherits from Identifiable). More information on the creation of name spaces can be found in the [10, TPS Generic Structure Template].

[TPS_SWCT_01116] **swImplPolicy** ⌈The swImplPolicy indicates the way in which a VariableDataPrototype shall be processed at the receiver's side. If set to queued, the semantics is that the corresponding VariableDataPrototype needs

[1] Note that the term "atomic" does not imply anything about the implementation on a concrete computing platform.

to be added to a *queue* (in other words, a FIFO data structure) from which it is later consumed by the actual receiver software component.⌋

Please note that the swImplPolicy is described in Chapter 5.4.

[constr_1200] Queued communication is not applicable for dataElements owned by PRPortPrototype

Imposition time: CP: IT_CpgExe

⌈The swImplPolicy shall not be set to queued for any dataElement owned by a PRPortPrototype.⌋

[TPS_SWCT_01176] last-is-best semantics for sender-receiver communication ⌈If swImplPolicy is set to any other valid value of SwImplPolicyEnum, *last is best* semantics applies.⌋

Please note that the definition of VariableDataPrototype may come very close to the reader's idea of a *signal*. However, different kinds of signals have a specific meaning in the AUTOSAR concept, especially in the context of the [9, TPS System Template].

4.3.1.2 Communication Patterns for Sender Receiver Communication

[TPS_SWCT_01117] Communication patterns for sender-receiver communication ⌈PortPrototypes typed by a SenderReceiverInterface may be connected to establish a 1:n (i.e. one sender, multiple receivers) communication relationship. It is also possible to establish an n:1 (i.e. many senders, one receiver) communication pattern.⌋

[constr_1202] Supported connections by AssemblySwConnector between PortPrototypes typed by a SenderReceiverInterface or NvDataInterface

Imposition time: CP: IT_CompSwcT

⌈

	RPortPrototype	PPortPrototype	PRPortPrototype
RPortPrototype	No	**Yes**	**Yes**
PPortPrototype	**Yes**	No	**Yes**
PRPortPrototype	**Yes**	**Yes**	**Yes**

⌋

[constr_1033] Communication scenarios for sender/receiver communication

Imposition time: CP: IT_CompSwcT

⌈For sender/receiver communication, it is not allowed to create a communication scenario where n senders are connected to m receivers, where m and n are **both** greater than 1.⌋

Note that [constr_1033] is not applicable to a scenario where several PRPortPrototypes are connected by a chain of AssemblySwConnectors or PassThroughSwConnectors.

[constr_1203] Supported connections by DelegationSwConnector between PortPrototypes typed by a SenderReceiverInterface or NvDataInterface

Imposition time: CP: IT_CompSwcT

⌈

innerPort	outerPort		
	RPortPrototype	PPortPrototype	PRPortPrototype
RPortPrototype	**Yes**	No	**Yes**
PPortPrototype	No	**Yes**	**Yes**
PRPortPrototype	**Yes**	**Yes**	**Yes**

⌋

4.3.1.3 Invalidation Policy

[TPS_SWCT_01115] invalidationPolicy ⌈An invalidationPolicy specifies whether the sending component can actively invalidate a particular dataElement and which strategy of handling the reception of invalidValue on the receiver side shall be implemented.⌋

Further information about the related concept of an invalidValue is provided in Chapter 5.4.2.

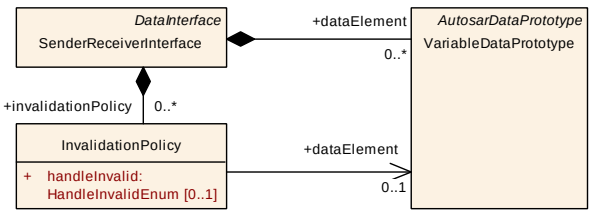

Figure 4.5: Modeling of invalidation policy of a SenderReceiverInterface

[constr_1865] Existence of InvalidationPolicy.dataElement

Imposition time: CP: IT_CpgExe

⌈For each InvalidationPolicy, the reference InvalidationPolicy.dataElement shall exist.⌋

[constr_10118] Structural consistency of the modeling of InvalidationPolicy

Imposition time: CP: IT_CpgExe

⌈A dataElement referenced by an InvalidationPolicy shall be owned by the SenderReceiverInterface that also owns the InvalidationPolicy.⌋

Technically, even in the presence of [constr_10118], it would still be possible to refer to the same SenderReceiverInterface.dataElement from different InvalidationPolicys.

Therefore, a further constraint applies: for each dataElement owned by a SenderReceiverInterface, at most a single InvalidationPolicy shall be defined.

[constr_10119] SenderReceiverInterface.dataElement shall be referenced by at most one InvalidationPolicy

Imposition time: CP: IT_CpgExe

⌈Any SenderReceiverInterface.dataElement shall be referenced by at most one InvalidationPolicy in the role InvalidationPolicy.dataElement.⌋

Class	**InvalidationPolicy**			
Note	Specifies whether the component can actively invalidate a particular dataElement. If no invalidationPolicy points to a dataElement this is considered to yield the identical result as if the handleInvalid attribute was set to dontInvalidate.			
Base	*ARObject*			
Aggregated by	SenderReceiverInterface.invalidationPolicy			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataElement	VariableDataPrototype	0..1	ref	Reference to the dataElement for which the InvalidationPolicy applies. **Tags:** atp.Splitkey=dataElement
handleInvalid	HandleInvalidEnum	0..1	attr	This attribute controls how invalidation is applied to the dataElement.

Table 4.5: InvalidationPolicy

Enumeration	**HandleInvalidEnum**
Note	Strategies of handling the reception of invalidValue.
Aggregated by	InvalidationPolicy.handleInvalid, ISignalPort.handleInvalid
Literal	***Description***
dontInvalidate	Invalidation is switched off. **Tags:** atp.EnumerationLiteralIndex=0
external Replacement	Replace a received invalidValue. The replacement value is sourced from the aggregation in the role replaceWith. **Tags:** atp.EnumerationLiteralIndex=1
keep	The application software is supposed to handle signal invalidation on RTE API level either by Data ReceiveErrorEvent or check of error code on read access. **Tags:** atp.EnumerationLiteralIndex=2
replace	Replace a received invalidValue. The replacement value is specified by the initValue. **Tags:** atp.EnumerationLiteralIndex=3

Table 4.6: HandleInvalidEnum

4.3.1.4 Meta-data on the Application Software Level

There are cases where information available on different levels of the AUTOSAR basic software stack needs to be made available as meta-data on the application layer for the overall software to function properly.

One example could be a software component that is involved with communication using the J1939 protocol.

In such a case, the semantics of the information transmitted is strongly bound to the source address, and the sender needs to be able to set the source address individually.

[TPS_SWCT_01801] Support for Meta-Data ⌈Meta-data on the application software level can only be made available in the context of a SenderReceiverInterface. No other kind of PortInterface supports the definition of meta-data.⌋

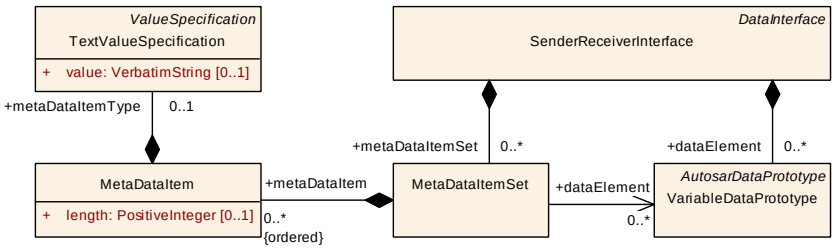

Figure 4.6: Modeling of meta-data of a SenderReceiverInterface

[TPS_SWCT_01802] Definition of meta-data in the context of a SenderReceiverInterface ⌈The definition of meta-data in the context of a SenderReceiverInterface involves two aspects:

- The available meta-data are defined by means of an ordered aggregation of meta-class MetaDataItem at MetaDataItemSet which in turn is aggregated in the role SenderReceiverInterface.metaDataItemSet.
- The involvement of dataElements with meta-data is specified by means of the reference MetaDataItemSet.dataElement. In other words, the dataElements that are referenced by a MetaDataItemSet in the role dataElement are involved with meta-data handling.

⌋

Class	**MetaDataItem**			
Note	This meta-class represents a single meta-data item.			
Base	*ARObject*			
Aggregated by	MetaDataItemSet.metaDataItem			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
length	PositiveInteger	0..1	attr	This attribute determines the length of the MetaDataItem at run-time. The length is given in bytes.
metaDataItem Type	TextValueSpecification	0..1	aggr	This aggregation contributes the specification of the concrete meta-data item type.

Table 4.7: MetaDataItem

Class	**MetaDataItemSet**			
Note	This meta-class represents the ability to define a set of meta-data items to be used in SenderReceiverInterfaces.			
Base	*ARObject*			
Aggregated by	SenderReceiverInterface.metaDataItemSet			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataElement	VariableDataPrototype	*	ref	This reference identifies the dataElement for which the ordered list of meta-data items is defined. **Tags:** atp.Splitkey=dataElement
metaDataItem (ordered)	MetaDataItem	*	aggr	This aggregation represents the ordered definition of meta-data items.

Table 4.8: MetaDataItemSet

[constr_1726] Ordering of MetaDataItemSet.metaDataItem

Imposition time: CP: IT_CpgExe

⌈The ordering of the elements of MetaDataItemSet.metaDataItem shall be **descending** with respect to the value of MetaDataItem.length, such that the MetaDataItem with the largest value of attribute length is located in the first position and the MetaDataItem with the smallest value of attribute length is located in the last position.⌋

Although the ordering is significant in the meta-model, it is still possible, when creating the ordered collection, to put MetaDataItems with the same value of attribute length in arbitrary order into the collection.

In an existing collection, however, the ordering is semantically relevant even for elements with the same value of attribute length.

[TPS_SWCT_01804] Standardized values of attribute MetaDataItem.metaDataItemType.value

⌈The following values of attribute MetaDataItem.metaDataItemType.value are standardized by AUTOSAR:

- PRIORITY_8
- SOURCE_ADDRES_16
- TARGET_ADDRESS_16
- ADDRESS_EXTENSION_8
- SOCKET_CONNECTION_ID_16
- LIN_NAD_8
- CAN_ID_32
- ETHERNET_MAC_64
- ACCEPTANCEFIELD_32
- CAN_ID_PROPS_8
- MESSAGE_TIMESTAMP_64

- MESSAGE_TIMESTAMP_VALID_8
- PRIORITY_16
- SDUTYPE_8
- VLAN_16

⌋

Please note that an explanation for the meaning of the standardized values of MetaDataItem.metaDataItemType.value given in [TPS_SWCT_01804] can be found in [14, TPS ECU Configuration] Chapter 3.3.8 *"Pdu Meta-Data"*.

TPS ECU Configuration defines a number of additional meta-data item values that are not mentioned in [TPS_SWCT_01804]. The reason for this omission is that the additional meta-data values are meant to be processed by lower-layer modules in the stack and therefore do not reach the layer of application software.

[constr_1866] Existence of MetaDataItem.length

Imposition time: CP: IT_CpgExe

⌈For each MetaDataItem, attribute length shall exist.⌋

[constr_1867] Existence of MetaDataItem.metaDataItemType

Imposition time: CP: IT_CpgExe

⌈For each MetaDataItem, attribute metaDataItemType shall exist.⌋

[constr_1868] Existence of MetaDataItemSet.dataElement

Imposition time: CP: IT_CpgExe

⌈For each MetaDataItemSet that aggregates at least one metaDataItem, at least one reference to a dataElement shall exist.⌋

[constr_10120] Structural consistency of the modeling of MetaDataItemSet

Imposition time: CP: IT_CpgExe

⌈A dataElement referenced by an MetaDataItemSet in the role dataElement shall be owned by the SenderReceiverInterface that also owns the MetaDataItemSet.⌋

Technically, even in the presence of [constr_10120], it would still be possible to refer to the same SenderReceiverInterface.dataElement from different MetaDataItemSets.

However, this is not allowed because the aggregation of MetaDataItem at MetaDataItemSet is qualified as ordered, and therefore it would be very difficult to semantically merge the content of different MetaDataItemSets to one set of meta-data items in the implementation.

Therefore, a further constraint applies: for each dataElement owned by a SenderReceiverInterface, at most a single MetaDataItemSet shall be defined.

[constr_10121] SenderReceiverInterface.dataElement shall be referenced by at most one MetaDataItemSet

Imposition time: CP: IT_CpgExe

⌈Any SenderReceiverInterface.dataElement shall be referenced by at most one MetaDataItemSet in the role MetaDataItemSet.dataElement.⌋

4.3.2 Client Server Communication

The underlying semantics of client/server communication is that a client may initiate the execution of an operation on a server that supports the operation.

The server executes the operation and, upon completion, provides the client with the result (synchronous operation call). Alternatively, the client checks for completion of the operation itself (asynchronous operation call).

[constr_1037] Client shall not be connected to multiple servers

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈A client shall not be connected to multiple servers such that an operation call would be handled by more than one server.⌋

4.3.2.1 Client Server Interface

A ClientServerInterface, to some extent, is a counterpart to the SenderReceiverInterface[2].

Instead of defining pieces of information to be transferred among software components, a ClientServerInterface defines a collection of ClientServerOperations.

Class	**ClientServerInterface**			
Note	A client/server interface declares a number of operations that can be invoked on a server by a client. **Tags:** atp.recommendedPackage=PortInterfaces			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *PortInterface*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

[2]However, different connection patterns apply, see [constr_1037].

△

Class	**ClientServerInterface**			
operation	ClientServerOperation	*	aggr	`ClientServerOperation`(s) of this `ClientServerInterface`. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=operation, operation.shortName, operation.variationPoint.shortLabel vh.latestBindingTime=blueprintDerivationTime This Attribute is only used by the AUTOSAR Classic Platform.
possibleError	ApplicationError	*	aggr	Application errors that are defined as part of this interface. **Tags:** atp.Splitkey=possibleError, possibleError.short Name

Table 4.9: ClientServerInterface

[TPS_SWCT_01118] **`ClientServerInterface`** ⌈A `ClientServerInterface` is composed of `ClientServerOperation`s, i.e. a `ClientServerOperation` cannot be reused in the context of a different `ClientServerInterface`.⌋

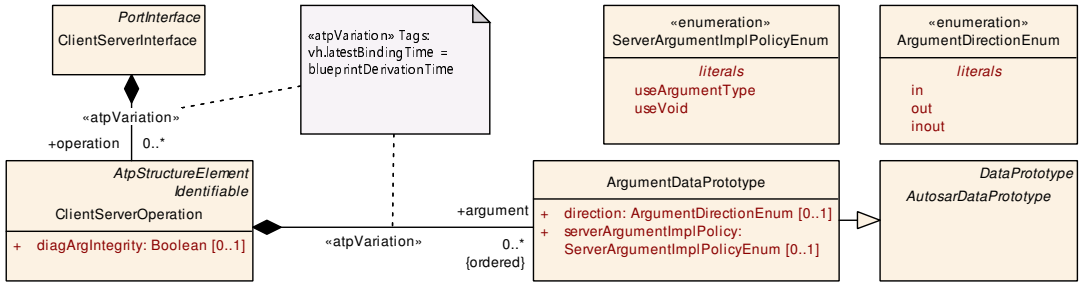

Figure 4.7: `ClientServerOperation`s of a `ClientServerInterface`

[TPS_SWCT_01106] **`ClientServerOperation`** ⌈A `ClientServerOperation` consists of 0..* `ArgumentDataPrototype`s. The latter may be

- passed to the operation (i.e. the direction is “in”)
- passed to and returned from the operation (i.e. the direction is “inout”)
- returned from the operation (i.e. the direction is “out”)

The aggregation represents a variation point.⌋

[TPS_SWCT_01844] Optional method arguments ⌈AUTOSAR does not support the existence of optional `argument`s within a `ClientServerOperation`.⌋

The reason for the restriction in [TPS_SWCT_01844] on the *AUTOSAR classic platform* is that the RTE does not have an API to handle optional method arguments.

[TPS_SWCT_01119] **Direction of `ArgumentDataPrototype`s** ⌈To cover these cases, `ArgumentDataPrototype` defines an attribute `direction`, possible values are `in` (pass to operation), `out` (return from operation), and `inout` (pass to and return from operation).⌋

In many common programming languages (such as *C*), an operation is yet another data type. This makes it possible, for example, to pass a reference to an operation as an argument to another operation.

This is *not* allowed in the AUTOSAR standard.

Essentially, all `ArgumentDataPrototype`s in a `ClientServerOperation` can be passed (conceptually) by value (from the client to the server and/or from the server to the client depending on the `direction` of the `ArgumentDataPrototype`).

Class	**ClientServerOperation**			
Note	An operation declared within the scope of a client/server interface.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ApplicationInterface.command, *AtpClassifier*.atpFeature, ClientServerInterface.operation, DiagnosticDataElementInterface.read, DiagnosticDataIdentifierInterface.read, DiagnosticDataIdentifierInterface.write, DiagnosticExtendedDataRecordInterface.provide, DiagnosticRoutineInterface.requestResult, DiagnosticRoutineInterface.start, DiagnosticRoutineInterface.stop, ServiceInterface.method			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
argument (ordered)	ArgumentDataPrototype	*	aggr	An argument of this `ClientServerOperation`. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=blueprintDerivationTime
diagArgIntegrity	Boolean	0..1	attr	This attribute shall only be used in the implementation of diagnostic routines to support the case where input and output arguments are allocated in a shared buffer and might unintentionally overwrite input arguments by tentative write operations to output arguments. This situation can happen during sliced execution or while output parameters are arrays (call by reference). The value true means that the `ClientServerOperation` is aware of the usage of a shared buffer and takes precautions to avoid unintentional overwrite of input arguments. If the attribute does not exist or is set to false the `ClientServerOperation` does not have to consider the usage of a shared buffer. This Attribute is only used by the AUTOSAR Classic Platform.
possibleError	ApplicationError	*	ref	Possible errors that may by raised by the referring operation. **Tags:** atp.Splitkey=possibleError This Attribute is only used by the AUTOSAR Classic Platform.

Table 4.10: ClientServerOperation

Class	**ArgumentDataPrototype**			
Note	An argument of an operation, carries direction and implementation information.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *AutosarDataPrototype*, *DataPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, ClientServerOperation.argument			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
direction	ArgumentDirectionEnum	0..1	attr	This attribute specifies the direction of the argument.

▽

△

Class	**ArgumentDataPrototype**			
serverArgument ImplPolicy	ServerArgumentImpl PolicyEnum	0..1	attr	This defines how the argument type of the servers RunnableEntity is implemented. If the attribute is not defined this has the same semantics as if the attribute is set to the value useArgumentType for primitive arguments and structures.

Table 4.11: ArgumentDataPrototype

[constr_1869] Existence of attribute ArgumentDataPrototype.direction

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈For each ArgumentDataPrototype, attribute direction shall be defined.⌋

[TPS_SWCT_01120] Client needs to provide ArgumentDataPrototypes ⌈When the client invokes an operation, it needs to provide a value for each ArgumentDataPrototype that is of direction in or inout.⌋

[TPS_SWCT_01121] Pass correct data type ⌈The value passed to an ArgumentDataPrototype of direction in or inout needs to be of the corresponding Datatype.⌋

[TPS_SWCT_01122] Synchronous call of ClientServerOperation ⌈In the case of synchronous operation call, the client expects to receive a response to the invocation of the operation.

As part of the response, it receives a value (of the correct AutosarDataType) for each ArgumentDataPrototype that is of direction out or inout.⌋

Each ClientServerOperation provides a namespace for its ArgumentDataPrototypes and therefore has a unique identifier that identifies the operation within the corresponding ClientServerInterface.

Enumeration	**ArgumentDirectionEnum**
Note	Use cases: • Arguments in ClientServerOperation can have different directions that need to be formally indicated because they have an impact on how the function signature looks like eventually. • Arguments in BswModuleEntry already determine a function signature, but the direction is used to specify the semantics, especially of pointer arguments.
Aggregated by	ArgumentDataPrototype.direction, DiagnosticSovdAccessArgument.direction, RunnableEntity Argument.direction, SwServiceArg.direction
Literal	***Description***
in	The argument value is passed to the callee. **Tags:** atp.EnumerationLiteralIndex=0
inout	The argument value is passed to the callee but also passed back from the callee to the caller. **Tags:** atp.EnumerationLiteralIndex=1
out	The argument value is passed from the callee to the caller. **Tags:** atp.EnumerationLiteralIndex=2

Table 4.12: ArgumentDirectionEnum

The ClientServerOperations have no ordering within a ClientServerInterface (there is no such thing as the "first" operation)[3].

[TPS_SWCT_01123] No default values for ArgumentDataPrototypes ⌈It is not possible to define default values for ArgumentDataPrototypes defined in the context of a ClientServerOperation. Default values might lead to complicated mappings to programming languages.⌋

Please note that ArgumentDataPrototype inherits from AutosarDataPrototype and therefore has a reference to a concrete AutosarDataType.

The RTE Generator uses the referenced AutosarDataTypes to determine the data types of the arguments depending on the value of the attribute ArgumentDataPrototype.serverArgumentImplPolicy.

[TPS_SWCT_01124] Definition of ArgumentDataPrototypes within the context of a ClientServerOperation is ordered ⌈In contrast to the unordered relationship of ClientServerInterface to ClientServerOperation, the definition of ArgumentDataPrototypes within the context of a ClientServerOperation is ordered, i.e. a ClientServerOperation may have a *first* argument[4].⌋

Enumeration	**ServerArgumentImplPolicyEnum**
Note	This defines how the argument type of the server's RunnableEntity is implemented.
Aggregated by	ArgumentDataPrototype.serverArgumentImplPolicy, RunnableEntityArgument.serverArgumentImplPolicy
Literal	***Description***
useArgumentType	The argument type of the RunnableEntity is derived from the AutosarDataType of the ArgumentDataPrototype. **Tags:** atp.EnumerationLiteralIndex=0
useVoid	The argument type of the RunnableEntity is void. **Tags:** atp.EnumerationLiteralIndex=2

Table 4.13: ServerArgumentImplPolicyEnum

[3] In different parts of the definition of a ClientServerInterface, a "calling-order" of the ClientServerOperations might be prescribed: the client might be required to use the ClientServerOperations in a certain logical ordering.
However, this ordering has nothing to do with the order in which the ClientServerOperations are listed in the definition of a ClientServerInterface

[4] Giving the ArgumentDataPrototypes of a ClientServerOperation both an ordering and a unique identifier might seem redundant.
For example, in the operation "foo(a, b, c)", we can refer to the "second argument" or to "the argument named b". In many common programming languages (such as C or Java), only the *ordering* is actually used by the client during the invocation of the server (the client invokes the operation as "foo(1,2,3)" not as "foo(a=1,c=3,b=2)").
In addition, the names of the arguments represent an arbitrary choice made when implementing the invocation. In *C*, only the data types and ordering of the arguments constitute the signature, *not* the names of the arguments.

[constr_1286] `serverArgumentImplPolicy` and `ArgumentDataPrototype` typed by primitive data types

Imposition time: CP: `IT_CpgExe`

⌈The value of the attribute `ArgumentDataPrototype.serverArgumentImplPolicy` shall **not** be set to `useVoid` for an `ArgumentDataPrototype` of `direction in` that is typed by an `AutosarDataType` that resolves to a primitive C data type (see [TPS_SWCT_01565]).⌋

There is one use case for executing multiple `ClientServerOperation`s using the exact same `RunnableEntity`. This use case is sketched in Figure 4.8.

In such a case, the `ClientServerOperation`s may own `ArgumentDataPrototype`s typed by an array data type.

It may also happen that `ArgumentDataPrototype`s typed by array data types refer to a compatible element data type but define a different number of elements.

Note that the server `RunnableEntity` needs information about the currently used array length or structure size through additional arguments passed by the client. This aspect is exemplified by Figure 4.8.

In such a case, it is only natural to use a `Variable-Size Array Data Type`, because it has a built-in capability to indicate the number of elements currently stored in the array without the need to add further arguments to the signature of the `RunnableEntity`.

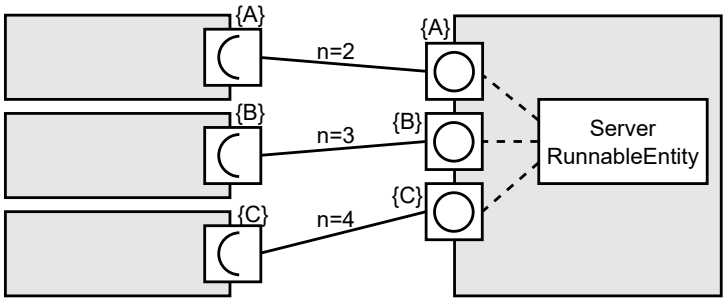

Figure 4.8: Use case for one server `RunnableEntity` that processes calls from different `PortPrototype`s

Note further that a `ClientServerInterface` does not define any timing information (how quickly the client expects a response of the server). It does not define how threading works (for example, whether the client blocks until the response comes back from the server).

It also does not explicitly define how information is passed between the client and server implementations and the underlying RTE (for example, through “pointers” or “by value”).

[constr_1204] Supported connections by AssemblySwConnector between PortPrototypes typed by a ClientServerInterface, ModeSwitchInterface, or TriggerInterface

Imposition time: CP: IT_CompSwcT

⌈

	RPortPrototype	PPortPrototype	PRPortPrototype
RPortPrototype	No	**Yes**	**Yes**
PPortPrototype	**Yes**	No	No
PRPortPrototype	**Yes**	No	No

⌋

[constr_1205] Supported connections by DelegationSwConnector between PortPrototypes typed by a ClientServerInterface, ModeSwitchInterface, or TriggerInterface

Imposition time: CP: IT_CompSwcT

⌈

innerPort	outerPort		
	RPortPrototype	PPortPrototype	PRPortPrototype
RPortPrototype	**Yes**	No	No
PPortPrototype	No	**Yes**	No
PRPortPrototype	No	**Yes**	No

⌋

A restriction on the use of the attribute ClientServerOperation.diagArgIntegrity is described in Chapter 13.8.4.5.

4.3.2.2 Error Handling in Client/Server Communication

This section describes the handling of errors occurring either within an application software component or during the communication across the [3, TR Virtual Functional Bus]. Errors that are created and consumed by basic software modules are not in the scope of this document and are therefore not discussed.

Within the scope of this document, errors are divided into two classes:

- infrastructure errors and
- application errors.

A software component implementation uses RTE API methods to communicate with other software components. During this communication, certain errors can occur as a result of infrastructure faults, such as a bus not working or an expected data value not arriving in time.

These errors are listed in the [2, SWS RTE], as they are an inherent feature of the infrastructure provided by the VFB.

Software components therefore typically do not raise infrastructure errors on their own.

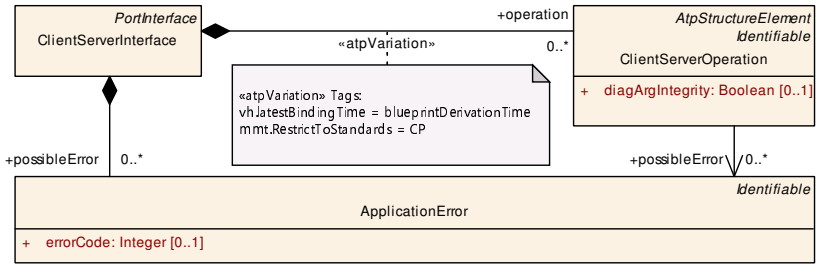

Figure 4.9: Application error meta-model

Instead, the AUTOSAR basic software and the RTE will determine infrastructure faults and communicate the corresponding error codes to the relevant software components.

[TPS_SWCT_01491] AUTOSAR system does not need to explicitly describe infrastructure errors ⌈As the fixed set of infrastructure errors is defined as an implicit part of the VFB, a developer of an AUTOSAR system does not need to explicitly describe these.

It is assumed that these might occur at run time and application developers should take measures to handle them.⌋

Application errors, on the other hand, are specific to the functionality or information that is described in the form of a `PortInterface`. It is not possible to define such errors up front; instead, they are defined at design time of a certain `PortInterface`.

In principle, such `ApplicationError`s could be part of all kinds of `PortInterface`s.

[constr_1102] `ApplicationError` in the scope of one `SwComponentType`

Imposition time: CP: `IT_CpgExe`

⌈If a `SwComponentType` has `PortPrototype`s typed by different `ClientServerInterface`s with equal `shortName` and `ApplicationError`s defined, then the following condition applies: `ApplicationError`s with the same `shortName` shall have **identical** `errorCode` **values**.⌋

Rationale for the existence of [constr_1102]: the RTE generator creates symbols for the error codes that are built from the `shortName` of the `ClientServerInterface` and the `shortName` of the `ApplicationError`.

[constr_1108] Existence and value of attribute `ApplicationError.errorCode`

Imposition time: CP: `IT_CpgExe`

⌈Attribute `ApplicationError.errorCode` shall exist and its value shall not exceed the closed interval 1..63.

The following exception applies: **only** if attribute `possibleError` is supposed to represent the error code `E_OK`, the value 0 shall be allowed.⌋

By [constr_1108], only the six least significant bits of a return value shall be used to indicate an application error.

Class	**ApplicationError**			
Note	This is a user-defined error that is associated with an element of an AUTOSAR interface. It is specific for the particular functionality or service provided by the AUTOSAR software component.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ClientServerInterface.possibleError			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
errorCode	Integer	0..1	attr	The RTE generator is forced to assign this value to the corresponding error symbol. Note that for error codes certain ranges are predefined (see RTE specification).

Table 4.14: ApplicationError

Consequently, `ClientServerOperation`s may be associated with a number of `ApplicationError`s that they may raise. These errors are defined as part of the `ClientServerInterface`.

[constr_1038] Reference to `ApplicationError`

Imposition time: CP: `IT_CpgExe`

⌈A `possibleError` referenced by a `ClientServerOperation` shall be owned by the `ClientServerInterface` that also owns the `ClientServerOperation`.⌋

4.3.3 External Trigger Event Communication

[TPS_SWCT_01196] Semantics of an external trigger event communication ⌈The underlying semantics of an external trigger event communication is that a trigger source may initiate the execution of `RunnableEntity`s in the connected trigger sinks. Typically (but not necessarily), these `RunnableEntity`s are executed in a sequential order.⌋

[TPS_SWCT_01197] `TriggerInterface` ⌈The `TriggerInterface` defines a set of `Trigger` to be communicated between software components. The `Trigger` represents a special kind of event upon whose occurrence the trigger sinks shall react in a particular manner.⌋

Class	**TriggerInterface**			
Note	A trigger interface declares a number of triggers that can be sent by an trigger source. **Tags:** atp.recommendedPackage=PortInterfaces			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *PortInterface*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
trigger	Trigger	*	aggr	The Trigger of this trigger interface. **Tags:** atp.Splitkey=trigger, trigger.shortName

Table 4.15: TriggerInterface

Class	Trigger			
Note	A trigger which is provided (i.e. released) or required (i.e. used to activate something) in the given context.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, BswModuleDescription.releasedTrigger, BswModuleDescription.requiredTrigger, ServiceInterface.trigger, TriggerInterface.trigger			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
swImplPolicy	SwImplPolicyEnum	0..1	attr	This attribute, when set to value queued, allows for a queued processing of Triggers. This Attribute is only used by the AUTOSAR Classic Platform.
triggerPeriod	MultidimensionalTime	0..1	aggr	Optional definition of a period in case of a periodically (time or angle) driven external trigger. **Tags:** atp.Splitkey=triggerPeriod This Attribute is only used by the AUTOSAR Classic Platform.

Table 4.16: Trigger



Figure 4.10: `Trigger` of a `TriggerInterface`

As illustrated in Figure 4.10, a `TriggerInterface` is composed of `Trigger`.

[TPS_SWCT_01198] Period for periodic triggering ⌈A `Trigger` can optionally define a period for periodic triggering. It is expressed via the meta-class `MultidimensionalTime` in terms of time or angle. Note that the main use case for this is to specify the properties if the trigger comes from the Basic Software, e.g. from a Complex Driver. It is not used as an input for the RTE generator.⌋

Class	MultidimensionalTime
Note	Specifies a time value based on [15] see [TPS_GST_00354].
Base	*ARObject*
Aggregated by	AgeConstraint.maximum, AgeConstraint.minimum, AnalyzedExecutionTime.bestCaseExecutionTime, AnalyzedExecutionTime.worstCaseExecutionTime, ArbitraryEventTriggering.maximumDistance, ArbitraryEventTriggering.minimumDistance, BurstPatternEventTriggering.minimumInterArrivalTime, BurstPatternEventTriggering.patternJitter, BurstPatternEventTriggering.patternLength, BurstPatternEventTriggering.patternPeriod, ConcretePatternEventTriggering.offset, ConcretePatternEventTriggering.patternJitter, ConcretePatternEventTriggering.patternLength, ConcretePatternEventTriggering.patternPeriod, ConfidenceInterval.lowerBound, ConfidenceInterval.upperBound, ExecutionTimeConstraint.maximum, ExecutionTimeConstraint.minimum, IoHwAbstractionServerAnnotation.age, LatencyTimingConstraint.maximum, LatencyTimingConstraint.minimum, LatencyTimingConstraint.nominal, MeasuredExecutionTime.maximumExecutionTime, MeasuredExecutionTime.minimumExecutionTime, MeasuredExecutionTime.nominalExecutionTime, OffsetTimingConstraint.maximum, OffsetTimingConstraint.minimum, PeriodicEventTriggering.jitter, PeriodicEventTriggering.minimumInterArrivalTime, PeriodicEventTriggering.period, ReceiverAnnotation.signalAge, RoughEstimateOfExecutionTime.estimatedExecutionTime, SimulatedExecutionTime.maximumExecutionTime, SimulatedExecutionTime.minimumExecutionTime, SimulatedExecutionTime.nominalExecutionTime, SporadicEventTriggering.jitter, SporadicEventTriggering.maximumInterArrivalTime, SporadicEventTriggering.minimumInterArrivalTime, SporadicEventTriggering.period, SwDataDefProps.swRefreshTiming, SynchronizationTimingConstraint.tolerance, TDLETZoneClock.accuracyExt, TDLETZoneClock.accuracyInt, TimingClockSyncAccuracy.accuracy, Trigger.triggerPeriod

▽

△

Class	**MultidimensionalTime**			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
cseCode	CseCodeType	0..1	attr	Specifies the time base by means of CSE codes.
cseCodeFactor	Integer	0..1	attr	The scaling factor for the time value based on the specified CSE code.

Table 4.17: MultidimensionalTime

Primitive	**CseCodeType**
Note	This primitive represents an ASAM CSE (Codes for Scaling Units) based on the definition in the ASAM-MCD-2MC-ASAP2 specification. The particular semantics is specified in [TPS_GST_00354]. **Tags:** xml.xsd.customType=CSE-CODE-TYPE-STRING xml.xsd.type=unsignedInt

Table 4.18: CseCodeType

Apart from this, a TriggerInterface does not define any timing information (e.g. how quickly the source expects a reaction of the sinks). This is a property of the timing information in the templates.

[constr_1104] Trigger communication shall not implement an n:1 pattern

Imposition time: CP: IT_RteGen

⌈An RPortPrototype typed by a TriggerInterface shall not be connected to PortPrototypes typed by TriggerInterfaces such that a given Trigger in the TriggerInterface of the RPortPrototype is connected to more than one compatible (see [constr_1081], [constr_1082], and [constr_1251]) Trigger in the TriggerInterfaces of the connected PortPrototypes.⌋

[constr_1104] boils down to the rule that trigger communication shall not be implemented as an n:1 (where n > 1) scenario.

This condition shall be observed on the basis of individual Triggers rather than the connection between entire PortPrototypes, in a similar way to how individual DataElements in a sender/receiver communication are observed.

Please note that the constraint applies to connections created by AssemblySwConnectors and DelegationSwConnectors in the same way. This is why [constr_1104] does not get more specific about the nature of the PortPrototypes at the opposite end of the connection to the RPortPrototype.

To be clear, the n:1 (where n > 1) scenario is not supported for trigger communication because there is no active use case for it.

[TPS_SWCT_01199] Queued processing of Triggers ⌈It may happen that a Trigger source temporarily fires Triggers faster than the Trigger sink can process them. To support this use case, trigger event communication can be processed in a queued manner.

In this case, the Triggers are added to a queue, and the foremost Trigger is dequeued and processed once the processing of the current Trigger is done. Please note that the queue size is **not** subject to definition within the scope of this document. The actual queue size is defined during RTE configuration.

The specification of whether a Trigger is subject to queued processing is controlled by the attribute Trigger.swImplPolicy.⌋

[constr_1169] Allowed values for Trigger.swImplPolicy

Imposition time: CP: IT_CpgExe

⌈The **only** allowed values for the attribute Trigger.swImplPolicy are either STANDARD (in which case the Trigger processing does not use a queue) or QUEUED (in which case the processing of Triggers uses a queue).⌋

Please note that the value of Trigger.swImplPolicy is not the final word on the implementation of a queue for the specific Trigger. The integrator can still overrule the application software developer's verdict where applicable.

For more information on connecting different kinds of PortPrototypes typed by a TriggerInterface to each other, please refer to [constr_1204] and [constr_1205].

4.3.4 Mode Communication

4.3.4.1 Mode Switch Interface

There are two distinct use cases for the communication of modes via ports:

1. An actual mode transition can be communicated from a mode manager component to its client components to enforce a mode switch.
2. A request for a mode transition can be communicated from any component to a mode manager.

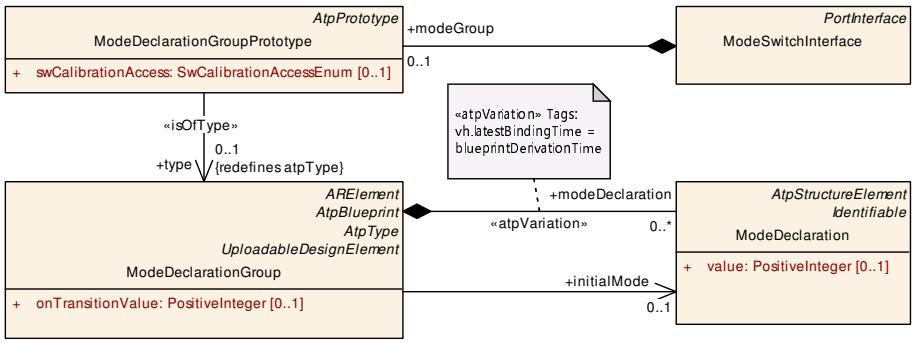

Figure 4.11: Mode Switch Interface

[TPS_SWCT_01087] Propagation of mode information ⌈For communicating a mode switch (i.e. the first use case), the Software-Component Template describes the concept of the communication of ModeDeclarationGroupPrototypes in a similar way

to the communication of VariableDataPrototypes, but it uses a special type of PortInterface: the collections of ModeDeclarations that are required or provided by a SwComponentType are defined by means of ModeSwitchInterfaces used to type the PortPrototypes owned by the SwComponentType.⌋

This aspect is depicted in Figure 4.11.

[constr_2049] Different ModeDeclarationGroups shall have different shortNames.

Imposition time: CP: IT_CpgExe

⌈A software component is not allowed to type multiple PortPrototypes with ModeSwitchInterfaces where the contained ModeDeclarationGroupPrototypes reference ModeDeclarationGroups with identical shortNames but different ModeDeclarations.⌋

The rationale for [constr_2049] is to avoid conflicts in generated RTE files.

For instance:

Two ModeDeclarationGroups with identical shortName "Foo" are defined.

ModeDeclarationGroup "Foo"
contains the ModeDeclarations "X", "Y", "Z"

ModeDeclarationGroup "Foo*"
contains the ModeDeclarations "W", "X", "Y", "Z"

In this case, a software component is only allowed to use either "Foo" or "Foo*"

[TPS_SWCT_01200] ModeDeclarationGroupPrototype per ModeSwitchInterface ⌈Other PortInterfaces provide the ability to define several contained elements, e.g., SenderReceiverInterface.dataElement. This is different for the ModeSwitchInterface, due to concerns about complexity.

The upper multiplicity of the aggregation of ModeDeclarationGroupPrototype to ModeSwitchInterface is therefore limited to 1.⌋

Admittedly, there would be no technical restriction to support a 0..* multiplicity, but it does not seem that any reasonable use case for such a scenario exists.

If a SwComponentType has to consider two or even more ModeDeclarationGroupPrototypes, it is very likely that these are part of different ModeSwitchInterfaces.

The containment of a ModeDeclarationGroupPrototype in a ModeSwitchInterface allows for explicitly defining SwConnectors which communicate between SwComponentPrototypes and to define service interfaces for communication with ServiceSwComponentTypes.

The existence of the reference in the role ModeDeclarationGroupPrototype.type is governed by [constr_2633].

Due to the compatibility rules of PortInterfaces (see Chapter 6) each SwComponentType can rely on the availability of required mode activations.

Class	ModeSwitchInterface			
Note	A mode switch interface declares a ModeDeclarationGroupPrototype to be sent and received. **Tags:** atp.recommendedPackage=PortInterfaces			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *PortInterface*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
modeGroup	ModeDeclarationGroup Prototype	0..1	aggr	The ModeDeclarationGroupPrototype of this mode interface. **Tags:** atp.Splitkey=modeGroup, modeGroup.shortName

Table 4.19: ModeSwitchInterface

Class	ModeDeclarationGroupPrototype			
Note	The ModeDeclarationGroupPrototype specifies a set of Modes (ModeDeclarationGroup) which is provided or required in the given context.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, BswModuleDescription.providedModeGroup, BswModuleDescription.requiredModeGroup, FirewallStateSwitchInterface.firewallStateMachine, FunctionGroupSet.functionGroup, ModeSwitchInterface.modeGroup, Process.processStateMachine, StateManagementStateNotification.stateMachine			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
swCalibrationAccess	SwCalibrationAccessEnum	0..1	attr	This allows for specifying whether or not the enclosing ModeDeclarationGroupPrototype can be measured at run-time. This Attribute is only used by the AUTOSAR Classic Platform.
type	ModeDeclarationGroup	0..1	tref	The "collection of ModeDeclarations" (= ModeDeclaration Group) supported by a component **Stereotypes:** isOfType **Tags:** atp.Splitkey=type

Table 4.20: ModeDeclarationGroupPrototype

Please note that each SwComponentType can define (via its PortPrototypes and ModeSwitchInterfaces) a list of required and provided ModeDeclarationGroupPrototypes.

[TPS_SWCT_01201] CompositionSwComponentType requires and provides the modes that are required or provided by its contained SwComponentPrototypes
⌈A CompositionSwComponentType requires and provides the modes that are required or provided by its contained SwComponentPrototypes.

The delegation of these modes from SwComponentPrototypes to the enclosing CompositionSwComponentType is explicitly described by DelegationSwConnectors.⌋

The formal description of a software component does not make any assumptions about the semantics of the required and provided ModeDeclarationGroupPrototypes.

It just requires and provides the ModeDeclarationGroupPrototypes by name. For more information about mode declarations, refer to Chapter 9.1.

4.3.4.2 Data Types used for Mode Communication

[TPS_SWCT_01086] Request mode change ⌈The ability to request a mode (i.e. the second use case) is modeled on the VFB via a SenderReceiverInterface and for the RTE it is handled like a usual communication, meaning the connector can also cross ECU boundaries, and the communicated dataElements have to be based on AutosarDataTypes.⌋

However, for semantic consistency with the first use case mentioned at the beginning of Chapter 4.3.4.1, a communicated mode request shall also be mapped to a corresponding ModeDeclarationGroup. This can be defined by the mapping class ModeRequestTypeMap, as shown in Figure 4.12.

The ImplementationDataType mapped to a certain ModeDeclarationGroup can then be used in a PortInterface to represent a ModeDeclaration of the associated ModeDeclarationGroup as a numerical value.

[constr_4002] Unambiguous mapping of modes to data types

Imposition time: CP: IT_CpgExe

⌈Within one DataTypeMappingSet, a ModeDeclarationGroup shall not be mapped to different ImplementationDataTypes.⌋

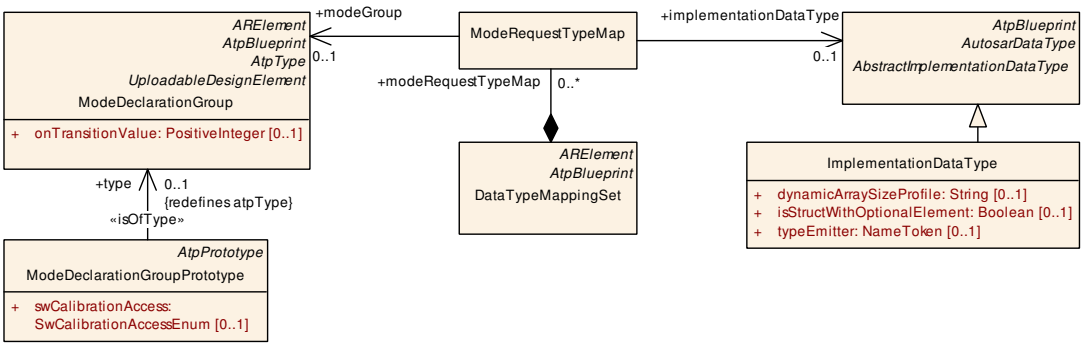

Figure 4.12: Mapping of modes to data types

Class	**ModeRequestTypeMap**			
Note	Specifies a mapping between a ModeDeclarationGroup and an ImplementationDataType. This ImplementationDataType shall be used to implement the ModeDeclarationGroup.			
Base	*ARObject*			
Aggregated by	DataTypeMappingSet.modeRequestTypeMap			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

△

Class	**ModeRequestTypeMap**			
implementation DataType	AbstractImplementation DataType	0..1	ref	This is the corresponding AbstractImplementationDataType. It shall be modeled along the idea of an "unsigned integer-like" data type. **Tags:** atp.Splitkey=implementationDataType
modeGroup	ModeDeclarationGroup	0..1	ref	This is the corresponding ModeDeclarationGroup. **Tags:** atp.Splitkey=modeGroup

Table 4.21: ModeRequestTypeMap

[constr_1166] Restrictions of ModeRequestTypeMap

Imposition time: CP: IT_CpgExe

⌈For every ModeDeclarationGroup referenced by a ModeDeclarationGroup-Prototype used in a PortPrototype typed by a ModeSwitchInterface, a ModeRequestTypeMap shall exist that points to the ModeDeclarationGroup and also to an eligible ImplementationDataType.

The ModeRequestTypeMap shall be aggregated by a DataTypeMappingSet which is referenced from the SwcInternalBehavior that is owned by the Application-SwComponentType that also owns the PortPrototype.⌋

[constr_1871] Existence of attribute ModeRequestTypeMap.implementation-DataType

Imposition time: CP: IT_CpgExe

⌈For each ModeRequestTypeMap, attribute implementationDataType shall exist.⌋

[constr_1872] Existence of attribute ModeRequestTypeMap.modeGroup

Imposition time: CP: IT_CpgExe

⌈For each ModeRequestTypeMap, attribute modeGroup shall exist.⌋

[constr_1167] ImplementationDataTypes used as ModeRequestType-Map.implementationDataType

Imposition time: CP: IT_CpgExe

⌈The ImplementationDataType referenced by a ModeRequestTypeMap shall **either** be

- of category VALUE **or**
- of category TYPE_REFERENCE that in turn references an Implementation-DataType of category VALUE.

The baseType referenced by the ImplementationDataType shall have the attribute BaseTypeDirectDefinition.baseTypeEncoding set to NONE.⌋

[TPS_SWCT_01202] **ApplicationDataType defines a subset of the values used in the ModeDeclarationGroup** ⌈Please note that the corresponding ApplicationDataType defines a subset of the values used in the ModeDeclarationGroup, and the labels used may differ from the names of the ModeDeclarations.

It is the responsibility of a system designer to maintain the data types and ModeDeclarationGroups according to the functional needs.

For example, a mode requester may only request a subset of the available modes (via SenderReceiverInterface or ClientServerInterface). The mode manager may additionally decide to indicate failure.⌋

For more information on connecting different kinds of PortPrototypes typed by a ModeSwitchInterface to each other, please refer to [constr_1204] and [constr_1205].

4.3.4.3 Relevance for Measurement and Calibration

Please note that by defining a value for the attribute ModeDeclarationGroupPrototype.swCalibrationAccess, a ModeDeclarationGroupPrototype gains the ability to become measurable. This implies the following constraint:

[constr_1172] **Allowed values of SwCalibrationAccessEnum for ModeDeclarationGroupPrototype**

Imposition time: CP: IT_CpgExe

⌈The only allowed values of swCalibrationAccess aggregated by ModeDeclarationGroupPrototype are

- notAccessible and
- readOnly.

⌋

[TPS_SWCT_01566] **Define literals for an measurement and calibration system in the context of a FlatInstanceDescriptor** ⌈If ModeDeclarationGroupPrototype.swCalibrationAccess is set to readOnly, a referenced FlatInstanceDescriptor.swDataDefProps may in turn refer to a CompuMethod that defines the particular literals used in the MCD system for displaying values of the measured ModeDeclarationGroupPrototypes.⌋

The existence of this use case is the reason for putting “AI” at the intersection of compuMethod and FlatInstanceDescriptor in [constr_1015].

Another possible scenario[5] is that a FlatInstanceDescriptor does not exist[6], but it would still be good to have the ability to define particular literals for displaying values in an MCD system.

This case can also be supported by the AUTOSAR standard through the appearance of "S" at the intersection of compuMethod and McDataInstance in [constr_1015].

4.3.5 Parameter Communication

Note that the "communication" of ParameterDataPrototypes as part of a ParameterInterface does not establish an actual transmission of data.

The term is used in a conceptual sense, and the existence of a ParameterInterface is justified by the mere idea of unifying the exposure of calibration parameters at the surface of a software component on the same formal level as the exposure of other pieces of data, i.e. by means of a PortPrototype typed by a PortInterface.

[constr_1312] PortPrototypes typed by a ParameterInterface

Imposition time: CP: IT_CpgExe

⌈PortPrototypes typed by a ParameterInterface can either be PPortPrototypes or RPortPrototypes. The usage of PRPortPrototypes typed by a ParameterInterface is not supported.⌋

4.4 Port Interface Mapping and Data Scaling

In former versions of this specification, the requirements on PortInterfaces to match each other could lead to situations where PortInterfaces that were "practically" compatible would nevertheless be rejected because of formal reasons (e.g. shortNames of dataElements do not match).

In order to also support scenarios where the developer of a CompositionSwComponentType needs to connect PortPrototypes that would match each other but do not fulfill formal requirements, the concept of "port interface mapping" has been introduced.

[TPS_SWCT_01158] Cases for PortInterfaceMapping ⌈In general, a PortInterfaceMapping is suitable in the following cases:

1. Two PortPrototypes shall be connected and the PortInterface elements are compatible except for the unequal shortNames. This requires a pure logical mapping of the PortInterface elements.

[5] that does not necessarily have to be related to ModeDeclarationGroupPrototypes, but to the definition of literals for MCD systems in general

[6] e.g. because the affected piece of data exists in the basic software

2. PortInterface elements are logically equivalent but differ in range and resolution. This requires a data conversion or a re-scaling of the provided data and arguments to the range and resolution of the required data and arguments.
3. invalidationPolicy of PortInterface elements is different. This might require the implementation of different invalidation handling strategies for the same dataElement in parallel on the same ECU.
4. Two PortPrototypes shall be connected and the PortInterface elements shall be converted using the AUTOSAR data transformer approach.

⌋

More information about the AUTOSAR data transformer approach can be found in Chapter 4.4.3.

Typically, the mapping of such PortInterface is agreed once between the component vendors and the system designer in the early phase of a project.

[TPS_SWCT_01159] Mapping is described separately from the SwConnector as reusable ARElement ⌈The mapping is described separately from the SwConnector as reusable ARElement. A set of PortInterfaceMappings is grouped in a PortInterfaceMappingSet.⌋

[TPS_SWCT_01543] PortInterfaceMapping overrides all other compatibility rules ⌈The existence of a PortInterfaceMapping overrides all other compatibility rules given that the following statements are fulfilled:

- [constr_1071] applies also for the application of a PortInterfaceMapping.
- [constr_1268] applies also for the application of a PortInterfaceMapping.
- [constr_1269] applies also for the application of a PortInterfaceMapping.
- [constr_1270] applies also for the application of a PortInterfaceMapping.
- A structural difference between mapped DataPrototypes can be mitigated by means of a SubElementMapping. This includes the case that a “structure” data type is mapped to an “array” data type and vice versa. [TPS_SWCT_01195] is also applicable.

When using a PortInterfaceMapping, the developer of a software component needs to understand the consequences in terms of model semantics.⌋

Please note that [TPS_SWCT_01543] does not require a tool implementation to ignore, without reporting, deviations from all other compatibility rules in the presence of a PortInterfaceMapping.

If this is considered helpful, the tool **may** still issue warnings with respect to compatibility rules defined in Chapter 6 but this is not mandated by the AUTOSAR standard. The tool, however, **shall not** report errors in this case.

Class	PortInterfaceMappingSet			
Note	Specifies a set of (one or more) PortInterfaceMappings. **Tags:** atp.recommendedPackage=PortInterfaceMappingSets			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
portInterface Mapping	PortInterfaceMapping	*	aggr	Specifies one PortInterfaceMapping to support the connection of PortPrototypes typed by two different PortInterfaces with PortInterface elements having unequal names and/or unequal semantic (resolution or range). **Stereotypes:** atpVariation **Tags:** atp.Splitkey=portInterfaceMapping, portInterface Mapping.shortName, portInterfaceMapping.variation Point.shortLabel vh.latestBindingTime=blueprintDerivationTime

Table 4.22: PortInterfaceMappingSet

Class	***PortInterfaceMapping*** (abstract)			
Note	Specifies one PortInterfaceMapping to support the connection of Ports typed by two different PortInterfaces with PortInterface elements having unequal names and/or unequal semantic (resolution or range).			
Base	*ARObject*, *AtpBlueprint*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	ClientServerInterfaceMapping, ModeInterfaceMapping, TriggerInterfaceMapping, VariableAndParameter InterfaceMapping			
Aggregated by	PortInterfaceMappingSet.portInterfaceMapping			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 4.23: PortInterfaceMapping

4.4.1 Port Interface Mapping

By default, the shortNames of PortInterface elements are used to identify the matching element pairs of connected PortPrototypes. In the case of non-matching shortNames (this might be due to distributed development, off-the-shelf development, or reuse of software components), it is required to explicitly specify which elements of PortInterfaces shall correlate with each other.

This definition is provided with PortInterfaceMappings.

Please note that the PortInterfaceMapping is a very powerful tool for expert users to accommodate various differences in the PortInterfaces of two PortPrototypes that shall be connected.

In general, it is possible to define a PortInterfaceMapping for all sub-classes of SwConnectors. To make this possible, it is necessary to avoid speaking of “provided” or “required” ends, as this could lead to confusion.

Specifically, it is possible that inside a CompositionSwComponentType a PassThroughSwConnector is connected to a PPortPrototype.

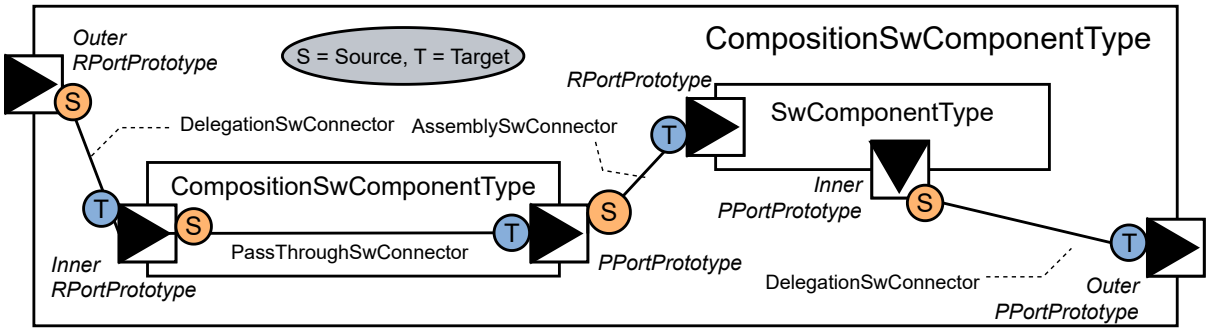

Figure 4.13: "Source" and "Target" end of a SwConnector in a sender/receiver-style scenario

From the perspective of the PassThroughSwConnector, however, the PPortPrototype might represent the "required" end of the communication relation inside the CompositionSwComponentType.

To avoid further confusion, the rules for the specification of the PortInterfaceMapping are specified **from the perspective of the SwConnector rather than the PortPrototype**.

For each SwConnector, a "source" and "target" end is postulated, reflecting the direction of communication implemented by the SwConnector. This understanding is depicted in Figure 4.13.

Please note that the "sender/receiver-style communication" (see Chapter 4.3.1) is conceptually also applicable for other kinds of communication:

- Mode switch communication[7], see Chapter 4.3.4
- External trigger communication, see Chapter 4.3.3
- NvData communication, see Chapter 11.4.2
- Parameter "communication", see Chapter 4.3.5

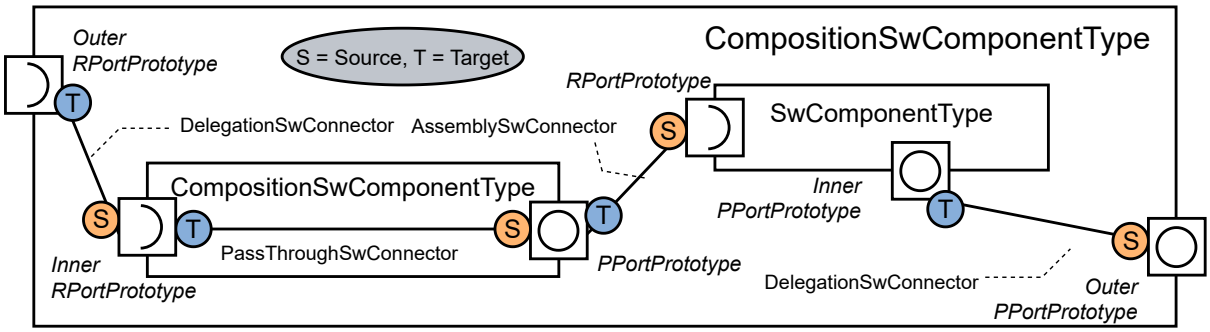

Figure 4.14: "Source" and "Target" end of a SwConnector in a client/server-style scenario

[7] A mode request is implemented by sender/receiver communication anyway and therefore does not represent a dedicated communication pattern.

Note further that the association of the "source" and "target" end of an SwConnector that represents a client/server communication (see Chapter 4.3.2) is aligned along the "primary" interaction, i.e. the call of a ClientServerOperation, see Figure 4.14.

The conclusion of Figure 4.13 regarding "source" and "target" end of an SwConnector for a sender/receiver-style interaction is summarized in [TPS_SWCT_01873].

[TPS_SWCT_01873] Definition of "source" and "target" of an SwConnector for a sender/receiver-style interaction ⌈

Sender/Receiver	Source	Target
DelegationSwConnector	Outer required PortPrototype	Inner required PortPrototype
DelegationSwConnector	Inner provided PortPrototype	Outer provided PortPrototype
AssemblySwConnector	Provided PortPrototype	Required PortPrototype
PassThroughSwConnector	Required PortPrototype	Provided PortPrototype

⌋

The conclusion of Figure 4.14 regarding "source" and "target" end of an SwConnector for a client/server-style interaction is summarized in [TPS_SWCT_01874].

[TPS_SWCT_01874] Definition of "source" and "target" of an SwConnector for a client/server-style interaction ⌈

Client/Server	Source	Target
DelegationSwConnector	Inner required PortPrototype	Outer required PortPrototype
DelegationSwConnector	Outer provided PortPrototype	Inner provided PortPrototype
AssemblySwConnector	Required PortPrototype	Provided PortPrototype
PassThroughSwConnector	Provided PortPrototype	Required PortPrototype

⌋

There are some documented restrictions for the application of PortInterfaceMappings. However, in general, a PortInterfaceMapping could potentially be used in a harmful way by specifying mapping approaches that are not implementable in the context of an ECU, resulting in undefined semantics in the RTE, i.e. the RTE Generator would not be able to process such a model.

[TPS_SWCT_01099] **PortInterfaceMapping** ⌈Each PortInterfaceMapping describes the mapping of the PortInterface elements of exactly two PortInterfaces.⌋

To apply a PortInterfaceMapping, a SwConnector has to reference it.

[constr_1151] Applicability of PortInterfaceMapping

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈A PortInterfaceMapping is only applicable and valid for a SwConnector if the two PortPrototypes which are referenced by the SwConnector are typed by the same two PortInterfaces which are mapped by the PortInterfaceMapping.⌋

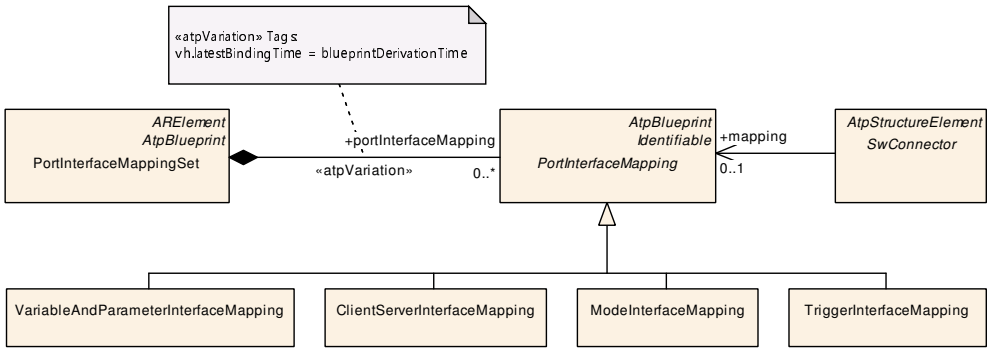

Figure 4.15: Relevant meta-classes for PortInterface element mapping

[TPS_SWCT_01100] Precedence of `PortInterfaceMapping` ⌈The mapping via `PortInterfaceMapping` has a higher precedence than the mapping by equal `shortName`s as defined in compatibility rules.

If a connector references an associated `PortInterfaceMapping`, this mapping shall be strictly binding with respect to the number of mapped data elements.⌋

Please note that the compatibility rules are described in Chapter 6.

[TPS_SWCT_01101] Unmapped elements of `PortInterface`s ⌈Unmapped `PortInterface` elements will not be connected by the referencing `SwConnector`.⌋

[constr_1583] `PortInterfaceMapping` for `DataPrototype` typed by `Compound Primitive Data Type`

Imposition time: CP: `IT_CpgExe`

⌈There is one very limited use case to apply `PortInterfaceMapping` for a `DataPrototype` typed by a `Compound Primitive Data Type`: adjustment of the `shortName` of the `DataPrototype`. Everything else is **not supported**.⌋

It is necessary to ensure that there are no duplicate mappings in the sense that a pair of “first” and “second” references refers to the exact same pair of reference targets.

If this were the case, the enclosing mapping classes could contain **different and potentially conflicting** configurations.

To prevent this issue from occurring, the following constraints are defined:

- [constr_10559]
- [constr_10560]
- [constr_10561]
- [constr_10562]
- [constr_10563]
- [constr_10564]

- [constr_10565]

4.4.1.1 Mapping of Sender Receiver Interface, Parameter Interface and Non Volatile Data Interface Elements

[TPS_SWCT_01102] **VariableAndParameterInterfaceMapping** ⌈The VariableAndParameterInterfaceMapping defines the correlation of VariableDataPrototypes and ParameterDataPrototypes defined in the context of DataInterfaces, i.e. SenderReceiverInterface, NvDataInterface, or ParameterInterface.⌋

[constr_1159] Consistency of VariableAndParameterInterfaceMapping with respect to the referenced DataInterfaces

Imposition time: CP: IT_RteGen

⌈Within one VariableAndParameterInterfaceMapping all firstDataPrototypes shall belong to one and only one DataInterface and all secondDataPrototypes shall belong to one other and only one other DataInterface.⌋

Please note that the relation of the "source" and "target" end of a SwConnector to the roles firstDataPrototype and secondDataPrototype is not defined.

[constr_10559] Uniqueness of DataPrototypeMapping.firstDataPrototype and secondDataPrototype

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈Within the context of a VariableAndParameterInterfaceMapping, **no two** DataPrototypeMappings shall exist where the targets of the combination of references in the roles firstDataPrototype and secondDataPrototype are identical.⌋

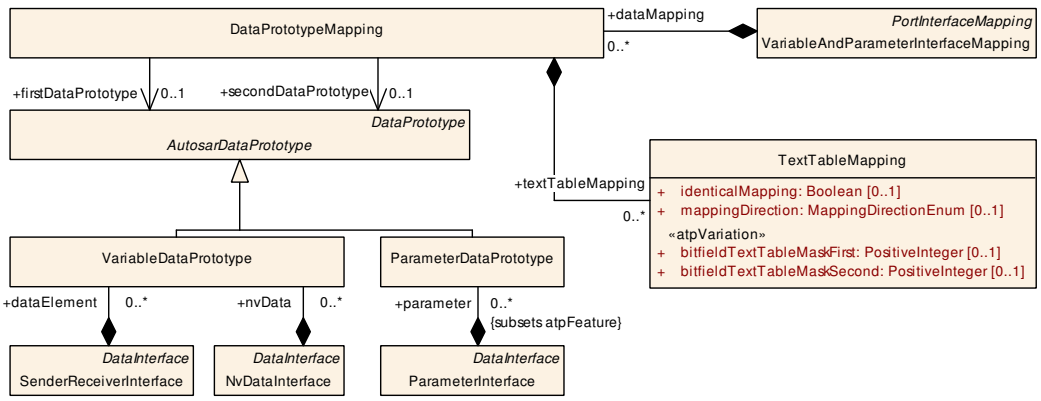

Figure 4.16: Mapping of Sender Receiver Interface, Parameter Interface and Non Volatile Data Interface elements

[TPS_SWCT_01103] **Mapping between different kinds of PortInterfaces** ⌈Thereby it is possible to describe the mapping between different kinds of

PortInterfaces for instance a ParameterInterface and SenderReceiver-Interface.⌋

[TPS_SWCT_01104] Possible mappings are restricted by the swImpl-Policy ⌈Nevertheless, the possible mappings of VariableDataPrototypes and ParameterDataPrototypes are restricted by the swImplPolicy attribute.⌋

For more explanation of [TPS_SWCT_01104], please refer to [constr_1071].

[constr_1039] Relevance of swImplPolicy

Imposition time: CP: IT_RteGen

⌈It is not possible to define a mapping between an element where the swImplPolicy is set to queued and another element where the swImplPolicy is set differently.⌋

This is required to fulfill the compatibility rules defined in [constr_1071].

[constr_1635] Relevance of attribute isOptional

Imposition time: CP: IT_RteGen

⌈If a SubElementMapping is defined for the elements of a structured data type then the attribute isOptional[8] shall either not exist for the firstElement and second-Element or it shall have the identical value for the firstElement and second-Element.⌋

[TPS_SWCT_01895] Conversion of SenderReceiverInterfaces ⌈The conversion of elements of SenderReceiverInterfaces is possible if one of the following conditions applies:

- The AutosarDataTypes of the referred DataPrototypes are compatible.
- A conversion of the data is available.
- A DataPrototypeMapping.firstToSecondDataTransformation is defined.

⌋

The compatibility of AutosarDataTypes is described in Chapter 6.2. A description of the conversion of data can be found in Chapter 4.4.2.

Class	**VariableAndParameterInterfaceMapping**			
Note	Defines the mapping of VariableDataPrototypes or ParameterDataPrototypes in context of two different SenderReceiverInterfaces, NvDataInterfaces or ParameterInterfaces.			
Base	*ARObject*, *AtpBlueprint*, *Identifiable*, *MultilanguageReferrable*, *PortInterfaceMapping*, *Referrable*			
Aggregated by	PortInterfaceMappingSet.portInterfaceMapping			
Attribute	*Type*	*Mult.*	*Kind*	*Note*

▽

[8] this is valid for both ApplicationRecordElement and ImplementationDataTypeElement

△

Class	**VariableAndParameterInterfaceMapping**			
dataMapping	DataPrototypeMapping	*	aggr	Defines the mapping of two particular VariableData Prototypes or ParameterDataPrototypes with unequal names and/or unequal semantic (resolution or range) in context of two different SenderReceiverInterfaces, Nv DataInterfaces or ParameterInterfaces **Tags:** atp.Splitkey=dataMapping

Table 4.24: VariableAndParameterInterfaceMapping

Class	**DataPrototypeMapping**			
Note	Defines the mapping of two particular `VariableDataPrototype`s, `ParameterDataPrototype`s or `ArgumentDataPrototype`s with non-equal `shortName`s, non-equal structure (specific condition is described by [constr_1187]), and/or non-equal semantic (resolution or range) in context of two different `SenderReceiverInterface`, `NvDataInterface` or `ParameterInterface` or Operations. If the semantic is unequal, the following rules apply: The `textTableMapping` is only applicable if the referred `DataPrototype`s are typed by `AutosarDataType` referring to `CompuMethod`s of `category` `TEXTTABLE`, `SCALE_LINEAR_AND_TEXTTABLE` or `BITFIELD_TEXTTABLE`. In the case that the `DataPrototype`s are typed by `AutosarDataType` either referring to `CompuMethod`s of `category` `LINEAR`, `IDENTICAL` or referring to no `CompuMethod` (which is similar as `IDENTICAL`) the linear conversion factor is calculated out of the `factorSiToUnit` and `offsetSiToUnit` attributes of the referred `Unit`s and the `CompuRationalCoeffs` of a `compuInternalToPhys` of the referred `CompuMethod`s.			
Base	*ARObject*			
Aggregated by	ClientServerOperationMapping.argumentMapping, VariableAndParameterInterfaceMapping.dataMapping			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
firstData Prototype	AutosarDataPrototype	0..1	ref	First to be mapped DataPrototype in context of a Sender ReceiverInterface, NvDataInterface, ParameterInterface or Operation. **Tags:** atp.Splitkey=firstDataPrototype
firstToSecond Data Transformation	DataTransformation	0..1	ref	This reference defines the need to execute the Data Transformation <Mip>_<transformerId> functions of the transformation chain when communicating from the Data PrototypeMapping.firstDataPrototype to the Data PrototypeMapping.secondDataPrototype. This reference also specifies the reverse Data Transformation <Mip>_Inv_<transformerId> functions of the transformation chain (i.e. from the DataPrototype Mapping.secondDataPrototype to the DataPrototype Mapping.firstDataPrototype) if the referenced Data Transformation is symmetric, i.e. attribute Data Transformation.dataTransformationKind is set to symmetric. **Tags:** atp.Splitkey=firstToSecondDataTransformation
secondData Prototype	AutosarDataPrototype	0..1	ref	Second to be mapped DataPrototype in context of a SenderReceiverInterface, NvDataInterface, Parameter Interface or Operation. **Tags:** atp.Splitkey=secondDataPrototype
secondToFirst Data Transformation	DataTransformation	0..1	ref	This defines the need to execute the reverse Data Transformation <Mip>_Inv_<transformerId> functions of the transformation chain when communicating from the DataPrototypeMapping.secondDataPrototype to the Data PrototypeMapping.firstDataPrototype. **Tags:** atp.Splitkey=secondToFirstDataTransformation

▽

△

Class	DataPrototypeMapping			
subElement Mapping	SubElementMapping	*	aggr	This represents the owned SubelementMapping. **Tags:** atp.Splitkey=subElementMapping
textTable Mapping	TextTableMapping	*	aggr	Applied TextTableMapping(s) **Tags:** atp.Splitkey=textTableMapping

Table 4.25: DataPrototypeMapping

[constr_1873] Existence of `DataPrototypeMapping.firstDataPrototype`

Imposition time: CP: `IT_RteGen`, AP: `IT_BefAraApiGen`

⌈For each `DataPrototypeMapping`, the reference in the role `firstDataPrototype` shall exist.⌋

[constr_1874] Existence of `DataPrototypeMapping.secondDataPrototype`

Imposition time: CP: `IT_RteGen`, AP: `IT_BefAraApiGen`

⌈For each `DataPrototypeMapping`, the reference in the role `secondDataPrototype` shall exist.⌋

4.4.1.2 Mapping of Client Server Interface Elements

[TPS_SWCT_01105] `ClientServerInterfaceMapping` ⌈The `ClientServerInterfaceMapping` defines the correlation of `ClientServerOperation`s defined in the context of two `ClientServerInterface`s.⌋

[constr_1237] Scope of mapped `ClientServerOperation`s in the context of a `ClientServerOperationMapping`

Imposition time: CP: `IT_RteGen`

⌈All `ClientServerOperation`s referenced by a `ClientServerOperationMapping` in the role `firstOperation` shall belong to exactly one `ClientServerInterface`.

All `ClientServerOperation`s referenced by a `ClientServerOperationMapping` in the role `secondOperation` shall belong to exactly one other `ClientServerInterface`.⌋

[constr_10560] Uniqueness of `ClientServerOperationMapping.firstOperation` and `secondOperation`

Imposition time: CP: `IT_RteGen`, AP: `IT_BefAraApiGen`

⌈Within the context of a `ClientServerInterfaceMapping`, **no two** `ClientServerOperationMapping`s shall exist where the targets of the combination of references in the roles `firstOperation` and `secondOperation` are identical.⌋

[constr_1238] Scope of mapped ApplicationErrors in the context of a ClientServerOperationMapping

Imposition time: CP: IT_RteGen

⌈All ApplicationErrors referenced by a ClientServerApplicationError-Mapping in the role firstApplicationError shall belong to exactly one Client-ServerInterface.

All ApplicationErrors referenced by a ClientServerApplicationError-Mapping in the role secondApplicationError shall belong to exactly one other ClientServerInterface.⌋

[constr_10561] Uniqueness of ClientServerApplicationErrorMapping.firstApplicationError and secondApplicationError

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈Within the context of a ClientServerInterfaceMapping, **no two** Client-ServerApplicationErrorMappings shall exist where the targets of the combination of references in the roles firstApplicationError and second-ApplicationError are identical.⌋

[TPS_SWCT_01896] Conversion of ClientServerInterfaces ⌈The conversion of elements of ClientServerInterfaces is possible if one of the following conditions applies:

- The AutosarDataTypes of the referred ArgumentDataPrototypes are compatible.
- A conversion of the data is available.

⌋

The compatibility of AutosarDataTypes is described in Chapter 6.2. A description of the conversion of data can be found in Chapter 4.4.2.

[constr_1240] Consistency of ArgumentDataPrototypes within the context of a ClientServerOperationMapping

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈Unless the reference in the role ClientServerOperationMapping.firstTo-SecondDataTransformation exists, for each argument owned by

- a ClientServerOperationMapping.firstOperation and
- ClientServerOperationMapping.secondOperation,

a reference in the role

- ClientServerOperationMapping.argumentMapping.firstData-Prototype or

- ClientServerOperationMapping.argumentMapping.secondDataPrototype

shall exist, originated by one of the ClientServerOperationMapping.argumentMappings owned by the mentioned ClientServerOperationMapping.⌋

[constr_1268] ArgumentDataPrototype.direction shall be preserved in a ClientServerOperationMapping

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈Within the context of a ClientServerOperationMapping, the value of the argument ArgumentDataPrototype.direction of two mapped ArgumentDataPrototype shall be identical.⌋

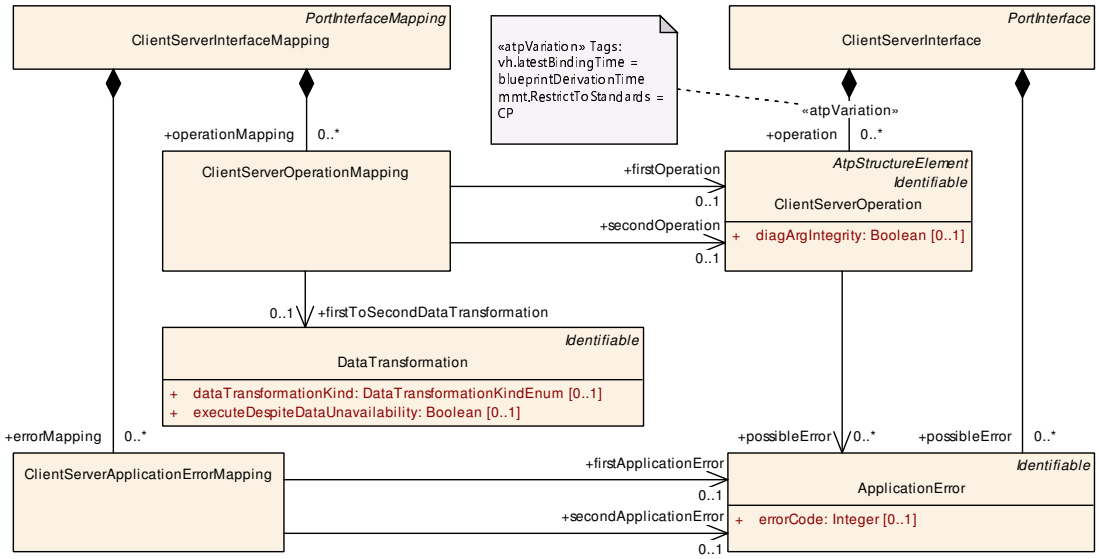

Figure 4.17: Mapping of ClientServerInterface elements and mapping of arguments

[constr_1269] Number of arguments shall be preserved in a ClientServerOperationMapping

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈Within the context of a ClientServerOperationMapping, the number of arguments of firstOperation and secondOperation shall be identical.⌋

[constr_1270] ArgumentDataPrototype shall be mapped only once in a ClientServerOperationMapping

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈Within the context of a ClientServerOperationMapping, each argument shall only be referenced **once** in the role firstDataPrototype or secondDataPrototype.⌋

[constr_1469] Applicability of constraints depending on the existence of a data transformation

Imposition time: CP: IT_RteGen

⌈[constr_1269], [constr_1270], [constr_1268], and [constr_1240] shall **not** apply under the following conditions:

- A reference from the respective ClientServerOperationMapping to a DataTransformation in the role firstToSecondDataTransformation exists.
- The value of the attribute dataTransformationKind of the referenced DataTransformation is set to DataTransformationKindEnum.asymmetricFromByteArray or DataTransformationKindEnum.asymmetricToByteArray.

⌋

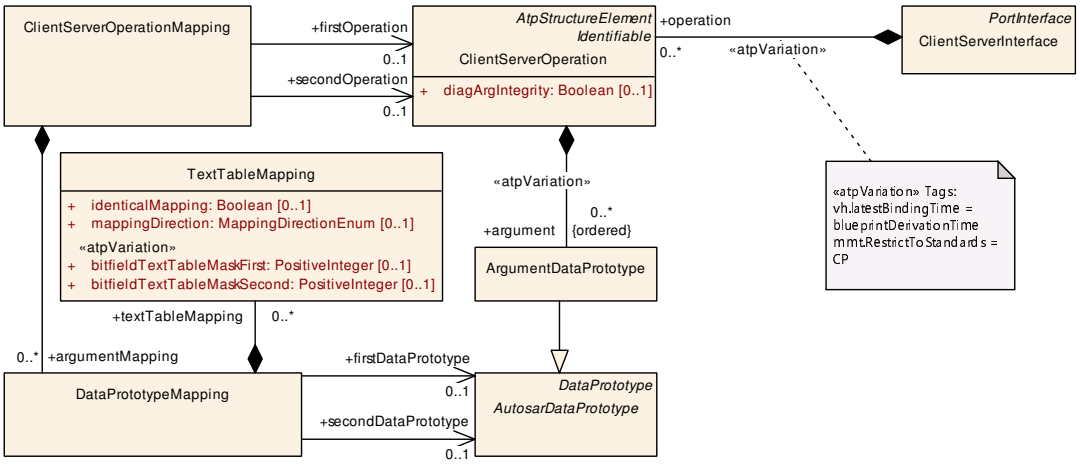

Figure 4.18: Mapping of ArgumentDataPrototypes

Class	**ClientServerInterfaceMapping**			
Note	Defines the mapping of ClientServerOperations in context of two different ClientServerInterfaces.			
Base	*ARObject*, *AtpBlueprint*, *Identifiable*, *MultilanguageReferrable*, *PortInterfaceMapping*, *Referrable*			
Aggregated by	PortInterfaceMappingSet.portInterfaceMapping			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
errorMapping	ClientServerApplicationErrorMapping	*	aggr	Map two different ApplicationErrors defined in the context of two different ClientServerInterfaces. **Tags:** atp.Splitkey=errorMapping
operationMapping	ClientServerOperationMapping	*	aggr	Mapping of two ClientServerOperations in two different ClientServerInterfaces **Tags:** atp.Splitkey=operationMapping

Table 4.26: ClientServerInterfaceMapping

Class	ClientServerOperationMapping			
Note	Defines the mapping of two particular ClientServerOperations in context of two different ClientServerInterfaces.			
Base	ARObject			
Aggregated by	ClientServerInterfaceMapping.operationMapping			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
argument Mapping	DataPrototypeMapping	*	aggr	Defines the mapping of two particular ArgumentData Prototypes with unequal names or unequal semantic (resolution or range) in context of Operations. **Tags:** atp.Splitkey=argumentMapping
firstOperation	ClientServerOperation	0..1	ref	First to-be-mapped ClientServerOperation of a Client ServerInterface. **Tags:** atp.Splitkey=firstOperation
firstToSecond Data Transformation	DataTransformation	0..1	ref	This reference indicates that a DataTransformation is intended in the context of the ClientServerOperation Mapping. **Tags:** atp.Splitkey=firstToSecondDataTransformation
second Operation	ClientServerOperation	0..1	ref	Second to-be-mapped ClientServerOperation of a Client ServerInterface. **Tags:** atp.Splitkey=secondOperation

Table 4.27: ClientServerOperationMapping

Class	ClientServerApplicationErrorMapping			
Note	This meta-class represents the ability to map ApplicationErrors onto each other.			
Base	ARObject			
Aggregated by	ClientServerInterfaceMapping.errorMapping			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
firstApplication Error	ApplicationError	0..1	ref	This represents the first ApplicationError in the context of the ClientServerApplicationErrorMapping. **Tags:** atp.Splitkey=firstApplicationError
second ApplicationError	ApplicationError	0..1	ref	This represents the second ApplicationError in the context of the ClientServerApplicationErrorMapping. **Tags:** atp.Splitkey=secondApplicationError

Table 4.28: ClientServerApplicationErrorMapping

[constr_1875] Existence of reference in the role ClientServerOperationMapping.firstOperation

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈For each ClientServerOperationMapping, the reference in the role firstOperation shall exist.⌋

[constr_1876] Existence of reference in the role ClientServerOperationMapping.secondOperation

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈For each ClientServerOperationMapping, the reference in the role secondOperation shall exist.⌋

4.4.1.3 Mapping of Mode Interface Elements

[TPS_SWCT_01160] **ModeInterfaceMapping** ⌈The ModeInterfaceMapping defines the correlation of ModeDeclarationGroupPrototypes defined in the context of ModeSwitchInterfaces.⌋

[TPS_SWCT_01167] Validity of ModeInterfaceMapping ⌈The mapping of ModeDeclarationGroupPrototypes is only valid if these are typed by (read "refer to") compatible ModeDeclarationGroups.⌋

The compatibility of ModeDeclarationGroups is described in Chapter 6.7.

Class	**ModeInterfaceMapping**			
Note	Defines the mapping of ModeDeclarationGroupPrototypes in context of two different ModeInterfaces.			
Base	*ARObject*, *AtpBlueprint*, *Identifiable*, *MultilanguageReferrable*, *PortInterfaceMapping*, *Referrable*			
Aggregated by	PortInterfaceMappingSet.portInterfaceMapping			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
modeMapping	ModeDeclarationGroup PrototypeMapping	0..1	aggr	Mapping of two ModeDeclarationGroupPrototypes in two different ModeInterfaces **Tags:** atp.Splitkey=modeMapping

Table 4.29: ModeInterfaceMapping

Class	**ModeDeclarationGroupPrototypeMapping**			
Note	Defines the mapping of two particular ModeDeclarationGroupPrototypes (in the given context) that are unequally named and/or require a reference to a ModeDeclarationMappingSet in order to become compatible by definition of ModeDeclarationMappings.			
Base	*ARObject*			
Aggregated by	ModeInterfaceMapping.modeMapping			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
firstModeGroup	ModeDeclarationGroup Prototype	0..1	ref	ModeDeclarationGroupPrototype to be mapped. **Tags:** atp.Splitkey=firstModeGroup
mode Declaration MappingSet	ModeDeclaration MappingSet	0..1	ref	This represents the available mappings of Mode Declarations in the context ot this ModeDeclarationGroup Prototype. **Tags:** atp.Splitkey=modeDeclarationMappingSet
secondMode Group	ModeDeclarationGroup Prototype	0..1	ref	ModeDeclarationGroupPrototype to be mapped. **Tags:** atp.Splitkey=secondModeGroup

Table 4.30: ModeDeclarationGroupPrototypeMapping

[constr_1877] Existence of reference ModeDeclarationGroupPrototypeMapping.firstModeGroup

Imposition time: CP: IT_RteGen

⌈For each ModeDeclarationGroupPrototypeMapping, the reference in the role firstModeGroup shall exist.⌋

[constr_1878] Existence of reference ModeDeclarationGroupPrototypeMapping.secondModeGroup

Imposition time: CP: IT_RteGen

⌈For each ModeDeclarationGroupPrototypeMapping, the reference in the role secondModeGroup shall exist.⌋

[constr_10562] Uniqueness of ModeDeclarationGroupPrototypeMapping.firstModeGroup and secondModeGroup

Imposition time: CP: IT_RteGen

⌈Within the context of a ModeInterfaceMapping, **no two** ModeDeclarationGroupPrototypeMappings shall exist where the targets of the combination of references in the roles firstModeGroup and secondModeGroup are identical.⌋

[TPS_SWCT_01449] Semantics of a ModeDeclarationGroupPrototypeMapping ⌈A ModeDeclarationGroupPrototypeMapping shall be used to identify two ModeDeclarationGroups that afterwards shall be considered compatible. This also applies if the two ModeDeclarationGroups deviate with respect to the contained modeTransitions.⌋

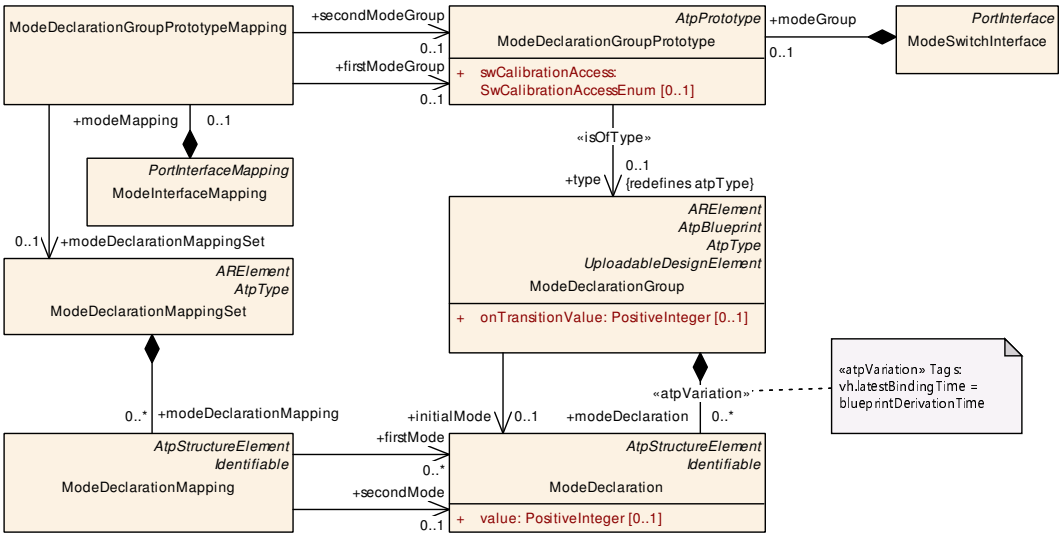

Figure 4.19: Mapping of ModeSwitchInterface elements

[constr_1246] Consistency of firstMode and secondMode in the scope of one ModeDeclarationMappingSet

Imposition time: CP: IT_RteGen

⌈Within the scope of one ModeDeclarationMappingSet,

- all firstModes shall belong to one and only one ModeDeclarationGroup and
- all secondModes shall belong to one and only one **other** ModeDeclarationGroup.

⌋

[constr_10563] Uniqueness of ModeDeclarationMapping.firstMode and secondMode

Imposition time: CP: IT_RteGen

⌈Within the context of a ModeDeclarationMappingSet, no two ModeDeclarationMappings shall exist where the targets of the combination of references in the roles firstMode and secondMode are identical.⌋

[constr_1247] Consistency of ModeDeclarationMappingSet with respect to the referenced firstModeGroup and secondModeGroup

Imposition time: CP: IT_RteGen

⌈If a ModeDeclarationGroupPrototypeMapping.modeDeclarationMappingSet exists, then

- the ModeDeclarationGroup owning the modeDeclarations referenced in the role firstMode shall be the type of the ModeDeclarationGroupPrototypeMapping.firstModeGroup and
- the ModeDeclarationGroup owning the modeDeclarations referenced in the role secondMode shall be the type of the ModeDeclarationGroupPrototypeMapping.secondModeGroup.

⌋

[TPS_SWCT_01462] ModeDeclarationMapping defines the explicit correlation of ModeDeclarations ⌈The meta-class ModeDeclarationMapping defines the explicit correlation of ModeDeclarations defined in the context of two ModeDeclarationGroups.⌋

[TPS_SWCT_01463] The reference in the role ModeDeclarationGroupPrototypeMapping.modeDeclarationMappingSet defines the applicable set of ModeDeclarationMappings ⌈The attribute ModeDeclarationGroupPrototypeMapping.modeDeclarationMappingSet defines the applicable set of ModeDeclarationMappings for the connection of ModeDeclarationGroupPrototypes typed by ModeDeclarationGroups with differently named ModeDeclarations and/or with a different number of ModeDeclarations.⌋

Class	**ModeDeclarationMappingSet**			
Note	This meta-class implements a container for ModeDeclarationMappings **Tags:** atp.recommendedPackage=PortInterfaceMappingSets			
Base	*ARElement*, *ARObject*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	*Type*	*Mult.*	*Kind*	*Note*

▽

△

Class	ModeDeclarationMappingSet			
mode Declaration Mapping	ModeDeclaration Mapping	*	aggr	This represents the collection of ModeDeclaration Mappings owned by the enclosing ModeDeclaration MappingSet. **Tags:** atp.Splitkey=modeDeclarationMapping, mode DeclarationMapping.shortName

Table 4.31: ModeDeclarationMappingSet

Class	ModeDeclarationMapping			
Note	This meta-class implements a concrete mapping of two ModeDeclarations.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, ModeDeclarationMappingSet.modeDeclarationMapping			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
firstMode	ModeDeclaration	*	ref	This represents the first ModeDeclaration of the Mode DeclarationMapping. This reference has the multiplicity 0 ..* to support use cases where e.g. one mode of the mode user is mapped to several modes of the mode manager. **Tags:** atp.Splitkey=firstMode
secondMode	ModeDeclaration	0..1	ref	This represents the second ModeDeclaration of the Mode DeclarationMapping. **Tags:** atp.Splitkey=secondMode

Table 4.32: ModeDeclarationMapping

[constr_1879] Existence of reference ModeDeclarationMapping.firstMode

Imposition time: CP: IT_RteGen

⌈For each ModeDeclarationMapping, at least one reference firstMode shall exist.⌋

[constr_1880] Existence of reference ModeDeclarationMapping.secondMode

Imposition time: CP: IT_RteGen

⌈For each ModeDeclarationMapping, the reference secondMode shall exist.⌋

[TPS_SWCT_01464] ModeDeclaration of a mode user is mapped to exactly one ModeDeclaration of a mode manager ⌈The mode that corresponds to the ModeDeclaration of the Mode User is entered or exited when the mode of the mode manager that corresponds to the mapped (i.e. referenced by the same ModeDeclarationMapping) ModeDeclaration of the mode manager is entered or exited.⌋

[TPS_SWCT_01465] ModeDeclaration of a mode user is mapped to several ModeDeclarations of a mode manager ⌈The mode that corresponds to the mapped ModeDeclaration of the mode user is entered when any of the modes of the Mode Manager that correspond to ModeDeclarations referenced by the applicable ModeDeclarationMapping is entered.

The mode that corresponds to the mapped ModeDeclaration of the mode user is exited when any of the modes of the Mode Manager that correspond to ModeDeclarations referenced by the applicable ModeDeclarationMapping is exited if the new mode is not mapped to related mode of the mode user.⌋

Please note if one ModeDeclaration of a mode user is mapped to **several** ModeDeclarations of a mode manager by means of several ModeDeclarationMappings the intended semantics is defined in a way that the individual mode transitions of the mode manager are representing “exit” and “enter” events for the Mode User. In other words, the individual transitions are recognizable by the mode user.

If one ModeDeclaration of a mode user is (by utilizing the multiplicity of the role firstMode) mapped to several ModeDeclarations of a mode manager in the context of a single ModeDeclarationMapping, the semantics is defined in a way that the individual mode transitions of the Mode Manager are not recognizable to the Mode User.

[constr_1209] Mapping of ModeDeclarations of mode user to ModeDeclaration of mode manager

Imposition time: CP: IT_RteGen

⌈A configuration that maps **several** ModeDeclarations representing modes of a mode user to **one** ModeDeclaration representing a mode of a mode manager shall be rejected.⌋

[constr_1210] Mapping of ModeDeclarations of mode user to all ModeDeclarations of mode manager

Imposition time: CP: IT_RteGen

⌈If a ModeDeclarationMapping exists that references a ModeDeclaration representing a mode of the mode manager, then ModeDeclarationMappings shall exist that map all modes of the mode manager to modes of the mode user.⌋

Please note that [constr_1210] prevents the existence of configurations where the mode user is not in a defined mode when no transition is ongoing.

[TPS_SWCT_01545] ModeDeclaration of a *mode user* that is not mapped to a ModeDeclaration of a *mode manager* ⌈A ModeDeclaration of a *mode user* that is not mapped to a ModeDeclaration of a *mode manager* represents a valid model. In this case the related mode is never entered nor exit during runtime of the ECU.⌋

4.4.1.4 Mapping of Trigger Interface Elements

[TPS_SWCT_01161] TriggerInterfaceMapping ⌈The TriggerInterfaceMapping defines the correlation of Triggers defined in the context TriggerInterfaces.⌋

Class	TriggerInterfaceMapping			
Note	Defines the mapping of unequal named Triggers in context of two different TriggerInterfaces.			
Base	*ARObject*, *AtpBlueprint*, *Identifiable*, *MultilanguageReferrable*, *PortInterfaceMapping*, *Referrable*			
Aggregated by	PortInterfaceMappingSet.portInterfaceMapping			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
triggerMapping	TriggerMapping	*	aggr	Mapping of two Trigger in two different TriggerInterface **Tags:** atp.Splitkey=triggerMapping

Table 4.33: TriggerInterfaceMapping

Class	TriggerMapping			
Note	Defines the mapping of two particular unequally named Triggers in the given context.			
Base	*ARObject*			
Aggregated by	TriggerInterfaceMapping.triggerMapping			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
firstTrigger	Trigger	0..1	ref	A Trigger to be mapped. **Tags:** atp.Splitkey=firstTrigger
secondTrigger	Trigger	0..1	ref	A Trigger to be mapped. **Tags:** atp.Splitkey=secondTrigger

Table 4.34: TriggerMapping

[constr_1881] Existence of reference TriggerMapping.firstTrigger

Imposition time: CP: IT_RteGen

⌈For each TriggerMapping, the reference firstTrigger shall exist.⌋

[constr_1882] Existence of reference TriggerMapping.secondTrigger

Imposition time: CP: IT_RteGen

⌈For each TriggerMapping, the reference secondTrigger shall exist.⌋

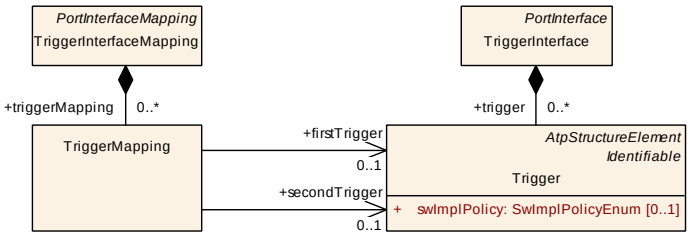

Figure 4.20: Mapping of TriggerInterface elements

[constr_10564] Uniqueness of TriggerMapping.firstTrigger and secondTrigger

Imposition time: CP: IT_RteGen

⌈Within the context of a TriggerInterfaceMapping, **no two** TriggerMappings shall exist where the targets of the combination of references in the roles firstTrigger and secondTrigger are identical.⌋

4.4.1.5 Mapping of Elements of a composite Data Type

The mapping of elements of PortInterfaces is not limited to mapping entire DataPrototypes onto each other.

[TPS_SWCT_01023] Mapping of elements of composite data types ⌈For applications of DataInterfaces it is also possible to formally describe the mapping of elements of ApplicationCompositeDataTypes or ImplementationDataTypes of category STRUCTURE or ARRAY onto each other.⌋

This ability (for which [constr_10087] applies) can be used if e.g. dataElements on the "source" and "target" end side are typed by different ApplicationRecordDataTypes.

In this case the mapping of elements of ApplicationCompositeDataTypes or ImplementationDataTypes of category STRUCTURE or ARRAY onto each other allows for the definition of specific pairs of elements that fulfill the compatibility rules.

[constr_10087] Restriction for the existence of a SubElementMapping

Imposition time: CP: IT_RteGen

⌈The existence of a DataPrototypeMapping.subElementMapping is only supported if the PortPrototypes that are referenced by the respective SwConnector are typed by a DataInterface.⌋

[constr_10565] Uniqueness of SubElementMapping.firstElement and secondElement

Imposition time: CP: IT_RteGen

⌈Within the context of a DataPrototypeMapping, **no two** SubElementMappings shall exist where the targets of the combination of references in the roles firstElement and secondElement are identical.⌋

[TPS_SWCT_01551] Mapping of elements on the "source" end to elements on the "target" end ⌈Unless the attribute swImplPolicy is set to queued, it is not required that all elements on the "source" end need to be mapped to elements on the "target" end to achieve compatibility.⌋

The details regarding the compatibility rules are explained in Chapter 6.3.

[constr_1279] Unmapped elements of ApplicationCompositeDataTypes or ImplementationDataTypes and the attribute swImplPolicy

Imposition time: CP: IT_RteGen

⌈If the attribute swImplPolicy is set to queued, then it is not allowed to have unmapped elements of ApplicationCompositeDataTypes or ImplementationDataTypes of category STRUCTURE or ARRAY on the "target" end.⌋

[constr_1280] Unmapped `dataElement` on the "target" end shall have an `initValue`

Imposition time: CP: `IT_RteGen`

⌈If elements of `ApplicationCompositeDataType`s or `ImplementationDataType`s of `category STRUCTURE` or `ARRAY` are not considered in a `SubElementMapping` **and** the `NonqueuedReceiverComSpec` is aggregated by an `AbstractRequiredPortPrototype` referenced by the "target" end, then the enclosing `dataElement` shall have an `initValue`.⌋

[TPS_SWCT_01024] Combination of `ApplicationCompositeDataType` and nested `ImplementationDataType` ⌈The mapping of elements of `ApplicationCompositeDataType`s or `ImplementationDataType`s of `category STRUCTURE` or `ARRAY` works for both `ApplicationCompositeDataType` and nested `ImplementationDataType`s and even for combinations of them, i.e. one `PortInterface` may use an `ApplicationCompositeDataType` while the other `PortInterface` uses a nested `ImplementationDataType`.⌋

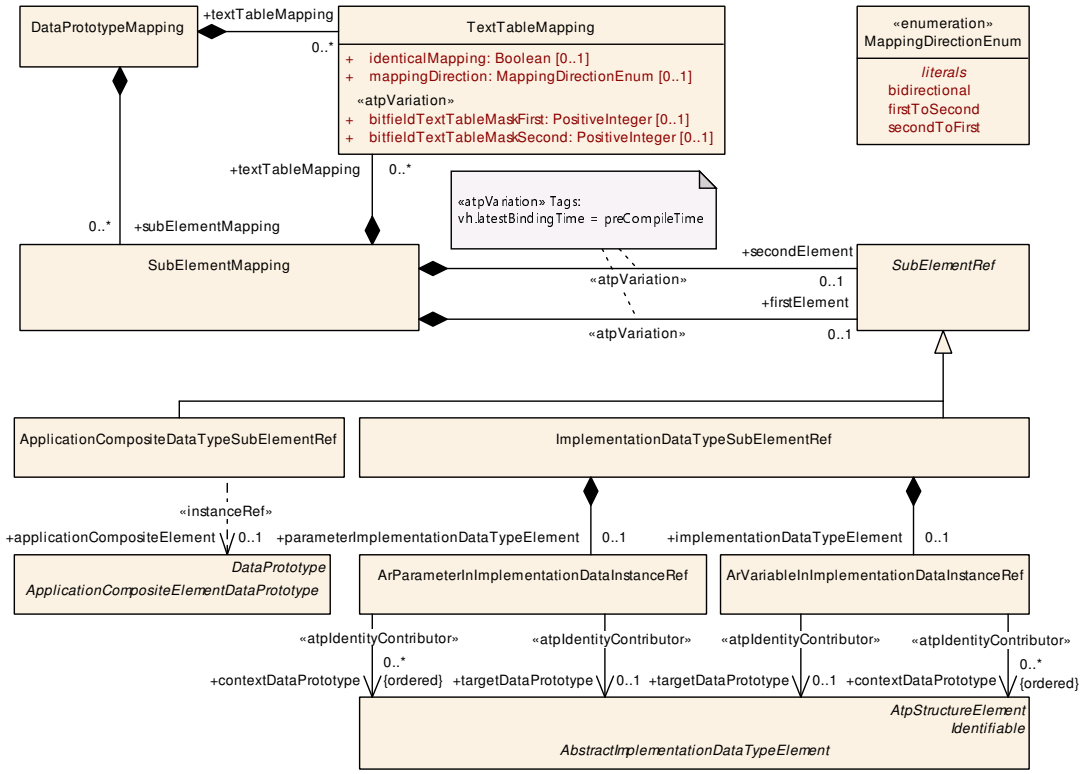

Figure 4.21: Mapping of elements of composite data types

[TPS_SWCT_01195] Mapping of composite element to primitive `DataPrototype`
⌈It is also possible to map an element of a composite data type on the "source" end to a primitive `DataPrototype` on the "target" end.

For this purpose the reference to the dataElement/nvData contained in the PortPrototype on the "source" end shall exist and the reference to the dataElement/nvData contained in the PortPrototype on the "target" end shall not exist.⌋

In general, the multiplicity of the respective dataElement/nvData contained in the PortPrototype on the "source" end can technically also be set to 0 but this case is reserved for future use.

[constr_1190] Only one mapping for composite to primitive use case

Imposition time: CP: IT_RteGen

⌈In the case described by [TPS_SWCT_01195] only one subElementMapping shall exist at the enclosing DataPrototypeMapping.⌋

[constr_1300] Primitive DataPrototype on the "source" end shall not be mapped to element of a composite data type on the "target" end of the SwConnector

Imposition time: CP: IT_RteGen

⌈The usage of DataPrototypeMapping or SubElementMapping does not support the following configuration:

- The AutosarDataPrototype contained in the PortPrototype on the "source" end of an SwConnector is typed by an ApplicationPrimitiveDataType of category VALUE or ImplementationDataType of category VALUE or category TYPE_REFERENCE that eventually resolves to category VALUE.
- The DataPrototypeMapping aggregates a subElementMapping that refers to a ImplementationDataTypeElement or ApplicationCompositeElementDataPrototype contained in the PortPrototype on the "target" end.

⌋

[constr_1611] Existence of ImplementationDataTypeSubElementRef.implementationDataTypeElement as opposed to ImplementationDataTypeSubElementRef.parameterImplementationDataTypeElement

Imposition time: CP: IT_RteGen

⌈For any given ImplementationDataTypeSubElementRef, either the aggregation

- ImplementationDataTypeSubElementRef.implementationDataTypeElement or
- ImplementationDataTypeSubElementRef.parameterImplementationDataTypeElement

⌋

In other words, the ImplementationDataTypeSubElementRef shall **either** refer to the nested hierarchy inside a VariableDataPrototype **or** a ParameterDataPrototype.

[constr_10745] Multiplicity of the reference in the role SubElementMapping.textTableMapping

Imposition time: IT_RteGen

⌈Within the context of a SubElementMapping, the reference in the role textTableMapping shall exist **at most twice**.⌋

Class	**SubElementMapping**			
Note	This meta-class allows for the definition of mappings of elements of a composite data type.			
Base	*ARObject*			
Aggregated by	DataPrototypeMapping.subElementMapping			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
firstElement	SubElementRef	0..1	aggr	This represents the first element referenced in the scope of the mapping. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=firstElement, firstElement.variation Point.shortLabel vh.latestBindingTime=preCompileTime
secondElement	SubElementRef	0..1	aggr	This represents the second element referenced in the scope of the mapping. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=secondElement, secondElement.variation Point.shortLabel vh.latestBindingTime=preCompileTime
textTable Mapping	TextTableMapping	*	aggr	This allows for the text-table translation of individual elements of a composite data type. **Tags:** atp.Splitkey=textTableMapping

Table 4.35: SubElementMapping

Class	***SubElementRef*** (abstract)			
Note	This meta-class provides the ability to reference elements of composite data type.			
Base	*ARObject*			
Subclasses	ApplicationCompositeDataTypeSubElementRef, ImplementationDataTypeSubElementRef			
Aggregated by	SubElementMapping.firstElement, SubElementMapping.secondElement			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 4.36: SubElementRef

Class	**ImplementationDataTypeSubElementRef**
Note	This meta-class represents the specialization of SubElementMapping with respect to [ARMeta Class{ImplementationDataType}}s.
Base	*ARObject*, *SubElementRef*

▽

△

Class	ImplementationDataTypeSubElementRef			
Aggregated by	SubElementMapping.firstElement, SubElementMapping.secondElement			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
implementation DataType Element	ArVariableIn ImplementationData InstanceRef	0..1	aggr	This represents the referenced implementationDataType Element. **Tags:** atp.Splitkey=implementationDataTypeElement, implementationDataTypeElement.portPrototype, implementationDataTypeElement.rootVariableData Prototype, implementationDataTypeElement.contextData Prototype, implementationDataTypeElement.targetData Prototype
parameter Implementation DataType Element	ArParameterIn ImplementationData InstanceRef	0..1	aggr	This represents the referenced ImplementationDataType Element. **Tags:** atp.Splitkey=parameterImplementationDataType Element, parameterImplementationDataType Element.contextDataPrototype, parameterImplementation DataTypeElement.portPrototype, parameter ImplementationDataTypeElement.rootParameterData Prototype, parameterImplementationDataType Element.targetDataPrototype

Table 4.37: ImplementationDataTypeSubElementRef

Class	ApplicationCompositeDataTypeSubElementRef			
Note	This meta-class represents the specialization of SubElementMapping with respect to ApplicationCompositeDataTypes.			
Base	*ARObject*, *SubElementRef*			
Aggregated by	SubElementMapping.firstElement, SubElementMapping.secondElement			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
application Composite Element	ApplicationComposite ElementDataPrototype	0..1	iref	This represents the referenced ApplicationComposite DataPrototype. **Tags:** atp.Splitkey=applicationCompositeElement, applicationCompositeElement.rootDataPrototype, applicationCompositeElement.contextDataPrototype, applicationCompositeElement.targetDataPrototype **InstanceRef implemented by:** ApplicationComposite ElementInPortInterfaceInstanceRef

Table 4.38: ApplicationCompositeDataTypeSubElementRef

[constr_1883] Existence of ApplicationCompositeDataTypeSubElement-Ref.applicationCompositeElement

Imposition time: CP: IT_RteGen

⌈For each ApplicationCompositeDataTypeSubElementRef, the reference applicationCompositeElement shall exist.⌋

[constr_1184] Consistency of rootDataPrototype and base in the context of ApplicationCompositeElementInPortInterfaceInstanceRef

Imposition time: CP: IT_RteGen

⌈The rootDataPrototype referenced by ApplicationCompositeElementIn-PortInterfaceInstanceRef shall be owned by the applicable subclass of Data-Interface referenced in the role base.

This implies that the rootDataPrototype shall be a ParameterDataPrototype if the base is a ParameterInterface. Otherwise, the rootDataPrototype shall be a VariableDataPrototype.⌋

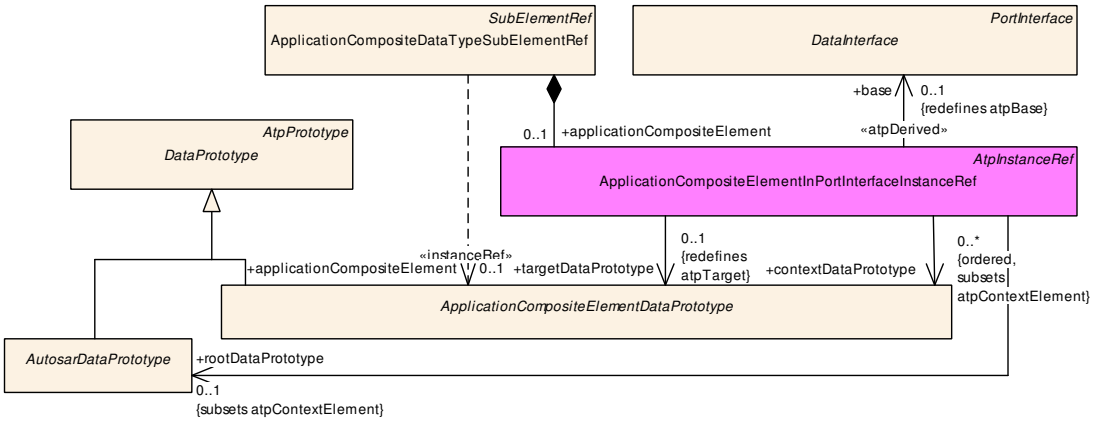

Figure 4.22: Implementation of the InstanceRef for the mapping of elements of composite application data types

[constr_1185] Consistency of data types in the context of ApplicationCompositeElementInPortInterfaceInstanceRef

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈The definition of attributes contextDataPrototype and targetDataPrototype shall (via the type-prototype pattern) be enclosed in the context of the definition of the data type used to type rootDataPrototype.⌋

In other words, it shall be possible to reach contextDataPrototype and targetDataPrototype by means of the type-prototype chain created by the definition of the data type used to type rootDataPrototype. And, as implied by the definition of the InstanceRef, the contextDataPrototypes shall enclose each other and, eventually, the targetDataPrototype.

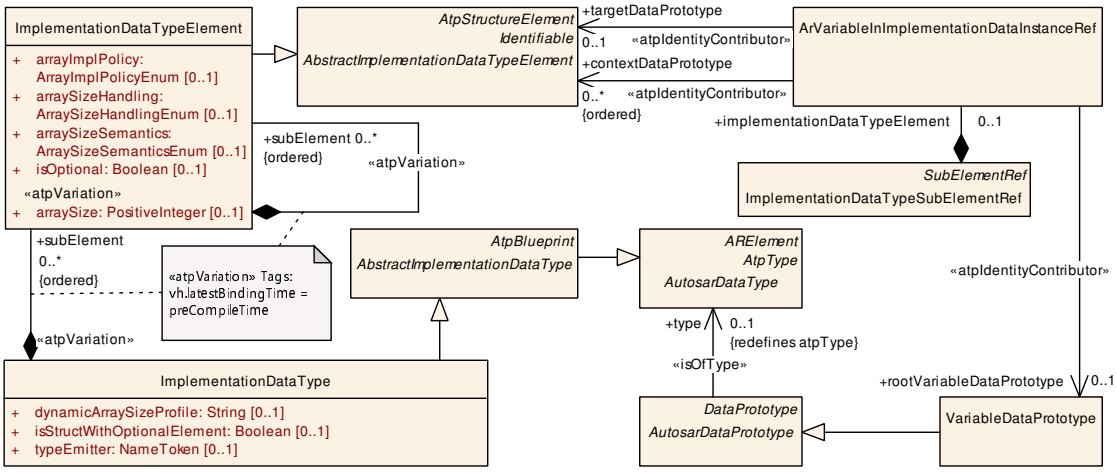

Figure 4.23: Implementation of the InstanceRef for the mapping of elements of a VariableDataPrototype typed by a composite implementation data type

[constr_1186] Consistency of data types in the context of ArVariableInImplementationDataInstanceRef

Imposition time: CP: IT_RteGen

⌈The definition of attributes contextDataPrototype and targetDataPrototype shall be enclosed in the context of the definition of the data type used to type rootVariableDataPrototype.⌋

[constr_1518] Consistency of data types in the context of ArParameterInImplementationDataInstanceRef

Imposition time: CP: IT_RteGen

⌈The definition of attributes contextDataPrototype and targetDataPrototype shall be enclosed in the context of the definition of the data type used to type rootParameterDataPrototype.⌋

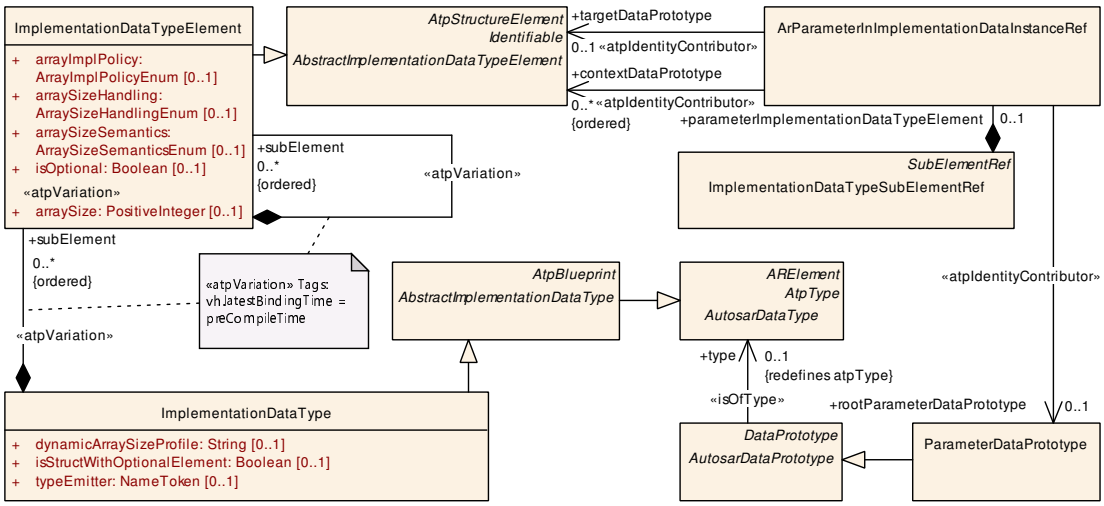

Figure 4.24: Implementation of the InstanceRef for the mapping of elements of a ParameterDataPrototype typed by a composite implementation data type

4.4.2 Data Conversion

[TPS_SWCT_01560] Supported categorys of CompuMethods for data conversion ⌈Data conversion shall be supported for AutosarDataTypes that refer to CompuMethods of category

- LINEAR,
- IDENTICAL,
- SCALE_LINEAR_AND_TEXTTABLE, as long as there is **only one linear scale**,
- TEXTTABLE,
- BITFIELD_TEXTTABLE, and

- RAT_FUNC - as long as the semantics of the latter comes down to a reciprocal linear data scaling.

⌋

[TPS_SWCT_01561] Application of data conversion to composite AutosarDataTypes ⌈Data conversion is also applicable for composite AutosarDataTypes. The actual conversion, however, shall be individually applied to each leaf element of a given composite AutosarDataType.⌋

4.4.2.1 Linear Data Scaling

A *Linear Data Scaling* can be defined under following preconditions:

[TPS_SWCT_01549] Definition of linear data scaling ⌈The term Linear Scaling is defined as follows:

1. Regarding the existence of CompuMethods one of the following cases shall apply:
   (a) The involved AutosarDataTypes refer to CompuMethods of category IDENTICAL, LINEAR, or RAT_FUNC.
   (b) If one side (sender or receiver) does not refer to a CompuMethod then a "default" CompuMethod of category IDENTICAL shall be assumed.
2. The CompuMethods refer either to compatible Units or to Units that in turn refer to compatible definitions of PhysicalDimension.
3. Both CompuMethods fulfill the following condition:

$$Int = \frac{N_0 * phys^0 + N_1 * phys^1 + N_2 * phys^2 + ... + N_i * phys^i}{D_0 * phys^0 + D_1 * phys^1 + D_2 * phys^2 + ... + D_i * phys^i}$$

with

- N_2=N_3=...=N_i=0
- D_1=D_2=...=D_i=0
- $N_1 \neq 0$
- $D_0 \neq 0$

The coefficient N_0 represents the offset and can take any value.

⌋

[TPS_SWCT_01550] Definition of reciprocal linear data scaling ⌈The term Reciprocal Linear Scaling is defined as follows:

1. The involved AutosarDataTypes refer to CompuMethods of category RAT_FUNC.
2. The CompuMethods refer either to compatible Units or to Units that in turn refer to compatible definitions of PhysicalDimension.
3. Both CompuMethods fulfill the following condition:

$$Int = \frac{N_0 * phys^0 + N_1 * phys^1 + N_2 * phys^2 + ... + N_i * phys^i}{D_0 * phys^0 + D_1 * phys^1 + D_2 * phys^2 + ... + D_i * phys^i}$$

with

- N_1=N_2=...=N_i=0
- D_2=D_3=...=D_i=0
- $N_0 \neq$0
- $D_1 \neq$0

The coefficient D_0 represents the (reciprocal) offset and can take any value.

⌋

[TPS_SWCT_01168] Linear conversion factor can be calculated ⌈In such cases a linear conversion factor can be calculated out of the factorSiToUnit and offsetSiToUnit attributes of the referred Units and the CompuRationalCoeffs of a compuInternalToPhys/compuPhysToInternal of the referred CompuMethods.⌋

4.4.2.2 Table Conversion

[TPS_SWCT_01162] Existence of TextTableMapping ⌈A TextTableMapping can be defined if the AutosarDataTypes refer to CompuMethods of category TEXTTABLE, SCALE_LINEAR_AND_TEXTTABLE, and BITFIELD_TEXTTABLE.⌋

Please note that the use case behind the appearance of BITFIELD_TEXTTABLE in [TPS_SWCT_01162] is the fact that BSW modules such as the Dem need to put data into the NVRAM that has the nature of single bits embedded into a composite data type.

The TextTableMapping is defined as a table based conversion.

[TPS_SWCT_01163] Conversion from firstValue to secondValue ⌈A firstValue of a valuePair is converted into the secondValue in the case of a data flow from the firstDataPrototype to the secondDataPrototype.⌋

[TPS_SWCT_01164] Conversion from secondValue to firstValue ⌈In the case of a data flow from the secondDataPrototype to firstDataPrototype the secondValue is substituted by the firstValue.⌋

[TPS_SWCT_01165] Invertible mapping ⌈If the mappingDirection attribute is set to bidirectional then the TextTableMapping has to be invertible. This requires that the list of all firstValues and the list of all secondValues do not contain identical values inside a list.⌋

[TPS_SWCT_01165] explains that in some cases the text-table mapping needs a forward direction and a backward direction. Therefore, the upper bound for the multiplicity of a TextTableMapping in a given context is 2.

This restriction is reflected in the definition of [constr_10744] and [constr_10745].

[constr_10744] Multiplicity of the reference in the role DataPrototypeMapping.textTableMapping

Imposition time: IT_RteGen

⌈Within the context of a DataPrototypeMapping, the reference in the role textTableMapping shall exist **at most twice**.⌋

[TPS_SWCT_01166] Non-invertible mapping ⌈For non-invertible TextTableMapping, a dedicated TextTableMapping for each direction can be defined.⌋

[constr_1303] Applicability of TextTableMapping depending on the value of CompuMethod.category

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈If a DataPrototypeMapping aggregates a TextTableMapping then only certain combinations of the value of the applicable CompuMethod.category are supported:

- category of firstDataPrototype: TEXTTABLE,
  category of secondDataPrototype: TEXTTABLE
- category of firstDataPrototype: SCALE_LINEAR_AND_TEXTTABLE,
  category of secondDataPrototype: TEXTTABLE
- category of firstDataPrototype: TEXTTABLE,
  category of secondDataPrototype: SCALE_LINEAR_AND_TEXTTABLE
- category of firstDataPrototype: BITFIELD_TEXTTABLE,
  category of secondDataPrototype: TEXTTABLE
- category of firstDataPrototype: TEXTTABLE,
  category of secondDataPrototype: BITFIELD_TEXTTABLE
- category of firstDataPrototype: BITFIELD_TEXTTABLE,
  category of secondDataPrototype: BITFIELD_TEXTTABLE

⌋

To some extent, *bitfields* can be regarded as a hybrid between a primitive and a structured data type:

- On the one hand, a *bitfield* is defined in the context of a primitive ImplementationDataType.
- On the other hand, by means of the definition of a mask, it is possible to define **isolated parts** within the primitive ImplementationDataType that potentially can be totally independent of each other with respect to the semantics of the data that match the mask.

In other words, the existence of semantically independent and potentially isolated parts within the primitive ImplementationDataType creates a **similar characteristic** as if the definitions of the isolated parts were created by means of defining primitive ImplementationDataTypeElements within the context of a composite ImplementationDataType.

And because it is possible to regard the "mission statement" of a DataPrototype that refers to a CompuMethod of category BITFIELD_TEXTTABLE as to mimic the semantics of a structured data type it is also possible to apply some rules that are already in place for structured data types in this specific case as well.

This conclusion, in combination with the existence of [TPS_SWCT_01551], sets the stage for [TPS_SWCT_01583].

[TPS_SWCT_01583] Completeness of TextTableMapping is not a requirement
⌈If a DataPrototypeMapping contains one or more TextTableMapping(s) where the DataPrototype on the **sender side** refers to a CompuMethod of category BITFIELD_TEXTTABLE it is **not** required that for each possible value and each possible bit mask on the sender side corresponding values on the receiver side are specified.⌋

With respect to [TPS_SWCT_01583] it is still important to observe that within a single mask **all values on the sender side shall have a mapping** to the receiver side.

Otherwise, the RTE generator would not be able to create mapping code that unambiguously takes care of mapping the correct values onto each other.

[constr_1304] Existence of attribute bitfieldTextTableMaskFirst

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈The attribute bitfieldTextTableMaskFirst shall be defined **only if** the firstDataPrototype of a DataPrototypeMapping refers to a CompuMethod that has the value of category set to BITFIELD_TEXTTABLE.⌋

[constr_1305] Existence of attribute bitfieldTextTableMaskSecond

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈The attribute bitfieldTextTableMaskSecond shall be defined **only if** the secondDataPrototype of a DataPrototypeMapping refers to a CompuMethod that has the value of category set to BITFIELD_TEXTTABLE.⌋

[constr_1313] Completeness of TextTableMapping for the values of a given bit mask on the sender side

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈If a DataPrototypeMapping contains one or more TextTableMapping(s) where the DataPrototype on the **sender side** refers to a CompuMethod of category BITFIELD_TEXTTABLE then all DataPrototypeMapping.textTableMapping shall aggregate a collection of TextTableMapping.valuePair where each possible value of the **sender bit mask**[9] is represented by exactly one TextTableValuePair.firstValue ([TPS_SWCT_01163]) or TextTableValuePair.secondValue ([TPS_SWCT_01164]).⌋

[constr_1306] Limitation of TextTableMapping for CompuMethods that have the value of category set to BITFIELD_TEXTTABLE

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈For any TextTableMapping where both firstDataPrototype and secondDataPrototype refer to CompuMethods that have the value of category set to BITFIELD_TEXTTABLE **and** where the attribute TextTableMapping.valuePair exists the value of attribute TextTableMapping.identicalMapping shall be set to false.⌋

[constr_1307] Consistency of values and masks in TextTableMapping

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈If a TextTableMapping element defines bit masks as bitfieldTextTableMaskFirst or bitfieldTextTableMaskSecond then all contained TextTableMapping.valuePair.firstValues as well as all TextTableMapping.valuePair.secondValues shall **not** specify a value that would be ruled out when - depending on the given value of TextTableMapping.mappingDirection - the relevant bit mask is applied.⌋

Example 4.1

Example for [constr_1307]: For a bit mask 0b00001000, only the corresponding values 8 and 0 are allowed.

Class	TextTableMapping
Note	Defines the mapping of two DataPrototypes typed by AutosarDataTypes that refer to CompuMethods of category TEXTTABLE, SCALE_LINEAR_AND_TEXTTABLE or BITFIELD_TEXTTABLE.
Base	*ARObject*

▽

[9] Depending on the applicable case this means either bitfieldTextTableMaskFirst (applies if [TPS_SWCT_01163] is in place) or bitfieldTextTableMaskSecond for the case of [TPS_SWCT_01164].

△

Class	TextTableMapping			
Aggregated by	DataPrototypeMapping.textTableMapping, SenderRecArrayTypeMapping.senderToSignalTextTable Mapping, SenderRecArrayTypeMapping.signalToReceiverTextTableMapping, SenderReceiverToSignal Mapping.senderToSignalTextTableMapping, SenderReceiverToSignalMapping.signalToReceiverTextTable Mapping, SenderRecRecordElementMapping.senderToSignalTextTableMapping, SenderRecRecord ElementMapping.signalToReceiverTextTableMapping, SubElementMapping.textTableMapping			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
bitfieldTextTable MaskFirst	PositiveInteger	0..1	attr	This attribute can be used to support the mapping of bit field to bit field, boolean values to bit fields, and vice versa. The attribute defines the bit mask for the first element of the TextTableMapping. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
bitfieldTextTable MaskSecond	PositiveInteger	0..1	attr	This attribute can be used to support the mapping of bit field to bit field, boolean values to bit fields, and vice versa. The attribute defines the bit mask for the second element of the TextTableMapping. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
identical Mapping	Boolean	0..1	attr	If identicalMapping is set == true the values of the two referenced DataPrototypes do not need any conversion of the values.
mapping Direction	MappingDirectionEnum	0..1	attr	Specifies the conversion direction for which the TextTable Mapping is applicable.
valuePair	TextTableValuePair	*	aggr	Defines a pair of values which are translated into each other. **Tags:** atp.Splitkey=valuePair

Table 4.39: TextTableMapping

[constr_1884] Existence of attribute `TextTableMapping.identicalMapping`

Imposition time: CP: `IT_RteGen`, AP: `IT_BefAraApiGen`

⌈For each `TextTableMapping`, the attribute `identicalMapping` shall exist.⌋

[constr_1885] Existence of attribute `TextTableMapping.mappingDirection`

Imposition time: CP: `IT_RteGen`, AP: `IT_BefAraApiGen`

⌈For each `TextTableMapping`, the attribute `mappingDirection` shall exist.⌋

Enumeration	MappingDirectionEnum
Note	Specifies the conversion direction for which the mapping is applicable.
Aggregated by	TextTableMapping.mappingDirection
Literal	**Description**
bidirectional	The TextTableMapping is applicable in both directions. **Tags:** atp.EnumerationLiteralIndex=0
firstToSecond	The TextTableMapping is applicable in the direction from firstDataPrototype / firstOperationArgument referring into the PortInterface of the PPortPrototype to secondDataPrototype / secondOperation Argument referring into the PortInterface of the RPortPrototype. **Tags:** atp.EnumerationLiteralIndex=1

▽

△

Enumeration	**MappingDirectionEnum**
secondToFirst	The TextTableMapping is applicable in the direction from secondDataPrototype / secondOperation Argument referring into the PortInterface of the PPortPrototype to firstDataPrototype / firstOperation Argument referring into the PortInterface of the RPortPrototype. **Tags:** atp.EnumerationLiteralIndex=2

Table 4.40: MappingDirectionEnum

Class	**TextTableValuePair**			
Note	Defines a pair of text values which are translated into each other.			
Base	*ARObject*			
Aggregated by	TextTableMapping.valuePair			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
firstValue	Numerical	0..1	attr	Value of first DataPrototype provided similar to a numerical ValueSpecification which is intended to be assigned to a Primitive data element. Note that the numerical value is a variant, it can be computed by a formula. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
secondValue	Numerical	0..1	attr	Value of second DataPrototype provided similar to a numerical ValueSpecification which is intended to be assigned to a Primitive data element. Note that the numerical value is a variant, it can be computed by a formula. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 4.41: TextTableValuePair

[constr_1886] Existence of attribute TextTableValuePair.firstValue

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈For each TextTableValuePair, the attribute firstValue shall exist.⌋

[constr_1887] Existence of attribute TextTableValuePair.secondValue

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈For each TextTableValuePair, the attribute secondValue shall exist.⌋

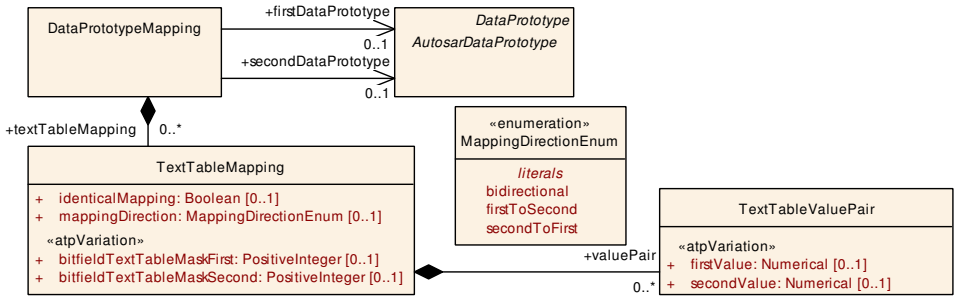

Figure 4.25: Mapping of DataPrototypes that eventually refer to CompuMethods of category TEXTTABLE, SCALE_LINEAR_AND_TEXTTABLE, and BITFIELD_TEXTTABLE

4.4.3 Relevance for Data Transformation

One (prominent) use case for item 4 in [TPS_SWCT_01158] is the interaction between the NvBlockSwComponentType and the AUTOSAR Dcm.

Specifically, the RTE will call a data transformer to convert the *uint8*-array representation of the diagnostic data available from a PortPrototype owned by the Dcm ServiceSwComponentType to a VariableDataPrototype owned by a PortPrototype of NvBlockSwComponentType.

For this configuration, the applicable DataPrototypeMapping refers to a DataTransformation in the role firstToSecondDataTransformation and - for the case of two connected PortPrototypes that use asymmetric data transformation - secondToFirstDataTransformation (see Figure 4.26).

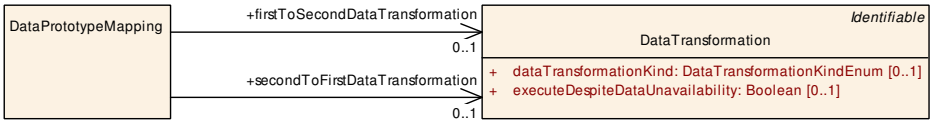

Figure 4.26: Configuration of Ecu-internal data transformation

Note that for this specific interaction between an ApplicationSwComponentType and a ServiceSwComponentType [TPS_SWCT_01579]/[TPS_SWCT_01831] applies which defines that attribute isService shall be set to false for the dataElements in PortPrototypes typed by a SenderReceiverInterface.

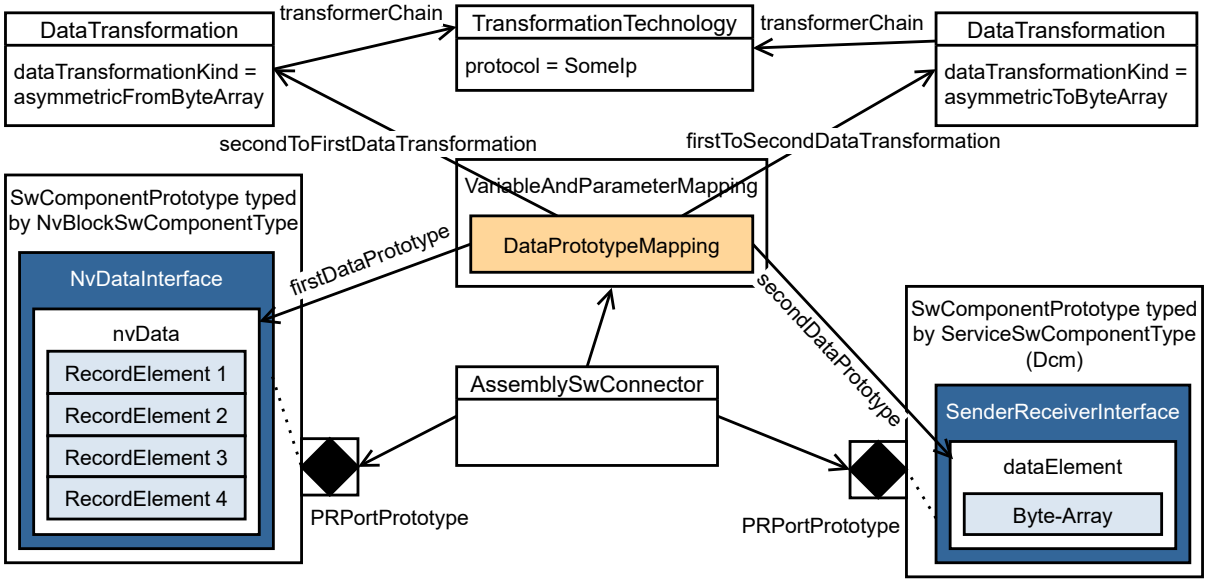

Figure 4.27: Use case for the existence of asymmetric data transformation in both directions

[TPS_SWCT_01768] Semantics of DataPrototypeMapping.secondToFirstDataTransformation ⌈For symmetric data transformations (i.e. the value of

attribute DataTransformation.dataTransformationKind is set to DataTransformationKindEnum.symmetric) it is sufficient to specify the reference firstToSecondDataTransformation.

There are, however, use cases for asymmetric data transformations between two connected PRPortPrototypes and in this case it is necessary to specify each direction separately.

For this purpose, the reference secondToFirstDataTransformation exists in addition to firstToSecondDataTransformation.⌋

Figure 4.27 describes the most prominent use case that requires specifying both firstToSecondDataTransformation and secondToFirstDataTransformation.

An SwComponentPrototype typed by NvBlockSwComponentType exposes a PRPortPrototype that is connected to another PRPortPrototype attached to an SwComponentPrototype that represents the Dcm service software component.

The PRPortPrototype on the side of the NvBlockSwComponentType is typed by an NvDataInterface that in turn aggregates a single nvData. The data type used to define the nvData is a structured data type.

The service software component representing the Dcm, however, is not capable of dealing with structured data types. It can only handle primitive types and arrays of primitive types, e.g. bytes.

Therefore, (asymmetric) data transformers are conveniently used to serialize the content of the structured data type into a linear array and vice versa.

To expressly define this intended semantics, the DataPrototypeMapping defines two references:

- firstToSecondDataTransformation that refers to a DataTransformation where attribute dataTransformationKind is set to the value asymmetricToByteArray. This reference represents the direction from the NvBlockSwComponentType to the Dcm.
- secondToFirstDataTransformation that refers to a DataTransformation where attribute dataTransformationKind is set to the value asymmetricFromByteArray. This reference represents the direction from the Dcm to the NvBlockSwComponentType.

This approach to modeling is formalized in [constr_1631] and [constr_1632].

[constr_1631] Applicability of DataPrototypeMapping.secondToFirstDataTransformation

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈The reference to DataTransformation in the role DataPrototypeMapping.secondToFirstDataTransformation shall only exist if reference

DataPrototypeMapping.firstToSecondDataTransformation exists and refers to a DataTransformation where attribute dataTransformationKind exists and is **not** set to the value symmetric.⌋

[constr_1632] Restriction for roles firstToSecondDataTransformation and secondToFirstDataTransformation

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈If both the reference firstToSecondDataTransformation and the reference secondToFirstDataTransformation exist in the context of the same DataPrototypeMapping then

- the reference in the role firstToSecondDataTransformation shall refer to a DataTransformation with attribute dataTransformationKind set to asymmetricToByteArray and
- the reference in the role secondToFirstDataTransformation shall refer to a DataTransformation with attribute dataTransformationKind set to asymmetricFromByteArray.

⌋

Class	**DataTransformation**			
Note	A DataTransformation represents a transformer chain. It is an ordered list of transformers.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	DataTransformationSet.dataTransformation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
data Transformation Kind	DataTransformationKind Enum	0..1	attr	This attribute controls the kind of DataTransformation to be applied.
executeDespite Data Unavailability	Boolean	0..1	attr	Specifies whether the transformer chain is executed even if no input data are available.
transformer Chain (ordered)	Transformation Technology	*	ref	This attribute represents the definition of a chain of transformers that are supposed to be executed according to the order of being referenced from DataTransformation.

Table 4.42: DataTransformation

[constr_1888] Existence of attribute DataTransformation.executeDespite-DataUnavailability

Imposition time: CP: IT_RteGen

⌈For each DataTransformation, the attribute executeDespiteData-Unavailability shall exist.⌋

Enumeration	**DataTransformationKindEnum**
Note	This enumeration contributes to the definition of the scope of the DataTransformation.
Aggregated by	DataTransformation.dataTransformationKind
Literal	***Description***
asymmetricFrom ByteArray	The DataTransformation shall only be applied to the receiving end only, i.e. transform from byte array to data type. **Tags:** atp.EnumerationLiteralIndex=0
asymmetricToByte Array	The DataTransformation shall be applied to the sending end only, i.e. from data type to byte array. **Tags:** atp.EnumerationLiteralIndex=1
symmetric	The DataTransformation shall be applied at both the sending and the receiving end of the communication. **Tags:** atp.EnumerationLiteralIndex=2

Table 4.43: DataTransformationKindEnum

4.5 Port Annotation

4.5.1 Introduction

[TPS_SWCT_01203] `PortPrototype` **may own port annotations** ⌈In addition to the formal specification required to implement the communication via ports, a `PortPrototype` may own so-called port annotations.

They do not directly influence the signature of calls via this `PortPrototype`, but contain further information that may be useful for the application developers of the components on both sides of the connection.⌋

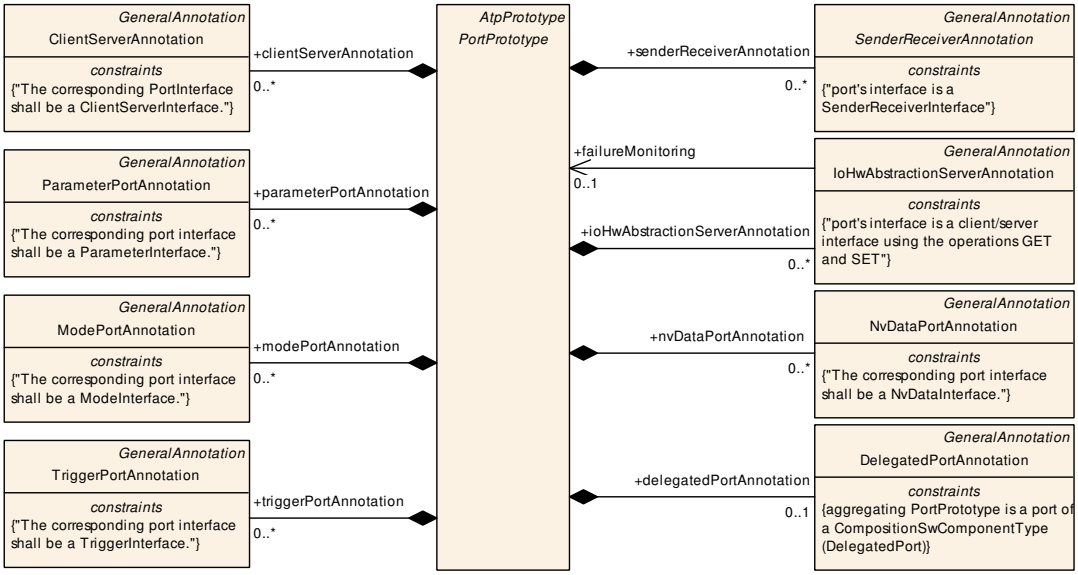

Figure 4.28: Application Level Port Annotations Overview

A summary of port-level annotations can be found in Figure 4.28.

[TPS_SWCT_01204] `GeneralAnnotation` ⌈Beside formally specified attributes it is also possible to place textual information as provided in `GeneralAnnotation`.⌋

4.5.2 SenderReceiverAnnotation

Embedded automotive software is used to implement open-loop and closed-loop control-algorithms. Therefore, a software component description has to accommodate typical control engineering description means which have only indirect influence of the embedded software itself.

These annotations provide the (function-) developer with a direct indication whether a certain software component is appropriate for the control-algorithm to be designed. A typical annotation is the signal quality which is characterized by several properties. Each of the property is an annotation in its own.

[TPS_SWCT_01205] Typical annotations for sender/receiver communication ⌈Typical annotations for sender/receiver communication are:

- **Signal Age**: this attribute expresses that the associated software component will only work correctly given that the propagation of the signal from a sensor to a consumer can be finished within a particular time-limit. Of course, this cannot be identified on component or role level, but has to take into account the instance view as well as the actual ECU- and bus-scheduling.
- **Raw**: a raw signal is typically taken directly from the basic software modules of the ECU abstraction layer. In particular, no sensor software component has filtered its original value. A `dataElement` in an `RPortPrototype` of a `SwComponentType` using this annotation indicates to the control engineer (who develops a control-algorithm for this component) that the signal has to be filtered (This relationship applies for `SenderReceiverInterface`s).
- **Filtered**: this attribute indicates that a raw signal has been manipulated by some application software components by using a certain filter.
- **Computed**: this attribute indicates that this signal is not measured directly but calculated from tentatively several other measured or calculated signals. In a vehicle, there might be alternative signals to be used from other components having a better quality, e.g. a raw signal.
- **Min**: this annotation indicates that the signal carries a minimum value. If, for example, a reference value computed in the software component is below that value some dedicated actions (e.g. failure-mode) might have to be taken.
- **Max**: this annotation indicates that the signal carries a maximum value. If, for example, a reference value computed in the software component is above that value some dedicated actions (e.g. failure-mode) might have to be taken.

In the meta-model this aspect is implemented by the abstract meta-class SenderReceiverAnnotation which represents the base class of both SenderAnnotation and ReceiverAnnotation.

The relationship of abstract meta-class SenderReceiverAnnotation to SenderAnnotation and ReceiverAnnotationis depicted in Figure 4.29.

Class	***SenderReceiverAnnotation*** (abstract)			
Note	Annotation of the data elements in a port that realizes a sender/receiver interface.			
Base	*ARObject*, *GeneralAnnotation*			
Subclasses	ReceiverAnnotation, SenderAnnotation			
Aggregated by	*PortPrototype*.senderReceiverAnnotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
computed	Boolean	0..1	attr	Flag whether this data element was not measured directly but instead was calculated from possibly several other measured or calculated values.
dataElement	VariableDataPrototype	0..1	ref	The instance of VariableDataPrototype annotated. **Tags:** atp.Splitkey=dataElement
limitKind	DataLimitKindEnum	0..1	attr	This min or max has not to be mismatched with the min- and max for data-value in a compu-method. For example, this annotation shows when the result of the calculation performed in a RunnableEntity owned by one AtomicSw ComponentType is transmitted to another AtomicSw ComponentType whose RunnableEntity will use this value as a limit, e.g. the max.power which can be used by that software-component, or the current min. slip.
processingKind	ProcessingKindEnum	0..1	attr	This attribute controls how data is processed according to the possible values of ProcessingKindEnum.

Table 4.44: SenderReceiverAnnotation

Class	**SenderAnnotation**			
Note	Annotation of a sender port, specifying properties of data elements that don't affect communication or generation of the RTE.			
Base	*ARObject*, *GeneralAnnotation*, *SenderReceiverAnnotation*			
Aggregated by	*PortPrototype*.senderReceiverAnnotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 4.45: SenderAnnotation

Class	**ReceiverAnnotation**			
Note	Annotation of a receiver port, specifying properties of data elements that don't affect communication or generation of the RTE. The given attributes are requirements on the required data.			
Base	*ARObject*, *GeneralAnnotation*, *SenderReceiverAnnotation*			
Aggregated by	*PortPrototype*.senderReceiverAnnotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
signalAge	MultidimensionalTime	0..1	aggr	The maximum allowed age of the signal since it was originally read by a sensor. This is a requirement specified on the receiver side. **Tags:** atp.Splitkey=signalAge

Table 4.46: ReceiverAnnotation

Enumeration	**ProcessingKindEnum**
Note	Kind of processing which has been applied to a data element.
Aggregated by	*SenderReceiverAnnotation*.processingKind
Literal	***Description***
filtered	Indicates that a raw signal has been manipulated by some application software components by using filters. **Tags:** atp.EnumerationLiteralIndex=0
none	Indicates that none of the other option apply. **Tags:** atp.EnumerationLiteralIndex=1
raw	Specifies that a signal is taken directly from the basic software modules, i.e. from the ECU abstraction layer. It indicates to a developer that the control algorithm in the software has to provide filters. **Tags:** atp.EnumerationLiteralIndex=2

Table 4.47: ProcessingKindEnum

Enumeration	**DataLimitKindEnum**
Note	Indicates whether the data element carries a minimum or maximum value, thereby limiting the current range of another value.
Aggregated by	*SenderReceiverAnnotation*.limitKind
Literal	***Description***
max	Limitation to maximum value **Tags:** atp.EnumerationLiteralIndex=0
min	Limitation to minimum value **Tags:** atp.EnumerationLiteralIndex=1
none	No limitation applicable **Tags:** atp.EnumerationLiteralIndex=2

Table 4.48: DataLimitKindEnum

[TPS_SWCT_01206] Min and Max annotations are valid for a certain amount of time ⌈The Min and Max annotations are valid for a certain amount of time. The value is likely to change to another valid value while the ECU is running, e.g. the maximal torque which can be requested from an engine is a typical use-case.⌋

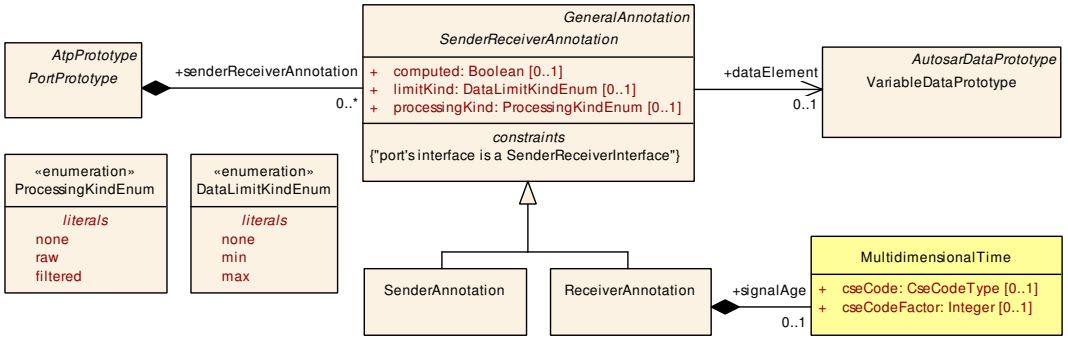

Figure 4.29: `SenderReceiverAnnotation`

This value might vary depending on e.g. the status of the climate control system. Therefore, these annotations shall not be mismatched with the min and max attributes of `CompuMethod`s.

The application level port annotations for sender/receiver communication have to be associated to each dataElement in a PortPrototype, e.g. there might be a “raw” dataElement and a “filtered” dataElement in the same PortPrototype!

[TPS_SWCT_01207] VariableDataPrototypes use the same application-level SenderReceiverAnnotation ⌈Furthermore, if two VariableDataPrototypes use the same application-level SenderReceiverAnnotation, a reference from the annotation to the VariableDataPrototypes will be established by an appropriate tool.⌋

[TPS_SWCT_01208] Grouping for SenderReceiverAnnotation ⌈The SenderReceiverAnnotation for sender/receiver communication are grouped into

- processing type, indicating to some extent the direct quality of the signal,
- computed, which is just a flag or,
- limit type, showing the component expects an actual limit.

In the case of an RPortPrototype, the signal age of the value, carried by the associated SwConnector, can be specified. Each of these groups can be interpreted as a property of the signal-quality.⌋

For more information about meta-class SenderReceiverAnnotation please refer to Figure 4.29.

[constr_4004] Context of SenderReceiverAnnotation

Imposition time: CP: IT_CpgExe

⌈A SenderReceiverAnnotation shall only be aggregated by a PortPrototype typed by a SenderReceiverInterface.⌋

4.5.3 ClientServerAnnotation

[TPS_SWCT_01209] ClientServerAnnotation ⌈The ClientServerAnnotation can be used to provide more information with respect to the ClientServerOperation of the PortPrototype.⌋

Class	**ClientServerAnnotation**			
Note	Annotation to a port regarding a certain Operation.			
Base	*ARObject*, *GeneralAnnotation*			
Aggregated by	*PortPrototype*.clientServerAnnotation			
Attribute	*Type*	*Mult.*	*Kind*	*Note*

▽

△

Class	ClientServerAnnotation			
operation	ClientServerOperation	0..1	ref	This represents the ClientServerOperation that the Client ServerAnnotation corresponds to. **Tags:** atp.Splitkey=operation

Table 4.49: ClientServerAnnotation

The main use-case is to define additional information related to the ClientServer-Operation.



Figure 4.30: ClientServerAnnotation

[constr_4005] Context of ClientServerAnnotation

Imposition time: CP: IT_CpgExe

⌈A ClientServerAnnotation shall only be aggregated by a PortPrototype typed by a ClientServerInterface.⌋

4.5.4 Annotation for the I/O Hardware Abstraction Layer

Within the ECU-Abstraction Layer there are ECU-signals defined. These signals represent the electrical signals as they arrive in the micro-controller peripheral and are fetched from the registers via the MCAL.

Access to the I/O Hardware Abstraction Layer is done via service interfaces, i.e. the I/O Hardware Abstraction Layer provides GET- and SET-operations at the specified service ports of a SensorActuatorSwComponentType.

[TPS_SWCT_01524] Usage of IoHwAbstractionServerAnnotation ⌈IoHw-AbstractionServerAnnotation can be used for all kinds of PortInterfaces **except** NvDataInterface.⌋

Class	IoHwAbstractionServerAnnotation			
Note	The IoHwAbstractionServerAnnotation will only be used from a sensor- or an actuator component while interacting with the IoHwAbstraction layer. Note that the "server" in the name of this meta-class is not meant to restrict the usage to ClientServer Interfaces.			
Base	*ARObject*, *GeneralAnnotation*			
Aggregated by	*PortPrototype*.ioHwAbstractionServerAnnotation			
Attribute	**Type**	**Mult.**	**Kind**	**Note**

▽

△

Class	IoHwAbstractionServerAnnotation			
age	MultidimensionalTime	0..1	aggr	In case of a SET operation, the age will be interpreted as Delay while in a GET operation (input) it specifies the Lifetime of the signal within the IoHwAbstraction Layer **Tags:** atp.Splitkey=age xml.sequenceOffset=10
argument	ArgumentDataPrototype	0..1	ref	Reference to the corresponding ArgumentDataPrototype. **Tags:** atp.Splitkey=argument xml.sequenceOffset=20
bswResolution	Float	0..1	attr	This value is determined by an appropriate combination of the range, the unit as well as the data-elements type, i.e. (ecuSignalRange.upperLimit-ecuSignalRange.lower Limit) / (2^datatypelength - 1) **Tags:** xml.sequenceOffset=30
dataElement	VariableDataPrototype	0..1	ref	Reference to the corresponding VariableDataPrototype. **Tags:** atp.Splitkey=dataElement xml.sequenceOffset=40
failure Monitoring	PortPrototype	0..1	ref	This is only applicable in SET operations. If it is enabled, the IoHwAbstraction layer will monitor the result of the operation and issue an diagnostic signal. This means especially, that an additional client-server port has to be created. Tools can use this information to cross-check whether for each data-element in a SET operation with FailureMonitoring enabled an additional port is created The referenced port monitors a failure in the to be monitored VariableDataPrototype of the IoHwAbstraction layer. The referenced port has to be another port of the same Actuator or Sensor Component. **Tags:** atp.Splitkey=failureMonitoring xml.sequenceOffset=50
filtering Debouncing	FilterDebouncingEnum	0..1	attr	This attribute is used to indicate what kind of filtering/ debouncing has been put to the signal in the IoHw Abstraction layer. rawData means that no modification of the signal has been applied. This is the default value debounceData means that the signal is a mean value waitTimeData means that the signal is delivered by a GET operation after a certain amount of time **Tags:** xml.sequenceOffset=60
pulseTest	PulseTestEnum	0..1	attr	This attribute indicates to the connected SensorActuator SwComponentType whether the VariableDataPrototype can be used to generate pulse test sequences using the IoHwAbstraction layer **Tags:** xml.sequenceOffset=70
trigger	Trigger	0..1	ref	Reference to the corresponding Trigger. **Tags:** atp.Splitkey=trigger xml.sequenceOffset=80

Table 4.50: IoHwAbstractionServerAnnotation

Enumeration	**FilterDebouncingEnum**
Note	This enumeration defines possible values for the filter debouncing strategy.
Aggregated by	IoHwAbstractionServerAnnotation.filteringDebouncing
Literal	***Description***
debounceData	The signal is a mean value **Tags:** atp.EnumerationLiteralIndex=0
rawData	Means that no modification of the signal has been applied. This is the default value **Tags:** atp.EnumerationLiteralIndex=1
waitTimeDate	The signal is delivered by a GET operation after a certain amount of time **Tags:** atp.EnumerationLiteralIndex=2

Table 4.51: FilterDebouncingEnum

Enumeration	**PulseTestEnum**
Note	This element indicates to the connected Actuator Software component whether the data-element can be used to generate pulse test sequences using the IoHwAbstraction layer
Aggregated by	IoHwAbstractionServerAnnotation.pulseTest
Literal	***Description***
disable	Disables the pulse test **Tags:** atp.EnumerationLiteralIndex=0
enable	Enables the pulse test **Tags:** atp.EnumerationLiteralIndex=1

Table 4.52: PulseTestEnum

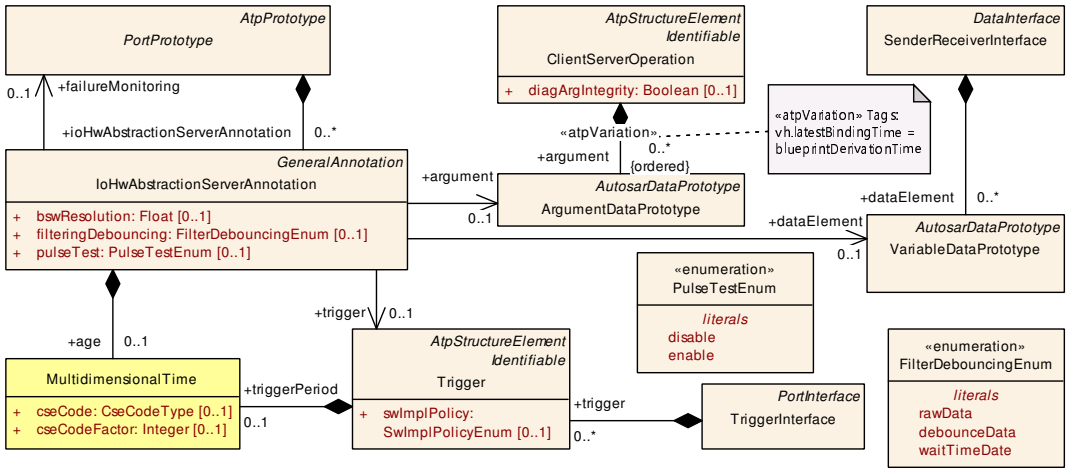

Figure 4.31: `IoHwAbstractionServerAnnotation`

[TPS_SWCT_01211] Assign several annotations to `ArgumentDataPrototype`
⌈The `ClientServerOperation`s provide an `ArgumentDataPrototype` where several annotations can be assigned to.⌋

They are depicted in the `IoHwAbstractionServerAnnotation` meta-class in Figure 4.31.

A detailed description of the attributes can be found in the IoHwAbstraction Layer software specification document [16, SWS IO Hardware Abstraction].

For example, the signal age has a very dedicated meaning in this particular interface with respect to a register whereas the signal age in the SenderReceiverAnnotation is more generic. Especially, there is no relationship with the microcontroller peripherals.

4.5.5 Parameter Port Annotation

[TPS_SWCT_01212] **ParameterPortAnnotation** ⌈The ParameterPortAnnotation can be used to provide more information with respect to calibration parameter prototypes of the PortPrototype.

The data provided at the PortPrototype is calibration parameters. The ParameterPortAnnotation provides a reference to a particular ParameterDataPrototype.⌋

[constr_4006] Context of ParameterPortAnnotation

Imposition time: CP: IT_CpgExe

⌈A ParameterPortAnnotation shall only be aggregated by a PPortPrototype owned by a ParameterSwComponentType.⌋

Class	**ParameterPortAnnotation**			
Note	Annotation to a port used for calibration regarding a certain ParameterDataPrototype.			
Base	*ARObject*, *GeneralAnnotation*			
Aggregated by	*PortPrototype*.parameterPortAnnotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
parameter	ParameterDataPrototype	0..1	ref	The instance of annotated ParameterDataPrototype. **Tags:** atp.Splitkey=parameter

Table 4.53: ParameterPortAnnotation

The main use-case is to allow easy access to the information which calibration parameters influence the data on the PortPrototype.

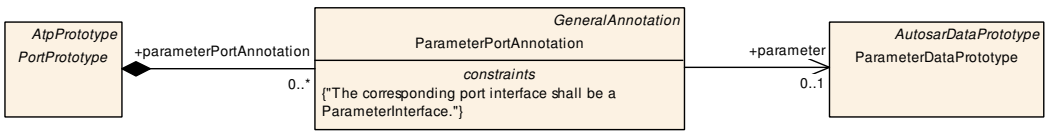

Figure 4.32: ParameterPortAnnotation

4.5.6 Mode Port Annotation

[TPS_SWCT_01213] **ModePortAnnotation** ⌈The ModePortAnnotation can be used to provide more information with respect to the mode declaration group prototype of the PortPrototype.⌋

The main use-case is to allow for the definition of additional information related to the mode declaration group prototype.



Figure 4.33: ModePortAnnotation

Class	**ModePortAnnotation**			
Note	Annotation to a port used for calibration regarding a certain ModeDeclarationGroupPrototype.			
Base	*ARObject*, *GeneralAnnotation*			
Aggregated by	*PortPrototype*.modePortAnnotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
modeGroup	ModeDeclarationGroup Prototype	0..1	ref	The instance of annotated ModeDeclarationGroup Prototype. **Tags:** atp.Splitkey=modeGroup

Table 4.54: ModePortAnnotation

[constr_4007] Context of ModePortAnnotation

Imposition time: CP: IT_CpgExe

⌈A ModePortAnnotation shall only be aggregated by a PortPrototype typed by a ModeSwitchInterface.⌋

4.5.7 Trigger Port Annotation

[TPS_SWCT_01214] TriggerPortAnnotation ⌈The TriggerPortAnnotation can be used to provide more information with respect to the Trigger of the PortPrototype.⌋

Class	**TriggerPortAnnotation**			
Note	Annotation to a port used for calibration regarding a certain Trigger.			
Base	*ARObject*, *GeneralAnnotation*			
Aggregated by	*PortPrototype*.triggerPortAnnotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
trigger	Trigger	0..1	ref	The instance of annotated trigger. **Tags:** atp.Splitkey=trigger

Table 4.55: TriggerPortAnnotation

The main use-case is to define additional information related to the trigger.



Figure 4.34: TriggerPortAnnotation

[constr_4008] Context of `TriggerPortAnnotation`

Imposition time: CP: `IT_CpgExe`

⌈A `TriggerPortAnnotation` shall only be aggregated by a `PortPrototype` typed by a `TriggerInterface`.⌋

4.5.8 Non Volatile Data Port Annotation

[TPS_SWCT_01215] `NvDataPortAnnotation` ⌈The `NvDataPortAnnotation` can be used to provide more information with respect to the non-volatile data of the `PortPrototype`.⌋

Class	**NvDataPortAnnotation**			
Note	Annotation to a port regarding a certain VariableDataPrototype.			
Base	*ARObject*, *GeneralAnnotation*			
Aggregated by	*PortPrototype*.nvDataPortAnnotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
variable	VariableDataPrototype	0..1	ref	The instance of nv data annotated. **Tags:** atp.Splitkey=variable

Table 4.56: NvDataPortAnnotation

The main use-case is to define additional information related to the non-volatile data elements.



Figure 4.35: `NvDataPortAnnotation`

[constr_4009] Context of `NvDataPortAnnotation`

Imposition time: CP: `IT_CpgExe`

⌈An `NvDataPortAnnotation` shall only be aggregated by a `PortPrototype` typed by an `NvDataInterface`.⌋

4.5.9 Delegated Port Annotations

[TPS_SWCT_01216] `DelegatedPortAnnotation` ⌈The `DelegatedPortAnnotation` is used to define the Signal Fan In or Signal Fan Out inside the `CompositionSwComponentType`.

This information is used to pre-define and pre-check resulting communication patterns in the VFB (1:n, n:1, 1:1) if empty `CompositionSwComponentType`s are used as interface definition for sub-systems.

The DelegatedPortAnnotation guides either the system designer in connecting the empty CompositionSwComponentType or the sub-system designer in applying communication pattern (1:n, n:1, 1:1) inside the CompositionSwComponentType.⌋

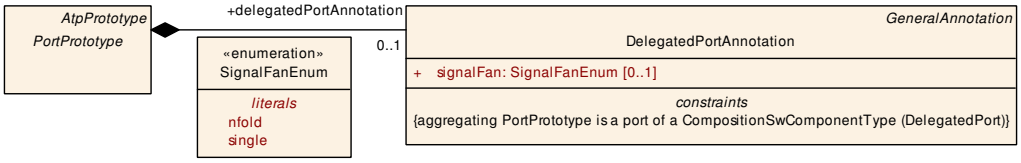

Figure 4.36: DelegatedPortAnnotation

[TPS_SWCT_01217] Semantics of DelegatedPortAnnotation.signalFan ⌈The attribute values have following definition:

- **single**: the internal connections in the CompositionSwComponentType via DelegationSwConnectors and AssemblySwConnectors are defined in a way that each dataElement present in the SenderReceiverInterfaces or operation in the ClientServerInterfaces of the outer PortPrototype is involved in a 1:1 communication pattern only.
- **nfold**: The internal connections in the CompositionSwComponentType via DelegationSwConnectors and AssemblySwConnectors are defined in a way that at least one dataElement present in the SenderReceiver-Interfaces or one operation in the ClientServerInterfaces of the outer PortPrototype is involved in a 1:n or n:1 communication pattern.

⌋

[constr_4010] Context of DelegatedPortAnnotation

Imposition time: CP: IT_CompSwcT

⌈A DelegatedPortAnnotation shall only be aggregated by a PortPrototype aggregated by a CompositionSwComponentType.⌋

Enumeration	**SignalFanEnum**
Note	Signal Fan inside the Composition Component Type.
Aggregated by	DelegatedPortAnnotation.signalFan
Literal	***Description***
nfold	The connections internally in the CompositionSwComponentType via DelegationSwConnectors and AssemblySwConnectors are defined in a way that at least one data element present in the S/R interface or one ClientServerOperation in the C/S interface of the outer PortPrototype is involved in a 1:n or n:1 communication pattern. **Tags:** atp.EnumerationLiteralIndex=0
single	The connections internally in the CompositionSwComponentType via DelegationSwConnectors and AssemblySwConnectors are defined in a way that each VariableDataPrototype present in the S/R interface or ClientServerOperation in the C/S interface of the outer PortPrototype is involved in a 1:1 communication pattern only. **Tags:** atp.EnumerationLiteralIndex=1

Table 4.57: SignalFanEnum

Class	**DelegatedPortAnnotation**			
Note	Annotation to a "delegated port" to specify the Signal Fan In or Signal Fan Out inside the CompositionSw ComponentType.			
Base	*ARObject*, *GeneralAnnotation*			
Aggregated by	*PortPrototype*.delegatedPortAnnotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
signalFan	SignalFanEnum	0..1	attr	Specifies the Signal Fan In or Signal Fan Out inside the Composition Type.

Table 4.58: DelegatedPortAnnotation

4.5.10 General Annotation

Besides, formally specified attributes it is also possible to place textual information as provided in the abstract `GeneralAnnotation` (see Figure 4.37 for an overview).



Figure 4.37: textual information in annotations

Class	***GeneralAnnotation*** (abstract)			
Note	This class represents textual comments (called annotations) which relate to the object in which it is aggregated. These annotations are intended for use during the development process for transferring information from one step of the development process to the next one. The approach is similar to the "yellow pads" ... This abstract class can be specialized in order to add some further formal properties.			
Base	*ARObject*			
Subclasses	Annotation, ClientServerAnnotation, DelegatedPortAnnotation, IoHwAbstractionServerAnnotation, ModePortAnnotation, NvDataPortAnnotation, ParameterPortAnnotation, *SenderReceiverAnnotation*, TriggerPortAnnotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
annotationOrigin	String	0..1	attr	This attribute identifies the origin of the annotation. It is an arbitrary string since it can be an individual's name as well as the name of a tool or even the name of a process step. **Tags:** xml.sequenceOffset=30
annotationText	DocumentationBlock	0..1	aggr	This is the text of the annotation. **Tags:** atp.Splitkey=annotationText xml.sequenceOffset=40
label	MultilanguageLongName	0..1	aggr	This is the headline for the annotation. **Tags:** atp.Splitkey=label xml.sequenceOffset=20

Table 4.59: GeneralAnnotation

Class	**MultilanguageLongName**			
Note	This meta-class represents the ability to specify a long name which acts in the role of a headline. It is intended for human readers. Per language it should be around max 80 characters.			
Base	*ARObject*			
Aggregated by	AliasNameAssignment.label, *GeneralAnnotation*.label, *MultilanguageReferrable*.longName, Note.label, ValueGroup.label			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
l4	LLongName	*	aggr	This is the long name in one particular language. **Tags:** atp.Splitkey=l4 xml.roleElement=true xml.roleWrapperElement=false xml.sequenceOffset=20 xml.typeElement=false xml.typeWrapperElement=false

Table 4.60: MultilanguageLongName

4.6 Communication Specification

[TPS_SWCT_01218] Big picture of `ComSpec` ⌈The highest level of description of information exchanged between components in an AUTOSAR system is the `PortInterface`s, as shown in earlier sections.

Such `PortInterface` however, only describes structure and does not include information about whether communication needs to be done reliably, or whether an initial value exists if the real data is not yet available.

This information is role-specific, i.e. it shall be applied on the level of `PortPrototype`s rather than `PortInterface`s. Therefore, most communication-relevant attributes are related to the `PortPrototype`s of an `SwComponentType`.

The communication attributes are organized in a so-called **communication specification** (in terms of the meta-model: `ComSpec`) classes.⌋

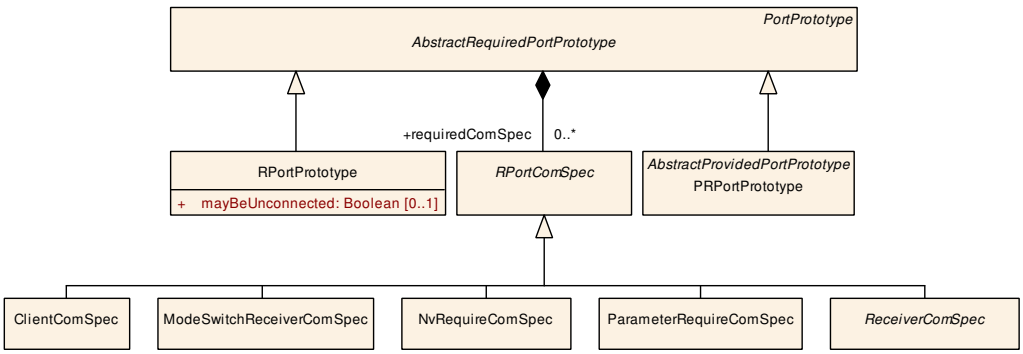

Figure 4.38: Overview of communication attributes of `RPortPrototype`

Note that the communication specification is optional, i.e. its existence is not required in any case. Figure 4.38 and Figure 4.39 provide an overview of communication specifications. The derived meta-classes are explained in the following sub-chapters.

As explained before, ComSpec meta-classes which are required on the level of a SwComponentType are attached to the PortPrototype declarations which in turn are part of the definition of a SwComponentType.

Nevertheless, the usage of ComSpecs is **not** restricted to the PortPrototypes of AtomicSwComponentTypes (for more details please refer to Chapter 2.6).

Chapter 7.5.1 and Chapter 7.5.2 then explain the sender-receiver and client-server communication patterns with respect to the RTE, the RTE events and the corresponding communication attributes.

Several ComSpecs allow defining initValues in relation to the associated DataPrototype. For further details about the representation of initValues please refer to Chapter 5.7.2.

Furthermore, [constr_1043] applies such that only specific subclasses of ComSpec can be owned by PortPrototypes typed by the corresponding kind of PortInterface.

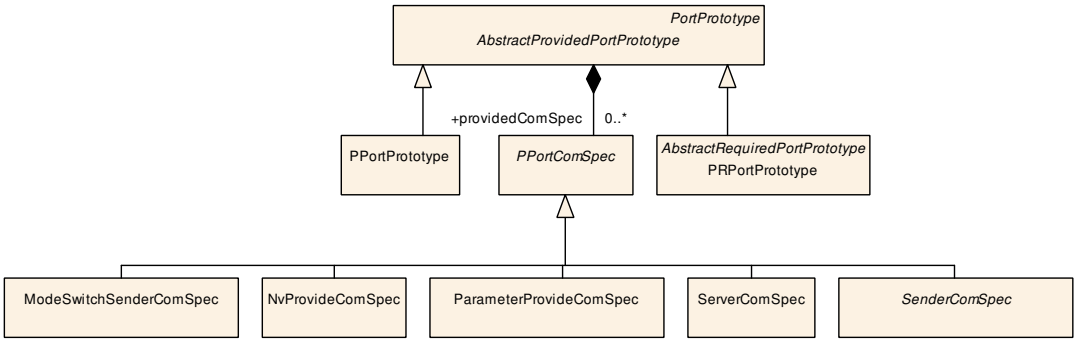

Figure 4.39: Overview of communication attributes of PPortPrototype

[constr_1290] Limitation on the number of PPortComSpecs in the context of one PPortPrototype

Imposition time: CP: IT_CpgExe

⌈Within the context of one PPortPrototype, there can only be **one** (sub-class of) PPortComSpec that references a given

- dataElement (in the case of SenderComSpec),
- operation (in the case of ServerComSpec),
- modeGroup (in the case of ModeSwitchSenderComSpec),
- variable (in the case of NvProvideComSpec), or
- parameter (in the case of ParameterProvideComSpec).

⌋

In other words, it is not allowed that two or more PPortComSpec exist in the context of a one PPortPrototype that refer to the same dataElement or operation.

[constr_1291] Limitation on the number of RPortComSpecs in the context of one RPortPrototype

Imposition time: CP: IT_CpgExe

⌈Within the context of one RPortPrototype, there can only be **one** RPortComSpec that references a given

- dataElement (in the case of ReceiverComSpec),
- operation (in the case of ClientComSpec),
- modeGroup (in the case of ModeSwitchReceiverComSpec),
- variable (in the case of NvRequireComSpec), or
- parameter (in the case of ParameterRequireComSpec).

⌋

In other words, it is not allowed that two or more RPortComSpec exist in the context of a one RPortPrototype that refer to the same dataElement or operation.

[TPS_SWCT_01454] PRPortPrototype can own both RPortComSpecs and PPortComSpecs ⌈In contrast to PPortPrototype and RPortPrototype, PRPortPrototype can own both RPortComSpecs and PPortComSpecs at the same time.⌋

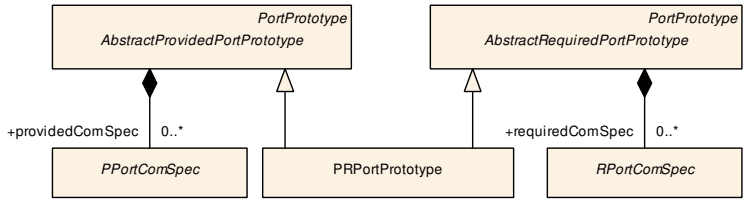

Figure 4.40: Modeling of ComSpecs for PRPortPrototype

Nevertheless, the following restriction applies:

[constr_1292] Limitation on the number of RPortComSpecs/PPortComSpecs in the context of one PRPortPrototype

Imposition time: CP: IT_CpgExe

⌈Within the context of one PRPortPrototype, there can only be **one** RPortComSpec and **one** PPortComSpec that references a given

- dataElement (in the case of ReceiverComSpec/SenderComSpec),
- operation (in the case of ClientComSpec/ServerComSpec),
- modeGroup (in the case of ModeSwitchReceiverComSpec/ModeSwitch-SenderComSpec), or
- variable (in the case of NvRequireComSpec/NvProvideComSpec).

⌋

In other words, it is not allowed that two or more PPortComSpec exist in the context of a one PRPortPrototype that refer to the same dataElement or operation.

In the same manner, it is not allowed that two or more RPortComSpec exist in the context of one PRPortPrototype that refer to the same dataElement or operation.

The rationale for the existence of [constr_1290], [constr_1291], and [constr_1292] is that the AUTOSAR communication layer needs an unambiguous specification of the communication behavior.

The existence of redundant RPortComSpecs/PPortComSpecs may easily be contradicting each other and this would inhibit the creation of a valid configuration for the AUTOSAR Com.

As explained in Chapter 2.6, there are cases where PortPrototypes owned by a CompositionSwComponentType could have initValues.

Therefore, it is possible that PortPrototypes owned by CompositionSwComponentTypes can have ComSpecs. It is *not* required that the ComSpecs defined on the composition level match the ComSpecs defined inside the CompositionSwComponentType.

If consistency would be required this constraint might be a major obstacle for integrating existing AtomicSwComponentTypes into a CompositionSwComponentType that has PortPrototypes with ComSpecs.

Class	***PPortComSpec*** (abstract)			
Note	Communication attributes of a provided PortPrototype. This class will contain attributes that are valid for all kinds of provide ports, independent of client-server or sender-receiver communication patterns.			
Base	*ARObject*			
Subclasses	ModeSwitchSenderComSpec, NvProvideComSpec, ParameterProvideComSpec, *SenderComSpec*, ServerComSpec			
Aggregated by	*AbstractProvidedPortPrototype*.providedComSpec, PortPrototypeBlueprint.providedComSpec			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 4.61: PPortComSpec

Class	***RPortComSpec*** (abstract)			
Note	Communication attributes of a required PortPrototype. This class will contain attributes that are valid for all kinds of require-ports, independent of client-server or sender-receiver communication patterns.			
Base	*ARObject*			
Subclasses	ClientComSpec, ModeSwitchReceiverComSpec, NvRequireComSpec, ParameterRequireComSpec, *ReceiverComSpec*			
Aggregated by	*AbstractRequiredPortPrototype*.requiredComSpec, PortPrototypeBlueprint.requiredComSpec			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 4.62: RPortComSpec

[constr_1043] Allowed combinations of a specific *Type of* PortInterface, a specific *Type of* PortPrototype, and a specific *Type of* ComSpec

Imposition time: CP: IT_CpgExe

⌈

Type of PortPrototype	Type of ComSpec	Role of Element	Type of PortInterface	Role of Type-Ref
PPortPrototype	NonqueuedSender-ComSpec	dataElement	SenderReceiver-Interface	providedInterface
PPortPrototype	QueuedSenderCom-Spec	dataElement	SenderReceiver-Interface	providedInterface
RPortPrototype	Nonqueued-ReceiverComSpec	dataElement	SenderReceiver-Interface	requiredInterface
RPortPrototype	QueuedReceiver-ComSpec	dataElement	SenderReceiver-Interface	requiredInterface
PRPortPrototype	NonqueuedSender-ComSpec	dataElement	SenderReceiver-Interface	providedRequired-Interface
PRPortPrototype	Nonqueued-ReceiverComSpec	dataElement	SenderReceiver-Interface	providedRequired-Interface
PRPortPrototype	QueuedReceiver-ComSpec	dataElement	SenderReceiver-Interface	providedRequired-Interface
PRPortPrototype	QueuedSenderCom-Spec	dataElement	SenderReceiver-Interface	providedRequired-Interface
PPortPrototype	NvProvideComSpec	nvData	NvDataInterface	providedInterface
RPortPrototype	NvRequireComSpec	nvData	NvDataInterface	requiredInterface
PRPortPrototype	NvProvideComSpec	nvData	NvDataInterface	providedRequired-Interface
PRPortPrototype	NvRequireComSpec	nvData	NvDataInterface	providedRequired-Interface
PPortPrototype	ModeSwitchSender-ComSpec	modeGroup	ModeSwitch-Interface	providedInterface
RPortPrototype	ModeSwitch-ReceiverComSpec	modeGroup	ModeSwitch-Interface	requiredInterface
PRPortPrototype	ModeSwitchSender-ComSpec	modeGroup	ModeSwitch-Interface	providedRequired-Interface
PRPortPrototype	ModeSwitch-ReceiverComSpec	modeGroup	ModeSwitch-Interface	providedRequired-Interface
PPortPrototype	ParameterProvide-ComSpec	parameter	Parameter-Interface	providedInterface
RPortPrototype	ParameterRequire-ComSpec	parameter	Parameter-Interface	requiredInterface
PPortPrototype	ServerComSpec	operation	ClientServer-Interface	providedInterface
RPortPrototype	ClientComSpec	operation	ClientServer-Interface	requiredInterface
PRPortPrototype	ServerComSpec	operation	ClientServer-Interface	providedRequired-Interface
PRPortPrototype	ClientComSpec	operation	ClientServer-Interface	providedRequired-Interface

⌋

[constr_10372] Relation between *Type of* `PortPrototype`, *Type of* `ComSpec`, and *Type of* `PortInterface`

Imposition time: CP: `IT_CpgExe`

⌈With respect to [constr_1043], if a *Type of* `PortPrototype` aggregates a *Type of* `ComSpec`, then the *Type of* `PortPrototype` shall

- reference a *Type of* `PortInterface` in the role *Role of Type-Ref* and
- the *Role of Element* that is referenced from the *Type of* `ComSpec` shall be aggregated by the exact same *Type of* `PortInterface` that is also referenced by the enclosing *Type of* `PortPrototype` in the role *Role of Type-Ref*.

⌋

It is necessary to ensure that there are no duplicate `ComSpec`s in the sense that two `ComSpec`s exist in the context of the same `PortPrototype` that refer to the same "significant `PortInterface` element"[10].

If two `ComSpec`s exist in the context of the same `PortPrototype` that refer to the same "significant `PortInterface` element", then the duplicate `ComSpec`s may contain conflicting configurations.

To counter this possibility, constraints exist for each kind of `ComSpec` that make sure that only one reference to the applicable "significant `PortInterface` element" exists.

4.6.1 Communication Specification for Sender-Receiver Communication

Communication specification applies in different ways to specific kinds of communication.

[TPS_SWCT_01219] `ComSpec` for queued and non-queued sender-receiver communication ⌈Sender-receiver communication might be queued or non-queued. This aspect is primarily reflected in the value of `dataElement.swDataDefProps.swImplPolicy`.

If the value of this attribute is set to `queued` then `QueuedSenderComSpec` and/or `QueuedReceiverComSpec` shall be defined. In all other applicable cases `NonqueuedSenderComSpec` or `NonqueuedReceiverComSpec` shall be used.

Thus, the constraints [constr_1129], [constr_1130], [constr_1131], and [constr_1132] shall apply.

While in the case of queued communication the `queueLength` attribute remains the only information item, the non-queued case foresees several attributes for controlling communication behavior.⌋

[10] An example for such a "significant `PortInterface` element" could be the `ReceiverComSpec.dataElement`

4.6.1.1 Receiver Communication Specification

Figure 4.41 shows the meta-model of the communication attributes relevant sender-receiver communication at an RPortPrototype.

[constr_1538] Restriction for reference ReceiverComSpec.dataElement

Imposition time: CP: IT_CpgExe

⌈The reference ReceiverComSpec.dataElement **shall not** refer to an ArgumentDataPrototype or ParameterDataPrototype.⌋

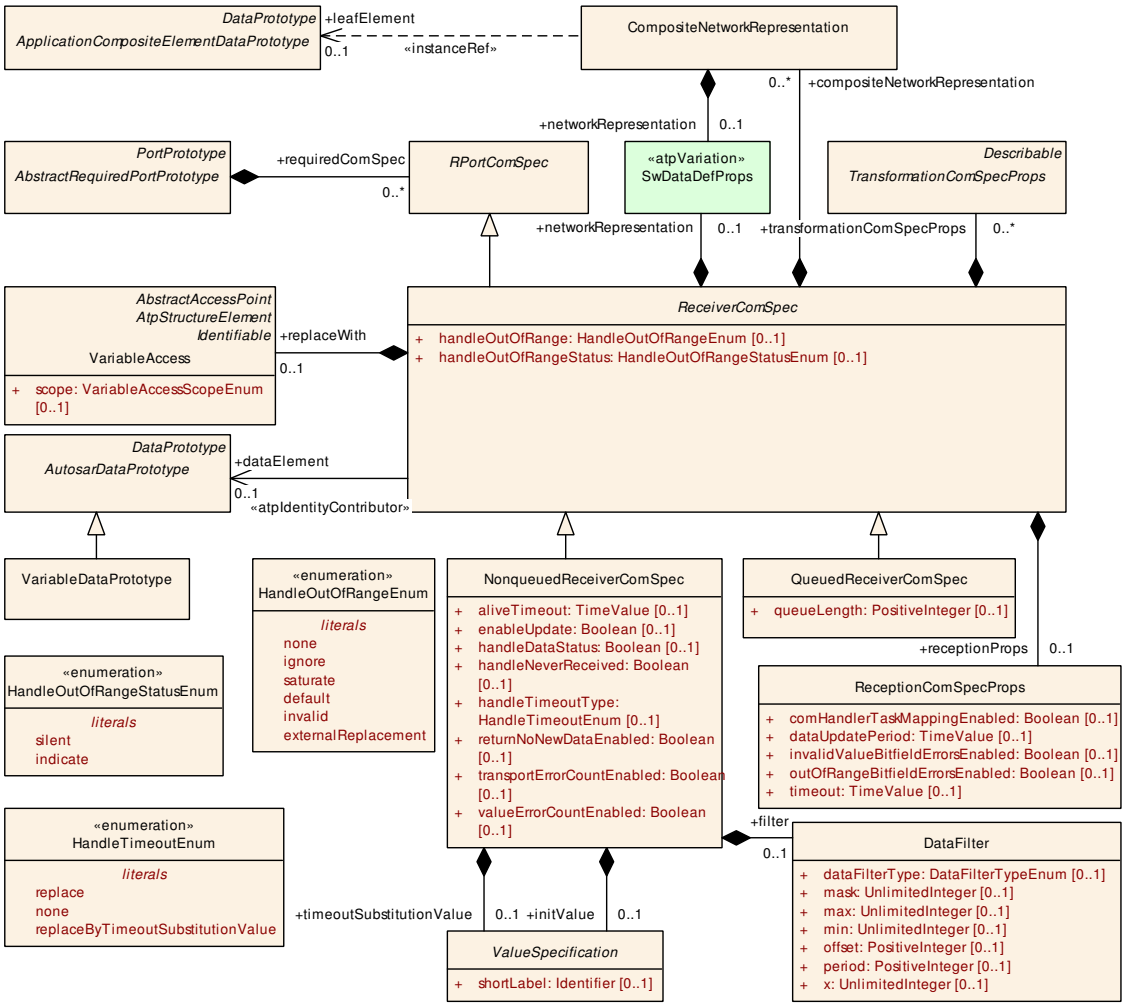

Figure 4.41: Communication attributes of RPortPrototype with respect to sender-receiver communication.

[constr_1103] NonqueuedReceiverComSpec and enableUpdate

Imposition time: CP: IT_CpgExe

⌈A NonqueuedReceiverComSpec that has the value of attribute enableUpdate set to true may not reference a dataElement that in turn is referenced by a VariableAccess in the role dataReadAccess.⌋

In general, it is considered beneficial for software-components to define initValues for all the dataElements received by RPortPrototypes.

These initValues are required by the RTE for several functionalities, e.g.:

- Providing a default value for not yet received dataElements (see [TPS_SWCT_01220]).
- Providing default values in the case of unconnected RPortPrototypes (see [constr_1100]).
- Partial mapping of composite data (see [constr_1280])

Therefore, the availability of initValue increases the flexibility of the usage of the software-component in different scenarios.

On the other hand, there are also use cases where initValues are not mandatory, i.e. the DataPrototype remains intentionally uninitialized. This is expressed by applying a SwAddrMethod where the sectionInitializationPolicy is set to NO-INIT, or when the software-component is intentionally only prepared for intra-partition communication.

[TPS_SWCT_01455] Duplicate existence of initValue in the context of a PRPortPrototype ⌈If an initValue needs to be defined in the context of a PRPortPrototype, then the initValue shall be defined in the context of a NonqueuedSenderComSpec.

If an initValue is defined in a NonqueuedReceiverComSpec owned by a PRPort-Prototype, its value shall be ignored.⌋

[TPS_SWCT_01220] initValue defines an initial value that shall be taken if the corresponding dataElement has not yet been received ⌈The aggregation of ValueSpecification in the role initValue defines an initial value that shall be taken if the corresponding dataElement has not yet been received but the application software is attempting to access its value.⌋

Class	***ReceiverComSpec*** (abstract)			
Note	Receiver-specific communication attributes (RPortPrototype typed by SenderReceiverInterface).			
Base	*ARObject*, *RPortComSpec*			
Subclasses	NonqueuedReceiverComSpec, QueuedReceiverComSpec			
Aggregated by	*AbstractRequiredPortPrototype*.requiredComSpec, PortPrototypeBlueprint.requiredComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	*ReceiverComSpec* (abstract)			
compositeNetworkRepresentation	CompositeNetworkRepresentation	*	aggr	This represents a CompositeNetworkRepresentation defined in the context of a ReceiverComSpec. The purpose of this aggregation is to be able to specify the network representation of leaf elements of Application CompositeDataTypes. **Tags:** atp.Splitkey=compositeNetworkRepresentation This Attribute is only used by the AUTOSAR Classic Platform.
dataElement	AutosarDataPrototype	0..1	ref	Data element these attributes belong to. **Stereotypes:** atpIdentityContributor
handleOutOfRange	HandleOutOfRangeEnum	0..1	attr	This attribute controls how values that are out of the specified range are handled according to the values of HandleOutOfRangeEnum. This Attribute is only used by the AUTOSAR Classic Platform.
handleOutOfRangeStatus	HandleOutOfRangeStatusEnum	0..1	attr	Control the way how return values are created in case of an out-of-range situation. This Attribute is only used by the AUTOSAR Classic Platform.
networkRepresentation	SwDataDefProps	0..1	aggr	A networkRepresentation is used to define how the data Element is mapped to a communication bus. **Tags:** atp.Splitkey=networkRepresentation This Attribute is only used by the AUTOSAR Classic Platform.
receptionProps	ReceptionComSpecProps	0..1	aggr	"This aggregation represents the definition transmission props in the context of the enclosing ReceiverComSpec. **Tags:** atp.Splitkey=receptionProps
replaceWith	VariableAccess	0..1	aggr	This aggregation is used to identify the AutosarDataPrototype to be taken for sourcing an external replacement in the out-of-range and invalidValue handling. **Tags:** atp.Splitkey=replaceWith, replaceWith.shortName This Attribute is only used by the AUTOSAR Classic Platform.
transformationComSpecProps	TransformationComSpecProps	*	aggr	This references the TransformationComSpecProps which define port-specific configuration for data transformation. **Tags:** atp.Splitkey=transformationComSpecProps

Table 4.63: ReceiverComSpec

[constr_10538] Existence of attribute `ReceiverComSpec.dataElement`

Imposition time: CP: `IT_CpgExe`

⌈For each `ReceiverComSpec`, attribute `dataElement` shall exist.⌋

Enumeration	**HandleOutOfRangeStatusEnum**
Note	This enumeration defines how the RTE handles values that are out of range.
Aggregated by	*ReceiverComSpec*.handleOutOfRangeStatus
Literal	*Description*

▽

△

Enumeration	**HandleOutOfRangeStatusEnum**
indicate	The RTE sets the return status to RTE_E_OUT_OF_RANGE if the received value is out of range and the attribute handleOutOfRange is not set to "none" or "invalid". **Tags:** atp.EnumerationLiteralIndex=0
silent	The RTE sets the return status to RTE_E_INVALID if handleOutOfRange is set to invalid. The RTE sets the return status to RTE_E_OK in all the other cases of handleOutOfRange. **Tags:** atp.EnumerationLiteralIndex=1

Table 4.64: HandleOutOfRangeStatusEnum

Class	**NonqueuedReceiverComSpec**			
Note	Communication attributes specific to non-queued receiving.			
Base	*ARObject*, *RPortComSpec*, *ReceiverComSpec*			
Aggregated by	*AbstractRequiredPortPrototype*.requiredComSpec, PortPrototypeBlueprint.requiredComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
aliveTimeout	TimeValue	0..1	attr	Specify the amount of time (in seconds) after which the software component (via the RTE) needs to be notified if the corresponding data item have not been received according to the specified timing description. If the aliveTimeout attribute is 0 no timeout monitoring shall be performed. This Attribute is only used by the AUTOSAR Classic Platform.
enableUpdate	Boolean	0..1	attr	This attribute controls whether application code is entitled to check whether the value of the corresponding Variable DataPrototype has been updated. This Attribute is only used by the AUTOSAR Classic Platform.
filter	DataFilter	0..1	aggr	The applicable filter algorithm for filtering the value of the corresponding dataElement. **Tags:** atp.Splitkey=filter
handleData Status	Boolean	0..1	attr	If this attribute is set to true, then the Rte_IStatus API shall exist. If the attribute does not exist or is set to false, then the Rte_IStatus API may still exist in response to the existence of further conditions. This Attribute is only used by the AUTOSAR Classic Platform.
handleNever Received	Boolean	0..1	attr	This attribute specifies whether for the corresponding VariableDataPrototype the "never received" flag is available. If yes, the RTE is supposed to assume that initially the VariableDataPrototype has not been received before. After the first reception of the corresponding VariableDataPrototype the flag is cleared. • If the value of this attribute is set to "true" the flag is required. • If set to "false", the RTE shall not support the "never received" functionality for the corresponding Variable DataPrototype. This Attribute is only used by the AUTOSAR Classic Platform.

▽

△

Class	NonqueuedReceiverComSpec			
handleTimeout Type	HandleTimeoutEnum	0..1	attr	This attribute controls the behavior with respect to the handling of timeouts. This Attribute is only used by the AUTOSAR Classic Platform.
initValue	ValueSpecification	0..1	aggr	Initial value to be used in case the sending component is not yet initialized. If the sender also specifies an initial value, then the receiver's value will be used. **Tags:** atp.Splitkey=initValue This Attribute is only used by the AUTOSAR Classic Platform.
returnNoNew DataEnabled	Boolean	0..1	attr	This attribute defines whether the RTE API functions related to the RPortPrototype shall return No New Data Error if no new data is received from COM. This Attribute is only used by the AUTOSAR Classic Platform.
timeout Substitution Value	ValueSpecification	0..1	aggr	This attribute represents the substitution value applicable in the case of a timeout. **Tags:** atp.Splitkey=timeoutSubstitutionValue This Attribute is only used by the AUTOSAR Classic Platform.
transportError CountEnabled	Boolean	0..1	attr	This attribute defines whether the RTE API functions related to the RPortPrototype shall return the number of transport errors (i.e. COM, SecOC errors) that happened since the last call of the respective API. This Attribute is only used by the AUTOSAR Classic Platform.
valueErrorCount Enabled	Boolean	0..1	attr	This attribute defines whether the RTE API functions related to the RPortPrototype shall return the number of value errors (i.e. out of range, invalid value) that happened since the last call of the respective API. This Attribute is only used by the AUTOSAR Classic Platform.

Table 4.65: NonqueuedReceiverComSpec

[advisory_01010] Existence of attribute NonqueuedReceiverComSpec.initValue

Imposition time: CP: IT_CpgExe

⌈For each NonqueuedReceiverComSpec, attribute initValue shall exist.⌋

Class	QueuedReceiverComSpec			
Note	Communication attributes specific to queued receiving.			
Base	*ARObject*, *RPortComSpec*, *ReceiverComSpec*			
Aggregated by	*AbstractRequiredPortPrototype*.requiredComSpec, PortPrototypeBlueprint.requiredComSpec			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
queueLength	PositiveInteger	0..1	attr	Length of queue for received events. This Attribute is only used by the AUTOSAR Classic Platform.

Table 4.66: QueuedReceiverComSpec

[constr_1889] Existence of attribute QueuedReceiverComSpec.queueLength

Imposition time: CP: IT_CpgExe

⌈For each QueuedReceiverComSpec, attribute queueLength shall exist.⌋

Class	**ReceptionComSpecProps**			
Note	This meta-class defines a set of reception attributes which the application software is assumed to implement.			
Base	*ARObject*			
Aggregated by	*ReceiverComSpec*.receptionProps			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
comHandler TaskMapping Enabled	Boolean	0..1	attr	This attribute defines whether the ComHandler Task Mapping is activated or deactivated. This Attribute is only used by the AUTOSAR Classic Platform.
dataUpdate Period	TimeValue	0..1	attr	This attribute defines the period in which the application shall check for updated data. This attribute is used for the configuration of the E2E protection, but may also indicate a general data reception period.
invalidValue BitfieldErrors Enabled	Boolean	0..1	attr	This attribute defines whether the invalid value error bitfield shall be used which contains the information of invalid value errors of the direct child elements of the enclosing structure and not of elements of sub-structures. This Attribute is only used by the AUTOSAR Classic Platform.
outOfRange BitfieldErrors Enabled	Boolean	0..1	attr	This attribute defines whether the out-of-range error bitfield shall be used which contains the information of out-of-range errors of the direct child elements of the enclosing structure and not of elements of sub-structures. This Attribute is only used by the AUTOSAR Classic Platform.
timeout	TimeValue	0..1	attr	This attribute defines the time interval after which the application shall assume that the to be received data reception has timed out, i.e. the respective data has not been received for that amount of time.

Table 4.67: ReceptionComSpecProps

Enumeration	**HandleTimeoutEnum**
Note	Strategies of handling a reception timeout violation.
Aggregated by	NonqueuedReceiverComSpec.handleTimeoutType
Literal	***Description***
none	If set to none no replacement shall take place. **Tags:** atp.EnumerationLiteralIndex=0
replace	If set to replace, the replacement value shall be the value contained in attribute NonqueuedReceiver Comspec.initValue. **Tags:** atp.EnumerationLiteralIndex=1
replaceByTimeout SubstitutionValue	If set to replaceByTimeoutSubstitutionValue, the replacement value shall be the timeout substitution value. **Tags:** atp.EnumerationLiteralIndex=2

Table 4.68: HandleTimeoutEnum

Primitive	**TimeValue**
Note	This primitive type is taken for expressing time values. The numerical value is supposed to be interpreted in the physical unit second. **Tags:** xml.xsd.customType=TIME-VALUE xml.xsd.type=double

Table 4.69: TimeValue

[constr_1129] `swImplPolicy` and `NonqueuedReceiverComSpec`

Imposition time: CP: `IT_CpgExe`

⌈The attribute `swImplPolicy` of a `dataElement` referenced by a `NonqueuedReceiverComSpec` **shall not** be set to the value `queued`.⌋

[constr_1130] `swImplPolicy` and `QueuedReceiverComSpec`

Imposition time: CP: `IT_CpgExe`

⌈The attribute `swImplPolicy` of a `dataElement` referenced by a `QueuedReceiverComSpec` **shall** be set to the value `queued`.⌋

[constr_1188] Existence of `ReceiverComSpec.replaceWith`

Imposition time: CP: `IT_CpgExe`

⌈The aggregation of `VariableAccess` in the role `ReceiverComSpec.replaceWith` shall exist **if and only if at least one of the following conditions is fulfilled**:

- Attribute `ReceiverComSpec.handleOutOfRange` is set to the value `externalReplacement`.
- Attribute `SenderReceiverInterface.invalidationPolicy.handleInvalid` is set to the value `externalReplacement`.

⌋

[TPS_SWCT_01753] Application of compatibility rules for `ReceiverComSpec.replaceWith` ⌈Compatibility rules as formulated by [constr_1068] and [constr_1187] shall be applicable for the reference `ReceiverComSpec.replaceWith`.⌋

[TPS_SWCT_01223] `networkRepresentation` defines how a specific `dataElement` is represented on a communication bus ⌈For sender-receiver communication, it is possible to specify how `dataElement`s are represented given that the communication requires the usage of a dedicated communication bus.

That is, by means of the `networkRepresentation` it is possible to define how a specific `dataElement` is represented on a communication bus. For this purpose the `networkRepresentation` is implemented as an aggregation of `SwDataDefProps`.⌋

[TPS_SWCT_01224] CompuMethods of dataElement and the networkRepresentation are used for conversion purposes ⌈The attached CompuMethods of both the dataElement and the networkRepresentation can be used to identify the conversion between the two.

The advantage of this approach is that this can also be used without any modifications in combination with a general remapping and rescaling of dataElements between different SwComponentTypes, regardless whether they are located on the same or on different ECUs.⌋

Please note that the decision whether to take the networkRepresentation for data mapping is done in the context of the [9, TPS System Template]. Please find more detailed information about this aspect in the applicable specification.

[TPS_SWCT_01452] Applicability of the aggregation in the role networkRepresentation for ApplicationCompositeDataType ⌈The aggregation of networkRepresentation at the ReceiverComSpec or SenderComSpec only applies for dataElements typed by ApplicationPrimitiveDataTypes.

For the case of using an ApplicationCompositeDataType an additional mechanism shall be used.

In particular, compositeNetworkRepresentation shall be used to define the networkRepresentation of **leaf elements** of ApplicationCompositeDataTypes.⌋

[constr_1196] Existence of networkRepresentation vs. compositeNetworkRepresentation

Imposition time: CP: IT_CpgExe

⌈If a ReceiverComSpec or SenderComSpec aggregates SwDataDefProps in the role networkRepresentation, it shall **not** aggregate compositeNetworkRepresentation (and vice versa).⌋

[constr_1197] Existence of compositeNetworkRepresentation shall be comprehensive

Imposition time: CP: IT_CpgExe

⌈If at least one compositeNetworkRepresentation exists then for each leaf ApplicationCompositeElementDataPrototype of the affected ApplicationCompositeDataType exactly one compositeNetworkRepresentation shall be defined.

For each such compositeNetworkRepresentation, attributes leafElement and networkRepresentation shall exist.⌋

Granted, the definition of [constr_1197] to some extent has a recursive character. The meaning is that if it is actually intended to define a compositeNetworkRepresentation then the definition shall be completely covering the entire set of leaf

elements of the corresponding ApplicationCompositeDataType. In other words, it's all or nothing.

[TPS_SWCT_01593] Semantics of the aggregation in the role ReceiverComSpec.transformationComSpecProps ⌈The role ReceiverComSpec.transformationComSpecProps is used to configure PortPrototype-specific properties for data transformation in the case of receiving inter-ECU communication.⌋

4.6.1.2 Sender Communication Specification

The communication attributes on the sender side are sketched in Figure 4.42.

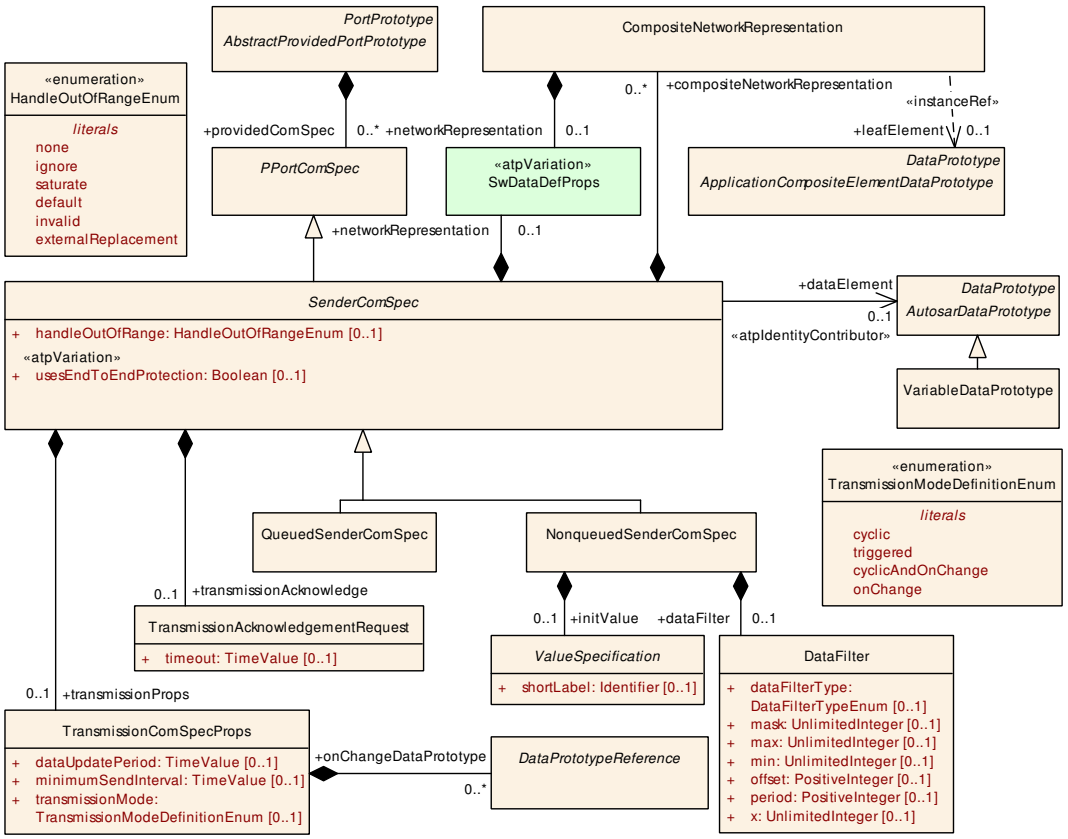

Figure 4.42: Communication attributes of PPortPrototype with respect to sender-receiver communication.

[constr_1131] swImplPolicy and NonqueuedSenderComSpec

Imposition time: CP: IT_CpgExe

⌈The attribute swImplPolicy of a dataElement referenced by a NonqueuedSenderComSpec **shall not** be set to the value queued.⌋

[constr_1132] `swImplPolicy` and `QueuedSenderComSpec`

Imposition time: CP: `IT_CpgExe`

⌈The attribute `swImplPolicy` of a `dataElement` referenced by a `QueuedSenderComSpec` **shall** be set to the value `queued`.⌋

Please note:

- `SenderComSpec.usesEndToEndProtection` does not have any influence on code generation.

  It could be used, for example, by a validation framework to make sure that, if set to `true` the `dataElement` meets a transformer configuration for all respective `SwConnector`s connecting to the `PortPrototype` that owns the `SenderComSpec`.

- `SenderComSpec.usesEndToEndProtection` could be used as a statement from the application developer that the given `dataElement` shall be end-to-end protected.

  However, it seems far-fetched for an application developer to expressly state that a `dataElement` shall **not** be end-to-end protected. This goes beyond the responsibility of an application developer.

  Therefore, two relevant states for `SenderComSpec.usesEndToEndProtection` can be expected:

  - attribute exists and is set to `true` (application developer asserts the necessity to end-to-end protect the dataElement)
  - attribute does not exist (application developer doesn't care)

- The application developer may not have enough oversight to envision how the `dataElement` is communicated, i.e. local vs. network communication. Setting `usesEndToEndProtection` to `true` and then deploy the enclosing software-component such that it communicates only locally on the respective `PortPrototype` also seems unusual for the current situation regarding transformer-based communication.

[constr_1539] Restriction for `SenderComSpec.dataElement`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈The reference `SenderComSpec.dataElement` **shall not** refer to an `ArgumentDataPrototype` or `ParameterDataPrototype`.⌋

Class	***SenderComSpec*** (abstract)
Note	Communication attributes for a sender port (`PPortPrototype` typed by `SenderReceiverInterface`).
Base	*ARObject*, *PPortComSpec*

▽

△

Class	***SenderComSpec*** (abstract)			
Subclasses	NonqueuedSenderComSpec, QueuedSenderComSpec			
Aggregated by	*AbstractProvidedPortPrototype*.providedComSpec, PortPrototypeBlueprint.providedComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
compositeNetworkRepresentation	CompositeNetworkRepresentation	*	aggr	This represents a CompositeNetworkRepresentation defined in the context of a SenderComSpec. **Tags:** atp.Splitkey=compositeNetworkRepresentation This Attribute is only used by the AUTOSAR Classic Platform.
dataElement	AutosarDataPrototype	0..1	ref	Data element these quality of service attributes apply to. **Stereotypes:** atpIdentityContributor
handleOutOfRange	HandleOutOfRangeEnum	0..1	attr	This attribute controls how out-of-range values shall be dealt with. This Attribute is only used by the AUTOSAR Classic Platform.
networkRepresentation	SwDataDefProps	0..1	aggr	A networkRepresentation is used to define how the data Element is mapped to a communication bus. **Tags:** atp.Splitkey=networkRepresentation This Attribute is only used by the AUTOSAR Classic Platform.
transmissionAcknowledge	TransmissionAcknowledgementRequest	0..1	aggr	Requested transmission acknowledgement for data element. **Tags:** atp.Splitkey=transmissionAcknowledge This Attribute is only used by the AUTOSAR Classic Platform.
transmissionProps	TransmissionComSpecProps	0..1	aggr	This aggregation represents the definition transmission props in the context of the enclosing SenderComSpec. **Tags:** atp.Splitkey=transmissionProps
usesEndToEndProtection	Boolean	0..1	attr	This indicates whether the corresponding dataElement shall be transmitted using end-to-end protection. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 4.70: SenderComSpec

[TPS_SWCT_01820] Existence of attribute SenderComSpec.handleOutOfRange

⌈If attribute `SenderComSpec.handleOutOfRange` does not exist at the time when the RTE is generated, then value `none` shall be assumed.⌋

[constr_10539] Existence of attribute SenderComSpec.dataElement

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈For each `SenderComSpec`, attribute `dataElement` shall exist.⌋

Class	**QueuedSenderComSpec**
Note	Communication attributes specific to distribution of events (`PPortPrototype`, `SenderReceiverInterface` and `dataElement` carries an "event").
Base	*ARObject*, *PPortComSpec*, *SenderComSpec*
Aggregated by	*AbstractProvidedPortPrototype*.providedComSpec, PortPrototypeBlueprint.providedComSpec

▽

△

Class	**QueuedSenderComSpec**			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 4.71: QueuedSenderComSpec

Class	**NonqueuedSenderComSpec**			
Note	Communication attributes for non-queued sender/receiver communication (sender side)			
Base	*ARObject*, *PPortComSpec*, *SenderComSpec*			
Aggregated by	*AbstractProvidedPortPrototype*.providedComSpec, PortPrototypeBlueprint.providedComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataFilter	DataFilter	0..1	aggr	The applicable filter algorithm for filtering the value of the corresponding dataElement. **Tags:** atp.Splitkey=dataFilter
initValue	ValueSpecification	0..1	aggr	Initial value to be sent if sender component is not yet fully initialized, but receiver needs data already. **Tags:** atp.Splitkey=initValue

Table 4.72: NonqueuedSenderComSpec

Class	**TransmissionComSpecProps**			
Note	This meta-class defines a set of transmission attributes which the application software is assumed to implement.			
Base	*ARObject*			
Aggregated by	*SenderComSpec*.transmissionProps			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataUpdate Period	TimeValue	0..1	attr	This attribute defines the period in which the application is assumed to transmit the respective data.
minimumSend Interval	TimeValue	0..1	attr	This attribute defines the minimum interval between two consecutive transmissions of the respective data the application is assumed to ensure.
onChangeData Prototype	DataPrototype Reference	*	aggr	This reference defines which DataPrototypes trigger the onChange transmission of the data. **Tags:** atp.Splitkey=onChangeDataPrototype
transmission Mode	TransmissionMode DefinitionEnum	0..1	attr	The attribute defines the mode in which the application is assumed to transmit the respective data.

Table 4.73: TransmissionComSpecProps

Class	**TransmissionAcknowledgementRequest**			
Note	Requests transmission acknowledgement that data has been sent successfully. Success/failure is reported via a SendPoint of a `RunnableEntity`.			
Base	*ARObject*			
Aggregated by	*SenderComSpec*.transmissionAcknowledge			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
timeout	TimeValue	0..1	attr	Number of seconds before an error is reported or in case of allowed redundancy, the value is sent again.

Table 4.74: TransmissionAcknowledgementRequest

[constr_1892] Existence of attribute `TransmissionAcknowledgementRequest.timeout`

Imposition time: CP: `IT_CpgExe`

⌈For each `TransmissionAcknowledgementRequest`, attribute `timeout` shall exist.⌋

Enumeration	**HandleOutOfRangeEnum**
Note	A value of this type is taken for controlling the range checking behavior of the AUTOSAR RTE.
Aggregated by	ISignalProps.handleOutOfRange, *ReceiverComSpec*.handleOutOfRange, *SenderComSpec*.handleOutOfRange
Literal	***Description***
default	The RTE will use the initValue if the actual value is out of the specified bounds. **Tags:** atp.EnumerationLiteralIndex=0
external Replacement	This indicates that the value replacement is sourced from the attribute replaceWith. **Tags:** atp.EnumerationLiteralIndex=1
ignore	The RTE will ignore any attempt to send or receive the corresponding dataElement if the value is out of the specified range. **Tags:** atp.EnumerationLiteralIndex=2
invalid	The RTE will use the invalidValue if the value is out of the specified bounds. **Tags:** atp.EnumerationLiteralIndex=3
none	A range check is not required. **Tags:** atp.EnumerationLiteralIndex=4
saturate	The RTE will saturate the value of the dataElement such that it is limited to the applicable upper bound if it is greater than the upper bound. Consequently, it is limited to the applicable lower bound if the value is less than the lower bound. **Tags:** atp.EnumerationLiteralIndex=5

Table 4.75: HandleOutOfRangeEnum

Enumeration	**TransmissionModeDefinitionEnum**
Note	This meta-class defines possible settings for the transmission mode.
Aggregated by	TransmissionComSpecProps.transmissionMode
Literal	***Description***
cyclic	The data is assumed to be transmitted in a cyclic manner. The cycle is defined by dataUpdatePeriod. **Tags:** atp.EnumerationLiteralIndex=0
cyclicAndOn Change	The data is assumed to be transmitted in a cyclic manner (with cycle time dataUpdatePeriod) and additionally there may be arbitrary transmission if the data value changes (minimumSendInterval to be respected, if defined). Which data prototypes trigger the transmission if their value changes is defined by TransmissionComSpecProps.onChangeDataPrototype. **Tags:** atp.EnumerationLiteralIndex=2
onChange	The data is assumed to be transmitted in an arbitrary manner only if the data value changes (minimumSendInterval to be respected, if defined). Which data prototypes trigger the transmission if their value changes is defined by TransmissionComSpecProps.onChangeDataPrototype. **Tags:** atp.EnumerationLiteralIndex=3
triggered	The data is assumed to be transmitted in an arbitrary manner (minimumSendInterval to be respected, if defined). **Tags:** atp.EnumerationLiteralIndex=1

Table 4.76: TransmissionModeDefinitionEnum

Class	**CompositeNetworkRepresentation**			
Note	This meta-class is used to define the network representation of leaf elements of composite application data types.			
Base	*ARObject*			
Aggregated by	*ReceiverComSpec*.compositeNetworkRepresentation, *SenderComSpec*.compositeNetwork Representation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
leafElement	ApplicationComposite ElementDataPrototype	0..1	iref	This represents that leaf element of an application composite data type. **Tags:** atp.Splitkey=leafElement, leafElement.rootData Prototype, leafElement.contextDataPrototype, leaf Element.targetDataPrototype **InstanceRef implemented by:** ApplicationComposite ElementInPortInterfaceInstanceRef
network Representation	SwDataDefProps	0..1	aggr	The SwDataDefProps owned by the CompositeNetwork Representation are used to define the network representation of the leaf element of an Application CompositeDataType. **Tags:** atp.Splitkey=networkRepresentation

Table 4.77: CompositeNetworkRepresentation

4.6.1.3 Data Filter

Figure 4.43 shows the model of the communication attributes relevant for defining data filters.

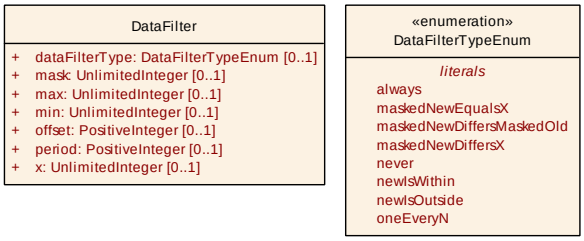

Figure 4.43: `DataFilter` and its communication attributes.

[TPS_SWCT_01221] `DataFilter` ⌈For every `RPortPrototype` or `PPortPrototype` typed by a `SenderReceiverInterface`, a `DataFilter` can be defined given that non-queued communication is foreseen.⌋

Several filter algorithms formally described by the enumeration type `DataFilterTypeEnum` in the meta-model are taken from the [17, ISO 17356-4] that is referenced by the [2, SWS RTE].

[TPS_SWCT_01222] Applicability of `DataFilter` ⌈This ISO 17356-4 specification states that “filtering is only used for messages that can be interpreted as C language unsigned integer types (characters, unsigned integers and enumerations).”⌋

[constr_1044] Applicability of DataFilter

Imposition time: CP: IT_CpgExe

⌈According to the origin of DataFilter, i.e. [17, ISO 17356-4], DataFilters can only be applied to values with an integer base type.⌋

Class	**DataFilter**			
Note	Base class for data filters. The type of the filter is specified in attribute dataFilterType. Some of the filter types require additional arguments which are specified as attributes of this class.			
Base	*ARObject*			
Aggregated by	ISignalPort.dataFilter, NonqueuedReceiverComSpec.filter, NonqueuedSenderComSpec.dataFilter, SignalBasedEventElementToISignalTriggeringMapping.filter, SignalBasedFieldToISignalTriggering Mapping.filter, SignalServiceTranslationElementProps.filter, TransmissionModeCondition.dataFilter			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataFilterType	DataFilterTypeEnum	0..1	attr	This attribute specifies the type of the filter.
mask	UnlimitedInteger	0..1	attr	Mask for old and new value.
max	UnlimitedInteger	0..1	attr	Value to specify the upper boundary
min	UnlimitedInteger	0..1	attr	Value to specify the lower boundary
offset	PositiveInteger	0..1	attr	Specifies the initial number of messages to occur before the first message is passed
period	PositiveInteger	0..1	attr	Specifies number of messages to occur before the message is passed again
x	UnlimitedInteger	0..1	attr	Value to compare with

Table 4.78: DataFilter

[constr_1890] Existence of attribute DataFilter.dataFilterType

Imposition time: CP: IT_CpgExe

⌈For each DataFilter, attribute dataFilterType shall exist.⌋

Enumeration	**DataFilterTypeEnum**
Note	This enum specifies the supported DataFilterTypes.
Aggregated by	DataFilter.dataFilterType
Literal	***Description***
always	No filtering is performed so that the message always passes. **Tags:** atp.EnumerationLiteralIndex=0
maskedNewDiffers MaskedOld	Pass messages where the masked value has changed. (new_value&mask) !=(old_value&mask) new_value: current value of the message old_value: last value of the message (initialized with the initial value of the message, updated with new_value if the new message value is not filtered out) **Tags:** atp.EnumerationLiteralIndex=1
maskedNewDiffers X	Pass messages whose masked value is not equal to a specific value x (new_value&mask) != x new_value: current value of the message **Tags:** atp.EnumerationLiteralIndex=2

▽

△

Enumeration	DataFilterTypeEnum
maskedNewEquals X	Pass messages whose masked value is equal to a specific value x (new_value&mask) == x new_value: current value of the message **Tags:** atp.EnumerationLiteralIndex=3
never	The filter removes all messages. **Tags:** atp.EnumerationLiteralIndex=4
newIsOutside	Pass a message if its value is outside a predefined boundary. (min > new_value) OR (new_value > max) **Tags:** atp.EnumerationLiteralIndex=5
newIsWithin	Pass a message if its value is within a predefined boundary. min <= new_value <= max **Tags:** atp.EnumerationLiteralIndex=6
oneEveryN	Pass a message once every N message occurrences. Algorithm: occurrence % period == offset Start: occurrence = 0. Each time the message is received or transmitted, occurrence is incremented by 1 after filtering. Length of occurrence is 8 bit (minimum). **Tags:** atp.EnumerationLiteralIndex=7

Table 4.79: DataFilterTypeEnum

4.6.1.4 Communication between Application and NV Block Software Components

In many cases, communication between an `NvBlockSwComponentType` (see Chapter 11.4.2) and an `ApplicationSwComponentType` is implemented based on mixed communication approaches, i.e. the `ApplicationSwComponentType` most likely uses a `PortPrototype` typed by a `SenderReceiverInterface` while the `NvBlockSwComponentType` uses a `PortPrototype` typed by an `NvDataInterface`.

In such a case it is necessary to clarify the usage of attributes of the respective `ComSpec` on both the sender and receiver side. For this purpose, the constraints [constr_10071] and [constr_10072] are defined[11].

[11] As a general rule, queued communication between `ApplicationSwComponentType` and `NvBlockSwComponentType` is not supported by AUTOSAR. The [constr_10071] and [constr_10072] nevertheless contain a column that represents the case of queued communication for the sake of completeness. But consequently, this column is consistently filled with ‘empty cells in the respective tables.

[constr_10071] Allowed multiplicities of SenderComSpec attributes for communication between ApplicationSwComponentType and NvBlockSwComponentType

Imposition time: CP: IT_RteGen

⌈

Sender	ApplicationSwComponentType	
Receiver	NvBlockSwComponentType	
Queuing Configuration	non-queued	queued
SenderComSpec.transmissionAcknowledge	d/c	
SenderComSpec.dataElement	1	
SenderComSpec.handleOutOfRange	d/c	
SenderComSpec.usesEndToEndProtection	d/c	
SenderComSpec.transmissionProps.dataUpdatePeriod	0..1	
SenderComSpec.transmissionProps.minimumSendInterval	0..1	
SenderComSpec.transmissionProps.transmissionMode	0..1	
SenderComSpec.networkRepresentation	d/c	
SenderComSpec.compositeNetworkRepresentation	d/c	
NonqueuedSenderComSpec.dataFilter	d/c	
NonqueuedSenderComSpec.initValue	0..1	

⌋

Legend for [constr_10071]

Please note that the abbreviation “d/c”, as mentioned in [constr_10071], stands for “don’t care”.

It is noted that the content of [constr_10071] and [constr_10072] only partially matches the criteria for the content of a constraint.

For example, the constraints contain statements about the optional existence of attributes or even declare that the existence of attributes has a “don’t care” nature.

But on the other hand, these constraints also contain content that is definitely relevant for a constraint and the presentation of all these regulations, condensed into one table, is considered valuable.

This aspect of easily getting an overview would get lost if the constraints were spit into different tables that are wrapped into a spec item and a constraint.

[constr_10072] Allowed multiplicities of SenderComSpec attributes for communication between NvBlockSwComponentType and ApplicationSwComponentType

Imposition time: CP: IT_RteGen

⌈

Sender	NvBlockSwComponentType	
Receiver	ApplicationSwComponentType	
Queuing Configuration	non-queued	queued
ReceiverComSpec.replaceWith	0	
ReceiverComSpec.dataElement	1	
ReceiverComSpec.receptionProps.dataUpdatePeriod	0	
ReceiverComSpec.receptionProps.timeout	0	
ReceiverComSpec.receptionProps.comHandlerTaskMapping-Enabled	0	
ReceiverComSpec.receptionProps.invalidValueBitfield-ErrorsEnabled	0	
ReceiverComSpec.receptionProps.outOfRangeBitfield-ErrorsEnabled	0	
ReceiverComSpec.handleOutOfRange	0	
ReceiverComSpec.handleOutOfRangeStatus	0	
ReceiverComSpec.transformationComSpecProps	0	
ReceiverComSpec.networkRepresentation	0	
ReceiverComSpec.compositeNetworkRepresentation	0	
QueuedReceiverComSpec.queueLength		
NonqueuedReceiverComSpec.filter	0	
NonqueuedReceiverComSpec.timeoutSubstitutionValue	0	
NonqueuedReceiverComSpec.initValue	0..1	
NonqueuedReceiverComSpec.aliveTimeout	0	
NonqueuedReceiverComSpec.enableUpdate	0	
NonqueuedReceiverComSpec.handleDataStatus	0	
NonqueuedReceiverComSpec.handleNeverReceived	0..1	
NonqueuedReceiverComSpec.handleTimeoutType	0	
NonqueuedReceiverComSpec.returnNoNewDataEnabled	0	
NonqueuedReceiverComSpec.transportErrorCountEnabled	0	
NonqueuedReceiverComSpec.valueErrorCountEnabled	0	

⌋

4.6.1.5 Communication behavior to be implemented by the Software Component

4.6.1.5.1 Transmission ComSpec Props

AUTOSAR supports the handling of periodic data transmission and reception timeout checking in the Classic AUTOSAR Basic Software layer. The definition of the transmission modes and time values is defined using the [9, TPS System Template].

The only value which is also available at the NonqueuedReceiverComSpec is the aliveTimeout - as this value configures both communication stack timeout handling (in the case of remote communication) and RTE timeout handling (in the case of local communication).

With the introduction of the transformer technology the aspects of periodic data transmission and checking for timeout on reception may have to be implemented by the application code. The main reason is that the E2E-Transformer needs to be called periodically in order to keep its state machine up to date.

So, the application code needs to call the transmission / reception APIs periodically in order to fulfill these timing requirements. But there may also be other reasons why the application shall take care of the periodicity, for example in the case of the LdCom module (which doesn't have any timing features) usage.

The meta-classes TransmissionComSpecProps and ReceptionComSpecProps have been introduced to define the expected communication behavior to be implemented by the application code.

As the TransmissionComSpecProps and ReceptionComSpecProps define what the expected communication behavior is, the values can also be utilized by communication (network) measurement tools to verify whether the application code actually implements the attributes properly.

The attribute ReceptionComSpecProps.dataUpdatePeriod defines the time period in which the receiving application shall call the reception API to check for new data.

The attribute ReceptionComSpecProps.timeout defines the time after which the application shall assume that the to-be-received data reception has timed out.

The attribute NonqueuedReceiverComSpec.aliveTimeout might be defined as well, resulting in duplicate timeout checks.

The communication stack / RTE would check for the value of attribute aliveTimeout and the application code would check for the ReceptionComSpecProps.timeout. Although it does not seem sensible to perform a timeout check twice, it is not forbidden.

The attribute TransmissionComSpecProps.dataUpdatePeriod defines the time period in which the sending application shall call the send API.

The attributes TransmissionComSpecProps.minimumSendInterval and TransmissionComSpecProps.transmissionMode define values which influence the transmission behavior, implemented by the application code.

Note that the communication stack might also have a periodicity, minimum sending time and transmission mode defined. And such doubled implementation might lead to undesired effects. However AUTOSAR does not regulate the usage of the mechanisms to be exclusive.

4.6.1.5.2 Transmission triggered by Element of composite Data Type

If the SenderComSpec.dataElement is typed by a composite data type, then the "on change" transmissions (TransmissionModeDefinitionEnum.onChange and TransmissionModeDefinitionEnum.cyclicAndOnChange) AUTOSAR provides the opportunity to formally define which parts of the dataElement shall actually trigger the "on change" transmission.

Class	***DataPrototypeReference*** (abstract)			
Note	This meta-class provides the ability to reference a DataPrototype.			
Base	*ARObject*			
Subclasses	DataPrototypeInPortInterfaceRef, ImplementationDataTypeElementInPortInterfaceRef			
Aggregated by	DataPrototypeTransformationProps.dataPrototypeInPortInterfaceRef, SignalServiceTranslationElement Props.element, TransmissionComSpecProps.onChangeDataPrototype			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 4.80: DataPrototypeReference

[constr_10532] Restriction for the aggregation in the role SenderComSpec.transmissionProps.onChangeDataPrototype

Imposition time: CP: IT_CpgExe

⌈If the SenderComSpec.dataElement refers to an AutosarDataPrototype aggregated by a SenderReceiverInterface in the role dataElement, then a DataPrototypeReference aggregated in the role SenderComSpec.transmissionProps.onChangeDataPrototype shall only exist as

- a DataPrototypeInPortInterfaceRef that aggregates a DataPrototypeInSenderReceiverInterfaceInstanceRef in the role dataPrototypeInSenderReceiverInterface or
- an ImplementationDataTypeElementInPortInterfaceRef.

⌋

The reference to the "root" AutosarDataPrototype is already specified by the role SenderComSpec.dataElement.

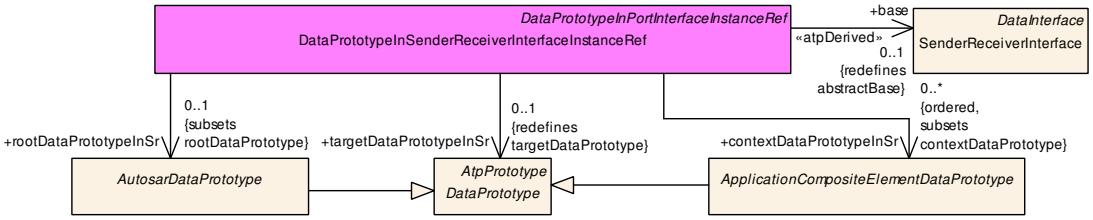

Figure 4.44: Modeling of DataPrototypeInSenderReceiverInterfaceInstanceRef

Consequently, the reference in the role DataPrototypeInSenderReceiverInterfaceInstanceRef.rootDataPrototypeInSr shall not be defined again to mitigate the risk of contradicting identification of the "root".

This is the rationale for the existence of [constr_10533] and [constr_10534] (for the possible case of ImplementationDataTypeElementInPortInterfaceRef.rootDataPrototype).

[constr_10533] Existence of the reference in the role TransmissionComSpecProps.onChangeDataPrototype.dataPrototypeInSenderReceiverInterface.rootDataPrototypeInSr

Imposition time: CP: IT_CpgExe

⌈If all of the following conditions apply:

- the SenderComSpec.dataElement refers to an AutosarDataPrototype aggregated by a SenderReceiverInterface in the role dataElement and
- the aggregation in the role TransmissionComSpecProps.onChangeDataPrototype.dataPrototypeInSenderReceiverInterface exists,

then the aggregation in the role TransmissionComSpecProps.onChangeDataPrototype.dataPrototypeInSenderReceiverInterface.rootDataPrototypeInSr shall **not** exist.⌋

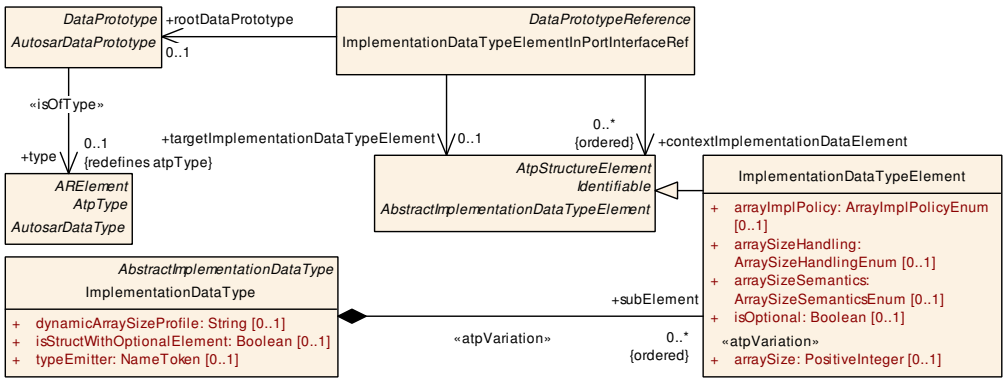

Figure 4.45: Modeling of ImplementationDataTypeElementInPortInterfaceRef

[constr_10534] Existence of TransmissionComSpecProps.onChangeDataPrototype.rootDataPrototype

Imposition time: CP: IT_CpgExe

⌈If all of the following conditions apply:

- the SenderComSpec.dataElement refers to an AutosarDataPrototype aggregated by a SenderReceiverInterface in the role dataElement and
- the aggregation in the role TransmissionComSpecProps.onChangeDataPrototype exists,

then the aggregation in the role TransmissionComSpecProps.onChangeDataPrototype.rootDataPrototype shall **not** exist⌋

Class	DataPrototypeInPortInterfaceRef			
Note	This class represents a RootDataPrototype that is typed by an ApplicationDataType or Implementation DataType or a DataTypeElement that is aggregated within a composite application data type (record or array).			
Base	*ARObject*, *DataPrototypeReference*			
Aggregated by	DataPrototypeTransformationProps.dataPrototypeInPortInterfaceRef, SignalServiceTranslationElement Props.element, TransmissionComSpecProps.onChangeDataPrototype			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
dataPrototypeIn ClientServer Interface	DataPrototype	0..1	iref	This element defines a reference to a DataPrototype in the context of a ClientServerInterface. **Tags:** atp.Splitkey=dataPrototypeInClientServerInterface, dataPrototypeInClientServerInterface.rootDataPrototype InCs, dataPrototypeInClientServerInterface.contextData PrototypeInCs, dataPrototypeInClientServer Interface.targetDataPrototypeInCs **InstanceRef implemented by:** DataPrototypeInClient ServerInterfaceInstanceRef This Attribute is only used by the AUTOSAR Classic Platform.
dataPrototypeIn SenderReceiver Interface	DataPrototype	0..1	iref	This element defines a reference to a DataPrototype in the context of a SenderReceiverInterface. **Tags:** atp.Splitkey=dataPrototypeInSenderReceiver Interface, dataPrototypeInSenderReceiverInterface.root DataPrototypeInSr, dataPrototypeInSenderReceiver Interface.contextDataPrototypeInSr, dataPrototypeIn SenderReceiverInterface.targetDataPrototypeInSr **InstanceRef implemented by:** DataPrototypeInSender ReceiverInterfaceInstanceRef This Attribute is only used by the AUTOSAR Classic Platform.

Table 4.81: DataPrototypeInPortInterfaceRef

Class	ImplementationDataTypeElementInPortInterfaceRef			
Note	This meta-class represents the ability to refer to the internal structure of an AutosarDataPrototype which is typed by an ImplementationDatatype in the context of a PortInterface. In other words, this meta-class shall not be used to model a reference to the AutosarDataPrototype as a target itself, even if the AutosarDataPrototype is typed by an ImplementationDataType and even if that ImplementationDataType represents a composite data type.			
Base	*ARObject*, *DataPrototypeReference*			
Aggregated by	DataPrototypeTransformationProps.dataPrototypeInPortInterfaceRef, SignalServiceTranslationElement Props.element, TransmissionComSpecProps.onChangeDataPrototype			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
context Implementation DataElement (ordered)	AbstractImplementation DataTypeElement	*	ref	This is a context in case there are subelements with explicit types. The reference has to be ordered to properly reflect the nested structure. **Tags:** xml.sequenceOffset=20
rootData Prototype	AutosarDataPrototype	0..1	ref	This refers to the AutosarDataPrototype which is typed by the ImplementationDatatype. The targetDataPrototype and all defined contextDataPrototypes can be found within this rootDataPrototype. **Tags:** atp.Splitkey=rootDataPrototype xml.sequenceOffset=10

▽

△

Class	**ImplementationDataTypeElementInPortInterfaceRef**			
target ImplementationDataType Element	AbstractImplementationDataTypeElement	0..1	ref	This is a target ImplementationDataTypeElement in case that the rootDataPrototype is composite and the target is a subElement of the rootDataPrototype. **Tags:** atp.Splitkey=targetImplementationDataTypeElement xml.sequenceOffset=30

Table 4.82: ImplementationDataTypeElementInPortInterfaceRef

Class	**DataPrototypeInSenderReceiverInterfaceInstanceRef**			
Note	This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARObject*, *AtpInstanceRef*, *DataPrototypeInPortInterfaceInstanceRef*			
Aggregated by	DataPrototypeInPortInterfaceRef.dataPrototypeInSenderReceiverInterface			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	SenderReceiverInterface	0..1	ref	**Stereotypes:** atpDerived
contextData PrototypeInSr (ordered)	ApplicationCompositeElementDataPrototype	*	ref	**Tags:** xml.sequenceOffset=20
rootData PrototypeInSr	AutosarDataPrototype	0..1	ref	**Tags:** xml.sequenceOffset=10
targetData PrototypeInSr	DataPrototype	0..1	ref	**Tags:** xml.sequenceOffset=30

Table 4.83: DataPrototypeInSenderReceiverInterfaceInstanceRef

4.6.1.6 Communication behavior to be implemented by the Com Handler

In addition to the application code requirements, the meta-class `ReceptionComSpecProps` can also be used to configure the behavior of cyclic handling of communication data by the RTE (see SWS RTE [2, SWS RTE] for more details). This approach (the so-called “COM handler”) was introduced into AUTOSAR to support a generic error reporting and to qualify the received data so that a software-component can decide whether the data is usable or not.

Some attributes in the context of the `ReceiverComSpec` are related to the configuration of the so-called “COM handler”:

- `ReceiverComSpec.receptionProps.comHandlerTaskMappingEnabled`
- `ReceiverComSpec.receptionProps.invalidValueBitfieldErrorsEnabled`
- `ReceiverComSpec.receptionProps.outOfRangeBitfieldErrorsEnabled`
- `NonqueuedReceiverComSpec.returnNoNewDataEnabled`
- `NonqueuedReceiverComSpec.transportErrorCountEnabled`
- `NonqueuedReceiverComSpec.valueErrorCountEnabled`

[TPS_SWCT_01901] Activation of cyclic handling of communication data ⌈The ability of the RTE to implement a cyclic handling of received communication data is controlled by the attribute ReceptionComSpecProps.comHandlerTaskMapping-Enabled, i.e. the functionality within the RTE is activated if the attribute comHandler-TaskMappingEnabled is set to true.⌋

[constr_10671] ReceptionComSpecProps.comHandlerTaskMappingEnabled vs. implicit data read access

Imposition time: IT_CpgExe

⌈If the ReceiverComSpec.dataElement is referenced by a VariableAccess that is aggregated by RunnableEntity in the dataReadAccess role (which translates to implicit data read access), then ReceptionComSpecProps.comHandlerTask-MappingEnabled shall not be set to true.⌋

[constr_10672] Applicability of transportErrorCountEnabled, valueError-CountEnabled, returnNoNewDataEnabled

Imposition time: CP: IT_CpgExe

⌈The attributes

- NonqueuedReceiverComSpec.transportErrorCountEnabled,
- NonqueuedReceiverComSpec.valueErrorCountEnabled, and
- NonqueuedReceiverComSpec.returnNoNewDataEnabled

shall only exist if the attribute ReceptionComSpecProps.comHandlerTask-MappingEnabled is set to true.⌋

[constr_10673] Existence of ReceptionComSpecProps.comHandlerTask-MappingEnabled vs. ReceptionComSpecProps.timeout

Imposition time: CP: IT_CpgExe

⌈In each ReceptionComSpecProps, **at most one** of the attributes

- comHandlerTaskMappingEnabled (timeout monitoring by the “COM handler”) and
- timeout (timeout monitoring by the application software)

shall exist.⌋

[TPS_SWCT_01902] Ability to return transport errors count information from RTE API calls ⌈The configuration of attribute NonqueuedReceiverComSpec.transportErrorCountEnabled allows for the extension of RTE APIs related to the referenced dataElement in the context of the enclosing PortPrototype such that information about the number of transport errors can be retrieved.⌋

[TPS_SWCT_01903] Ability to return the value errors count errors information from RTE API calls ⌈The configuration of attribute NonqueuedReceiverComSpec.

valueErrorCountEnabled allows for the extension of RTE APIs related to the referenced dataElement in the context of the enclosing PortPrototype such that the number of value errors (i.e. out of range, invalid value) can be retrieved.⌋

[TPS_SWCT_01904] Ability to return an error from RTE API calls if no new data is received from COM ⌈The configuration of attribute NonqueuedReceiverComSpec.returnNoNewDataEnabled allows for the modification of RTE APIs related to the referenced dataElement in the context of the enclosing PortPrototype such that an error is returned if no new data is received from COM.⌋

[TPS_SWCT_01905] Ability to return more detailed out-of-range information about received structured dataElement ⌈The configuration of attribute ReceptionComSpecProps.outOfRangeBitfieldErrorsEnabled allows for the extension of RTE APIs related to the referenced dataElement in the context of the enclosing PortPrototype, such that information about out-of-range errors can be retrieved for every individual sub-element of the referenced structured dataElement.⌋

In other words, if the dataElement is typed by either

- an ApplicationRecordDataType or
- an ImplementationDataType where (after the removal of all indirections) attribute category is set to the value STRUCTURE,

then the attribute ReceptionComSpecProps.invalidValueBitfieldErrorsEnabled allows for the retrieval of the out-of-range status for each leaf element of the structured data type.

[constr_10674] Existence of attribute ReceptionComSpecProps.outOfRangeBitfieldErrorsEnabled

Imposition time: CP: IT_CpgExe

⌈Attribute ReceptionComSpecProps.outOfRangeBitfieldErrorsEnabled shall only exist if the ReceiverComSpec.dataElement is typed by either

- an ApplicationRecordDataType or
- an ImplementationDataType where (after the removal of all indirections) attribute category is set to the value STRUCTURE.

⌋

[TPS_SWCT_01906] Ability to return more detailed invalid value information about received structured dataElement ⌈The configuration of attribute ReceptionComSpecProps.invalidValueBitfieldErrorsEnabled allows for the extension of RTE APIs related to the referenced dataElement in the context of the enclosing PortPrototype, such that information about invalid value errors can be retrieved for every individual sub-element of the referenced structured dataElement.⌋

In other words, if the dataElement is typed by either

- an ApplicationRecordDataType or
- an ImplementationDataType where (after the removal of all indirections) attribute category is set to the value STRUCTURE,

then the attribute ReceptionComSpecProps.invalidValueBitfieldErrorsEnabled allows for the retrieval of the invalid value status for each leaf element of the structured data type.

[constr_10675] Existence of attribute ReceptionComSpecProps.invalidValueBitfieldErrorsEnabled

Imposition time: CP: IT_CpgExe

⌈Attribute ReceptionComSpecProps.invalidValueBitfieldErrorsEnabled shall only exist if the ReceiverComSpec.dataElement is typed by either

- an ApplicationRecordDataType or
- an ImplementationDataType where (after the removal of all indirections) attribute category is set to the value STRUCTURE.

⌋

4.6.2 Communication Specification for Client-Server Communication

4.6.2.1 Client ComSpec

The communication aspects relevant for client communication are sketched in Figure 4.46.

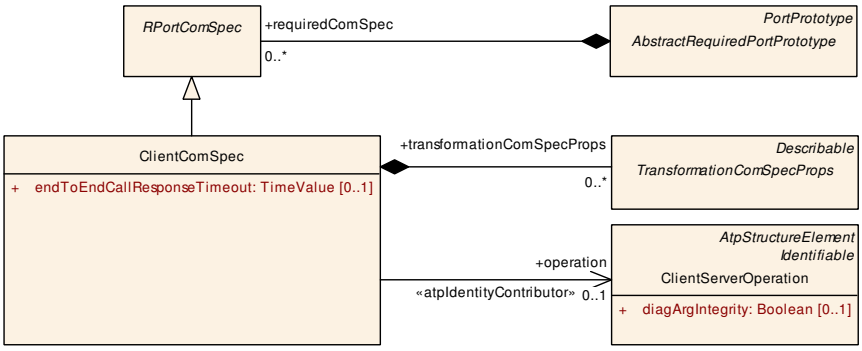

Figure 4.46: Communication attributes of RPortPrototype with respect to client-server communication.

[constr_1540] Existence of ClientComSpec.operation

Imposition time: CP: IT_CpgExe

⌈The reference ClientComSpec.operation **shall exist** if the AbstractRequiredPortPrototype that owns the ClientComSpec is typed by a ClientServerInterface.⌋

Note: on the *AUTOSAR adaptive platform* the `ClientComSpec` can also be used in the context of `RPortPrototype`s typed by `PortInterface`s that are not available on the *AUTOSAR classic platform*. This is the motivation for the existence of [constr_1540].

[TPS_SWCT_01595] Semantics of attribute `ClientComSpec.transformationComSpecProps` ⌈The attribute `ClientComSpec.transformationComSpecProps` shall be used to configure `PortPrototype`-specific properties for data transformation in the case of Client/Server inter-ECU communication for the reception of the server's response.⌋

Class	**ClientComSpec**			
Note	Client-specific communication attributes (`RPortPrototype` typed by `ClientServerInterface`			
Base	*ARObject*, *RPortComSpec*			
Aggregated by	*AbstractRequiredPortPrototype*.requiredComSpec, PortPrototypeBlueprint.requiredComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
endToEndCall Response Timeout	TimeValue	0..1	attr	This attribute defines the maximum time interval in which the application shall expect the servers's response (time between the sending of the call invocation until the arrival of the server's response).
operation	ClientServerOperation	0..1	ref	This represents the corresponding ClientServerOperation. **Stereotypes:** atpIdentityContributor
transformation ComSpecProps	TransformationCom SpecProps	*	aggr	This references the TransformationComSpecProps which define port-specific configuration for data transformation. **Tags:** atp.Splitkey=transformationComSpecProps

Table 4.84: ClientComSpec

4.6.2.2 Server ComSpec

The server side looks very similar but provides an attribute for specifying the queue length.

Note: on the *AUTOSAR adaptive platform* the `ServerComSpec` can also be used in the context of `RPortPrototype`s typed by `PortInterface`s that are not available on the *AUTOSAR classic platform*. This is the motivation for the existence of [constr_1541].

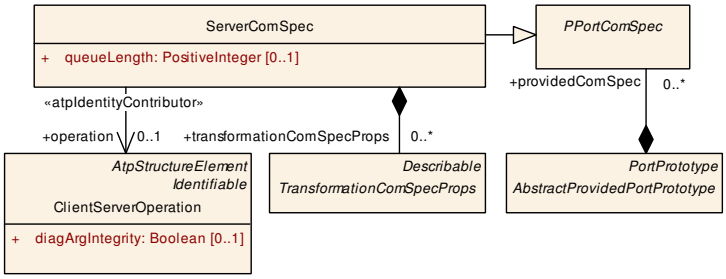

Figure 4.47: Communication attributes of `PPortPrototype` with respect to client-server communication.

[constr_1541] Existence of `ServerComSpec.operation`

Imposition time: CP: `IT_CpgExe`

⌈The reference `ServerComSpec.operation` **shall exist** if the `AbstractProvidedPortPrototype` that owns the `ServerComSpec` is typed by a `ClientServerInterface`.⌋

Class	**ServerComSpec**			
Note	Communication attributes for a server port (`PPortPrototype` and `ClientServerInterface`).			
Base	*ARObject*, *PPortComSpec*			
Aggregated by	*AbstractProvidedPortPrototype*.providedComSpec, PortPrototypeBlueprint.providedComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
operation	ClientServerOperation	0..1	ref	Operation these communication attributes apply to. **Stereotypes:** atpIdentityContributor
queueLength	PositiveInteger	0..1	attr	Length of call queue on the server side. The queue is implemented by the RTE. The value shall be greater or equal to 1. Setting the value of queueLength to 1 implies that incoming requests are rejected while another request that arrived earlier is being processed.
transformation ComSpecProps	TransformationCom SpecProps	*	aggr	This references the TransformationComSpecProps which define port-specific configuration for data transformation. **Tags:** atp.Splitkey=transformationComSpecProps

Table 4.85: ServerComSpec

The definition of attribute `ServerComSpec.queueLength` is optional on the level of a software-component. Even if a value is specified, it may be overridden in the configuration of the RTE, at the discretion of an integrator.

More specifically, the definition of `ServerComSpec.queueLength` requires system knowledge and therefore breaks the abstraction the VFB-design tries to establish.

Due to the existence of certain pragmatic design approaches, there may be use-cases where the `ServerComSpec.queueLength` is defined on VFB level (in which case [constr_1228] needs to be observed).

However, the preferred way is to not define the `ServerComSpec.queueLength` but either define the queue length at the level of the system description or (as mentioned above) let the integrator take care of the definition of the queue length.

[TPS_SWCT_01225] `RunnableEntity` implements the functionality of more than one `ClientServerOperation`s ⌈A single `RunnableEntity` can implement the functionality of more than one `ClientServerOperation`s.

For this purpose, one `OperationInvokedEvent` for each affected `ClientServerOperation` shall reference the respective `RunnableEntity`.

The attribute `ServerComSpec.queueLength` shall be taken for the determination of the resulting queue length, [constr_1128] applies.⌋

For more information about requirements towards ClientServerOperations triggering the same RunnableEntity can be found in Chapter 7.2.4.3, specifically [constr_2000].

[constr_10542] RunnableEntity is referenced by an OperationInvokedEvent

Imposition time: CP: IT_CpgExe

⌈A RunnableEntity that is referenced by one or more (according to [TPS_SWCT_01225]) OperationInvokedEvents in the role startOnEvent shall **not** be referenced in the same role (startOnEvent) by any other subclass of RTEEvent.⌋

[constr_1128] Queue length of ClientServerOperations associated with the same RunnableEntity

Imposition time: CP: IT_CpgExe

⌈If two or more OperationInvokedEvents reference a single RunnableEntity the value of the ServerComSpec attribute queueLength shall be **identical** for all ServerComSpecs owned by PPortPrototypes of the enclosing SwComponentType that reference one of the ClientServerOperations that are also referenced by the OperationInvokedEvents.⌋

[TPS_SWCT_01596] Semantics of attribute ServerComSpec.transformationComSpecProps ⌈The attribute ServerComSpec.transformationComSpecProps shall be used to configure PortPrototype-specific properties for data transformation in the case of Client/Server inter-ECU communication for the reception of the client's request.⌋

See Chapter 4.6.6 for details.

4.6.3 Communication Specification for Mode Switch Communication

4.6.3.1 Mode Switch Sender ComSpec

In analogy to the previous section, Figure 4.48 shows the meta-model elements relevant for a mode switch communication.

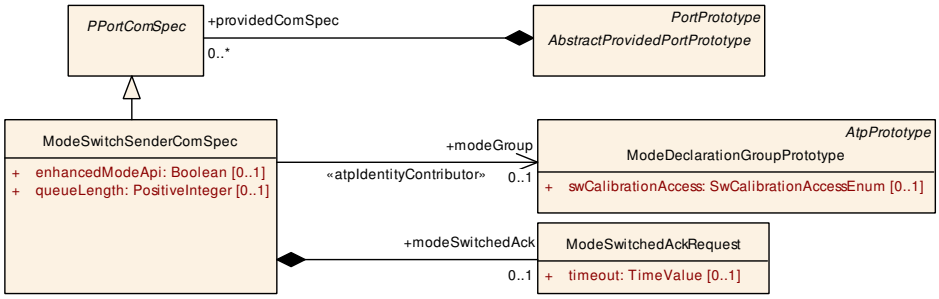

Figure 4.48: Communication attributes of PPortPrototype with respect to mode switch communication.

On the sender side it is possible to specify that an acknowledgement is supposed to be returned that indicates the successful processing of the mode switch request.

Class	**ModeSwitchSenderComSpec**			
Note	Communication attributes of PPortPrototypes with respect to mode communication			
Base	*ARObject*, *PPortComSpec*			
Aggregated by	*AbstractProvidedPortPrototype*.providedComSpec, PortPrototypeBlueprint.providedComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
enhancedModeApi	Boolean	0..1	attr	This controls the creation of the enhanced mode API that returns information about the previous mode and the next mode. If set to "true" the enhanced mode API is supposed to be generated. For more details please refer to the SWS_RTE.
modeGroup	ModeDeclarationGroupPrototype	0..1	ref	ModeDeclarationGroupPrototype (of the same Port Interface) to which these communication attributes apply. **Stereotypes:** atpIdentityContributor
modeSwitchedAck	ModeSwitchedAckRequest	0..1	aggr	If this aggregation exists an acknowledgement for the successful processing of the mode switch request is required. **Tags:** atp.Splitkey=modeSwitchedAck
queueLength	PositiveInteger	0..1	attr	Length of call queue on the mode user side. The queue is implemented by the RTE. The value shall be greater or equal to 1. Setting the value of queueLength to 1 implies that incoming requests are rejected while another request that arrived earlier is being processed.

Table 4.86: ModeSwitchSenderComSpec

[constr_1894] Existence of attribute ModeSwitchSenderComSpec.queueLength

Imposition time: CP: IT_CpgExe

⌈For each ModeSwitchSenderComSpec, attribute queueLength shall exist.⌋

[constr_1895] Existence of attribute ModeSwitchSenderComSpec.modeGroup

Imposition time: CP: IT_CpgExe

⌈For each ModeSwitchSenderComSpec, attribute modeGroup shall exist.⌋

Class	**ModeSwitchedAckRequest**			
Note	Requests acknowledgements that a mode switch has been proceeded successfully			
Base	*ARObject*			
Aggregated by	ModeSwitchSenderComSpec.modeSwitchedAck			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
timeout	TimeValue	0..1	attr	Number of seconds before an error is reported or in case of allowed redundancy, the value is sent again.

Table 4.87: ModeSwitchedAckRequest

4.6.3.2 Mode Switch Receiver ComSpec

[TPS_SWCT_01514] Duplicate existence of `enhancedModeApi` in the context of a `PRPortPrototype` ⌈If the attribute `enhancedModeApi` is defined in a `ModeSwitchReceiverComSpec` owned by a `PRPortPrototype`, its value shall be ignored.⌋

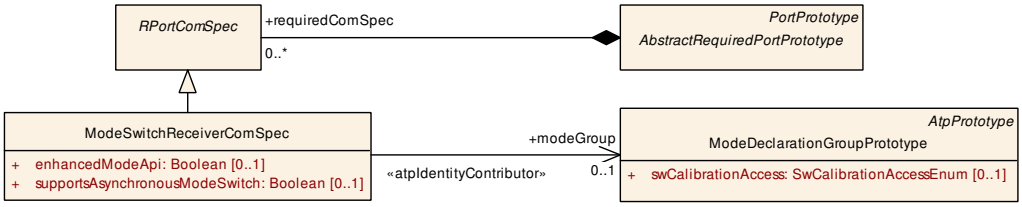

Figure 4.49: Communication attributes of `PPortPrototype` with respect to mode switch communication.

Class	**ModeSwitchReceiverComSpec**			
Note	Communication attributes of `RPortPrototype`s with respect to mode communication			
Base	*ARObject*, *RPortComSpec*			
Aggregated by	*AbstractRequiredPortPrototype*.requiredComSpec, PortPrototypeBlueprint.requiredComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
enhancedMode Api	Boolean	0..1	attr	This controls the creation of the enhanced mode API that returns information about the previous mode and the next mode. If set to "true" the enhanced mode API is supposed to be generated. For more details please refer to the SWS_RTE.
modeGroup	ModeDeclarationGroup Prototype	0..1	ref	ModeDeclarationGroupPrototype (of the same Port Interface) to which these communication attributes apply. **Stereotypes:** atpIdentityContributor
supports Asynchronous ModeSwitch	Boolean	0..1	attr	This attribute controls the behavior of the corresponding RPortPrototype with respect to the question whether it can deal with asynchronous mode switch requests, i.e. if set to true, the RPortPrototype is able to deal with an asynchronous mode switch request.

Table 4.88: ModeSwitchReceiverComSpec

[constr_1896] Existence of attribute `ModeSwitchReceiverComSpec.modeGroup`

Imposition time: CP: `IT_CpgExe`

⌈For each `ModeSwitchReceiverComSpec`, attribute `modeGroup` shall exist.⌋

4.6.4 Communication Specification for Parameter Communication

Granted, the definition of a `ComSpec` for `ParameterDataPrototype`s looks strange on first sight. A `ParameterDataPrototype` owned by a `PPortPrototype` typed by a `ParameterInterface` is not actually transmitted over any communication medium. Therefore, the term *communication* should in this case be taken with a grain of salt.

However, it is generally necessary to be able to define role-specific initial values for `ParameterDataPrototype`s aggregated in a `ParameterInterface`. In other

words, the actual problem closely resembles the definition of initial values in the case of sender-receiver communication.

[TPS_SWCT_01226] `initValue` on the level of a `ComSpec` is relevant for connections to the corresponding `PortPrototype` ⌈Please note that (along the example of sender-receiver communication) only the `initValue` defined in the context of a `ParameterProvideComSpec` or `ParameterRequireComSpec` is relevant for connections to the corresponding `PortPrototype`. An `initValue` defined in the scope of a `ParameterDataPrototype` is ignored.⌋

Therefore, it is only reasonable to apply the existing and well-known pattern to the definition of initial values for `ParameterDataPrototype`s aggregated in a `ParameterInterface`. The actual modeling is sketched in Figure 4.50 for provided `ParameterDataPrototype`s and in Figure 4.51 for required `ParameterDataPrototype`s.

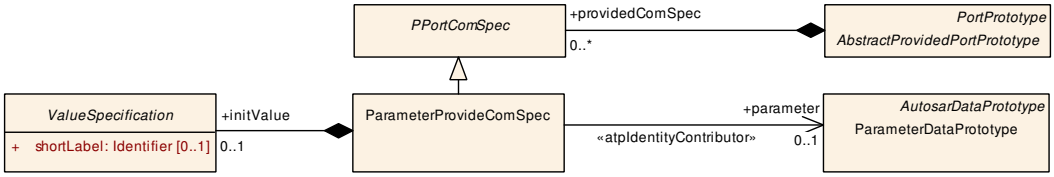

Figure 4.50: Communication attributes of `ParameterDataPrototype`s with respect to `PPortPrototype`

Class	**ParameterProvideComSpec**			
Note	"Communication" specification that applies to parameters on the provided side of a connection.			
Base	*ARObject*, *PPortComSpec*			
Aggregated by	*AbstractProvidedPortPrototype*.providedComSpec, PortPrototypeBlueprint.providedComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
initValue	ValueSpecification	0..1	aggr	The initial value applicable for the corresponding ParameterDataPrototype. **Tags:** atp.Splitkey=initValue
parameter	ParameterData Prototype	0..1	ref	The ParameterDataPrototype to which the Parameter ComSpec applies. **Stereotypes:** atpIdentityContributor

Table 4.89: ParameterProvideComSpec

[constr_1897] Existence of reference `ParameterProvideComSpec.parameter`

Imposition time: CP: `IT_CpgExe`

⌈For each `ParameterProvideComSpec`, the reference `parameter` shall exist.⌋

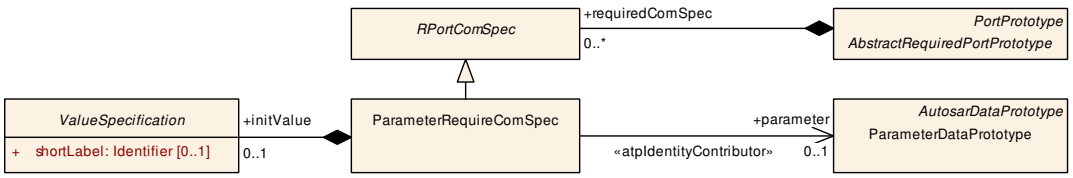

Figure 4.51: Communication attributes of `ParameterDataPrototype`s with respect to `RPortPrototype`

Class	ParameterRequireComSpec			
Note	"Communication" specification that applies to parameters on the required side of a connection.			
Base	*ARObject*, *RPortComSpec*			
Aggregated by	*AbstractRequiredPortPrototype*.requiredComSpec, PortPrototypeBlueprint.requiredComSpec			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
initValue	ValueSpecification	0..1	aggr	The initial value applicable for the corresponding ParameterDataPrototype. **Tags:** atp.Splitkey=initValue
parameter	ParameterData Prototype	0..1	ref	The ParameterDataPrototype to which the Parameter RequireComSpec applies. **Stereotypes:** atpIdentityContributor

Table 4.90: ParameterRequireComSpec

[constr_1898] Existence of reference `ParameterRequireComSpec.parameter`

Imposition time: CP: `IT_CpgExe`

⌈For each `ParameterRequireComSpec`, the reference `parameter` shall exist.⌋

4.6.5 Communication Specification for NV Data Communication

4.6.5.1 NV Require ComSpec

[TPS_SWCT_01227] Unconnected `AbstractRequiredPortPrototype` typed by `NvDataInterface` ⌈For this purpose it is possible to let the `AbstractRequiredPortPrototype` own an `NvRequireComSpec` that in turn owns a `ValueSpecification` in the role of `initValue`.

It is therefore possible to provide an `nvData` with a reasonable value even if the corresponding `AbstractRequiredPortPrototype` remains unconnected.⌋

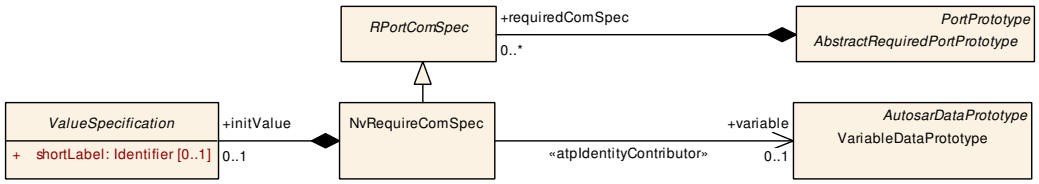

Figure 4.52: Communication attributes of a required `VariableDataPrototype`s used in the context of an `NvDataInterface`

[TPS_SWCT_01754] `initValue` defined in the context of a `ComSpec` ⌈Unless [TPS_SWCT_01755] applies, only the `initValue` defined in the context of a `NvRequireComSpec` is relevant for connections to the corresponding `PortPrototype`.

An `initValue` defined in the scope of a `VariableDataPrototype` shall be ignored anyway.⌋

[TPS_SWCT_01755] Duplicate existence of `initValue` in the context of a `PRPortPrototype` typed by an `NvDataInterface` ⌈If an `initValue` is defined in a `NvRequireComSpec` owned by a `PRPortPrototype`, its value shall be ignored.

Instead, the `initValue` shall be taken from the `NvProvideComSpec.ramBlockInitValue`.⌋

Class	**NvRequireComSpec**			
Note	Communication attributes of `RPortPrototype`s with respect to Nv data communication on the required side.			
Base	*ARObject*, *RPortComSpec*			
Aggregated by	*AbstractRequiredPortPrototype*.requiredComSpec, PortPrototypeBlueprint.requiredComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
initValue	ValueSpecification	0..1	aggr	The initial value owned by the NvComSpec **Tags:** atp.Splitkey=initValue
variable	VariableDataPrototype	0..1	ref	The VariableDataPrototype the ComSpec applies for. **Stereotypes:** atpIdentityContributor

Table 4.91: NvRequireComSpec

[constr_1899] Existence of reference `NvRequireComSpec.variable`

Imposition time: CP: `IT_CpgExe`

⌈For each `NvRequireComSpec`, the reference `variable` shall exist.⌋

4.6.5.2 NV Provide ComSpec

[TPS_SWCT_01228] `NvProvideComSpec` ⌈As communication with an `NvBlockSwComponentType` is in most cases bi-directional it is also necessary to consider role-specific communication attributes for `AbstractProvidedPortPrototype`s typed by an `NvDataInterface`. For this purpose the `NvProvideComSpec` is defined.

The main purpose of this kind of `ComSpec` is the definition of initial values for the `RAM Block` and the `ROM Block` that corresponds to an `nvData` defined in the context of the `NvDataInterface` used to type the given `AbstractProvidedPortPrototype`.⌋

More information about `NvProvideComSpec` please refer to Figure 4.53.

Note that these initial values can be taken as an input for designing an `NvBlockSwComponentType`, in particular the `ramBlock`s and `romBlock`s of `NvBlockDescriptor`s owned by the `NvBlockSwComponentType`. Further details are explained in Figure 11.5.

Also, note that the `romBlockInitValue` provided in the `NvProvideComSpec` does not necessarily have to be identical to the respective section within `romBlock` in the `NvBlockDescriptor`.

This could happen if an NvBlockSwComponentType is already existing and an ApplicationSwComponentType is connected to it. Finally, the romBlock inside the NvBlockDescriptor is the only relevant information for the RTE generation.

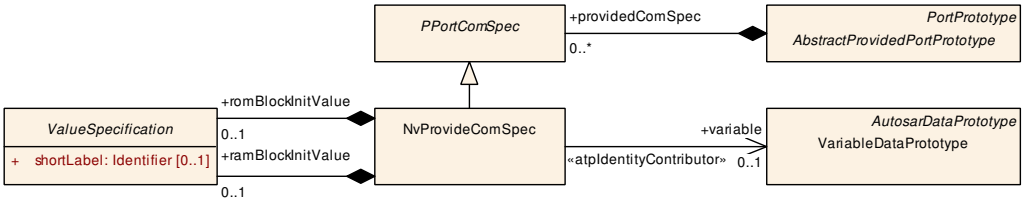

Figure 4.53: Communication attributes of a provided VariableDataPrototypes used in the context of an NvDataInterface

In other words, by means of the NvProvideComSpec the author of an ApplicationSwComponentType can express detailed requirements on the later design of a corresponding NvBlockSwComponentType.

Class	**NvProvideComSpec**			
Note	Communication attributes of PPortPrototypes with respect to Nv data communication on the provided side.			
Base	*ARObject*, *PPortComSpec*			
Aggregated by	*AbstractProvidedPortPrototype*.providedComSpec, PortPrototypeBlueprint.providedComSpec			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
ramBlockInit Value	ValueSpecification	0..1	aggr	This represents the initial value of the RAM Block that corresponds to the referenced variable. **Tags:** atp.Splitkey=ramBlockInitValue
romBlockInit Value	ValueSpecification	0..1	aggr	This represents the initial value of the ROM block that corresponds to the referenced variable. **Tags:** atp.Splitkey=romBlockInitValue
variable	VariableDataPrototype	0..1	ref	This represents the variable for which the ComSpec is specified. **Stereotypes:** atpIdentityContributor

Table 4.92: NvProvideComSpec

[constr_1900] Existence of reference NvProvideComSpec.variable

Imposition time: CP: IT_CpgExe

⌈For each NvProvideComSpec, the reference variable shall exist.⌋

4.6.6 Configuration of Data Transformation

The big picture of data transformation in AUTOSAR is explained in the [9, TPS System Template]. This chapter focuses on the aspects of data transformation that are related to the configuration of software-components.

Using the TransformationComSpecProps it is possible to define configuration options for specific transformers of inter-ECU communication which is subject to data transformation.

[TPS_SWCT_01594] Semantics of `TransformationComSpecProps` ⌈The definition of a `TransformationComSpecProps` can always be provided in the SWC description but the configuration shall **only** have an effect if

1. the actual communication involves at least two `EcuInstance`s
2. the respective data transformer (given by the used `TransformationComSpecProps`) is used during data transformation (see `DataTransformation`)

⌋

For clarification, the configuration given in `TransformationComSpecProps` will simply be ignored if the conditions defined by [TPS_SWCT_01594] do not apply.

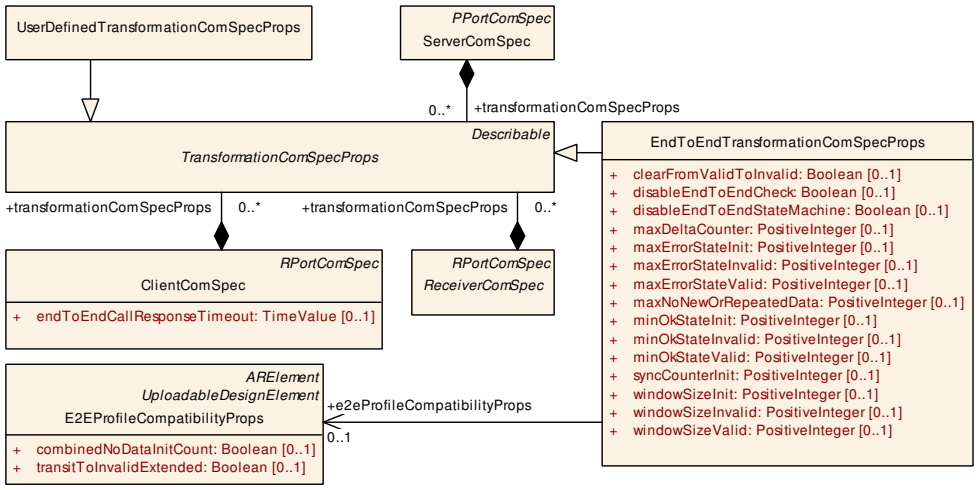

Figure 4.54: Specification of data transformation properties within `ReceiverComSpec`, `ServerComSpec`, and `ClientComSpec`

[TPS_SWCT_01597] `PortPrototype`-specific data transformation configuration ⌈Meta-class `TransformationComSpecProps` shall be used for the specification of `PortPrototype`-specific configuration options for data transformation of inter-ECU communication.⌋

Please note that only some transformers offer `PortPrototype`-specific configuration (e.g. SOME/IP transformer doesn't have `TransformationComSpecProps`).

Class	***TransformationComSpecProps*** (abstract)			
Note	`TransformationComSpecProps` holds all the attributes for transformers that are port specific.			
Base	*ARObject*, *Describable*			
Subclasses	EndToEndTransformationComSpecProps, UserDefinedTransformationComSpecProps			
Aggregated by	ClientComSpec.transformationComSpecProps, *ReceiverComSpec*.transformationComSpecProps, ServerComSpec.transformationComSpecProps			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 4.93: TransformationComSpecProps

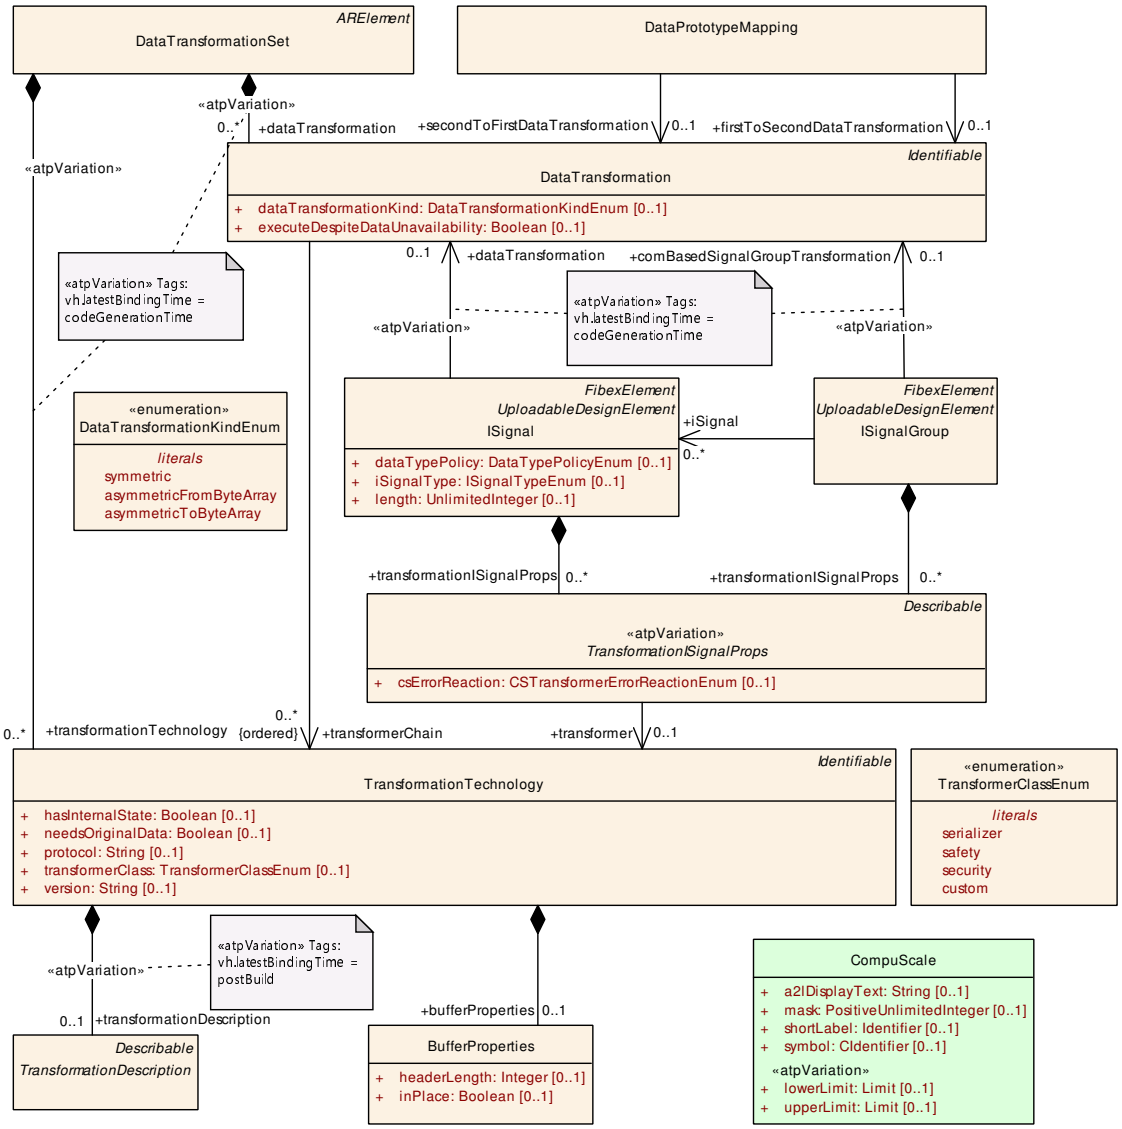

Figure 4.55: Big picture of data transformation in the AUTOSAR meta-model

It can be determined by the specific `TransformationComSpecProps` to which transformer this configuration is applicable:

- The configuration in `EndToEndTransformationComSpecProps` is applicable to E2E transformer (`protocol` of `TransformationTechnology` is set to `End-ToEnd`).
- The configuration in `UserDefinedTransformationComSpecProps` is applicable to a user-defined transformer.

[TPS_SWCT_01598] More than one user-defined transformer is used within one transformer chain ⌈If more than one user-defined transformer is used within one transformer chain (defined by meta-class `TransformationTechnology`), the `User-DefinedTransformationComSpecProps` shall be assigned to the correct user-defined custom transformer in `TransformationTechnology`.⌋

[constr_1400] Reference to a specific DataTransformation

Imposition time: CP: IT_RteGen

⌈A specific DataTransformation shall only be referenced by either

- a DataPrototypeMapping in the role firstToSecondData-Transformation (and potentially secondToFirstDataTransformation) **or**
- an ISignal in the role dataTransformation **or**
- an ISignalGroup in the role comBasedSignalGroupTransformation **or**
- a ClientServerOperationMapping in the role firstToSecondData-Transformation

⌋

[constr_1401] Restrictions on the relation between DataPrototypeMapping and DataTransformation

Imposition time: CP: IT_RteGen

⌈A VariableDataPrototype in the context of a PortPrototype shall **not** be referenced by a DataPrototypeMapping that references a DataTransformation while a DataMapping exists that points to this VariableDataPrototype (via the SystemSignal) that also refers to an ISignal that in turn references a Data-Transformation.⌋

In other words: a VariableDataPrototype can either become a part of a Data-PrototypeMapping-based data transformation or of an ISignal-based data transformation.

Please note that in a composite software structure the VariableDataPrototype can be delegated throughout the CompositionSwComponentType and [constr_1401] still applies.

Class	**TransformationTechnology**			
Note	A TransformationTechnology is a transformer inside a transformer chain. **Tags:** xml.namePlural=TRANSFORMATION-TECHNOLOGIES			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	DataTransformationSet.transformationTechnology			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
bufferProperties	BufferProperties	0..1	aggr	Aggregation of the mandatory BufferProperties. **Tags:** atp.Splitkey=bufferProperties
hasInternal State	Boolean	0..1	attr	This attribute defines whether the Transformer has an internal state or not.
needsOriginal Data	Boolean	0..1	attr	Specifies whether this transformer gets access to the SWC's original data.

▽

△

Class	**TransformationTechnology**			
protocol	String	0..1	attr	Specifies the protocol that is implemented by this transformer.
transformation Description	Transformation Description	0..1	aggr	A transformer can be configured with transformer specific parameters which are represented by the Transformer Description. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=transformationDescription, transformation Description.variationPoint.shortLabel vh.latestBindingTime=postBuild
transformer Class	TransformerClassEnum	0..1	attr	Specifies to which transformer class this transformer belongs.
version	String	0..1	attr	Version of the implemented protocol.

Table 4.94: TransformationTechnology

Class	**BufferProperties**			
Note	Configuration of the buffer properties the transformer needs to work.			
Base	*ARObject*			
Aggregated by	TransformationTechnology.bufferProperties			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
headerLength	Integer	0..1	attr	Defines the length of the header (in bits) this transformer will add in front of the data.
inPlace	Boolean	0..1	attr	If set, the transformer uses the input buffer as output buffer.

Table 4.95: BufferProperties

Class	***TransformationDescription*** (abstract)			
Note	The TransformationDescription is the abstract class that can be used by specific transformers to add transformer specific properties.			
Base	*ARObject*, *Describable*			
Subclasses	DdsTransformationDescription, EndToEndTransformationDescription, SOMEIPTransformation Description, UserDefinedTransformationDescription			
Aggregated by	TransformationTechnology.transformationDescription			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 4.96: TransformationDescription

Enumeration	**TransformerClassEnum**
Note	Specifies the transformer class of a transformer.
Aggregated by	TransformationTechnology.transformerClass
Literal	***Description***
custom	The transformer is a custom transformer. **Tags:** atp.EnumerationLiteralIndex=0
safety	The transformer is a safety transformer. **Tags:** atp.EnumerationLiteralIndex=1

▽

△

Enumeration	**TransformerClassEnum**
security	The transformer is a security transformer. **Tags:** atp.EnumerationLiteralIndex=2
serializer	The transformer is a serializing transformer. **Tags:** atp.EnumerationLiteralIndex=3

Table 4.97: TransformerClassEnum

Class	**UserDefinedTransformationComSpecProps**			
Note	The `UserDefinedTransformationComSpecProps` is used to specify port specific configuration properties for custom transformers.			
Base	*ARObject*, *Describable*, *TransformationComSpecProps*			
Aggregated by	ClientComSpec.transformationComSpecProps, *ReceiverComSpec*.transformationComSpecProps, ServerComSpec.transformationComSpecProps			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
–	–	–	–	–

Table 4.98: UserDefinedTransformationComSpecProps

Based on the user defined attributes inside `UserDefinedTransformationComSpecProps` (which are, of course, not standardized), the generator of the user-defined transformer shall determine to which user-defined transformer a `UserDefinedTransformationComSpecProps` belongs to.

[TPS_SWCT_01599] `PortPrototype`-specific configuration for custom transformers ⌈Meta-class `UserDefinedTransformationComSpecProps` shall be used for the specification of `PortPrototype`-specific configuration options for custom transformers.⌋

Please note that it is possible to add custom configuration items in `UserDefinedTransformationComSpecProps` by means of the attribute `adminData.sdg`.

Class	**EndToEndTransformationComSpecProps**			
Note	The class EndToEndTransformationIComSpecProps specifies port specific configuration properties for EndToEnd transformer attributes.			
Base	*ARObject*, *Describable*, *TransformationComSpecProps*			
Aggregated by	ClientComSpec.transformationComSpecProps, *ReceiverComSpec*.transformationComSpecProps, ServerComSpec.transformationComSpecProps			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
clearFromValid ToInvalid	Boolean	0..1	attr	Clear monitoring window on transition from state Valid to state Invalid.
disableEndTo EndCheck	Boolean	0..1	attr	Disables/Enables the E2E check. The E2Eheader is removed from the payload independent from the setting of this attribute.
disableEndTo EndState Machine	Boolean	0..1	attr	Disables the E2EStateMachine (only E2E check functionality is performed)

▽

△

Class	**EndToEndTransformationComSpecProps**			
e2eProfile Compatibility Props	E2EProfileCompatibility Props	0..1	ref	Reference to additional settings for the E2E state machine. **Tags:** atp.Splitkey=e2eProfileCompatibilityProps
maxDelta Counter	PositiveInteger	0..1	attr	Maximum allowed difference between two counter values of two consecutively received valid messages. For example, if the receiver gets data with counter 1 and Max DeltaCounter is 3, then at the next reception the receiver can accept Counters with values 2, 3 or 4.
maxErrorState Init	PositiveInteger	0..1	attr	Maximal number of checks in which ProfileStatus equal to E2E_P_ERROR was determined, within the last Window Size checks, for the state E2E_SM_INIT. The minimum value is 0.
maxErrorState Invalid	PositiveInteger	0..1	attr	Maximal number of checks in which ProfileStatus equal to E2E_P_ERROR was determined, within the last Window Size checks, for the state E2E_SM_INVALID. The minimum value is 0.
maxErrorState Valid	PositiveInteger	0..1	attr	Maximal number of checks in which ProfileStatus equal to E2E_P_ERROR was determined, within the last Window Size checks, for the state E2E_SM_VALID. The minimum value is 0.
maxNoNewOr RepeatedData	PositiveInteger	0..1	attr	EndToEndTransformationDescription holds these attributes which are profile specific and have the same value for all E2E transformers. This Attribute is only used by the AUTOSAR Classic Platform.
minOkStateInit	PositiveInteger	0..1	attr	Minimal number of checks in which ProfileStatus equal to E2E_P_OK was determined, within the last WindowSize checks, for the state E2E_SM_INIT. The minimum value is 1.
minOkState Invalid	PositiveInteger	0..1	attr	Minimal number of checks in which ProfileStatus equal to E2E_P_OK was determined, within the last WindowSize checks, for the state E2E_SM_INVALID. The minimum value is 1.
minOkState Valid	PositiveInteger	0..1	attr	Minimal number of checks in which ProfileStatus equal to E2E_P_OK was determined, within the last WindowSize checks, for the state E2E_SM_VALID. The minimum value is 1.
syncCounterInit	PositiveInteger	0..1	attr	EndToEndTransformationDescription holds these attributes which are profile specific and have the same value for all E2E transformers. This Attribute is only used by the AUTOSAR Classic Platform.
windowSizeInit	PositiveInteger	0..1	attr	Size of the monitoring window of state Init for the E2E state machine.
windowSize Invalid	PositiveInteger	0..1	attr	Size of the monitoring window of state Invalid for the E2E state machine.
windowSize Valid	PositiveInteger	0..1	attr	Size of the monitoring window of state Valid for the E2E state machine.

Table 4.99: EndToEndTransformationComSpecProps

Class	**E2EProfileCompatibilityProps**			
Note	This meta-class collects settings for configuration of the E2E state machine. **Tags:** atp.recommendedPackage=E2EProfileCompatibilityPropsCollection			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*, *UploadableDesignElement*, *UploadablePackageElement*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
combinedNo DataInitCount	Boolean	0..1	attr	E2E State machine behavior concerning counting of detected counter errors and missing messages in states NODATA and INIT • value = 0 (false) or not defined: counting of detected counter errors and missing messages in states NODATA and INIT are counted per state separated (Autosar R23-11 or former behavior) • value = 1 (true): counting of detected counter errors and missing messages in states NODATA and INIT are counted in total
transitToInvalid Extended	Boolean	0..1	attr	E2E State machine behavior concerning transition from NODATA/INIT to INVALID value=0 (false): no direct transition from NODATA to INVALID, no transition from INIT to INVALID due to counter-related faults (Autosar R19-11 or former behavior) value=1 (true): direct transition from NODATA to INVALID covered, transition from INIT to INVALID due to counter-related faults covered (state machine extended)

Table 4.100: E2EProfileCompatibilityProps

[TPS_SWCT_01600] `PortPrototype`-specific configuration for data transformers related to end-to-end protection ⌈Meta-class `EndToEndTransformationComSpecProps` shall be used for the specification of `PortPrototype`-specific configuration options for data transformers related to end-to-end protection.⌋

[TPS_SWCT_01812] Conditional relevance of attribute `EndToEndTransformationComSpecProps.disableEndToEndStateMachine` ⌈If `EndToEndTransformationComSpecProps.disableEndToEndCheck` is set to `true` then the value `EndToEndTransformationComSpecProps.disableEndToEndStateMachine` shall be ignored.⌋

[constr_5234] Existence of attribute `E2EProfileCompatibilityProps.transitToInvalidExtended` is mandatory for each `EndToEndTransformationComSpecProps`

Imposition time: CP: `IT_RteGen`

⌈For each `EndToEndTransformationComSpecProps`, a reference in the role `e2eProfileCompatibilityProps` to meta-class `E2EProfileCompatibilityProps` shall exist and the referenced `E2EProfileCompatibilityProps` shall define a value for the attribute `transitToInvalidExtended`.⌋

4.7 Port Groups within Software Component Types

[TPS_SWCT_01063] **PortGroup** ⌈A SwComponentType can declare that some of its PortPrototypes belong to a PortGroup.

Such a port group defines a logical grouping of PortPrototypes which is used as input to configure the implementation of mode managers in the basic software, for example, the communication of bus signals associated with the grouped ports may be suppressed in a certain mode.⌋

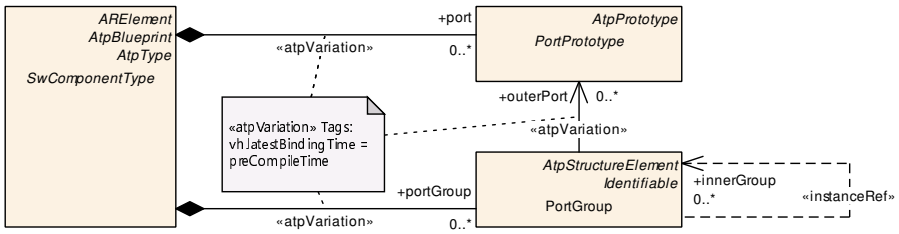

Figure 4.56: Declaration of PortGroups

[TPS_SWCT_01064] **PortGroups have to be defined on the VFB level** ⌈Although the declaration of PortGroups is not relevant for the RTE, they have to be defined on the VFB level, because they represent design decisions taken on this level.

Accordingly, PortGroups can be defined for CompositionSwComponentTypes as well as for AtomicSwComponentTypes.⌋

Class	**PortGroup**			
Note	Group of ports which share a common functionality. Example: need specific network resources. This information shall be available on the VFB level in order to delegate it properly via compositions. When propagated into the ECU extract, this information is used as input for the configuration of Services like the Communication Manager. A PortGroup is defined locally in a component (which can be a composition) and refers to the "outer" ports belonging to the group as well as to the "inner" groups which propagate this group into the components which are part of a composition. A PortGroup within an atomic SWC cannot be linked to inner groups.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, *SwComponentType*.portGroup			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
innerGroup	PortGroup	*	iref	Links a PortGroup in a composition to another PortGroup, that is defined in a component which is part of this CompositionSwComponentType. **Tags:** atp.Splitkey=innerGroup, innerGroup.context, innerGroup.target **InstanceRef implemented by:** InnerPortGroupInCompositionInstanceRef

▽

△

Class	**PortGroup**			
outerPort	PortPrototype	*	ref	Outer PortPrototype of this AtomicSwComponentType which belongs to the group. A port can belong to several groups or to no group at all. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=outerPort, outerPort.portPrototype, outer Port.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

Table 4.101: PortGroup

[TPS_SWCT_01065] `PortPrototype` may belong to more than one `PortGroup` ⌈A `PortPrototype` may belong to more than one `PortGroup` and `PortGroup`s can be associated with the "inner" `PortGroup`s of `SwComponentPrototype`s that are aggregated by the same `SwComponentType` as the `PortGroup`.

In this way, `PortGroup`s can be locally defined but still traced down the component hierarchy.⌋

[TPS_SWCT_01066] `PortGroup`s can be associated with certain `ServiceNeeds` ⌈`PortGroup`s can be associated with certain `ServiceNeeds` in order to trace the information down to the configuration of the basic software.⌋

For more details, see Chapter 7.11.2.

[constr_1147] Standardized values for the attribute `category` of meta-class `PortGroup`

Imposition time: CP: `IT_CompSwcT`

⌈

The following values of the attribute `category` of meta-class `PortGroup` are reserved by the AUTOSAR standard:

- `MODE_MANAGEMENT`: This represents the usage of the `PortGroup` for the purpose of mode management
- `PARTIAL_NETWORKING`: This represents the usage of the `PortGroup` for the purpose of partial networking

.⌋

4.8 Partial Networking

[TPS_SWCT_01169] Support for partial networking ⌈On the level of the Software Component Template, partial networking is supported by means of the concept of a "Virtual Function Cluster" (VFC).

The latter groups all communication on the VFB with respect to a given function. However, the conceptual idea of a Virtual Function Cluster is not represented in the metamodel as such.

Instead, PortGroups are used to specify the grouping of PortPrototypes to the higher conceptual level of a Virtual Function Cluster.⌋

Please note that more information regarding the semantics of PortGroups can be found in Chapter 4.7.

There are no restrictions regarding the structure of PortGroup definitions on M1. One PortPrototype may become a member of several PortGroups, thereby creating overlapping PortGroups.

[TPS_SWCT_01170] Purpose of Virtual Function Cluster ⌈The purpose of Virtual Function Cluster within the Software Component Template mainly has three aspects:

1. assign PortPrototypes (non service related) of Sender Receiver or Client Server communication to Virtual Function Clusters.
2. control the behavior of the corresponding function in terms of whether it is required at a given point in time. This aspect is implemented by the concept of a **control port**. Software components that implement control ports of a Virtual Function Cluster conceptually become **VFC Controllers**.
3. allow for the application software to retrieve the status of a given Virtual Function Cluster. This aspect is implemented by the concept of a **status port**.

⌋

The usage of the generic concept of PortGroups for the purpose of partial networks shall be indicated by setting the value of the attribute category of PortGroup to PARTIAL_NETWORKING, see [constr_1147].

4.8.1 VFC Control Ports

[TPS_SWCT_01171] Purpose of a control port ⌈The purpose of a control port is to request or release a VFC. Requesting means that the VFC is actively using communication resources while *release* boils down to the VFC being inactive, i.e. the corresponding partial network may be shut down until further notice.

As the requesting and releasing semantics is implemented by means of interfacing the BSW the corresponding control ports need to be typed by a PortInterface that has the attribute isService set to true.⌋

[TPS_SWCT_01172] Requesting and releasing partial networks ⌈For requesting and releasing partial networks, the BSW can be interfaced in two alternative (i.e. either one or the other) ways:

- **ComM**: ClientServerInterface using the standardized ComM_UserRequest.RequestComMode, as documented in the [18, SWS Com Manager].
- **BswM**: SenderReceiverInterface using the standardized AppModeRequestInterface.requestedMode, as documented in the [19, SWS BSW Mode Manager].

⌋

[TPS_SWCT_01173] Control port shall not become a part of the PortGroup ⌈Please note that the control port shall **not** become a part of the PortGroup that defines the particular VFC the control port is going to service.

The relationship is implemented by means of a specific SwcServiceDependency that owns a RoleBasedPortAssignment to the intended control port **and** refers to a PortGroup (that comprises the VFC) in the role representedPortGroup.⌋

For further information, please refer to [TPS_SWCT_01126].

4.8.2 VFC Status Ports

[TPS_SWCT_01175] Actively query the status of a partial network ⌈Very much like mode management, the concept of partial networking supports the ability to actively query the status of a partial network.

This can be done by means of interfacing the BSW in three alternative (as in "one of") ways:

- **ComM**: ClientServerInterface using the standardized ComM_UserRequest.GetCurrentComMode, as documented in the [18, SWS Com Manager].
- **ComM**: ModeSwitchInterface using the standardized ComM_CurrentMode.currentMode, as documented in the [18, SWS Com Manager].
- **BswM**: ModeSwitchInterface using the standardized AppModeInterface.currentMode, as documented in the [19, SWS BSW Mode Manager].

⌋

As mentioned above, the status of the ComM can be retrieved by either a ClientServerInterface or a SenderReceiverInterface. Which of the two alternatives applies in a specific case is up to the author of a software component[12].

When using one of the possible SenderReceiverInterfaces, the correspondence of the status port concept with mode management extends to the point that the status of the partial network is returned as an actual ModeDeclaration.

[12]The usage of the ClientServerInterface effectively implements a "pull" approach for the mode information while the usage of the SenderReceiverInterface resembles a "push" approach if it is used in combination with a SwcModeSwitchEvent.

This implies that all mechanisms foreseen by the Software Component Template to react on mode changes are in place and can be used within the application software.

To assure that the communication via PortPrototypes that belong to a partial network is valid the software component shall consider the status of the partial network before communicating in order to assert its activity.

[TPS_SWCT_01174] Status port shall not become a member of the PortGroup ⌈A status port shall **not** become a member of the PortGroup that corresponds to the partial network subject to the status port.

The relationship is implemented by means of a specific SwcServiceDependency that owns a RoleBasedPortAssignment to the intended status port **and** refers to a PortGroup (that comprises the VFC) in the role representedPortGroup.⌋

For further information, please refer to [TPS_SWCT_01126].

4.9 Formal Definition of implicit Communication Behavior

[TPS_SWCT_01509] Implicit communication behavior ⌈The purpose of the formal definition of the behavior of a SwComponentType with respect to the *implicit* communication can be conceptually condensed to two basic aspects:

- **Stable** data during the execution of a group of RunnableEntitys. This means that all data values read by different RunnableEntitys are of the same age. Therefore, the values do not change during the execution of the chain of RunnableEntitys.
- **Coherent** data consumption and propagation for a group of DataPrototypes. This means that a set of interdependent data values are from the same calculation iteration. Therefore, the set of values has to be propagated at once to RunnableEntitys requiring the complete result of the calculation. RunnableEntitys that are part of the calculation chain may still consume partly updated values.

⌋

[TPS_SWCT_01481] The meaning of the term *stability* with respect to ConsistencyNeeds ⌈The meaning of the term *stability* is that the values of a group of VariableDataPrototypes shall not change during the execution of a group of RunnableEntitys.⌋

[TPS_SWCT_01482] The meaning of the term *coherence* with respect to ConsistencyNeeds ⌈The meaning of the term *coherence* is that the values of a group of VariableDataPrototypes shall not be read by receiving RunnableEntitys until all the producing RunnableEntitys are terminated.⌋

In response to these goals, the meta-model provides means to express the correlation between a group of RunnableEntitys and a group of DataPrototypes. These groups might be defined **hierarchically**.

The information (in terms of ConsistencyNeeds) can be defined primarily during the design of an AtomicSwComponentType, but it is just as well possible to specify this ConsistencyNeeds during the definition of CompositionSwComponentTypes.

For example, the existence of stable data is typically expected for the execution of RunnableEntitys of several AtomicSwComponentTypes.

Please note that the two aspects *stability* and *coherence* are not necessarily connected to each other. It is possible to require *stability* without *coherence* and vice versa. For this purpose the roles dpgDoesNotRequireCoherency and regDoesNotRequireStability are needed.

[TPS_SWCT_01480] *Stability* and/or *coherence* is not required ⌈In order to clearly separate the aspect of *stability* from *coherence*, the roles dpgDoesNotRequireCoherency to express that a group of VariableDataPrototypes explicitly does not require *consistency*.

Likewise, regDoesNotRequireStability can be used to express that, for a group of RunnableEntitys, *stability* with respect to data access is not required.⌋

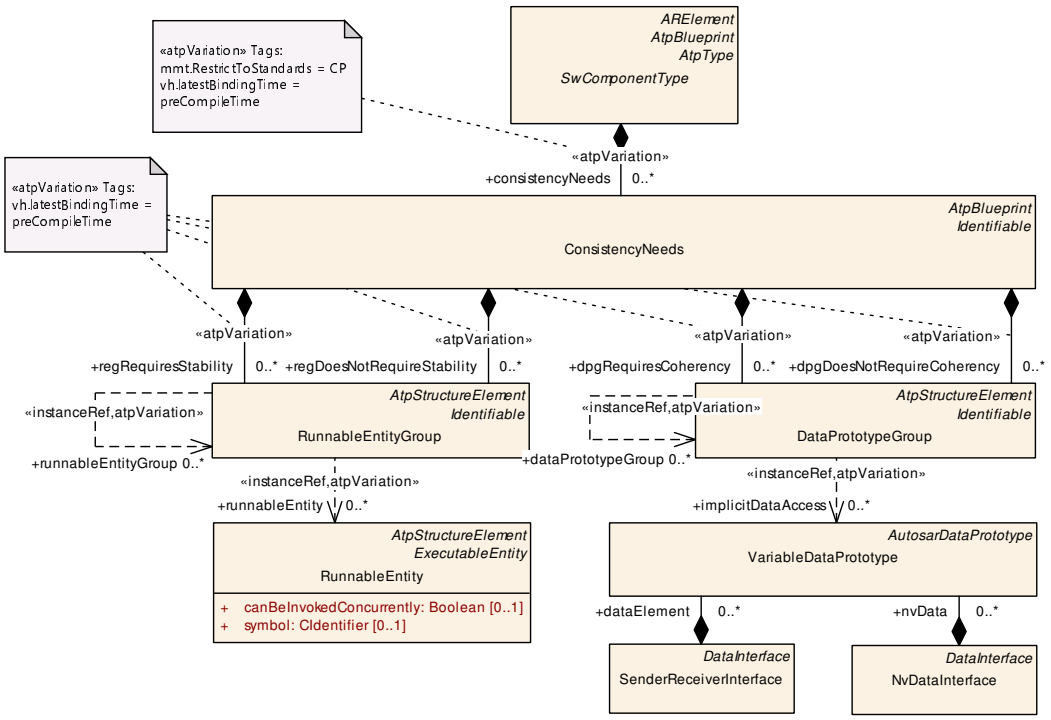

Figure 4.57: Formal definition of implicit communication behavior

[TPS_SWCT_01479] Applicability of ConsistencyNeeds ⌈ConsistencyNeeds can only be applied to RunnableEntitys that make use of “implicit” communication.⌋

[TPS_SWCT_01466] ConsistencyNeeds applied on RunnableEntitys that do not use implicit communication ⌈If a ConsistencyNeeds is applied on RunnableEntitys that do not use implicit communication, it shall be ignored.⌋

The formal definition of the implicit communication behavior foresees the grouping of model elements in order to indicate their relevance for consistent implicit communication.

[TPS_SWCT_01470] RunnableEntityGroup ⌈A RunnableEntity belongs to a specific RunnableEntityGroup if it is associated either directly with the given RunnableEntityGroup or if the RunnableEntityGroup to which the RunnableEntity belongs is eventually (there can be more than one nesting level) referenced by the given RunnableEntityGroup.⌋

[TPS_SWCT_01471] DataPrototypeGroup ⌈A VariableDataPrototype belongs to a specific DataPrototypeGroup if it is associated either directly with the given DataPrototypeGroup or if the DataPrototypeGroup to which the VariableDataPrototype belongs is eventually (there can be more than one nesting level) referenced by the given DataPrototypeGroup.⌋

[constr_1231] ConsistencyNeeds aggregated by CompositionSwComponentType

Imposition time: CP: IT_CompSwcT

⌈If ConsistencyNeeds are aggregated by a CompositionSwComponentType the associations stereotyped ≪instanceRef≫ may only refer to context and target elements within the context of this CompositionSwComponentType.⌋

For clarification, [constr_1231] includes VariableDataPrototypes owned by delegation PortPrototypes of the owning CompositionSwComponentType, VariableDataPrototypes in delegation PortPrototypes of CompositionSwComponentType instantiated in the enclosing CompositionSwComponentType, or VariableDataPrototypes in PortPrototypes owned by AtomicSwComponentTypes instantiated inside the context of the enclosing CompositionSwComponentType.

[constr_1232] ConsistencyNeeds aggregated by AtomicSwComponentType

Imposition time: CP: IT_CpgExe

⌈If ConsistencyNeeds are aggregated by a AtomicSwComponentType the associations stereotyped ≪instanceRef≫ may only refer to context and target elements within the context of this AtomicSwComponentType.⌋

Strictly speaking, these are the RunnableEntitys and PortPrototypes of this particular AtomicSwComponentType, or the RunnableEntityGroups and DataPrototypeGroups that are owned by the same AtomicSwComponentType.

Please note that pre-defined values for the category of RunnableEntityGroup and DataPrototypeGroup are described in the [1, TPS Standardization Template].

Class	ConsistencyNeeds			
Note	This meta-class represents the ability to define requirements on the implicit communication behavior.			
Base	*ARObject*, *AtpBlueprint*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ConsistencyNeedsBlueprintSet.consistencyNeeds, *SwComponentType*.consistencyNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
dpgDoesNot Require Coherency	DataPrototypeGroup	*	aggr	This group of VariableDataPrototypes does not require coherency with respect to the implicit communication behavior. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dpgDoesNotRequireCoherency, dpgDoes NotRequireCoherency.shortName, dpgDoesNotRequire Coherency.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
dpgRequires Coherency	DataPrototypeGroup	*	aggr	This group of VariableDataPrototypes requires coherency with respect to the implicit communication behavior, i.e. all read and write access to VariableDataPrototypes in the DataPrototypeGroup by the RunnableEntitys of the RunnableEntityGroup need to be handled in a coherent manner. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dpgRequiresCoherency, dpgRequires Coherency.shortName, dpgRequiresCoherency.variation Point.shortLabel vh.latestBindingTime=preCompileTime
regDoesNot RequireStability	RunnableEntityGroup	*	aggr	This group of RunnableEntities does not require stability with respect to the implicit communication behavior. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=regDoesNotRequireStability, regDoesNot RequireStability.shortName, regDoesNotRequire Stability.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
regRequires Stability	RunnableEntityGroup	*	aggr	This group of RunnableEntities requires stability with respect to the implicit communication behavior, i.e. all read and write access to VariableDataPrototypes in the DataPrototypeGroup by the RunnableEntitys of the RunnableEntityGroup need to be handled in a stable manner. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=regRequiresStability, regRequires Stability.shortName, regRequiresStability.variation Point.shortLabel vh.latestBindingTime=preCompileTime

Table 4.102: ConsistencyNeeds

Class	RunnableEntityGroup			
Note	This meta-class represents the ability to define a collection of RunnableEntities. The collection can be nested.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, ConsistencyNeeds.regDoesNotRequireStability, ConsistencyNeeds.reg RequiresStability			
Attribute	**Type**	**Mult.**	**Kind**	**Note**

▽

△

Class	**RunnableEntityGroup**			
runnableEntity	RunnableEntity	*	iref	This represents a collection of RunnableEntitys that belong to the enclosing RunnableEntityGroup. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=runnableEntity, runnableEntity.contextSw ComponentPrototype, runnableEntity.targetRunnable Entity, runnableEntity.variationPoint.shortLabel vh.latestBindingTime=preCompileTime **InstanceRef implemented by:** RunnableEntityIn CompositionInstanceRef
runnableEntity Group	RunnableEntityGroup	*	iref	This represents the ability to define nested groups of RunnableEntitys. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=runnableEntityGroup, runnableEntity Group.contextSwComponentPrototype, runnableEntity Group.targetRunnableEntityGroup, runnableEntity Group.variationPoint.shortLabel vh.latestBindingTime=preCompileTime **InstanceRef implemented by:** InnerRunnableEntity GroupInCompositionInstanceRef

Table 4.103: RunnableEntityGroup

Class	**DataPrototypeGroup**			
Note	This meta-class represents the ability to define a collection of DataPrototypes that are subject to the formal definition of implicit communication behavior. The definition of the collection can be nested.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, ConsistencyNeeds.dpgDoesNotRequireCoherency, ConsistencyNeeds.dpg RequiresCoherency			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataPrototype Group	DataPrototypeGroup	*	iref	This represents the ability to define nested groups of VariableDataPrototypes. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dataPrototypeGroup, dataPrototype Group.contextSwComponentPrototype, dataPrototype Group.targetDataPrototypeGroup, dataPrototype Group.variationPoint.shortLabel vh.latestBindingTime=preCompileTime **InstanceRef implemented by:** InnerDataPrototype GroupInCompositionInstanceRef
implicitData Access	VariableDataPrototype	*	iref	This represents a collection of VariableDataPrototypes that belong to the enclosing DataPrototypeGroup **Stereotypes:** atpVariation **Tags:** atp.Splitkey=implicitDataAccess, implicitData Access.contextSwComponentPrototype, implicitData Access.contextPortPrototype, implicitDataAccess.target VariableDataPrototype, implicitDataAccess.variation Point.shortLabel vh.latestBindingTime=preCompileTime **InstanceRef implemented by:** VariableDataPrototypeIn CompositionInstanceRef

Table 4.104: DataPrototypeGroup

4.9.1 Consistency Needs on Receiver Side

[TPS_SWCT_01472] Receiving SwComponentType owns a DataPrototypeGroup in the role dpgRequiresCoherency ⌈If a receiving SwComponentType owns a DataPrototypeGroup in the role dpgRequiresCoherency for one or several of its RunnableEntitys it is required that VariableDataPrototypes belonging to the same DataPrototypeGroup are produced coherently. This means that the values of the VariableDataPrototypes shall be of the same age.⌋

[TPS_SWCT_01473] Receiving SwComponentType owns a RunnableEntityGroup in the role regRequiresStability ⌈If a receiving SwComponentType owns a RunnableEntityGroup in the role regRequiresStability for one or several of its RunnableEntitys it is required that the values of implicitly communicated VariableDataPrototypes are kept stable over the execution of all RunnableEntitys belonging to the given RunnableEntityGroup.⌋

[TPS_SWCT_01474] Receiving SwComponentType owns a RunnableEntityGroup in the role regRequiresStability and also owns one or several DataPrototypeGroups in the role dpgRequiresCoherency ⌈If a receiving SwComponentType owns a RunnableEntityGroup in the role regRequiresStability and also owns one or several DataPrototypeGroups in the role dpgRequiresCoherency it is required that values of VariableDataPrototypes belonging to the same DataPrototypeGroup are produced coherently.

This means that the values of the VariableDataPrototypes shall be of the same age **and** shall be kept stable over the execution of all RunnableEntitys belonging to the given RunnableEntityGroup.⌋

4.9.2 Consistency Needs on Sender Side

[TPS_SWCT_01475] Sending SwComponentType owns a DataPrototypeGroup in the role dpgRequiresCoherency ⌈If a sending SwComponentType owns a DataPrototypeGroup in the role dpgRequiresCoherency for one or several of its RunnableEntitys it is required that VariableDataPrototypes belonging to the same DataPrototypeGroup are propagated at the same point in time to RunnableEntitys which do not belong to the group of **producing** RunnableEntitys (which may, but do not have to, be formally described as a RunnableEntityGroup).⌋

The coherence is created at the point in time when the RunnableEntitys of the producing group of RunnableEntitys terminate (and the implicit data are updated).

If those RunnableEntitys also read the data, those read accesses do not read the coherent values but the intermediary values written by RunnableEntitys of the same group.

For all other RunnableEntitys that are not members of the producing group of RunnableEntitys, it appears as if the data had been updated at this very point coherently.

In order to avoid incorrect configurations, it is possible to explicitly define the group of RunnableEntitys for which the coherency does not apply.

[TPS_SWCT_01625] Sending SwComponentType owns a DataPrototypeGroup in the role dpgRequiresCoherency and also RunnableEntityGroups ⌈If a sending SwComponentType owns a DataPrototypeGroup in the role dpgRequiresCoherency, RunnableEntityGroups in the role regDoesNotRequireStability may exist.

Read accesses from RunnableEntitys in those RunnableEntityGroups will not read the coherent values but the intermediary values written by RunnableEntitys of the same group.⌋

4.9.3 Consistency Needs for Senders and Receivers of the Same Data inside a RunnableEntityGroup

[TPS_SWCT_01476] Sender and receiver of the same implicitly communicated VariableDataPrototypes are associated with the same RunnableEntityGroup ⌈In the case where sender and receiver of the same implicitly communicated VariableDataPrototypes are associated with the same RunnableEntityGroup, [TPS_SWCT_01472], [TPS_SWCT_01473], [TPS_SWCT_01475] as well as [TPS_SWCT_01475] apply with the exception that updates of the values of implicitly communicated VariableDataPrototypes inside the given RunnableEntityGroup become visible **immediately** after the producing RunnableEntity was terminated.⌋

5 Data Description

5.1 Introduction

In the context of defining data types and prototypes, the AUTOSAR concept distinguishes between three different levels of abstraction as depicted in [TPS_SWCT_01229].

[TPS_SWCT_01229] Three different levels of abstraction regarding the definition of data types ⌈

Application Data Level
Implementation Data Level
Supplemental Base Type Level

⌋

[TPS_SWCT_01230] Application Data Level ⌈The ***Application Data Level*** is the common level at which `ApplicationSwComponentType`s specify a data type or prototype.

This level allows one to define all the data attributes that are needed from the application point of view. These attributes are required to exchange data between software components, or between a software component and a measurement and calibration tool. It is possible to specify data communication of a complete `Virtual Functional Bus` based on this level only.

This level includes, among other things, the numerical range of values, the data structure as well as the physical semantics.

Data semantics (e.g. physical units) are not in the focus for the RTE[1] in order to make communication technically possible.

However, it is important for a unique interpretation of data in the application software and in measurement and calibration systems.⌋

Please note that `ApplicationDataType`s – by virtue of being platform-independent by definition – do not become visible as data types in the code implementation of software components.

In a former version of this specification, this level was not clearly separated from the implementation level. These had the following drawbacks, which have now been resolved:

- The model of primitive types (like integer, boolean, real, opaque) was anticipating implementation aspects already on a very high level of design.

[1] There are some aspects that affect the RTE, e.g. scaling of `dataElement`s.

- The data type model used within ports, focusing on communication via the RTE, was not sufficient to model all type aspects of variables and parameters that are visible within an AUTOSAR system for purposes other than RTE communication, namely NvM-data access, calibration, measurement, diagnostics, and BSW-module interfaces. Using a uniform type system covering all these aspects is now favored.
- Calibration parameters were not completely incorporated into the data type concept. Some of their attributes (especially for curves and maps) could be specified only on the level of prototypes or were not completely formalized within AUTOSAR (such as `SwRecordLayout`).
- The data type system was not compatible with the usage in calibration standards such as ASAM-MCD (namely the usage of `category`s).
- Adding implementation-specific elements, such as a base type, was not possible without formally changing the data type used in a VFB design. A mapping mechanism that could be used in later project phases and is common in other parts of AUTOSAR (e.g. for mapping components to ECUs) was missing.
- The RTE Specification contained many default rules and assumptions on how to implement certain data types or prototypes in C. With a more formal description of all relevant implementation aspects, the generation of C interfaces is better determined. However, these aspects should be separated from the application level design.
- Since there could be many data types on the application level in a big system, the probability of name clashes in the interfaces to the RTE was rather high. Using a separate set of types to implement the RTE interfaces solves this issue.

[TPS_SWCT_01231] Application level may impose strong requirements on the design of the corresponding implementation level ⌈It should be pointed out that with the specification of computation methods and record layouts, the application level imposes strong requirements on the design of the corresponding implementation level. It might even be the case that, when anticipating different implementations, these elements might be chosen differently.

This is due to the nature of these elements that form a bridge from the physical world to the numerical representation (and vice versa). Nonetheless, we consider the specification of these elements as belonging to the application level.

On the one hand, this information is required by MCD-tools and thus shall be part of a rather high-level design. On the other hand, this approach will allow the use of a limited set of implementation data types.⌋

Further information about the compatibility requirements between application level and implementation level can be found in Chapter 6.2.5.

[TPS_SWCT_01232] Implementation Data Level ⌈The ***Implementation Data Level*** is closer to the actual code implementation in a programming language like C, though it is still an abstraction of the code.

Its values correspond to the actual binary numbers handled by the programming language on the CPU. It contains concepts like pointers and unions which relate to the organization of data in memory and are not relevant for the application level.

This level also defines structure, but it can be more granular. For example, the application level may define a text to be transferred to an instrument cluster as a primitive type (if the structure is not relevant for the application), whereas on the implementation level it could be modeled as an array of bytes.⌋

[TPS_SWCT_01233] Use case for the Implementation Data Level ⌈There are several use cases for this level in AUTOSAR:

- First, the *Implementation Data* level can be used in the description of interfaces and data (e.g. debug data) within the basic software, as documented in the [6, TPS BSW Module Description Template] for more details on these use cases.
- `ImplementationDataType`s should also be used to describe the interfaces of libraries which operate on a purely numerical level.
- *Implementation Data* is also used for the description of interfaces between software components and the basic software (namely AUTOSAR Services), because these typically cover implementation aspects only.
- It is possible to define communication in a VFB system directly on this level if the physical and semantic abstraction is not of interest.
- Last but not least, the input for the RTE generator is defined by data descriptions at this level. This means that if a software component defines its data only on application level, a corresponding set of implementation data types shall be created (or generated) as part of the ECU extract before the RTE can be generated.

⌋

[TPS_SWCT_01234] Base Type Level ⌈The ***Base Type Level*** is used to contribute "low-level" aspects in terms of bits and bytes from which the implementation data is built up. It is considered as a separate level in order to allow for reuse of the basic types defined on this level.

These base types still do not completely determine the actual implementation in a programming language, but they impose strong restrictions on this as they define, for example, the number of bits and bytes to be used, as well as the byte order and the encoding of primitive "leaf" objects.

The base type layer does not represent a "standalone" way to define a data type in AUTOSAR. A `DataPrototype` may be typed by an `AutosarDataType`, i.e. either an `ApplicationDataType` or an `AbstractImplementationDataType`. There is no option to use the base type level exclusively to type a `DataPrototype`.⌋

[TPS_SWCT_01235] Mapping of data defined on the *Application* level to the *Implementation* and *Base Type* level ⌈It is important to understand that the mapping of data defined on the *Application* level to the *Implementation* and *Base Type* level depends on the medium on which the data is transported.

For example, if a physical value can be expressed with sufficient accuracy and range by a 16-bit unsigned integer, it still might look very different when sent over CAN, when seen by a software component on a *big-endian* 32-bit machine or when seen by a software component on a *little-endian* 16-bit processor.

Conversion between several data implementations of the same application data type might be necessary in the case of communication between components on different ECUs. [20, SWS COM] is responsible for this.

It implies that the configuration depends on the definition of the data that are transmitted between components[2].⌋

AUTOSAR COM might need to convert a 16-bit integer between *little-endian* and *big-endian* representations, whereas an array of 16 bytes does not need to be swapped even if the endianness changes. In the case of intra-ECU communication, byte order conversion is not necessary since the software components reside on the same machine.

[TPS_SWCT_01236] Big picture of data types ⌈Another way of approaching the concept of data types in AUTOSAR (especially with respect to the question of what "kind" of data type is related to which modeling meta-level) is to sketch the following "big picture" of data types:

ApplicationDataType Defined on **M2** - provides the meta-model for data types on application level. It covers the application-relevant aspects of a data type.

An `ApplicationDataType` shall finally be mapped to an `ImplementationDataType`.

ImplementationDataType Defined on **M2** - provides the meta-model for data types on implementation level. With respect to C source code, an `ImplementationDataType` finally boils down to a `typedef`.

BaseType Defined on **M2** - provides the platform-dependent part of an `ImplementationDataType`. The dependency on the platform covers the following aspects:

- Definition on the level of the C language - using `nativeDeclaration`
- Technical representation on the target platform (byte order, alignment, encoding) as required for the support of MCD systems.
- The modeling of this level based on `SwBaseType` is not restricted to the definition of data types in the software domain. It is used in several different

[2]More precisely, the data shall be converted to and from a so-called `SystemSignal`.

contexts in AUTOSAR whenever exact knowledge of the bits and bytes is required.

Platform Data Type Defined on **M1** - provided by AUTOSAR. Platform types shall be available on each platform on which an AUTOSAR-System can run.

The name of the `Platform Data Type` and the properties with respect to the interface between modules / components is the same on every platform.

The particular representation varies from platform to platform.

`Platform Data Type`s shall be **modeled** using `ImplementationDataType`s.

Note that in AUTOSAR R3.x the platform types are implemented manually and could not even be expressed in the ARXML model (see [SRS_Rte_00150]). In AUTOSAR R4.1 the `Platform Data Type`s can be represented in the ARXML model. Subsequent releases of AUTOSAR may generate the `Platform Data Type`s directly from the ARXML model.

Standard Type Defined on **M1** - provided by AUTOSAR. Standard types are defined by referring to platform types.

⌋

[TPS_SWCT_01237] **`SwDataDefProps`** ⌈The properties of data are summarized in the meta-class `SwDataDefProps`. This meta-class itself is the superset of all applicable properties.⌋

Subsets of `SwDataDefProps` are applicable in specific cases. For a summary, please refer to the following overview:

- The data `category`s are summarized in [constr_1006].
- Properties for `ApplicationDataType`s are summarized in [constr_1007].
- Properties for `ImplementationDataType`s are summarized in [constr_1009].
- Properties for `DataPrototype`s typed by `ApplicationDataType`s are summarized in [constr_1289].
- Properties for `DataPrototype`s typed by `ImplementationDataType`s are summarized in [constr_1288].
- Applicability of `SwDataDefProps` is summarized in [constr_1015].

5.2 Data Types

5.2.1 Overview

As explained in Chapter 5.1, it is possible to describe data provided by a software component from the application as well as from the implementation point of view.

[TPS_SWCT_01072] **`ApplicationDataType` and `ImplementationDataType`** ⌈The common concept behind this is expressed by the abstract meta-class `AutosarDataType`, from which an `ApplicationDataType` and an `ImplementationDataType` are derived.⌋

[TPS_SWCT_01073] **Composite `ApplicationDataType`** ⌈An `ApplicationDataType` can be composed (in the form of a record or an array) of elements which themselves are typed by another `ApplicationDataType`.⌋

[TPS_SWCT_01074] **Composite `ImplementationDataType`** ⌈An `ImplementationDataType` can also be composed of elements, but in this case no type/prototype concept (see the [10, TPS Generic Structure Template]) has been applied. Both concepts will be explained in the following chapters in more detail.⌋

Figure 5.1 shows a summary of the basic meta-classes used for the definition of `AutosarDataType`s.

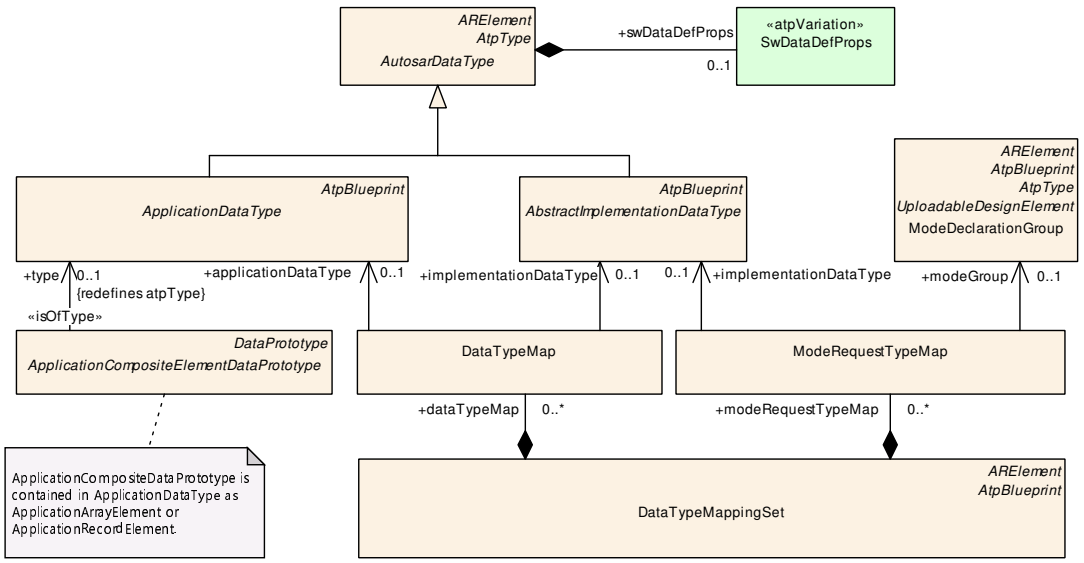

Figure 5.1: Summary of `AutosarDataType`

Class	***AutosarDataType*** (abstract)
Note	Abstract base class for user defined AUTOSAR data types for software.
Base	*ARElement*, *ARObject*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *Multilanguage Referrable*, *PackageableElement*, *Referrable*
Subclasses	*AbstractImplementationDataType*, *ApplicationDataType*

△

Class	*AutosarDataType* (abstract)			
Aggregated by	ARPackage.element			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
swDataDef Props	SwDataDefProps	0..1	aggr	The properties of this AutosarDataType. **Tags:** atp.Splitkey=swDataDefProps

Table 5.1: AutosarDataType

Class	*ApplicationDataType* (abstract)			
Note	`ApplicationDataType` defines a data type from the application point of view. Especially it should be used whenever something "physical" is at stake. An `ApplicationDataType` represents a set of values as seen in the application model, such as measurement units. It does not consider implementation details such as bit-size, endianess, etc. It should be possible to model the application level aspects of a VFB system by using `ApplicationDataType`s only.			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *AutosarDataType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Subclasses	*ApplicationCompositeDataType*, ApplicationPrimitiveDataType			
Aggregated by	ARPackage.element			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
–	–	–	–	–

Table 5.2: ApplicationDataType

5.2.2 Data Type Mapping

5.2.2.1 Overview

As explained above, the concept of application data types as well as that of implementation data types can be used to instantiate a data prototype in an M1 model. However, there are use cases, especially in order to generate the RTE contract for `ApplicationSwComponentType`s, where it is required to consider both levels for one given data prototype.

[TPS_SWCT_01189] **`DataTypeMap`** ⌈This is supported by the meta-class `DataTypeMap` by which an `ApplicationDataType` and an `ImplementationDataType` can be mapped to each other in order to describe both aspects of one `dataElement`.⌋

Class	**DataTypeMap**			
Note	This class represents the relationship between `ApplicationDataType` and its implementing `AbstractImplementationDataType`.			
Base	*ARObject*			
Aggregated by	DataTypeMappingSet.dataTypeMap			
Attribute	*Type*	*Mult.*	*Kind*	*Note*

▽

△

Class	DataTypeMap			
applicationDataType	ApplicationDataType	0..1	ref	This is the corresponding ApplicationDataType **Tags:** atp.Splitkey=applicationDataType
implementationDataType	AbstractImplementationDataType	0..1	ref	This is the corresponding AbstractImplementationDataType. **Tags:** atp.Splitkey=implementationDataType

Table 5.3: DataTypeMap

If, for example, a dataElement in a SenderReceiverInterface is typed by an ApplicationDataType, it shall additionally be associated to an ImplementationDataType in order to be able to generate the RTE.

[constr_1903] Existence of reference DataTypeMap.applicationDataType

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each DataTypeMap, reference applicationDataType shall exist.⌋

[constr_1904] Existence of reference DataTypeMap.implementationDataType

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each DataTypeMap, reference implementationDataType shall exist.⌋

[TPS_SWCT_01190] **ModeRequestTypeMap** ⌈Another mapping class, ModeRequestTypeMap, has been introduced in order to allow the transport of mode related information via “normal” sender-receiver communication. Apart from this, mode information is not handled by the usual type system but needs special meta-classes.⌋

This aspect is explained in more detail in Chapter 4.3.4.

Note that the mapping classes, instead of direct associations, have been introduced for process reasons: This allows maintaining application and implementation types in separate M1 artifacts without direct links.

For example, if a software component is moved to another hardware platform, the mapping between application and implementation types might be changed in the scope of the specific component without changing the overall VFB model.

[TPS_SWCT_01191] mapped ApplicationDataType and ImplementationDataType shall be compatible ⌈In order to set up a valid DataTypeMap between an ApplicationDataType and an ImplementationDataType the two types shall be compatible.

Of course, if ImplementationDataTypes are generated from existing ApplicationDataTypes, it is expected that they will be automatically compatible.⌋

Please note that the compatibility between an ApplicationDataType and an ImplementationDataType mapped onto each other is clarified in Chapter 6.2.5.

Furthermore, the various mappings are aggregated in a container DataTypeMappingSet for easier maintenance in artifacts.

Note that the meta-classes AutosarDataType, ModeDeclarationGroup and DataTypeMappingSet are derived from ARElement. This means that these and the meta-classes derived from them can be declared on the M1 level as part of an ARPackage and thus can be used in some Software Component or Basic Software Module Descriptions.

Class	**DataTypeMappingSet**			
Note	This class represents a list of mappings between ApplicationDataTypes and ImplementationDataTypes. In addition, it can contain mappings between ImplementationDataTypes and ModeDeclarationGroups. **Tags:** atp.recommendedPackage=DataTypeMappingSets			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataTypeMap	DataTypeMap	*	aggr	This is one particular association between an ApplicationDataType and its AbstractImplementationDataType. **Tags:** atp.Splitkey=dataTypeMap
modeRequest TypeMap	ModeRequestTypeMap	*	aggr	This is one particular association between an ModeDeclarationGroup and its AbstractImplementationDataType. **Tags:** atp.Splitkey=modeRequestTypeMap

Table 5.4: DataTypeMappingSet

How to organize DataTypeMappingSets for a software system, for example whether there is a separate mapping set for each ECU or even for each software component, is considered project specific. However, the RTE generator needs a well-defined DataTypeMappingSet as input in relation to those artifacts which might define data typed as ApplicationDataTypes.

[TPS_SWCT_01192] Meta-classes that have an association to a DataTypeMappingSet ⌈Therefore, the following meta-classes in the scope of this document have an association to a DataTypeMappingSet:

- InternalBehavior, because it represents the interface between the software component's code and the RTE and all data types belonging to the particular component type have to be uniquely provided on implementation level.
- ParameterSwComponentType, for the same reason (this component type doesn't have an InternalBehavior).
- NvBlockDescriptor, because this meta-class also leads to generation of code from data types and is not associated with an InternalBehavior.
- CompositionSwComponentType, to support the definition of ComSpecs in the context of a CompositionSwComponentType. Please note that this definition of a data type mapping is informal (i.e. it shall be taken as a hint for those

delegation PortPrototypes that are not yet referenced by a DelegationSwConnector or PassThroughSwConnector) and shall **not** be regarded as a binding contract towards the inner elements of the CompositionSwComponentType.

⌋

For more details about this aspect please refer to Figure 5.84.

[TPS_SWCT_01193] Mappings between application and implementation types do not necessarily have to form a 1:1 relation ⌈In general, it is not required that the sum of all mappings between ApplicationDataType and ImplementationDataType in a given system form a 1:1 relation. Depending on the use case and on the scope, 1:n as well as n:1 mappings are possible:

- Several ApplicationDataTypes may be mapped to the same ImplementationDataType in the scope of a system, an ECU, or even a single InternalBehavior of an atomic software component.

  Of course, this requires that the different ApplicationDataTypes are used for different DataPrototypes and thus that the DataPrototypes are typed by them (and not by the ImplementationDataTypes). This allows one to establish a simpler type system on the implementation level than on the application model level.

- The same ApplicationDataTypes may be mapped to different ImplementationDataTypes for different ECUs. This scenario allows one to choose the implementation data types according to the needs of specific ECUs.

- The same ApplicationDataTypes may be mapped to different ImplementationDataTypes even in the scope of a single ECU (more precisely, a single RTE), but only for different AtomicSwComponentTypes (see [constr_1004]).

  This improves the portability of software components which were developed independently or are ported between ECUs.

⌋

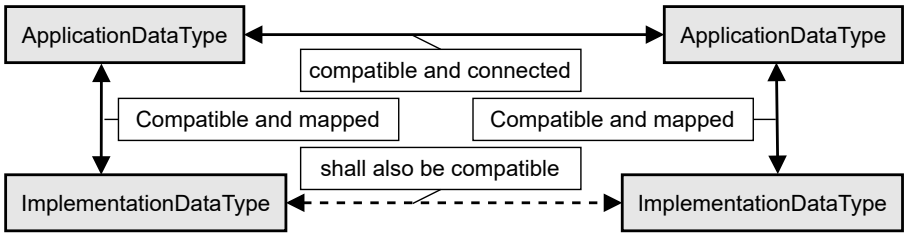

Figure 5.2: Compatibility of Data Types

[constr_1004] Mapping of ApplicationDataTypes in the scope of single AtomicSwComponentTypes and ParameterSwComponentTypes

Imposition time: CP: IT_CpgExe

⌈In the scope of AtomicSwComponentType.internalBehavior.dataTypeMapping or ParameterSwComponentType.dataTypeMapping, each ApplicationDataType shall be mapped to exactly one ImplementationDataType.⌋

[constr_1005] Compatibility of ImplementationDataTypes mapped to the same ApplicationDataType

Imposition time: CP: IT_CpgExe

⌈It is required that ImplementationDataTypes which are taken for connecting corresponding elements of PortInterfaces and thus refer to compatible ApplicationDataTypes are also compatible with each other (so that the RTE is able to cope with possible connections by converting the data accordingly).⌋

This constraint is visualized in Figure 5.2.

[constr_1636] Mapping of data types that represent an Optional Element Structure

Imposition time: CP: IT_CpgExe

⌈An ApplicationRecordDataType with at least one element where attribute isOptional is set to true shall only be mapped to an ImplementationDataType that fulfills the structural requirements to represent an Optional Element Structure (see [TPS_SWCT_01774]).⌋

5.2.2.2 Advanced Topics

The situation becomes quite complex when mapping composite data types (e.g. ApplicationRecordDataType to ImplementationDataType of category STRUCTURE) onto each other.

This section discusses some configurations that deserve special attention. The key to understanding the described problem is the existence of [constr_1004].

5.2.2.2.1 Inline Definition of ImplementationDataTypeElement

This scenario is built upon two key modeling decisions for corresponding sub-elements that are implicitly mapped by index within their respective composite parent elements:

- An ApplicationRecordElement is typed by an ApplicationPrimitiveDataType for which a mapping to an ImplementationDataType already exists (by means of a DataTypeMap).

The mapped ImplementationDataType is of category VALUE and therefore defines a reference to an SwBaseType.

- An ImplementationDataTypeElement is defined “inline”, i.e. it does not set the attribute category to TYPE_REFERENCE.

  In this case, it is necessary that the ImplementationDataTypeElement defines a reference to an SwBaseType.

A visualization of this scenario is depicted in Figure 5.3. To summarize, both

- the ImplementationDataType mapped to the primitive ApplicationRecordElement and
- the ImplementationDataTypeElement (to which said ApplicationRecordElement is “mapped” by index within their respective composite parent elements)

refer to an SwBaseType.

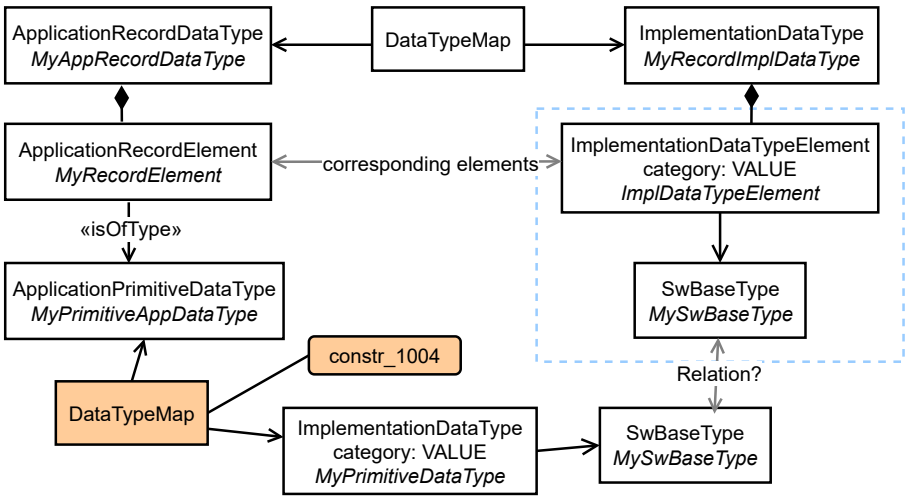

Figure 5.3: Compatibility of Data Types in the case of inline definition of record elements

AUTOSAR defines that in this case, both sides shall refer to the identical SwBaseType, as depicted in Figure 5.4.

[constr_10558] SwBaseType associated with corresponding ApplicationRecordElement and ImplementationDataTypeElement

Imposition time: CP: IT_CpgExe

⌈If

- an ApplicationRecordElement is implicitly (i.e. by position in the enclosing ApplicationRecordDataType) mapped to an ImplementationDataTypeElement of category VALUE and

- the ApplicationRecordElement typed by an ApplicationPrimitiveDataType and a DataTypeMap exists that maps the ApplicationPrimitiveDataType to an ImplementationDataType of category VALUE,

then the affected ImplementationDataType of category VALUE shall reference the **identical** SwBaseType as the affected ImplementationDataTypeElement.⌋

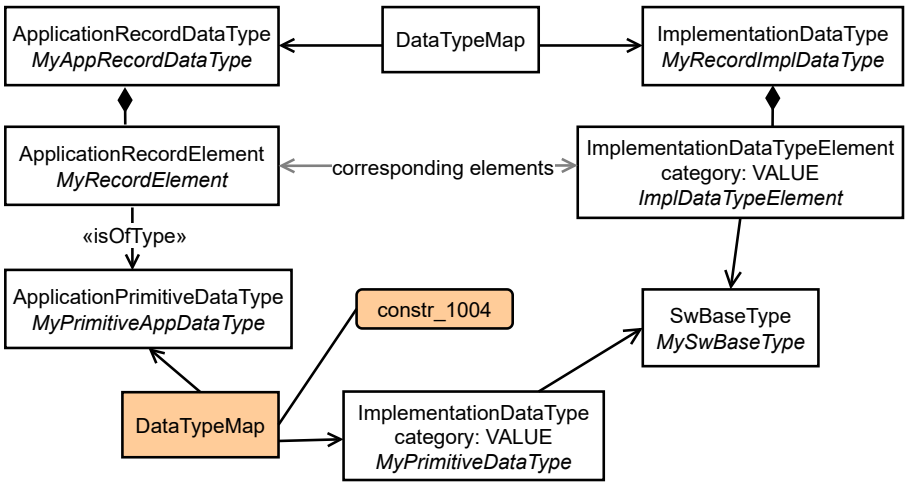

Figure 5.4: Required modeling of Data Types in the case of inline definition of record elements

The statement made by [constr_10558] is depicted in Figure 5.4.

5.2.2.2.2 Explicit Definition of ImplementationDataType

Another possible variation of the configuration described in Chapter 5.2.2.2.1 is depicted in Figure 5.5. In this case, the modeling of the "left branch" (ApplicationDataType) of the figure is identical to the previously discussed scenario.

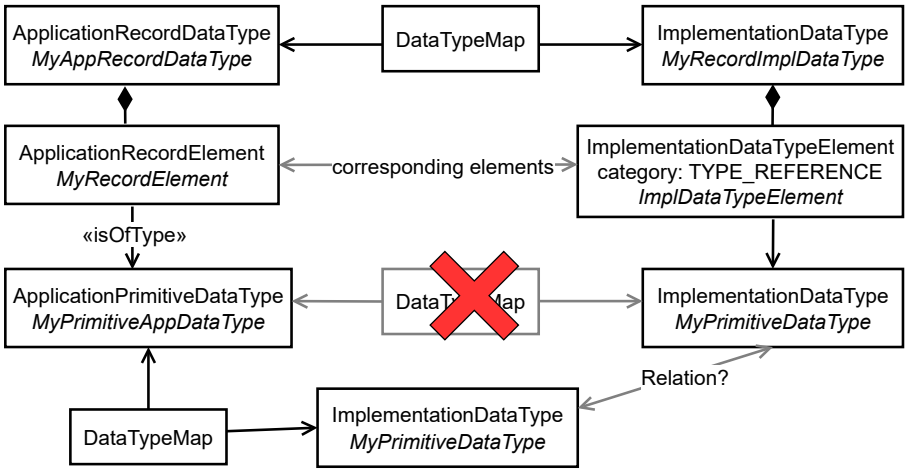

Figure 5.5: Compatibility of Data Types in the case of explicit data type definition of record element

The difference is that the ImplementationDataTypeElement has attribute category set to the value TYPE_REFERENCE, instead of VALUE.

This means that the ImplementationDataTypeElement references an ImplementationDataType and the corresponding ApplicationRecordElement is mapped to an ImplementationDataType.

This scenario only works if the ImplementationDataType mapped to the ApplicationRecordElement and the ImplementationDataType referenced by the ImplementationDataTypeElement are **identical**.

Otherwise the ApplicationDataType used to type the ApplicationRecordElement would in fact be associated with two different ImplementationDataTypes, which is not allowed. This solution is sketched in Figure 5.6.

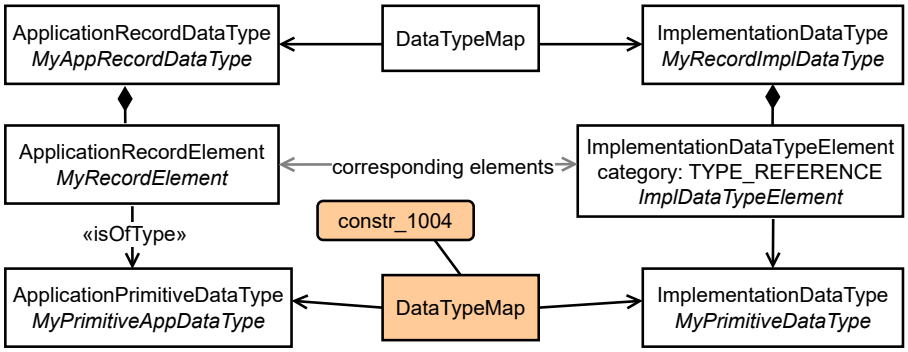

Figure 5.6: Use identical Data Types in the case that a DataTypeMap exists on the level of a record element

5.2.2.2.3 Data Type Map exists on the Level of the Record Element

The above scenario can again be varied such that an explicit mapping exists between

- the ApplicationDataType used to type the ApplicationRecordElement and
- the ImplementationDataType used to type the ImplementationDataTypeElement.

This updated scenario is depicted in Figure 5.7.

The conclusion is still the same.

According to [constr_1004], this scenario can only work if the **identical** ImplementationDataType is associated with both the ApplicationRecordElement and the ImplementationDataTypeElement, as sketched in Figure 5.6.

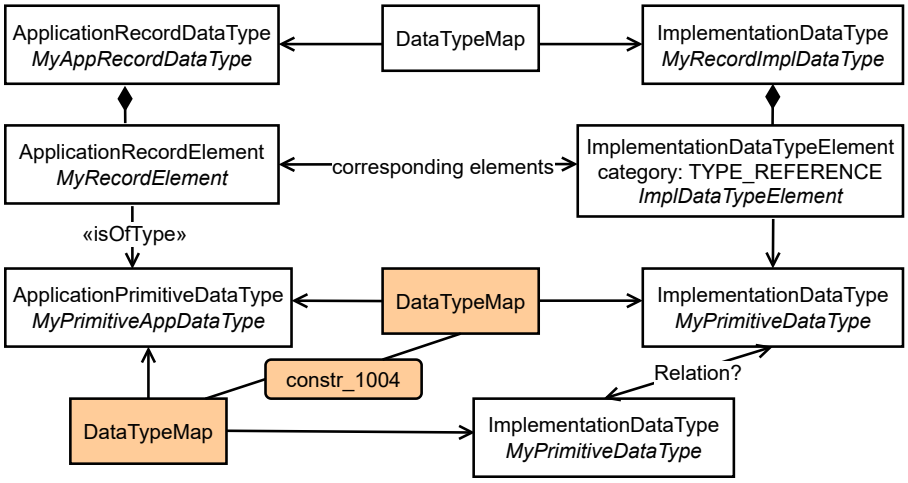

Figure 5.7: Compatibility of Data Types in the case that a `DataTypeMap` exists on the level of a record element

5.2.3 Data Categories

An `AutosarDataType` is derived from `Identifiable`, thus having a `longName`, a `shortName`, a `category`, and several further attributes for administrative and documentation purposes (for details see the [10, TPS generic Structure Template]).

[TPS_SWCT_01238] Attribute `category` used in the context of `AutosarDataType` ⌈The `category` attribute is used to set constraints for the various properties which can be specified for an `AutosarDataType`. These properties are defined by aggregating the meta-class `SwDataDefProps` which contains several attributes and references.⌋

Detailed explanations about the semantics of meta-class `SwDataDefProps` can be found in Chapter 5.4.

This approach avoids a very deep and complicated inheritance tree which otherwise would be needed on the M2 level for `AutosarDataType`.

To some extent, there is a redundancy between setting the `category` and defining the attributes of `AutosarDataType.swDataDefProps`. This redundancy is intended and allows a tool to rule out senseless configurations by means of simple rules.

In a former version of this specification, the categories were only used for calibration parameters. Due to several extensions, the categories are now applicable for all use cases of the `AutosarDataType`.

An overview of all valid `category`s defined for `AutosarDataType` is shown in [constr_1006].

Some `category`s are also applied to sub-elements of the type system (column “Applicable to ...” in [constr_1006]). This is explained in more detail in the following sections.

Please note that the column “RTE + BSW” of [constr_1006] is only applicable for categorys that are relevant either for ImplementationDataTypes and/or the aspect of measurement and calibration in McDataInstance.

Please note further that the description of SwServiceArg is available in the [6, TPS BSW Module Description Template].

Furthermore, the intersection of TYPE_REFERENCE and “Calibration” in [constr_1006] is empty because the type reference itself is not relevant for measurement and calibration. At runtime, the type reference has already been resolved, and only “final” values of category, like VALUE or STRUCTURE, are relevant.

The canonical way to provide the necessary information to derive an McDataInstance out of a ParameterDataPrototype is to let the ParameterDataPrototype be typed by an ApplicationDataType in the first place.

However, it is generally allowed (although not recommended) to define a ParameterDataPrototype that is typed by an ImplementationDataType as long as said “relevant information” about this ParameterDataPrototype is somehow provided at the time an McDataInstance is created from the ParameterDataPrototype.

[constr_1006] Applicable data categories, depending on specific model elements related to data definition properties

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈

Category	Applicable to ...											Use Case				Description
	ApplicationArrayDataType	ApplicationRecordDataType	ApplicationPrimitiveDataType	ApplicationRecordElement	ApplicationArrayElement	ApplicationValueSpecification	ApplicationRuleBasedValueSpecification	ImplementationDataType	ImplementationDataTypeElement	SwSystemconst	McDataInstance	Calibration	Measurement	Communication Port Interfaces	RTE + BSW	
VALUE			x	x	x	x		x	x	x	x	x	x	x	x	Contains a single value.
VAL_BLK			x	x	x	x	x				x	x		x		A value block defines values stored together within one calibration parameter object. It is similar to an value array but it stores the values by means of an axis instead (only important for calibration data handling).

▽

△

Category	Applicable to ...											Use Case				Description
	ApplicationArrayDataType	ApplicationRecordDataType	ApplicationPrimitiveDataType	ApplicationRecordElement	ApplicationArrayElement	ApplicationValueSpecification	ApplicationRuleBasedValueSpecification	ImplementationDataType	ImplementationDataTypeElement	SwSystemconst	McDataInstance	Calibration	Measurement	Communication Port Interfaces	RTE + BSW	
DATA_REFERENCE								x	x	x				x[3]	x	Contains an address of another DataPrototype (whose type is given via SwDataDefProps.swPointerTargetProps).
FUNCTION_REFERENCE								x	x	x					x	Contains an address of a function prototype (whose signature is given via SwDataDefProps.swPointerTargetProps.functionPointerSignature).
TYPE_REFERENCE								x	x	x				x	x	The element is defined via reference to another data type (via SwDataDefProps.implementationDataType).
STRUCTURE		x		x	x			x	x		x	x	x	x	x	Holds one or several further elements which can have different AutosarDataTypes. The underlying elements are defined in the same manner as normal data except for the association to SwAddrMethod: This has to be the same for all underlying elements. Corresponds to a Record if used in the application domain.
UNION								x	x		x	x	x	x	x	Can hold values of different data types. It is similar to STRUCTURE except that all of its members start at the same location in memory. A UNION data prototype can contain only one of its elements at a time. The size of the UNION is at least the size of the largest member. Please find more information in [TPS_SWCT_01700].
ARRAY	x			x	x		x	x	x		x	x	x	x	x	An array of sub-elements which are of the same type.
BIT											x	x	x		x	One or several bits within a host variable, which are treated as an own data object.
HOST											x	x	x		x	A HOST data type is like a simple VALUE, but it is used for packed bit definition. That means it can host several BIT variables which have their own description and measurement access.
STRING			x	x	x	x					x	x	x	x		Contains a single value interpreted as a text string (note that it appears as a single value for the application domain; the internal representation can be an array).

▽

[3] [constr_1295] applies!

△

Category	Applicable to ...											Use Case				Description
	ApplicationArrayDataType	ApplicationRecordDataType	ApplicationPrimitiveDataType	ApplicationRecordElement	ApplicationArrayElement	ApplicationValueSpecification	ApplicationRuleBasedValueSpecification	ImplementationDataType	ImplementationDataTypeElement	SwSystemconst	McDataInstance	Calibration	Measurement	Communication Port Interfaces	RTE + BSW	
BOOLEAN			x	x	x	x					x	x	x	x		Contains one boolean state. Depending on the CPU direct addressing of single bits may not be available. So a byte or a word can be used to store only one logical state.
COM_AXIS			x	x	x	x	x				x	x		x		An axis definition as separate calibration parameter which can be referenced by any CURVE, MAP, CUBOID, CUBE_4, and CUBE_5. The benefits by using a common axis is that it saves memory space; because it is stored only one time and can be used in multiple CURVEs, MAPs, CUBOIDs, CUBE_4s, and CUBE_5s.
RES_AXIS			x	x	x	x	x				x	x		x		A RES_AXIS (rescale axis) is also a shared axis like COM_AXIS, the difference is that this kind of axis can be used for rescaling. Note that the RES_AXIS is by nature a CURVE which is used to implement a non linear scaling (rescale) of the axis. In addition to saving memory space via the shared usage like a COM_AXIS, it can compress a huge range to a non-linear distributed axis points thus retaining the required accuracy.
CURVE			x	x	x	x	x				x	x		x		Calibration parameter with one input value and one output value. That means output values can be defined depending on the input value. The granularity of implemented functionality can be changed by using different number of axis points. A CURVE has always one input axis and one output axis. The output axis is a characteristic of the curve and every time present but the input axis can be defined within the curve definition or separately.
MAP			x	x	x	x	x				x	x		x		Calibration parameter with two input values and one output value. That means output values can be defined depending on the input values. The granularity of implemented functionality can be changed by using different number of axis points for y- and x-axis. A MAP has always two input axes and one output axis. The output axis is a characteristic of the MAP and every time present but the input axes can be defined within the MAP definition or separately.

▽

△

Category	Applicable to ...											Use Case				Description
	ApplicationArrayDataType	ApplicationRecordDataType	ApplicationPrimitiveDataType	ApplicationRecordElement	ApplicationArrayElement	ApplicationValueSpecification	ApplicationRuleBasedValueSpecification	ImplementationDataType	ImplementationDataTypeElement	SwSystemconst	McDataInstance	Calibration	Measurement	Communication Port Interfaces	RTE + BSW	
CUBOID			x	x	x	x	x				x	x		x		Calibration parameter with three input values and one output value. That means output values can be defined depending on the input values. The granularity of implemented functionality can be changed by using different number of axis points for the input axes. A CUBOID has always three input axes and one output axis. The output axis is a characteristic of the CUBOID and every time present but the input axes can be defined within the CUBOID definition or separately.
CUBE_4			x	x	x	x	x				x	x		x		Calibration parameter with four input values and one output value. That means output values can be defined depending on the input values. The granularity of implemented functionality can be changed by using different number of axis points for the input axes. A CUBE_4 has always four input axes and one output axis. The output axis is a characteristic of the CUBE_4 and every time present but the input axes can be defined within the CUBE_4 definition or separately.
CUBE_5			x	x	x	x	x				x	x		x		Calibration parameter with five input values and one output value. That means output values can be defined depending on the input values. The granularity of implemented functionality can be changed by using different number of axis points for the input axes. A CUBE_5 has always five input axes and one output axis. The output axis is a characteristic of the CUBE_5 and every time present but the input axes can be defined within the CUBE_5 definition or separately.

⌋

[TPS_SWCT_01239] default value for attribute category used in the context of SwSystemconst ⌈The default value for the category of a SwSystemconst shall be VALUE. This applies if no explicit definition of the category can be found.⌋

5.2.4 Application Data Type

[TPS_SWCT_01240] Subclasses of `ApplicationDataType` ⌈The abstract meta-class `ApplicationDataType` is further derived into an `ApplicationPrimitiveDataType` and an `ApplicationCompositeDataType`, which are explained in the following sub-chapters.⌋

This aspect is further explained in Figure 5.8.

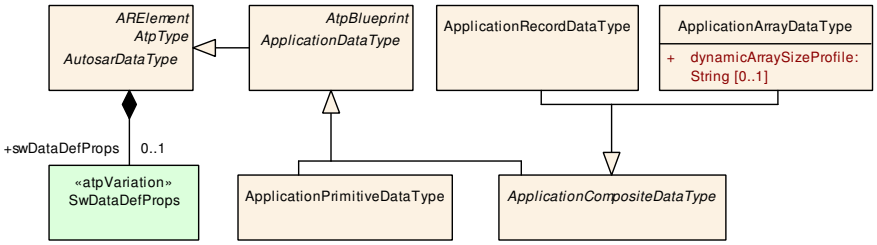

Figure 5.8: Basic Meta-Model for `ApplicationDataType`

Class	**ApplicationPrimitiveDataType**			
Note	A primitive data type defines a set of allowed values. **Tags:** atp.recommendedPackage=ApplicationDataTypes			
Base	*ARElement*, *ARObject*, *ApplicationDataType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *AutosarDataType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.5: ApplicationPrimitiveDataType

Class	***ApplicationCompositeDataType*** (abstract)			
Note	Abstract base class for all application data types composed of other data types.			
Base	*ARElement*, *ARObject*, *ApplicationDataType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *AutosarDataType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Subclasses	ApplicationArrayDataType, ApplicationRecordDataType			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.6: ApplicationCompositeDataType

[TPS_SWCT_01241] Applicable `category`s for subclasses of `ApplicationDataType` ⌈Like any `AutosarDataType`, the primitive and composite types on application level are also characterized by their `category` and their `SwDataDefProps`. For a given `category`, only a limited set of attributes of the `SwDataDefProps` makes sense.⌋

[constr_10433] Existence of attributes of ApplicationDataType depending on the category

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈

Attributes of ApplicationDataType	Owner				Attribute Existence per ApplicationDataType.category												
	ApplicationRecordDataType	ApplicationRecordElement	ApplicationArrayDataType	ApplicationArrayElement	VALUE	VAL_BLK	STRUCTURE	ARRAY	STRING	BOOLEAN	COM_AXIS	RES_AXIS	CURVE	MAP	CUBOID	CUBE_4	CUBE_5
element	x						1..*										
isOptional		x					0..1										
element			x					1									
dynamicArraySizeProfile			x					0..1									
arraySizeHandling				x				0..1									
arraySizeSemantics				x				0..1									
maxNumberOfElements				x				1									
swDataDefProps	x	x	x	x	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1

⌋

Constraints [constr_1007] and [constr_10433] specify that attributes shall not exist for specific values of category at intersections where the table cell is empty.

This list makes use of the SwDataDefProps and other meta-model elements which are explained in detail in the following sections of this chapter.

[constr_1007] Allowed attributes of SwDataDefProps for ApplicationDataTypes

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈

Attributes of SwDataDefProps	Attribute Existence per ApplicationDataType.category												
	VALUE	VAL_BLK	STRUCTURE	ARRAY	STRING	BOOLEAN	COM_AXIS	RES_AXIS	CURVE	MAP	CUBOID	CUBE_4	CUBE_5
additionalNativeTypeQualifier													
annotation	*	*	*	*	*	*	*	*	*	*	*	*	*
baseType													
compuMethod	0..1	0..1				0..1			0..1	0..1	0..1	0..1	0..1
dataConstr.dataConstrRule.physConstrs	0..1	0..1		0..1		0..1			0..1	0..1	0..1	0..1	0..1

▽

△

Attributes of SwDataDefProps	Attribute Existence per ApplicationDataType.category												
	VALUE	VAL_BLK	STRUCTURE	ARRAY	STRING	BOOLEAN	COM_AXIS	RES_AXIS	CURVE	MAP	CUBOID	CUBE_4	CUBE_5
dataConstr.dataConstr-Rule.internalConstrs	d/c[4]	d/c		d/c		d/c			d/c	d/c	d/c	d/c	d/c
displayFormat	0..1	0..1		0..1	0..1	0..1			0..1	0..1	0..1	0..1	0..1
displayPresentation	0..1	0..1		0..1			0..1	0..1	0..1	0..1	0..1	0..1	0..1
implementationDataType													
invalidValue	0..1				0..1								
stepSize	0..1	0..1		0..1			0..1	0..1	0..1	0..1	0..1	0..1	0..1
swAddrMethod	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1
swAlignment													
swBitRepresentation													
swCalibrationAccess	0..1	0..1	0..1	0..1	0..1	0..1	1	1	1	1	1	1	1
swCalprmAxisSet							1	1	1	1	1	1	1
swComparisonVariable													
swDataDependency													
swHostVariable													
swImplPolicy	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1
swIntendedResolution	0..1												
swInterpolationMethod	0..1						0..1	0..1	0..1	0..1	0..1	0..1	0..1
swIsVirtual													
swPointerTargetProps													
swRecordLayout	0..1	0..1[5]			0..1		1	1	1	1	1	1	1
swRefreshTiming	0..1	0..1			0..1	0..1							
swTextProps					1								
swValueBlockSize		1											
swValueBlockSizeMult		1											
unit	0..1	0..1							0..1	0..1	0..1	0..1	0..1
valueAxisDataType		0..1					0..1	0..1	0..1	0..1	0..1	0..1	0..1

⌋

5.2.4.1 Application Primitive Data Types

5.2.4.1.1 Data Types for Single Values

The meta-class ApplicationPrimitiveDataType, in combination with the attached swDataDefProps, is used to specify the properties of a primitive data type on application level.

[TPS_SWCT_01242] category characterizes the nature of a data type on application level ⌈The category is used in addition to characterize the nature of a data type on application level.⌋

[4] don't care
[5] This is required by [TPS_SWCT_01179].

Figure 5.9 provides a sketch of how limits are defined in the context of SwDataDefProps. The key feature is the aggregation of SwDataDefProps at AutosarDataType. The meta-class SwDataDefProps allows creating a reference to a DataConstr that in turn aggregates a DataConstrRule.

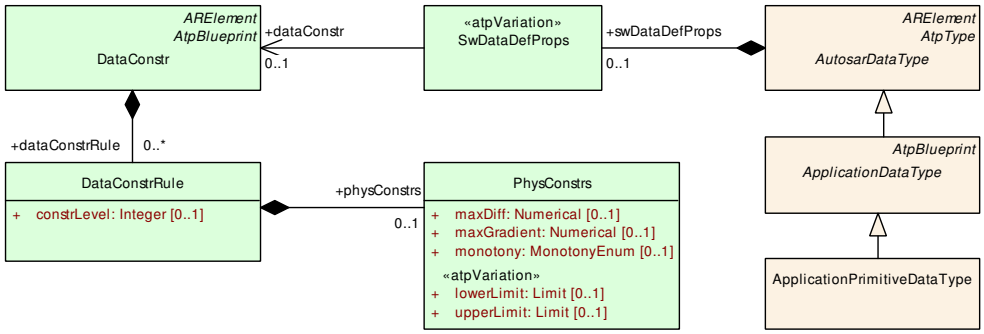

Figure 5.9: Specification of Physical Limits

The latter aggregates PhysConstrs and this meta-class finally owns two Limits in the roles lowerLimit and upperLimit.

Another example is shown in Figure 5.10. Again using SwDataDefProps, this figure shows how semantics in the form of a CompuMethod and a Unit can be attached.

Also, an initValue can be defined which is used by the RTE to initialize values of VariableDataPrototypes/ParameterDataPrototypes defined locally in a software-component.

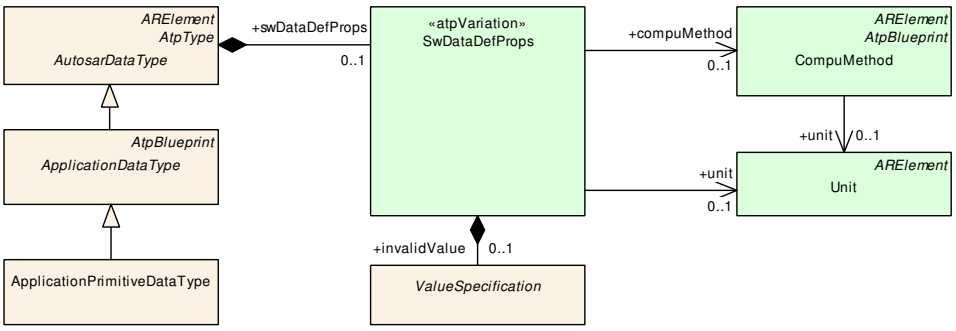

Figure 5.10: Some Properties of ApplicationPrimitiveDataTypes

Figure 5.11 (which is only applicable for linear and rational CompuMethods) illustrates the relationship between the data constraints for ApplicationDataType, CompuMethod, ImplementationDataType, and BaseType for the case of an entirely linear or rational conversion.

Please note that the relation of CompuMethod to invalidValue is discussed in detail in Chapter 5.4.2.

If an ApplicationPrimitiveDataType does not define dataConstr, then implicit constraints can be derived from the physical meaning of the ApplicationDataType.

For example, if the data type represents a temperature, the lower bound cannot fall below 0K.

For other physical meanings, the implicitly assumed limits may go from `-INF` to `+INF`.

In order to avoid ambiguity regarding the values of limits, it is **strongly recommended** to define a reasonable limit for `ApplicationPrimitiveDataType`s.

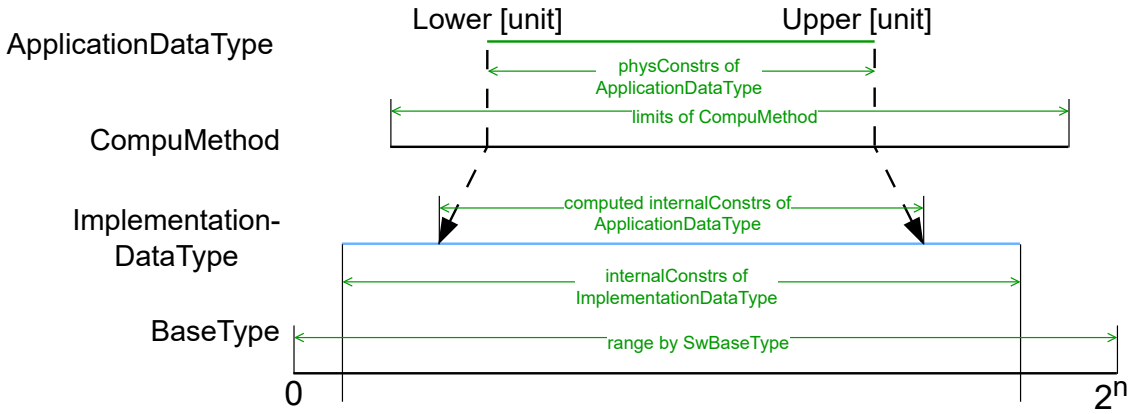

Figure 5.11: Value ranges for linear and rational `CompuMethod`

[constr_2544] Limits need to be consistent

Imposition time: CP: `IT_RteGen`, AP: `IT_BefAraApiGen`

⌈

- The limits of `ApplicationDataType` shall be inside the definition range of the `CompuMethod`

  The `CompuMethod` needs to be applicable for limits of an `Application-DataType`. The reason is that the internal representation of the limits of the `ApplicationDataType` is calculated by applying the `CompuMethod`.

- The internal limits defined in this way for the `ApplicationDataType` shall be within or equal to the `internalConstrs` of the mapped `Implementation-DataType`.

- The limits of the `ImplementationDataType` shall be within or equal to the limits defined by the size of the `BaseType`.

⌋

For a more detailed description of the properties that can be defined for data types (and data prototypes as well), see Chapter 5.4. The handling of `invalidValue` is explained in more detail in Chapter 5.4.2.

[TPS_SWCT_01760] Defining the dimension of an `ApplicationPrimitive-DataType` of `category VAL_BLK` ⌈An `ApplicationPrimitiveDataType` of `category` `VAL_BLK` that has only one dimension shall be described using the attribute `SwDataDefProps`.`swValueBlockSize`.

An ApplicationPrimitiveDataType of category VAL_BLK that has more than one dimension shall be described using the attribute SwDataDefProps.swValueBlockSizeMult.⌋

[constr_1610] Existence of SwDataDefProps.swValueBlockSize and SwDataDefProps.swValueBlockSizeMult

Imposition time: CP: IT_RteGen, AP: IT_BefAraApiGen

⌈Attributes SwDataDefProps.swValueBlockSize and SwDataDefProps.swValueBlockSizeMult shall not exist at the same time in the context of a given SwDataDefProps.⌋

5.2.4.1.2 About Enumerations

[TPS_SWCT_01243] Definition of enumeration types ⌈In the AUTOSAR meta-model, an enumeration is not implemented by means of an ApplicationCompositeDataType.

Instead, a discrete set of integer numbers can be used as a structural description for a single ApplicationPrimitiveDataType or an ImplementationDataType of category VALUE or TYPE_REFERENCE that boils down to an ImplementationDataType of category VALUE.

The mapping of the integer numbers to *labels* in the scope of the definition of an enumeration is considered part of the semantical definition via an attached CompuMethod rather than part of the structural description.⌋

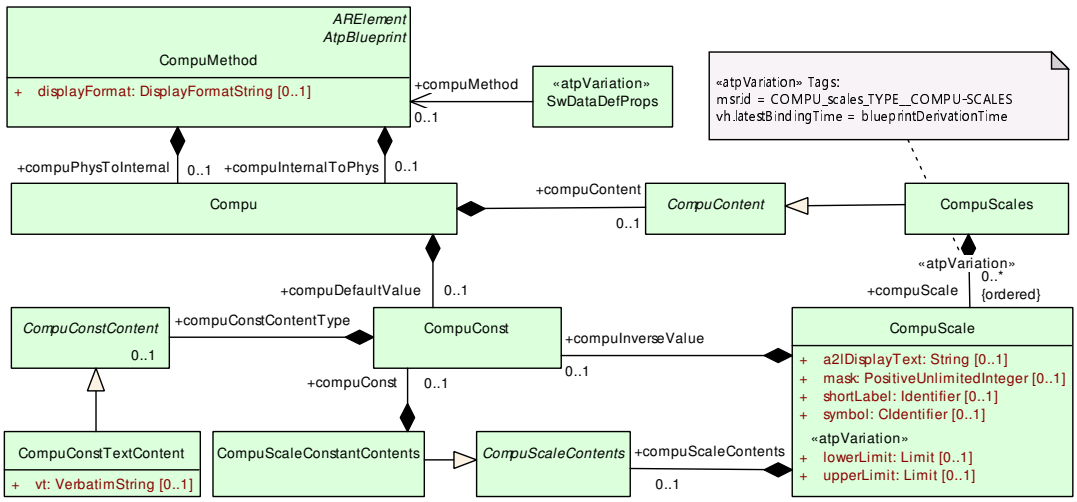

Figure 5.12: Relevant meta-classes for the specification of enumerations

[TPS_SWCT_01562] Specification of values of an enumeration ⌈For the specification of values of an enumeration on the basis of the labels defined in the applicable CompuMethod, it is necessary to distinguish two approaches based on the AutosarDataType used:

- ImplementationDataType: as mentioned by [constr_1225], the definition of the labels of an enumeration shall be done only by using TextValueSpecification.
- ApplicationPrimitiveDataType: use the role ApplicationValueSpecification.swValueCont.swValuesPhys.vt or ApplicationRuleBasedValueSpecification.swValueCont.ruleBasedValues.arguments.vt.

⌋

The relevant meta-classes in the context of SwDataDefProps are sketched in Figure 5.12. This includes all meta-classes that may contribute to the definition of the symbol of a CompuScale in C code, see [TPS_SWCT_01431].

An example of how an enumeration looks in ARXML is contained in Chapter B.4.1.

5.2.4.1.3 Data Types for Calibration Parameters

[TPS_SWCT_01244] Data types for calibration parameters are also described as primitive types ⌈Data types for calibration parameters are from the application perspective also described as primitive types. This is obvious if they are simple values (category VALUE). Also, the category STRING is treated as a primitive type on application level.

Less obvious is the fact that ApplicationDataTypes of the categories VAL_BLK, COM_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, and CUBE_5 are not described as composite data types (as far as the application level is concerned) although they admittedly possess some kind of internal structure.

In contrast to ApplicationCompositeDataTypes, they are **not** composed of other AutosarDataTypes in a similar way. Their substructure needs a special description to be compatible with existing calibration techniques.⌋

[TPS_SWCT_01245] SwDataDefProps control the structure of calibration parameters ⌈The substructure of these types is attached to the SwDataDefProps. By this means, it is possible to define, on the level of DataPrototypes or other artifacts, where the SwDataDefProps come into play.⌋

For details on this part of the SwDataDefProps, see Chapter 5.4.4 and Chapter 5.5.6.

5.2.4.1.4 Data Types for Textual Strings

[constr_1093] Definition of textual strings

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈An ApplicationPrimitiveDataType of category STRING shall have a swTextProps which determines the arraySizeSemantics and swMaxTextSize.⌋

[TPS_SWCT_01488] ApplicationPrimitiveDataType shall be interpreted as a string of a particular encoding ⌈To indicate that an ApplicationPrimitiveDataType shall be interpreted as a string of a particular encoding it shall reference swDataDefProps.swTextProps.baseType and the only attribute of the referenced SwBaseType relevant for this purpose is the BaseTypeDirectDefinition.baseTypeEncoding.⌋

[constr_1905] Existence of attribute SwTextProps.arraySizeSemantics

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each SwTextProps, attribute arraySizeSemantics shall exist.⌋

[constr_1906] Existence of attribute SwTextProps.swMaxTextSize

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each SwTextProps, attribute swMaxTextSize shall exist.⌋

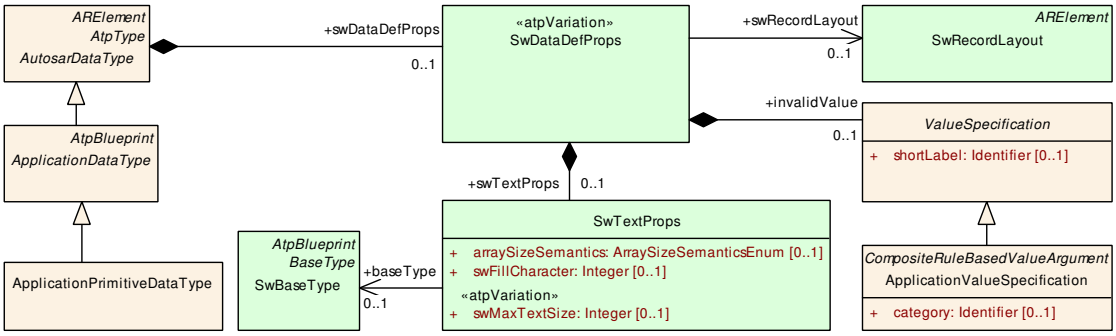

Figure 5.13: Specification of textual strings

[TPS_SWCT_01127] Byte array with variable size ⌈SwTextProps can be used to define byte arrays of variable size.⌋

[TPS_SWCT_01246] SwRecordLayout may also be required for A2L generation ⌈A SwRecordLayout may also be required for the generation of A2L if the string is part of calibration data.⌋

As stated by [TPS_SWCT_01128], the definition of SwDataDefProps.swRecordLayout is considered mandatory anyway for ApplicationPrimitiveDataTypes of category STRING.

Class	**SwTextProps**			
Note	This meta-class expresses particular properties applicable to strings in variables or calibration parameters.			
Base	*ARObject*			
Aggregated by	SwDataDefProps.swTextProps			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
arraySize Semantics	ArraySizeSemantics Enum	0..1	attr	This attribute controls the semantics of the arraysize for the array representing the string in an `ImplementationDataType`. It is there to support a safe conversion between `ApplicationDataType` and `ImplementationDataType`, even for variable length strings as required e.g. for Support of SAE J1939.
baseType	SwBaseType	0..1	ref	This is the base type of one character in the string. In particular this baseType denotes the intended encoding of the characters in the string on level of `ApplicationDataType`. **Tags:** atp.Splitkey=baseType xml.sequenceOffset=30
swFillCharacter	Integer	0..1	attr	Filler character for text parameter to pad up to the maximum length `swMaxTextSize`. The value will be interpreted according to the encoding specified in the associated base type of the data object, e.g. 0x30 (hex) represents the ASCII character zero as filler character and 0 (dec) represents an end of string as filler character. The usage of the fill character depends on the `arraySizeSemantics`. **Tags:** xml.sequenceOffset=40
swMaxTextSize	Integer	0..1	attr	Specifies the maximum text size in characters. Note the size in bytes depends on the encoding in the corresponding `baseType`. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=20

Table 5.7: SwTextProps

The following series of XML fragments exemplifies the definition of a data type for the representation of a textual string. First, the applicable `ApplicationPrimitiveDataType` is defined (see Figure 5.13).

Note that the `category` is set to the value `STRING`. Also, the `ApplicationPrimitiveDataType.swDataDefProps.swTextProps` indicate the width of the string and also define (by means of the reference to `baseType`) the encoding this string data type is supposed to utilize.

Note further that the fact that an `ApplicationDataType` directly references (across the implementation level) to a `SwBaseType` **represents an exception to the rule that `ApplicationDataType` should not be concerned about the lowest level of data type definition** in AUTOSAR.

If the bridging of the implementation level were accepted as a general pattern for the modeling of ApplicationDataType it would easily be possible to bypass the implementation level to some extent and this would render ApplicationDataTypes less versatile.

[TPS_SWCT_01128] SwRecordLayout needed for ApplicationPrimitiveDataType of category STRING ⌈As mentioned in [TPS_SWCT_01179], an ApplicationPrimitiveDataType of category STRING is considered a Compound Primitive Data Type.

Therefore, it needs a reference to the definition of a SwRecordLayout that presets the approach for creating a matching ImplementationDataType.⌋

An example for the usage of SwRecordLayout for the definition of a data type can be found in Chapter B.1.1.

[TPS_SWCT_01570] DataTypeMap is mandatory in the presence of ApplicationPrimitiveDataType.swDataDefProps.swRecordLayout ⌈The definition of a DataTypeMap is mandatory even if an ImplementationDataType has been derived from an ApplicationPrimitiveDataType that defines a SwRecordLayout.⌋

One motivation for the existence of [TPS_SWCT_01570] is that the integrator of an AUTOSAR ECU may rightfully decide to take a different ImplementationDataType other than the one that has been generated on the basis of the SwRecordLayout.

5.2.4.2 Application Composite Data Types

[TPS_SWCT_01247] ApplicationArrayDataType and ApplicationRecordDataType ⌈The meta-classes ApplicationArrayDataType and ApplicationRecordDataType provide the means to define composite data types.

Such a composite data type is required if the application software wants to have access to the individual elements of the composite as well as to do operations with the whole composite, e.g. wants to communicate the complete record or array in a single transaction.

It is possible to use a combination of ApplicationArrayDataType and ApplicationRecordDataType, so that an ApplicationArrayDataType could be defined as ApplicationRecordElement of an ApplicationRecordDataType and in the same way an ApplicationRecordDataType could be used as the base type of an ApplicationArrayDataType. The creation of nested ApplicationCompositeDataTypes is also possible.⌋

Details about meta-class ApplicationRecordDataType are depicted in Figure 5.14.

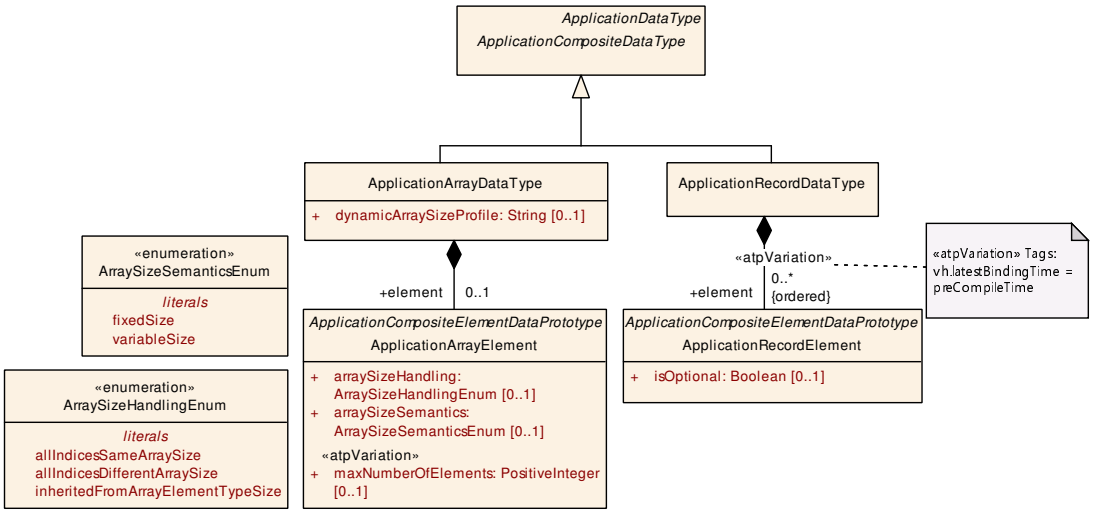

Figure 5.14: Summary of `ApplicationCompositeDataType`

5.2.4.2.1 Application Array Data Type

[TPS_SWCT_01078] Configurable array size ⌈The size of an `ApplicationArrayDataType` (in terms of the number of elements) is configured by means of the value of attribute `ApplicationArrayElement.maxNumberOfElements`.

For the purpose of referring to an element of an `ApplicationArrayDataType` within a software-component description, the element's `index` runs from 0 to the value of `maxNumberOfElements`-1.⌋

Class	**ApplicationArrayDataType**			
Note	An application data type which is an array, each element is of the same application data type. **Tags:** atp.recommendedPackage=ApplicationDataTypes			
Base	*ARElement*, *ARObject*, *ApplicationCompositeDataType*, *ApplicationDataType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *AutosarDataType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dynamicArray SizeProfile	String	0..1	attr	Specifies the profile which the array will follow if it is a variable size array.
element	ApplicationArray Element	0..1	aggr	This association implements the concept of an array element. That is, in some cases it is necessary to be able to identify single array elements, e.g. as input values for an interpolation routine. **Tags:** atp.Splitkey=element, element.shortName

Table 5.8: ApplicationArrayDataType

[constr_1907] Existence of attribute `ApplicationArrayDataType.element`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈For each `ApplicationArrayDataType`, the aggregation of `ApplicationArrayElement` in the role `element` shall exist.⌋

Class	**ApplicationArrayElement**			
Note	Describes the properties of the elements of an application array data type.			
Base	*ARObject*, *ApplicationCompositeElementDataPrototype*, *AtpFeature*, *AtpPrototype*, *DataPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ApplicationArrayDataType.element, *AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
arraySize Handling	ArraySizeHandling Enum	0..1	attr	The way how the size of the array is handled.
arraySize Semantics	ArraySizeSemantics Enum	0..1	attr	This attribute controls how the information about the array size shall be interpreted.
indexDataType	ApplicationPrimitive DataType	0..1	ref	This reference can be taken to assign a `CompuMethod` of category `TEXTTABLE` to the array. The texttable entries associate a textual value to an index number such that the element with that index number is represented by a symbolic name. **Tags:** atp.Splitkey=indexDataType
maxNumberOf Elements	PositiveInteger	0..1	attr	The maximum number of elements that the array can contain. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 5.9: ApplicationArrayElement

Please note that the information about the number of elements of a specific `ApplicationArrayDataType` is not absolute but allows for further interpretation.

[TPS_SWCT_01076] Number of elements of a specific `ApplicationArrayDataType` might vary at run-time ⌈That is, there are cases where the number of elements of a specific `ApplicationArrayDataType` might vary at run-time.

To be precise, the number of elements might vary between 0 and the value denoted by `maxNumberOfElements`.

For this purpose an additional attribute `arraySizeSemantics` is available that can be used to clarify the meaning of `maxNumberOfElements`.

For clarification, it might indeed happen that the actual number of elements in a specific `ApplicationArrayDataType` is 0. This happens simply because the respective `DataPrototype` is part of a higher-level protocol in which, under certain circumstances, the `DataPrototype` is not required for expressing a given semantics.⌋

Please note that the ability to define the semantic meaning of `maxNumberOfElements` is not only limited to the application data type level. The same approach also applies to `ImplementationDataType`.

[constr_1152] `category` of `ApplicationArrayElement` and `AutosarDataType` referenced in the role `type` shall be kept in sync

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈The value of `category` of an `ApplicationArrayElement` shall always be identical to the value of `category` of the `AutosarDataType` referenced by the `ApplicationArrayElement`.⌋

Enumeration	**ArraySizeSemanticsEnum**
Note	This enumeration provides options for how the number of elements in an array object shall be interpreted.
Aggregated by	ApplicationArrayElement.arraySizeSemantics, DiagnosticDataElement.arraySizeSemantics, ImplementationDataTypeElement.arraySizeSemantics, SwTextProps.arraySizeSemantics
Literal	***Description***
fixedSize	This means that the array object will always have a fixed number of elements. **Tags:** atp.EnumerationLiteralIndex=0
variableSize	This implies that the actual number of elements in the array object might vary at run-time. The configured size represents the maximum number of elements in the array object. **Tags:** atp.EnumerationLiteralIndex=1

Table 5.10: ArraySizeSemanticsEnum

Enumeration	**ArraySizeHandlingEnum**
Note	This enumeration defines different ways to handle the sizes of variable size arrays.
Aggregated by	ApplicationArrayElement.arraySizeHandling, ImplementationDataTypeElement.arraySizeHandling
Literal	***Description***
allIndicesDifferent ArraySize	All elements of the variable size array may have different sizes. **Tags:** atp.EnumerationLiteralIndex=0
allIndicesSame ArraySize	All elements of the variable size array have the same size. **Tags:** atp.EnumerationLiteralIndex=1
inheritedFromArray ElementTypeSize	The size of all dimensions of the variable size array is determined by the size of the contained array element. **Tags:** atp.EnumerationLiteralIndex=2

Table 5.11: ArraySizeHandlingEnum

5.2.4.2.1.1 Variable Size Array

[TPS_SWCT_01604] Enable `Size Indicator` ⌈To enable the RTE's ability to consider the number of valid elements inside a `Variable-Size Array Data Type` the `ApplicationArrayDataType.dynamicArraySizeProfile` of `ApplicationArrayDataType` and `ApplicationArrayElement.arraySizeHandling` shall be set.⌋

[TPS_SWCT_01601] `Size Indicator` shall be updated by software-component ⌈If a software-component changes the number of valid elements in a variable size array, it shall also update the `Size Indicator` in the `ImplementationDataType`.⌋

[TPS_SWCT_01602] `Size Indicator` shall be read by the software-component ⌈If a software-component receives a variable size array, it shall use the `Size Indicator` in the `ImplementationDataType` to determine the number of valid elements in the array.⌋

[TPS_SWCT_01605] Semantics of `ApplicationArrayElement.arraySizeHandling` ⌈The attribute `ApplicationArrayElement.arraySizeHandling`

specifies how the size is determined in the case of multi-dimensional variable size array.⌋

This allows to specify coherent relations between the sizes of the nested variable size arrays in the case of multiple dimensions.

With a suitable ImplementationDataType, it is possible to enable other software-components, RTE, and other BSW modules to make use of the Size Indicator and only transfer the valid data elements from the sender to the receiver.

[TPS_SWCT_01606] Internal structure of mapped ImplementationDataType ⌈The attribute dynamicArraySizeProfile specifies which internal structure the ImplementationDataType that is mapped to the ApplicationDataType shall follow.⌋

[TPS_SWCT_01607] Profiles for internal structure of mapped ImplementationDataType ⌈For the structure of the ImplementationDataType that is mapped to the ApplicationDataType the following profiles are defined for dynamicArraySizeProfile: VSA_LINEAR, VSA_SQUARE, VSA_RECTANGULAR, and VSA_FULLY_FLEXIBLE.⌋

[TPS_SWCT_01608] Custom profiles for internal structure of mapped ImplementationDataType ⌈Custom profiles can be added to dynamicArraySizeProfile. They shall have a company-specific prefix.⌋

As it is a general rule for the definition of custom profiles or values of category, the custom value should start with a company-specific prefix in order to avoid clashes with later extensions of the AUTOSAR standard.

dynamicArraySizeProfile is used to specify how the number of elements of the multiple dimensions of a variable size array correlate. They could be totally independent (VSA_FULLY_FLEXIBLE) on the one hand or each dimension has the same number of valid elements (VSA_SQUARE).

[TPS_SWCT_01623] Justification for the existence of attributes ApplicationArrayDataType.dynamicArraySizeProfile and ApplicationArrayElement.arraySizeHandling ⌈At the first glance, the two attributes ApplicationArrayDataType.dynamicArraySizeProfile and ApplicationArrayElement.arraySizeHandling seem equivalent.

However, both are needed because they have to be used if multi dimensional variable size arrays have to be described. In this case, multiple combinations of sizes could occur which cannot be specified beforehand.⌋

The ImplementationDataType has to follow certain rules depending on the chosen profile. See Chapter 5.2.5 for details.

[constr_1314] Profile VSA_LINEAR for ApplicationArrayDataType

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈If the dynamicArraySizeProfile of ApplicationArrayDataType is set to VSA_LINEAR, the contained ApplicationArrayElement shall fulfill **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall set to the value variableSize.
- The attribute ApplicationArrayElement.maxNumberOfElements shall be defined.
- The attribute ApplicationArrayElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.
- The ApplicationArrayElement shall be typed by an ApplicationDataType that is not an ApplicationArrayDataType where the attribute dynamicArraySizeProfile exists.

⌋

The part of [constr_1314] that demands that *the ApplicationArrayElement shall be typed by an ApplicationDataType that is not an ApplicationArrayDataType where the attribute dynamicArraySizeProfile exists* basically boils down to the simple explanation that the "leaf" data type of the Variable-Size Array Data Type can be anything but a Variable-Size Array Data Type.

[constr_1315] Profile VSA_SQUARE for ApplicationArrayDataType

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈If the dynamicArraySizeProfile of ApplicationArrayDataType is set to VSA_SQUARE, the contained ApplicationArrayElement shall fulfill **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ApplicationArrayElement.maxNumberOfElements shall not be defined.
- The attribute ApplicationArrayElement.arraySizeHandling shall be set to the value inheritedFromArrayElementTypeSize.
- The ApplicationArrayElement shall be typed by an ApplicationArrayDataType.

The referred ApplicationArrayDataType shall refer over a chain (under consideration of the number of dimensions of the "root" ApplicationArrayDataType) of nested ApplicationArrayDataTypes with ApplicationArrayElements to an ApplicationDataType that is **not** an ApplicationArrayDataType where the attribute dynamicArraySizeProfile exists.

The last ApplicationArrayDataType in that chain shall have an ApplicationArrayElement that fulfills **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ApplicationArrayElement.maxNumberOfElements shall be defined.
- The attribute ApplicationArrayElement.arraySizeHandling set to the value allIndicesSameArraySize.

All ApplicationArrayDataTypes before shall have an ApplicationArrayElement that fulfills **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ApplicationArrayElement.maxNumberOfElements shall not be defined.
- The attribute ApplicationArrayElement.arraySizeHandling shall be set to the value inheritedFromArrayElementTypeSize.
- The ApplicationArrayElement shall be typed by an ApplicationArrayDataType.

⌋

The part of [constr_1315], [constr_1316], and [constr_1317] that demands that *the referred ApplicationArrayDataType shall refer over a chain (under consideration of the number of dimensions of the "root" ApplicationArrayDataType) of nested ApplicationArrayDataTypes with ApplicationArrayElements to an ApplicationDataType that is **not** an ApplicationArrayDataType where the attribute dynamicArraySizeProfile exists* basically boils down to the simple explanation that the "leaf" data type of the Variable-Size Array Data Type can be anything but a Variable-Size Array Data Type.

[constr_1316] Profile VSA_RECTANGULAR for ApplicationArrayDataType

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈If the dynamicArraySizeProfile of ApplicationArrayDataType is set to VSA_RECTANGULAR the contained ApplicationArrayElement shall fulfill **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ApplicationArrayElement.maxNumberOfElements shall be defined.

- The attribute ApplicationArrayElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.
- The ApplicationArrayElement shall be typed by an ApplicationArrayDataType.

The referred ApplicationArrayDataType shall refer over a chain (under consideration of the number of dimensions of the "root" ApplicationArrayDataType) of nested ApplicationArrayDataTypes with ApplicationArrayElements to an ApplicationDataType that is **not** an ApplicationArrayDataType where the attribute dynamicArraySizeProfile exists.

The last ApplicationArrayDataType in that chain shall have an ApplicationArrayElement that fulfills **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ApplicationArrayElement.maxNumberOfElements shall be defined.
- The attribute ApplicationArrayElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.

All ApplicationArrayDataTypes before shall have an ApplicationArrayElement that fulfills **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall set to the value variableSize
- The attribute ApplicationArrayElement.maxNumberOfElements shall be defined.
- The attribute ApplicationArrayElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.
- The ApplicationArrayElement shall be typed by an ApplicationArrayDataType.

⌋

[constr_1317] Profile VSA_FULLY_FLEXIBLE for ApplicationArrayDataType

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈If the dynamicArraySizeProfile of ApplicationArrayDataType is set to VSA_FULLY_FLEXIBLE, the contained ApplicationArrayElement shall fulfill **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ApplicationArrayElement.maxNumberOfElements shall be defined.

- The attribute ApplicationArrayElement.arraySizeHandling shall be set to the value allIndicesDifferentArraySize.
- The ApplicationArrayElement shall be typed by an ApplicationArrayDataType.

The referred ApplicationArrayDataType shall refer over a chain (under consideration of the number of dimensions of the "root" ApplicationArrayDataType) of nested ApplicationArrayDataTypes with ApplicationArrayElements to an ApplicationDataType that is **not** an ApplicationArrayDataType where the attribute dynamicArraySizeProfile exist.

The last ApplicationArrayDataType in that chain shall have an ApplicationArrayElement that fulfills **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ApplicationArrayElement.maxNumberOfElements shall be defined.
- The attribute ApplicationArrayElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.

All ApplicationArrayDataTypes before shall have an ApplicationArrayElement that fulfills **all** the following conditions:

- The attribute ApplicationArrayElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ApplicationArrayElement.maxNumberOfElements shall be defined.
- The attribute ApplicationArrayElement.arraySizeHandling shall be set to the value allIndicesDifferentArraySize.
- The ApplicationArrayElement shall be typed by an ApplicationArrayDataType.

⌋

For examples, see Chapter B.1.3.

5.2.4.2.1.2 Multi-Dimensional Arrays

[TPS_SWCT_01256] Definition of multi-dimensional array data types ⌈In order to describe multi-dimensional arrays an ApplicationArrayElement references again another ApplicationArrayDataType. Hereby, one ApplicationArrayDataType per dimension is required.

These dimensions have a well-defined correlation to the individual dimensions of an ImplementationDataType of category ARRAY when the ApplicationArrayDataType is mapped to an ImplementationDataType.

The ApplicationArrayElements are mapped in the order of the ApplicationArrayElement to ApplicationArrayDataType references to ImplementationDataTypeElements, in the order from the first ImplementationDataTypeElement of the ImplementationDataType to the leaf ImplementationDataTypeElement.

In other words, the ApplicationArrayElement of the top-level ApplicationArrayDataType relates to the first ImplementationDataTypeElement of the ImplementationDataType.

The ApplicationArrayElement of the referenced ApplicationArrayDataTypes relates to the sub ImplementationDataTypeElements in the order of the ApplicationArrayElement to ApplicationArrayDataType references.⌋

An example of the definition of a multi-dimensional array data type can be found in Chapter B.1.5.

5.2.4.2.1.3 Index Data Type

The usage of an array represents an elegant way to group data with identical properties. This allows the same functionality to be processed easily by iterating over the array elements.

From a functional point of view, however, each array element may have a distinct meaning that could be visible to the application software. To create this visibility, it is possible to take advantage of an existing mechanism: CompuMethods of category TEXTTABLE.

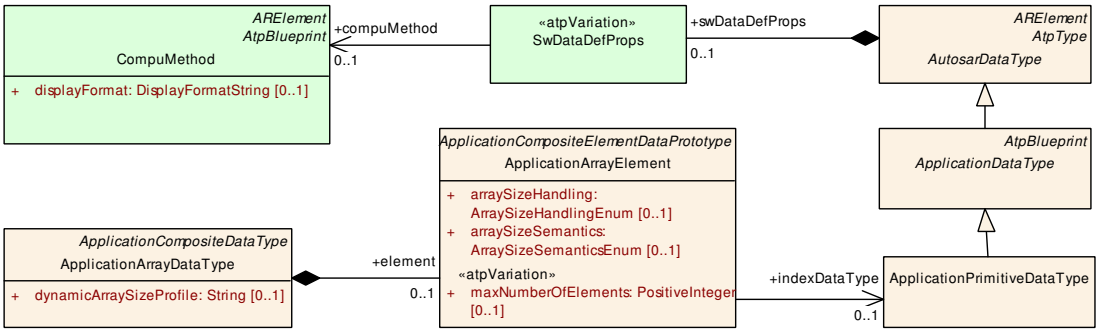

Figure 5.15: Modeling of the ApplicationArrayElement.indexDataType

[TPS_SWCT_01699] Usage of ApplicationArrayElement.indexDataType ⌈The primary use case of the attribute ApplicationArrayElement.indexDataType is the creation of composite data type mappings or the description of measurement and calibration. Furthermore, the information could be used for documentation purposes.⌋

[constr_1438] `ApplicationArrayElement.indexDataType` needs to refer to a `CompuMethod` of `category TEXTTABLE`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈The reference `ApplicationArrayElement.indexDataType` shall only point to an `ApplicationPrimitiveDataType` that in turn refers to a `CompuMethod` of `category TEXTTABLE`.⌋

[constr_1440] Size of the `CompuMethod` of `category TEXTTABLE` referenced by `ApplicationArrayElement.indexDataType`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈The interval defined by the `CompuScale`s contained in the `CompuMethod` referenced by `ApplicationArrayElement.indexDataType` shall start at 0 and include all integer values until `ApplicationArrayElement.maxNumberOfElements` - 1.⌋

[constr_1439] Requirements on `ApplicationArrayElement` if attribute `indexDataType` exists

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈If `ApplicationArrayElement.indexDataType` exists then the attribute `ApplicationArrayElement.arraySizeSemantics` shall be set to the value `fixedSize` and attribute `arraySizeHandling` shall not exist.⌋

An example of the definition of an `ApplicationArrayElement.indexDataType` can be found in Chapter B.1.2.

5.2.4.2.2 ApplicationRecordDataType

[TPS_SWCT_01249] Semantics of `ApplicationRecordDataType` ⌈A declaration of `ApplicationRecordDataType` describes a non-empty set of objects, each of which has a unique identifier with respect to the `ApplicationRecordDataType` and each has its own `ApplicationDataType`.

The `shortName` of each `ApplicationRecordElement` within the scope of an `ApplicationRecordDataType` shall be unique.⌋

Class	**ApplicationRecordDataType**			
Note	An application data type which can be decomposed into prototypes of other application data types. **Tags:** atp.recommendedPackage=ApplicationDataTypes			
Base	*ARElement*, *ARObject*, *ApplicationCompositeDataType*, *ApplicationDataType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *AutosarDataType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	ApplicationRecordDataType			
element (ordered)	ApplicationRecord Element	*	aggr	Specifies an element of a record. The aggregation of ApplicationRecordElement is subject to variability with the purpose to support the conditional existence of elements inside a ApplicationRecordData Type. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 5.12: ApplicationRecordDataType

[constr_1908] Existence of attribute ApplicationRecordDataType.element

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each ApplicationRecordDataType, the aggregation of ApplicationRecordElement in the role element shall exist.⌋

Class	ApplicationRecordElement			
Note	Describes the properties of one particular element of an application record data type.			
Base	*ARObject*, *ApplicationCompositeElementDataPrototype*, *AtpFeature*, *AtpPrototype*, *DataPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ApplicationRecordDataType.element, *AtpClassifier*.atpFeature			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
isOptional	Boolean	0..1	attr	This attribute represents the ability to declare the enclosing ApplicationRecordElement as optional. This means the that, at runtime, the ApplicationRecordElement may or may not have a valid value and shall therefore be ignored. The underlying runtime software provides means to set the ApplicationRecordElement as not valid at the sending end of a communication and determine its validity at the receiving end.

Table 5.13: ApplicationRecordElement

[TPS_SWCT_01771] Definition of optional elements on the level of ApplicationDataType ⌈The modeling approach for the definition of optional elements on the level of ApplicationDataType is to set the attribute ApplicationRecordElement.isOptional to the value true.

If the attribute is not set or set to the value false, then the respective ApplicationRecordElement **shall be considered mandatory**.⌋

5.2.5 Implementation Data Type

5.2.5.1 Overview

[TPS_SWCT_01250] ImplementationDataType has been introduced to optimize the formal support for data type handling on the implementation level ⌈The

concept of an ImplementationDataType has been introduced to optimize the formal support for data type handling on the implementation level.

In other words, an ImplementationDataType conceptually corresponds to the level of (C) source code. For example, ImplementationDataTypes have a direct impact on the contract (an explanation of this term can be found in the [2, SWS RTE]) of a software component and the RTE.⌋

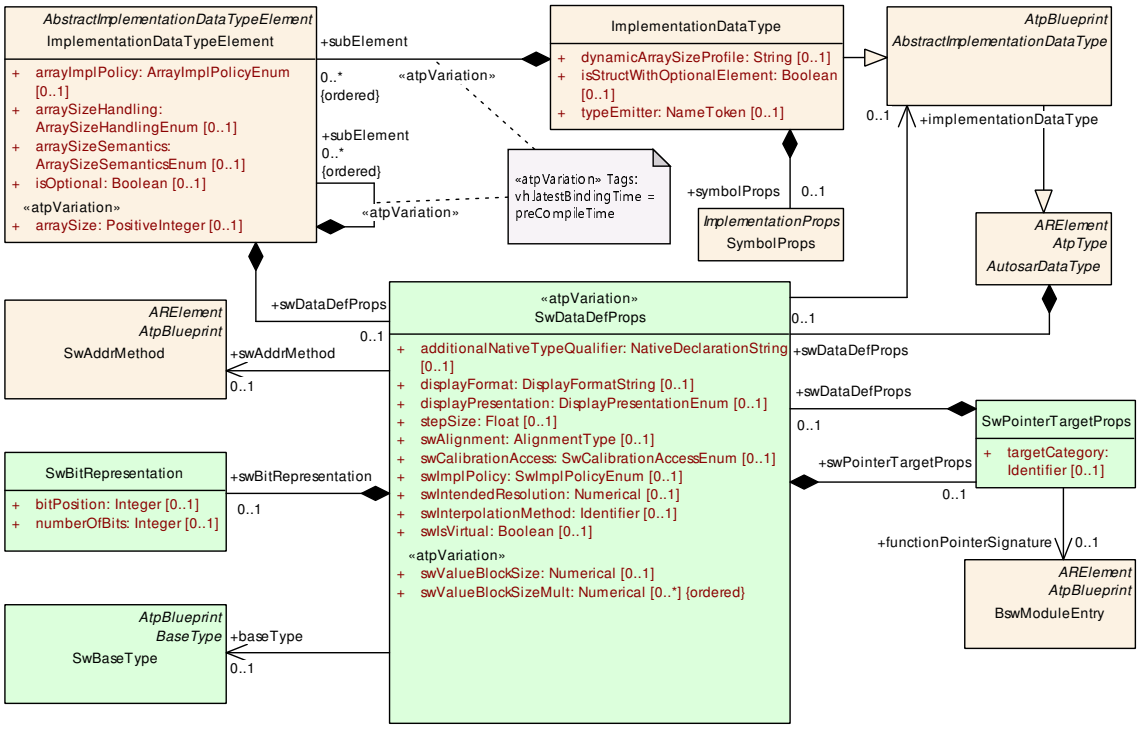

Figure 5.16: SwDataDefProps used in the context of ImplementationDataType

The allowed existence and multiplicity of all the attributes of SwDataDefProps and other properties depend on the category of the ImplementationDataType.

[constr_1178] Existence of attributes of SwDataDefProps in the context of ImplementationDataType

Imposition time: CP: IT_CpgExe

⌈To remove possible sources of ambiguity, SwDataDefProps used in the context of ImplementationDataType can **only have one of**

- baseType
- swPointerTargetProps
- implementationDataType

⌋

[TPS_SWCT_01251] A limited set of values for category is applicable for ImplementationDataType ⌈Like any AutosarDataType, the data types on the

implementation level are also characterized by their category and their SwDataDefProps. For a given category, only a limited set of attributes of the SwDataDefProps makes sense.⌋

[constr_10373] ImplementationDataType of category VALUE shall not refer to SwBaseType of category VOID

Imposition time: CP: IT_CpgExe

⌈An ImplementationDataType where attribute category is set to VALUE shall not reference (in the role swDataDefProps.baseType) a SwBaseType where attribute category is set to VOID.⌋

Rationale for the existence of [constr_10373]: The programming language C does not support a variable of type void:

```
void * MyVoidPtr /* works */

void MyVoidVar; /* does not work!*/
```

[constr_10434] Existence of attributes of ImplementationDataType depending on the category

Imposition time: CP: IT_CpgExe

⌈

Attributes of ImplementationDataType	Attribute Existence per Category						
	VALUE	DATA_REFERENCE	FUNCTION_REFERENCE	TYPE_REFERENCE	STRUCTURE	UNION	ARRAY
dynamicArraySizeProfile							0..1
isStructWithOptionalElement					0..1		
typeEmitter	0..1	0..1	0..1	0..1	0..1	0..1	0..1
symbolProps	0..1	0..1	0..1	0..1	0..1	0..1	0..1
swDataDefProps	0..1	0..1	0..1	0..1	0..1	0..1	0..1
subElement					1..*	1..*	1
subElement.isOptional					0..1		
subElement.arraySize							0..1
subElement.arraySizeSemantics							0..1
subElement.arraySizeHandling							0..1
subElement.arrayImplPolicy							0..1

⌋

The constraining characteristics of [constr_1009], [constr_10434] and [constr_10435] are that attributes shall not exist for specific values of category at intersections where the table cell is empty.

[constr_10435] Existence of attributes of ImplementationDataTypeElement depending on the category

Imposition time: CP: IT_CpgExe

⌈

Attributes of ImplementationDataTypeElement	Attribute Existence per Category						
	VALUE	DATA_REFERENCE	FUNCTION_REFERENCE	TYPE_REFERENCE	STRUCTURE	UNION	ARRAY
swDataDefProps	0..1	0..1	0..1	0..1	0..1	0..1	0..1
subElement					1..*	1..*	1
subElement.isOptional					0..1		
subElement.arraySize							0..1
subElement.arraySizeSemantics							0..1
subElement.arraySizeHandling							0..1
subElement.arrayImplPolicy							0..1

⌋

[constr_1694] Allowed target of SwDataDefProps.implementationDataType

Imposition time: CP: IT_CpgExe

⌈The reference SwDataDefProps.implementationDataType shall only refer to an ImplementationDataType. Any other subclass of AbstractImplementationDataType is not supported as a reference target.⌋

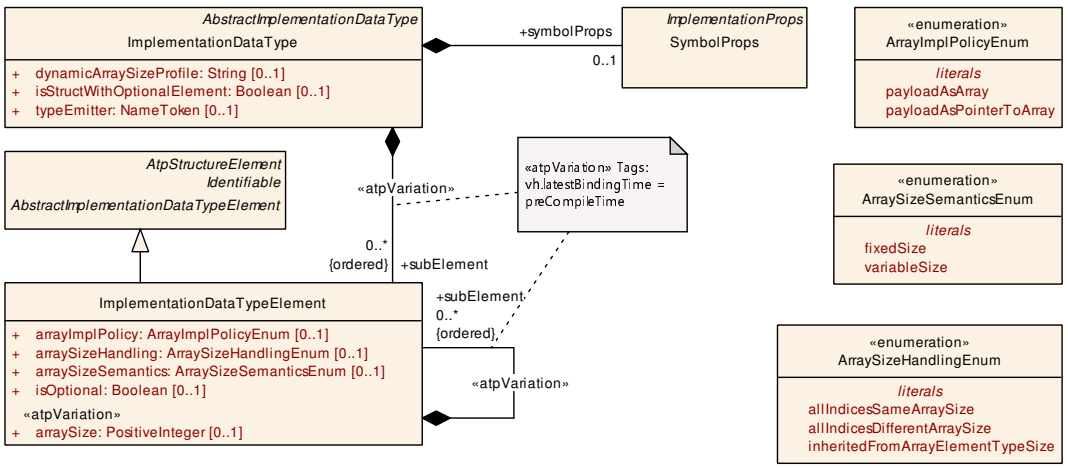

Figure 5.17: ImplementationDataType overview

This list makes use of the SwDataDefProps and other meta-model elements which are explained in detail in the further sections of this chapter.

Regulations regarding the applicable category s for attribute ImplementationDataType.swDataDefProps.compuMethod can be found in [constr_1158] inside Chapter 5.5.1.8.2.

[constr_1009] SwDataDefProps applicable to ImplementationDataTypes

Imposition time: CP: IT_CpgExe

⌈

Attributes of SwDataDefProps	Root Element				Attribute Existence per Category						
	ImplementationDataType	ImplementationDataTypeElement	SwPointerTargetProps	SwServiceArg	VALUE	DATA_REFERENCE	FUNCTION_REFERENCE	TYPE_REFERENCE	STRUCTURE	UNION	ARRAY
additionalNativeTypeQualifier	x	x	x	x	0..1	0..1	0..1	0..1	0..1	0..1	0..1
annotation	x	x	x	x	*	*	*	*	*	*	*
baseType	x	x	x	x	1						
compuMethod	x	x	x	x	0..1			0..1			
dataConstr.dataConstrRule.physConstrs	x	x	x	x	d/c[6]			d/c			d/c
dataConstr.dataConstrRule.internalConstrs	x	x	x	x	0..1			0..1			0..1
displayFormat	x	x			0..1				0..1	0..1	0..1
displayPresentation	x	x			0..1						0..1
implementationDataType	x	x	x	x				1			
invalidValue	x	x	x		0..1			0..1	0..1[7]		0..1[8]
stepSize	x	x			0..1						
swAddrMethod	x	x	x		0..1	0..1	0..1	0..1	0..1	0..1	0..1
swAlignment	x				0..1	0..1	0..1		0..1	0..1	0..1
swBitRepresentation											
swCalibrationAccess	x	x			0..1			0..1	0..1	0..1	0..1
swCalprmAxisSet											
swComparisonVariable											
swDataDependency											
swHostVariable											
swImplPolicy	x		x	x	0..1	0..1	0..1	0..1	0..1	0..1	0..1
swIntendedResolution											

▽

[6] don't care

[7] There is a use case for the definition of an invalidValue for category ARRAY and therefore category STRUCTURE is also supported for the sake of symmetry.

[8] This represents an exception such that it would make sense to use an entire ArrayValueSpecification as the invalidValue because a string semantically is more than just a bunch of characters in a row.

△

Attributes of SwDataDefProps	Root Element				Attribute Existence per Category						
	ImplementationDataType	ImplementationDataTypeElement	SwPointerTargetProps	SwServiceArg	VALUE	DATA_REFERENCE	FUNCTION_REFERENCE	TYPE_REFERENCE	STRUCTURE	UNION	ARRAY
swInterpolationMethod											
swIsVirtual											
swPointerTargetProps	x	x	x	x		1	1				
swPointerTargetProps .swDataDefProps	x	x	x	x		1					
swPointerTargetProps .functionPointerSignature	x	x	x	x			1				
swRecordLayout											
swRefreshTiming	x	x	x	x	0..1				0..1	0..1	0..1
swTextProps											
swValueBlockSize											
swValueBlockSizeMult											
unit											
valueAxisDataType											

⌋

[TPS_SWCT_01252] `ImplementationDataType` can express concepts not available on the application level ⌈As a consequence of the specific focus, it is possible to express concepts with an `ImplementationDataType` that are not supported on the application level, i.e. by `ApplicationDataType`:

- `ImplementationDataType` supports the definition of pointers
- It is possible to define “alias” names just as in a `typedef`
- It is possible to define nested `ImplementationDataType`s but, in contrast to the concept implemented for `ApplicationDataType`, these implement a direct aggregation of sub-elements rather than applying the type-prototype pattern.

⌋

The general structure of `ImplementationDataType` is sketched in Figure 5.17. If a specific `ImplementationDataType` is supposed to define a composite data type, the `ImplementationDataType` aggregates `ImplementationDataTypeElement`s.

Class	***AbstractImplementationDataType*** (abstract)			
Note	This meta-class represents an abstract base class for different flavors of ImplementationDataType.			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *AutosarDataType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Subclasses	ImplementationDataType			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.14: AbstractImplementationDataType

Class	**ImplementationDataType**			
Note	Describes a reusable data type on the implementation level. This will typically correspond to a typedef in C-code. **Tags:** atp.recommendedPackage=ImplementationDataTypes			
Base	*ARElement*, *ARObject*, *AbstractImplementationDataType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *Autosar DataType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dynamicArray SizeProfile	String	0..1	attr	Specifies the profile which the array will follow in case this data type is a variable size array.
isStructWith Optional Element	Boolean	0..1	attr	This attribute is only valid if the attribute category is set to STRUCTURE. If set to true, this attribute indicates that the ImplementationDataType has been created with the intention to define at least one element of the structure as optional.
subElement (ordered)	ImplementationData TypeElement	*	aggr	Specifies an element of an array, struct, or union data type. The aggregation of `ImplementationDataTypeElement` is subject to variability with the purpose to support the conditional existence of elements inside a `ImplementationDataType` representing a structure. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
symbolProps	SymbolProps	0..1	aggr	This represents the SymbolProps for the Implementation DataType. **Tags:** atp.Splitkey=symbolProps, symbolProps.short Name
typeEmitter	NameToken	0..1	attr	This attribute is used to control which part of the AUTOSAR toolchain is supposed to trigger data type definitions.

Table 5.15: ImplementationDataType

[TPS_SWCT_01248] Nested definition of `ImplementationDataType` ⌈If an `ImplementationDataTypeElement` also represents a composite data type, it can aggregate `ImplementationDataTypeElement`s in the role of `subElement`. Again, the type-prototype pattern does not apply in this case.⌋

[TPS_SWCT_01253] Rules apply to the usage of the attribute `ImplementationDataType.typeEmitter` ⌈The following set of values is supported for the usage of the attribute `ImplementationDataType.typeEmitter`:

- attribute typeEmitter is NOT defined.
- attribute typeEmitter is set to “RTE”.
- attribute typeEmitter is set to the name of a header file.
- attribute typeEmitter is set to anything else.

⌋

The consequence of setting the value of typeEmitter is explained in the [2, SWS RTE].

The usage of ImplementationDataTypes within an AnyInstanceRef is described in detail in the [10, TPS Generic Structure Template].

Class	***AbstractImplementationDataTypeElement*** (abstract)			
Note	This meta-class represents the ability to act as an abstract base class for specific derived meta-classes that support the modeling of ImplementationDataTypes for a particular language binding.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	ImplementationDataTypeElement			
Aggregated by	*AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.16: AbstractImplementationDataTypeElement

Class	**ImplementationDataTypeElement**			
Note	Declares a data object which is locally aggregated. Such an element can only be used within the scope where it is aggregated. This element either consists of further subElements or it is further defined via its swDataDefProps. There are several use cases within the system of ImplementationDataTypes for such a local declaration: • It can represent the elements of an array, defining the element type and array size • It can represent an element of a struct, defining its type • It can be the local declaration of a debug element.			
Base	*ARObject*, *AbstractImplementationDataTypeElement*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, ImplementationDataType.subElement, ImplementationDataTypeElement.subElement			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
arrayImplPolicy	ArrayImplPolicyEnum	0..1	attr	This attribute controls the implementation of the payload of an array. It shall only be used if the enclosing ImplementationDataType constitutes an array.
arraySize	PositiveInteger	0..1	attr	The existence of this attributes (if bigger than 0) defines the size of an array and declares that this ImplementationDataTypeElement represents the type of each single array element. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

▽

△

Class	**ImplementationDataTypeElement**			
arraySize Handling	ArraySizeHandling Enum	0..1	attr	The way how the size of the array is handled in case of a variable size array.
arraySize Semantics	ArraySizeSemantics Enum	0..1	attr	This attribute controls the meaning of the value of the array size.
isOptional	Boolean	0..1	attr	This attribute represents the ability to declare the enclosing `ImplementationDataTypeElement` as optional. This means that, at runtime, the `ImplementationDataTypeElement` may or may not have a valid value and shall therefore be ignored. The underlying runtime software provides means to set the `CppImplementationDataTypeElement` as not valid at the sending end of a communication and determine its validity at the receiving end.
subElement (ordered)	ImplementationData TypeElement	*	aggr	Element of an array, struct, or union in case of a nested declaration (i.e. without using "typedefs"). The aggregation of `ImplementationDataTypeElement` is subject to variability with the purpose to support the conditional existence of elements inside a `ImplementationDataType` representing a structure. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
swDataDef Props	SwDataDefProps	0..1	aggr	The properties of this ImplementationDataTypeElement. **Tags:** atp.Splitkey=swDataDefProps

Table 5.17: ImplementationDataTypeElement

5.2.5.2 Modeling of Type Reference using Implementation Data Type

[TPS_SWCT_01441] Nature of a `TYPE_REFERENCE` ⌈A type reference (formally represented by an `ImplementationDataType` of `category TYPE_REFERENCE`) implements a redirection to common `ImplementationDataType`s.⌋

[TPS_SWCT_01442] `ImplementationDataType` of `category TYPE_REFERENCE` does not define own properties ⌈As long as an `ImplementationDataType` of `category TYPE_REFERENCE` does not define own properties, the properties of the refined `ImplementationDataType` apply.⌋

A definition of an `ImplementationDataType` of `category TYPE_REFERENCE` that does not redefine any properties of the referenced `ImplementationDataType` still allows a value to be set for attribute `shortName`, which can then be used as an alias.

Furthermore, the typical use case for defining an `ImplementationDataType` of `category TYPE_REFERENCE` is to tweak a small number of attributes defined by the ultimately referenced `ImplementationDataType` where attribute `category` is not set to `TYPE_REFERENCE`.

In other words, if the intention is to tweak a **large number of attributes** of an existing ImplementationDataType where attribute category is not set to TYPE_REFERENCE, then the recommendation is to create a new ImplementationDataType where attribute category is not set to TYPE_REFERENCE instead of creating an ImplementationDataType of category TYPE_REFERENCE.

[TPS_SWCT_01443] ImplementationDataType of category TYPE_REFERENCE overwrites properties of refined ImplementationDataType ⌈If an ImplementationDataType of category TYPE_REFERENCE defines own properties (e.g. CompuMethod), these properties overwrite the properties of the refined ImplementationDataType.⌋

As explained by [constr_1050], compatibility checks of ImplementationDataType require a prior resolution of possible type references, i.e. the compatibility shall be checked on the resolved ImplementationDataType.

[constr_1383] Existence of CompuMethod and DataConstr for ImplementationDataTypes of category TYPE_REFERENCE

Imposition time: CP: IT_CpgExe

⌈The existence of ImplementationDataType.swDataDefProps.compuMethod and ImplementationDataType.swDataDefProps.dataConstr for ImplementationDataTypes of category TYPE_REFERENCE is only allowed if the respective ImplementationDataType, after all type references are resolved, is an ImplementationDataType of category VALUE.⌋

Given [constr_1383], the elements of a composite ImplementationDataType may each define their own CompuMethod. However, **one** CompuMethod that applies to the **entire** composite ImplementationDataType is not supported.

An ImplementationDataType of category TYPE_REFERENCE implicitly takes over (extension is not possible, for example) the baseTypeSize defined in the context of the referenced ImplementationDataType where attribute category is not set to TYPE_REFERENCE.

This means that the internalConstrs defined in the context of the ImplementationDataType of category TYPE_REFERENCE shall be within the boundaries of the internalConstrs defined in the context of the corresponding ImplementationDataType where attribute category is not set to TYPE_REFERENCE.

[constr_10792] restricts the definition of InternalConstrs within the context of an ImplementationDataType where attribute category is not set to TYPE_REFERENCE.

[constr_10793] Restriction for the definition of `internalConstrs` in the context of an `ImplementationDataType` of `category` `TYPE_REFERENCE`

Imposition time: CP: `IT_CpgExe`

⌈For each `ImplementationDataType` of `category` `TYPE_REFERENCE`, the definition of

- `swDataDefProps.dataConstr.dataConstrRule.internalConstrs.lowerLimit` shall be **greater than or equal** to the respective `lowerLimit` defined in the context of the corresponding `ImplementationDataType` where attribute `category` is not set to `TYPE_REFERENCE` and
- `swDataDefProps.dataConstr.dataConstrRule.internalConstrs.upperLimit` shall be **less than or equal** to the respective `upperLimit` defined in the context of the corresponding `ImplementationDataType` where attribute `category` is not set to `TYPE_REFERENCE`.

⌋

5.2.5.3 Modeling of Structure using Implementation Data Type

[constr_1106] Structure shall have at least one element

Imposition time: CP: `IT_CpgExe`

⌈An `ImplementationDataType` or `ImplementationDataTypeElement` of `category` `STRUCTURE` shall own at least one `ImplementationDataTypeElement`.⌋

5.2.5.3.1 Modeling of Optional Element Structure with ImplementationDataType

The definition of an `ImplementationDataType` that represents an `Optional Element Structure` shall not rely only on the existence of optional elements.

Also, the definition of the enclosing `ImplementationDataType` shall clearly signal the intention by means of the dedicated attribute `ImplementationDataType.isStructWithOptionalElement`.

[TPS_SWCT_01772] Semantics of attribute `ImplementationDataType.isStructWithOptionalElement` ⌈If attribute `ImplementationDataType.isStructWithOptionalElement` is set to `true`, then the `ImplementationDataType` advertises the intention to represent an `Optional Element Structure` such that the fulfillment of structural requirements for the existence of optional elements can be formally checked.

Again, this attribute represents a formal specification that optionality is intended, as opposed to an `ImplementationDataType` that fulfills the structural requirements for other reasons.⌋

[TPS_SWCT_01773] Definition of Optional Element Structure on the level of ImplementationDataType ⌈The modeling approach for the definition of an Optional Element Structure on the level of ImplementationDataType is to set the attribute ImplementationDataTypeElement.isOptional to the value true.

If the attribute is not set or set to the value false, then the respective ImplementationDataTypeElement shall be considered mandatory.⌋

[constr_1637] Existence of ImplementationDataTypeElement.isOptional vs. ImplementationDataType.isStructWithOptionalElement

Imposition time: CP: IT_CpgExe

⌈If one ImplementationDataType.subElement sets attribute isOptional to the value true then the enclosing ImplementationDataType shall also set attribute isStructWithOptionalElement to true.⌋

To generate a proper RTE API for accessing optional elements of data types in general, it is necessary to impose structural requirements on the definition of ImplementationDataType.

In particular, it is necessary at runtime to store information about the availability of a specific ImplementationDataTypeElement where attribute isOptional has been set to the value true in the context of an ImplementationDataType of category STRUCTURE.

An ImplementationDataType that represents an Optional Element Structure shall contain a dedicated element which represents an *availability bitfield*.

This bitfield is implemented as an array of uint8 and shall hold one bit for each optional element contained in the structured data type.

In particular, the applicable structural requirements for an ImplementationDataType that represents an Optional Element Structure are described in the following specification items.

[TPS_SWCT_01774] Modeling of ImplementationDataType with optional elements ⌈The following approach shall be taken to model an ImplementationDataType that represents an Optional Element Structure:

- The first ImplementationDataTypeElement of ImplementationDataType where attribute isStructWithOptionalElement is set to true shall have the shortName availabilityBitfield. [constr_1638] applies.
- This ImplementationDataTypeElement shall be of category ARRAY.
- The ImplementationDataTypeElement shall set attribute arraySizeSemantics to the value fixedSize.
- The ImplementationDataTypeElement shall aggregate a further ImplementationDataTypeElement in the role subElement for which the following requirements apply:

- The ImplementationDataTypeElement shall be of category TYPE_REFERENCE that eventually refers to an ImplementationDataType that, directly or indirectly, implements an array of unsigned bytes, e.g. take the Platform Data Type named uint8 as the element type[9].
- The ImplementationDataTypeElement shall set the value of attribute arraySize to max(1,ceil(numberOfOptionalElements / 8)).

⌋

The numberOfOptionalElements referenced in [TPS_SWCT_01774] is computed as the sum of all subElements for which the attribute isOptional is set to true.

This sum is only taken on the level of subElements for which the attribute isOptional is set to true and not on any further (logical) levels in the structure below.

[TPS_SWCT_01881] Scope of the availabilityBitfield ⌈The bitfield shall only contain information on the availability of the direct child elements of the enclosing structure and not on elements of sub-structures.⌋

Examples for the definition of optional elements and the availabilityBitfield are given in Chapter B.1.8.

[constr_1638] First ImplementationDataTypeElement of ImplementationDataType that represents an Optional Element Structure

Imposition time: CP: IT_CpgExe

⌈The first ImplementationDataTypeElement of ImplementationDataType that represents an Optional Element Structure, i.e. the availabilityBitfield according to [TPS_SWCT_01774], shall not set attribute isOptional to true.⌋

A further structural requirement applies.

[constr_1639] ImplementationDataTypeElement with attribute isOptional set to true

Imposition time: CP: IT_CpgExe

⌈An ImplementationDataTypeElement where attribute isOptional is set to true, shall set the value of attribute category to one of the following values:

- VALUE
- TYPE_REFERENCE

⌋

[9] This relation could be expressed in a more formal way. However, such a formal expression would be very elaborate in an already complicated specification item. It is assumed that this is sufficient to convey the general idea.

Instead, nested structures shall be created by modeling ImplementationDataTypeElements of category TYPE_REFERENCE that in turn refer to ImplementationDataTypes of category STRUCTURE.

Rationale: the existence of [constr_1639] simplifies the concept of the availability bitfield.

The bitfield shall **only** contain information on the availability of the direct child elements and **not** on elements of sub-structures.

By using the category TYPE_REFERENCE, it is assured that a separate ImplementationDataType of category STRUCTURE is generated for the sub-structure.

Since the AUTOSAR RTE provides APIs for accessing the availability information based on an ImplementationDataType of category STRUCTURE, anonymous structures with optional elements cannot be used.

5.2.5.4 Modeling of Union using Implementation Data Type

[constr_1107] Union shall have at least one element

Imposition time: CP: IT_CpgExe

⌈An ImplementationDataType or ImplementationDataTypeElement of category UNION shall own at least one ImplementationDataTypeElement.⌋

[TPS_SWCT_01759] Use cases for unions ⌈There are different use cases for defining a union data type:

1. The DataPrototypes derived from the union data type shall be transported over a communication network. For this purpose, a special modeling is required in the form of a wrapped union data type, as explained by [TPS_SWCT_01700].
2. The DataPrototypes created from the union data type are used internally within the same ECU, e.g. as a PerInstanceMemory, romBlock, or ramBlock. In this case, the modeling of the union data type is not subject to specific constraints.

⌋

Unions can be used in PortInterfaces only under certain conditions, which are explained in [constr_1607].

[constr_1607] Only Wrapped Union Data Types in PortInterface

Imposition time: CP: IT_CpgExe

⌈Within the scope of a PortInterface, the usage of a union data type is only supported

- for Wrapped Union Data Types.

- for a PortInterface that is used to type a PortPrototype that does not appear as context in an instanceRef owned by a DataMapping. See also [constr_1441].

⌋

5.2.5.5 Modeling of Array using Implementation Data Type

5.2.5.5.1 Overview

[TPS_SWCT_01254] ImplementationDataType with array semantics ⌈It is also possible to define an ImplementationDataType that provides array semantics.⌋

[TPS_SWCT_01006] ImplementationDataType.subElement.arraySize shall be used to define the size of the array ⌈The primitive attribute ImplementationDataType.subElement.arraySize shall be used to define the size of the array.⌋

[TPS_SWCT_01007] Semantics of array index ⌈For an ImplementationDataType that implements an array data type, the semantics of the array index is such that

- it shall start with the value 0
- it shall run to the value of arraySize -1

⌋

[constr_1105] Value of arraySize

Imposition time: CP: IT_CpgExe

⌈The value of the attribute arraySize of an ImplementationDataTypeElement owned by an ImplementationDataType or ImplementationDataTypeElement of category ARRAY shall be greater than 0 unless attribute ImplementationDataTypeElement.arraySizeHandling exists and is set to the value inheritedFromArrayElementTypeSize.⌋

[TPS_SWCT_01478] Array size is defined as an attribute of the ImplementationDataTypeElement ⌈The array size is **not** defined as an attribute of the ImplementationDataType that represents the whole array.

Instead, it is defined as an attribute of the ImplementationDataTypeElement that describes the array element (note that the same pattern is used in ApplicationArrayDataType).⌋

Consequently, if a “struct” element represents an array, this specific struct element is represented by an ImplementationDataTypeElement of category ARRAY which in turn aggregates another ImplementationDataTypeElement, e.g. of category VALUE, representing the array element and containing the size.

[TPS_SWCT_01255] Indicate whether the array is supposed to have a fixed size or whether the actual size might change during run-time ⌈It is also possible to indicate whether the array is supposed to have a fixed size or whether the actual size might change during run-time.⌋

[constr_1783] Existence of primitive attribute `ImplementationDataTypeElement.arrayImplPolicy`

Imposition time: CP: `IT_CpgExe`

⌈Attribute `ImplementationDataTypeElement.arrayImplPolicy` shall only exist if the enclosing `ImplementationDataType` or `ImplementationDataTypeElement` is of `category ARRAY`.⌋

The usage of attribute `ImplementationDataTypeElement.arrayImplPolicy` does not affect model semantics, i.e. it does not impose further conditions on the modeling of arrays.

The attribute merely influences the implementation of the respective array in the programming language binding, in the form of generated C code.

Enumeration	**ArrayImplPolicyEnum**
Note	This meta-class provides values to configure the implementation of the payload part of an array.
Aggregated by	ImplementationDataTypeElement.arrayImplPolicy
Literal	***Description***
payloadAsArray	This configuration demands the implementation of the payload as an array. **Tags:** atp.EnumerationLiteralIndex=0
payloadAsPointerTo Array	This configuration demands the implementation of the payload as a pointer to an array. **Tags:** atp.EnumerationLiteralIndex=1

Table 5.18: ArrayImplPolicyEnum

5.2.5.5.2 Modeling of Variable-Size Array using Implementation Data Type

In the same way as for `ApplicationDataType`s, it is also possible to specify a `Size Indicator` of a variable-size array which holds the number of valid elements of the array in the `ImplementationDataType`.

More information on this topic is given in Chapter 5.2.4.2.1.1.

[TPS_SWCT_01622] Modeling of a `Variable-Size Array Data Type` only with `ImplementationDataType` ⌈The modeling of a `Variable-Size Array Data Type` does not require the existence of an `ApplicationCompositeDataType` and a `DataTypeMap`. A `Variable-Size Array Data Type` can be created simply by setting up an `ImplementationDataType`.⌋

[TPS_SWCT_01610] Modeling of a `Variable-Size Array Data Type` with `Size Indicator` enabled ⌈An `ImplementationDataType` with `category`

STRUCTURE where the attribute ImplementationDataType.dynamicArraySizeProfile exists represents a Variable-Size Array Data Type with Size Indicator enabled.

For the definition of terminology, this ImplementationDataType shall be called the VSA ImplementationDataType.⌋

[TPS_SWCT_01650] Structure of the VSA ImplementationDataType ⌈The VSA ImplementationDataType shall consist of

- an ImplementationDataTypeElement representing the Size Indicator and
- an ImplementationDataTypeElement representing the Payload of the Variable-Size Array Data Type.

For the definition of terminology, these ImplementationDataTypeElements shall be called the VSA Size Indicator ImplementationDataTypeElement and the VSA Payload ImplementationDataTypeElement respectively.⌋

[TPS_SWCT_01612] arraySizeHandling specifies how the size is determined ⌈arraySizeHandling specifies how the size is determined in the case of a multi-dimensional variable-size array.⌋

The statement made by [TPS_SWCT_01612] allows the specification of coherency between the sizes of the nested variable size arrays in the case of multiple dimensions.

[TPS_SWCT_01613] Internal structure of mapped ImplementationDataType ⌈The attribute dynamicArraySizeProfile specifies which internal structure the ImplementationDataType shall follow.⌋

[TPS_SWCT_01614] Profiles for internal structure of mapped ImplementationDataType ⌈For the structure of the ImplementationDataType, the following profiles are defined for dynamicArraySizeProfile: VSA_LINEAR, VSA_SQUARE, VSA_RECTANGULAR and VSA_FULLY_FLEXIBLE.⌋

[TPS_SWCT_01615] Custom profiles for internal structure of mapped ImplementationDataType ⌈Custom profiles can be added to dynamicArraySizeProfile. They shall have a company-specific prefix.⌋

For reasons of readability and comprehensibility, the following constraints focus only on the payload of the Variable-Size Array Data Type. Additional individual constraints apply to the Size Indicator.

[constr_1318] Profile VSA_LINEAR for ImplementationDataType

Imposition time: CP: IT_CpgExe

⌈If the value of attribute ImplementationDataType.dynamicArraySizeProfile is set to VSA_LINEAR, the ImplementationDataType shall aggregate a VSA Payload ImplementationDataTypeElement that fulfills all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall not be defined.
- The attribute ImplementationDataTypeElement.category shall be set to ARRAY.
- The attribute ImplementationDataTypeElement.arraySize shall not be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall not be defined.

The VSA Payload ImplementationDataTypeElement shall immediately aggregate another ImplementationDataTypeElement that shall fulfill all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ImplementationDataTypeElement.arraySize shall be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.

⌋

[constr_1319] Profile VSA_SQUARE for ImplementationDataType

Imposition time: CP: IT_CpgExe

⌈If the value of attribute ImplementationDataType.dynamicArraySizeProfile is set to VSA_SQUARE, the ImplementationDataType shall aggregate a VSA Payload ImplementationDataTypeElement that fulfills all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall not be defined.
- The attribute ImplementationDataTypeElement.category shall be set to the value ARRAY.
- The attribute ImplementationDataTypeElement.arraySize shall not be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall not be defined.

The VSA Payload ImplementationDataTypeElement shall immediately aggregate another ImplementationDataTypeElement (representing the first dimension) that shall fulfill all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.

- The attribute ImplementationDataTypeElement.category shall be set to the value ARRAY.
- The attribute ImplementationDataTypeElement.arraySize shall not be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value inheritedFromArrayElementTypeSize.

All **intermediate** ImplementationDataTypeElements in the aggregation chain that do not terminate the chain shall fulfill all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ImplementationDataTypeElement.category shall be set to the value ARRAY.
- The attribute ImplementationDataTypeElement.arraySize shall not be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value inheritedFromArrayElementTypeSize.

The **terminating** ImplementationDataTypeElement in the aggregation chain shall fulfill all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ImplementationDataTypeElement.arraySize shall be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.

⌋

[constr_1320] Profile VSA_RECTANGULAR for ImplementationDataType

Imposition time: CP: IT_CpgExe

⌈If the value of attribute ImplementationDataType.dynamicArraySizeProfile is set to VSA_RECTANGULAR, the ImplementationDataType shall aggregate a VSA Payload ImplementationDataTypeElement that fulfills all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall not be defined.
- The attribute ImplementationDataTypeElement.category shall be set to the value ARRAY.
- The attribute ImplementationDataTypeElement.arraySize shall not be defined.

- The attribute ImplementationDataTypeElement.arraySizeHandling shall not be defined.

The VSA Payload ImplementationDataTypeElement shall immediately aggregate another ImplementationDataTypeElement (representing the first dimension) that shall fulfill all the following conditions:

- The attribute ImplementationDataTypeElement.category shall be set to the value ARRAY.
- The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ImplementationDataTypeElement.arraySize shall be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.

All **intermediate** ImplementationDataTypeElements in the aggregation chain that do not terminate the chain shall fulfill all the following conditions:

- The attribute ImplementationDataTypeElement.category shall be set to the value ARRAY.
- The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ImplementationDataTypeElement.arraySize shall be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.

The **terminating** ImplementationDataTypeElement in the aggregation chain shall fulfill all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ImplementationDataTypeElement.arraySize shall be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.

⌋

[constr_1321] Profile VSA_FULLY_FLEXIBLE for ImplementationDataType

Imposition time: CP: IT_CpgExe

⌈If the value of attribute ImplementationDataType.dynamicArraySizeProfile is set to the value VSA_FULLY_FLEXIBLE, the ImplementationDataType shall aggregate a VSA Payload ImplementationDataTypeElement that fulfills all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall not be defined.
- The attribute ImplementationDataTypeElement.category shall be set to the value ARRAY.
- The attribute ImplementationDataTypeElement.arraySize shall not be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall not be defined.

The VSA Payload ImplementationDataTypeElement shall immediately aggregate another ImplementationDataTypeElement (representing the first dimension) that shall fulfill all the following conditions:

- The attribute ImplementationDataTypeElement.category shall be set to STRUCTURE.
- The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ImplementationDataTypeElement.arraySize shall be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value allIndicesDifferentArraySize.

The ImplementationDataTypeElement shall aggregate another ImplementationDataTypeElement that fulfills the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall not be defined.
- The attribute ImplementationDataTypeElement.category shall be set to the value ARRAY.
- The attribute ImplementationDataTypeElement.arraySize shall not be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall not be defined.

The **aggregation chain is continued** by a (possibly empty) sequence of a pair of ImplementationDataTypeElements with the following characteristics:

- The first ImplementationDataTypeElement in the pair shall fulfill all the following conditions:
  - The attribute ImplementationDataTypeElement.category shall be set to STRUCTURE.
  - The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.
  - The attribute ImplementationDataTypeElement.arraySize shall be defined.
  - The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value allIndicesDifferentArraySize.
- The second ImplementationDataTypeElement in the pair shall fulfill all the following conditions:
  - The attribute ImplementationDataTypeElement.arraySizeSemantics shall not be defined.
  - The attribute ImplementationDataTypeElement.category shall be set to the value ARRAY.
  - The attribute ImplementationDataTypeElement.arraySize shall not be defined.
  - The attribute ImplementationDataTypeElement.arraySizeHandling shall not be defined.

The **terminating** ImplementationDataTypeElement in the aggregation chain shall fulfill all the following conditions:

- The attribute ImplementationDataTypeElement.arraySizeSemantics shall be set to the value variableSize.
- The attribute ImplementationDataTypeElement.arraySize shall be defined.
- The attribute ImplementationDataTypeElement.arraySizeHandling shall be set to the value allIndicesSameArraySize.

⌋

[constr_1396] Restriction for the value of attribute category for non-terminating ImplementationDataTypeElements taken to model a Variable-Size Array Data Type

Imposition time: CP: IT_CpgExe

⌈The value of attribute category for non-terminating ImplementationDataTypeElements taken to model a Variable-Size Array Data Type shall **not** be set to TYPE_REFERENCE.⌋

[constr_1322] Size Indicator for undefined dynamicArraySizeProfile

Imposition time: CP: IT_CpgExe

⌈If the ImplementationDataType.dynamicArraySizeProfile does not exist but the ImplementationDataType is mapped to an ApplicationArrayDataType where the attribute ApplicationArrayDataType.dynamicArraySizeProfile exists, then the ImplementationDataType shall have the category STRUCTURE, representing a Variable-Size Array Data Type with Size Indicator enabled.⌋

[TPS_SWCT_01617] Structure of an ImplementationDataType that represents a variable-sized array data type ⌈The ImplementationDataType that represents a Variable-Size Array Data Type shall have the category STRUCTURE that has two subElements.

The role of the subElements in defining a Variable-Size Array Data Type is specified by [TPS_SWCT_01618], [TPS_SWCT_01619], [TPS_SWCT_01620], and [TPS_SWCT_01621].⌋

[TPS_SWCT_01618] Size Indicator for dynamicArraySizeProfile set to VSA_LINEAR, VSA_SQUARE, or VSA_FULLY_FLEXIBLE ⌈If an ImplementationDataType is mapped to an ApplicationArrayDataType which has the attribute dynamicArraySizeProfile set to the value VSA_LINEAR, VSA_SQUARE or VSA_FULLY_FLEXIBLE, the **first** ImplementationDataType.subElement shall be an integer large enough to hold the maximum number of valid elements of the variable size array (according to maxNumberOfElements).

This is the Size Indicator which holds the current number of valid elements of the variable size array.⌋

[TPS_SWCT_01647] Size Indicator for dynamicArraySizeProfile set to VSA_LINEAR, VSA_SQUARE, or VSA_FULLY_FLEXIBLE if only ImplementationDataType is present ⌈For each ImplementationDataType which has the attribute dynamicArraySizeProfile set to the value VSA_LINEAR, VSA_SQUARE, or VSA_FULLY_FLEXIBLE, the first ImplementationDataType.subElement shall be an integer large enough to hold the maximum number of valid elements of the variable size array (according to arraySize).

This is the Size Indicator which holds the current number of valid elements of the Variable-Size Array Data Type.⌋

[TPS_SWCT_01619] Size Indicator for dynamicArraySizeProfile set to VSA_RECTANGULAR ⌈If an ImplementationDataType is mapped to an ApplicationArrayDataType where the attribute ApplicationArrayDataType.dynamicArraySizeProfile exists and is set to the value VSA_RECTANGULAR, the **first** ImplementationDataType.subElement shall be an ImplementationDataTypeElement with the category set to ARRAY and the attribute arraySize set to a value equal to the number of the corresponding dimension of the corresponding ApplicationDataType.⌋

[TPS_SWCT_01648] **Size Indicator for dynamicArraySizeProfile set to VSA_RECTANGULAR if only ImplementationDataType is present** ⌈For each ImplementationDataType where the attribute ImplementationDataType.dynamicArraySizeProfile exists and is set to the value VSA_RECTANGULAR, the **first** ImplementationDataType.subElement shall be an ImplementationDataTypeElement with the category set to ARRAY and the attribute arraySize set to a value equal to the size of the corresponding dimension of the rectangular array.⌋

[TPS_SWCT_01620] **Size Indicator for dynamicArraySizeProfile set to VSA_RECTANGULAR** ⌈The elements of this Size Indicator array shall consist of integers large enough to hold the maximum number of valid elements (according to maxNumberOfElements).⌋

This array holds the Size Indicators of all dimensions.

[TPS_SWCT_01621] **Payload for dynamicArraySizeProfile** ⌈If an ImplementationDataType is mapped to an ApplicationArrayDataType where the attribute dynamicArraySizeProfile exists, the **second** ImplementationDataType.subElement shall be an array which can hold the data of the variable size array with all dimensions defined for the ApplicationDataType.

The category shall be set to ARRAY and arraySize shall be set to maxNumberOfElements of the corresponding ApplicationArrayDataType.⌋

[TPS_SWCT_01649] **Payload for dynamicArraySizeProfile if only ImplementationDataType is present** ⌈Each ImplementationDataType where the attribute dynamicArraySizeProfile exists shall aggregate a second ImplementationDataType.subElement with the category set to ARRAY.⌋

Examples of defining variable-size arrays are given in Chapter B.1.3.

An ImplementationDataType is also allowed to have SwDataDefProps (this feature is inherited from AutosarDataType), i.e. it can define various specific structural and semantic attributes. [constr_1015] shows which SwDataDefProps are typically used here.

[TPS_SWCT_01257] **ImplementationDataType or the aggregated ImplementationDataTypeElements do not form closed sets** ⌈An ImplementationDataType or the aggregated ImplementationDataTypeElements do not form closed sets but refer to further type definitions in one of four distinct ways, depending on whether the type is implemented via a base type, a data or function pointer, or a reference to another implementation data type:

1. Reference to an underlying SwBaseType corresponds to category VALUE.
2. Reference to BswModuleEntry in SwPointerTargetProps corresponds to category FUNCTION_REFERENCE.

3. SwDataDefProps in SwPointerTargetProps corresponds to category DATA_REFERENCE.
4. Reference to another ImplementationDataType corresponds to category TYPE_REFERENCE.

⌋

Finally, all the “leaves” of the complete tree formed by these references shall resolve to SwBaseTypes.

5.2.5.6 Modeling of Pointer using Implementation Data Type

[TPS_SWCT_01258] Definition of a pointer to data ⌈The definition of a data pointer requires a special meta-class SwPointerTargetProps which aggregates another SwDataDefProps. This mechanism allows describing the category and properties of the pointer object itself as well as the category and properties of its target data type.⌋

[constr_1177] Allowed targetCategory for SwPointerTargetProps

Imposition time: CP: IT_CpgExe

⌈If the value of attribute targetCategory exists, then it shall be set to one of the following values:

- TYPE_REFERENCE
- FUNCTION_REFERENCE
- VALUE (only applicable if the SwPointerTargetProps.swDataDefProps refers to a SwBaseType where attribute nativeDeclaration is set to the value “void”)

⌋

As far as the AUTOSAR meta-model is concerned, a pointer to a pointer **could** in principle be implemented in two ways:

1. by defining an ImplementationDataType of category DATA_REFERENCE that aggregates SwDataDefProps in the role swDataDefProps that in turn aggregate SwPointerTargetProps in the role swPointerTargetProps with attribute targetCategory set to TYPE_REFERENCE that aggregates SwDataDefProps in the role swDataDefProps that references an ImplementationDataType of category DATA_REFERENCE.
2. by defining an ImplementationDataType of category DATA_REFERENCE that aggregates SwDataDefProps in the role swDataDefProps that in turn aggregate SwPointerTargetProps in the role swPointerTargetProps with attribute targetCategory set to DATA_REFERENCE (which is not allowed

according to [constr_1177]) that in turn aggregates SwDataDefProps in the role swDataDefProps that aggregates SwPointerTargetProps in the role swPointerTargetProps that references an ImplementationDataType of category e.g. VALUE.

[constr_1254] Definition of a pointer to a pointer

Imposition time: CP: IT_CpgExe

⌈AUTOSAR does **not** support the definition of a pointer to a pointer by defining an ImplementationDataType of category DATA_REFERENCE that aggregates SwDataDefProps in the role swDataDefProps that in turn aggregate SwPointerTargetProps in the role swPointerTargetProps with attribute targetCategory set to DATA_REFERENCE that in turn aggregates SwDataDefProps in the role swDataDefProps that aggregates SwPointerTargetProps in the role swPointerTargetProps that references an ImplementationDataType of category e.g. VALUE.⌋

For clarification, the AUTOSAR RTE does not support a definition of a pointer to a pointer by way of option 2 anyway. For all intents and purposes, [constr_1254] merely reflects this restriction on the level of AUTOSAR models.

Option 1 (which is also featured in Figure B.8) is the only viable way that is explicitly supported by the [2, SWS RTE].

[TPS_SWCT_01259] Definition of a pointer to a function ⌈An ImplementationDataType or one of its sub-elements can also describe a function pointer. This completes its ability to declare all kinds of local data and possible arguments used in library calls.

A function pointer is defined by the category FUNCTION_REFERENCE and the association SwPointerTargetProps.functionPointerSignature that refers to a BswModuleEntry. The latter essentially describes the signature of a function as explained in the [6, TPS BSW Module Description Template].⌋

Class	**SwPointerTargetProps**			
Note	This element defines, that the data object (which is specified by the aggregating element) contains a reference to another data object or to a function in the CPU code. This corresponds to a pointer in the C-language. The attributes of this element describe the category and the detailed properties of the target which is either a data description or a function signature.			
Base	*ARObject*			
Aggregated by	SwDataDefProps.swPointerTargetProps			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	**SwPointerTargetProps**			
functionPointer Signature	BswModuleEntry	0..1	ref	The referenced BswModuleEntry serves as the signature of a function pointer definition. Primary use case: function pointer passed as argument to other function. **Tags:** atp.Splitkey=functionPointerSignature xml.sequenceOffset=40 This Attribute is only used by the AUTOSAR Classic Platform.
swDataDef Props	SwDataDefProps	0..1	aggr	The properties of the target data type. **Tags:** atp.Splitkey=swDataDefProps xml.sequenceOffset=30
targetCategory	Identifier	0..1	attr	This specifies the category of the target: • In case of a data pointer, it shall specify the category of the referenced data. • In case of a function pointer, it could be used to denote the category of the referenced BswModuleEntry. **Tags:** xml.sequenceOffset=5

Table 5.19: SwPointerTargetProps

An `ImplementationDataType` manifests itself in the source code of an RTE into which a `DataPrototype` typed by the `ImplementationDataType` is deployed. This implies potential naming conflicts if `ImplementationDataType`s that have identical `shortName`s are deployed into a specific RTE.

[TPS_SWCT_01194] Symbolic name of an `ImplementationDataType` ⌈To mitigate this potential hazard, it is possible to provide the `ImplementationDataType` along with an accompanying symbolic name that can be used for resolving the name clash.

The symbolic name is provided by means of the attribute `symbol` of the meta-class `SymbolProps` owned by `ImplementationDataType` in the role `symbolProps`.⌋

Class	***ImplementationProps*** (abstract)			
Note	Defines a symbol to be used as (depending on the concrete case) either a complete replacement or a prefix when generating code artifacts.			
Base	*ARObject*, *Referrable*			
Subclasses	BswSchedulerNamePrefix, ExecutableEntityActivationReason, SectionNamePrefix, SymbolProps, SymbolicNameProps			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
symbol	CIdentifier	0..1	attr	The symbol to be used as (depending on the concrete case) either a complete replacement or a prefix.

Table 5.20: ImplementationProps

For more information on `symbolProps`, refer to Figure 5.17.

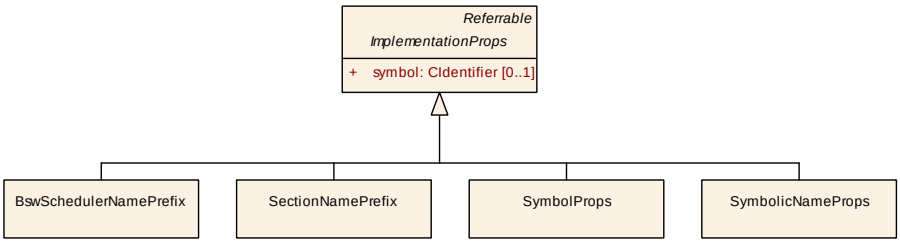

Figure 5.18: `ImplementationProps` and its subclasses

[constr_1909] Existence of attribute `ImplementationProps.symbol`

Imposition time: CP: `IT_CpgExe`

⌈For each `ImplementationProps`, the attribute `symbol` shall exist.⌋

Class	**SymbolProps**			
Note	This meta-class represents the ability to attach with the symbol attribute a symbolic name that is conform to C language requirements to another meta-class, e.g. `AtomicSwComponentType`, that is a potential subject to a name clash on the level of RTE source code.			
Base	*ARObject*, *ImplementationProps*, *Referrable*			
Aggregated by	Allocator.namespace, ApApplicationErrorDomain.namespace, *AtomicSwComponentType*.symbolProps, *CppImplementationDataType*.namespace, ImplementationDataType.symbolProps, *Port Interface*.namespace, SecurityEventDefinition.eventSymbolName, TraceSwitchConfig.namespace			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.21: SymbolProps

Examples of defining “typedefs” are given in Chapter B.1.6.

5.2.6 Base Type

5.2.6.1 Big Picture

From the terminology point of view, the definition of a base type as a “type” is slightly misleading in that it certainly has a type-nature, but does not necessarily represent a full-scale data type.

In the context of the software domain, this base type is not a self-contained level of definition of a data type. Instead, some of the attributes of a base type (represented by meta-class `SwBaseType`) provide “low-level”[10] aspects to the definition of an `ImplementationDataType`.

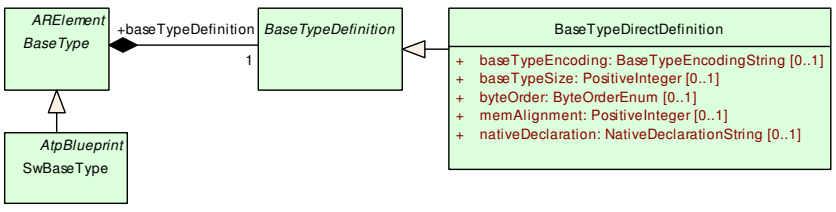

Figure 5.19: `BaseType`

[10] As in: close to the bare metal

However, other parts of the AUTOSAR meta-model beyond the definition of data types also require similar “low-level” information. Consequently, SwBaseType is also used for modeling these aspects, for example:

- Definition of axes for maps and curves
- Definition of record layout
- Definition of signal properties on communication buses (see [9, TPS System Template])
- Definition of properties of diagnostic telegrams (see [21, TPS Diagnostic Extract Template])
- Definition of log and trace messages (see [22, TPS Log and Trace])
- Definition of properties relevant for measurement and calibration (see [6, TPS BSW Module Description Template])
- Definition of security events (see [23, TPS SecurityExtractTemplate])

The diversity of areas of applicability of SwBaseType (as hinted by the list in the previous paragraph) is also reflected in the set of attributes that are relevant for each area, as indicated by [TPS_SWCT_01875].

[TPS_SWCT_01875] Usage of attributes of BaseTypeDirectDefinition depending on the area of applicability ⌈

Attribute of meta-class BaseTypeDirectDefinition	ImplementationDataType	SwTextProps	ComSpec	SwCalprmAxis	SwRecordLayoutV	SystemSignal	ISignal	DiagnosticDataElement	DltArgument	McDataInstance	SecurityEventContextDataElement
baseTypeEncoding	X	X		X	X	X	X	X	X	X	X
baseTypeSize	X		X	X	X		X	X	X	X	X
byteOrder	X		X	X	X			X	X	X	X
memAlignment	X			X	X					X	
nativeDeclaration	X										

⌋

In the context of using SwBaseType to define an ImplementationDataType, the attributes

- byteOrder

- memAlignment

are used only if the ImplementationDataType represents a Platform Type.

In this document, the description of the use of SwBaseType focuses on the areas of applicability within the scope of this document, i.e.

- Definition of data types
- Definition of base points for axes for maps and curves
- Definition of the values of a particular record layout group
- Definition of network representation in the scope of a ComSpec

[constr_1910] Existence of attribute BaseType.baseTypeDefinition

Imposition time: CP: IT_CpgExe

⌈For each BaseType (which will be utilized in the form of SwBaseType), the aggregation in the role baseTypeDefinition shall exist.⌋

[TPS_SWCT_01260] Applicability of SwBaseType for the definition of data types ⌈BaseType is used to contribute low-level aspects to the definition of an ImplementationDataType. Consequently, the information carried by SwBaseType is used to generate the corresponding C-code typedefs if the attribute BaseTypeDirectDefinition.nativeDeclaration exists at the "leaves" of data type definitions.⌋

The aggregation BaseType.baseTypeDefinition affects two abstract meta-classes and is therefore never used directly. However, in order not to break the semantics of the derived meta-classes SwBaseType and BaseTypeDirectDefinition a constraint is still required.

Class	**SwBaseType**			
Note	This meta-class represents a base type used within ECU software. **Tags:** atp.recommendedPackage=BaseTypes			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *BaseType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.22: SwBaseType

Class	***BaseType*** (abstract)
Note	This abstract meta-class represents the ability to specify a platform dependent base type.
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*
Subclasses	SwBaseType
Aggregated by	ARPackage.element

▽

△

Class	***BaseType*** (abstract)			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
baseType Definition	BaseTypeDefinition	1	aggr	This is the actual definition of the base type. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=20 xml.typeElement=false xml.typeWrapperElement=false

Table 5.23: BaseType

Class	***BaseTypeDefinition*** (abstract)			
Note	This meta-class represents the ability to define a basetype.			
Base	*ARObject*			
Subclasses	BaseTypeDirectDefinition			
Aggregated by	*BaseType*.baseTypeDefinition			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.24: BaseTypeDefinition

Primitive	**BaseTypeEncodingString**
Note	This is the string denotion of a BaseType encoding. It may be refined by specific use-cases. **Tags:** xml.xsd.customType=BASE-TYPE-ENCODING-STRING xml.xsd.type=string

Table 5.25: BaseTypeEncodingString

Class	**BaseTypeDirectDefinition**			
Note	This BaseType is defined directly (as opposite to a derived BaseType)			
Base	*ARObject*, *BaseTypeDefinition*			
Aggregated by	*BaseType*.baseTypeDefinition			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
baseType Encoding	BaseTypeEncoding String	0..1	attr	This specifies, how an object of the current BaseType is encoded, e.g. in an ECU within a message sequence. **Tags:** xml.sequenceOffset=90
baseTypeSize	PositiveInteger	0..1	attr	Describes the length of the data type specified in the container in bits. **Tags:** xml.sequenceOffset=70
byteOrder	ByteOrderEnum	0..1	attr	This attribute specifies the byte order of the base type. **Tags:** xml.sequenceOffset=110
memAlignment	PositiveInteger	0..1	attr	This attribute describes the alignment of the memory object in bits. E.g. "8" specifies, that the object in question is aligned to a byte while "32" specifies that it is aligned four byte. If the value is set to "0" the meaning shall be interpreted as "unspecified". **Tags:** xml.sequenceOffset=100

▽

△

Class	**BaseTypeDirectDefinition**			
native Declaration	NativeDeclarationString	0..1	attr	This attribute describes the declaration of such a base type in the native programming language, primarily in the Programming language C. This can then be used by a code generator to include the necessary declarations into a header file. For example BaseType with shortName: "MyUnsignedInt" native Declaration: "unsigned short" Results in typedef unsigned short MyUnsignedInt; If the attribute is not defined the referring Implementation DataTypes will not be generated as a typedef by RTE. If a nativeDeclaration type is given it shall fulfill the characteristic given by basetypeEncoding and baseType Size. This is required to ensure the consistent handling and interpretation by software components, RTE, COM and MCM systems. **Tags:** xml.sequenceOffset=120

Table 5.26: BaseTypeDirectDefinition

5.2.6.2 Category

[constr_1011] `category` of `SwBaseType`

Imposition time: CP: `IT_CpgExe`

⌈For the attribute `SwBaseType.category` only the values `FIXED_LENGTH` and `VOID` are supported.⌋

[constr_1422] Value of `category` is `VOID`

Imposition time: CP: `IT_CpgExe`

⌈If the value of the attribute `SwBaseType.category` is set to `VOID`, then the attributes `baseTypeSize` and `baseTypeEncoding` shall not exist.⌋

The modeling of a string data type on the level of `ApplicationPrimitiveDataType` is **only** concerned with defining the **encoding** of the content of the **string elements**. It does not necessarily define any length information in memory.

[constr_1012] Value of `category` is `FIXED_LENGTH`

Imposition time: CP: `IT_CpgExe`

⌈If

- the value of the attribute `SwBaseType.category` is set to `FIXED_LENGTH` and
- the `SwBaseType` is **not** referenced in the role `ApplicationPrimitiveDataType.swDataDefProps.swTextProps.baseType`,

then the attribute `baseTypeSize` shall be filled with content.⌋

5.2.6.3 Native Declaration

[constr_1010] If `nativeDeclaration` does not exist

Imposition time: CP: `IT_CpgExe`

⌈If `nativeDeclaration` does not exist in the `SwBaseType`, it is required that the `shortName` (e.g. “uint8”) of the corresponding `ImplementationDataType` is equal to one of the names of the Platform or Standard Types predefined in AUTOSAR code.⌋

As a consequence of [constr_1010], if the `nativeDeclaration` does not exist, the RTE generator will **not** consider the `ImplementationDataType` for the generation of data type definitions.

Still, the compiler will be able to resolve the data type because it can fall back to the data type definitions contained in the header file for platform and standard data types that shall be included under the AUTOSAR standard.

The attribute `nativeDeclaration` shall yield a valid C data type symbol. It makes no principal difference whether this is done by a `typedef` or by using the symbol[11] of an integral data type.

Using the symbol of an integral data type as the value of `nativeDeclaration` increases the odds that the enclosing `SwBaseType` can be used independently of whether a `typedef` is available in a given context.

[TPS_SWCT_01563] Applicable values for `nativeDeclaration` ⌈To avoid portability issues, the value `nativeDeclaration` should only consist of the symbol of an integral C data type.⌋

For more information on this, refer to [24, SWS PlatformTypes].

5.2.6.4 Base Type Size

[TPS_SWCT_01444] Size of `SwBaseType` is specified in bits ⌈The value of attribute `BaseTypeDirectDefinition.baseTypeSize` is specified in bits.⌋

The value of attribute `baseTypeSize` in the context of the definition of an `ImplementationDataType` where attribute `category` is set to the value `ARRAY` is modeled as part of the `ImplementationDataTypeElement`.

Because the value of `baseTypeSize` is defined in the context of the `SwDataDefProps` referenced by the `ImplementationDataTypeElement`, it should be clear that this value is **not supposed to determine the size of the entire array in bits**. Instead, it is dedicated to specifying the **size of a primitive element of the array in bits**.

[11] Note that the symbol does not necessarily have to consist of a single token, i.e. for all intents and purposes (for example) `unsigned char` is also considered the symbol of an integral C data type.

An example definition of ImplementationDataType where attribute category is set to the value ARRAY and the corresponding SwBaseType can be found in Chapter B.1.7.

[TPS_SWCT_01861] Specification of baseTypeSize in the context of an ImplementationDataType where attribute category is set to ARRAY ⌈In the context of the definition of an ImplementationDataType, where attribute category is set to ARRAY, the conditions for the definition of baseTypeSize depend on the nature of the ImplementationDataTypeElement:

- If the ImplementationDataTypeElement represents a primitive data type (i.e. category is set to VALUE or to TYPE_REFERENCE where eventually an ImplementationDataType of category VALUE is referenced): The value of attribute baseTypeSize that is defined in the context of the definition of an ImplementationDataType where attribute category is set to ARRAY applies to the **size of an element of the array data type**.
- If the ImplementationDataTypeElement represents a composite data object (i.e. the ImplementationDataTypeElement that represents the element of the array has attribute category set to STRUCTURE or ARRAY), then attribute baseTypeSize shall only be used on deeper levels of the hierarchy.
- If the ImplementationDataTypeElement is typed as a composite data type (i.e. the ImplementationDataTypeElement that represents the element of the array has attribute category set to TYPE_REFERENCE, where eventually an ImplementationDataType of category STRUCTURE or ARRAY is referenced), then the definition of attribute baseTypeSize is delegated to deeper levels of the referenced ImplementationDataType.

⌋

The understanding specified in [TPS_SWCT_01861] is also helpful in terms of model economics. If the value were supposed to define the size of the entire array, it would typically be necessary to create a lot of additional SwBaseTypes for this purpose.

Because the value is meant per element, it is possible to reuse an SwBaseType that most likely already exists, since the code that accesses the array also needs to deal with the element data type anyway.

5.2.6.5 Base Type Encoding

The attribute baseTypeEncoding specifies how the values of the base type are encoded.

[TPS_SWCT_01845] Supported value encodings for SwBaseType ⌈The supported values for attribute BaseTypeDirectDefinition.baseTypeEncoding are:

- 2C: Two's complement

- DSP-FRACTIONAL: Digital Signal Processor
- IEEE754: floating-point numbers
- ISO-8859-1: single-byte coded character
- ISO-8859-2: single-byte coded character
- WINDOWS-1252: single-byte coded character
- UTF-8: UCS Transformation Format 8
- UTF-16: Character encoding for Unicode *code points* based on 16 bit *code units*, as documented in [13, ISO 10646]
- UCS-2: Universal Character Set 2
- NONE: Unsigned Integer
- VOID: corresponds to a void in C. The encoding is not formally specified here.
- BOOLEAN: This represents an unsigned integer to be interpreted as boolean. The value shall be interpreted as `true` if the value of the unsigned integer is 1 and it shall be interpreted as `false` if the value of the unsigned integer is 0.

  A CompuMethod shall be referenced by the corresponding AutosarDataType that implements the common sense behind the boolean concept, i.e. define a TEXTTABLE with two CompuScales, e.g. `true` –> 1, `false` –> 0.

⌋

Restrictions apply to the use of some values of attribute BaseTypeDirectDefinition.baseTypeEncoding, as documented in [constr_10383].

[TPS_SWCT_01876] Minimum value of baseTypeSize for a given baseTypeEncoding ⌈

baseTypeEncoding	Minimum value of baseTypeSize
2C	8
DSP-FRACTIONAL	8
IEEE754	32
ISO-8859-1	8
ISO-8859-2	8
WINDOWS-1252	8
UTF-8	8
UTF-16	16
UCS-2	16
NONE	8
VOID	
BOOLEAN	8

⌋

At least for the use of SwBaseType in the context of software, there is an obvious relation between the definition of the baseTypeSize and the baseTypeEncoding such that there is a minimum value that needs to be defined for the definition of the baseTypeSize for certain values of baseTypeEncoding, see [TPS_SWCT_01876].

It is still possible to use objects that are larger than required for storing information that occupies only a part of the data object.

Example 5.1

It would be possible to put UTF-8-encoded information into a 64-bit wide data object. But in this case, only 8 bits of the 64-bit object would actually be usable. The rest is wasted.

A motivation for such a choice may be that the underlying hardware is faster or only capable of word-based addressing, which means that storing the UTF-8 information in a single 8-bit-wide data object might not be possible.

In other words, using a 64-bit data object to host information encoded as UTF-8 does not mean that the object is filled with UTF-8 information, thereby forming some sort of array of UTF-8-encoded information.

In AUTOSAR, an array has to be defined as an array data type, i.e. ApplicationArrayDataType or ImplementationDataType where attribute category is set to the value ARRAY.

5.2.6.6 Relation between Base Type Size, Base Type Encoding and Internal Constraint

The combination of the values of attributes baseTypeSize and baseTypeEncoding set to any of

- 2C
- NONE
- DSP-FRACTIONAL
- IEEE754

impose a restriction in terms of the possible numerical values that can be stored in an ImplementationDataType where attribute category is not set to TYPE_REFERENCE that refers to an SwBaseType with the given combination of values for baseTypeSize and baseTypeEncoding.

In other words, the possible values of

- ImplementationDataType.swDataDefProps.dataConstr.dataConstrRule.internalConstrs.lowerLimit
- ImplementationDataType.swDataDefProps.dataConstr.dataConstrRule.internalConstrs.upperLimit

are directly controlled by the combination of values for baseTypeSize and baseTypeEncoding.

For example, an ImplementationDataType that represents an 8-bit unsigned integer data type, where the value of InternalConstrs.lowerLimit is set to -20 and the value of InternalConstrs.upperLimit is set to 1000, can cause harm if this misconfiguration goes undetected.

To avoid potential harm from misconfigured values of InternalConstrs.lowerLimit and InternalConstrs.upperLimit, [constr_10792] is defined.

[constr_10792] Relation between baseTypeSize, baseTypeEncoding and InternalConstrs

Imposition time: CP: IT_CpgExe

⌈

baseTypeEncoding	Lowest InternalConstrs.lowerLimit	Highest InternalConstrs.upperLimit
NONE	0	$2^{baseTypeSize} - 1$
2C	$-2^{baseTypeSize-1}$	$2^{baseTypeSize-1} - 1$
IEEE754 (32 bit)	$-3.4 * 10^{38}$	$3.4 * 10^{38}$
IEEE754 (64 bit)	$-1.8 * 10^{308}$	$1.8 * 10^{308}$
DSP-FRACTIONAL	-1.0	1.0

⌋

5.2.6.7 Byte Order and Memory Alignment

[TPS_SWCT_01262] memAlignment and byteOrder are platform-specific ⌈The values of attributes BaseTypeDirectDefinition.memAlignment and BaseTypeDirectDefinition.byteOrder are platform-specific and therefore should be set only in use cases where this is really needed.

These attributes shall be considered as optional.

If a SwBaseType is platform-specific, then the ImplementationDataType and software-component descriptions built on top of it also become platform-specific.⌋

However, there are use cases for SwBaseType where this does not matter: especially the calibration support format which is generated in ECU-specific scope (and also contains SwBaseType, see the [6, TPS BSW Module Description Template]) could well be platform-specific.

Further regulations apply if the value UTF-16 is used for setting the attribute BaseTypeDirectDefinition.baseTypeEncoding:

[constr_1398] Existence of attributes of `BaseTypeDirectDefinition`

Imposition time: CP: `IT_CpgExe`

⌈If the value of attribute `BaseTypeDirectDefinition.baseTypeEncoding` is set to `UTF-16` then the attribute `BaseTypeDirectDefinition.byteOrder` shall exist.

The only allowed values of `BaseTypeDirectDefinition.byteOrder` in this case are `mostSignificantByteFirst` and `mostSignificantByteLast`.⌋

There is already predefined terminology (see [13, ISO 10646]) that describes the two possible cases of byte orientation in a `UTF-16`-encoded string. The connection to this terminology is defined by [TPS_SWCT_01651] and [TPS_SWCT_01652].

Enumeration	**ByteOrderEnum**
Note	When more than one byte is stored in the memory the order of those bytes may differ depending on the architecture of the processing unit. If the least significant byte is stored at the lowest address, this architecture is called little endian and otherwise it is called big endian. ByteOrder is very important in case of communication between different PUs or ECUs.
Aggregated by	ApSomeipTransformationProps.byteOrder, BaseTypeDirectDefinition.byteOrder, DiagnosticCommonProps.defaultEndianness, ISignalToIPduMapping.packingByteOrder, MultiplexedIPdu.selectorFieldByteOrder, PduToFrameMapping.packingByteOrder, SegmentPosition.segmentByteOrder, SOMEIPTransformationDescription.byteOrder, System.containerIPduHeaderByteOrder
Literal	***Description***
mostSignificantByteFirst	Most significant byte shall come at the lowest address (also known as BigEndian or as Motorola-Format) **Tags:** atp.EnumerationLiteralIndex=0
mostSignificantByteLast	Most significant byte shall come highest address (also known as LittleEndian or as Intel-Format) **Tags:** atp.EnumerationLiteralIndex=1
opaque	For opaque data endianness conversion has to be configured to Opaque. See AUTOSAR COM Specification for more details. **Tags:** atp.EnumerationLiteralIndex=2

Table 5.27: ByteOrderEnum

[TPS_SWCT_01651] **`UTF-16BE`** ⌈If the value of attribute `BaseTypeDirectDefinition.baseTypeEncoding` is set to `UTF-16` and the attribute `BaseTypeDirectDefinition.byteOrder` in this case is `mostSignificantByteFirst` then the `SwBaseType` corresponds to the definition of `UTF-16BE` according to the Unicode standard [13, ISO 10646].⌋

[TPS_SWCT_01652] **`UTF-16LE`** ⌈If the value of attribute `BaseTypeDirectDefinition.baseTypeEncoding` is set to `UTF-16` and the attribute `BaseTypeDirectDefinition.byteOrder` in this case is `mostSignificantByteLast` then the `SwBaseType` corresponds to the definition of `UTF-16LE` according to the Unicode standard [13, ISO 10646].⌋

A further question that needs clarification is the use of the so-called `Byte Order Mark`, which allows determining the actual byte order at run-time directly from the payload of a Unicode string.

As AUTOSAR has means to formally and comprehensively define the byte-order of any given DataPrototype that can hold a string at run time, it is **not** necessary to support a further instrument for the same purpose.

[TPS_SWCT_01653] UTF-16-encoded strings are not allowed to start with a BOM ⌈If the value of attribute BaseTypeDirectDefinition.baseTypeEncoding is set to UTF-16, then the value of a DataPrototype (which effectively represents a string) is not allowed to start with a Byte Order Mark (BOM).⌋

[TPS_SWCT_01653] removes a possible redundancy in the definition and execution of UTF-16-encoded strings.

The redundancy is regarded not only as unnecessary but also as **potentially dangerous** because it is not possible to check whether the definition is consistent with the execution at configuration time.

From a formal point of view, [TPS_SWCT_01653] does not represent an actual constraint although it is formulated as such.

However, an AUTOSAR tool would not be able to properly check the condition at configuration time and therefore this rule is published as a specification item.

5.2.7 Data Type Terminology

There are uses of data types that on the one hand need a handy term (because this kind of data type is used a lot) but on the other hand cannot easily be expressed in simple terms of meta-model elements (like ApplicationDataType).

Therefore, it is not an option to fully describe the characteristics of these kinds of data types precisely every time one of these is used. A definition of terminology is supposed to associate the mentioned kinds of data types with the term under which their use shall be paraphrased.

5.2.7.1 Primitive Type

In some cases it is necessary to constrain the applicability of data types to primitive C data types. It would be possible to describe the characteristics of eligible AutosarDataTypes at every single place in an AUTOSAR specification where this specific limitation applies.

However, this may end up in lengthy and potentially inconsistent descriptions at different places within AUTOSAR specifications. Therefore, this chapter provides a canonical definition of a primitive data type that can be referred to from other places.

[TPS_SWCT_01564] Non-recursive definition of a primitive data type ⌈An AutosarDataType is considered a primitive data type if the following conditions apply:

- it is an ApplicationPrimitiveDataType of category VALUE or BOOLEAN
- it is an ImplementationDataType of category VALUE

⌋

[TPS_SWCT_01565] Recursive definition of a primitive data type ⌈An AutosarDataType is considered a primitive data type if the following conditions apply:

- it is an AutosarDataType according to [TPS_SWCT_01564]
- it is an AutosarDataType of category TYPE_REFERENCE that, after all type-references have been resolved, boils down to an AutosarDataType according to [TPS_SWCT_01564].

⌋

5.2.7.2 Compound Primitive Data Type

[TPS_SWCT_01179] Compound Primitive Data Type ⌈For clarification, a "compound primitive data type" is an ApplicationPrimitiveDataType of category STRING, CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, RES_AXIS, and VAL_BLK.

This implies the existence of a swRecordLayout owned by the swDataDefProps of the ApplicationPrimitiveDataType that defines the mapping to a corresponding ImplementationDataType.

The main characteristic of the "compound primitive data type" is that with respect to the application data type layer its data type is considered a primitive data type, but when it comes to the implementation data type layer, the type is implemented as a composite data type according to the applicable SwRecordLayout.⌋

The main reason for emphasizing "primitive" in the term Compound Primitive Data Type is that the user of a Compound Primitive Data Type accesses an object typed by a Compound Primitive Data Type only via an **interpolation method that returns a data object typed by a primitive data type**.

Properties of a Compound Primitive Data Type with respect to the definition of an invalidValue are described in Chapter 5.4.2.

A Compound Primitive Data Type is typically created with a "measurement and calibration mindset" that focuses on two aspects:

- data semantics
- memory layout

This is one of the reasons why the SwRecordLayout is referenced by (and thereby becoming an integral part of the definition of) the ApplicationDataType.

5.2.7.3 Integral Primitive Type

The SenderReceiverToSignalMapping (see [9, TPS System Template]) allows for the integral mapping of a piece of data to a single SystemSignal. The specification of [20, SWS Com] imposes certain requirements on the characteristics of data that apply for the integral mapping.

[TPS_SWCT_01477] Integral Primitive Types ⌈Data types that qualify for being used in the context of a SenderReceiverToSignalMapping shall be called Integral Primitive Types.⌋

[constr_1229] category of ImplementationDataType boils down to VALUE

Imposition time: CP: IT_CpgExe

⌈An ImplementationDataType qualifies as an Integral Primitive Type if and only if either

- its category is VALUE or TYPE_REFERENCE that eventually boils down to VALUE **or**
- its category is ARRAY **and** it has only one subElement **and** one of the following conditions applies:
  - subElement.category is set to VALUE or TYPE_REFERENCE that eventually boils down to VALUE **and** the subElement refers to a SwBaseType where baseTypeSize is set to the value 8 **and** the baseTypeEncoding is set to NONE.
  - subElement.category is set to TYPE_REFERENCE **and** the swDataDefProps.implementationDataType literally represents the Platform Data Type named “uint8”.
  - subElement.category is set to TYPE_REFERENCE **and** the attribute swDataDefProps.implementationDataType.shortName is set to “uint8” **and** swDataDefProps.baseType.baseTypeDefinition.nativeDeclaration does not exist.

⌋

[constr_1230] ApplicationDataType that qualifies for Integral Primitive Type

Imposition time: CP: IT_CpgExe

⌈An ApplicationDataType qualifies as an Integral Primitive Type if and only if **all** the following conditions apply:

- ApplicationDataType.category is set to BOOLEAN, VALUE, STRING, or ARRAY
- in the applicable scope a DataTypeMap is available that refers to the given ApplicationDataType

- the found DataTypeMap refers to an ImplementationDataType that fulfills the requirements of [constr_1229]

⌋

5.2.7.4 Variable-Size Array Data Type

The definition of and further explanation regarding the term Variable-Size Array Data Type can be found in Chapter 2.8.

5.2.7.5 Wrapped Union Data Type

There are use cases for sending a DataPrototype that is effectively typed by a **union** data type over a communication network. In this case, however, it is necessary not only to send the DataPrototype itself but also to add information about the applicable member of the union as a form of "meta-data" to the transmission.

By this means the sender can identify the applicable member of the union and the receiver can accordingly access the proper union element.

It is the nature of union data types that executable code shall **symmetrically** access the union, i.e. the member that was written needs to be read, the use of a union as a "type converter" is heavily frowned upon (because it causes unspecified behavior from [25, ISO-C:99] point of view) and shall be discouraged by AUTOSAR.

Thus, AUTOSAR needs to take this condition into account and define a specific modeling for the handling of union data types.

[TPS_SWCT_01700] Definition of unions that can be transmitted over a communication network ⌈If it is intended to send a data object typed by a union data type over a communication bus, then a specific modeling is required for this purpose.

- The union data type shall never be used as such; it shall always be enclosed in an ImplementationDataType of category STRUCTURE that aggregates exactly two ImplementationDataTypeElements:
  - The **first** ImplementationDataTypeElement shall be used to identify the applicable element of the actual union data type.

    The shortName of this element shall be set to "**memberSelector**", it shall be of category VALUE, or of category TYPE_REFERENCE that finally boils down to category VALUE.

    Furthermore, it shall refer to a SwBaseType with attribute baseTypeEncoding set to NONE and attribute baseTypeSize set to the value 8, 16, or 32.

This ImplementationDataTypeElement shall be called the Member Selector.

– The **second** ImplementationDataTypeElement shall be of category UNION, it represents the actual union “payload”.

- The purpose of the Member Selector is to identify the element of the union data type that applies for a given access to the union.

  If the value of the Member Selector is set to 1 then the first subElement of the ImplementationDataType of category UNION is applicable.

  If the value of the Member Selector is set to 2 then the second subElement is applicable and so on.

- The value of the Member Selector shall range between **the value 1** and the number of subElements of the ImplementationDataTypeElement of category UNION. Once again, the index counting is 1-based!

- Obviously, the actual data type used to hold the Member Selector shall be capable of storing a value that corresponds to the number of subElements of the ImplementationDataTypeElement of category UNION.

- Constraint [constr_1441] applies.

⌋

[TPS_SWCT_01701] Wrapped Union Data Type ⌈Data types that fulfill the requirements of [TPS_SWCT_01700] shall be called Wrapped Union Data Types.⌋

[constr_1442] category TYPE_REFERENCE shall not be used for modeling the “payload” of a Wrapped Union Data Type

Imposition time: CP: IT_CpgExe

⌈For the modeling of the “payload” part of a Wrapped Union Data Type it shall not be possible to use an ImplementationDataTypeElement of category TYPE_REFERENCE that finally (i.e. after all possible indirections are resolved) boils down to category UNION.⌋

The definition of the Wrapped Union Data Type represents the **canonical way** of how union data types shall be used in AUTOSAR on the application and communication level. Consequently, the use of the category value UNION is effectively limited to an ImplementationDataTypeElement.

[constr_1444] Limited applicability of Wrapped Union Data Type

Imposition time: CP: IT_CpgExe

⌈There is no support for the use of Wrapped Union Data Type in PortInterfaceMappings or Diagnostics.⌋

For the time being, AUTOSAR restricts the initialization of a union data type to the first member of the union data type, see [constr_1445].

A simplified example for the definition of a Wrapped Union Data Type can be found in Chapter B.1.4.

One obvious consequence of this restriction is that for any given ValueSpecification taken to initialize a Wrapped Union Data Type, the value of the Member Selector is **strictly** locked to 1.

[constr_1445] Initialization of the Member Selector of a Wrapped Union Data Type

Imposition time: CP: IT_CpgExe

⌈The initValue for the Member Selector shall **never be set to any value other than 1**.⌋

Another aspect of the initialization of a Wrapped Union Data Type is that the "payload" part cannot be treated as a composite data type unless the first element of the "payload" part is typed by a composite data type.

In other words, it is not possible to initialize the first subElement of an ImplementationDataTypeElement of category UNION. It is only possible to assign an initial value to the "payload" part itself.

[TPS_SWCT_01702] Initialization of the "payload" of a Wrapped Union Data Type ⌈The initValue for the ImplementationDataTypeElement of category UNION shall be assigned to the ImplementationDataTypeElement of category UNION but it shall reflect the structure of the first subElement of the ImplementationDataTypeElement of category UNION.⌋

In other words, if the first subElement of the ImplementationDataTypeElement of category UNION is of a primitive type then a NumericalValueSpecification shall be used to initialize the ImplementationDataTypeElement of category UNION.

If the subElement is typed by a composite data type then a CompositeValueSpecification shall be used to initialize the ImplementationDataTypeElement of category UNION.

To summarize the initialization issue, a Wrapped Union Data Type is modeled as a structure of two elements and requires a RecordValueSpecification that in turn aggregates two ValueSpecifications, one for the Member Selector that shall have no other value than 1, and one for the "payload".

The structure of the second ValueSpecification depends on the data type used for the first element of the "payload".

5.2.7.6 Optional Element Structure

As already mentioned in Chapter 2.9, there are use cases for structured data types that contain optional elements that may or may not exist at a given time.

These data types require a specific modeling on both the level of ApplicationDataType and the level of ImplementationDataType.

[TPS_SWCT_01775] Structured data types with optional elements ⌈A structured data type that contains at least one optional element shall be called an Optional Element Structure.⌋

On the level of ApplicationDataType, the existence of optional elements is signaled by setting the attribute ApplicationRecordElement.isOptional to true. For more details, refer to Chapter 5.2.4.2.2.

The description of how an Optional Element Structure shall be modeled using ImplementationDataType can be found in Chapter 5.2.5.3.1.

5.2.7.7 Compu Scale Literal

The CompuMethod applied to an ApplicationDataType may include *discrete point ranges*.

This means that a numerical value (on the implementation side) is associated with a textual value on the physical side. The value on the physical side can have different meanings, depending on the context in which it is used.

The already identified contexts are:

- the use as a so-called CompuScale Code Symbolic Name, as defined by [TPS_SWCT_01569] or
- the use as a so-called CompuScale Value Symbolic Name, as defined by [TPS_SWCT_01696] or
- the use as a CompuScale.a2lDisplayText, as defined in Chapter 5.5.1.9.

Because it is sometimes cumbersome to subsume all applicable contexts in a description, it is considered useful to define a technical term that acts as a “base-class” for all the meanings in the different contexts.

This technical term is defined as Compu Scale Literal. This means that wherever the term Compu Scale Literal is used, any of the listed contexts could apply.

5.3 Data Prototypes

5.3.1 Overview

[TPS_SWCT_01264] Data prototypes implement a role of a data type ⌈Generally speaking, a data prototype represents the implementation of a role of a data type within the definition of another data type, e.g. a “typed” data object declared within a software-component or a port interface.

This means formally that it has an is-of-type relation to a data type and is usually aggregated by another element, e.g. the internal behavior or a port interface.⌋

In the meta-model, various kinds of data prototypes are derived from the abstract DataPrototype as shown in Figure 5.20.

The reason for the introduction of this hierarchy was the distinction between AutosarDataPrototype (which can be used for the application and implementation types as well) and ApplicationCompositeElementDataPrototype (which is restricted to be used within the application types).

Because these DataPrototypes are modeled as own meta-classes, it is possible to define own attributes for them (on M2) which (in the M1 model) could extend or constrain the attribute values already set via the corresponding data type.

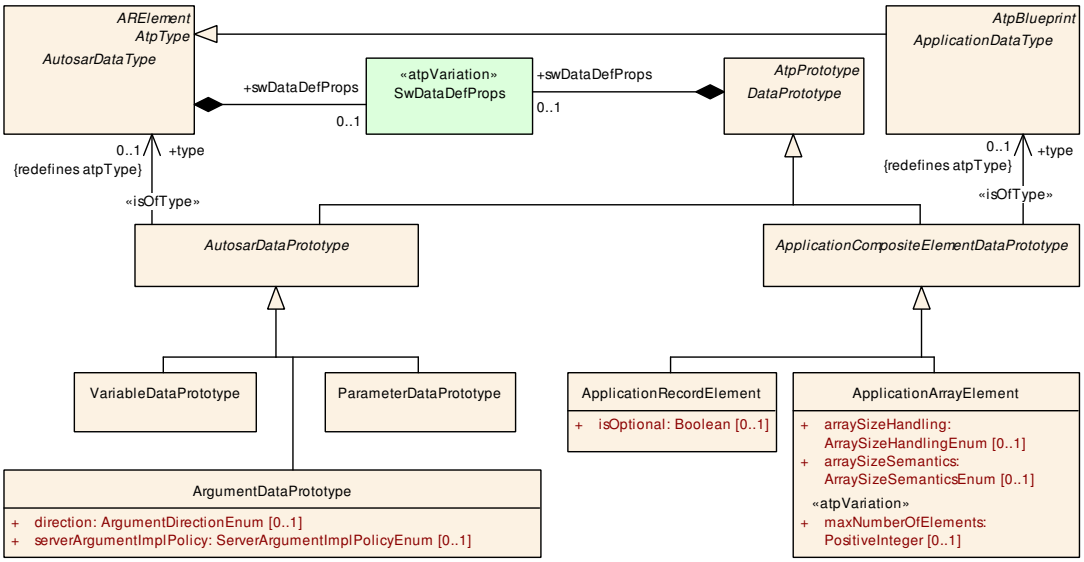

Figure 5.20: Data Prototypes Overview

[TPS_SWCT_01265] DataPrototype aggregates an own set of SwDataDefProps ⌈This mechanism is used here in the way that DataPrototype aggregates an own set of SwDataDefProps. Thus, each kind of DataPrototype has the ability to extend or even overwrite the SwDataDefProps already defined by its ApplicationDataType or ImplementationDataType.

This mechanism, if carefully applied, allows for better reuse of data types because they can be kept free of the properties which vary according to the context or are defined in later project phases.⌋

Chapter 5.4 describes more details about this aspect of the meta-model.

Class	***DataPrototype*** (abstract)			
Note	Base class for prototypical roles of any data type.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	*ApplicationCompositeElementDataPrototype*, *AutosarDataPrototype*			
Aggregated by	*AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
swDataDef Props	SwDataDefProps	0..1	aggr	This property allows to specify data definition properties which apply on data prototype level. **Tags:** atp.Splitkey=swDataDefProps

Table 5.28: DataPrototype

Class	***AutosarDataPrototype*** (abstract)			
Note	Base class for prototypical roles of an `AutosarDataType`.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *DataPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	ArgumentDataPrototype, ParameterDataPrototype, VariableDataPrototype			
Aggregated by	*AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
type	AutosarDataType	0..1	tref	This represents the corresponding data type. **Stereotypes:** isOfType **Tags:** atp.Splitkey=type

Table 5.29: AutosarDataPrototype

The existence of the reference in the role `AutosarDataPrototype.type` is governed by [constr_2633].

Class	***ApplicationCompositeElementDataPrototype*** (abstract)			
Note	This class represents a data prototype which is aggregated within a composite application data type (record or array). It is introduced to provide a better distinction between target and context in instance Refs.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *DataPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	ApplicationArrayElement, ApplicationRecordElement			
Aggregated by	*AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
type	ApplicationDataType	0..1	tref	This represents the corresponding data type. **Stereotypes:** isOfType **Tags:** atp.Splitkey=type

Table 5.30: ApplicationCompositeElementDataPrototype

The existence of the reference in the role `ApplicationCompositeElementDataPrototype.type` is governed by [constr_2633].

[constr_1289] Allowed Attributes vs. category for DataPrototypes typed by ApplicationDataTypes

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈

Attributes of SwDataDefProps	Root El.			Attribute Existence per Category												
	DataPrototype	InstantiationDataDefProps	ParameterAccess	VALUE	VAL_BLK	STRUCTURE	ARRAY	STRING	BOOLEAN	COM_AXIS	RES_AXIS	CURVE	MAP	CUBOID	CUBE_4	CUBE_5
additionalNativeTypeQualifier																
annotation	x	x	x	*	*	*	*	*	*	*	*	*	*	*	*	*
baseType																
compuMethod																
dataConstr.dataConstrRule.physConstrs	x	x		0..1	0..1		0..1		0..1			0..1	0..1	0..1	0..1	0..1
dataConstr.dataConstrRule.internalConstrs	x	x		d/c[1]	d/c		d/c		d/c			d/c	d/c	d/c	d/c	d/c
displayFormat	x	x		0..1	0..1		0..1	0..1	0..1			0..1	0..1	0..1	0..1	0..1
displayPresentation	x	x		0..1	0..1		0..1			0..1	0..1	0..1	0..1	0..1	0..1	0..1
implementationDataType																
invalidValue																
stepSize	x	x	x	0..1	0..1		0..1			0..1	0..1	0..1	0..1	0..1	0..1	0..1
swAddrMethod	x	x		0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1
swAlignment	x	x		0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1
swBitRepresentation																
swCalibrationAccess	x	x		0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1
swCalprmAxisSet																
swCalprmAxisSet.swCalprmAxis/SwAxisGrouped.swCalprmRef		x	x				0..1					0..1	0..1	0..1	0..1	0..1
swCalprmAxisSet.swCalprmAxis/SwAxisIndividual.swVariableRef		x	x				0..1			0..1	0..1	0..1	0..1	0..1	0..1	0..1
swCalprmAxisSet.swCalprmAxis/SwAxisGrouped.sharedAxisType																
swCalprmAxisSet.swCalprmAxis/SwAxisIndividual.inputVariableType																
swCalprmAxisSet.swCalprmAxis/SwAxisIndividual.unit																
swComparisonVariable			x									0..1	0..1	0..1	0..1	0..1
swDataDependency	x	x		0..1					0..1			0..1	0..1	0..1	0..1	0..1
swHostVariable																
swImplPolicy	x			0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1	0..1
swIntendedResolution																

▽

[12] don't care

△

Attributes of SwDataDefProps	Root El.			Attribute Existence per Category												
	DataPrototype	InstantiationDataDefProps	ParameterAccess	VALUE	VAL_BLK	STRUCTURE	ARRAY	STRING	BOOLEAN	COM_AXIS	RES_AXIS	CURVE	MAP	CUBOID	CUBE_4	CUBE_5
swInterpolationMethod	x	x	x	0..1						0..1	0..1	0..1	0..1	0..1	0..1	0..1
swIsVirtual	x	x		0..1					0..1			0..1	0..1	0..1	0..1	0..1
swPointerTargetProps																
swRecordLayout																
swRefreshTiming	x	x		0..1	0..1			0..1	0..1							
swTextProps																
swValueBlockSize																
swValueBlockSizeMult																
unit																
valueAxisDataType																

⌋

[TPS_SWCT_01445] Applicability of SwDataDefProps for DataPrototypes ⌈The applicability of SwDataDefProps for DataPrototypes shall follow the same rules as for the categorys of the corresponding AutosarDataTypes.⌋

The applicability of SwDataDefProps for

- ApplicationDataTypes is documented in [constr_1007].
- ImplementationDataTypes is documented in [constr_1009].

Further information can be found in [constr_1289] and [constr_1288].

[TPS_SWCT_01266] Three non-abstract classes derived from AutosarDataPrototype ⌈There are three non-abstract classes derived from AutosarDataPrototype which reflect the main use cases in the SWC-Template:

- Operation arguments (ArgumentDataPrototype) in a client-server interface.
- Variables (VariableDataPrototype) which are changed by the application software at runtime.
- Parameters (ParameterDataPrototype) which are constant (except for calibration access) from the application point of view.

⌋

[constr_1288] Allowed Attributes vs. `category` for `DataPrototype`s typed by `ImplementationDataType`s

Imposition time: CP: `IT_CpgExe`

⌈

Attributes of SwDataDefProps	Root Element			Attribute Existence per Category						
	DataPrototype	InstantiationDataDefProps	ParameterAccess	VALUE	DATA_REFERENCE	FUNCTION_REFERENCE	TYPE_REFERENCE	STRUCTURE	UNION	ARRAY
additionalNativeTypeQualifier										
annotation	x	x	*	*	*	*	*	*	*	*
baseType										
compuMethod										
dataConstr.dataConstrRule.physConstrs	x	x		d/c[13]			d/c			d/c
dataConstr.dataConstrRule.internalConstrs	x	x		0..1			0..1			0..1
displayFormat	x	x		0..1			0..1	0..1	0..1	0..1
displayPresentation	x	x		0..1			0..1			0..1
implementationDataType										
invalidValue										
stepSize	x	x		0..1						0..1
swAddrMethod	x	x		0..1	0..1	0..1	0..1	0..1	0..1	0..1
swAlignment	x	x		0..1	0..1	0..1	0..1	0..1	0..1	0..1
swBitRepresentation										
swCalibrationAccess	x	x		0..1			0..1	0..1	0..1	0..1
swCalprmAxisSet										
swComparisonVariable										
swDataDependency										
swHostVariable										
swImplPolicy	x			0..1	0..1	0..1	0..1	0..1	0..1	0..1
swIntendedResolution										
swInterpolationMethod										
swIsVirtual										
swPointerTargetProps										
swPointerTargetProps.swDataDefProps										
swPointerTargetProps.functionPointerSignature										
swRecordLayout										
swRefreshTiming	x	x		0..1			0..1	0..1	0..1	0..1
swTextProps										
swValueBlockSize										
swValueBlockSizeMult										
unit										

▽

[13] don't care

△

Attributes of SwDataDefProps	Root Element			Attribute Existence per Category						
	DataPrototype	InstantiationDataDefProps	ParameterAccess	VALUE	DATA_REFERENCE	FUNCTION_REFERENCE	TYPE_REFERENCE	STRUCTURE	UNION	ARRAY
valueAxisDataType										

⌋

[TPS_SWCT_01267] **DataPrototype can be aggregated in different roles** ⌈Even though the meta-classes VariableDataPrototype and ParameterDataPrototype already express specific use cases of the underlying data type, the same DataPrototype can still be aggregated in different roles, e.g. in the SwcInternalBehavior to express different methods how to access it.⌋

An example is the aggregation of VariableDataPrototype by SwcInternalBehavior in the roles of either implicitInterRunnableVariable or explicitInterRunnableVariable. Find more information concerning these use cases in Chapter 7.

[TPS_SWCT_01268] Definition of initValue for a VariableDataPrototype or a ParameterDataPrototype ⌈It is possible to assign an initValue for both a VariableDataPrototype and a ParameterDataPrototype.⌋

This aspect is sketched in Figure 5.21.

Class	VariableDataPrototype			
Note	A VariableDataPrototype represents a formalized generic piece of information that is typically mutable by the application software layer. VariableDataPrototype is used in various contexts and the specific context gives the otherwise generic VariableDataPrototype a dedicated semantics.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *AutosarDataPrototype*, *DataPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ApplicationInterface.indication, *AtpClassifier*.atpFeature, BswInternalBehavior.arTypedPerInstanceMemory, BswModuleDescription.providedData, BswModuleDescription.requiredData, BulkNvDataDescriptor.bulkNvBlock, DiagnosticSovdAccessArgument.contentObject, *InternalBehavior*.staticMemory, NvBlockDescriptor.ramBlock, NvDataInterface.nvData, SenderReceiverInterface.dataElement, ServiceInterface.event, SwcInternalBehavior.arTypedPerInstanceMemory, SwcInternalBehavior.explicitInterRunnableVariable, SwcInternalBehavior.implicitInterRunnableVariable			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
initValue	ValueSpecification	0..1	aggr	Specifies initial value(s) of the VariableDataPrototype **Tags:** atp.Splitkey=initValue

Table 5.31: VariableDataPrototype

Class	**ParameterDataPrototype**			
Note	A `ParameterDataPrototype` represents a formalized generic piece of information that is typically immutable by the application software layer, but mutable by measurement and calibration tools. `ParameterDataPrototype` is used in various contexts and the specific context gives the otherwise generic `ParameterDataPrototype` a dedicated semantics.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *AutosarDataPrototype*, *DataPrototype*, *Identifiable*, *Multilanguage Referrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, BswInternalBehavior.perInstanceParameter, *InternalBehavior*.constant Memory, NvBlockDescriptor.romBlock, ParameterInterface.parameter, SwcInternalBehavior.perInstance Parameter, SwcInternalBehavior.sharedParameter			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
initValue	ValueSpecification	0..1	aggr	Specifies initial value(s) of the ParameterDataPrototype **Tags:** atp.Splitkey=initValue

Table 5.32: ParameterDataPrototype

[TPS_SWCT_01269] In `PortInterface`s, initial values defined for `DataPrototype`s are ignored ⌈These `initValue`s have no meaning for `DataPrototype`s within `PortInterface`s because in this case a more specific definition of initial values via the so-called `ComSpec` is required.⌋

For more information, refer to Chapter 4.6.



Figure 5.21: Initial value for `AutosarDataPrototype`s

Find more information about the interpretation of `initValue` in Chapter 5.7.

For the case of a fixed-size array data type, the attribute `ApplicationArrayElement.maxNumberOfElements` shall be defined for every dimension of this data type. This aspect is clarified in [constr_1416].

[constr_1416] Existence of attribute `ApplicationArrayElement.maxNumberOfElements`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈The attribute `ApplicationArrayElement.maxNumberOfElements` shall exist for all `ApplicationArrayElement`s defined in the scope of an `ApplicationArrayDataType` where the attribute `ApplicationArrayDataType.dynamicArraySizeProfile` does not exist.⌋

5.3.2 Data Constraints for Data Prototypes typed by Array DataTypes

There are cases where it should be possible to reference different `DataConstr`s from `DataPrototype`s of `category ARRAY` typed by either an `ApplicationArrayDataType` or an `ImplementationDataType` of `category ARRAY`.

For example, consider a predefined `AutosarDataType` of `category ARRAY` with uint8 elements, but without the definition of `DataConstr`s.

This AutosarDataType is instantiated several times by DataPrototypes of category ARRAY.

Each of the derived DataPrototypes of category ARRAY may have individual upper and lower limits which apply to all elements, e.g. one DataPrototype has a range of 0..3 while another has a range of 0..7 for all elements.

This use case occurs, for example, when communicating array data with different ranges over the network.

The motivation to specify the DataConstr at the DataPrototype of category ARRAY is:

- Make explicit that all derived DataPrototypes are based on the same AutosarDataType.
- Reduce the number of AutosarDataTypes in the model and in the code.
- Specify the DataConstrs only once where needed.
- Make explicit that all array elements have the same DataConstrs.

The same motivation also applies to the SwDataDefProps.displayFormat and SwDataDefProps.stepSize attributes of DataPrototypes of category ARRAY.

AUTOSAR supports this use case under the following conditions:

[constr_1407] Definition of SwDataDefProps.dataConstr depending on the capabilities of the data type

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The definition of a SwDataDefProps.dataConstr according to [constr_1288] and [constr_1289] is only supported for a DataPrototype of category ARRAY if the corresponding ApplicationArrayDataType or ImplementationDataType of category ARRAY also supports the specification of a SwDataDefProps.dataConstr.⌋

The prioritization of SwDataDefProps.dataConstr for a DataPrototype of category ARRAY follows the spirit given in [constr_1015] for the inheritance of DataPrototypes from AutosarDataTypes.

[TPS_SWCT_01796] Prioritization of SwDataDefProps.dataConstr for a DataPrototype of category ARRAY ⌈A SwDataDefProps.dataConstr specified for a DataPrototype of category ARRAY refines the SwDataDefProps.dataConstr specified at the corresponding ApplicationArrayDataType or ImplementationDataType of category ARRAY.⌋

[constr_1408] Definition of SwDataDefProps.displayFormat depending on the capabilities of the data type

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The definition of a SwDataDefProps.displayFormat according to [constr_1288] and [constr_1289] is only supported for a DataPrototype of category ARRAY if the

corresponding ApplicationArrayDataType or ImplementationDataType of category ARRAY also supports the specification of a SwDataDefProps.displayFormat.⌋

The prioritization of SwDataDefProps.displayFormat for a DataPrototype of category ARRAY follows the spirit given in [constr_1015] for the inheritance of DataPrototypes from AutosarDataTypes.

[TPS_SWCT_01797] Prioritization of SwDataDefProps.displayFormat for a DataPrototype of category ARRAY ⌈A SwDataDefProps.displayFormat specified for a DataPrototype of category ARRAY refines the SwDataDefProps.displayFormat specified at the corresponding ApplicationArrayDataType or ImplementationDataType of category ARRAY.⌋

[constr_1413] Definition of SwDataDefProps.stepSize depending on the capabilities of the data type

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The definition of a SwDataDefProps.stepSize according to [constr_1288] and [constr_1289] is only supported for a DataPrototype of category ARRAY if the corresponding ApplicationArrayDataType or ImplementationDataType of category ARRAY also supports the specification of a SwDataDefProps.stepSize.⌋

The prioritization of SwDataDefProps.stepSize for a DataPrototype of category ARRAY follows the spirit given in [constr_1015] for the inheritance of DataPrototypes from AutosarDataTypes.

[TPS_SWCT_01798] Prioritization of SwDataDefProps.stepSize for a DataPrototype of category ARRAY ⌈A SwDataDefProps.stepSize specified for a DataPrototype of category ARRAY refines the SwDataDefProps.stepSize specified at the corresponding ApplicationArrayDataType or ImplementationDataType of category ARRAY.⌋

[constr_1409] Definition of SwDataDefProps.dataConstr depending on the capabilities of the element data type

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The definition of a SwDataDefProps.dataConstr according to [constr_1007] and [constr_1009] is only supported for an ApplicationArrayDataType or an ImplementationDataType of category ARRAY if the aggregated ApplicationArrayDataType.element or ImplementationDataType.subElement also supports the specification of a SwDataDefProps.dataConstr.⌋

[constr_1718] Inheritance of SwDataDefProps.dataConstr from an array data type to the array elements

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈A SwDataDefProps.dataConstr specified for an ApplicationArrayDataType or ImplementationDataType of category ARRAY applies to all array leaf elements

represented by (potentially multiple levels of) ApplicationArrayDataType.element or ImplementationDataType.subElement.

In this case, the ApplicationArrayDataType.element or ImplementationDataType.subElement shall not have an own SwDataDefProps.dataConstr. This also applies for multi-dimensional array data types.⌋

[constr_1410] Definition of SwDataDefProps.displayFormat depending on the capabilities of the element data type

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The definition of a SwDataDefProps.displayFormat according to [constr_1007] and [constr_1009] is only supported for an ApplicationArrayDataType or an ImplementationDataType of category ARRAY if the aggregated ApplicationArrayDataType.element or ImplementationDataType.subElement also supports the specification of a SwDataDefProps.displayFormat.⌋

[constr_1719] Inheritance of SwDataDefProps.displayFormat from an array data type to the array elements

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈A SwDataDefProps.displayFormat specified for an ApplicationArrayDataType or ImplementationDataType of category ARRAY applies to all array leaf elements represented by (potentially multiple levels of) ApplicationArrayDataType.element or ImplementationDataType.subElement.

In this case, the ApplicationArrayDataType.element or ImplementationDataType.subElement shall not have an own SwDataDefProps.displayFormat. This also applies for multi-dimensional array data types.⌋

[constr_1414] Definition of SwDataDefProps.stepSize depending on the capabilities of the element data type

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The definition of a SwDataDefProps.stepSize according to [constr_1007] and [constr_1009] is only supported for an ApplicationArrayDataType or an ImplementationDataType of category ARRAY if the aggregated ApplicationArrayDataType.element or ImplementationDataType.subElement also supports the specification of a SwDataDefProps.stepSize.⌋

[constr_1720] Inheritance of SwDataDefProps.stepSize from an array data type to the array elements

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈A SwDataDefProps.stepSize specified for an ApplicationArrayDataType or ImplementationDataType of category ARRAY applies to all array leaf elements represented by (potentially multiple levels of) ApplicationArrayDataType.element or ImplementationDataType.subElement.

In this case, the ApplicationArrayDataType.element or ImplementationDataType.subElement shall not have an own SwDataDefProps.stepSize. This also applies for multi-dimensional array data types.⌋

5.3.3 Reference to Data Prototypes

This chapter explains the various patterns for referencing DataPrototypes.

[TPS_SWCT_01446] References to a DataPrototype may or may not imply the necessity for using an instanceRef ⌈As references to a DataPrototype may or may not imply the necessity for using an instanceRef, this would mean that in some places the meta-model would have to implement both variants depending on the use case. To avoid this, AUTOSAR defines a unified reference implementation for VariableDataPrototypes and ParameterDataPrototypes.⌋

5.3.3.1 AUTOSAR Variable Ref

[TPS_SWCT_01270] AutosarVariableRef ⌈With the advent of AutosarVariableRef, it is possible to implement a uniform reference to a VariableDataPrototype that covers all foreseen use cases:

- Reference to a localVariable, no AtpInstanceRef required.
- Reference to an autosarVariable (which involves an AtpInstanceRef).
- Reference to the internal structure of a VariableDataPrototype implemented using a composite ImplementationDataType.

⌋

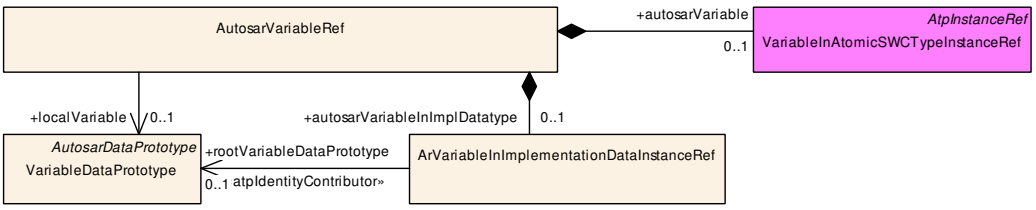

Figure 5.22: Implementation of AutosarVariableRef

[constr_2536] Target of an autosarVariable in AutosarVariableRef shall refer to a variable

Imposition time: CP: IT_CpgExe

⌈The target of autosarVariable (which in fact is an instance ref) in AutosarVariableRef shall either be or be nested in VariableDataPrototype. This means that the target shall either be a VariableDataPrototype or an

ApplicationCompositeElementDataPrototype that in turn is owned by a VariableDataPrototype.

Rules for the modeling and semantics of an AtpInstanceRef are defined in the [10, TPS Generic Structure Template].

Class	**AutosarVariableRef**			
Note	This class represents a reference to a variable within AUTOSAR which can be one of the following use cases: localVariable: • localVariable which is used as whole (e.g. InterRunnableVariable, inputValue for curve) autosarVariable: • a variable provided via Port which is used as whole (e.g. dataAccessPoints) • an element inside of a composite local variable typed by ApplicationDataType (e.g. inputValue for a curve) • an element inside of a composite variable provided via PortPrototype and typed by ApplicationDataType (e.g. inputValue for a curve) autosarVariableInImplDatatype: • an element inside of a composite local variable typed by ImplementationDataType (e.g. nvram Data mapping) • an element inside of a composite variable provided via Port and typed by ImplementationDataType (e.g. inputValue for a curve)			
Base	*ARObject*			
Aggregated by	InstantiationDataDefProps.variableInstance, NvBlockDataMapping.nvRamBlockElement, NvBlockDataMapping.readNvData, NvBlockDataMapping.writtenNvData, NvBlockDataMapping.writtenReadNvData, RoleBasedDataAssignment.usedDataElement, SwVariableRefProxy.autosarVariable, VariableAccess.accessedVariable			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
autosarVariable	DataPrototype	0..1	iref	This references a variable which is provided by a port and/or which is part of a CompositeDataType. **Tags:** atp.Splitkey=autosarVariable, autosarVariable.portPrototype, autosarVariable.rootVariableDataPrototype, autosarVariable.contextDataPrototype, autosarVariable.targetDataPrototype **InstanceRef implemented by:** VariableInAtomicSWCTypeInstanceRef
autosarVariableInImplDatatype	ArVariableInImplementationDataInstanceRef	0..1	aggr	This is used if the target variable is inside of variableDataPrototype typed by an ImplementationDataType. **Tags:** atp.Splitkey=autosarVariableInImplDatatype, autosarVariableInImplDatatype.portPrototype, autosarVariableInImplDatatype.rootVariableDataPrototype, autosarVariableInImplDatatype.contextDataPrototype, autosarVariableInImplDatatype.targetDataPrototype
localVariable	VariableDataPrototype	0..1	ref	This reference is used if the variable is local to the current component. It would also be possible to use the instance refence here. Such an instance ref would not have a contextElement, since the current instance is the context. But the local instance is a special case which may provide further optimization. Therefore an explicit reference is provided for this case. **Tags:** atp.Splitkey=localVariable

Table 5.33: AutosarVariableRef

5.3.3.2 AUTOSAR Parameter Ref

[TPS_SWCT_01271] **AutosarParameterRef** ⌈With the advent of AutosarParameterRef, it is possible to implement a uniform reference to a ParameterDataPrototype that covers all foreseen use cases:

- Reference to a localParameter, no AtpInstanceRef required.
- Reference to an autosarParameter (which involves an AtpInstanceRef).

⌋

There is a very limited number of use cases where the AutosarParameterRef can (with the active consent of the AUTOSAR standard) reference a VariableDataPrototype.

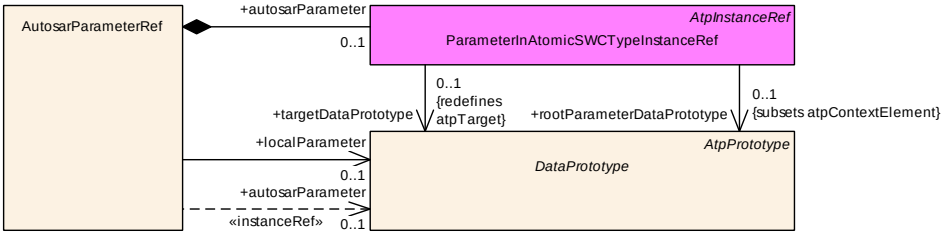

Figure 5.23: Modeling of meta-class AutosarParameterRef

[constr_1173] Applicability of AutosarParameterRef referencing a VariableDataPrototype

Imposition time: CP: IT_CpgExe

⌈A reference from AutosarParameterRef to VariableDataPrototype is **only** applicable if the AutosarParameterRef is used in the context of SwAxisGrouped.⌋

For example, the use case referenced in [constr_1173] applies if it is required to store a grouped axis in a variable in order to adapt the axis during runtime of the ECU by a dedicated algorithm. In all cases where [constr_1173] does not apply, [constr_2535] shall be fulfilled.

[constr_2535] Target of an autosarParameter in AutosarParameterRef shall refer to a parameter

Imposition time: CP: IT_CpgExe

⌈Except for the specifically described cases where [constr_1173] applies, the target of autosarParameter (which in fact is an instance ref) in AutosarParameterRef shall either be or be nested in ParameterDataPrototype. This means that the target shall either be a ParameterDataPrototype or an ApplicationCompositeElementDataPrototype that in turn is owned by a ParameterDataPrototype.⌋

Class	**AutosarParameterRef**			
Note	This class represents a reference to a parameter within AUTOSAR which can be one of the following use cases: localParameter: • localParameter which is used as whole (e.g. sharedAxis for curve) autosarVariable: • a parameter provided via `PortPrototype` which is used as whole (e.g. parameterAccess) • an element inside of a composite local parameter typed by `ApplicationDataType` (e.g. sharedAxis for a curve) • an element inside of a composite parameter provided via Port and typed by `ApplicationDataType` (e.g. sharedAxis for a curve) autosarParameterInImplDatatype: • an element inside of a composite local parameter typed by ImplementationDatatype • an element inside of a composite parameter provided via PortPrototype and typed by Implementation Datatype			
Base	*ARObject*			
Aggregated by	InstantiationDataDefProps.parameterInstance, ParameterAccess.accessedParameter, RoleBasedDataAssignment.usedParameterElement, SwCalprmRefProxy.arParameter			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
autosar Parameter	DataPrototype	0..1	iref	This instance reference is used if the calibration parameter is either imported via a port or is part of a composite data structure. **Tags:** atp.Splitkey=autosarParameter, autosarParameter.portPrototype, autosarParameter.rootParameterDataPrototype, autosarParameter.contextDataPrototype, autosarParameter.targetDataPrototype **InstanceRef implemented by:** ParameterInAtomicSWCTypeInstanceRef
localParameter	DataPrototype	0..1	ref	In the majority of cases this reference goes to Parameter DataPrototypes rather than VariableDataPrototypes. Pointing the reference to a VariableDataPrototype is limited to special use cases, e.g. if the AutosarParameterRef is used in the context of an SwAxisGrouped. This reference is used if the arParameter is local to the current component. Of course, it would technically also be feasible to use an InstanceRef for this case. However, the InstanceRef would not have a contextElement (because the current instance is the context). Hence, the local instance is a special case which may provide further optimization. Therefore an explicit reference is provided for this case. **Tags:** atp.Splitkey=localParameter

Table 5.34: AutosarParameterRef

5.3.3.3 Modeling Approach

The attribute `Ref.index` shall be used whenever a model element that represents an array is referenced in a scalar context, i.e. when the reference is supposed to identify a specific array element.

A very typical example of such a situation is the access to an element of an `ApplicationArrayDataType` by means of a reference to `ApplicationArrayElement` in which the index attribute is used.

The use of the index attribute does not make sense if the context of the access is already scalar, e.g. when accessing an ApplicationRecordElement in the context of an ApplicationRecordDataType. Using the attribute index in a context that is already scalar by nature would also be misleading and is therefore prohibited.

[constr_1161] Applicability of the attribute Ref.index

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The use of the attribute Ref.index is limited to references to the following meta-classes:

- ApplicationArrayElement
- Sub-classes of AbstractImplementationDataTypeElement.

⌋

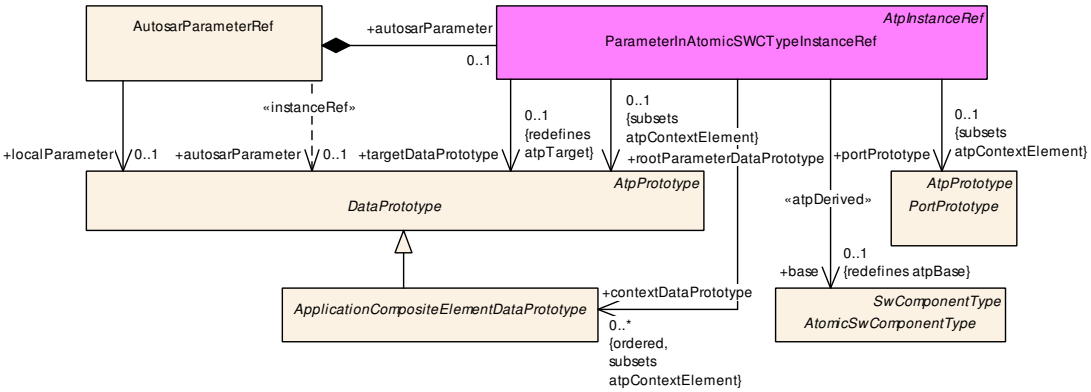

Figure 5.24: Implementation of the InstanceRef for AutosarParameterRef

Primitive	**Ref**			
Note	This primitive denotes a name based reference. For detailed syntax see the xsd.pattern. • first slash (relative or absolute reference) [optional] • Identifier [required] • a sequence of slashes and Identifiers [optional] This primitive is used by the meta-model tools to create the references. **Tags:** xml.xsd.customType=REF xml.xsd.pattern=/?[a-zA-Z][a-zA-Z0-9_]{0,127}(/[a-zA-Z][a-zA-Z0-9_]{0,127})* xml.xsd.type=string			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	Identifier	0..1	attr	This attribute reflects the base to be used for this reference. **Tags:** xml.attribute=true

△

Primitive	**Ref**			
blueprintValue	String	0..1	attr	This represents a description that documents how the value shall be defined when deriving objects from the blueprint. **Tags:** atp.Status=valid xml.attribute=true
index	PositiveInteger	0..1	attr	This attribute supports the use case to point on specific elements in an array. This is in particular required if arrays are used to implement particular data objects. The counting of array indices starts with the value 0, i.e. the index of the first array element is 0. **Tags:** xml.attribute=true

Table 5.35: Ref

Class	**ParameterInAtomicSWCTypeInstanceRef**			
Note	This class implements an instance reference which can be applied for variables as well as for parameters.			
Base	*ARObject*, *AtpInstanceRef*			
Aggregated by	AutosarParameterRef.autosarParameter			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	AtomicSwComponent Type	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextData Prototype (ordered)	ApplicationComposite ElementDataPrototype	*	ref	This ist the context in a compositeDataType. **Tags:** xml.sequenceOffset=40
portPrototype	PortPrototype	0..1	ref	This is the port providing the variable or the entry point to the variable structure. **Tags:** xml.sequenceOffset=20
rootParameter DataPrototype	DataPrototype	0..1	ref	This represents the entry point for references into a CompositeDataType. **Tags:** xml.sequenceOffset=30
targetData Prototype	DataPrototype	0..1	ref	This is the target parameter element. Note that this must be nested in ParameterDataPrototype. The target must be one of ParameterDataPrototype, Application CompositeElementDataPrototype. **Tags:** xml.sequenceOffset=50

Table 5.36: ParameterInAtomicSWCTypeInstanceRef

Note: If the target of the `AtpInstanceRef` is an `AutosarDataPrototype` then the `rootParameterDataPrototype` shall not exist.

The implementation of the `AtpInstanceRef`s for `AutosarVariableRef` and `AutosarParameterRef` probably needs some clarification regarding the references to `DataPrototype`s.

[TPS_SWCT_01374] Implementation of `AutosarParameterRef` ⌈The reference to `rootParameterDataPrototype` is **not** redundant. It is required for identifying the `autosarParameter` itself in a `ParameterInterface` for the case that the `target-DataPrototype` is an `ApplicationCompositeElementDataPrototype`.⌋

As explained before, the implementation of AutosarParameterRef in a specific case is subject to [constr_1173].

[constr_1608] Existence of rootParameterDataPrototype

Imposition time: CP: IT_CpgExe

⌈The reference rootParameterDataPrototype shall exist if and only if

- AutosarDataType of the autosarParameter is a composite data type and
- targetDataPrototype refers to a DataPrototype inside the root-ParameterDataPrototype.

⌋

Note: If the target of the AtpInstanceRef is an AutosarDataPrototype, then the rootParameterDataPrototype shall not exist.

[TPS_SWCT_01375] Implementation of AutosarVariableRef ⌈The reference to rootVariableDataPrototype is **not** redundant. It is required for identifying the autosarVariable itself in a SenderReceiverInterface or NvDataInterface for the case that the targetDataPrototype is an ApplicationComposite-ElementDataPrototype.⌋

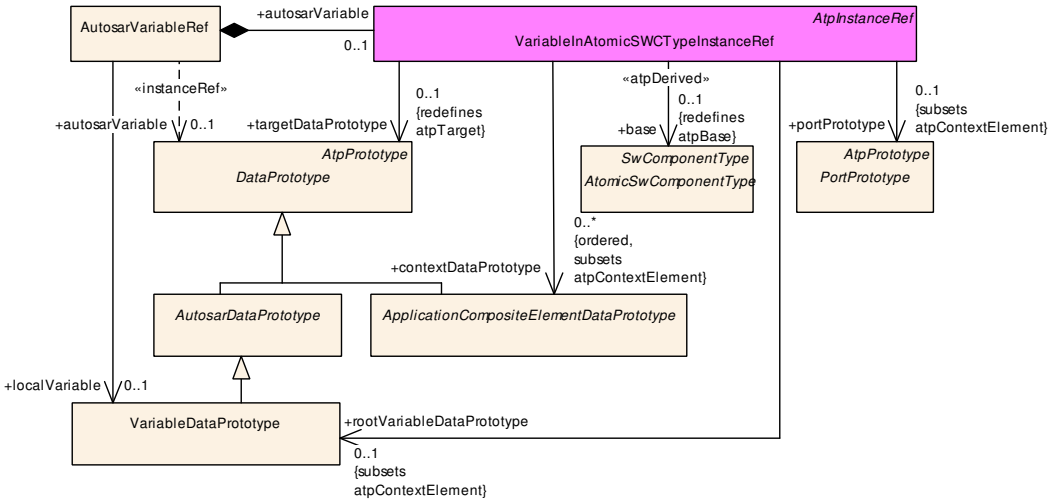

Figure 5.25: Implementation of the InstanceRef for AutosarVariableRef

[constr_1609] Existence of rootVariableDataPrototype

Imposition time: CP: IT_CpgExe

⌈The reference rootVariableDataPrototype shall exist if and only if

- the AutosarDataType of the autosarVariable is a composite data type and
- the targetDataPrototype refers to a DataPrototype inside the root-VariableDataPrototype.

⌋

5.3.3.4 Access into Variable Data Prototype typed by an Implementation Data Type

The meta-class ArVariableInImplementationDataInstanceRef, despite the name, has formally no relationship to AtpInstanceRef. Therefore, the following definition applies:

[TPS_SWCT_01681] Context path in ArVariableInImplementationDataInstanceRef ⌈The references in the roles

- portPrototype
- rootVariableDataPrototype
- ordered collection of contextDataPrototype
- targetDataPrototype

constitute the path leading from the root to the specified inner instance of a dataElement inside a VariableDataPrototype typed by an ImplementationDataType.⌋

This relation is also depicted in Figure 5.26.

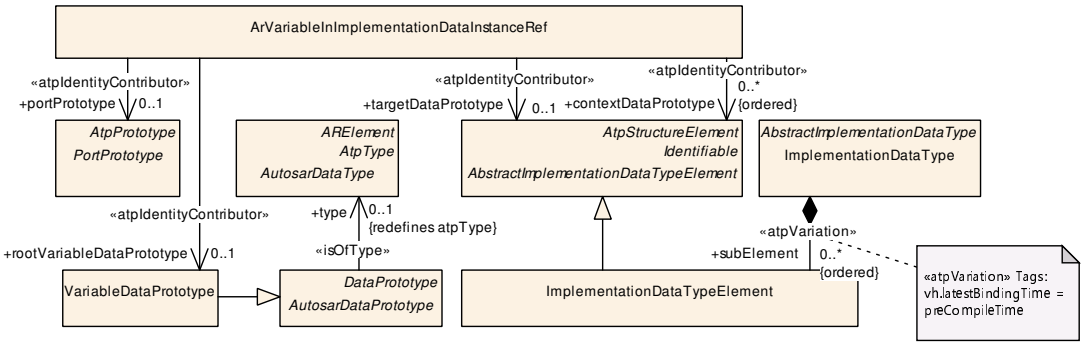

Figure 5.26: Implementation of ArVariableInImplementationDataInstanceRef

[constr_1423] Completeness of references ArVariableInImplementationDataInstanceRef.contextDataPrototype

Imposition time: CP: IT_CpgExe

⌈The reference ArVariableInImplementationDataInstanceRef.contextDataPrototype shall be defined for

- each *leaf* (i.e. the end of a chain of aggregating elements) ImplementationDataTypeElement of category TYPE_REFERENCE in a chain of referencing ImplementationDataTypes which is not the targetDataPrototype
- and each ImplementationDataTypeElement owned by an ImplementationDataType or ImplementationDataTypeElement of category ARRAY in a chain of referencing ImplementationDataTypes

starting from the ImplementationDataTypes of the rootVariableDataPrototype down to the leaf ImplementationDataTypeElement which is typed (directly or indirectly via ImplementationDataType of category TYPE_REFERENCE) by the ImplementationDataType of the targetDataPrototype.⌋

[constr_1424] Existence of ArVariableInImplementationDataInstanceRef.contextDataPrototype

Imposition time: CP: IT_CpgExe

⌈The attribute ArVariableInImplementationDataInstanceRef.contextDataPrototype shall only exist for an ImplementationDataTypeElement category TYPE_REFERENCE or ARRAY.⌋

Technically, it would be possible to avoid the context for a one-dimensional array in the hierarchy. The context is still required because then the rule for the existence of contexts becomes much simpler.

An example that demonstrates the necessity for the existence of ArVariableInImplementationDataInstanceRef can be found in Chapter B.1.9.

Class	**ArVariableInImplementationDataInstanceRef**			
Note	This class represents the ability to navigate into a data element inside of an VariableDataPrototype which is typed by an ImplementationDatatype. Note that it shall not be used if the target is the VariableDataPrototype itself (e.g. if its a primitive). Note that this class follows the pattern of an InstanceRef but is not implemented based on the abstract classes because the ImplementationDataType isn't either, especially because ImplementationDataType Element isn't derived from AtpPrototype.			
Base	*ARObject*			
Aggregated by	AutosarVariableRef.autosarVariableInImplDatatype, ImplementationDataTypeSubElement Ref.implementationDataTypeElement			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
contextData Prototype (ordered)	AbstractImplementation DataTypeElement	*	ref	This is a context in case there are subelements with explicit types. The reference has to be ordered to properly reflect the nested structure. **Stereotypes:** atpIdentityContributor **Tags:** xml.sequenceOffset=30
portPrototype	PortPrototype	0..1	ref	This is the port providing/receiving the root of the variable **Stereotypes:** atpIdentityContributor **Tags:** xml.sequenceOffset=10
rootVariable DataPrototype	VariableDataPrototype	0..1	ref	This refers to the VariableDataPrototype typed by the ImplementationDatatype in which the target can be found. **Stereotypes:** atpIdentityContributor **Tags:** xml.sequenceOffset=20
targetData Prototype	AbstractImplementation DataTypeElement	0..1	ref	This reference points to the target ImplementationData TypeElement. **Stereotypes:** atpIdentityContributor **Tags:** xml.sequenceOffset=40

Table 5.37: ArVariableInImplementationDataInstanceRef

[constr_1911] Existence of ArVariableInImplementationDataInstanceRef.targetDataPrototype

Imposition time: CP: IT_CpgExe

⌈For each ArVariableInImplementationDataInstanceRef, the reference targetDataPrototype shall exist.⌋

5.3.3.5 Access into Parameter Data Prototype typed by an Implementation Data Type

It is also possible to access the inside of a nested ParameterDataPrototype typed by an ImplementationDataType in much the same way as for a VariableDataPrototype typed by an ImplementationDataType.

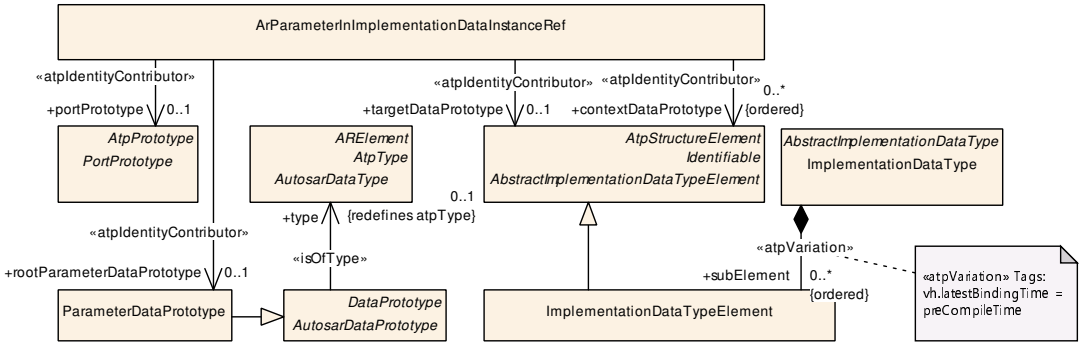

Figure 5.27: Implementation of ArParameterInImplementationDataInstanceRef

[TPS_SWCT_01738] Context path in ArParameterInImplementationDataInstanceRef ⌈The references in the roles

- portPrototype
- rootParameterDataPrototype
- ordered collection of contextDataPrototype
- targetDataPrototype

constitute the path leading from the root to the specified inner instance of a parameter inside a ParameterDataPrototype typed by an ImplementationDataType.⌋

This relation is also depicted in Figure 5.27.

[constr_1516] Completeness of references ArParameterInImplementationDataInstanceRef.contextDataPrototype

Imposition time: CP: IT_CpgExe

⌈The reference ArParameterInImplementationDataInstanceRef.contextDataPrototype shall be defined for

- each *leaf* (i.e. the end of a chain of aggregating elements) ImplementationDataTypeElement of category TYPE_REFERENCE in a chain of referencing ImplementationDataTypes which is not the targetDataPrototype
- and each ImplementationDataTypeElement owned by an ImplementationDataType or ImplementationDataTypeElement of category ARRAY in a chain of referencing ImplementationDataTypes

starting from the ImplementationDataTypes of the rootParameterDataPrototype down to the leaf ImplementationDataTypeElement which is typed (directly or indirectly via ImplementationDataType of category TYPE_REFERENCE) by the ImplementationDataType of the targetDataPrototype.⌋

[constr_1517] Existence of ArParameterInImplementationDataInstanceRef.contextDataPrototype

Imposition time: CP: IT_CpgExe

⌈The attribute ArParameterInImplementationDataInstanceRef.contextDataPrototype shall only exist for an ImplementationDataTypeElement category TYPE_REFERENCE or ARRAY.⌋

Technically, it would be possible to avoid the context for a one-dimensional array in the hierarchy. The context is still required because then the rule for the existence of contexts becomes much simpler.

Class	**ArParameterInImplementationDataInstanceRef**			
Note	This class represents the ability to navigate into an element inside of an ParameterDataPrototype typed by an ImplementationDatatype. Note that it shall not be used if the target is the ParameterDataPrototype itself (e.g. if the target is a primitive data type). Note that this class follows the pattern of an InstanceRef but is not implemented based on the abstract classes because the ImplementationDataType isn't either, especially because ImplementationDataType Element (intentionally) isn't derived from AtpPrototype.			
Base	*ARObject*			
Aggregated by	ImplementationDataTypeSubElementRef.parameterImplementationDataTypeElement			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
contextData Prototype (ordered)	AbstractImplementation DataTypeElement	*	ref	This is a context in case there are subelements with explicit types. The reference has to be ordered to properly reflect the nested structure. **Stereotypes:** atpIdentityContributor
portPrototype	PortPrototype	0..1	ref	This reference points to the PortPrototype providing/ receiving the root of the parameter. **Stereotypes:** atpIdentityContributor
rootParameter DataPrototype	ParameterData Prototype	0..1	ref	This refers to the ParameterDataPrototype typed by the implementationDataType in which the target can be found. **Stereotypes:** atpIdentityContributor

▽

△

Class	**ArParameterInImplementationDataInstanceRef**			
targetData Prototype	AbstractImplementation DataTypeElement	0..1	ref	This reference points to the target ImplementationData TypeElement. **Stereotypes:** atpIdentityContributor

Table 5.38: ArParameterInImplementationDataInstanceRef

[constr_1912] Existence of reference `ArParameterInImplementationDataInstanceRef.targetDataPrototype`

Imposition time: CP: `IT_CpgExe`

⌈For each `ArParameterInImplementationDataInstanceRef`, the reference `targetDataPrototype` shall exist.⌋

5.4 Properties of Data Definitions

5.4.1 Overview

As it has already been shown in the previous chapters, various properties and associations can be attached to the definition of data types as well as prototypes. These are described by the meta-class `SwDataDefProps` which covers all properties of a particular data object under various aspects.

In general, the properties specified within `SwDataDefProps` may apply to all kinds of data declared within the software-component template and within the basic software module description template as well, e.g. component local data, data used for communication, data used for measurement as well as for calibration.

However, there are constraints for the attributes depending on the role of the data:

The use of `SwDataDefProps` in the context of the `ComSpec networkRepresentation` (which is configurable in several roles and different contexts) implements a “fork” in the dependency graph that is coded into [constr_1015], and this “fork” should not have an impact on elements on the left of the `ComSpec networkRepresentation` column.

Some property names contain the term “variable” or “calprm”. This comes from historical[14] reasons and can be taken as a hint about where the property most likely applies.

The use of the “/” in the table rows mentioning the content of `swCalprmAxisSet.swCalprmAxis`, in particular `SwAxisGrouped.swCalprmRef` and `SwAxisGrouped.sharedAxisType` resp. `SwAxisIndividual.swVariableRef`, `SwAxisIndividual.unit`, and `SwAxisIndividual.inputVariableType` represents a “shortcut” that glosses over a specific aspect of the modeling of `SwCalprmAxis` that is visible in the model but does not appear in the AUTOSAR XML

[14] In the beginning of ASAM and MSR, measurements and calibration parameters (characteristics) were separated and the properties were merged over time.

schema, see Figure 5.28 (which contains all the meta-classes and roles mentioned in the table entries).

[constr_1015] Prioritization of SwDataDefProps

Imposition time: CP: IT_CpgExe

⌈

Attributes of SwDataDefProps	Usage For			Place of Setting										
	RTE	A2L	Other Usage	ApplicationDataType	ImplementationDataType	DataPrototype	InstantiationDataDefProps	ParameterAccess	SwServiceArg	FlatInstanceDescriptor	McDataInstance	SwSystemconst	PerInstanceMemory	ComSpec networkRepresentation
additionalNativeTypeQualifier	x		x		D	I			D		S			
annotation			x	D	A	A	A	A	D		A	D		A
baseType	x	x	x		D	I	I	I	D		S	M		D
compuMethod	x	x	x	D	AI	I	I		I	AI	S	D		D
dataConstr	x	x	x	D	C	D	D	I	D		S	D		
displayFormat		x		D	D	D	D	I	D		S	D		
displayPresentation	x	x	x	D	D	D	D				S			
implementationDataType	x		x		D	I	I	I	D					
invalidValue	x	x		D	D	I	I				S			D
stepSize		x		D	D	D	D	D		D	S			
swAddrMethod	x	x	x	D	D	D	D			D			D	
swAlignment	x		x		D	D	D							
swBitRepresentation		x	x								D			
swCalibrationAccess	x	x		D	D	D	D		D	D	S	D		
swCalprmAxisSet	x	x		D		I	I	I			S			
swCalprmAxisSet.swCalprmAxis /SwAxisGrouped.swCalprmRef		x					D	D			S			
swCalprmAxisSet.swCalprmAxis /SwAxisIndividual.swVariableRef		x					D	D			S			
swCalprmAxisSet.swCalprmAxis /SwAxisGrouped.sharedAxisType		x		D							S			
swCalprmAxisSet.swCalprmAxis /SwAxisIndividual.inputVariableType		x		D							S			
swCalprmAxisSet/SwAxisIndividual.unit		opt.		D		I	I	I	I		S			
swComparisonVariable		x						D			S			
swDataDependency		x	x			D	D				S			
swHostVariable		x	x								D			
swImplPolicy	x		x	D	D	D			D					

⌉

△

Attributes of SwDataDefProps	Usage For			Place of Setting										
	RTE	A2L	Other Usage	ApplicationDataType	ImplementationDataType	DataPrototype	InstantiationDataDefProps	ParameterAccess	SwServiceArg	FlatInstanceDescriptor	McDataInstance	SwSystemconst	PerInstanceMemory	ComSpec networkRepresentation
swIntendedResolution			x	D[15]										
swInterpolationMethod			x	D	I	D	D	D			S			
swIsVirtual		x				D	D				S			
swPointerTargetProps			x		D	I			D					
swRecordLayout	x	x	x	D		I	I	I			S			
swRefreshTiming		x		D	D	D	D		D	D	D			
swTextProps		x	x	D	I	I	I	I			S			
swValueBlockSize		x	x	D	I	I	I	I			S			
swValueBlockSizeMult		x	x	D	I	I	I	I			S			
unit		x	x	D	I	I	I		I		S	D		
valueAxisDataType		x	x	D	I	I	I	I			S			

⌋

Legend for Table inside [constr_1015]

Empty table cells represent not-applicable settings. The following legend applies to the non-empty table cells:

D Define the attribute independent of settings to the left.

A Add Only applicable for the case that an attribute has an upper multiplicity greater than 1: if the attribute is defined on the left, then any additional definition of the attribute adds to the already existing collection. If the attribute is not defined on the left, then the attribute can be defined.

I Inherit the definition from the left for usage in the scope of this element.

M Attribute is **meaningless** in the scope of this element. Tools shall ignore such an attribute without a warning.

C This means that the left element constrains the right element.

AI If the attribute is already defined on the left, then the attribute is not redefined but adds implementation-related information, see Example 5.2.

[15] swIntendedResolution is used only in an early phase of the definition of data types, namely in the context of the definition of so-called blueprints. To that extent, swIntendedResolution represents a non-binding requirement that shall later be considered for the definition of an appropriate CompuMethod.

S Create a “Self-contained” artifact based on the left, see Example 5.3. Use case: Provide a McDataGenerator with a single, self-contained file to do its job.

Example 5.2

AI: An `ApplicationDataType` of `category` `BOOLEAN` supports the definition of an own `CompuMethod` to define the semantics of e.g. (`ON`, `OFF`) or (`HIGH`, `LOW`) or (`PASSED`, `FAILED`) **as long as the number of values matches and matching pairs of values on application level and implementation level exist**. In contrast, the corresponding `ImplementationDataType` uses (`true`, `false`) as the applicable literals in any of the above-mentioned cases.

Example 5.3

S: A `CompuMethod` defined in the context of a `System` of `category` `ECU_EXTRACT` is copied into the separate artifact for the `McSupportData` and references need to be updated to the copy.

In particular, the “shortcut” affects the existence of meta-class `SwCalprmAxisTypeProps` and its aggregation in the role `SwCalprmAxis.swCalprmAxisTypeProps`. As depicted in Figure 5.28, `SwCalprmAxisTypeProps` acts as an abstract base class to both `SwAxisGrouped` and `SwAxisIndividual`.

This difference between meta-model and AUTOSAR XML schema is explained by the existence of a set of tags at the aggregation `SwCalprmAxis.swCalprmAxisTypeProps`. The details of how these tags impact the schema generation are explained in the [26, TPS XML Schema Production Rules].

To summarize, the “shortcut” in the table rows simply approximates the situation in ARXML instead of reflecting the actual modeling in the AUTOSAR meta-model. In ARXML files that conform to the AUTOSAR XML schema, however, both `SwAxisGrouped` and `SwAxisIndividual` appear as direct child elements of `SwCalprmAxis`.

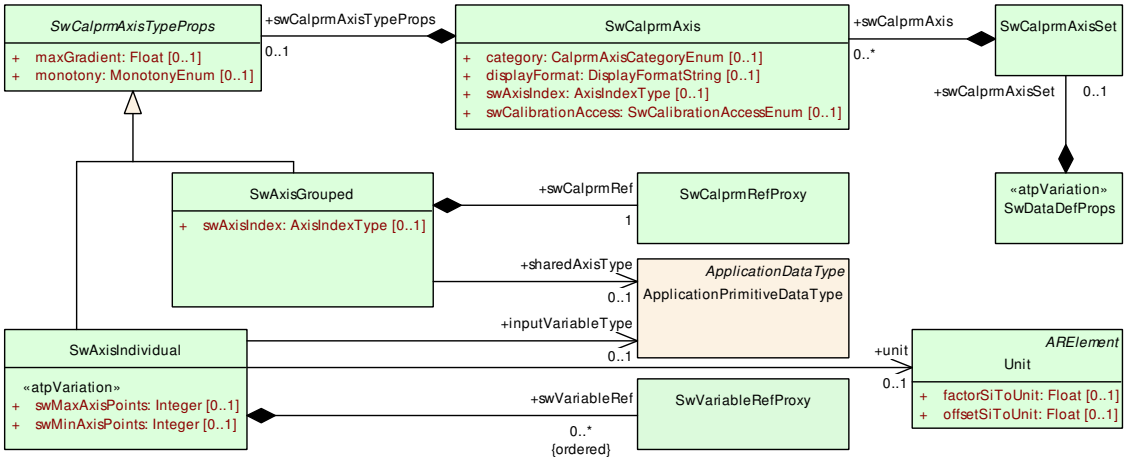

Figure 5.28: Modeling of `SwAxisGrouped` and `SwAxisIndividual`

[constr_1244] DataPrototypes used in application software shall not be typed by C enums

Imposition time: CP: IT_CpgExe

⌈A ImplementationDataType that is used to type a DataPrototype owned by an AtomicSwComponentType shall not set swDataDefProps.additionalNativeTypeQualifier to enum.⌋

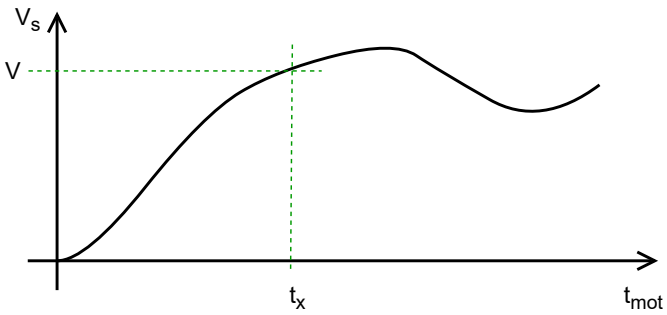

Figure 5.29: Explanation of swComparisonVariable

[TPS_SWCT_01272] Semantics of swComparisonVariable ⌈swComparisonVariables shall be displayed in the MCD system on the ordinate in a curve.

By showing the input value and the comparison value, the calibration engineer can see if the current working point is above or below a curve-provided threshold. For example, in a curve specifying a temperature-dependent gear shift threshold engine speed, the engine speed can be shown as “comparisonVariable”.

These variables can be used to display the value of a variable on the value axis of a calibration parameter (characteristic) that is currently displayed in the MCD system.

The purpose is to compare the appropriate result from the calibration parameter in question with a value being calculated or taken from a sensor (the comparison variable).

The sole purpose of this comparison-variable is therefore to serve the calibration process.⌋

The meaning behind swComparisonVariable is depicted in Figure 5.29.

Legend

t_x represents the current temperature and t_{mot} represents the motor temperature.

V represents the current speed as shown in the MCD system for comparison: this is the swComparisonVariable.

Likewise, V_s represents the speed characteristic over the temperature.

Class	«atpVariation» **SwDataDefProps**
Note	This class is a collection of properties relevant for data objects under various aspects. One could consider this class as a "pattern of inheritance by aggregation". The properties can be applied to all objects of all classes in which SwDataDefProps is aggregated. Note that not all of the attributes or associated elements are useful all of the time. Hence, the process definition (e.g. expressed with an OCL or a Document Control Instance MSR-DCI) has the task of implementing limitations. SwDataDefProps covers various aspects: • Structure of the data element for calibration use cases: is it a single value, a curve, or a map, but also the recordLayouts which specify how such elements are mapped/converted to the DataTypes in the programming language (or in AUTOSAR). This is mainly expressed by properties like swRecordLayout and swCalprmAxisSet • Implementation aspects, mainly expressed by swImplPolicy, swAddrMethod, baseType, implementationDataType and additionalNativeTypeQualifier • Access policy for the MCD system, mainly expressed by swCalibrationAccess • Semantics of the data element, mainly expressed by compuMethod and/or unit, dataConstr, invalid Value • Code generation policy provided by swRecordLayout **Tags:** vh.latestBindingTime=codeGenerationTime
Base	*ARObject*
Aggregated by	*AutosarDataType*.swDataDefProps, CompositeNetworkRepresentation.networkRepresentation, Cpp ImplementationDataTypeElement.swDataDefProps, *DataPrototype*.swDataDefProps, DataPrototype TransformationProps.networkRepresentationProps, DiagnosticDataElement.swDataDefProps, Diagnostic EnvDataElementCondition.swDataDefProps, DiagnosticExtendedDataRecordElement.swDataDefProps, DiagnosticSovdPrimitiveContentElement.swDataDefProps, DltArgumentProps.networkRep, FlatInstance Descriptor.swDataDefProps, ImplementationDataTypeElement.swDataDefProps, InstantiationDataDef Props.swDataDefProps, ISignal.networkRepresentationProps, McDataInstance.resultingProperties, ParameterAccess.swDataDefProps, PerInstanceMemory.swDataDefProps, *ReceiverComSpec*.network Representation, SecurityEventContextDataElement.networkRepresentation, *SenderComSpec*.network Representation, SomeipDataPrototypeTransformationProps.networkRepresentation, SwPointerTarget Props.swDataDefProps, SwServiceArg.swDataDefProps, SwSystemconst.swDataDefProps, System Signal.physicalProps

Attribute	Type	Mult.	Kind	Note
additionalNative TypeQualifier	NativeDeclarationString	0..1	attr	This attribute is used to declare native qualifiers of the programming language which can neither be deduced from the baseType (e.g. because the data object describes a pointer) nor from other more abstract attributes. Examples are qualifiers like "volatile", "strict" or "enum" of the C-language. All such declarations have to be put into one string. **Tags:** xml.sequenceOffset=235
annotation	Annotation	*	aggr	This aggregation allows to add annotations (yellow pads ...) related to the current data object. **Tags:** atp.Splitkey=annotation xml.roleElement=true xml.roleWrapperElement=true xml.sequenceOffset=20 xml.typeElement=false xml.typeWrapperElement=false
baseType	SwBaseType	0..1	ref	Base type associated with the containing data object. **Tags:** atp.Splitkey=baseType xml.sequenceOffset=50

▽

△

Class	«atpVariation» **SwDataDefProps**			
compuMethod	CompuMethod	0..1	ref	Computation method associated with the semantics of this data object. **Tags:** atp.Splitkey=compuMethod xml.sequenceOffset=180
dataConstr	DataConstr	0..1	ref	Data constraint for this data object. **Tags:** atp.Splitkey=dataConstr xml.sequenceOffset=190
displayFormat	DisplayFormatString	0..1	attr	This property describes how a number is to be rendered e.g. in documents or in a measurement and calibration system. **Tags:** xml.sequenceOffset=210
display Presentation	DisplayPresentation Enum	0..1	attr	This attribute controls the presentation of the related data for measurement and calibration tools.
implementation DataType	AbstractImplementation DataType	0..1	ref	This association denotes the ImplementationDataType of a data declaration via its aggregated SwDataDefProps. It is used whenever a data declaration is not directly referring to a base type. Especially • redefinition of an ImplementationDataType via a "typedef" to another ImplementationDatatype • the target type of a pointer (see SwPointerTarget Props), if it does not refer to a base type directly • the data type of an array or record element within an ImplementationDataType, if it does not refer to a base type directly • the data type of an SwServiceArg, if it does not refer to a base type directly **Tags:** atp.Splitkey=implementationDataType xml.sequenceOffset=215
invalidValue	ValueSpecification	0..1	aggr	Optional value to express invalidity of the actual data element. **Tags:** atp.Splitkey=invalidValue xml.sequenceOffset=255
stepSize	Float	0..1	attr	This attribute can be used to define a value which is added to or subtracted from the value of a DataPrototype when using up/down keys while calibrating.
swAddrMethod	SwAddrMethod	0..1	ref	Addressing method related to this data object. Via an association to the same SwAddrMethod it can be specified that several DataPrototypes shall be located in the same memory without already specifying the memory section itself. **Tags:** atp.Splitkey=swAddrMethod xml.sequenceOffset=30
swAlignment	AlignmentType	0..1	attr	The attribute describes the intended typical alignment of the DataPrototype. If the attribute is not defined the alignment is determined by the swBaseType size and the memoryAllocationKeywordPolicy of the referenced Sw AddrMethod. **Tags:** xml.sequenceOffset=33

▽

△

Class	«atpVariation» **SwDataDefProps**			
swBit Representation	SwBitRepresentation	0..1	aggr	Description of the binary representation in case of a bit variable. **Tags:** atp.Splitkey=swBitRepresentation xml.sequenceOffset=60
swCalibration Access	SwCalibrationAccess Enum	0..1	attr	Specifies the read or write access by MCD tools for this data object. **Tags:** xml.sequenceOffset=70
swCalprmAxis Set	SwCalprmAxisSet	0..1	aggr	This specifies the properties of the axes in case of a curve or map etc. This is mainly applicable to calibration parameters. **Tags:** atp.Splitkey=swCalprmAxisSet xml.sequenceOffset=90
swComparison Variable	SwVariableRefProxy	*	aggr	Variables used for comparison in an MCD process. **Tags:** atp.Splitkey=swComparisonVariable xml.sequenceOffset=170 xml.typeElement=false
swData Dependency	SwDataDependency	0..1	aggr	Describes how the value of the data object has to be calculated from the value of another data object (by the MCD system). **Tags:** atp.Splitkey=swDataDependency xml.sequenceOffset=200
swHostVariable	SwVariableRefProxy	0..1	aggr	Contains a reference to a variable which serves as a host-variable for a bit variable. Only applicable to bit objects. **Tags:** atp.Splitkey=swHostVariable xml.sequenceOffset=220 xml.typeElement=false
swImplPolicy	SwImplPolicyEnum	0..1	attr	Implementation policy for this data object. **Tags:** xml.sequenceOffset=230
swIntended Resolution	Numerical	0..1	attr	The purpose of this element is to describe the requested quantization of data objects early on in the design process. The resolution ultimately occurs via the conversion formula present (compuMethod), which specifies the transition from the physical world to the standardized world (and vice-versa) (here, "the slope per bit" is present implicitly in the conversion formula). In the case of a development phase without a fixed conversion formula, a pre-specification can occur through swIntendedResolution. The resolution is specified in the physical domain according to the property "unit". **Tags:** xml.sequenceOffset=240
swInterpolation Method	Identifier	0..1	attr	This is a keyword identifying the mathematical method to be applied for interpolation. The keyword needs to be related to the interpolation routine which needs to be invoked. **Tags:** xml.sequenceOffset=250

▽

△

Class	«atpVariation» **SwDataDefProps**			
swIsVirtual	Boolean	0..1	attr	This element distinguishes virtual objects. Virtual objects do not appear in the memory, their derivation is much more dependent on other objects and hence they shall have a swDataDependency . **Tags:** xml.sequenceOffset=260
swPointerTarget Props	SwPointerTargetProps	0..1	aggr	Specifies that the containing data object is a pointer to another data object. **Tags:** atp.Splitkey=swPointerTargetProps xml.sequenceOffset=280
swRecord Layout	SwRecordLayout	0..1	ref	Record layout for this data object. **Tags:** atp.Splitkey=swRecordLayout xml.sequenceOffset=290
swRefresh Timing	MultidimensionalTime	0..1	aggr	This element specifies the frequency in which the object involved shall be or is called or calculated. This timing can be collected from the task in which write access processes to the variable run. But this cannot be done by the MCD system. So this attribute can be used in an early phase to express the desired refresh timing and later on to specify the real refresh timing. **Tags:** atp.Splitkey=swRefreshTiming xml.sequenceOffset=300
swTextProps	SwTextProps	0..1	aggr	the specific properties if the data object is a text object. **Tags:** atp.Splitkey=swTextProps xml.sequenceOffset=120
swValueBlock Size	Numerical	0..1	attr	This represents the size of a Value Block **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=80
swValueBlock SizeMult (ordered)	Numerical	*	attr	This attribute is used to specify the dimensions of a value block (VAL_BLK) for the case that that value block has more than one dimension. The dimensions given in this attribute are ordered such that the first entry represents the first dimension, the second entry represents the second dimension, and so on. For one-dimensional value blocks the attribute swValue BlockSize shall be used and this attribute shall not exist. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
unit	Unit	0..1	ref	Physical unit associated with the semantics of this data object. This attribute applies if no compuMethod is specified. If both units (this as well as via compuMethod) are specified the units shall be compatible. **Tags:** atp.Splitkey=unit xml.sequenceOffset=350

▽

△

Class	«atpVariation» **SwDataDefProps**			
valueAxisData Type	ApplicationPrimitive DataType	0..1	ref	The referenced ApplicationPrimitiveDataType represents the primitive data type of the value axis within a compound primitive (e.g. curve, map). It supersedes CompuMethod, Unit, and BaseType. **Tags:** atp.Splitkey=valueAxisDataType xml.sequenceOffset=355

Table 5.39: SwDataDefProps

Primitive	**NativeDeclarationString**
Note	This string contains a native data declaration of a data type in a programming language. It is basically a string, but white-space shall be preserved. **Tags:** xml.xsd.customType=NATIVE-DECLARATION-STRING xml.xsd.type=string xml.xsd.whiteSpace=preserve

Table 5.40: NativeDeclarationString

Primitive	**DisplayFormatString**
Note	This is a display format specifier for the display of values e.g. in documents or in measurement and calibration systems. The display format specifier is a subset of the ANSI C printf specifiers with the following form: % [flags] [width] [.prec] type character Due to the numerical nature of value settings, only the following type characters are allowed: • d: Signed decimal integer • i: Signed decimal integer • o: Unsigned octal integer • u: Unsigned decimal integer • x: Unsigned hexadecimal integer, using "abcdef" • X: Unsigned hexadecimal integer, using "ABCDEF" • e: Signed value having the form [-]d.dddd e [sign]ddd where d is a single decimal digit, dddd is one or more decimal digits, ddd is exactly three decimal digits, and sign is + or - • E: Identical to the e format except that E rather than e introduces the exponent • f: Signed value having the form [-]dddd.dddd, where dddd is one or more decimal digits; the number of digits before the decimal point depends on the magnitude of the number, and the number of digits after the decimal point depends on the requested precision • g: Signed value printed in f or e format, whichever is more compact for the given value and precision; trailing zeros are truncated, and the decimal point appears only if one or more digits follow it • G: Identical to the g format, except that E, rather than e, introduces the exponent (where appropriate) • b: binary number without prefix or suffix, e.g. 110 • B: binary number with suffix capital B, e.g. 110B **Tags:** xml.xsd.customType=DISPLAY-FORMAT-STRING xml.xsd.pattern=%[\-+#]?[0-9]*(\.[0-9]+)?[bBdiouxXfeEgGcs] xml.xsd.type=string

Table 5.41: DisplayFormatString

Class	**SwBitRepresentation**			
Note	Description of the structure of a bit variable: Comprises of the bitPosition in a memory object (e.g. sw HostVariable, which stands parallel to swBitRepresentation) and the numberOfBits . In this way, interrelated memory areas can be described. Non-related memory areas are not supported.			
Base	*ARObject*			
Aggregated by	SwDataDefProps.swBitRepresentation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
bitPosition	Integer	0..1	attr	If the "bit data object" is hosted within another data object (e.g. if the memory can be accessed via byte as well as bit address), this attribute specifies the position of the data object. The count starts at zero (0). **Tags:** xml.sequenceOffset=20
numberOfBits	Integer	0..1	attr	Number of bits allocated by a "bit data object" within its host data object. **Tags:** xml.sequenceOffset=30

Table 5.42: SwBitRepresentation

Class	**Annotation**			
Note	This is a plain annotation which does not have further formal data.			
Base	*ARObject*, *GeneralAnnotation*			
Aggregated by	*EcucAbstractReferenceValue*.annotation, *EcucParameterValue*.annotation, HwAttributeValue.annotation, *Identifiable*.annotation, PostBuildVariantCriterionValue.annotation, SwDataDefProps.annotation, SwSystemconstValue.annotation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.43: Annotation

Enumeration	**SwCalibrationAccessEnum**
Note	Determines the access rights to a data object w.r.t. measurement and calibration.
Aggregated by	ModeDeclarationGroupPrototype.swCalibrationAccess, SwCalprmAxis.swCalibrationAccess, SwDataDefProps.swCalibrationAccess
Literal	***Description***
notAccessible	The element will not be accessible via MCD tools, i.e. will not appear in the ASAP file. **Tags:** atp.EnumerationLiteralIndex=0
readOnly	The element will only appear as read-only in an ASAP file. **Tags:** atp.EnumerationLiteralIndex=1
readWrite	The element will appear in the ASAP file with both read and write access. **Tags:** atp.EnumerationLiteralIndex=2

Table 5.44: SwCalibrationAccessEnum

[TPS_SWCT_01273] Precedence rules for the application of `SwDataDefProps`
⌈`SwDataDefProps` can be specified on various levels, from type over prototype to instantiation, finally data access and calibration support after RTE generation. In general, properties specified on prototype level override the ones specified on type level.

More formally, the precedence of such properties is:

1. attributes of `SwDataDefProps` defined on `ApplicationDataType` which may be overwritten by

2. attributes of SwDataDefProps defined on ImplementationDataType which may be overwritten by
3. attributes of SwDataDefProps defined on DataPrototype which may be overwritten by
4. attributes of SwDataDefProps defined on InstantiationDataDefProps which may be overwritten by
5. attributes of SwDataDefProps defined on ParameterAccess respectively Argument which may be overwritten by
6. attributes of SwDataDefProps defined on FlatInstanceDescriptor which may be overwritten by
7. attributes of SwDataDefProps defined on McDataInstance

⌋

Note that details about applicable attributes of SwDataDefProps can be found in [constr_1015].

Enumeration	**SwImplPolicyEnum**
Note	Specifies the implementation strategy with respect to consistency mechanisms of variables.
Aggregated by	BswInternalTriggeringPoint.swImplPolicy, InternalTriggeringPoint.swImplPolicy, SwDataDefProps.swImplPolicy, Trigger.swImplPolicy
Literal	***Description***
const	forced implementation such that the running software within the ECU shall not modify it. For example implemented with the "const" modifier in C. This can be applied for parameters (not for those in NVRAM) as well as argument data prototypes. **Tags:** atp.EnumerationLiteralIndex=0
fixed	This data element is fixed. In particular this indicates, that it might also be implemented e.g. as in place data, (#DEFINE). **Tags:** atp.EnumerationLiteralIndex=1
measurementPoint	The data element is created for measurement purposes only. The data element is never read directly within the ECU software. In contrast to a "standard" data element in an unconnected provide port is, this unconnection is guaranteed for measurementPoint data elements. **Tags:** atp.EnumerationLiteralIndex=2
queued	The content of the data element is queued and the data element has 'event' semantics, i.e. data elements are stored in a queue and all data elements are processed in 'first in first out' order. The queuing is intended to be implemented by RTE Generator. This value is not applicable for parameters. **Tags:** atp.EnumerationLiteralIndex=3
standard	This is applicable for all kinds of data elements. For variable data prototypes the 'last is best' semantics applies. For parameter there is no specific implementation directive. **Tags:** atp.EnumerationLiteralIndex=4

Table 5.45: SwImplPolicyEnum

[TPS_SWCT_01274] SwDataDefProps used to support calibration and measurement ⌈The last item in the list of use cases contained in [TPS_SWCT_01273] denotes that SwDataDefProps are also used as part of McSupportData which is a direct input to the generation of measurement and calibration configuration formats (so-called A2L-files).

This use case is further explained in [6, BSW Module Description Template]. Since these data are generated by the RTE, they will use a copy of the properties according to the precedence given above.

However, even in this use case which comes after RTE generation it is possible that properties relevant for the MCD system are added which had been undefined so far.

This, for example, applies to the attribute swRefreshTiming which denotes a timing information relevant for the measurement system; this information may be set rather late in the process chain.⌋

Such an override is not applicable in all cases. In particular, the properties covering the structure shall not be redefined on DataPrototype. Implementation policy, semantics and code generation policy may be changed under consideration of compatibility rules.

Access policy for the MCD system is the most likely to be redefined on the DataPrototype, or even on an instantiation level.

Chapter 5.4.3 describes how SwDataDefProps are used for measuring purposes while Chapter 5.4.4 describes the construction of characteristics based on the combination of SwDataDefProps with DataPrototypes.

Chapter 2.3.2 describes in which context calibration parameters can be defined. Finally, Chapter 2.3.3, Chapter 7.5.4, Chapter 5.5.5 show how calibration parameters are used in RunnableEntitys and show the link to an actual ECU implementation.

[constr_2035] swImplPolicy for VariableDataPrototype in SenderReceiverInterface

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a VariableDataPrototype owned by a SenderReceiverInterface shall be either standard, queued, or measurementPoint.⌋

[constr_2036] swImplPolicy for VariableDataPrototype in NvDataInterface

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a VariableDataPrototype owned by a NvDataInterface shall be standard.⌋

[constr_2037] swImplPolicy for VariableDataPrototype in the role ramBlock

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a VariableDataPrototype aggregated in the role NvBlockDescriptor.ramBlock shall be standard.⌋

[constr_2038] swImplPolicy for VariableDataPrototype in the role implicitInterRunnableVariable

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a VariableDataPrototype aggregated in the role SwcInternalBehavior.implicitInterRunnableVariable shall be standard.⌋

[constr_2039] swImplPolicy for VariableDataPrototype in the role explicitInterRunnableVariable

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a VariableDataPrototype aggregated in the role SwcInternalBehavior.explicitInterRunnableVariable shall be standard.⌋

[constr_10099] Allowed values of the attribute SwDataDefProps.swImplPolicy vs. DataPrototypes and their roles

Imposition time: CP: IT_CpgExe

⌈

Attribute of SwImplPolicyEnum	VariableDataPrototype							ParameterDataPrototype					Misc.
	VariableDataPrototype in SenderReceiverInterface	VariableDataPrototype in NvDataInterface	VariableDataPrototype in role ramBlock	VariableDataPrototype in role implicitInterRunnableVariable	VariableDataPrototype in role explicitInterRunnableVariable	VariableDataPrototype in role arTypedPerInstanceMemory	VariableDataPrototype in role staticMemory	ParameterDataPrototype in ParameterInterface	ParameterDataPrototype in role romBlock	ParameterDataPrototype in role sharedParameter	ParameterDataPrototype in role perInstanceParameter	ParameterDataPrototype in role constantMemory	ArgumentDataPrototype
const								x		x	x	x	
fixed								x				x	
measurementPoint	x					x	x						
queued	x												
standard	x	x	x	x	x	x	x	x	x	x	x	x	x

⌋

Legend

The following settings apply to the table contained in [constr_10099]:

x Attribute is applicable for usage in the scope of this element.

Empty Cell Attribute is **not** applicable for usage in the scope of this element.

The restrictions implemented in [constr_10099] reflect the fact that not all possible implementation strategies are useful or supported for all kinds of DataPrototypes.

The use of swImplPolicy is further constrained in combination with the attribute value swCalibrationAccess as described in [constr_1017].

[constr_2040] swImplPolicy for VariableDataPrototype in the role arTypedPerInstanceMemory

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a VariableDataPrototype aggregated in the role SwcInternalBehavior.arTypedPerInstanceMemory shall be standard or measurementPoint.⌋

[constr_2041] swImplPolicy for VariableDataPrototype in the role staticMemory

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a VariableDataPrototype aggregated in the role InternalBehavior.staticMemory shall be standard or measurementPoint.⌋

[constr_2042] swImplPolicy for ParameterDataPrototype in ParameterInterface

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a ParameterDataPrototype owned by a ParameterInterface shall be either standard, const, or fixed.⌋

[constr_2043] swImplPolicy for ParameterDataPrototype in the role romBlock

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a ParameterDataPrototype aggregated in the role NvBlockDescriptor.romBlock shall be standard.⌋

[constr_2044] swImplPolicy for ParameterDataPrototype in the role sharedParameter

Imposition time: CP: IT_CpgExe

⌈The overriding value of attribute swImplPolicy of a ParameterDataPrototype aggregated in the role SwcInternalBehavior.sharedParameter shall be standard or const.⌋

[constr_2045] `swImplPolicy` for `ParameterDataPrototype` in the role `perInstanceParameter`

Imposition time: CP: `IT_CpgExe`

⌈The overriding value of attribute `swImplPolicy` of a `ParameterDataPrototype` in the role `SwcInternalBehavior.perInstanceParameter` shall be `standard` or `const`.⌋

[constr_2046] `swImplPolicy` for `ParameterDataPrototype` in the role `constantMemory`

Imposition time: CP: `IT_CpgExe`

⌈The overriding value of attribute `swImplPolicy` of a `ParameterDataPrototype` aggregated in the role `InternalBehavior.constantMemory` shall be `standard`, `const`, or `fixed`.⌋

[constr_2047] `swImplPolicy` for `ArgumentDataPrototype`

Imposition time: CP: `IT_CpgExe`

⌈The overriding value of attribute `swImplPolicy` of an `ArgumentDataPrototype` shall be `standard`.⌋

[TPS_SWCT_02000] Default value for attribute `swImplPolicy` ⌈If the attribute `swImplPolicy` is not explicitly set at any of the locations listed in "Place of Setting" for `SwDataDefProps`, the default value `standard` applies.⌋

The locations listed in "Place of Setting" for `SwDataDefProps` are described in [constr_1015].

5.4.2 Invalid Value

The diagram in Figure 5.10 shows that in addition to the semantics defined through the `compuMethod` (explained below in Chapter 5.5.1), an `invalidValue` can be specified. This is a requirement of the [3, TR Virtual Function Bus], allowing the specification of which value is used to indicate invalidation.



Figure 5.30: Invalid value

The relation of the definition of an `invalidValue` to a `CompuMethod` (see Chapter 5.5.1) is illustrated in Figure 5.31, Figure 5.32, and Figure 5.33.

Figure 5.31 depicts the possibility that the `invalidValue` can be defined (with different consequences, see [TPS_SWCT_01834] and [TPS_SWCT_01835]) **inside or outside** the boundaries of the corresponding `CompuMethod`.

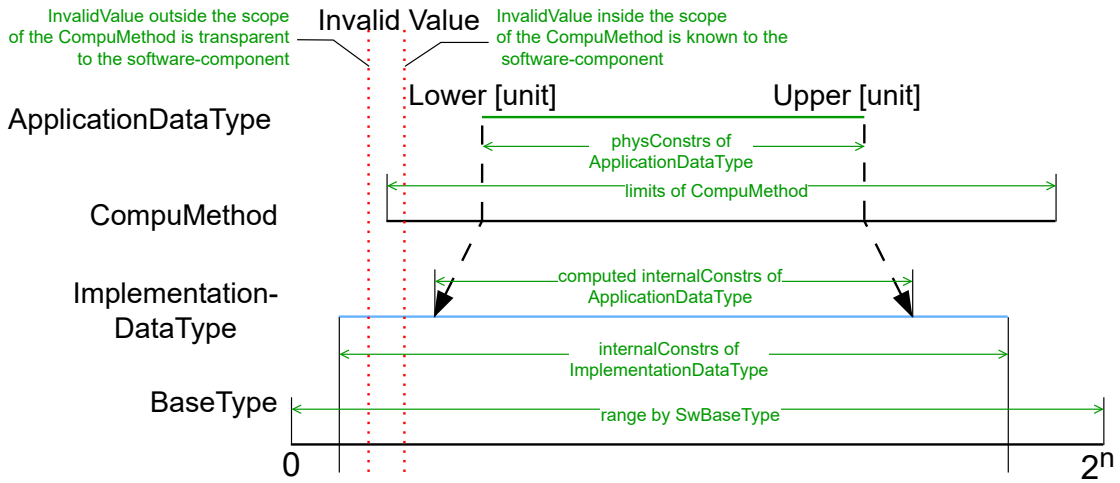

Figure 5.31: Value ranges and invalid values for linear and rational `CompuMethod`

Figure 5.32 and Figure 5.33 depict a similar situation for the case of mixed `CompuMethod`s where the `invalidValue` is defined in the discrete part of a `CompuMethod`.

Figure 5.32 sketches a case where a `CompuMethod` has a linear and a discrete part and the `invalidValue` is defined by means of one value that is defined in the discrete part of the `CompuMethod`.

As mentioned by [TPS_SWCT_01834], the `invalidValue` shall be defined in the physical domain in this case. In other words, the `invalidValue` shall be defined by a symbol according to [TPS_SWCT_01432].

As a consequence of defining an `invalidValue` **inside** the scope of a mixed `CompuMethod`, the `invalidValue` is visible to the software-component.

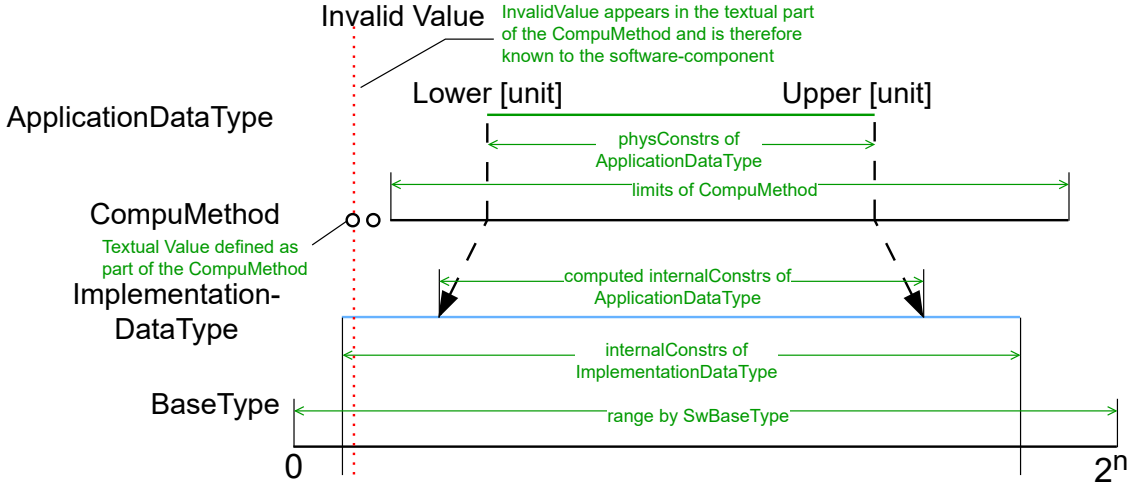

Figure 5.32: Value ranges and invalid values with discrete `invalidValue` defined inside the scope of the `CompuMethod`

Figure 5.33, on the other hand, sketches a case where a CompuMethod has a linear and a discrete part and the invalidValue is not within the defined linear interval and not defined by means of one value out of the discrete part of the CompuMethod.

As mentioned by [TPS_SWCT_01835], the invalidValue shall be defined in the internal domain in this case. In other words, the invalidValue shall be defined by a NumericalValueSpecification.

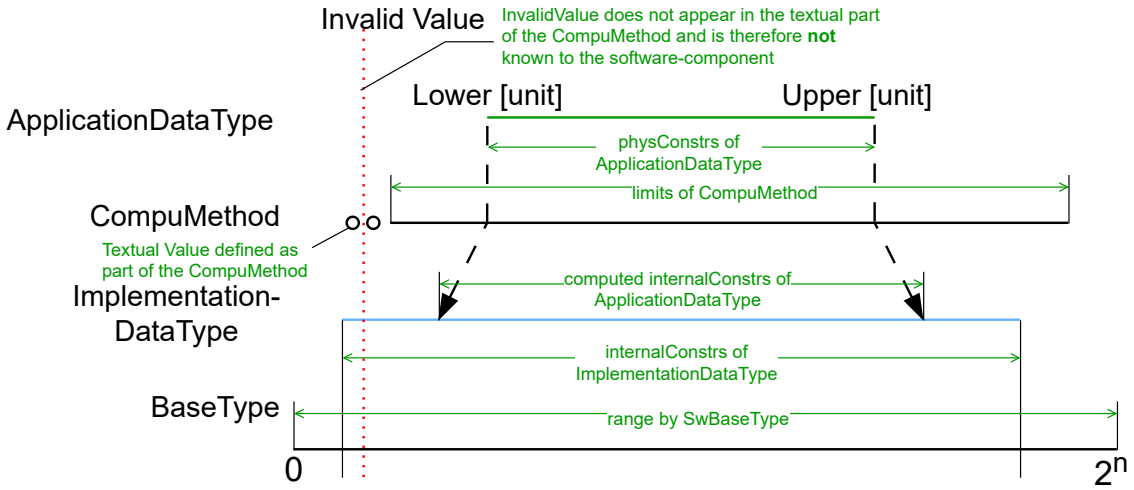

Figure 5.33: Value ranges and invalid values with discrete invalidValue defined outside the scope of the CompuMethod

As a consequence of the definition of an invalidValue **outside** the scope of a mixed CompuMethod, the invalidValue is invisible (and therefore not accessible) to the software-component.

The conclusions of the illustrations in Figure 5.31, Figure 5.32, and Figure 5.33 are summarized in the following list:

- **[TPS_SWCT_01432] invalidValue outside limits of compuMethod requires processing by RTE** ⌈If the value of the attribute invalidValue is outside the range limits defined by the compuMethod, it is invisible (unknown, transparent) to the communicating software-components. In this case, the processing of the invalidValue is performed by the RTE.

  The sender has to use the invalidation API of the RTE. The receiving software-component can either use the data receive status, or the DataReceiveErrorEvent or DataReceivedEvent to determine the validity of the received data.

  Alternatively, the receiving software-component can be designed so that it relies on the reception of an initValue as a default value in the case of data invalidation.⌋

[TPS_SWCT_01835] `invalidValue` is outside the scope of the `compuMethod` ⌈If the value of the `invalidValue` of an `ApplicationPrimitiveDataType` of `category` `VALUE` is intended to be **outside** the scope of the applicable `CompuMethod`, a `NumericalValueSpecification` (that provides a value in the internal representation) shall be used to describe the `invalidValue` of the `ApplicationPrimitiveDataType`.⌋

Because of the existence of [TPS_SWCT_01834] and [TPS_SWCT_01835], the definition of the `invalidValue` is fully specified and therefore [constr_1221] does not apply to this case.

- **[TPS_SWCT_01434] `invalidValue` is inside the limits of the `compuMethod`, handled by software-components** ⌈If the `invalidValue` is inside the range limits defined by the `compuMethod`, it is visible (known) to the communicating software-components. In this case, the software-components can directly read and write the value.

  This is particularly the case when the sender and receiver calculate a checksum over a larger data structure to implement end-to-end communication protection.

  To ensure the integrity of the checksums, it is required that the sending component sets invalid values directly and the receiving component receives them unchanged.⌋

  [TPS_SWCT_01834] `invalidValue` is inside the scope of the `compuMethod` ⌈If the value of the `invalidValue` of an `ApplicationPrimitiveDataType` of `category` `VALUE` is intended to be **inside** the scope of the applicable `CompuMethod`, an `ApplicationValueSpecification` shall be used to describe the `invalidValue` of the `ApplicationPrimitiveDataType`.⌋

  [TPS_SWCT_01834] means that the value of the `ApplicationValueSpecification` shall be within the bounds defined by `swDataDefProps.compuMethod.compuPhysToInternal.compuContent.compuScale.lowerLimit` or `upperLimit` or the inverse case that is based on the bounds defined by `swDataDefProps.compuMethod.compuInternalToPhys.compuContent.compuScale.lowerLimit` or `upperLimit`.

[TPS_SWCT_01436] Different receivers require different handling of data invalidation ⌈In the case of 1:n communication, different receivers may require different handling of data invalidation, depending on the criticality of their functionality. For instance, one receiver applies the checksum-based end-to-end communication protection and another receiver relies on the substitution of invalid values by `invalidValue`s.⌋

The handling of `invalidValue` for `ApplicationPrimitiveDataType` of `category` `STRING` is defined by [constr_1242].

A typical use case for putting the `invalidValue` inside the boundaries of the applicable `CompuMethod` is a composite data type that contains the values of all individual

wheel speeds. If one of the sensors fails and starts to send invalidValue, it would probably not make sense to consider the whole composite data element invalid.

It may still be possible to make sense of the remaining intact wheel speed values and continue processing that data in the receiving software-component.

From this perspective, the sending software-component may actively send the invalidValue, which is then processed as a "regular" value without additional semantics applied by the RTE/Com.

[TPS_SWCT_01646] Sending invalidValue without invalidation applied by RTE/Com ⌈For intentionally sending invalidValue without invalidation applied by RTE/Com, the SenderReceiverInterface.invalidationPolicy.handleInvalid shall be set to the value HandleInvalidEnum.dontInvalidate.⌋

[constr_1390] Restriction to the value of SenderReceiverInterface.invalidationPolicy.handleInvalid

Imposition time: CP: IT_CpgExe

⌈If the value of SenderReceiverInterface.invalidationPolicy.handleInvalid is set to any value other than HandleInvalidEnum.dontInvalidate, then the invalidValue shall not be within the interval defined by the CompuMethod of the applicable dataElement.⌋

ApplicationPrimitiveDataTypes of category VALUE in principle can have an invalidValue provided by a NumericalValueSpecification because the value of the attribute invalidValue can be **outside the range** of the applicable CompuMethod (see [TPS_SWCT_01432]).

[TPS_SWCT_01437] invalidValue can also be specified without setting a compuMethod ⌈An invalidValue can also be specified without setting a compuMethod.⌋

Figure 5.31 illustrates the relationship between ApplicationDataType, CompuMethod, ImplementationDataType, invalidValue, and BaseType.

[constr_2545] invalidValue shall fit in the specified ranges

Imposition time: CP: IT_CpgExe

⌈The invalidValue shall be in the range of the ImplementationDataType.⌋

The invalidValue is a ValueSpecification. Technically, any subclass of ValueSpecification could be used at this place.

[constr_1016] Restriction of invalidValue for ImplementationDataType and ImplementationDataTypeElement

Imposition time: CP: IT_CpgExe

⌈invalidValue for ImplementationDataType and ImplementationDataTypeElement is restricted to either a compatible NumericalValueSpecification, TextValueSpecification (caution, [constr_1284] applies) or a ConstantReference that in turn points to a compatible ValueSpecification.⌋

[constr_1384] Definition of invalidValue for DataPrototype typed by ApplicationPrimitiveDataType of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, RES_AXIS, and VAL_BLK

Imposition time: CP: IT_CpgExe

⌈An invalidValue **shall not** be specified for a DataPrototype typed by ApplicationPrimitiveDataType of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, RES_AXIS, and VAL_BLK.⌋

Rationale for [constr_1384]: there is no use case for sending a DataPrototype typed by ApplicationPrimitiveDataType of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, RES_AXIS, and VAL_BLK over a communication bus.

[TPS_SWCT_01486] ApplicationPrimitiveDataType of category STRING may have invalidValue ⌈The only kind of Compound Primitive Data Type that is allowed to define an invalidValue is an ApplicationPrimitiveDataType of category STRING.⌋

[constr_1241] Compound Primitive Data Types and invalidValue

Imposition time: CP: IT_CpgExe

⌈Compound Primitive Data Types that have set the value of category other than STRING shall **not** define invalidValue.⌋

[constr_1242] Restriction of invalidValue for ApplicationPrimitiveDataType of category STRING

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈invalidValue for ApplicationPrimitiveDataType of category STRING ([constr_1241] applies) is restricted to either a compatible ApplicationValueSpecification or a ConstantReference that in turn points to a compatible ApplicationValueSpecification.⌋

[TPS_SWCT_01487] Correspondence of invalidValue for ApplicationPrimitiveDataType and ImplementationDataType ⌈The invalidValue specified on the level of an ApplicationPrimitiveDataType shall correspond to the invalidValue specified on the level of a compatible ImplementationDataType. The term “corresponds” boils down to:

- category VALUE or BOOLEAN: application of CompuMethod

- category STRING: definition of a constant value for a string. No formal support is defined to check that the invalidValues correspond to each other.

⌋

The definition of constant values for strings is explained in Chapter 5.6.8.

[constr_10196] Definition of invalidValue for DataPrototype typed by an ImplementationDataType that references a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE

Imposition time: CP: IT_CpgExe

⌈If an invalidValue is defined for a DataPrototype that is typed by an ImplementationDataType that references or inherits (see [constr_1015]) a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE, the applicable ValueSpecification shall be a TextValueSpecification **if** the value fits into the intervals defined by the CompuMethod.

In this case the value provided shall match one of the applicable text values (vt, shortLabel, symbol) defined by the applicable CompuScales.⌋

Several attributes of meta-class CompuScale can be used to describe the actual value. If several of these attributes exist within the context of one CompuScale, [TPS_SWCT_01696] clarifies the outcome.

The consequence of the existence of [constr_10196] is that a NumericalValueSpecification can be used for the definition of an invalidValue for a DataPrototype that is typed by an ImplementationDataType that references a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE if the invalidValue is **not** intended to be represented by the CompuMethod.

[constr_1302] Restriction of data invalidation

Imposition time: CP: IT_CpgExe

⌈Data invalidation is only applicable in the following cases on the **receiving** side:

1. VariableDataPrototypes typed by either an ApplicationPrimitiveDataType or an ImplementationDataType of category VALUE or TYPE_REFERENCE that boils down to category VALUE that have defined an invalidValue.
2. VariableDataPrototypes typed by either an ApplicationCompositeDataType or an ImplementationDataType of category STRUCTURE or ARRAY, or of category TYPE_REFERENCE that boils down to category STRUCTURE or ARRAY, that have **at least one** primitive element with an invalidValue.

⌋

[constr_1302], in general, leaves room for the definition of an invalid value for a DataPrototype typed by a Wrapped Union Data Type because it demands the existence of a primitive element that has an invalidValue. In the case of a Wrapped

Union Data Type, the primitive element could be the Member Selector, and thus [constr_1302] would technically be fulfilled.

On the one hand, it does not make sense to just define an invalid value for the Member Selector from a semantic point of view. On the other hand, the actual payload may not even have an invalid value according to [constr_1009] or [constr_1288], respectively.

To simplify the situation and make a clear statement, [constr_1446] has been defined.

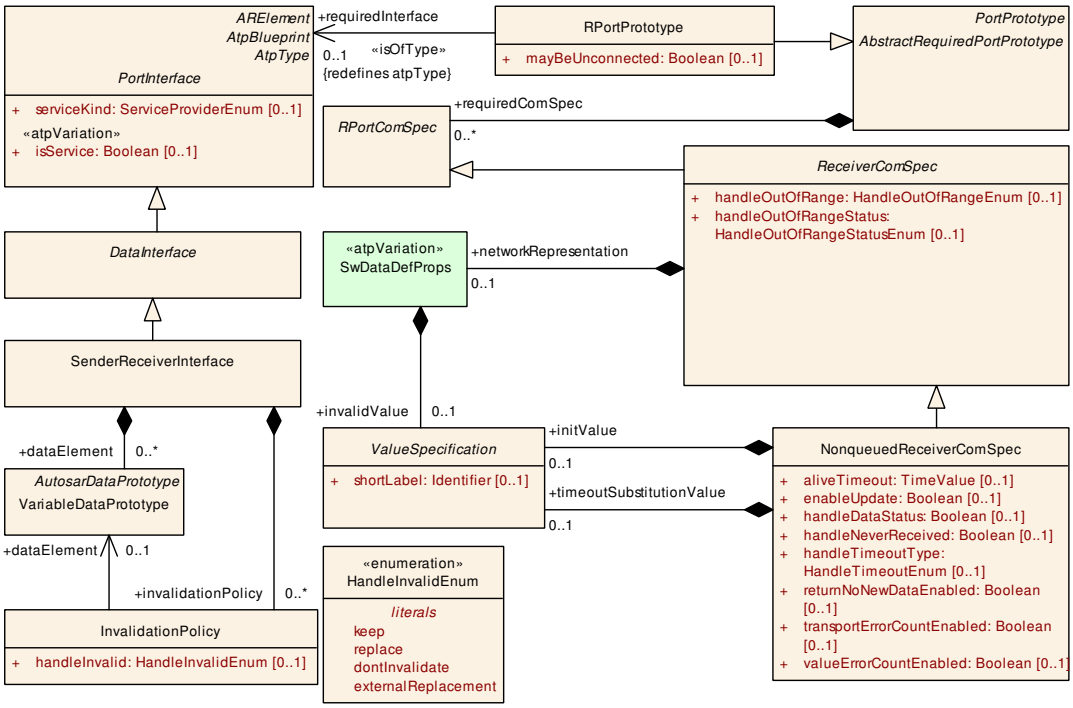

Figure 5.34: Relationships required to consider the invalidValue

[constr_1446] No definition of invalidValue for a Wrapped Union Data Type

Imposition time: CP: IT_CpgExe

⌈The definition of an invalidValue for a DataPrototype typed by a Wrapped Union Data Type is not supported.⌋

[constr_1140] Combination of invalidValue with the attribute handleInvalid

Imposition time: CP: IT_CpgExe

⌈The combination of setting the attribute handleInvalid of the meta-class InvalidationPolicy owned by SenderReceiverInterface to value replace **and** of setting the value of the attribute initValue owned by a corresponding NonqueuedReceiverComSpec effectively to the value of the invalidValue (owned by a corresponding SwDataDefProps) is not supported.⌋

The term “corresponding” (as used in [constr_1140]) refers to the fact that information regarding the fulfillment of [constr_1140] is distributed over different areas of the meta-model. To clarify, consider the following relationship:

The SenderReceiverInterface defines how to deal with an invalid value by means of the attribute handleInvalid on the basis of individual dataElements. The SenderReceiverInterface is used to type a RPortPrototype that in turn owns a ReceiverComSpec. [constr_1140] applies if the particular ReceiverComSpec is actually a NonqueuedReceiverComSpec that refers to the same dataElement.

In this case the invalidValue owned by the SwDataDefProps that in turn is owned by the respective dataElement is relevant for the fulfillment of [constr_1140]. The “big picture” of this relationship is sketched in Figure 5.34.

[constr_1219] Invalidation depends on the value of swImplPolicy

Imposition time: CP: IT_CpgExe

⌈If the value of swImplPolicy of a SenderReceiverInterface.dataElement is set to the value SwImplPolicyEnum.queued, then the enclosing SenderReceiverInterface shall not aggregate in the role invalidationPolicy an InvalidationPolicy

- that references the dataElement and
- where the value of InvalidationPolicy.handleInvalid is set to any value other than HandleInvalidEnum.dontInvalidate.

⌋

[constr_1282] Restriction on the use of RuleBasedValueSpecification or a ReferenceValueSpecification for the specification of an invalidValue

Imposition time: CP: IT_CpgExe

⌈The aggregation of a RuleBasedValueSpecification or a ReferenceValueSpecification for the definition of a ApplicationPrimitiveDataType.swDataDefProps.invalidValue is not supported.⌋

5.4.3 Properties for Measurement

In embedded automotive software design, measurement means access to memory locations in an ECU and transferring its contents to the measurement & calibration system.

In classical software design, variables abstract memory locations in the code. For this purpose, AUTOSAR provides the DataPrototype with its various specializations:

- VariableDataPrototype of a SenderReceiverInterface or NvDataInterface used in a PortPrototype (of a SwComponentPrototype),

to capture sender-receiver and non-volatile data communication between SwComponentPrototypes

- ArgumentDataPrototype of a ClientServerOperation in a ClientServerInterface to capture client-server communication between SwComponentPrototypes
- VariableDataPrototype in the context of an SwcInternalBehavior to
  - capture communication between RunnableEntitys within a SwComponentPrototype
  - handle data in a non-volatile memory block
  - provide pure software-component internal memory that shall be accessible to an MCD system

[TPS_SWCT_01440] Measurement is not limited to primitive data ⌈The ability to be measured is not restricted to primitive data (category VALUE) but also applies to composite data (category STRUCTURE or ARRAY).⌋

The following semantic and structural features of SwDataDefProps are relevant for the measurement system, among other purposes:

- swCalibrationAccess
- swImplPolicy
- compuMethod
- unit (if not specified by compuMethod)
- baseType

The valid settings of swCalibrationAccess are defined by [constr_1017].

[constr_1017] Supported combinations of swImplPolicy and swCalibrationAccess

Imposition time: CP: IT_CpgExe

⌈

swImplPolicy	swCalibrationAccess		
	notAccessible	readOnly	readWrite
fixed	**yes**	not supported	not supported
const	**yes**	**yes**	not supported
standard	**yes**	**yes**	**yes**
queued	**yes**	not supported	not supported
measurementPoint	not supported	**yes**	not supported

⌋

[TPS_SWCT_01130] Measurement and calibration access to model elements is defined by swCalibrationAccess ⌈The ability to be accessed, e.g. by a calibration tool, is enabled by setting the swCalibrationAccess attribute.⌋

[TPS_SWCT_01559] Default value for primitive attribute SwDataDefProps.swCalibrationAccess ⌈The default value for the attribute SwDataDefProps.swCalibrationAccess is SwCalibrationAccessEnum.notAccessible.⌋

[constr_1018] dataElement with swImplPolicy set to measurementPoint shall not be referenced by a VariableAccess aggregated by RunnableEntity in the role dataReadAccess

Imposition time: CP: IT_CpgExe

⌈Due to the nature of dataElements with swImplPolicy set to measurementPoint, such dataElements shall not be referenced by a VariableAccess aggregated by RunnableEntity in the role dataReadAccess.⌋

5.4.4 Properties of Curves and Maps

A characteristic table is defined by setting the category of the corresponding AutosarDataType or DataPrototype to CURVE, MAP, CUBOID, CUBE_4, or CUBE_5.

Its SwDataDefProps determine an axis description. The type of the functional values is given by the attached SwBaseType and the CompuMethod.

The axis description itself is defined by the meta-model element SwCalprmAxisSet aggregating the appropriate number of SwCalprmAxisTypeProps.

SwCalprmAxisTypeProps is the base class for a so-called “individual axis” (formalized by meta-class SwAxisIndividual) or a “grouped axis” (formalized by meta-class SwAxisGrouped).

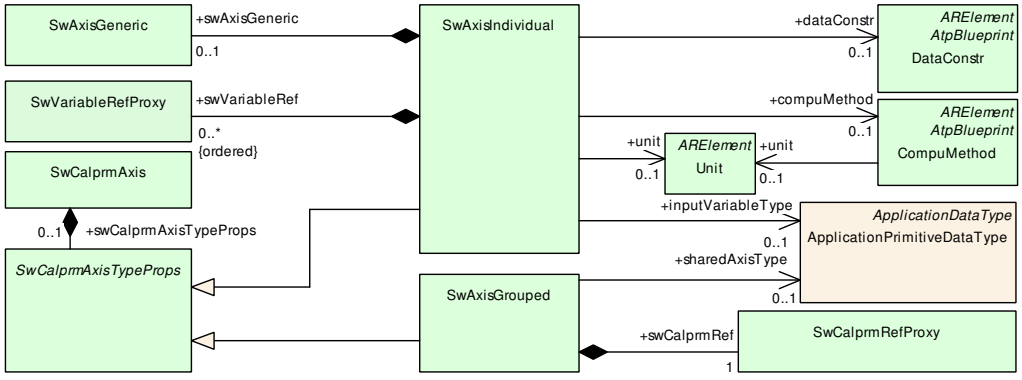

Figure 5.35: Overview of the Meta-Model for Axis Description

The latter is used to share axis points across several characteristic tables. Figure 5.35 shows an overview of the relevant meta-model elements.

The type of the functional values is given by the attached SwBaseType and the CompuMethod or by the referenced ApplicationDataType.

If an ApplicationDataType is referenced (via valueAxisDataType), it supersedes CompuMethod, Unit, and BaseType if these are defined in parallel.

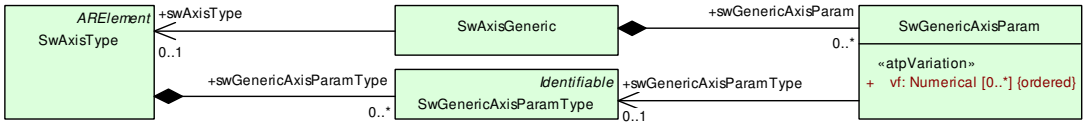

Figure 5.36: Overview of a Generic Axis

Figure 5.37 shows how an individual axis is represented by the meta-model. The corresponding M1 model is illustrated in Figure 5.38.

The SwAxisIndividual references value models that account for the minimum and maximum number of axis values, as well as the number of axis points.

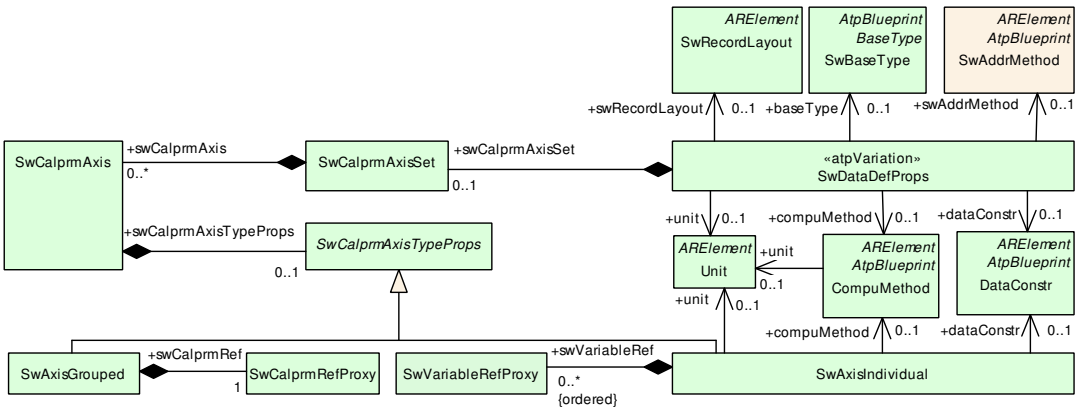

Figure 5.37: Meta-Model Elements used for a Curve

Hence, the size of the structure to hold the functional values is determined by the number of axis values for all axes.

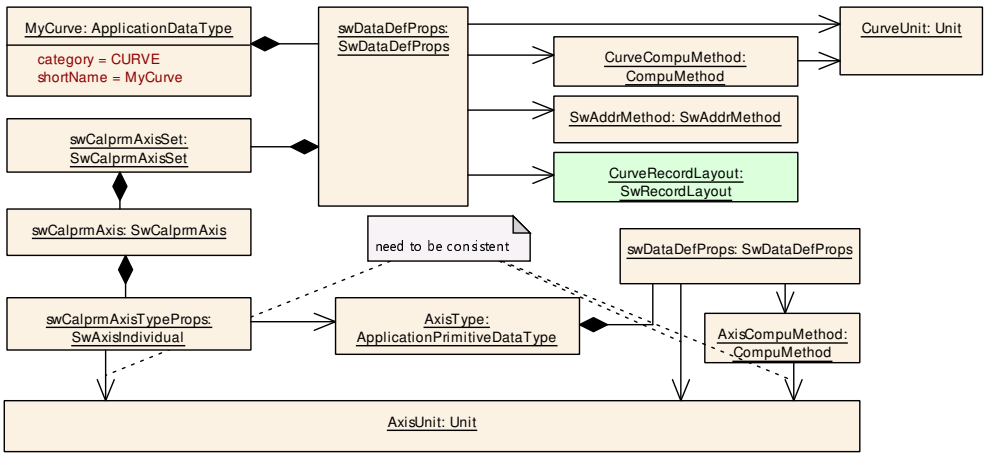

Figure 5.38: Illustration of a Curve at the M1 level

The type of the axis values is determined when the type of the referenced input value (swVariableRef) has been set. For further details, see Chapter 5.4.5.

[TPS_SWCT_01107] swMinAxisPoints and swMaxAxisPoints represent variation points ⌈The values of attributes swMinAxisPoints and swMaxAxisPoints are subject to variant handling.⌋

Class	**SwCalprmAxisSet**			
Note	This element specifies the input parameter axes (abscissas) of parameters (and variables, if these are used adaptively).			
Base	*ARObject*			
Aggregated by	SwDataDefProps.swCalprmAxisSet			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
swCalprmAxis	SwCalprmAxis	*	aggr	One axis belonging to this SwCalprmAxisSet **Tags:** atp.Splitkey=swCalprmAxis xml.roleElement=true xml.roleWrapperElement=false xml.sequenceOffset=20 xml.typeElement=false xml.typeWrapperElement=false

Table 5.46: SwCalprmAxisSet

Class	**SwCalprmAxis**			
Note	This element specifies an individual input parameter axis (abscissa).			
Base	*ARObject*			
Aggregated by	SwCalprmAxisSet.swCalprmAxis			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
category	CalprmAxisCategory Enum	0..1	attr	This property specifies the category of a particular axis. **Tags:** xml.sequenceOffset=30
displayFormat	DisplayFormatString	0..1	attr	This property specifies how the axis values shall be displayed e.g. in documents or in measurement and calibration tools. **Tags:** xml.sequenceOffset=100
swAxisIndex	AxisIndexType	0..1	attr	This attribute specifies which axis is specified by the containing SwCalprmAxis. For example in a curve this is usually "1". In a map this is "1" or "2". **Tags:** xml.sequenceOffset=20
swCalibration Access	SwCalibrationAccess Enum	0..1	attr	Describes the applicability of parameters and variables. **Tags:** xml.sequenceOffset=90
swCalprmAxis TypeProps	SwCalprmAxisType Props	0..1	aggr	specific properties depending on the type of the axis. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=40 xml.typeElement=true xml.typeWrapperElement=false

Table 5.47: SwCalprmAxis

Enumeration	**CalprmAxisCategoryEnum**
Note	This enum specifies the possible values of the category property within SwCalprmAxis.
Aggregated by	RuleBasedAxisCont.category, SwAxisCont.category, SwCalprmAxis.category
Literal	***Description***
comAxis	COM_AXIS is equal to an STD_AXIS, the difference is, that a COM_AXIS is an shared axis, that means this axis can be used multiple times by different CURVEs, MAPs, CUBOIDs, CUBE_4s, and CUBE_5s. **Tags:** atp.EnumerationLiteralIndex=0 xml.name=COM_AXIS
fixAXIS	FIX_AXIS means that the input axis is not stored. The axis is calculated using parameters and so on it is also not possible to modify the axis points. **Tags:** atp.EnumerationLiteralIndex=4 xml.name=FIX_AXIS
resAxis	RES_AXIS is also an shared axis like COM_AXIS, the difference is that this kind of axis can be used for rescaling. **Tags:** atp.EnumerationLiteralIndex=6 xml.name=RES_AXIS
stdAxis	STD_AXIS means that input and output axis definition are stored within this CURVE, MAP, CUBOID, CUBE_4, and CUBE_5. There is no shared or calculated axis. **Tags:** atp.EnumerationLiteralIndex=8 xml.name=STD_AXIS

Table 5.48: CalprmAxisCategoryEnum

Class	***SwCalprmAxisTypeProps*** (abstract)			
Note	Base class for the type of the calibration axis. This provides the particular model of the specialization. If the specialization would be the directly from SwCalPrmAxis, the sequence of common properties and the specializes ones would be different.			
Base	*ARObject*			
Subclasses	SwAxisGrouped, SwAxisIndividual			
Aggregated by	SwCalprmAxis.swCalprmAxisTypeProps			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
maxGradient	Float	0..1	attr	This attribute defines the maximum permissible gradient for an adjustable object (curve, map or cuboid) with respect to a specific axis. MaxGrad = maximum(absolute((Value i,k - Value i-1,k)/(Axis Point i - Axis Point i-1)))
monotony	MonotonyEnum	0..1	attr	This attribute specifies the monotony constraint for an adjustable object (curve, map or cuboid) with respect to a specific axis. This information can be used by MCD system to verify whether the monotony constraint is fulfilled and to prevent from changes violating the constraint.

Table 5.49: SwCalprmAxisTypeProps

Class	**SwAxisIndividual**
Note	This meta-class describes an axis integrated into a parameter (field etc.). The integration makes this individual to each parameter. The so-called grouped axis represents the counterpart to this. It is conceived as an independent parameter (see class SwAxisGrouped).

▽

△

Class	**SwAxisIndividual**			
Base	*ARObject*, *SwCalprmAxisTypeProps*			
Aggregated by	SwCalprmAxis.swCalprmAxisTypeProps			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
compuMethod	CompuMethod	0..1	ref	This is the compuMethod which is expected for the axis. It is used in early stages if the particular input-value is not yet available. **Tags:** xml.sequenceOffset=30
dataConstr	DataConstr	0..1	ref	Refers to constraints, e.g. for plausibility checks. **Tags:** xml.sequenceOffset=80
inputVariable Type	ApplicationPrimitive DataType	0..1	ref	This is the datatype of the input value for the axis. This allows to define e.g. a type of curve, where the input value is finalized at the access point.
swAxisGeneric	SwAxisGeneric	0..1	aggr	this specifies the properties of a generic axis if applicable. **Tags:** xml.sequenceOffset=90
swMaxAxis Points	Integer	0..1	attr	Maximum number of base points contained in the axis of a map or curve. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=60
swMinAxis Points	Integer	0..1	attr	Minimum number of base points contained in the axis of a map or curve. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=70
swVariableRef (ordered)	SwVariableRefProxy	*	aggr	Refers to input variables of the axis. It is possible to specify more than one variable. Here the following is valid: • The variable with the highest priority shall be given first. It is used in the generation of the code and is also displayed first in the application system. • All variables referenced shall be of the same physical nature. This is usually detected in that the conversion formulae affected refer back to the same SI-units. In AUTOSAR this ensured by the constraint, that the referenced input variables shall use a type compatible to "inputVariableType". • This multiple referencing allows a base point distribution for more than one input variable to be used. One example of this are the temperature curves which can depend both on the induction air temperature and the engine temperature. These variables can be displayed simultaneously by MCD systems (adjustment systems), enabling operating points to be shown in the curves. **Tags:** xml.roleElement=false xml.roleWrapperElement=true xml.sequenceOffset=20 xml.typeElement=false xml.typeWrapperElement=false

▽

△

Class	SwAxisIndividual			
unit	Unit	0..1	ref	This represents the physical unit of the input value of the axis. It is provided to support the case that the particular input variable is not yet known. **Tags:** xml.sequenceOffset=40

Table 5.50: SwAxisIndividual

Class	SwAxisGeneric			
Note	This meta-class defines a generic axis. In a generic axis the axispoints points are calculated in the ECU. The ECU is equipped with a fixed calculation algorithm. Parameters for the algorithm can be stored in the data component of the ECU. Therefore these parameters are specified in the data declaration, not in the calibration data.			
Base	*ARObject*			
Aggregated by	SwAxisIndividual.swAxisGeneric			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
swAxisType	SwAxisType	0..1	ref	Associated axis calculation strategy. **Tags:** xml.sequenceOffset=20
swGenericAxis Param	SwGenericAxisParam	*	aggr	Specific parameter of a generic axis. **Tags:** xml.roleElement=true xml.roleWrapperElement=true xml.sequenceOffset=40 xml.typeElement=false xml.typeWrapperElement=false

Table 5.51: SwAxisGeneric

Class	SwAxisType			
Note	This meta-class represents a specific axis calculation strategy. No formal specification is given, due to the fact that it is possible to use arbitrary algorithms for calculating axis-points. Instead, the algorithm is described verbally but the parameters are specified formally with respect to their names and constraints. As a result, SwAxisType mainly reserves appropriate keywords. **Tags:** atp.recommendedPackage=SwAxisTypes			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
swGenericAxis Desc	DocumentationBlock	0..1	aggr	Associated axis description in textual form. **Tags:** atp.Splitkey=swGenericAxisDesc xml.sequenceOffset=20
swGenericAxis ParamType	SwGenericAxisParam Type	*	aggr	Parameters for this calculation algorithm. **Tags:** atp.Splitkey=swGenericAxisParamType, swGenericAxis ParamType.shortName xml.roleElement=true xml.roleWrapperElement=true xml.sequenceOffset=30 xml.typeElement=false xml.typeWrapperElement=false

Table 5.52: SwAxisType

Class	SwGenericAxisParam			
Note	This meta-class describes a specific parameter of a generic axis. The name of the parameter is defined through a reference to a parameter type defined on a corresponding axis type. The value of the parameter is given here in case that it is not changeable during calibration. Example is shift / offset in a fixed axis.			
Base	*ARObject*			
Aggregated by	SwAxisGeneric.swGenericAxisParam			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
swGenericAxis ParamType	SwGenericAxisParam Type	0..1	ref	Parameter type defined on a corresponding axis type. References can only be made to axis parameters types which are defined within the referenced axis type. **Tags:** xml.sequenceOffset=20
vf (ordered)	Numerical	*	attr	This attribute represents the value of the generic axis parameter. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.roleElement=true xml.roleWrapperElement=false xml.sequenceOffset=30 xml.typeElement=false

Table 5.53: SwGenericAxisParam

Class	SwGenericAxisParamType			
Note	This meta-class describes a generic axis parameter type, namely: • Plausibility checks can be specified via dataConstr. • Textual description (desc), as a formal description is not of any use, due to the large variety of possibilities. • If this parameter contains structures, these can be simulated through the recursive use of SwGeneric AxisParamTypes.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	SwAxisType.swGenericAxisParamType			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
dataConstr	DataConstr	0..1	ref	This reference denoted data constraints applicable to the generic axis parameter. **Tags:** atp.Splitkey=dataConstr xml.sequenceOffset=20

Table 5.54: SwGenericAxisParamType

Class	SwAxisGrouped			
Note	An SwAxisGrouped is an axis which is shared between multiple calibration parameters.			
Base	*ARObject*, *SwCalprmAxisTypeProps*			
Aggregated by	SwCalprmAxis.swCalprmAxisTypeProps			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
sharedAxisType	ApplicationPrimitive DataType	0..1	ref	This is the datatype of the calibration parameter providing the shared axis.



△

Class	**SwAxisGrouped**			
swAxisIndex	AxisIndexType	0..1	attr	Describes which axis of the referenced calibration parameter provides the values for the group axis. The index satisfies the following convention: • 0 = value axis. in this case, the interpolation result of the referenced parameter is used as a base point index. • The index should only be specified if the parameter under swCalprm contains more than one axis. It is standard practice for the axis index of parameters with more than one axis, to be set to 1, if data has not been assigned to swAxisIndex. **Tags:** xml.sequenceOffset=20
swCalprmRef	SwCalprmRefProxy	1	aggr	This property specifies the calibration parameter which serves as the input axis. In AUTOSAR, the type of the referenced Calibration parameter shall be compatible to the type specified by sharedAxisType. Please note that the multiplicity of this aggregation cannot be set to 0..1 based on the non-mainstream schema generation instructions defined at the aggregation. However, the multiplicity has to be factually considered 0..1 (i.e. a SwAxisGrouped that does not aggregate the role swCalprmRef is still valid according to the XML schema, depending on the use case documented in [constr_1015]). **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=30 xml.typeElement=false xml.typeWrapperElement=false

Table 5.55: SwAxisGrouped

5.4.4.1 Specification of grouped Axes

`SwAxisGrouped` has a dual nature in that it is used to

- define the data type of the shared axis (see Figure 5.39)
- identify the specific `DataPrototype` that implements a shared axis in the context of a specific access to the enclosing curve (see Figure 5.40)

Figure 5.39 depicts the usage of `SwAxisGrouped` for the definition of an `ApplicationPrimitiveDataType` that implements a curve.

`ApplicationPrimitiveDataType` appears in two different roles in the diagram:

- The definition of the `ApplicationPrimitiveDataType` of the curve itself is depicted in the upper part of the diagram.
- The selection of the `ApplicationPrimitiveDataType` that represents the grouped axis is depicted in the lower part of the diagram.

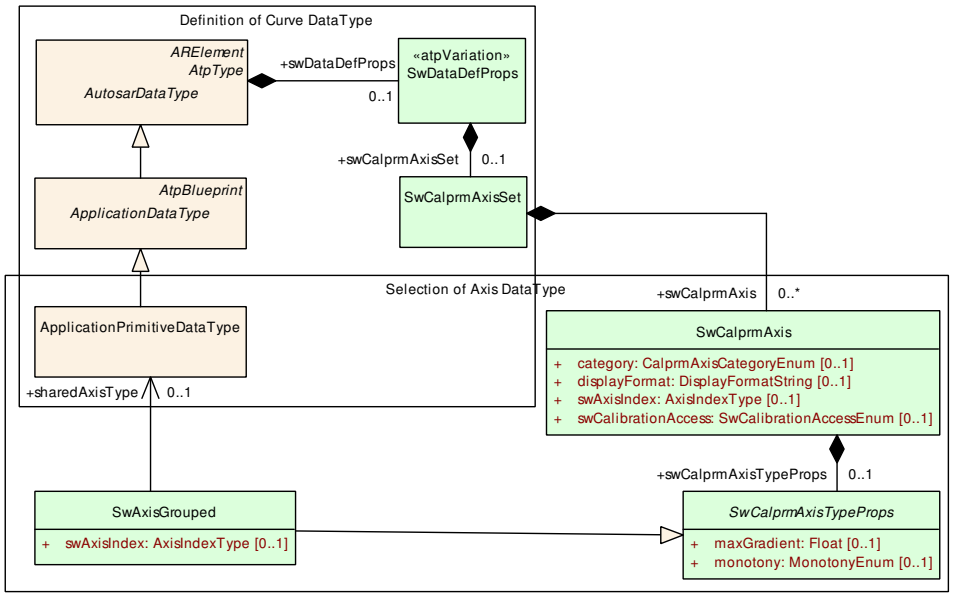

Figure 5.39: Definition of an `ApplicationPrimitiveDataType` that implements a curve

The modeling depicted in Figure 5.39 can be further clarified by a minimal example model that exemplifies the use case. Here, `SwAxisGrouped` defines the data type of the curve itself and of a shared axis:

```
<APPLICATION-PRIMITIVE-DATA-TYPE>
  <SHORT-NAME>MyAppType</SHORT-NAME>
  <CATEGORY>CURVE</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <SW-CALPRM-AXIS-SET>
          <SW-CALPRM-AXIS>
            <SW-AXIS-GROUPED>
              <SHARED-AXIS-TYPE-REF
              DEST="APPLICATION-PRIMITIVE-DATA-TYPE">/ApplicationDataTypes/MyAxisDataType</
                  SHARED-AXIS-TYPE-REF>
            </SW-AXIS-GROUPED>
          </SW-CALPRM-AXIS>
        </SW-CALPRM-AXIS-SET>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
</APPLICATION-PRIMITIVE-DATA-TYPE>
<APPLICATION-PRIMITIVE-DATA-TYPE>
  <SHORT-NAME>MyAxisDataType</SHORT-NAME>
</APPLICATION-PRIMITIVE-DATA-TYPE>
```

Listing 5.1: Usage of `SwAxisGrouped` to define the data type of a shared axis

Figure 5.40 depicts the usage of `SwAxisGrouped` in the context of a `ParameterAccess` (which, in the case of a curve, typically results in the call of an interpolation method for the respective curve and the specific axis used in the interpolation).

Also in this case, the diagram depicts two distinct (yet related) aspects:

- In the upper part of the diagram, the definition of the access to the `DataPrototype` that represents the specific curve inside the enclosing `SwComponentPrototype` is modeled by means of the `ParameterAccess.accessedParameter`.

- In the lower part of the diagram, the identification of the DataPrototype that represents the grouped axis inside the enclosing SwComponentPrototype is modeled by means of the SwAxisGrouped.swCalprmRef.arParameter.

The multiplicity of aggregation SwAxisGrouped.swCalprmRef cannot be set to 0..1 based on the *non-mainstream schema generation instructions*[16] defined at the aggregation.

However, the multiplicity shall in fact be considered 0..1 (i.e. a SwAxisGrouped that does not aggregate the role swCalprmRef is still valid according to the XML schema, depending on the use case documented in [constr_1015]).

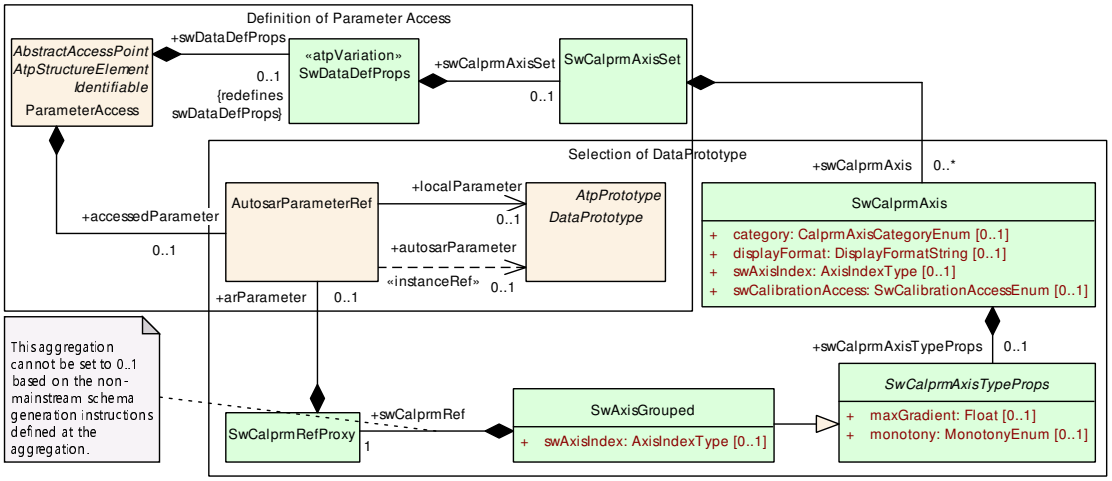

Figure 5.40: Usage of SwAxisGrouped in the context of a ParameterAccess

An example of the usage of SwAxisGrouped in the context of a ParameterAccess is provided in Chapter B.2.5.

[constr_10096] Shared axis shall not be a fixed axis

Imposition time: CP: IT_CpgExe

⌈An ApplicationPrimitiveDataType of category COM_AXIS shall not contain the definition of an SwCalprmAxis of category FIX_AXIS.⌋

Rationale for the existence of [constr_10096]: the definition of a grouped axis that is implemented by a fixed axis is not supported by the [15, ASAM MCD 2MC] standard.

5.4.4.2 Specification of fix Axes

In most cases the axes of a curve or map are accessible to a calibration software and it is possible to calibrate axis points and their corresponding values.

[16] The details are explained in the description of the schema generation control tags xml.roleElement and xml.roleWrapperElement, as well as xml.typeElement and xml.typeWrapperElement in the document [26, TPS XML Schema Production Rules].

There are cases, however, where axes are intentionally declared as fix and where no intention exists to change the properties of the axis ever[17].

These axes are also known as fix axes. The support for the creation of fix axes in the meta-model is based upon the usage of SwAxisGeneric as depicted in Figure 5.36.

[TPS_SWCT_01747] Value of category for fix axis ⌈A fix axis shall be modeled as an SwCalprmAxis with attribute category set to the value FIX_AXIS.⌋

[TPS_SWCT_01748] Sub-categories of fix axes ⌈There are different subcategories of fix axes:

- Fix axis where the distance between axis points can be computed according to a standardized algorithm.

  In this case, fix axes of arbitrary length can be described by feeding three arguments defined in the context of the axis description into the axis algorithm.

  Consequently, the memory footprint of fix axes of this category is identical, independent of the number of axis points.

  The following variations exist:

  - **Subcategory PAR**, i.e. category = FIX_AXIS_PAR: the axis is created out of a *starting value* and a *shift* that creates further axis points using a power-of-two algorithm. The details can be found in [15, ASAM MCD 2MC].
  - **Subcategory PAR_DIST**, i.e. category = FIX_AXIS_PAR_DIST: the axis is created out of a *starting value* and an *offset* that adds further axis points with the distance given by the offset. The details can be found in [15, ASAM MCD 2MC].

- Fix axis where the axis points are defined as a list of values directly in the axis definition. This variety comprises

  - **Subcategory PAR_LIST**, i.e. category = FIX_AXIS_PAR_LIST: the axis is created out of a list of numerical values that represent the axis points. The details can be found in [15, ASAM MCD 2MC].

These values of category shall be used for SwAxisType.⌋

As mentioned before, the modeling of a fix axis is based upon the definition of the SwAxisGeneric. However, this statement alone is not sufficient to unambiguously clarify the details of the modeling.

For this purpose, further information is required about the specifics of the roles SwAxisGeneric.swAxisType and SwAxisGeneric.swGenericAxisParam.

[17] Typically, a calibration software does not have the ability to manipulate (or even inspect) the axis's properties by inspecting the ECU's memory.

[TPS_SWCT_01749] Semantics of SwAxisGeneric.swAxisType in the definition of a fix axis ⌈The role SwAxisGeneric.swAxisType specifies the category of the fix axis according to [TPS_SWCT_01748].⌋

[TPS_SWCT_01750] Semantics of SwAxisGeneric.swGenericAxisParam in the definition of a fix axis ⌈The role SwAxisGeneric.swGenericAxisParam provides the actual numeric values for the definition of the axis.

The semantics of a provided numerical value is clarified by the attribute SwGenericAxisParamType.category where meta-class SwGenericAxisParamType is referenced in the role swGenericAxisParamType.⌋

The standardized values and multiplicities within the model of an SwAxisGeneric are defined in accordance with [TPS_SWCT_01479] and [TPS_SWCT_01480].

Note further that the axis points and values of a fix axis are defined in the definition of the fix axis itself and therefore any initial value assigned to a fix axis is ignored anyway.

This may lead to confusion, as the initial value does not make it into the software. To avoid such confusion, AUTOSAR **does not support the definition of an initial value for a fix axis**.

[constr_1544] Standardized values and multiplicities for the modeling of SwAxisGeneric for the definition of a fix axis

Imposition time: CP: IT_CpgExe

⌈

category of swAxisType	category of SwGenericAxisParamType	Multiplicity of swGenericAxisParam	Multiplicity of vf
FIX_AXIS_PAR	OFFSET	1	1
	SHIFT	1	1
FIX_AXIS_PAR_DIST	OFFSET	1	1
	DISTANCE	1	1
FIX_AXIS_PAR_LIST	LIST	1	1..*

⌋

This regulation is reflected in the existence of [constr_1545].

[constr_1545] No initialization for fix axis

Imposition time: CP: IT_CpgExe

⌈An ApplicationValueSpecification taken to initialize an ApplicationPrimitiveDataType that contains a fix axis shall not contain initial values for the axis index of the fix axis inside the ApplicationPrimitiveDataType.⌋

The calibration software may still have access to axis points and values of the fix axis if these properties are specified in an A2L file.

For this purpose McDataInstance needs to be set up properly. The details are explained in [6, TPS BSW Module Description Template].

Examples of the definition of a fix axis can be found in Chapter B.2.6.

5.4.5 Setting an Axis Input Value

When an interpolation routine is called, an input value shall be provided to find the appropriate axis entry in the implementation of a RunnableEntity. However, this input value cannot be chosen arbitrarily but can only be selected from the available VariableDataPrototypes assigned to it.

Attributes (e.g. displayFormat, swCalibrationAccess) of a shared axis can be defined in the context of the definition of the ApplicationPrimitiveDataType of category COM_AXIS for the shared axis.

The same ability to define attributes[18] is also required for the definition of an "embedded" stdAxis.

There are several possible ways to define the required attributes, e.g. by means of the existence of the reference in the role inputVariableType if SwCalprmAxis.swCalprmAxisTypeProps yields an SwAxisIndividual, see [TPS_SWCT_01865].

Note that the modeling of SwCalprmAxis and SwAxisIndividual, as mentioned in [TPS_SWCT_01865] and [TPS_SWCT_01866], is depicted in Figure 5.28.

[TPS_SWCT_01865] Definition of attributes for an "embedded" axis if reference inputVariableType exists ⌈If SwCalprmAxis.swCalprmAxisTypeProps yields an SwAxisIndividual and if the reference in the role SwAxisIndividual.inputVariableType exists, then the definition of attributes (e.g. displayFormat, swCalibrationAccess) of an SwCalprmAxis of category stdAxis can be done via the SwDataDefProps attached to the ApplicationPrimitiveDataType referenced in the role SwCalprmAxis.swCalprmAxisTypeProps.inputVariableType.⌋

[TPS_SWCT_01866] Definition of attributes for an "embedded" axis if reference inputVariableType does not exist ⌈If SwCalprmAxis.swCalprmAxisTypeProps yields an SwAxisIndividual and if the reference in the role SwAxisIndividual.inputVariableType does not exist, then the attributes can be taken from the AutosarDataTypes of DataPrototypes referenced from a swVariableRef aggregated by an SwAxisIndividual, which in turn is obtained in the role swCalprmAxisTypeProps from an enclosing SwCalprmAxis.

In this case, the respective attributes shall be compatible in all AutosarDataTypes used to type DataPrototypes referenced from within the role SwAxisIndividual.swVariableRef.⌋

[18] Some attributes, such as CompuMethod or DataConstr of an "embedded" axis, can be defined directly on the basis of the SwAxisIndividual, but these are just individual shortcuts.

This leaves the compatibility check between the DataPrototype(s) referenced by means of SwAxisIndividual.swVariableRef and the actual axis specification to the following attributes:

- SwAxisIndividual.dataConstr
- SwAxisIndividual.compuMethod
- SwAxisIndividual.unit

[TPS_SWCT_01676] Preferred approach to checking the compatibility of input value and axis ⌈The compatibility in terms of data type between the description of an SwAxisIndividual and the DataPrototype(s) used as an input variable to the respective interpolation routine shall preferably be checked against one of the following:

- the ApplicationPrimitiveDataType(s) of DataPrototype(s) referenced by means of SwAxisIndividual.swVariableRef (the provider in terms of compatibility)
- the ApplicationPrimitiveDataType referenced by means of SwAxisIndividual.inputVariableType (the requester in terms of compatibility)

For compatibility, the compuMethod of SwAxisIndividual.swVariableRef and the ApplicationPrimitiveDataType referenced by means of SwAxisIndividual.inputVariableType shall not be considered.⌋

Rationale: In many cases, the input variable is defined by a float data type to benefit from the precision of computations, whereas the axis data type is an integer data type to save memory. In this situation, a requirement for compatible compuMethods would exclude the described scenario.

The implementation of the software component shall ensure that the float value is properly converted and rescaled to an integer data type compatible with the axis data type.

[TPS_SWCT_01677] Fall-back approach to checking the compatibility of input value and axis ⌈If the reference SwAxisIndividual.inputVariableType does not exist, then the compatibility in terms of data type between the description of an SwAxisIndividual and the DataPrototype(s) used as an input variable to the respective interpolation routine shall be checked on the basis of the following references:

- SwAxisIndividual.dataConstr
- SwAxisIndividual.unit

respectively

- SwAxisIndividual.dataConstr
- SwAxisIndividual.compuMethod.unit

against their respective counterparts in the ApplicationPrimitiveDataTypes of the DataPrototype(s) referenced by means of SwAxisIndividual.swVariableRef.⌋

[constr_1420] Existence of SwAxisIndividual.inputVariableType

Imposition time: CP: IT_CpgExe

⌈If the reference SwAxisIndividual.inputVariableType does not exist, then either:

- SwAxisIndividual.dataConstr
- SwAxisIndividual.unit

or

- SwAxisIndividual.dataConstr
- SwAxisIndividual.compuMethod.unit

shall exist.⌋

The constraint is necessary to generate the respective axis specification in A2L.

Every ParameterDataPrototype then allows the specification of zero or more input values (type compatible with inputVariableType) in its axis description.

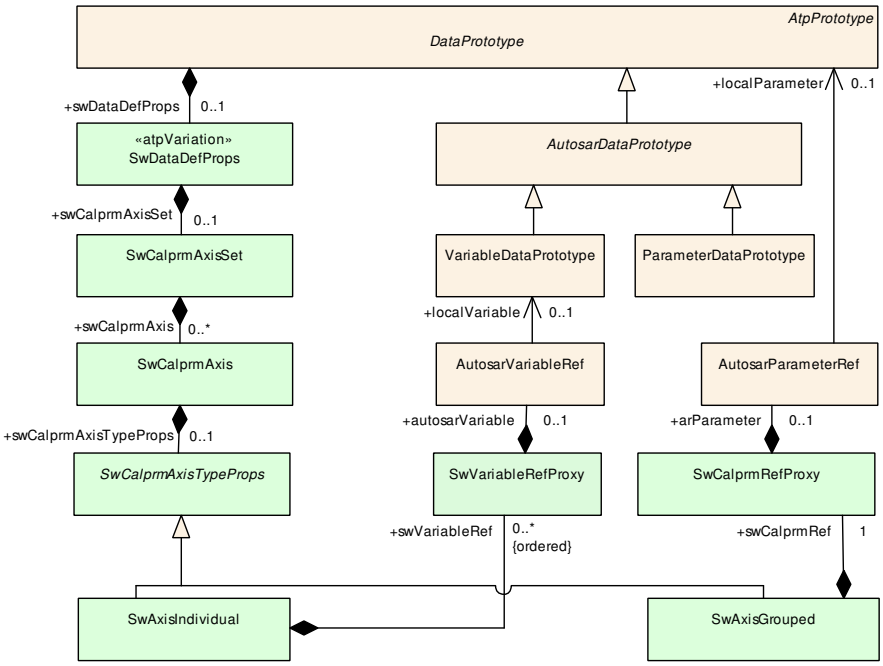

Figure 5.41: Extended Axis Elements and Input Variable Reference

This means that at the specification time of an SwcInternalBehavior, a list of input values shall be specified from which the implementer of a RunnableEntity can choose. The input values are DataPrototype entities that are either:

- a VariableDataPrototype in a SenderReceiverInterface or NvDataInterface of a PortPrototype, of the AtomicSwComponentType with

which the SwcInternalBehavior is associated, or an ArgumentDataPrototype in a ClientServerOperation of a ClientServerInterface in a PortPrototype of the same AtomicSwComponentType, or

- a VariableDataPrototype within the SwcInternalBehavior.

To achieve this, SwAxisIndividual aggregates a SwVariableRefProxy.

Originally, [27, MSRSW] uses an AutosarVariableRef to set the input value of an axis appropriately. In AUTOSAR, this has been extended by introducing a SwVariableRefProxy.

Note that this is a specific use case for the role SwVariableRefProxy.autosarVariable.

Note further that the use cases for the existence of the attributes SwVariableRefProxy.autosarVariable and SwVariableRefProxy.mcDataInstanceVar are entirely disjoint, and therefore the simultaneous existence of these two attributes makes no sense.

Therefore, [constr_1382] has been introduced to clarify this aspect.

[constr_1382] Mutually exclusive existence of attributes SwVariableRefProxy.autosarVariable vs. SwVariableRefProxy.mcDataInstanceVar

Imposition time: CP: IT_CpgExe

⌈In any given AUTOSAR model, the aggregations SwVariableRefProxy.autosarVariable and SwVariableRefProxy.mcDataInstanceVar shall never exist at the same time.⌋

As shown in Figure 5.41, this approach is also used to represent an AutosarVariableRef in all roles, e.g. the result of an interpolation routine applied to an axis, the input value determination, a list of dependent parameters, and swDataDependency.

Working Point

A working point represents the point on the value axis that corresponds to the current result of the interpolation according to the current values of all input variables. Different instances of the curve may have different working points.

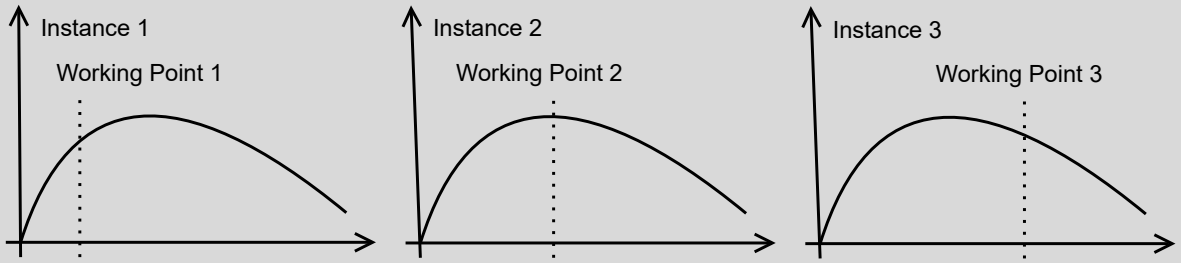

Figure 5.42: Meaning of the term "Working Point"

An example of multiple working points along the curve is the presence of multiple temperature sensors of the same kind.

By means of ApplicationArrayDataTypes, it is possible to define DataPrototypes holding an n-dimensional array of Compound Primitive Data Types of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, or RES_AXIS.

For those DataPrototypes, input values for the axes should be described to enable a display of the working point in the MCD system.

The whole array of contained axes is typically associated either with an array of variables or with a single value. In the case of arrays, the n-th axis is typically combined with the n-th input value.

[constr_1425] Definition of swCalprmAxisSet.swCalprmAxis / SwAxisIndividual.swVariableRef depending on the capabilities of the data type

Imposition time: CP: IT_CpgExe

⌈The definition of a swCalprmAxisSet.swCalprmAxis / SwAxisIndividual.swVariableRef in the context of an InstantiationDataDefProps or a ParameterAccess is only supported for a DataPrototype of category ARRAY if the data type of the ApplicationArrayElement also supports the specification of a swCalprmAxisSet.swCalprmAxis / SwAxisIndividual.swVariableRef according to [constr_1289].

Multiple ApplicationArrayDataTypes may be nested to express multiple array dimensions.⌋

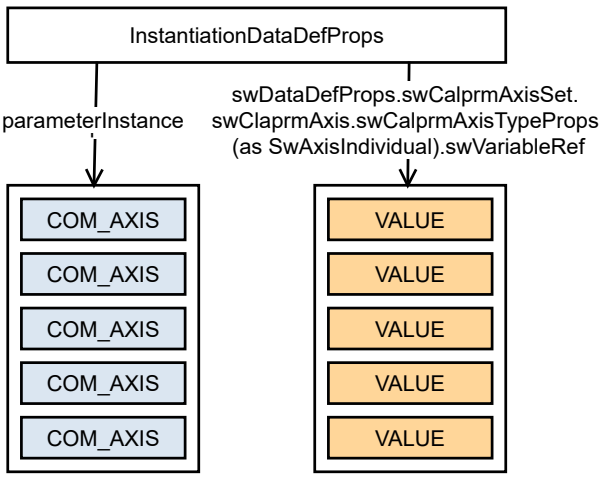

Figure 5.43: The nth COM_AXIS in the array of COM_AXISs uses the nth VALUE in the array of VALUEs as working point.

[TPS_SWCT_01683] Specification of an array of input variable for an array of axes ⌈For DataPrototypes typed by an array of elements of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, or RES_AXIS the applied InstantiationDataDefProps or ParameterAccess may reference a

VariableDataPrototype typed by an ApplicationArrayDataType by means of SwAxisIndividual.swVariableRef.autosarVariable.

This expresses the semantic that the nth element in the axis array uses the nth value in the input variable array for the specific SwAxisGrouped.swAxisIndex.⌋

Note that in this case, the two associated arrays need to have the same number of dimensions and the same sizes of the dimensions.

[constr_1426] Consistency of array sizes for axes and input variable array

Imposition time: CP: IT_CpgExe

⌈The number of array dimensions defined by ApplicationArrayDataTypes and the values of the maxNumberOfElements attributes for the array of elements of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, or RES_AXIS shall be **identical** to the number of array dimensions and the corresponding values of the maxNumberOfElements of the VariableDataPrototype referenced by SwAxisIndividual.swVariableRef.autosarVariable.⌋

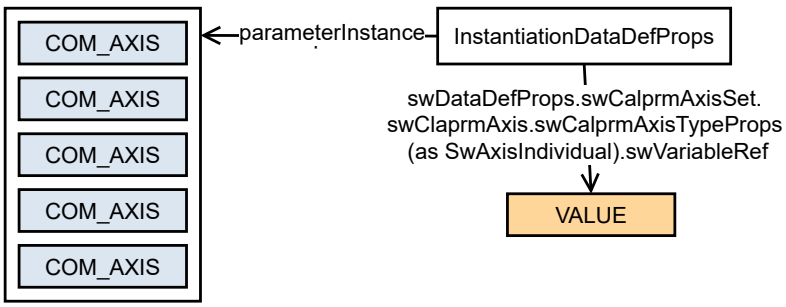

Figure 5.44: Each COM_AXIS in the array of COM_AXISs uses the identical VALUE as working point.

[TPS_SWCT_01684] Specification of a single input variable for an array of axes ⌈For DataPrototypes typed by an array of elements of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, or RES_AXIS the applied InstantiationDataDefProps or ParameterAccess may reference a VariableDataPrototype typed by an ApplicationPrimitiveDataType by means of SwAxisIndividual.swVariableRef.autosarVariable.

This expresses the semantic that each element in the axis array uses the identical input variable for the specific SwAxisGrouped.swAxisIndex.⌋

5.4.6 Setting a Group Axis

Grouped curves share the same axis definition. In [27, MSRSW], this is shown by referencing the SwCalprm, representing an individual curve, from a SwAxisGrouped.

Note that this does not describe which axis shall be taken from a reference swCalprmRef acting as a shared axis. This would be done in SwAxisGrouped.swAxisIndex.

AUTOSAR applies a similar proxy approach for parameters as for the variables. Therefore, an SwCalprmRefProxy has been introduced in [27, MSRSW], and is aggregated by the SwAxisGrouped element.

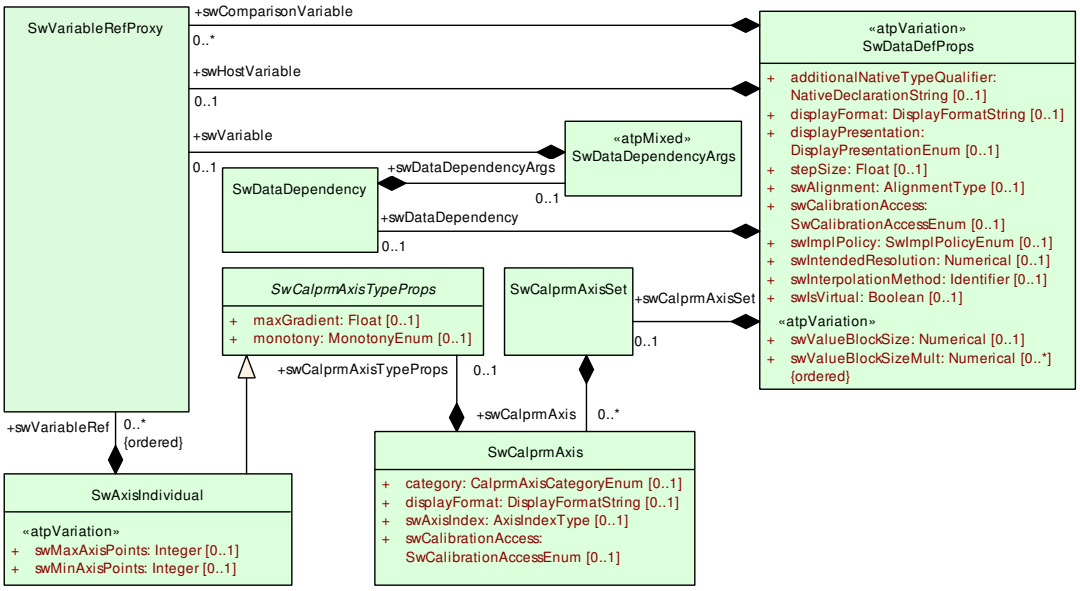

Figure 5.45: Applying Proxy Variable Reference Mechanism

The SwCalprmRefProxy aggregates an AutosarParameterRef providing an association to a ParameterDataPrototype, representing a curve with an axis. When defining the data-type of a parameter, the type of the shared axis is defined in sharedAxisType.

[constr_1020] ParameterDataPrototype shall be of compatible data type as referenced in sharedAxisType

Imposition time: CP: IT_CpgExe

⌈The ParameterDataPrototype assigned in swCalprmRef shall be typed by data type compatible with sharedAxisType.⌋

The AUTOSAR-style is shown in the upper left part of Figure 5.41, while in the upper middle the [27, MSRSW] style is shown, referencing the SwCalprm.

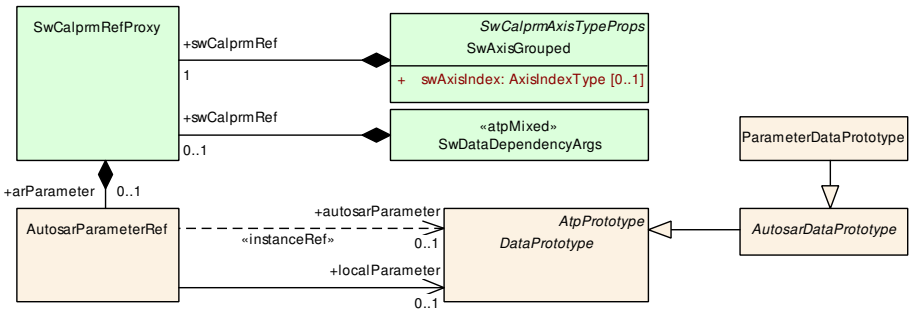

Figure 5.46: Applying Proxy Parameter Reference Mechanism

Class	SwCalprmRefProxy			
Note	Wrapper class for different kinds of references to a calibration parameter.			
Base	*ARObject*			
Aggregated by	SwAxisGrouped.swCalprmRef, SwDataDependencyArgs.swCalprmRef			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
arParameter	AutosarParameterRef	0..1	aggr	This represents a Parameter within AUTOSAR. Note that the Datatype of the referenced ParameterDataPrototype shall be an ApplicationDataType of category VALUE.
mcDataInstance	McDataInstance	0..1	ref	This reference is used in the McSupport file to express the final instance of group axis etc. It is not allowed to use this outside of an McDataInstance. The referenced mcDataInstance shall be originated from a ParameterDataPrototype.

Table 5.56: SwCalprmRefProxy

Class	SwVariableRefProxy			
Note	Proxy class for several kinds of references to a variable.			
Base	*ARObject*			
Aggregated by	SwAxisIndividual.swVariableRef, SwDataDefProps.swComparisonVariable, SwDataDefProps.swHostVariable, SwDataDependencyArgs.swVariable			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
autosarVariable	AutosarVariableRef	0..1	aggr	This represents the reference to a Variable in an Autosar system. Note that the target of the reference within AutosarVariableRef shall be typed by a primitive data type **Tags:** atp.Splitkey=autosarVariable
mcDataInstanceVar	McDataInstance	0..1	ref	This reference is used in the McSupport file to express the final instance of input values etc. It is not allowed to use this outside of an McDataInstance. The referenced mcDataInstance shall be originated from a VariableDataPrototype. **Tags:** atp.Splitkey=mcDataInstanceVar

Table 5.57: SwVariableRefProxy

The basic patterns for referencing `DataPrototype`s are explained in Chapter 5.3.3. In the context of this chapter it is worth remarking that the definition of access to calibration parameters is implemented in the context of a `RunnableEntity` (see Figure 7.3).

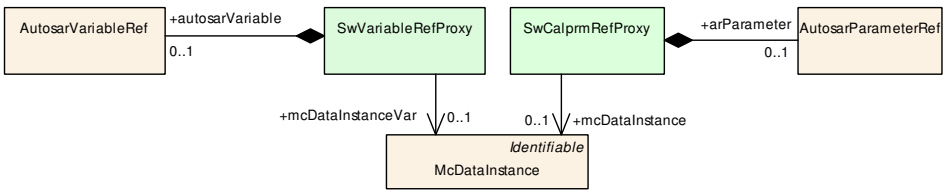

Figure 5.47: Proxy reference classes

[TPS_SWCT_01846] Use `InstantiationDataDefProps` to facilitate the definition of access to calibration parameters ⌈As the definition of a calibration parameter may involve the definition of several axes, the necessity to provide this amount of information might become cumbersome and (to some extent) redundant and difficult to

maintain if the same calibration parameter is accessed from within several RunnableEntitys. In other words: in this case it would be necessary to repeat the more or less complex set of information for each RunnableEntity.

To avoid this unnecessary level of complexity for the definition of access to calibration parameters, it is possible to define the access to the calibration parameter on the level of InstantiationDataDefProps which have been defined to facilitate this kind of re-use.⌋

For more information, refer to Chapter 7.5.4. This ability is also documented in [constr_1015].

By means of ApplicationArrayDataTypes, it is possible to define DataPrototypes holding an n-dimensional array of Compound Primitive Data Types of category CURVE, MAP, CUBOID, CUBE_4, and CUBE_5.

For those DataPrototypes, group axis/axes shall be defined if SwAxisIndividuals are not used for all SwCalprmAxis definitions.

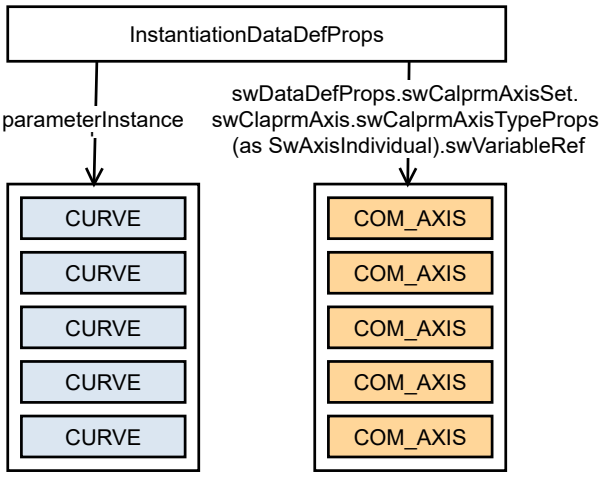

Figure 5.48: The nth CURVE in the array of CURVEs relates to the nth COM_AXIS in the array of COM_AXISs

Thereby, typically the whole array of elements of category CURVE, MAP, CUBOID, CUBE_4, and CUBE_5 is either associated with an array of group axes or alternatively with a single group axis.

In the case of arrays typically the nth CURVE, MAP, CUBOID, CUBE_4, and CUBE_5 is combined with the nth COM_AXIS or RES_AXIS.

[constr_1427] Definition of swCalprmAxisSet.swCalprmAxis / SwAxisGrouped.swCalprmRef depending on the capabilities of the data type

Imposition time: CP: IT_CpgExe

⌈The definition of a swCalprmAxisSet.swCalprmAxis / SwAxisGrouped.swCalprmRef in the context of an InstantiationDataDefProps or a ParameterAccess is only supported for a DataPrototype of category

ARRAY if the data type of the ApplicationArrayElement also supports the specification of a swCalprmAxisSet.swCalprmAxis/ SwAxisGrouped.swCalprmRef according to [constr_1289].

Thereby, multiple ApplicationArrayDataTypes might be nested to express multiple array dimensions.⌋

[TPS_SWCT_01685] Specification of an array of group axes for an array of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 ⌈For DataPrototypes typed by an array of elements of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 the applied InstantiationDataDefProps or ParameterAccess may reference a DataPrototype typed by an ApplicationArrayDataType by means of SwAxisGrouped.swCalprmRef.arParameter.

This expresses the semantic that the nth element in the CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 array uses the nth group axis in the COM_AXIS or RES_AXIS array for the specific SwAxisGrouped.swAxisIndex.⌋

In this case, the two associated arrays shall have the same number of dimensions and sizes of the dimensions.

[constr_1428] Consistency of array sizes for arrays of elements of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 arrays and used group axes arrays

Imposition time: CP: IT_CpgExe

⌈The number of array dimensions defined by ApplicationArrayDataTypes and the values of the maxNumberOfElements attributes for the array of elements of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 shall be identical to the number of array dimensions and the corresponding values of the maxNumberOfElements of the DataPrototype referenced by SwAxisGrouped.swCalprmRef.arParameter.⌋

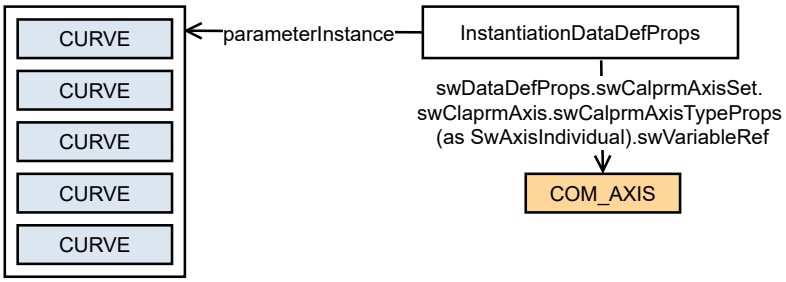

Figure 5.49: Each MAP in the array of CURVEs uses the identical COM_AXIS

[TPS_SWCT_01686] Specification of a single group axis for an array of elements of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 ⌈For DataPrototypes typed by an array of elements of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 the applied InstantiationDataDefProps or ParameterAccess may reference a DataPrototype typed by an ApplicationPrimitiveDataType of category COM_AXIS or RES_AXIS by means of SwAxisGrouped.swCalprmRef.arParameter.

This expresses the semantic that each element in the CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 array uses the identical COM_AXIS or RES_AXIS for the specific SwAxisGrouped.swAxisIndex.

5.4.7 Specifying Data Dependencies

SwDataDependency allows dependent data elements to be specified. For example, other ParameterDataPrototypes can be combined into one ParameterDataPrototype whose consistent value is automatically derived by the measurement and calibration system. When one of the parameters is adjusted, the dependent parameter is automatically adjusted according to the chosen formula.

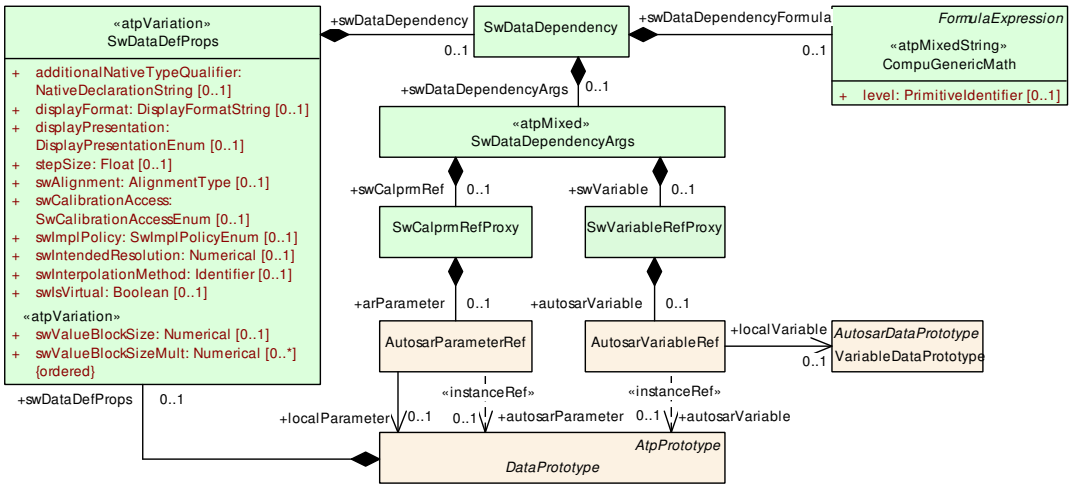

Figure 5.50: Modeling of data dependencies

Consider for example a right-angled triangle with a hypotenuse of length 1, where the lengths of the other sides are the parameters A and B. When adjusting parameter A, the parameter B shall be adjusted according to $B = \sqrt{(1 - A * A)}$. Also, other parameters might depend on B, e.g. $B_AREA = B * B$ or $TRIANGULAR_AREA = (A * B)/2$.

This example is shown in Listing B.19.

A dependent parameter shall not be adjustable by itself. The only way to influence its value is through the adjustment of a parameter it depends on.

An exemplary definition of a data dependency can be found in Chapter B.2.1.

Class	**SwDataDependency**
Note	This element describes the interdependencies of data objects, e.g. variables and parameters. Use cases: • Calculate the value of a calibration parameter (by the MCD system) from the value(s) of other calibration parameters. • Virtual data - that means the data object is not directly in the ecu and this property describes how the "virtual variable" can be computed from the real ones (by the MCD system).

△

Class	SwDataDependency			
Base	*ARObject*			
Aggregated by	SwDataDefProps.swDataDependency			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
swData Dependency Args	SwDataDependency Args	0..1	aggr	Specifies the arguments used in the data dependency. Note that this is 0..1 since the aggregated class is a container (atpMixed). **Tags:** atp.Splitkey=swDataDependencyArgs xml.sequenceOffset=40
swData Dependency Formula	CompuGenericMath	0..1	aggr	This element describes the formula with which the dependencies between the participating objects are defined. **Tags:** atp.Splitkey=swDataDependencyFormula xml.sequenceOffset=30

Table 5.58: SwDataDependency

Class	«atpMixed» **SwDataDependencyArgs**			
Note	This element specifies the elements used in a SwDataDependency.			
Base	*ARObject*			
Aggregated by	SwDataDependency.swDataDependencyArgs			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
swCalprmRef	SwCalprmRefProxy	0..1	aggr	Specifies a calibration parameter as an input argument to the dependency. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=60 xml.typeElement=false xml.typeWrapperElement=false
swVariable	SwVariableRefProxy	0..1	aggr	Specifies a variable as an input argument to the dependency. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=70 xml.typeElement=false xml.typeWrapperElement=false

Table 5.59: SwDataDependencyArgs

Class	«atpMixedString» **CompuGenericMath**			
Note	This meta-class represents the ability to specify a generic formula expression.			
Base	*ARObject*, *FormulaExpression*			
Aggregated by	SwDataDependency.swDataDependencyFormula			
Attribute	**Type**	**Mult.**	**Kind**	**Note**

▽

△

Class	«atpMixedString» **CompuGenericMath**			
level	PrimitiveIdentifier	0..1	attr	Placeholder to describe an indicator of a language level for the mathematics e.g. INFORMAL, ASAMHDO. May be refined by particular use-cases. **Tags:** xml.attribute=true

Table 5.60: CompuGenericMath

Class	«atpMixedString» ***FormulaExpression*** (abstract)			
Note	This class represents the syntax of the formula language. The class is modeled as an abstract class in order to be specialized into particular use cases. For each use case the referable objects might be specified in the specialization.			
Base	*ARObject*			
Subclasses	CompuGenericMath, EcucConditionFormula, EcucParameterDerivationFormula, *FMFormulaByFeatures AndAttributes*, *SwSystemconstDependentFormula*, TDEventOccurrenceExpressionFormula, Timing ConditionFormula			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
atpReference	Referrable	*	ref	The referable object shall yield a numerical / boolean value. **Stereotypes:** atpAbstract
atpString Reference	Referrable	*	ref	The referable object shall yield a string value. **Stereotypes:** atpAbstract

Table 5.61: FormulaExpression

5.4.8 Precedence of data properties with respect to data elements, axis elements, computation methods, units

There are similar attributes defined in `SwDataDefProps`, `SwCalprmAxis`, and `CompuMethod`. Therefore, this section defines which attribute value wins in the overall process from SWC-Description to MC-Support to ASAM-A2L.

Figure 5.51 illustrates the fact that some attributes in `SwDataDefProps` can also be expressed in sub-elements respectively in referenced elements.

[TPS_SWCT_01496] General precedence rule for attributes of `SwDataDefProps`
⌈The general precedence rule is that

- `SwDataDefProps` wins over `valueAxisDataType` (exception: `compuMethod` and `unit`).
- `SwDataDefProps` wins over `compuMethod`.
- `SwDataDefProps` wins over `swCalprmAxisSet`.
- `SwDataDefProps.swCalprmAxisSet` wins over `swCalprmAxisSet.swCalprmAxis.swCalprmAxisTypeProps.compuMethod` or `SwAxisIndividual.inputVariableType`.

- SwAxisIndividual.inputVariableType wins over SwAxisIndividual.compuMethod, SwAxisIndividual.unit, but **not** over SwAxisIndividual.dataConstr.

⌋

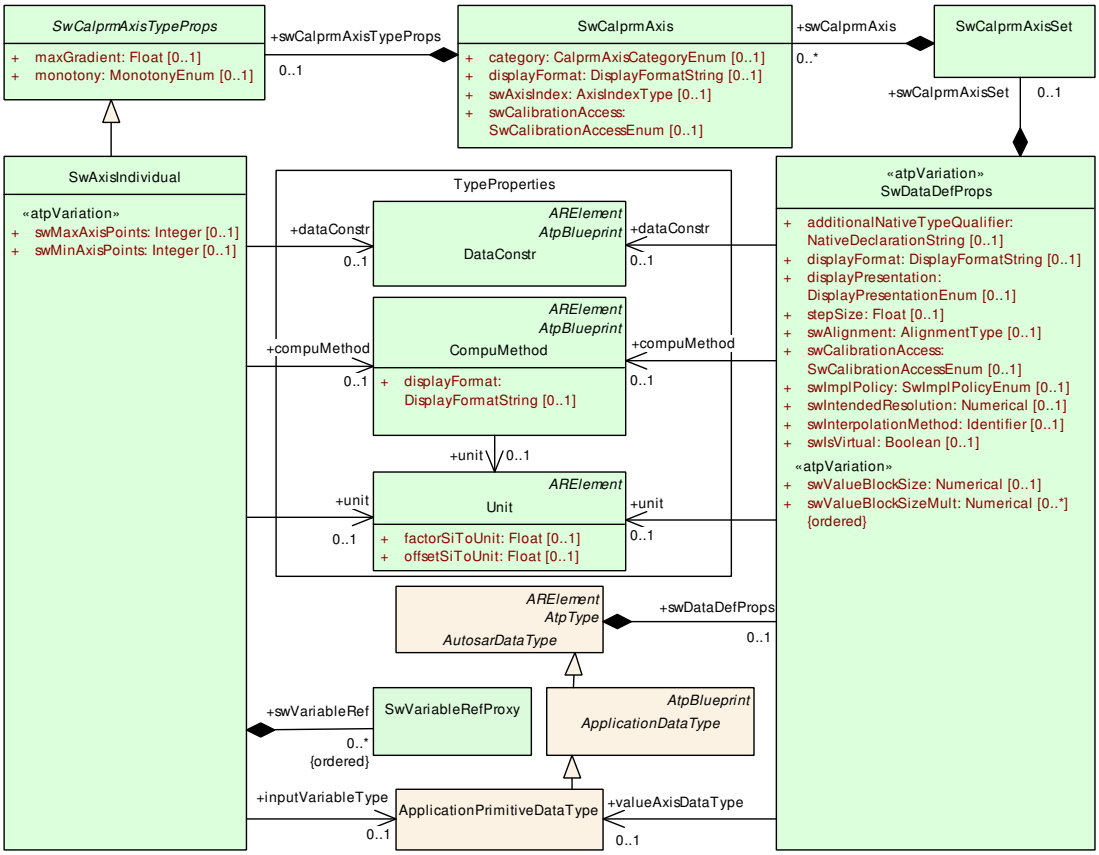

Figure 5.51: Various Attributes in the Context of SwDataDefProps

The following examples illustrate particular cases (the highest precedence comes first):

- **[TPS_SWCT_01497] Precedence of the `unit` of value axis** ⌈For the usage of `unit` of value axis the following precedence rule is defined:
  - SwDataDefProps.valueAxisDataType.swDataDefProps.unit
  - SwDataDefProps.valueAxisDataType.swDataDefProps.compuMethod.unit
  - SwDataDefProps.unit
  - SwDataDefProps.compuMethod.unit

  ⌋

[constr_2550] Units of value axis shall be consistent

Imposition time: CP: IT_CpgExe

⌈All Units specified in the context of one value axis according to [TPS_SWCT_01497] shall be the same.⌋

In particular, [constr_2550] reflects the fact that a Unit may be specified in different phases of the development process but shall finally be consistent.

- **[TPS_SWCT_01498] Precedence of the DataConstr of value axis** ⌈For the usage of DataConstr of value axis the following precedence rule is defined:
  - SwDataDefProps.dataConstr
  - SwDataDefProps.valueAxisDataType.swDataDefProps.dataConstr

  ⌋

  [TPS_SWCT_01897] Data constraint of value axis shall match ⌈The values compliant with SwDataDefProps.dataConstr shall also be compliant with SwDataDefProps.valueAxisDataType.swDataDefProps.dataConstr.

  In other words, SwDataDefProps.dataConstr wins over but is not allowed to relax SwDataDefProps.valueAxisDataType.swDataDefProps.dataConstr.⌋

- **[TPS_SWCT_01499] Precedence of the CompuMethod of value axis** ⌈For the usage of CompuMethod of value axis the following precedence rule is defined:
  - SwDataDefProps.valueAxisDataType.swDataDefProps.compuMethod
  - SwDataDefProps.compuMethod

  ⌋

- **[TPS_SWCT_01500] Precedence of the display format of value axis** ⌈For the usage of display format of value axis the following precedence rule is defined:
  - SwDataDefProps.displayFormat
  - SwDataDefProps.valueAxisDataType.swDataDefProps.displayFormat
  - SwDataDefProps.valueAxisDataType.swDataDefProps.compuMethod.displayFormat
  - SwDataDefProps.compuMethod.displayFormat

  ⌋

Note that this deviates from the general rule since displayFormat is not an essential property. The last item in the list above follows from the fact that, if a valueAxisDataType exists, it supersedes the compuMethod.

- **[TPS_SWCT_01501] Precedence of the calibration access of value axis** ⌈For the usage of calibration access of value axis the following precedence rule is defined:
  - SwDataDefProps.swCalibrationAccess
  - SwDataDefProps.valueAxisDataType.swDataDefProps.swCalibrationAccess

  ⌋

  Note that this deviates from the general rule since swCalibrationAccess is not such an essential property.

- **[TPS_SWCT_01502] Precedence of the Unit of the input axis** ⌈For the usage of Unit of the input axis the following precedence rule is defined:
  - SwAxisIndividual.unit
  - SwAxisIndividual.compuMethod.unit
  - SwAxisIndividual.inputVariableType.swDataDefProps.unit
  - SwAxisIndividual.swVariableRef.autosarVariable.autosarVariable.type.swDataDefProps.compuMethod.unit
  - SwAxisIndividual.swVariableRef.autosarVariable.autosarVariable.type.swDataDefProps.unit

  ⌋

  [constr_2549] Units of input axis shall be consistent

  Imposition time: CP: IT_CpgExe

  ⌈All Units specified in the context of one input axis according to [TPS_SWCT_01502] shall be compatible.⌋

  [constr_2549] reflects the fact that a Unit may be specified in different phases of the development process but shall finally be consistent.

- **[TPS_SWCT_01503] Precedence of the DataConstr of the input axis** ⌈For the usage of DataConstr of the input axis the following precedence rule is defined:
  - SwAxisIndividual.dataConstr
  - SwAxisIndividual.inputVariableType.swDataDefProps.dataConstr

  - SwAxisIndividual.swVariableRef.type.swDataDefProps.dataConstr

⌋

The attribute SwAxisIndividual.inputVariableType.swDataDefProps.dataConstr represents the input value, not the axis itself. For this reason, no specific constraint is defined that the dataConstr shall fulfill.

- **[TPS_SWCT_01504] Precedence of the display format of the input axis** ⌈For the usage of display format of the input axis the following precedence rule is defined:

  - SwCalprmAxis.displayFormat
  - SwCalprmAxis.swCalprmAxisTypeProps.compuMethod.displayFormat
  - SwCalprmAxis.swCalprmAxisTypeProps.inputVariableType.swDataDefProps.displayFormat
  - SwCalprmAxis.swCalprmAxisTypeProps.inputVariableType.swDataDefProps.compuMethod.displayFormat
  - SwCalprmAxis.swCalprmAxisTypeProps.swVariableRef.type.swDataDefProps.displayFormat
  - SwCalprmAxis.swCalprmAxisTypeProps.swVariableRef.type.swDataDefProps.compuMethod.displayFormat

  ⌋

  The attribute SwAxisIndividual.inputVariableType.swDataDefProps.dataConstr represents the input value and not the axis itself. For this reason, no specific constraint is defined that displayFormat shall match.

- [TPS_SWCT_01505] lists possible combinations of values of SwCalibrationAccessEnum for outer and inner elements of a complex data type. The column “result” indicates the value of SwCalibrationAccessEnum applicable for each specific combination[19].

- **[TPS_SWCT_01506] Precedence of the calibration access of input axis** ⌈For the usage of calibration access of input axis the following precedence rule is defined:

  - SwDataDefProps.swCalibrationAccess
  - SwCalprmAxis.swCalibrationAccess

  ⌋

[19] For technical reasons, [TPS_SWCT_01505] cannot be placed directly in the itemized list.

Note that the swCalibrationAccess defined on a Compound Primitive Data Type (see [TPS_SWCT_01179]) reflects the entire curve or map.

Therefore, if the entire curve or map cannot be accessed by the measurement calibration diagnostic system (MCD-System), the axis cannot be accessed either. On the other hand, access may be granted for the value axis only but not for the axis points.

[TPS_SWCT_01505] Precedence of calibration access along structural hierarchies in complex types ⌈

outer	inner	result
notAccessible	*	notAccessible
readOnly	readOnly	readOnly
readOnly	readWrite	readOnly
readOnly	notAccessible	notAccessible
readWrite	notAccessible	notAccessible
readWrite	readOnly	readOnly
readWrite	readWrite	readWrite

⌋

5.5 Elements used in Properties of Data Definitions

This section describes further elements which are attached to SwDataDefProps via associations.

5.5.1 Computation Methods

5.5.1.1 Overview

[TPS_SWCT_01276] Computation methods ⌈An important part of semantics is the specification of a so-called computation method which specifies the conversion between the physical and the internal representation of data. This usually makes sense only for primitive data types.⌋

An ApplicationCompositeDataType cannot be given a particular semantic meaning as a whole but it is obviously possible to specify the semantics of all or a part of the contained elements, i.e. the ApplicationPrimitiveDataTypes.

Class	CompuMethod
Note	This meta-class represents the ability to express the relationship between a physical value and the mathematical representation. Note that this is still independent of the technical implementation in data types. It only specifies the formula how the internal value corresponds to its physical pendant. **Tags:** atp.recommendedPackage=CompuMethods

▽

△

Class	**CompuMethod**			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
compuInternal ToPhys	Compu	0..1	aggr	This specifies the computation from internal values to physical values. **Tags:** atp.Splitkey=compuInternalToPhys xml.sequenceOffset=80
compuPhysTo Internal	Compu	0..1	aggr	This represents the computation from physical values to the internal values. **Tags:** atp.Splitkey=compuPhysToInternal xml.sequenceOffset=90
displayFormat	DisplayFormatString	0..1	attr	This property specifies, how the physical value shall be displayed e.g. in documents or measurement and calibration tools. **Tags:** xml.sequenceOffset=20
unit	Unit	0..1	ref	This is the physical unit of the Physical values for which the CompuMethod applies. **Tags:** atp.Splitkey=unit xml.sequenceOffset=30

Table 5.62: CompuMethod

This meta-class `CompuMethod` was actually taken from the *ASAM* standard's *harmonized data objects*. This is also indicated by the green color of the meta-classes in the diagram.

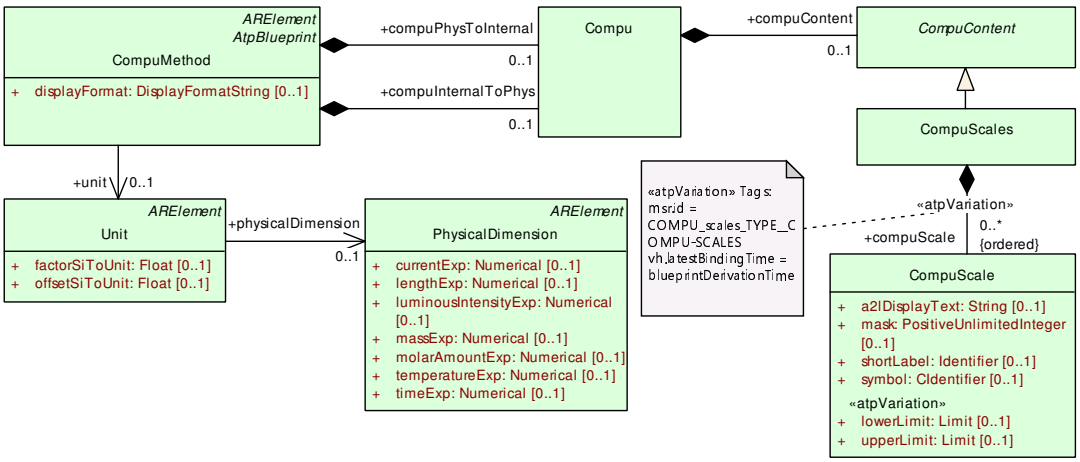

Figure 5.52: A `CompuMethod` and its attributes define data semantics

[TPS_SWCT_01277] Computation methods are used for the conversion of *internal* values into their *physical* representation and vice versa ⌈`CompuMethod`s are used for the conversion of *internal* values into their *physical* representation and vice versa. The direction of the conversion depends on the origin of the value to be converted:

- If the value is provided by the ECU, then the conversion direction is from *internal* to *physical*.
- If a *physical* value is provided by the tester, it is converted to an *internal* value before being sent to the ECU.

⌋

Figure 5.52 sketches a conceptual overview of CompuMethod. It consists of the following attributes:

- **[TPS_SWCT_01281] Unit associated with a PhysicalDimension** ⌈A unit (described in next section) can be associated with a PhysicalDimension.⌋

  Note that quantities like "%" are not derived from SI units. However, they have a meaning in the physical world and need to be represented in the form of data types. Therefore, a CompuMethod also applies in those cases.

- **[TPS_SWCT_01430] Conversion specification from internal to physical values as well as the reverse conversion** ⌈A conversion specification from internal to physical values, as well as the reverse conversion. Both of them in turn consist of an abstract CompuContent. Derived classes allow the specification of a conversion formula in two different ways.⌋

  [constr_1024] Stepwise definition of CompuMethods

  Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

  ⌈In a bound model, the intervals (i.e. determined by attributes CompuScale.lowerLimit and CompuScale.upperLimit) defined by CompuScales used in the context of a given CompuMethod of all values of category except BITFIELD_TEXTTABLE shall **not** overlap.

  For CompuMethods of category BITFIELD_TEXTTABLE, the combination of the interval created by attributes CompuScale.upperLimit, CompuScale.lowerLimit and CompuScale.mask shall be unique in the context of the enclosing CompuMethod.⌋

  The possible values of attribute CompuMethod.category, along with a description of the respective semantics, are listed in [TPS_SWCT_01877].

  [TPS_SWCT_01667] Avoidance of overlapping of directly adjacent intervals within CompuMethods ⌈Intervals of a given CompuMethod may be **located directly adjacent** to each other.

  This means that the upperLimit of one CompuScale has the same numerical value as the lowerLimit of another CompuScale defined within the context of the CompuMethod.

In this case, it is necessary to properly set the attribute CompuScale.lowerLimit.intervalType or CompuScale.upperLimit.intervalType to avoid overlapping.

Specifically, one of the interval boundaries shall be set to intervalType.open to avoid overlapping.⌋

- **[TPS_SWCT_01282] Number of intervals in which a given conversion applies** ⌈CompuScales is a number of intervals (called CompuScale) within which a certain conversion applies. The respective interval is given in terms of upper and lower limit.

  Within each CompuScale we have the abstract CompuScaleContents. To deal with possible ambiguities directly, an inverse value can be provided explicitly for that particular scale (compuInverseValue).⌋

  Limits are explained in more detail in Chapter 5.2.4.1.

- As the diagram shows, CompuScaleContents is an abstract meta-class. A number of derived meta-classes allow the specification of a conversion formula in a variety of ways, including:
  - mapping the whole interval to a constant (CompuConst)
  - providing rational coefficients of the conversion formula (CompuRationalCoeffs)

- **[TPS_SWCT_01283] Rational function** ⌈The rational function is specified as rational coefficients for the numerator (compuNumerator) and the denominator (compuDenominator). CompuNominatorDenominator can have as many *V* elements as needed for the rational function.

  The sequence of the values *V* carries the information for the exponents, that means the first *V* is the coefficient for x0, the second *V* is the coefficient for x1, etc. With this sequence the values of the exponents can be entirely represented.⌋

  [TPS_SWCT_01898] Avoid division by zero in rational formula ⌈The rational formula shall not cause any division by zero.⌋

Class	**Compu**			
Note	This meta-class represents the ability to express one particular computation.			
Base	*ARObject*			
Aggregated by	CompuMethod.compuInternalToPhys, CompuMethod.compuPhysToInternal			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	Compu			
compuContent	CompuContent	0..1	aggr	This specifies the details of the computation. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=20 xml.typeElement=false xml.typeWrapperElement=false
compuDefaultValue	CompuConst	0..1	aggr	This property can be used to specify an output value for a conversion formula, if the value to be converted lies outside the plausibility limit. Although this is possible for all conversion formulae, it is especially valid for variables with tabular conversion formulae. **Tags:** atp.Splitkey=compuDefaultValue xml.sequenceOffset=70

Table 5.63: Compu

Class	*CompuContent* (abstract)			
Note	This abstract meta-class represents the various definition means of a computation method.			
Base	*ARObject*			
Subclasses	CompuScales			
Aggregated by	Compu.compuContent			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
–	–	–	–	–

Table 5.64: CompuContent

Class	CompuScales			
Note	This meta-class represents the ability to stepwise express a computation method.			
Base	*ARObject*, *CompuContent*			
Aggregated by	Compu.compuContent			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
compuScale (ordered)	CompuScale	*	aggr	This represents one scale within the compu method. Note that it contains a Variationpoint in order to support blueprints of enumerations. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=blueprintDerivationTime xml.roleElement=true xml.roleWrapperElement=true xml.sequenceOffset=40 xml.typeElement=false xml.typeWrapperElement=false

Table 5.65: CompuScales

Class	CompuScale
Note	This meta-class represents the ability to specify one segment of a segmented computation method.
Base	*ARObject*
Aggregated by	CompuScales.compuScale

▽

△

Class	**CompuScale**			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
a2lDisplayText	String	0..1	attr	The value of this attribute shall be taken for generating one display text (specifically the OutVal) within the equivalent of the enclosing `CompuMethod` in A2L.
compuInverse Value	CompuConst	0..1	aggr	This is the inverse value of the constraint. This supports the case that the scale is not reversible per se. **Tags:** atp.Splitkey=compuInverseValue xml.sequenceOffset=60
compuScale Contents	CompuScaleContents	0..1	aggr	This represents the computation details of the scale. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=70 xml.typeElement=false xml.typeWrapperElement=false
desc	MultiLanguageOverview Paragraph	0..1	aggr	<desc> represents a general but brief description of the object in question. **Tags:** atp.Splitkey=desc xml.sequenceOffset=30
lowerLimit	Limit	0..1	attr	This specifies the lower limit of the scale. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=40
mask	PositiveUnlimitedInteger	0..1	attr	In difference to all the other computational methods every COMPU-SCALE will be applied including the bit MASK. Therefore it is allowed for this type of COMPU-METHOD, that COMPU-SCALES overlap. To calculate the string reverse to a value, the string has to be split and the according value for each substring has to be summed up. The sum is finally transmitted. The processing has to be done in order of the COMPU-SCALE elements. **Tags:** xml.sequenceOffset=35
shortLabel	Identifier	0..1	attr	This element specifies a short name for the particular scale. The name can for example be used to derive a programming language identifier. **Tags:** xml.sequenceOffset=20
symbol	CIdentifier	0..1	attr	The symbol, if provided, is used by code generators to get a C identifier for the CompuScale. The name will be used as is for the code generation, therefore it needs to be unique within the generation context. **Tags:** xml.sequenceOffset=25
upperLimit	Limit	0..1	attr	This specifies the upper limit of a of the scale. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=50

Table 5.66: CompuScale

Class	***CompuScaleContents*** (abstract)			
Note	This abstract meta-class represents the content of one particular scale.			
Base	*ARObject*			
Subclasses	CompuScaleConstantContents, CompuScaleRationalFormula			
Aggregated by	CompuScale.compuScaleContents			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.67: CompuScaleContents

Class	**CompuConstTextContent**			
Note	This meta-class represents the textual content of a scale.			
Base	*ARObject*, *CompuConstContent*			
Aggregated by	CompuConst.compuConstContentType			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
vt	VerbatimString	0..1	attr	This represents a textual constant in the computation method.

Table 5.68: CompuConstTextContent

Class	**CompuConstNumericContent**			
Note	This meta-class represents the fact that the constant value of the computation method is a numerical value. It is separated from CompuConstFormulaContent to support compatibility with ASAM HDO.			
Base	*ARObject*, *CompuConstContent*			
Aggregated by	CompuConst.compuConstContentType			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
v	Numerical	0..1	attr	This represents the numerical value. **Tags:** xml.sequenceOffset=50

Table 5.69: CompuConstNumericContent

Class	**CompuRationalCoeffs**			
Note	This meta-class represents the ability to express a rational function by specifying the coefficients of nominator and denominator.			
Base	*ARObject*			
Aggregated by	CompuScaleRationalFormula.compuRationalCoeffs			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
compu Denominator	CompuNominator Denominator	0..1	aggr	This is the denominator of the expression. **Tags:** xml.sequenceOffset=30
compu Numerator	CompuNominator Denominator	0..1	aggr	This is the numerator of the rational expression. **Tags:** xml.sequenceOffset=20

Table 5.70: CompuRationalCoeffs

Class	MultiLanguageOverviewParagraph			
Note	This is the content of a multilingual paragraph in an overview item.			
Base	*ARObject*			
Aggregated by	Caption.desc, CompuScale.desc, *Describable*.desc, *Identifiable*.desc, LabeledItem.itemLabel, Modification.change, Modification.reason, SdgCaption.desc, SwRecordLayoutGroup.desc, SwRecordLayoutV.desc, VariationPoint.desc			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
l2	LOverviewParagraph	1..*	aggr	This represents the text in one particular language. **Tags:** atp.Splitkey=l2 xml.roleElement=true xml.roleWrapperElement=false xml.sequenceOffset=20 xml.typeElement=false xml.typeWrapperElement=false

Table 5.71: MultiLanguageOverviewParagraph

Class	CompuConst			
Note	This meta-class represents the fact that the value of a computation method scale is constant.			
Base	*ARObject*			
Aggregated by	Compu.compuDefaultValue, CompuScale.compuInverseValue, CompuScaleConstantContents.compuConst			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
compuConstContentType	CompuConstContent	0..1	aggr	This is the actual content of the constant compu method scale. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=10 xml.typeElement=false xml.typeWrapperElement=false

Table 5.72: CompuConst

Class	***CompuConstContent*** (abstract)			
Note	This meta-class represents the fact that the constant value of the computation method can be numerical or textual.			
Base	*ARObject*			
Subclasses	CompuConstFormulaContent, CompuConstNumericContent, CompuConstTextContent			
Aggregated by	CompuConst.compuConstContentType			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 5.73: CompuConstContent

Class	CompuScaleRationalFormula			
Note	This meta-class represents the fact that the computation in this scale is represented as rational term.			
Base	*ARObject*, *CompuScaleContents*			
Aggregated by	CompuScale.compuScaleContents			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
compuRationalCoeffs	CompuRationalCoeffs	0..1	aggr	This specifies the coefficients of the rational formula. **Tags:** xml.sequenceOffset=110

Table 5.74: CompuScaleRationalFormula

Class	**CompuScaleConstantContents**			
Note	This meta-class represents the fact that a particular scale of the computation method is constant.			
Base	*ARObject*, *CompuScaleContents*			
Aggregated by	CompuScale.compuScaleContents			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
compuConst	CompuConst	0..1	aggr	This represents the fact that the scale is a constant. The use case is mainly a non interpolated scale. It is a simplification of the fact that a constant scale can also be expressed as rational function of order 0. **Tags:** xml.sequenceOffset=90

Table 5.75: CompuScaleConstantContents

Class	**CompuNominatorDenominator**			
Note	This class represents the ability to express a polynomial either as Nominator or as Denominator.			
Base	*ARObject*			
Aggregated by	CompuRationalCoeffs.compuDenominator, CompuRationalCoeffs.compuNumerator			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
v (ordered)	Numerical	*	attr	this is the list of polynomial factors. Note that the first vf represents the power=0. The polynomial is v[0] * x^0 + v[1] * x^1 ... **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.roleElement=true xml.roleWrapperElement=false xml.sequenceOffset=20 xml.typeElement=false xml.typeWrapperElement=false

Table 5.76: CompuNominatorDenominator

5.5.1.2 Limits of Computation Methods

[TPS_SWCT_01548] Limits of a `CompuMethod` ⌈If`CompuScale.lowerLimit` and `CompuScale.upperLimit` are used to constrain the applicable range of the conversion of a `CompuMethod`, they logically represent the limiting values **before** the conversion is applied.⌋

In other words, the limits are applied on the source end of the conversion rather than to the result that comes out at the other end of the conversion.

This is obviously a lot safer than the opposite approach, where a given physical/internal value is first converted to its internal/physical equivalent and a second step then checks whether the result of the conversion is actually valid in terms of the applicable limits.

As hinted by [TPS_SWCT_01548], the definition of valid intervals is done **by specifying the valid intervals as opposed to specifying the invalid intervals**. This observation is also valid for uses of `CompuMethod` outside the scope of this document.

[TPS_SWCT_01278] CompuMethods can also be used to assign symbolic names to internal values ⌈CompuMethods can also be used to assign symbolic names to internal values (like an enumeration in C) or to ranges of internal values or to single bits (like a bitfield in C).

This is also considered as a conversion between internal numbers and a semantical representation.⌋

Actually, the preferred conversion direction depends on the use case.

In the following, the internal-to-physical conversion direction is used as the default. Usually a CompuMethod is defined for one conversion direction only even if it is used in both directions.

For simple functions like identical (1:1 conversion) or linear functions this is sufficient because the inverse function can be derived quite easily from the defined function. In this case, the limits for the reverse direction can also be obtained by applying the forward function to the forward limits.

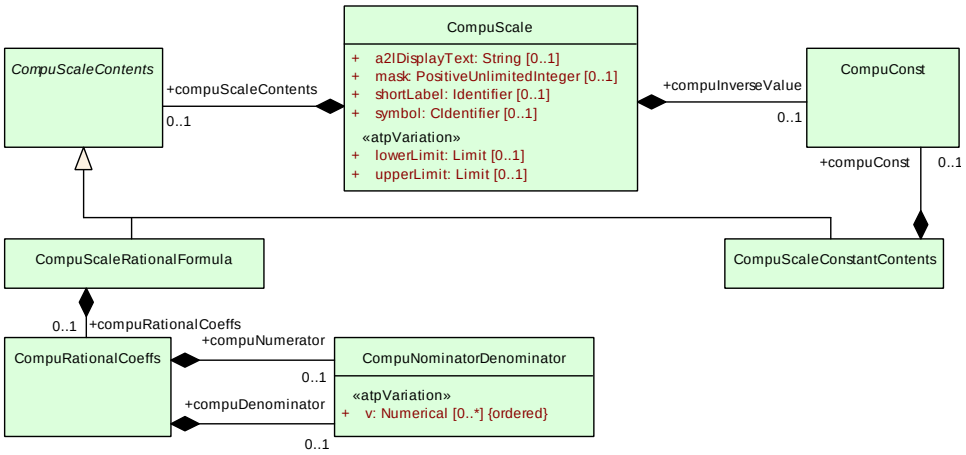

Figure 5.53: A CompuScale and its attributes define data semantics

For more complex functions (e.g. rational functions) it is usually not possible to compute the inverse function automatically. More seriously, the inversion yields ambiguous results if the function is not monotonic. To deal with such possible ambiguities directly, an inverse value can be provided explicitly for the function or for each of its parts respectively.

[constr_1022] Limits shall be defined for each direction of CompuMethod

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈In the scope of a CompuMethod, if both aggregations in the role compuInternalToPhys and compuPhysToInternal exist, then for all

- compuInternalToPhys.compuScale and
- compuPhysToInternal.compuScale

the attributes lowerLimit and upperLimit shall exist.⌋

[TPS_SWCT_01280] `CompuMethod` applied to values outside of its limits ⌈If a `CompuMethod` is applied to values outside its limits, it is up to the MCD-tool (Measurement, Calibration, Diagnostic tool) to indicate this to the user. In this case the `CompuMethod` shall not be applied at all.⌋

5.5.1.3 Units in the context of Computation Methods

[constr_1175] Depending on its `category`, `CompuMethod` shall refer to a `unit`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈As a `CompuMethod` specifies the conversion between the physical world and the numerical values, it shall refer to a `unit` unless the `CompuMethod`'s `category` is one of `TEXTTABLE`, `BITFIELD_TEXTTABLE`, or `IDENTICAL`.⌋

[constr_1175] does *not* imply that `CompuMethod`s where the `category` is one of `TEXTTABLE`, `BITFIELD_TEXTTABLE`, or `IDENTICAL` are not *allowed* to refer to a unit. They may still refer to a `unit`, but according to [constr_1175] this relation is not *mandated*.

A further implication is that the unit itself cannot have a dimension, i.e. all exponents of SI units are 0.

5.5.1.4 Symbols in Computation Methods

[TPS_SWCT_01284] `CompuScale` might require a representation in the generated RTE C code ⌈A `CompuScale` might require a representation in the generated RTE C code. For this purpose it is necessary to identify a property that controls how the symbol used for the `CompuScale` in the C code is created.

The symbol itself can be created out of different sources according to a standardized precedence schema.⌋

[TPS_SWCT_01569] Definition of `CompuScale Code Symbolic Name` ⌈In C code, a `CompuScale` is represented by an identifier that is, as far as AUTOSAR modeling is concerned, called a `CompuScale Code Symbolic Name`.

The `CompuScale Code Symbolic Name` may be taken from `CompuScale.symbol`, `CompuConstTextContent.vt`, or `CompuScale.shortLabel`. The details are explained in [TPS_SWCT_01431].⌋

[TPS_SWCT_01431] Finding the symbol for the representation of a `CompuScale` with a point-range in C code ⌈In general, the value of the attributes `symbol`, `vt`, and `shortLabel` can be taken as the source for naming the symbol that represents the `CompuScale` in the C code.

The following rule applies (lower values indicate higher priority) for all CompuScales with a point-range:

1. Take the value of symbol if this attribute exists.
2. Take the value of vt if it makes a valid C identifier.
3. Take the value of shortLabel if it exists.

Fail if none of the possible options apply.

⌋

[TPS_SWCT_01695] Relation between ValueSpecification and the definition of CompuScales ⌈In order to find a match between the content of a ValueSpecification and a CompuScale the content of the ValueSpecification shall be checked against the CompuScale Value Symbolic Names according to [TPS_SWCT_01696].

If no matching CompuScale Value Symbolic Names can be found then the ValueSpecification shall be considered unusable in the context of the CompuMethod that is subject to [constr_1146].⌋

[TPS_SWCT_01696] CompuScale Value Symbolic Name ⌈The value of the CompuScale Value Symbolic Name of a given CompuScale shall be obtained by taking the values of the following attributes according to the following priority (lower values indicate higher priority):

1. Take the value of symbol if this attribute exists.
2. Take the value of vt if this attribute exists.
3. Take the value of shortLabel if it exists.

⌋

For clarity, the difference between a CompuScale Value Symbolic Name and a CompuScale Code Symbolic Name is that the former is not required to pass as a valid C identifier.

[constr_1434] CompuScales shall not have identical CompuScale Value Symbolic Names

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈In a CompuMethod that is subject to [constr_1146], no two CompuScales shall have identical CompuScale Value Symbolic Names (according to [TPS_SWCT_01696]).⌋

[constr_1146] Applicability of a `symbol` for a `CompuScale` in C code

Imposition time: CP: `IT_CpgExe`

⌈The `symbol` attribute shall only be provided for `CompuScale`s where the `category` of the enclosing `CompuMethod` is one of the following:

- `TEXTTABLE`
- `SCALE_LINEAR_AND_TEXTTABLE`
- `SCALE_RATIONAL_AND_TEXTTABLE`
- `BITFIELD_TEXTTABLE`

⌋

5.5.1.5 Display Format in Computation Methods

It is possible to set a display format in two locations in the same context of one `SwDataDefProps`.

As a consequence, it needs to be clarified what happens if a display format is defined in both possible locations. After all, the value of the display format defined in the two possible locations may not be identical and therefore a response to such a scenario needs to be defined.

[TPS_SWCT_01899] `SwDataDefProps.displayFormat` vs. `CompuMethod.displayFormat` ⌈If both `SwDataDefProps.displayFormat` and `SwDataDefProps.compuMethod.displayFormat` exist, then the value of `SwDataDefProps.displayFormat` shall be used and the value of `SwDataDefProps.compuMethod.displayFormat` shall be disregarded.

If a value is set in only one of `SwDataDefProps.displayFormat` and `SwDataDefProps.compuMethod.displayFormat`, then the value shall be respected.⌋

[constr_1913] Existence of attribute `CompuRationalCoeffs.compuDenominator`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈For each `CompuRationalCoeffs`, the attribute `compuDenominator` shall exist.⌋

[constr_1914] Existence of attribute `CompuRationalCoeffs.compuNumerator`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈For each `CompuRationalCoeffs`, the attribute `compuNumerator` shall exist.⌋

The values of coefficients within a rational formula are **not restricted** to integer values. It is possible to use floating-point values as well.

The values of exponents **cannot be set arbitrarily** but are implicitly defined by the appearance of coefficients in `CompuNominatorDenominator.v`, i.e. the first value in

the ordered list of CompuNominatorDenominator.v represents the exponent 0, the second CompuNominatorDenominator.v represents the exponent 1, and so on.

5.5.1.6 Category Values in the context of a CompuMethod

Some categorys of CompuMethod cannot be successfully converted to [15, ASAM A2L] because A2L does not provide an equivalent semantics that comes close to the respective AUTOSAR semantics.

A prominent example for such a case is a CompuMethod of category BITFIELD_TEXTTABLE.

[constr_1142] category of CompuMethod shall not be extended

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈In contrast to the general rule that category can be extended by user-specific values it is **not allowed** to extend the meaning of the attribute category of meta-class CompuMethod.⌋

For a detailed description of CompuMethods, please refer to the [28, ASAM MCD 2 Harmonized Data Objects].

[TPS_SWCT_01877] contains a definition of possible values for the attribute category.

[constr_1134] Allowed structure of TEXTTABLE

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The existence of physConstrs is not allowed and compuInternalToPhys shall exist with compuScales consisting of upperLimit and lowerLimit.⌋

[TPS_SWCT_01877] Description of supported categorys of CompuMethods ⌈

ASAM Category	*Meaning*	*Specific properties*
IDENTICAL	This CompuMethod just hands over the internal value with an optional unit.	Only the base elements are allowed and unit, physConstrs and internalConstrs are optional. This is the simplest type of a CompuMethod.
LINEAR	A linear conversion can be performed in two steps: The internal value is multiplied with a factor; after that, an offset is added to the result of the multiplication.	Exactly one CompuScale, with two v in compuNumerator and one v in compuDenominator.
SCALE_LINEAR	Used for a piecewise linear conversion.	More than one compuScale can be defined. Additionally there have to be the upperLimit and lowerLimit elements which define the region of validity for the linear function. The boundaries of the regions shall not overlap.
SCALE_LINEAR_AND_TEXTTABLE	Used for piecewise definition of one or more linear and several texttable scales.	Properties depend on the used scale function. For details see definition of SCALE_LINEAR and TEXTTABLE. The scales shall each provide lowerLimit and upperLimit definitions.

▽

△

ASAM Category	*Meaning*	*Specific properties*
RAT_FUNC	The rational function type is similar to the linear type without the restrictions for the compuNumerators and compuDenominators.	It can have as many v elements as needed for the rational function. The sequence of the values *v* carries the information for the exponents, that means the first *v* is the coefficient for x0, the second *v* is the coefficient for x1, etc. With this sequence the values of the exponents can be entirely represented. A rational function is only applicable for conversions in the direction that it is defined for, i.e. the automatic calculation of the inverse function is not supported by the MCD system.
SCALE_RAT_FUNC	Used for piecewise defined rational conversion.	
SCALE_RATIONAL_AND_TEXTTABLE	Used for piecewise definition of one rational and several texttable scales.	Properties depend on the used scale function. For details see definition of SCALE_RAT_FUNC and TEXTTABLE. The scales shall each provide lowerLimit and upperLimit definitions.
TEXTTABLE	The type TEXTTABLE is used for transformations of the internal value into textual elements.	The result is placed in the Compu Scale Literal. The compuDefaultValue is optional. If the reverse calculation is needed then for each scale the compuInverseValue can be used to define the reverse calculation result. If no inverse value is explicitly defined then the smallest possible value of the scale will be used as result of the reverse calculation. [constr_1134] applies!
TAB_NOINTP	Similar to TEXTTABLE, but for numerical values.	The values per scale are defined in CompuConst.
BITFIELD_TEXTTABLE	Similar to TEXTTABLE but for bit fields.	BITFIELD_TEXTTABLE is derived from TEXTTABLE. The main difference is that TEXTTABLE results to a single value while BITFIELD_TEXTTABLE results to a concatenated value set. In difference to all the other computational methods **every** CompuScale will be applied including the bit mask specified in mask. Therefore it is allowed for this type of CompuMethod, that CompuScales overlap. To calculate the string reverse to a value, the string has to be split and the according value for each substring has to be summed up. The sum is finally transmitted. The processing has to be done in order of the CompuScale elements. [constr_1135] applies!

⌋

[constr_1135] Limit of vt in BITFIELD_TEXTTABLE

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The separator for splitting the string representing the value is "|" and is therefore forbidden to appear in vt.⌋

5.5.1.7 Applicability of Attributes in the context of a CompuMethod

This section summarizes the applicability of CompuMethod in terms of which attributes of CompuMethod and related meta-classes (e.g. CompuScale, CompuConst) shall be used depending on the nature of the CompuMethod, expressed by the value of attribute category.

[constr_1375] Existence of attributes of `CompuMethod` and related meta-classes depending on the value of the `category`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈

	Attribute Existence per Category									
Attributes of `CompuMethod`	IDENTICAL	LINEAR	SCALE_LINEAR	RAT_FUNC	SCALE_RAT_FUNC	TEXTTABLE	BITFIELD_TEXTTABLE	SCALE_LINEAR_AND_TEXTTABLE	SCALE_RATIONAL_AND_TEXTTABLE	TAB_NOINTP
compuInternalToPhys		D(1)	D(1)	D(2)	D(2)	D	D	D(8)	D(2)	D
compuPhysToInternal		D(1)	D(1)	D(2)	D(2)				D(2,3)	
displayFormat	0..1	0..1	0..1	0..1	0..1			0..1	0..1	0..1
Attributes of meta-classes related to CompuMethod										
compuDefaultValue		O(6)	O(6)	O(6)	O(6)	O(6)	O(6)	O(6)	O(6)	O(6)
CompuScale		D/1..1	D/1..n	D/1..1	D/1..n	D/1..n	D/1..n	D/1..n	D/1..n	D/1..n
CompuScale.compuInverseValue				O(2)	O(2)	O(5)		O(2,5)	O(2,5)	O(5)
CompuScale.lowerLimit		O	D	D(4)	D(4)	D	D	D	D(4)	D
CompuScale.mask							D			
CompuScale.shortLabel						O(7)	O(7)	O(7)	O(7)	
CompuScale.a2lDisplayText						O	O	O	O	
CompuScale.symbol						O(7)	O(7)	O(7)	O(7)	
CompuScale.upperLimit		O	D	D(4)	D(4)	D	D	D	D(4)	D
CompuConst						D/vt	D/vt	D/vt	D/vt	D/vt or vf
CompuRationalCoeffs		D	D	D	D			D	D	
CompuRationalCoeffs.compuDenominator		D/1v	D/1v	D	D			D/1v	D	
CompuRationalCoeffs.compuNumerator		D/2v	D/2v	D	D			D/2v	D	

⌋

Legend for Table inside [constr_1375]

Empty cells indicate that the attribute is not applicable for the respective combination of attribute and value of `category`.

The first two rows of the table contained in [constr_1375] define the applicability of the immediate attributes of meta-class `CompuMethod`, the remainder of the table then goes into further detail regarding the usage of the attributes of related meta-classes (e.g. `CompuScale`, `CompuConst`).

Annotations apply to the individual cell values. These annotations are formulated by a numerical value in parentheses, e.g. (1).

D Define the attribute.

empty cell Attribute is **not applicable** for usage in the scope of this element.

O **Optionally** define the attribute.

In addition to the primary cell legend the following annotations apply to the cells in the table contained in [constr_1375]:

(1) In this case **either** `compuPhysToInternal` **or** `compuInternalToPhys` shall be defined, unless [constr_1022] applies.

(2) In this case both `compuPhysToInternal` and `compuInternalToPhys` shall be defined unless `compuInverseValue` exists (see [TPS_SWCT_01282]). In other words, if the explicit definition of a `compuInverseValue` exists then there is no need to define conversions from internal to physical **and** vice versa.

(3) Not applicable for `CompuScale`s where attribute `compuScaleContents.compuConst` exists.

(4) Limits shall be defined according to [constr_1022].

(5) Restrictions on the structure of the `CompuMethod` according to [constr_1134] apply.

(6) Specify an output value for a conversion formula if the value to be converted lies outside the plausibility limit (for more information, please refer to the class table of `Compu`).

(7) Restricted applicability for the attribute `CompuScale.symbol`, see [constr_1146].

(8) Mandatory for `CompuConst`; enforced for `CompuRationalCoeffs`.

5.5.1.8 Compu Method and Autosar Data Type

This chapter clarifies the applicability of `CompuMethod` for the relevant concrete subclasses of `AutosarDataType`.

5.5.1.8.1 CompuMethod and ApplicationDataType

For `ApplicationDataType`, there are (see [constr_1007]) a number of values of `category` that allow for the definition of a `ApplicationDataType.swDataDefProps.compuMethod`.

[constr_1634] visualizes the allowed combinations of `ApplicationDataType.category` vs. `CompuMethod.category`.

The rows of the table contained in [constr_1634] represent values of `category` for `ApplicationDataType` that are cleared for the definition of a `CompuMethod` according to [constr_1007].

The columns of the table contained in [constr_1634] represent values of `category` for `CompuMethod`.

[constr_1634] Allowed combinations of ApplicationDataType.category vs. CompuMethod.category

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈

	IDENTICAL	LINEAR	SCALE_LINEAR	SCALE_LINEAR_AND_TEXTTABLE	RAT_FUNC	SCALE_RATIONAL_AND_TEXTTABLE	TEXTTABLE	TAB_NOINTP	BITFIELD_TEXTTABLE
VALUE	x	x	x	x	x	x	x	x	x
VAL_BLK	x	x	x	x	x	x	x	x	x
BOOLEAN							x		
CURVE	x	x	x	x	x	x	x	x	x
MAP	x	x	x	x	x	x	x	x	x
CUBOID	x	x	x	x	x	x	x	x	x
CUBE_4	x	x	x	x	x	x	x	x	x
CUBE_5	x	x	x	x	x	x	x	x	x

⌋

5.5.1.8.2 CompuMethod and ImplementationDataType

For ImplementationDataType, there are (see [constr_1009]) only two values of category that allow for the definition of a ImplementationDataType.swDataDefProps.compuMethod: TEXTTABLE and BITFIELD_TEXTTABLE.

The rows of the table contained in [constr_1158] represent values of category for ImplementationDataType that are cleared for the definition of a CompuMethod according to [constr_1009].

The columns of the table contained in [constr_1158] represent values of category for CompuMethod.

[constr_1158] Applicable `category`s for attribute `ImplementationDataType.swDataDefProps.compuMethod`

Imposition time: CP: `IT_CpgExe`

⌈

	IDENTICAL	LINEAR	SCALE_LINEAR	SCALE_LINEAR_AND_TEXTTABLE	RAT_FUNC	SCALE_RATIONAL_AND_TEXTTABLE	TEXTTABLE	TAB_NOINTP	BITFIELD_TEXTTABLE
VALUE							x		x
TYPE_REFERENCE							x		x

⌋

5.5.1.9 Compu Method and A2L

Attribute `CompuScale.a2lDisplayText` does not contribute to the semantics of the AUTOSAR model. It is just a convenience shortcut to support the conversion of an AUTOSAR `CompuMethod` to an A2L `COMPU_VTAB`.

In the interest of calibration and measurement engineers who will later need to work with the A2L content created from an AUTOSAR model, it is strongly recommended that all eligible (see [TPS_SWCT_01878]) `CompuMethod`s should define respective values of `CompuScale.a2lDisplayText`.

However, this specification can hardly provide any binding rules for the case that an eligible `CompuMethod` does not contain `CompuScale.a2lDisplayText`.

If there were an intention within AUTOSAR to strongly control how the display text in a generated A2L file should look like, then [TPS_SWCT_01878] would be formulated as a constraint (as opposed to a spec item) that requires the existence of `CompuScale.a2lDisplayText` where applicable.

[TPS_SWCT_01878] Applicability of attribute `CompuScale.a2lDisplayText`

⌈Attribute `CompuScale.a2lDisplayText` only makes sense in the context of a `CompuMethod` where attribute `category` is equal to one of the column labels for which a value exists at the intersection with the row labeled "`CompuScale.a2lDisplayText`" in the table inside [constr_1375] and only if the values of attributes

- `CompuScale.lowerLimit`
- `CompuScale.upperLimit`

are **identical**.

Otherwise the value of `CompuScale.a2lDisplayText` shall be ignored.⌋

5.5.2 Physical Dimensions

[TPS_SWCT_01285] Physical dimension ⌈Another important part of the semantics associated with a data type is its physical dimension. Units are used to augment the value with additional information like *m/s* or *liter*. This is necessary for a correct interpretation of the physical value for input and output processes.

The conversion of values into other units like *km/h* into *miles/h* is also possible. Therefore, the unit involves information about its physical dimensions.⌋

[TPS_SWCT_01056] Physical dimension ⌈The substructure of physical dimensions defines all used quantities in the SI-System[20] (e.g. velocity as length/time corresponds to m/s).⌋

[TPS_SWCT_01059] Exponent for each of the seven fundamental dimensions ⌈For basing a new unit directly upon SI units an exponent for each of the seven fundamental dimensions and its corresponding SI unit shall be specified.⌋

[TPS_SWCT_01737] Default values for physical exponents ⌈The default value of attributes `currentExp`, `lengthExp`, `luminousIntensityExp`, `massExp`, `molarAmountExp`, `temperatureExp`, `timeExp` is 0.⌋

[TPS_SWCT_01060] Negative exponents ⌈Negative exponents are allowed.⌋

Class	**PhysicalDimension**			
Note	This class represents a physical dimension. If the physical dimension of two units is identical, then a conversion between them is possible. The conversion between units is related to the definition of the physical dimension. Note that the equivalence of the exponents does not per se define the convertibility. For example Energy and Torque share the same exponents (Nm). Please note further the value of an exponent does not necessarily have to be an integer number. It is also possible that the value yields a rational number, e.g. to compute the square root of a given physical quantity. In this case the exponent value would be a rational number where the numerator value is 1 and the denominator value is 2. **Tags:** atp.recommendedPackage=PhysicalDimensions			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

[20] For the definition of what SI units are, see http://physics.nist.gov/cuu/Units/

△

Class	**PhysicalDimension**			
currentExp	Numerical	0..1	attr	This attribute represents the exponent of the physical dimension "electric current". **Tags:** xml.sequenceOffset=50
lengthExp	Numerical	0..1	attr	The exponent of the physical dimension "length". **Tags:** xml.sequenceOffset=20
luminous IntensityExp	Numerical	0..1	attr	The exponent of the physical dimension "luminous intensity". **Tags:** xml.sequenceOffset=80
massExp	Numerical	0..1	attr	The exponent of the physical dimension "mass". **Tags:** xml.sequenceOffset=30
molarAmount Exp	Numerical	0..1	attr	The exponent of the physical dimension "quantity of substance". **Tags:** xml.sequenceOffset=70
temperatureExp	Numerical	0..1	attr	The exponent of the physical dimension "temperature". **Tags:** xml.sequenceOffset=60
timeExp	Numerical	0..1	attr	The exponent of the physical dimension "time". **Tags:** xml.sequenceOffset=40

Table 5.77: PhysicalDimension

AUTOSAR provides the ability to map two PhysicalDimensions onto each other with the implication that the two mapped PhysicalDimensions shall be considered compatible.

As explained by [constr_1053], the only degree of freedom regarding the compatibility of PhysicalDimensions is the value of the shortName.

In other words, the definition of a PhysicalDimensionMapping makes it possible to declare that two PhysicalDimensions with exactly the same values of the exponent attributes are considered a match even if they have different shortNames.

This declaration of support for the assessment of compatibility is not done on a global scope, but in the context of a CompositionSwComponentType, through the reference in the role CompositionSwComponentType.physicalDimensionMapping.

The main use case for the definition of PhysicalDimensions with exactly the same values of the exponent attributes and different shortNames is to increase the chances for integrating model content from different contributors that each define their own set of PhysicalDimension.

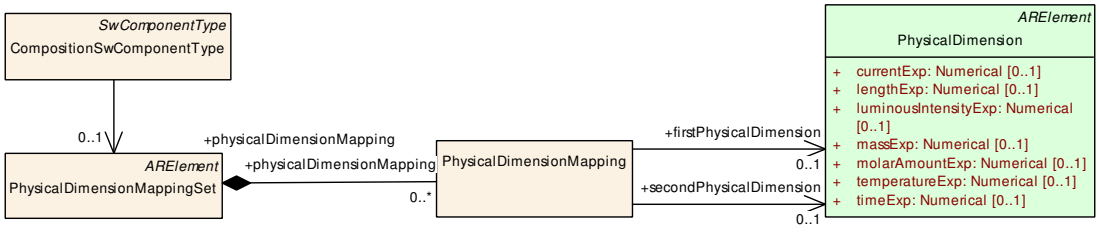

Figure 5.54: Modeling of PhysicalDimensionMapping

PhysicalDimensionMappings are aggregated in the form of PhysicalDimensionMappingSets. This allows for gathering semantically related PhysicalDimensionMappings into the same PhysicalDimensionMappingSet.

Class	PhysicalDimensionMapping			
Note	This class represents a specific mapping between two PhysicalDimensions.			
Base	*ARObject*			
Aggregated by	PhysicalDimensionMappingSet.physicalDimensionMapping			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
firstPhysical Dimension	PhysicalDimension	0..1	ref	This represents the first PhysicalDimension of the enclosing PhysicalDimensionMapping. **Tags:** atp.Splitkey=firstPhysicalDimension
secondPhysical Dimension	PhysicalDimension	0..1	ref	This represents the first PhysicalDimension of the enclosing PhysicalDimensionMapping. **Tags:** atp.Splitkey=secondPhysicalDimension

Table 5.78: PhysicalDimensionMapping

Class	PhysicalDimensionMappingSet			
Note	This class represents a container for a list of mappings between PhysicalDimensions. **Tags:** atp.recommendedPackage=PhysicalDimensionMappingSets			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
physical Dimension Mapping	PhysicalDimension Mapping	*	aggr	This aggregation represents a concrete collections of PhysicalDimensionMappings in the context of one PhysicalDimensionMappingSet. **Tags:** atp.Splitkey=physicalDimensionMapping

Table 5.79: PhysicalDimensionMappingSet

[constr_1915] Existence of attribute PhysicalDimensionMapping.firstPhysicalDimension

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each PhysicalDimensionMapping, attribute firstPhysicalDimension shall exist.⌋

[constr_1916] Existence of attribute PhysicalDimensionMapping.secondPhysicalDimension

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each PhysicalDimensionMapping, attribute secondPhysicalDimension shall exist.⌋

5.5.3 Units and Unit Groups

[TPS_SWCT_01057] Unit references one physical dimension ⌈The unit references one physical dimension. If the physical dimensions of two units are identical, a conversion between them is basically possible.⌋

[TPS_SWCT_01058] `UnitGroup` ⌈The `UnitGroup`s determine if such a conversion is appropriate.⌋

Figure 5.55 depicts the concept how units are defined.

Class	**Unit**			
Note	This is a physical measurement unit. All units that might be defined should stem from SI units. In order to convert one unit into another factor and offset are defined. For the calculation from SI-unit to the defined unit the factor (factorSiToUnit) and the offset (offsetSiTo Unit) are applied as follows: x [{unit}] := y * {siUnit} * factorSiToUnit [{unit}/{siUnit}] + offsetSiToUnit [{unit}] For the calculation from a unit to SI-unit the reciprocal of the factor (factorSiToUnit) and the negation of the offset (offsetSiToUnit) are applied. y [{siUnit}] := (x*{unit} - offsetSiToUnit [{unit}]) / factorSiToUnit [{unit}/{siUnit}] **Tags:** atp.recommendedPackage=Units			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
displayName	SingleLanguageUnit Names	0..1	aggr	This specifies how the unit shall be displayed in documents or in user interfaces of tools.The displayName corresponds to the Unit.Display in an ASAM MCD-2MC file. **Tags:** atp.Splitkey=displayName xml.sequenceOffset=20
factorSiToUnit	Float	0..1	attr	This is the factor for the conversion from SI Units to units. The inverse is used for conversion from units to SI Units. **Tags:** xml.sequenceOffset=30
offsetSiToUnit	Float	0..1	attr	This is the offset for the conversion from and to siUnits. **Tags:** xml.sequenceOffset=40
physical Dimension	PhysicalDimension	0..1	ref	This association represents the physical dimension to which the unit belongs to. Note that only values with units of the same physical dimensions might be converted. **Tags:** atp.Splitkey=physicalDimension xml.sequenceOffset=50

Table 5.80: Unit

Class	«atpMixedString» **SingleLanguageUnitNames**
Note	This represents the ability to express a display name.
Base	*ARObject*, *MixedContentForUnitNames*
Aggregated by	SwAxisCont.unitDisplayName, SwValueCont.unitDisplayName, Unit.displayName

▽

△

Class	«atpMixedString» **SingleLanguageUnitNames**			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.81: SingleLanguageUnitNames

For a detailed description of these elements please refer to the [28, ASAM HDO]. Standard units are already predefined for AUTOSAR in the form of a description file.

[TPS_SWCT_01736] Default values for `Unit.physicalDimension` ⌈If a `Unit` does not define the attribute `Unit.physicalDimension`, the default `PhysicalDimension` with the `shortName` `NoDimension` applies where all physical exponents are set to 0.⌋

Note that quantities like “%” are not derived from SI units and therefore have no association to a physical dimension.

An exemplary definition of a `Unit` can be found in Chapter B.2.2.

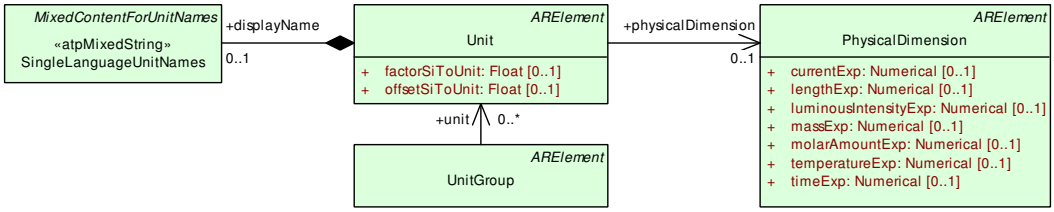

Figure 5.55: Definition of SI based units

[constr_1026] Compatibility of `Unit`s

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈If a `SwDataDefProps` references a `Unit` and the `SwDataDefProps` has a reference to either of/or both

- a `CompuMethod` that in turn references a `Unit`
- a `DataConstr` that in turn references a `Unit`

then the `Unit`s referenced from

- `SwDataDefProps`
- `SwDataDefProps.compuMethod`
- `SwDataDefProps.dataConstr`

shall be compatible.⌋

For the sake of model consistency, it is also possible to define a meaningless `Unit` for all the pieces of data that conceptually do not really have a `Unit` attached to them (e.g. `ApplicationPrimitiveDataType`s of `category` `BOOLEAN`).

By looking at the model, it becomes clear that the subject of whether to assign a Unit has been given a thought and the lack of a Unit is not simply the result of an oversight. For example, the [29, MOD General Blueprints] define the Unit NoUnit for exactly this purpose.

[constr_1255] ApplicationPrimitiveDataTypes of category BOOLEAN and STRING

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈If a Unit is referenced from within SwDataDefProps and/or PhysConstrs owned by ApplicationPrimitiveDataTypes of category BOOLEAN and STRING, this Unit shall represent a meaningless unit, i.e. the referenced physicalDimension shall not define any exponent value other than 0.⌋

[TPS_SWCT_01068] Units can be grouped with the help of UnitGroup ⌈Units can be grouped with the help of UnitGroup. This grouping is intended as a logical grouping which allows for example an MCD (Measurement Calibration Diagnostic) device to present different unit systems to the user such that the user can choose the most appropriate one.⌋

The association from SwComponentType to UnitGroup (beside the obvious use case to allow for the specification of unitGroups relevant for the enclosing SwComponentType in particular) is intended to support the identification of UnitGroups relevant for the enclosing System. This aspect facilitates the creation of ASAM MCD2 files for a concrete ECU.



Figure 5.56: Relation of SwComponentType to UnitGroup

Class	UnitGroup			
Note	This meta-class represents the ability to specify a logical grouping of units.The category denotes the unit system that the referenced units are associated to. In this way, e.g. country-specific unit systems (CATEGORY="COUNTRY") can be defined as well as specific unit systems for certain application domains. In the same way a group of equivalent units, can be defined which are used in different countries, by setting CATEGORY="EQUIV_UNITS". KmPerHour and MilesPerHour could such be combined to one group named "vehicle_speed". The unit MeterPerSec would not belong to this group because it is normally not used for vehicle speed. But all of the mentioned units could be combined to one group named "speed". Note that the UnitGroup does not ensure the physical compliance of the units. This is maintained by the physical dimension. **Tags:** atp.recommendedPackage=UnitGroups			
Base	ARElement, ARObject, CollectableElement, Identifiable, MultilanguageReferrable, Packageable Element, Referrable			
Aggregated by	ARPackage.element			
Attribute	Type	Mult.	Kind	Note

▽

△

Class	UnitGroup			
unit	Unit	*	ref	This represents one particular unit in the UnitGroup. **Tags:** atp.Splitkey=unit xml.sequenceOffset=20

Table 5.82: UnitGroup

According to [28, ASAM HDO] the following three values for `category`s are recommended in the context of `UnitGroup`:

- `COUNTRY` collects units which are common in a particular country, denoted by the `shortName` / `longName` of the `UnitGroup`
- `CALCULATION` refers to specific units intended for the creation of data types. In this `category` of `UnitGroup`, several `Unit`s may refer to the same `PhysicalDimension` as well as to different `PhysicalDimension`.
- `EQUIV_UNITS` define a group of equivalent units, which are used for example in different countries.

Additional values for `category` may be mutually agreed between the stakeholders.

In the example shown in Figure 5.57, `Unit`s are classified by country and use.

Assume “MilesPerHour” should be converted to a European unit: Based on the `physicalDimension` a conversion to “MeterPerSec” as well as “KmPerHour” is possible. In this case “KmPerHour” is preferred because “MilesPerHour” and “KmPerHour” are both members of the `UnitGroup` named “VehicleSpeed”.

In contrast to this, “MeterPerSec” is not considered as appropriate for “VehicleSpeed” in this specific example.

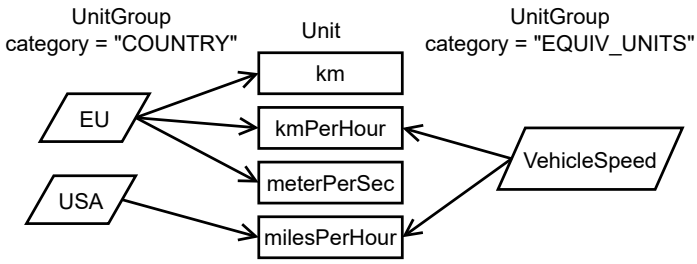

Figure 5.57: Example for units and unit groups

[TPS_SWCT_01061] Conversion of units ⌈If a unit needs to be converted according to the chosen country code, the `physicalDimension` of both units shall be the same. If another unit shares the same `UnitGroup` with a `category` of `EQUIV_UNITS` it is preferred as target of the conversion.⌋

5.5.4 Data Constraints

Chapter 5.2.4.1 already shows an example on how to define constraints for the physical range of a data type, see Figure 5.9.

[TPS_SWCT_01286] `DataConstr` ⌈In general, the meta-class `DataConstr` can be referenced (via `SwDataDefProps.dataConstr`) to define various constraints for the possible values of a data type. This includes limits for the physical and internal range, as well as special constraints (`monotony`) for the setup of an axis definition.⌋

Figure 5.58 and the following class tables show the meta-classes involved in the definition of constraints.

A more detailed documentation of these meta-classes can be found in [28, ASAM Harmonized]. As refinement of these definitions, the following values apply for `constrLevel`:

[constr_2561] Application of `DataConstrRule.constrLevel`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈`DataConstrRule.constrLevel` is limited to

0: This represents so called “hard limits”. They shall always be specified.

1: This represents so called “soft limits”. Soft limits may be violated after confirmation by the user of an MCD-System.

Other values may exist, but the semantics is outside the AUTOSAR scope.⌋

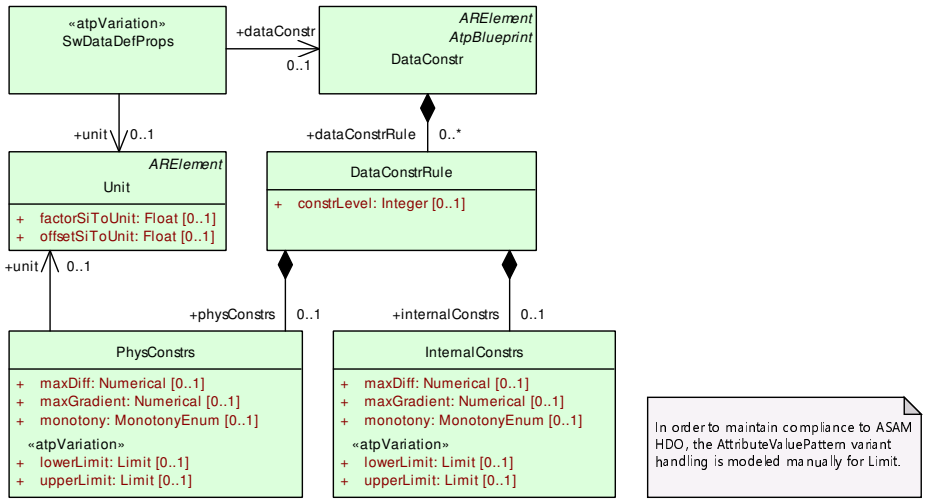

Figure 5.58: Meta-model for defining Data Constraints

[TPS_SWCT_01287] Standard limits and extended limits in the ASAM-MCD2 (ASAP2) specification ⌈The [15, ASAM-MCD2 (ASAP2)] specification defines standard limits and extended limits. If extended limits exist, the standard limits may be violated upon user confirmation. As a consequence of this definition, the following approach applies for A2L generation:

- If only one DataConstrRule with constrLevel set to **0** is specified, it represents the standard limits in A2L. No extended limits are generated.
- If two DataConstrRule exist, then:
  - the one with constrLevel set to **0** represents the extended limits
  - the one with constrLevel set to **1** represents the standard limits

Although this is somewhat counter-intuitive (since the one with constrLevel set to 0 changes its role), it best matches the definitions in ASAM-MCD2.⌋

Class	**DataConstr**			
Note	This meta-class represents the ability to specify constraints on data. **Tags:** atp.recommendedPackage=DataConstrs			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataConstrRule	DataConstrRule	*	aggr	This is one particular rule within the data constraints. **Tags:** atp.Splitkey=dataConstrRule xml.roleElement=true xml.roleWrapperElement=true xml.sequenceOffset=30 xml.typeElement=false xml.typeWrapperElement=false

Table 5.83: DataConstr

Class	**DataConstrRule**			
Note	This meta-class represents the ability to express one specific data constraint rule.			
Base	*ARObject*			
Aggregated by	DataConstr.dataConstrRule			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
constrLevel	Integer	0..1	attr	This attribute describes the category of a constraint. One of its functions is in the area of constraint violation, where it can be used from a certain level, to produce error messages. The lower the level, the more stringent the check. Used to distinguish hard or soft limits. **Tags:** xml.sequenceOffset=20
internalConstrs	InternalConstrs	0..1	aggr	Describes the limitations applicable on the internal domain (as opposed to the physical domain). **Tags:** atp.Splitkey=internalConstrs xml.sequenceOffset=40
physConstrs	PhysConstrs	0..1	aggr	Describes the limitations applicable on the physical domain (as opposed to the internal domain). **Tags:** atp.Splitkey=physConstrs xml.sequenceOffset=30

Table 5.84: DataConstrRule

Class	**PhysConstrs**			
Note	This meta-class represents the ability to express physical constraints. Therefore it has (in opposite to InternalConstrs) a reference to a Unit.			
Base	*ARObject*			
Aggregated by	DataConstrRule.physConstrs			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
lowerLimit	Limit	0..1	attr	This specifies the lower limit of the constraint. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=20
maxDiff	Numerical	0..1	attr	Maximum difference that is permitted between two consecutive values if the constraint is applied to an axis. **Tags:** xml.sequenceOffset=60
maxGradient	Numerical	0..1	attr	This element specifies the maximum slope that may be used in curves and maps. **Tags:** xml.sequenceOffset=50
monotony	MonotonyEnum	0..1	attr	This specifies the monotony constraints on the data object. Note that this applies only to curves and maps. **Tags:** xml.sequenceOffset=70
unit	Unit	0..1	ref	This is the unit to which the physical constraints relate to. In particular, it is the physical unit of the specified limits. **Tags:** atp.Splitkey=unit xml.sequenceOffset=80
upperLimit	Limit	0..1	attr	This specifies the upper limit of the constraint. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=30

Table 5.85: PhysConstrs

Class	**InternalConstrs**			
Note	This meta-class represents the ability to express internal constraints.			
Base	*ARObject*			
Aggregated by	DataConstrRule.internalConstrs			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
lowerLimit	Limit	0..1	attr	This specifies the lower limit of the constraint. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=20
maxDiff	Numerical	0..1	attr	Maximum difference that is permitted between two consecutive values if the constraint is applied to an axis. **Tags:** xml.sequenceOffset=60
maxGradient	Numerical	0..1	attr	This element specifies the maximum slope that may be used in maps and curves. **Tags:** xml.sequenceOffset=50



△

Class	**InternalConstrs**			
monotony	MonotonyEnum	0..1	attr	This element specifies the monotony characteristics of the current internal or physical limits. The following table shows the monotony characteristics which are to be filled through the corresponding values. If the element has no contents or if it is omitted, "no Monotony" is the default content. **Tags:** xml.sequenceOffset=70
upperLimit	Limit	0..1	attr	This specifies the upper limit defined by the constraint. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=30

Table 5.86: InternalConstrs

Primitive	**Limit**			
Note	This class represents the ability to express a numerical limit. Note that this is in fact a NumericalVariation Point but has the additional attribute intervalType. **Tags:** xml.xsd.customType=LIMIT-VALUE xml.xsd.pattern=(0[xX][0-9a-fA-F]+)|(0[0-7]+)|(0[bB][0-1]+)|(([+\-]?[1-9][0-9]+(\.[0-9]+)?|[+\-]?[0-9](\.[0-9]+)?)([eE]([+\-]?)[0-9]+)?)|\.0|INF|-INF|NaN xml.xsd.type=string			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
intervalType	IntervalTypeEnum	0..1	attr	This specifies the type of the interval. If the attribute is missing the interval shall be considered as "CLOSED". **Tags:** xml.attribute=true

Table 5.87: Limit

Enumeration	**MonotonyEnum**
Note	This enumerator denotes the values for specification of monotony for e.g. curves.
Aggregated by	InternalConstrs.monotony, PhysConstrs.monotony, *SwCalprmAxisTypeProps*.monotony
Literal	*Description*
decreasing	This indicates that the related curve needs to be monotony decreasing. **Tags:** atp.EnumerationLiteralIndex=0
increasing	This indicates that the related curve needs to be monotony increasing. **Tags:** atp.EnumerationLiteralIndex=1
monotonous	This indicates that the values shall be monotonously decreasing or increasing, depending on the trend set by the first values of the series. **Tags:** atp.EnumerationLiteralIndex=2
noMonotony	This indicates that the related curve needs not to be monotony. **Tags:** atp.EnumerationLiteralIndex=3
strictlyDecreasing	This indicates that the related curve needs to be strictly monotony decreasing. **Tags:** atp.EnumerationLiteralIndex=4
strictlyIncreasing	This indicates that the related curve needs to be strictly monotony increasing. **Tags:** atp.EnumerationLiteralIndex=5

▽

△

Enumeration	MonotonyEnum
strictMonotonous	This indicates that the values shall be strict monotonously decreasing or increasing, depending on the trend set by the first values of the series. **Tags:** atp.EnumerationLiteralIndex=6

Table 5.88: MonotonyEnum

[TPS_SWCT_01288] Interpretation of `PhysConstrs` and `InternalConstrs` by tools ⌈`DataConstr` is an `ARElement` which can be reused by several data type specifications. Especially an `ImplementationDataType` and an `ApplicationDataType` which are mapped to each other can refer to the same constraints, or they can define their own constraints.

To avoid conflicts, in both cases `PhysConstrs` shall be interpreted by tools only with respect to application data types while `InternalConstrs` shall be interpreted only with respect to implementation data types.

If only `PhysConstrs` are provided to `ApplicationDataType`s, the `CompuMethod` can be used to compute the `InternalConstrs`.⌋

[TPS_SWCT_01289] Semantics of `Limit` ⌈Technically, a `Limit` specifies a boundary of the interval of valid values for a given context (i.e. a data type).

The boundary might or might not be part of the interval itself, i.e. the interval might be open or closed. From the formal point of view, the range represents all real numbers defined by:

$$\begin{aligned} range \quad = \quad & \{x \in \Re \parallel lowerLimit.value < x < upperLimit.value\} \\ & \cup \{lowerLimit.value \parallel lowerLimit.intervalType == \text{“}CLOSED''\} \\ & \cup \{upperLimit.value \parallel upperLimit.intervalType == \text{“}CLOSED''\} \end{aligned}$$

⌋

`Limit` inherits from `AbstractNumericalVariationPoint`. This means it is a number which may be subject to variability. For this reason, it is not possible to constrain the content already in the xml schema.

[constr_1191] Value of `Limit` shall yield a numerical value

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈After all variability is bound, the content obtained from a limit shall yield a numerical value.⌋

Nevertheless, it is not possible to distinguish on this level between float and integer values. Consequently, [constr_1191] will not take the burden from an AUTOSAR tool

to decide whether the value provided as a limit actually makes sense in any of the given contexts.

Enumeration	**IntervalTypeEnum**
Note	This enumerator specifies the type of an interval.
Aggregated by	Limit.intervalType, LimitValueVariationPoint.intervalType
Literal	***Description***
closed	The area is limited by the value given. The value itself is included. **Tags:** atp.EnumerationLiteralIndex=0
open	The area is limited by the value given. The value itself is not included. **Tags:** atp.EnumerationLiteralIndex=2

Table 5.89: IntervalTypeEnum

5.5.4.1 Physical Limits

Physical limits can be given at various places in the AUTOSAR Meta-Model, e.g. in context of ApplicationDataTypes, DataPrototypes but also without the usage of the type-prototype-pattern in Compound Primitive Data Types (e.g SwAxisIndividual.dataConstr).

Nevertheless, the usage of PhysConstrs requires a CompuMethod for the calculation of the numerical limits, which cannot be applied for textual conversions. For this reason, the following definition applies:

[TPS_SWCT_01761] Physical limits of pure textual conversions ⌈It is not possible to define the lower or upper limit of a set of textual labels. Therefore, it is not possible to define limits for an object that can only take elements of a set of textual labels as the value.⌋

As a consequence of [TPS_SWCT_01761], for data defined using a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE and additionally a DataConstr with a dataConstrRule.physConstrs, the given physConstrs has no meaning.

[TPS_SWCT_01762] Physical limits of mixed textual conversions ⌈The definition of the physical limits of a piece of data described by a CompuMethod of category SCALE_LINEAR_AND_TEXTTABLE and SCALE_RATIONAL_AND_TEXTTABLE can only be specified for the **linear** or **rational** part.

In addition, the defined textual labels can be used for the conversion.⌋

For clarification, [TPS_SWCT_01761] and [TPS_SWCT_01762] do not limit the usage of DataConstr.dataConstrRule.internalConstrs which may define further and even tighter constraints on implementation level.

Those internalConstrs might even be given in context of a Compound Primitive Data Type (for example, in the context of an SwAxisIndividual.inputVariableType (see [TPS_SWCT_01865]) or SwAxisIndividual.dataConstr).

5.5.4.2 Internal Limits

The counterpart to the definition of PhysConstrs in the internal domain is represented by InternalConstrs. There are situations[21] where it is not possible to define a PhysConstrs (see [TPS_SWCT_01761]) but (on the other hand) the definition of InternalConstrs is possible.

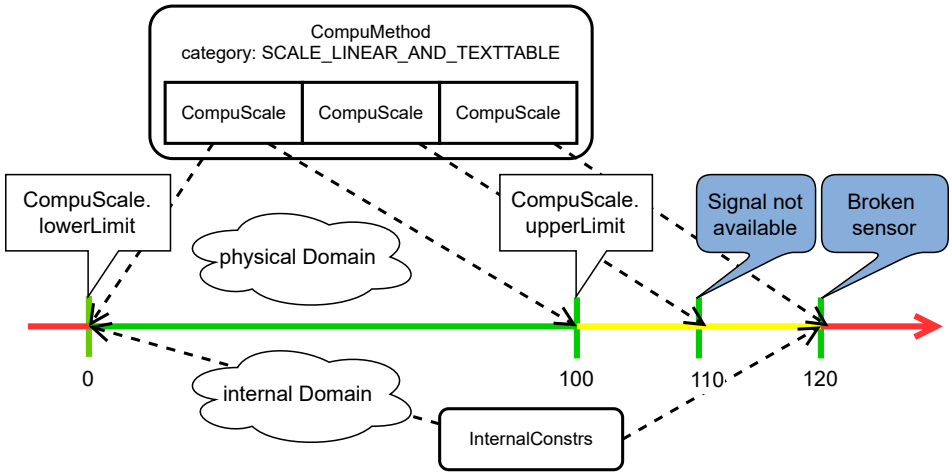

Figure 5.59: Definition of coarse-grained internal limits

But in such a case, different options are available, depending on the specific situation. Consider the example depicted in Figure 5.59. The allowed value range in the internal domain extends from 0 on the lower end to 120 on the upper end.

In fact, the intervals 101..109 and 111..119 in the internal domain can obviously not be used because these values cannot be converted into a reasonable value in the physical domain. Nevertheless, these intervals are part of the definition of the InternalConstrs.

This means that the RTE will not be able to detect a violation of the data constraints. But if the application software can ensure that the prohibited intervals would never be used, then the overall situation would still be under control.

A safer approach to the definition of InternalConstrs is depicted in Figure 5.60. In this case, the definition of InternalConstrs covers exactly the usable intervals, even if two of the allowed intervals have a point-range.

This means that in the scenario depicted in Figure 5.60, the RTE is able to ensure that a potential violation of the allowed intervals can reliably be detected. Obviously, this level of precision comes with more effort for defining the applicable InternalConstrs.

As a side effect, this also means that a potential extension of the underlying CompuMethod needs to be carefully observed such that for each additional text-table entry in the CompuMethod one matching InternalConstrs needs to be defined.

[21] This applies in the presence of a CompuMethod of category TEXTTABLE or similar, e.g. SCALE_LINEAR_AND_TEXTTABLE

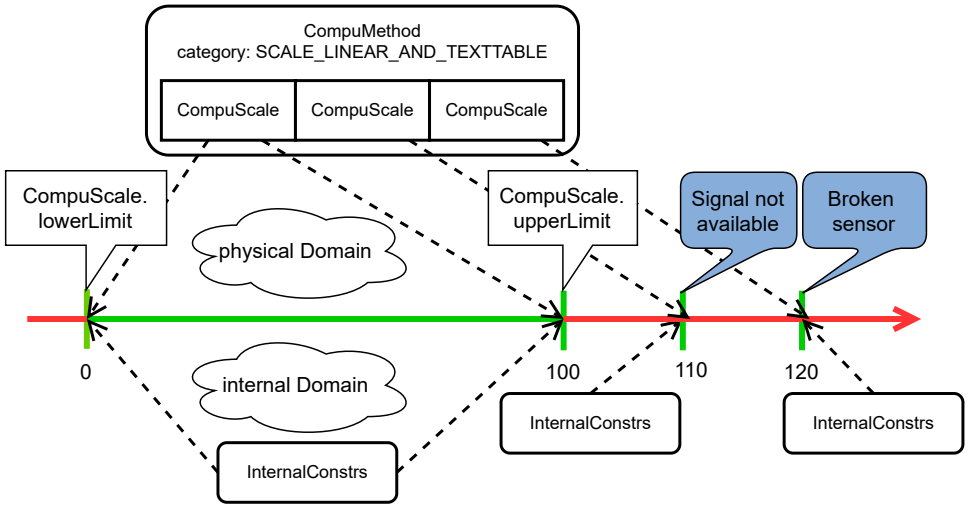

Figure 5.60: Definition of detailed internal limits

5.5.5 Addressing Methods

In an ECU there might be various methods to access a particular object (e.g. measurement or calibration parameter) according to a given address. This variety might come from different kind of memory (near, far, ...) but also from indirections which are introduced by the compiler.

[TPS_SWCT_01290] **SwAddrMethod** ⌈To allow a measurement and calibration system to access such objects SwAddrMethods are specified. Another purpose of this feature is to support the definition of abstract memory sections, i.e. to specify which variables shall be put together in the same sections in the case of generated code (especially for data allocated by the RTE).

SwAddrMethod will be used to group data, for example, to cover the fact that sometimes it is required that one or more calibration parameters out of the overall collection of calibration parameters of a SwComponentPrototype respectively an AUTOSAR software-component shall be placed in another memory location than the other parameters of the SwComponentPrototype respectively the AUTOSAR software-component.⌋

[TPS_SWCT_01291] Association of MemorySection with SwAddrMethod ⌈In Implementation the particular MemorySection is associated with the SwAddrMethod. This association indicates that all objects of the associated addressing method shall be placed in the given memory section.⌋

[constr_10424] Reference from MemorySection to ExecutableEntity

Imposition time: CP: IT_CpgExe

⌈Each ExecutableEntity shall only be referenced by exactly one MemorySection.⌋

Class	SectionNamePrefix			
Note	A prefix to be used for generated code artifacts defining a memory section name in the source code of the using module or SWC.			
Base	*ARObject*, *ImplementationProps*, *Referrable*			
Aggregated by	ResourceConsumption.sectionNamePrefix			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
implementedIn	DependencyOnArtifact	0..1	ref	Optional reference that allows to Indicate the code artifact (header file) containing the preprocessor implementation of memory sections with this prefix. The usage of this link supersedes the usage of a memory mapping header with the default name (derived from the BswModuleDescription's shortName). **Tags:** atp.Splitkey=implementedIn

Table 5.90: SectionNamePrefix

Class	MemorySection			
Note	Provides a description of an abstract memory section used in the Implementation for code or data. It shall be declared by the Implementation Description of the module or component, which actually allocates the memory in its code. This means in case of data prototypes which are allocated by the RTE, that the generated Implementation Description of the RTE shall contain the corresponding MemorySections. The attribute "symbol" (if symbol is missing: "shortName") defines the module or component specific section name used in the code. For details see the document "Specification of Memory Mapping". Typically the section name is build according the pattern: <SwAddrMethod shortName>[_<further specialization nominator>][_<alignment>] where • **[<SwAddrMethod shortName>]** is the shortName of the referenced SwAddrMethod • **[_<further specialization nominator>]** is an optional infix to indicate the specialization in the case that several MemorySections for different purpose of the same Implementation Description referring to the same or equally named SwAddrMethods. • **[_<alignment>]** is the alignment attributes value and is only applicable in the case that the memory AllocationKeywordPolicy value of the referenced SwAddrMethod is set to addrMethodShortNameAnd Alignment MemorySection used to Implement the code of RunnableEntitys and BswSchedulableEntitys shall have a symbol (if missing: shortName) identical to the referred SwAddrMethod to conform to the generated RTE header files. In addition to the section name described above, a prefix is used in the corresponding macro code in order to define a name space. This prefix is by default given by the shortName of the BswModule Description resp. the SwComponentType. It can be superseded by the prefix attribute.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ResourceConsumption.memorySection			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
alignment	AlignmentType	0..1	attr	The attribute describes the typical alignment of objects within this memory section.
executableEntity	ExecutableEntity	*	ref	Reference to the ExecutableEntitites located in this section. This allows to locate different Executable Entitities in different sections even if the associated Sw Addrmethod is the same. This is applicable to code sections only. **Tags:** atp.Splitkey=executableEntity

▽

△

Class	**MemorySection**			
prefix	SectionNamePrefix	0..1	ref	The prefix used to set the memory section's namespace in the code. The existence of a prefix element supersedes rules for a default prefix (such as the Bsw ModuleDescription's shortName). This allows the user to define several name spaces for memory sections within the scope of one module, cluster or SWC. **Tags:** atp.Splitkey=prefix
size	PositiveInteger	0..1	attr	The size in bytes of the section.
swAddrmethod	SwAddrMethod	0..1	ref	This association indicates that this module specific (abstract) memory section is part of an overall SwAddr Method, referred by the upstream declarations (e.g. calibration parameters, data element prototypes, code entities) which share a common addressing strategy. This can be evaluated for the ECU configuration of the build support. This association shall always be declared by the Implementation description of the module or component, which allocates the memory in its code. This means in case of data prototypes which are allocated by the RTE, that the software components only declare the grouping of its data prototypes to SwAddrMethods, and the generated Implementation Description of the RTE actually sets up this association. **Tags:** atp.Splitkey=swAddrmethod
symbol	Identifier	0..1	attr	Defines the section name as explained in the main description. By using this attribute for code generation (instead of the shortName) it is possible to define several different MemorySections having the same name - e.g. symbol = CODE - but using different sectionName Prefixes.

Table 5.91: MemorySection

Class	**DependencyOnArtifact**			
Note	Dependency on the existence of another artifact, e.g. a library.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*Implementation*.generatedArtifact, *Implementation*.requiredArtifact, *Implementation*.requiredGeneratorTool			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
artifactDescriptor	AutosarEngineeringObject	0..1	aggr	The specified artifact needs to exist. **Tags:** atp.Splitkey=artifactDescriptor
usage	DependencyUsageEnum	*	attr	Specification for which process step(s) this dependency is required.

Table 5.92: DependencyOnArtifact

[constr_10033] Existence of `MemorySection.swAddrmethod`

Imposition time: CP: `IT_CpgExe`

⌈For each `MemorySection`, attribute `swAddrmethod` shall exist.⌋

[constr_10034] Existence of `MemorySection.alignment`

Imposition time: CP: `IT_CpgExe`

⌈For each `MemorySection`, attribute `alignment` shall exist if the attribute `MemorySection.swAddrmethod.memoryAllocationKeywordPolicy` is set to `MemoryAllocationKeywordPolicyType.addrMethodShortNameAndAlignment`.⌋

Rationale for the existence of [constr_10033]: If the `MemorySection` is configured such that `MemorySection.swAddrmethod.memoryAllocationKeywordPolicy` is set to `MemoryAllocationKeywordPolicyType.addrMethodShortNameAndAlignment`, then the `alignment` attribute is mandatory because the implementation of the memory mapping shall be able to formally consider the alignment for the choice of memory sections.

Class	**SwAddrMethod**			
Note	Used to assign a common addressing method, e.g. common memory section, to data or code objects. These objects could actually live in different modules or components. **Tags:** atp.recommendedPackage=SwAddrMethods			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
memory Allocation KeywordPolicy	MemoryAllocation KeywordPolicyType	0..1	attr	Enumeration to specify the name pattern of the Memory Allocation Keyword.
option	Identifier	*	attr	This attribute introduces the ability to specify further intended properties of the MemorySection in with the related objects shall be placed. These properties are handled as to be selected. The intended options are mentioned in the list. In the Memory Mapping configuration, this option list is used to determine an appropriate MemMapAddressing ModeSet.
section Initialization Policy	SectionInitialization PolicyType	0..1	attr	Specifies the expected initialization of the variables (inclusive those which are implementing VariableData Prototypes). Therefore this is an implementation constraint for initialization code of BSW modules (especially RTE) as well as the start-up code which initializes the memory segment to which the AutosarData Prototypes referring to the SwAddrMethod's are later on mapped. If the attribute is not defined it has the identical semantic as the attribute value "INIT"
sectionType	MemorySectionType	0..1	attr	Defines the type of memory sections which can be associated with this addressing method.

Table 5.93: SwAddrMethod

[TPS_SWCT_01456] Predefined values for `SwAddrMethod.option` ⌈The following values of attribute `SwAddrMethod.option` are predefined by AUTOSAR:

`resetSafe` This corresponds to variables of ECU-functions whose values shall endure an ECU reset.

protected This corresponds to variables, constants, and code which shall not be accessible and modifiable from the outside without a security mechanism.

offline This corresponds to calibration parameters which shall not be modifiable during ECU operation.

coreGlobal This corresponds to variables, constants, and code which need to be accessible by any core in the case of multi-core ECUs.

coreLocal This corresponds to variables, constants, and code which need to be accessible by one core in the case of multi-core ECUs.

nvData This corresponds to variables of ECU-functions which shall be stored in non-volatile data. This option is applicable for memory used as a `RAM Block` managed by the NvM.

safetyQM This corresponds to variables, constants, and code without any safety integrity level and therefore having a QM rating.

safetyAsilA This corresponds to variables, constants, and code with the safety integrity level A.

safetyAsilB This corresponds to variables, constants, and code with the safety integrity level B.

safetyAsilC This corresponds to variables, constants, and code with the safety integrity level C.

safetyAsilD This corresponds to variables, constants, and code with the safety integrity level D.

configClassPreBuild This corresponds to config data which is assigned at precompile or link time.

configClassPostBuild This corresponds to config data which is assigned at post-build time.

⌋

Obviously, the multiplicity of the attribute `SwAddrMethod.option` allows for the appearance of more than one value. For example, a combination of the values `resetSafe`, `protected`, and `safetyAsilC` makes perfect sense on a particular list and can be used to express a meaning that combines the semantics of both values with each other.

However, this combination of values is not arbitrarily possible. It is therefore necessary to formulate a constraint that regulates the appearance of the safety-related values mentioned in [TPS_SWCT_01456].

In other words, it would not make any sense to attribute two different [30, ASIL] values to a given memory object that appear on the same list.

If these values were combined on a particular list, the intended semantics would be ambiguous and could not clearly be determined. Therefore, [constr_1311] applies.

[constr_1311] Appearance of safety-related possible values of SwAddrMethod.option

Imposition time: CP: IT_RteGen

⌈Any given collection of values stored in the attribute SwAddrMethod.option according to [TPS_SWCT_01456] shall at most include a single value out of the following list:

- **safetyQM**
- **safetyAsilA**
- **safetyAsilB**
- **safetyAsilC**
- **safetyAsilD**

⌋

[constr_1381] Appearance of core-related possible values of SwAddrMethod.option

Imposition time: CP: IT_RteGen

⌈Any given collection of values stored in the attribute SwAddrMethod.option according to [TPS_SWCT_01456] shall at most include a single value out of the following list:

- **coreGlobal**
- **coreLocal**

⌋

[TPS_SWCT_01294] Missing SwDataDefProps.swAddrMethod ⌈If the association SwDataDefProps.swAddrMethod is missing the object can be placed anywhere without restriction, e.g. using a default behavior of the RTE generator. Contradicting specifications (e.g. two different component types request different associations for one particular SwAddrMethod) shall be flagged as an error.⌋

Figure 5.62 illustrates the usage of SwAddrMethod in the context of a DataPrototype.

[TPS_SWCT_01292] Usage of SwAddrMethod in the context of a DataPrototype ⌈The software-component which defines the DataPrototype will in general not be the same as the one to which the Implementation that actually contains the description of the MemorySection belongs.

The reason for this is that the resources for data allocated by the RTE will be described in the Implementation of the RTE. The indirection via SwAddrMethod makes this possible.⌋

[TPS_SWCT_01293] RTE Generator needs to derive the Memory Allocation Keyword ⌈The RTE Generator needs to derive the Memory Allocation Keyword used for RunnableEntitys and BswSchedulableEntitys from the shortName of the SwAddrMethod only because the alignment defined in MemorySection is not known at contract phase.⌋

[constr_2034] SwAddrMethod referenced by RunnableEntitys, BswCalledEntitys, or BswSchedulableEntitys

Imposition time: CP: IT_CpgExe

⌈RunnableEntitys, BswCalledEntitys, and BswSchedulableEntitys shall not reference a SwAddrMethod which attribute memoryAllocationKeywordPolicy is set to addrMethodShortNameAndAlignment.⌋

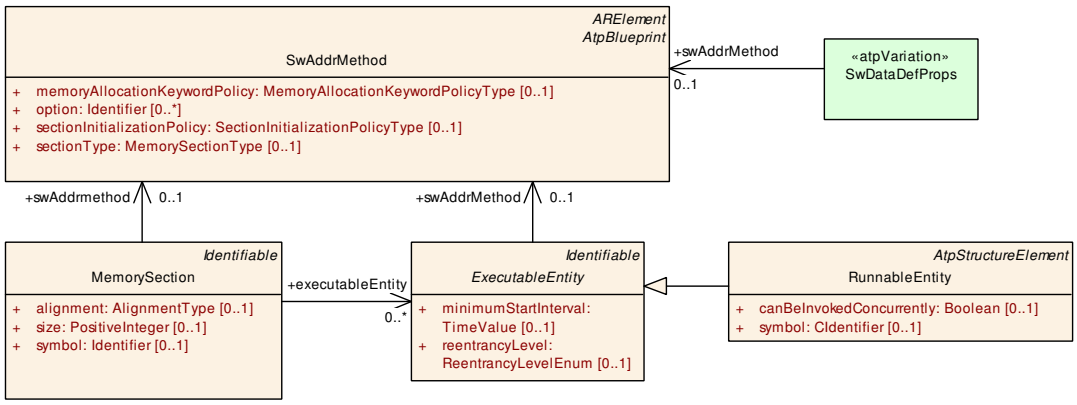

Figure 5.61: SwAddrMethod

[constr_1402] Applicability of core-related possible values of SwAddrMethod.option related to SwAddrMethod.sectionInitializationPolicy

Imposition time: CP: IT_CpgExe

⌈If the attribute SwAddrMethod.option is set to coreLocal then the attribute SwAddrMethod.sectionInitializationPolicy of the same SwAddrMethod respectively the MemorySection.swAddrmethod shall be set to either INIT or CLEARED.⌋

The purpose of [constr_1402] is to reduce the complexity of memory layouts and the amount of memory gaps due to allocation restrictions.

Primitive	**SectionInitializationPolicyType**
Note	SectionInitializationPolicyType describes the intended initialization of MemorySections. The following values are standardized in AUTOSAR Methodology: • **INIT**: To be used for (explicitly or not explicitly) initialized variables. • **CLEARED**: To be used for not explicitly initialized variables. • **POWER-ON-CLEARED**: To be used for variables that are not explicitly initialized (cleared) during normal start-up. Instead these are cleared only after power on reset. Please note that the values are defined similar to the representation of enumeration types in the XML schema to ensure backward compatibility. **Tags:** xml.xsd.customType=SECTION-INITIALIZATION-POLICY-TYPE xml.xsd.type=NMTOKEN

Table 5.94: SectionInitializationPolicyType

[constr_10068] Standardized values for `SectionInitializationPolicyType`

Imposition time: CP: `IT_CpgExe`

⌈The following values for `SectionInitializationPolicyType` are reserved by the AUTOSAR standard:

INIT To be used for (explicitly or not explicitly) initialized variables.

CLEARED To be used for not explicitly initialized variables.

POWER-ON-CLEARED To be used for variables that are not explicitly initialized (cleared) during normal start-up. Instead these are cleared only after power on reset.

⌋

Custom values of `SectionInitializationPolicyType` are currently not supported.

For more information on the specification of a `MemorySection` refer to [6, TPS BSW Module Description Template].

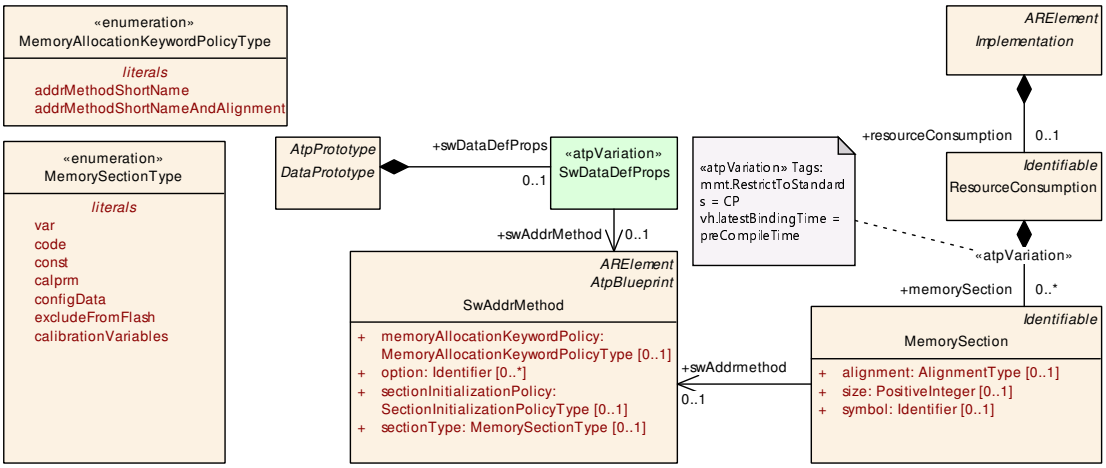

Figure 5.62: Assigning an address method to a memory section

Enumeration	**MemorySectionType**
Note	Enumeration to specify the essential nature of the data which can be allocated in a common memory class by the means of the AUTOSAR Memory Mapping.
Aggregated by	SwAddrMethod.sectionType
Literal	***Description***
calibrationVariables	This memory section is reserved for "virtual variables" that are computed by an MCD system during a measurement session but do not exist in the ECU memory. **Tags:** atp.EnumerationLiteralIndex=2
calprm	To be used for calibratable constants of ECU-functions. **Tags:** atp.EnumerationLiteralIndex=3
code	To be used for mapping code to application block, boot block, external flash etc. **Tags:** atp.EnumerationLiteralIndex=4
configData	Constants with attributes that show that they reside in one segment for module configuration. **Tags:** atp.EnumerationLiteralIndex=5
const	To be used for global or static constants. **Tags:** atp.EnumerationLiteralIndex=6
excludeFromFlash	This memory section is reserved for "virtual parameters" that are taken for computing the values of so-called dependent parameter of an MCD system. Dependent Parameters that are not at the same time "virtual parameters" are allocated in the ECU memory. Virtual parameters, on the other hand, are not allocated in the ECU memory. Virtual parameters exist in the ECU Hex file for the purpose of being considered (for computing the values of dependent parameters) during an offline-calibration session. **Tags:** atp.EnumerationLiteralIndex=7
var	To be used for global or static variables. The expected initialization is specified with the attribute sectionInitializationPolicy. **Tags:** atp.EnumerationLiteralIndex=9

Table 5.95: MemorySectionType

Enumeration	**MemoryAllocationKeywordPolicyType**
Note	Enumeration to specify the name pattern of the Memory Allocation Keyword.
Aggregated by	SwAddrMethod.memoryAllocationKeywordPolicy
Literal	***Description***
addrMethodShort Name	The MemorySection shortNames of referring MemorySections and therefore the belonging Memory Allocation Keywords in the code are build with the shortName of the SwAddrMethod. This is the default value if the attribute does not exist. **Tags:** atp.EnumerationLiteralIndex=0
addrMethodShort NameAndAlignment	The MemorySection shortNames of referring MemorySections and therefore the belonging Memory Allocation Keywords in the code are build with the shortName of the SwAddrMethod and a variable alignment postfix. Thereby the alignment postfix needs to be consistent with the alignment attribute of the related MemorySection. **Tags:** atp.EnumerationLiteralIndex=1

Table 5.96: MemoryAllocationKeywordPolicyType

Primitive	**AlignmentType**
Note	This primitive represents the alignment of objects within a memory section. The value is in number of bits or UNKNOWN (deprecated), 8 , 16, 32, 64 UNSPECIFIED, BOOLEAN, or PTR. Typical values for numbers are 8, 16, 32, 64. **Tags:** xml.xsd.customType=ALIGNMENT-TYPE xml.xsd.pattern=[1-9][0-9]*|0[xX][0-9a-fA-F]*|0[bB][0-1]+|0[0-7]*|UNSPECIFIED|UNKNOWN|BOOLEAN|PTR xml.xsd.type=string

Table 5.97: AlignmentType

5.5.6 Record Layouts

[TPS_SWCT_01295] **SwRecordLayout** ⌈The SwRecordLayout describes how data is serialized in the memory of an ECU. This information is important with respect to the following aspects:

- to inform a measurement and calibration system how the data is serialized in the memory of an ECU
- to ensure that the software development results in the intended data structures
- to identify the proper interpolation routines

Via the SwDataDefProps, a record-layout can be associated to a data entity. If the very same serialization approach is used for multiple ApplicationDataTypes, all of these may refer to the same SwRecordLayout even if the size of the data is different.⌋

5.5.6.1 Specifying Record Layouts

As mentioned above, the purpose of record layout is to specify how an object (e.g. a calibration parameter) is serialized in memory of an ECU. The canonical approach for this is to define nested groups (SwRecordLayoutGroup).

These groups indicate the structure of the corresponding ImplementationDataType. The serialization is then executed by iterating over the axes of a curve, a map, or iterating along a string.

The contents of such a record layout group (SwRecordLayoutGroupContent) is a mixture of (thus nested) groups and values (SwRecordLayoutV).

These values refer to particular properties of the object (e.g. value, count, ...). By application of this pattern, the serialization of any complex object can be specified.

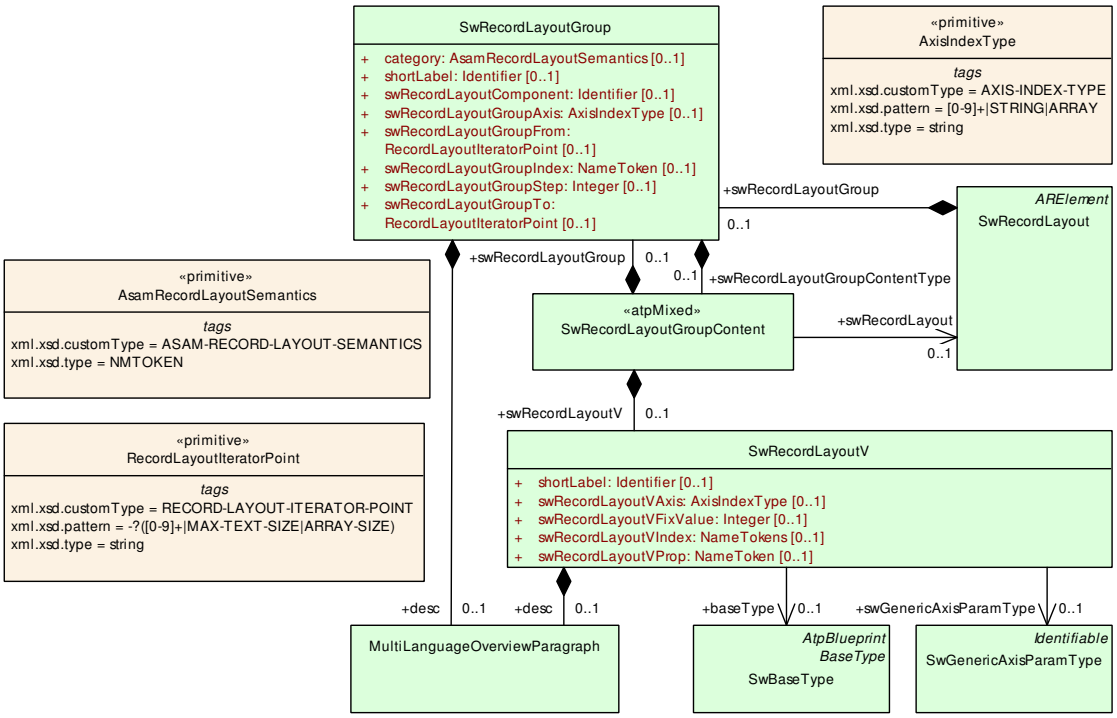

Figure 5.63: Specification of a record layout

Class	**SwRecordLayout**			
Note	Defines how the data objects (variables, calibration parameters etc.) are to be stored in the ECU memory. As an example, this definition specifies the sequence of axis points in the ECU memory. Iterations through axis values are stored within the sub-elements swRecordLayoutGroup. **Tags:** atp.recommendedPackage=SwRecordLayouts			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
swRecord LayoutGroup	SwRecordLayoutGroup	0..1	aggr	This is the top level record layout group. **Tags:** atp.Splitkey=swRecordLayoutGroup xml.roleElement=true xml.roleWrapperElement=false xml.sequenceOffset=20 xml.typeElement=false xml.typeWrapperElement=false

Table 5.98: SwRecordLayout

Class	**SwRecordLayoutV**
Note	This element specifies which values are stored for the current SwRecordLayoutGroup. If no baseType is present, the SwBaseType referenced initially in the parent SwRecordLayoutGroup is valid. The specification of swRecordLayoutVAxis gives the axis of the values which shall be stored in accordance with the current record layout SwRecordLayoutGroup. In swRecordLayoutVProp one can specify the information which shall be stored.
Base	*ARObject*
Aggregated by	SwRecordLayoutGroupContent.swRecordLayoutV

△

Class	**SwRecordLayoutV**			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
baseType	SwBaseType	0..1	ref	This association allows to refer to a base type in case a specific encoding is intended. If no base type is referred, the base type referenced initially in the corresponding DataPrototype is to be used. **Tags:** xml.sequenceOffset=30
desc	MultiLanguageOverview Paragraph	0..1	aggr	This aggregation allows for a brief description about the particular record layout value which can help to identify the entry. In-depth documentation should be added to the introduction of the surrounding record layout. **Tags:** xml.sequenceOffset=20
shortLabel	Identifier	0..1	attr	This attribute specifies a name which can be used e.g. when ECU code is generated from the record layout value. **Tags:** xml.sequenceOffset=3
swGenericAxis ParamType	SwGenericAxisParam Type	0..1	ref	This association supports the case that a value from a generic axis definition shall be stored. This value is denoted by a particular generic axis parameter type. **Tags:** xml.sequenceOffset=70
swRecord LayoutVAxis	AxisIndexType	0..1	attr	This attribute gives the index of the axis of which values that are stored in the record. swRecordVIndex refers to the symbolic names of the iterators for which the axis value shall be stored in the record. In case of nested iterators (mainly for multidimensional objects) the iterator names are specified as whitespace-separated names. These symbolic names relate to swRecordLayoutGroup Index. The iterators are processed from left to right in such a manner that they symbolize the loop index from the outside to the inside. It is considered an error if more components are specified than axes exist in the related ApplicationDataType. **Tags:** xml.sequenceOffset=40
swRecord LayoutVFix Value	Integer	0..1	attr	This attribute specifies the filler character for the current record layout, in the form of hex digits. It is also used to specify the fix value for e.g. FIXRIGHTDIFF. **Tags:** xml.sequenceOffset=80
swRecord LayoutVIndex	NameTokens	0..1	attr	The symbolic value for iteration, or the symbolic values separated by whitespaces, refer to the symbolic values given in swRecordLayoutGroupIndex . The iterators are processed from left to right, in such a manner that they symbolize the loop index from the outside to the inside. It is considered an error if the record layout is referenced by an entity which has less number of axes than index names referenced here. **Tags:** xml.sequenceOffset=60
swRecord LayoutVProp	NameToken	0..1	attr	This attribute describes the kind of values to be stored. More details see below. The standardized values foreseen for this attribute are defined in [TPS_SWCT_01489]. **Tags:** xml.sequenceOffset=50

Table 5.99: SwRecordLayoutV

Class	**SwRecordLayoutGroup**			
Note	Specifies how a record layout is set up. Using SwRecordLayoutGroup it recursively models iterations through axis values. The subelement swRecordLayoutGroupContentType may reference other Sw RecordLayouts, SwRecordLayoutVs and SwRecordLayoutGroups for the modeled record layout.			
Base	*ARObject*			
Aggregated by	SwRecordLayout.swRecordLayoutGroup, SwRecordLayoutGroupContent.swRecordLayoutGroup			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
category	AsamRecordLayout Semantics	0..1	attr	This attribute denotes the semantics in particular in terms of the corresponding A2L-Keyword. This is to support the mapping of the more general record layouts in AUTOSAR/ MSR to the specific A2l keywords. It is possible to express the specific semantics of A2l recordlayout keywords in swRecordlayoutGroup but not always vice versa. Therefore the mapping is provided in this optional attribute. **Tags:** xml.sequenceOffset=5
desc	MultiLanguageOverview Paragraph	0..1	aggr	This aggregation allows a brief description about the particular record layout group which can help to identify the entry. In-depth documentation should be added to the introduction of the surrounding record layout. **Tags:** atp.Splitkey=desc xml.sequenceOffset=20
shortLabel	Identifier	0..1	attr	This attribute specifies a name which can be used e.g. when ECU code is generated from the record layout group. **Tags:** xml.sequenceOffset=3
swGenericAxis ParamType	SwGenericAxisParam Type	0..1	ref	This association allows to specify record layout groups to iterate over generic axis parameters. For example, if the generic axis parameter is an array, the record layout group will iterate over this array. Obviously, the axis referred to by swRecordLayoutGroup Axis shall be a generic axis in which the referenced Sw GenericAxisType is aggregated. **Tags:** atp.Splitkey=swGenericAxisParamType xml.sequenceOffset=50
swRecord Layout Component	Identifier	0..1	attr	This attribute is used to denote the component to which the group in question applies. Thus, the record layout supports structured objects. This secures independence from the sequence of components, because they can be referred to via name. **Tags:** xml.sequenceOffset=90
swRecord LayoutGroup Axis	AxisIndexType	0..1	attr	This attribute specifies the iteration axis number for a Sw RecordLayoutGroup. The current record layout group then refers exactly to the axis with this number. This means that the values are taken by iterating along the thus referenced axis. **Tags:** xml.sequenceOffset=30
swRecord LayoutGroup ContentType	SwRecordLayoutGroup Content	0..1	aggr	This is the contents of the recordLayout which is produced for every step of iteration. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=100 xml.typeElement=false xml.typeWrapperElement=false



△

Class	SwRecordLayoutGroup			
swRecord LayoutGroup From	RecordLayoutIterator Point	0..1	attr	This attribute specifies the iterator index for the point in the axis from which a record layout group is commenced. Negative values are also possible, i.e. the value -4 counts from the fourth value from the end. If this property is missing, the iteration starts with '1'. **Tags:** xml.sequenceOffset=60
swRecord LayoutGroup Index	NameToken	0..1	attr	This attribute attributes a symbolic name to the iterator of the superimposed record layout group. This can be referenced as a loop index in contained SwRecordLayout V elements. **Tags:** xml.sequenceOffset=40
swRecord LayoutGroup Step	Integer	0..1	attr	This attribute specifies the step width for the iterator index that is used for the current record layout group. Note that negative values are also possible, in case of the starting point is higher than the endpoint. If the property is missing, the step width is "1". **Tags:** xml.sequenceOffset=80
swRecord LayoutGroupTo	RecordLayoutIterator Point	0..1	attr	This attribute specifies the end point for the iteration. Negative values are also possible, i.e. the value -4 counts up to the fourth value from the end. If this property is not there, the iteration ends at "-1" which is the last element. Note that depending on the arraySizeSemantics of Sw TextProps the iteration ends at the value specified in sw MaxTextSize. **Tags:** xml.sequenceOffset=70

Table 5.100: SwRecordLayoutGroup

Class	«atpMixed» **SwRecordLayoutGroupContent**			
Note	This is the contents of a RecordLayout which is inserted for every iteration. Note that since this is atp Mixed, multiple properties can be inserted for each iteration.			
Base	*ARObject*			
Aggregated by	SwRecordLayoutGroup.swRecordLayoutGroupContentType			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
swRecord Layout	SwRecordLayout	0..1	ref	This association allows to support reusable "sub"-record layouts. In particular, the contents of the referenced record layout shall be used as if the record layout group in the referenced record layout was aggregated in the current record layout group. So, semantically it would be equivalent to replace the particular association with an aggregation of the sw RecordLayoutGroup of the referenced SwRecordLayout. **Tags:** xml.sequenceOffset=110
swRecord LayoutGroup	SwRecordLayoutGroup	0..1	aggr	This aggregation provides support for nested iterations. For example, if a map is to be handled, then we might have two nested SwRecordLayoutGroups, one for the x-axis and one for the y-axis. The inner iteration runs faster. **Tags:** xml.sequenceOffset=130
swRecord LayoutV	SwRecordLayoutV	0..1	aggr	Particular Value specification for this record layout group. **Tags:** xml.sequenceOffset=120

Table 5.101: SwRecordLayoutGroupContent

For CURVE, MAP, etc., the iteration shall be performed along the input axis.

Primitive	**AxisIndexType**
Note	This meta-class specifies an axis in a curve/map data object. The index satisfies the following convention: • 0 output "axis" • 1 input axis 1 (X input axis e.g. of a CURVE) • 2 input axis 2 (Y input axis e.g. of a MAP) • 3 input axis 3 (Z input axis e.g. of a CUBOID) • 4 input axis 4 (Z4 input axis e.g. of a CUBE_4) • 5 input axis 5 (Z5 input axis e.g. of a CUBE_5) • 6..9 etc. The output "axis" provides access to the output value of the parameter. Note that this access is usually performed via an index according to the input axis. In addition to this, the Values STRING and ARRAY support specific iterations. **Tags:** xml.xsd.customType=AXIS-INDEX-TYPE xml.xsd.pattern=[0-9]+|STRING|ARRAY xml.xsd.type=string

Table 5.102: AxisIndexType

Primitive	**RecordLayoutIteratorPoint**
Note	This meta-class denotes a start / endpoint for the iteration of a SwRecordLayoutGroup. It can be an integer or one of the keywords MAX-TEXT-SIZE|ARRAY-SIZE. Note that negative numbers are counted backwards. Therefore e.g. -1 refers to the last value. **Tags:** xml.xsd.customType=RECORD-LAYOUT-ITERATOR-POINT xml.xsd.pattern=-?([0-9]+|MAX-TEXT-SIZE|ARRAY-SIZE) xml.xsd.type=string

Table 5.103: RecordLayoutIteratorPoint

[TPS_SWCT_01489] Description of standardized values of attribute SwRecordLayoutV.swRecordLayoutVProp ⌈

Property	Description
VALUE	The value of the axis for the current iterator point. This is e.g. the particular point on an input-axis, but also the particular character in a string.
COUNT	The amount of values of the axis.
LEFTDIFF	The difference to the previous axis point.
RIGHTDIFF	The difference to the next axis point.
DIST	The distance value of this axis in the case of a fixed axis with distance specification.
SHIFT	The shift value of this axis in the case of a fixed axis with shift/offset.
OFFSET	The offset value of this axis in the case of a fixed axis with shift/offset.
FILL	Fill with the hex value specified as contents of swRecordLayoutVFixValue.
RESERVED	Position shall be ignored by MCD tools.
IDENTIFIER	An “identifier” is deposited at the position.
FIXLEFTDIFF	Difference between this and a fixed left-hand value specified in swRecordLayoutVFixValue.
FIXRIGHTDIFF	Difference between this and a fixed right-hand value specified in swRecordLayoutVFixValue.

⌋

Figure 5.64 and Figure 5.65 illustrate most of these properties.

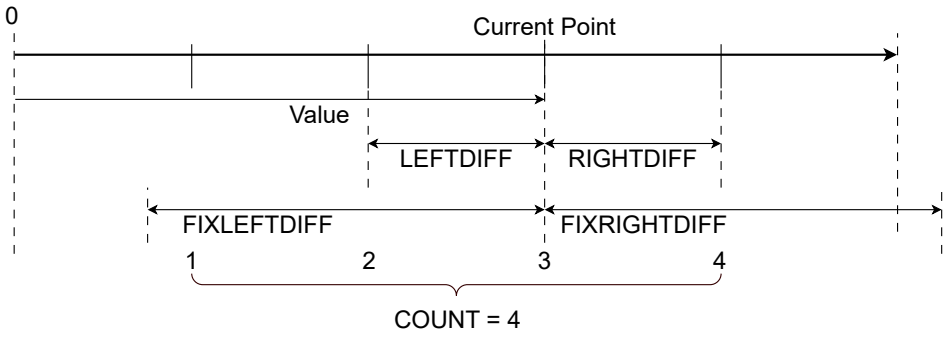

Figure 5.64: Values for `swRecordLayoutVProp` for individual axis

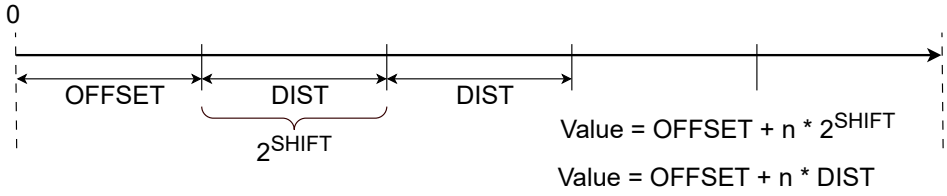

Figure 5.65: Values for `swRecordLayoutVProp` for fixed axis

[TPS_SWCT_01296] Different approaches of ASAM MCD-2MC and AUTOSAR with respect to `SwRecordLayout` ⌈ASAM MCD-2D specification (also known as A2L, or ASAP) uses keywords in record layouts where MSR/AUTOSAR uses the more generic approach specified here.

It may happen that this generic approach cannot always be safely mapped to the A2L keywords. Therefore, `SwRecordLayoutGroup.category` can assist the conversion to the current A2L format.⌋

Primitive	**AsamRecordLayoutSemantics**
Note	This meta-class is used to denote the semantics in particular in terms of the corresponding A2 L-Keyword. This is to support the mapping of the more general record layouts in AUTOSAR/MSR to the specific A2L keywords. It is possible to express the specific semantics of A2l RecordLayout keywords in SwRecordlayoutGroup but not always vice versa. Therefore the mapping is provided in this optional attribute. It is specified as NMTOKEN to reduce the direct dependency of ASAM an AUTOSAR standards. **Tags:** xml.xsd.customType=ASAM-RECORD-LAYOUT-SEMANTICS xml.xsd.type=NMTOKEN

Table 5.104: AsamRecordLayoutSemantics

The values of `SwRecordLayoutGroup.category` can, for example, be taken from the ASAM MCD 2D specification provided in [15, ASAM MCD 2MC]. Examples are:

- `INDEX_INCR`
- `INDEX_DECR`
- `COLUMN_DIR`

- ROW_DIR
- ALTERNATE_WITH_X
- ALTERNATE_WITH_Y
- ALTERNATE_CURVES

Note that there are keywords in A2L bound to a calibration parameter which in MSR/AUTOSAR are represented by the SwRecordLayout (DEPOSIT etc.).

Chapter B.2.4 presents an exemplary definition of a record layout of a curve.

5.5.6.2 RecordLayouts and DataTypes

[TPS_SWCT_01837] Types for record layouts ⌈Because ParameterDataPrototypes have a ≪isOfType≫-relation to ApplicationDataTypes or ImplementationDataTypes, the related data types shall properly match to the details as specified in swDataDefProps.⌋

This is exemplified in Figure 5.66.

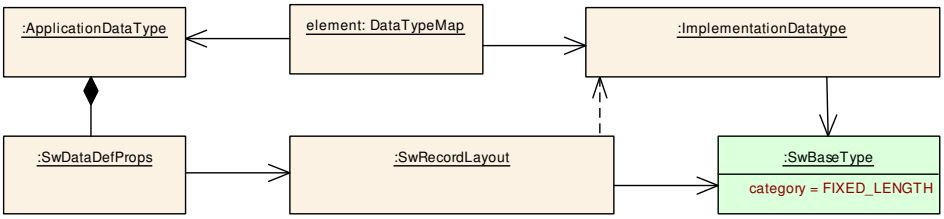

Figure 5.66: Dependency of AutosarDataTypes and SwRecordLayouts

[TPS_SWCT_01297] Compliance of meta-class ApplicationDataType or ImplementationDataType to swDataDefProps ⌈To maintain this compliance, the following options exist:

- Manually create ImplementationDataTypes from corresponding ApplicationDataTypes and the referenced SwRecordLayouts
- Automatically create ImplementationDataTypes according to the existing definition of SwRecordLayouts. This could be performed by a model transformation according to the algorithm shown below.

⌋

[TPS_SWCT_01298] Computing SwRecordLayout from ImplementationDataTypes is not possible ⌈Computing SwRecordLayouts from ImplementationDataTypes is not really possible because the particular semantics of the components are not available (swRecordLayoutVProp).⌋

[TPS_SWCT_01299] Relation of `swRecordLayoutGroup` to `subElement` ⌈For each `swRecordLayoutGroup` an appropriate `subElement` shall be created.

The algorithm shall be recursively applied to the newly created `ImplementationDataTypeElement`s. As the record layout groups are nested, this recursion yields the complete structure in the `ImplementationDataType`.⌋

Example definitions of record layouts can be found in Chapter B.2.3.

5.5.6.3 Record Layouts and Interpolation Routines

[TPS_SWCT_01300] Relationship between record layouts and interpolation routines ⌈The relationship between record layouts and interpolation routines can be specified in `InterpolationRoutineMappingSet`.

The interpolation routine is represented as `BswModuleEntry` and implements a particular interpolation method which is denoted in the value of `InterpolationRoutine.shortLabel`.

The intended interpolation method is denoted in the value of attribute `SwDataDefProps.swInterpolationMethod`.⌋

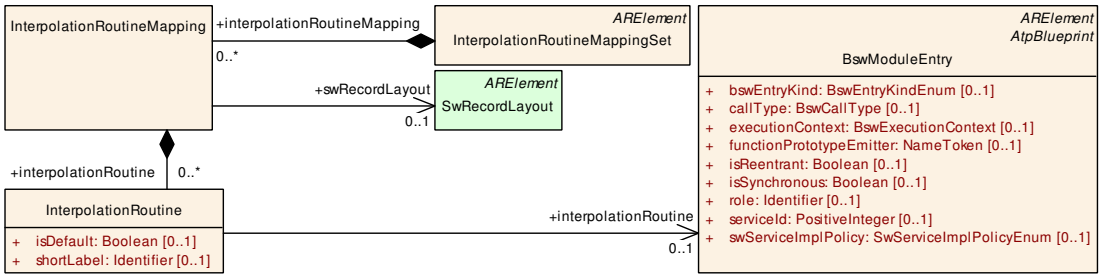

Figure 5.67: Mapping of Record Layouts and Interpolation Routines

Class	**InterpolationRoutineMappingSet**			
Note	This meta-class specifies a set of interpolation routine mappings. **Tags:** atp.recommendedPackage=InterpolationRoutineMappingSets			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
interpolation Routine Mapping	InterpolationRoutine Mapping	*	aggr	This specifies one particular mapping of recordlayout and its matching interpolationRoutines. **Tags:** atp.Splitkey=interpolationRoutineMapping

Table 5.105: InterpolationRoutineMappingSet

Class	InterpolationRoutineMapping			
Note	This meta-class provides a mapping between one record layout and its matching interpolation routines. This allows to formally specify the semantics of the interpolation routines. The use case is such that the curves/Maps define an interpolation method. This mapping table specifies which interpolation routine implements methods for a particular record layout. Using this information, the implementer of a software-component can select the appropriate interpolation routine.			
Base	*ARObject*			
Aggregated by	InterpolationRoutineMappingSet.interpolationRoutineMapping			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
interpolation Routine	InterpolationRoutine	*	aggr	This is one particular interpolation routine which is mapped to the record layout. **Tags:** atp.Splitkey=interpolationRoutine
swRecord Layout	SwRecordLayout	0..1	ref	This refers to the record layout which is mapped to interpolation routines. **Tags:** atp.Splitkey=swRecordLayout

Table 5.106: InterpolationRoutineMapping

Class	InterpolationRoutine			
Note	This represents an interpolation routine taken to evaluate the contents of a curve or map against a specific input value.			
Base	*ARObject*			
Aggregated by	InterpolationRoutineMapping.interpolationRoutine			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
interpolation Routine	BswModuleEntry	0..1	ref	This specifies a BswModuleEntry which implements the current interpolation method for the given record layout. **Tags:** atp.Splitkey=interpolationRoutine xml.sequenceOffset=30 This Attribute is only used by the AUTOSAR Classic Platform.
isDefault	Boolean	0..1	attr	This attribute specifies whether the enclosing InterpolationRoutine is considered the default in the context (defined by the System Template) of a given collection InterpolationRoutineMapping that owns the enclosing InterpolationRoutine. **Tags:** xml.sequenceOffset=20
shortLabel	Identifier	0..1	attr	This is the name of the interpolation method which is implemented by the referenced bswModuleEntry. It corresponds to swInterpolationMethod in SwDataDef Props. **Tags:** xml.sequenceOffset=10

Table 5.107: InterpolationRoutine

5.5.6.4 Design Record Layouts

The definition of a `SwRecordLayout` can be a challenging task. The following list of hints can be used as a guideline to design a `SwRecordLayout`.

Starting Point in project In most cases, the memory layout in the ECU is known and therefore the underlying `SwRecordLayout` too. If this is not the case,

then the SwRecordLayout needs to be specified, as described in Chapter 5.5.6.1. In this context, the SwRecordLayoutGroups define the structure of the ImplementationDataTypes.

Initial decision To elicit suitable interpolation routines, it needs to be decided whether a curve, a map, and/or common axes shall be used. Based on this decision the iteration over the axes can be executed to achieve the serialization. Via a reference to a dedicated BswModuleEntry, the interpolation routine for the given record layout is provided. In addition, memory optimization needs to be taken into account by choosing the intended data structure.

Solve physical aspects (Calibration) To serve the measurement and calibration system, physical aspects shall be solved. For example, a torque field (which is two-dimensional) requires a map. The resolution of the input axis values or map value (8, 16 bit) defines the applied data type.

Refinement of used algorithm To improve the design of the SwRecordLayout a refinement of the used algorithm is achievable by an iterative approach of the above described steps. For example, it can result in the use of common axes.

5.5.6.5 Recipes for Record Layouts

In this chapter, recipes for certain record layouts are provided. These recipes can be used as a starting point for the design of record layouts.

The idea is that record layouts that describe simple data structures can be used as building blocks for more complex data structures.

5.5.6.5.1 Record Layout for scalar Value

A scalar value (more formally, an AutosarDataPrototype of category VALUE) is represented by a SwRecordLayoutGroup with a single SwRecordLayoutV as content.

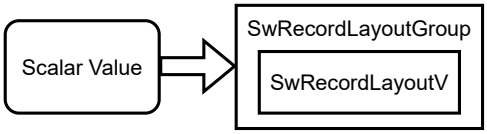

Figure 5.68: Record layout of a scalar value

5.5.6.5.2 Record Layout for one-dimensional Array

A one-dimensional array (more formally, an AutosarDataPrototype of category ARRAY with one dimension) is represented by a SwRecordLayoutGroup with a single SwRecordLayoutV as content.

The SwRecordLayoutV describes the properties of the array elements. The SwRecordLayoutGroup describes the properties of the array itself.

This means in particular that the SwRecordLayoutGroup defines iterator properties through attributes swRecordLayoutGroupFrom and swRecordLayoutGroupTo.

This is the difference to the record layout of a scalar value where no iteration is required.

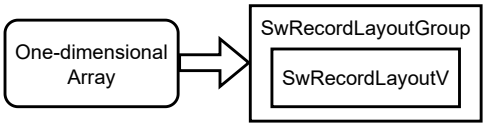

Figure 5.69: Record layout of a one-dimensional array

5.5.6.5.3 Record Layout for two-dimensional Array

A two-dimensional array (more formally, an AutosarDataPrototype of category ARRAY with two dimensions) is represented by a SwRecordLayoutGroup with a single SwRecordLayoutGroup as content.

The inner SwRecordLayoutGroup describes the properties of the array elements through an SwRecordLayoutV. The outer SwRecordLayoutGroup describes the properties of the array itself.

Both the outer and the inner SwRecordLayoutGroup define iterator properties through attributes swRecordLayoutGroupFrom and swRecordLayoutGroupTo.

The difference between the two is that the outer SwRecordLayoutGroup defines the iteration along the first axis and the inner SwRecordLayoutGroup defines the iteration along the second axis.

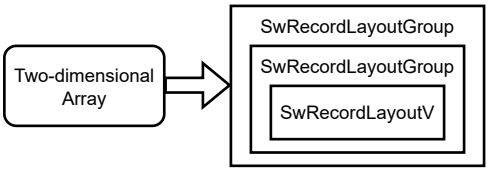

Figure 5.70: Record layout of a two-dimensional array

5.5.6.5.4 Record Layout for an Axis

The SwRecordLayout for an AutosarDataPrototype of category STD_AXIS, COM_AXIS, or RES_AXIS is represented by a SwRecordLayoutGroup. The content of the SwRecordLayoutGroup depends on the intended memory layout.

If the number of sampling points is stored separately from the array of sampling points, then the SwRecordLayoutGroup contains a SwRecordLayoutV and a SwRecordLayoutGroup.

The SwRecordLayoutV describes the properties of the number of sampling points and the SwRecordLayoutGroup describes the properties of the array of sampling points by aggregating another SwRecordLayoutV which describes the properties of the sampling points.

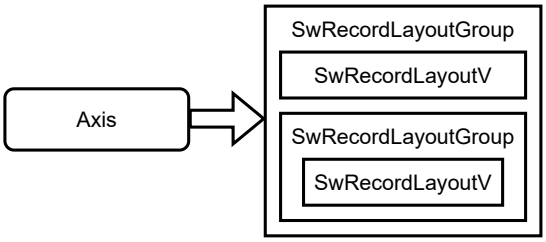

Figure 5.71: Record layout of an axis with separate storage of the number of sampling points and the array of sampling points

Such a layout represents the typical case, but there are also cases where the number of sampling points is not stored separately from the array of sampling points.

In this case, the SwRecordLayoutGroup contains only a SwRecordLayoutV which describes the properties of the array of sampling points, where the first element of the array typically contains the number of sampling points.

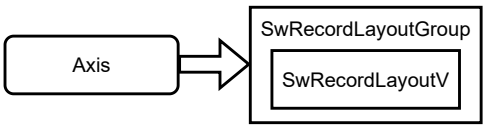

Figure 5.72: Record layout of an axis with the number of sampling points stored in the first element of the array

In other words, this case is more or less identical to the SwRecordLayout for a one-dimensional array.

For the sake of completeness, it is possible to define axes where the sampling points are not stored, but computed on the fly. In this case, the SwRecordLayoutGroup contains e.g. three SwRecordLayoutVs which describe the properties of the axis (Example: number of axis points, offset, shift).

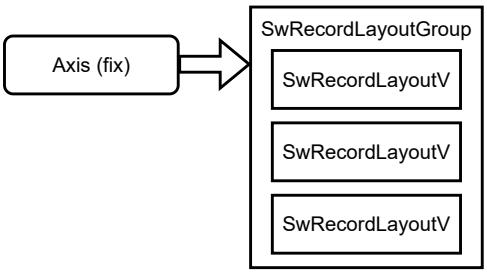

Figure 5.73: Record layout of an axis with computed sampling points

5.5.6.5.5 Record Layout for a Curve

The record layout of an AutosarDataPrototype of category CURVE with integrated axis consists of the record layout of the axis (see Chapter 5.5.6.5.4) and the record layout of the value array which is typically a one-dimensional array (see Chapter 5.5.6.5.2).

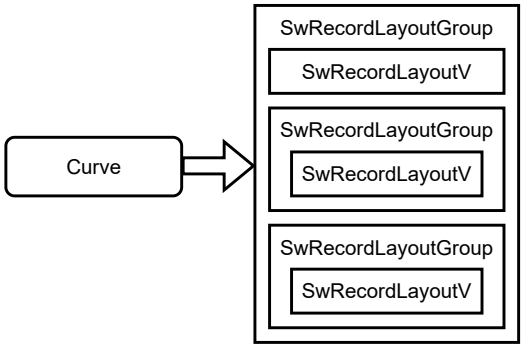

Figure 5.74: Record layout of an AutosarDataPrototype of category CURVE with integrated axis

If the AutosarDataPrototype of category CURVE is using a common axis, then the record layout only consists of the record layout of the value array which is typically a one-dimensional array (see Chapter 5.5.6.5.2).

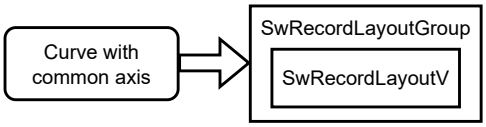

Figure 5.75: Record layout of an AutosarDataPrototype of category CURVE with common axis

5.5.6.5.6 Record Layout for a Map

The record layout of an AutosarDataPrototype of category MAP with integrated axes consists of

- the record layout of the first axis,
- the record layout of the second axis, and
- the record layout of the value array which is typically a two-dimensional array (see Chapter 5.5.6.5.3).

In this case (and as depicted in Figure 5.76), the number of axis points for the two dimensions appears first in the record layout, followed by

- the array of axis points for the first axis,
- the array of axis points for the second axis, and finally

- the two-dimensional array of values (see Chapter 5.5.6.5.3).

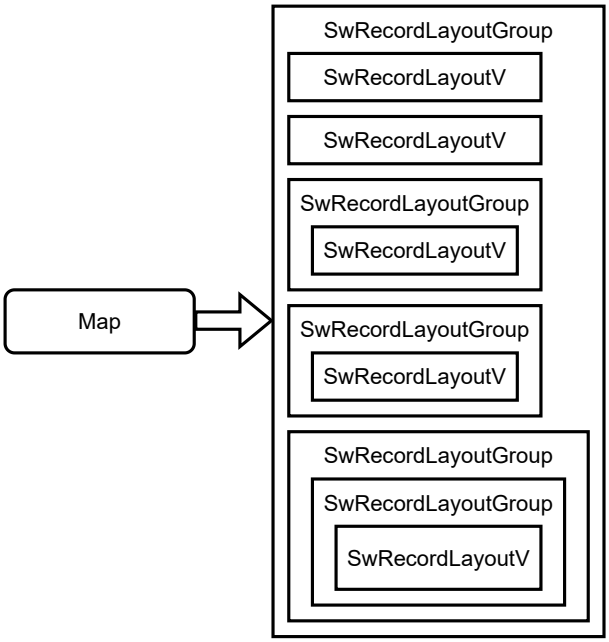

Figure 5.76: Record layout of an `AutosarDataPrototype` of `category` `MAP` with integrated axis

If an `AutosarDataPrototype` of `category` `MAP` is using common axes, then the record layout only consists of the record layout of the value array which is typically a two-dimensional array (see Chapter 5.5.6.5.3).

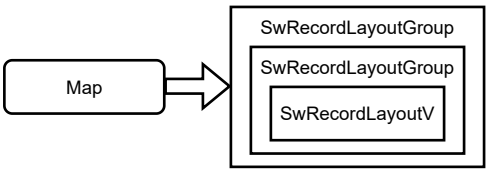

Figure 5.77: Record layout of an `AutosarDataPrototype` of `category` `MAP` with common axes

5.5.6.5.7 Record Layout for a Cuboid

The record layout of an `AutosarDataPrototype` of `category` `CUBOID` with integrated axes consists of

- the record layout of the first axis,
- the record layout of the second axis,
- the record layout of the third axis, and then
- the record layout of the value array which is typically a three-dimensional array.

The pattern already described in Chapter 5.5.6.5.6 is applied here as well. The number of axis points for the three dimensions appears first in the record layout, followed by

- the array of axis points for the first axis,
- the array of axis points for the second axis,
- the array of axis points for the third axis, and finally
- the three-dimensional array of values.

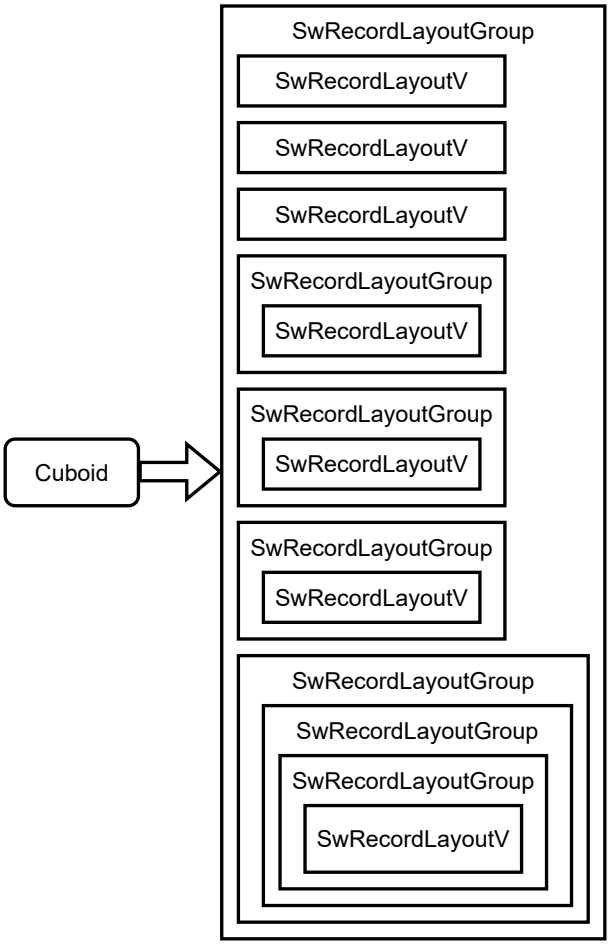

Figure 5.78: Record layout of an `AutosarDataPrototype` of `category CUBOID` with integrated axis

Of course, it is also possible to define an `AutosarDataPrototype` of `category CUBOID` with common axes. In this case, the record layout only consists of the record layout of the value array which is typically a three-dimensional array.

5.5.6.5.8 Record Layout for a Cube_4

The record layout of an `AutosarDataPrototype` of `category CUBE_4` with integrated axes consists of

- the record layout of the first axis,
- the record layout of the second axis,
- the record layout of the third axis,
- the record layout of the fourth axis, and then
- the record layout of the value array which is typically a four-dimensional array.

The pattern already described in Chapter 5.5.6.5.7 is applied here as well. The number of axis points for the four dimensions appears first in the record layout, followed by

- the array of axis points for the first axis,
- the array of axis points for the second axis,
- the array of axis points for the third axis,
- the array of axis points for the fourth axis, and finally
- the four-dimensional array of values.

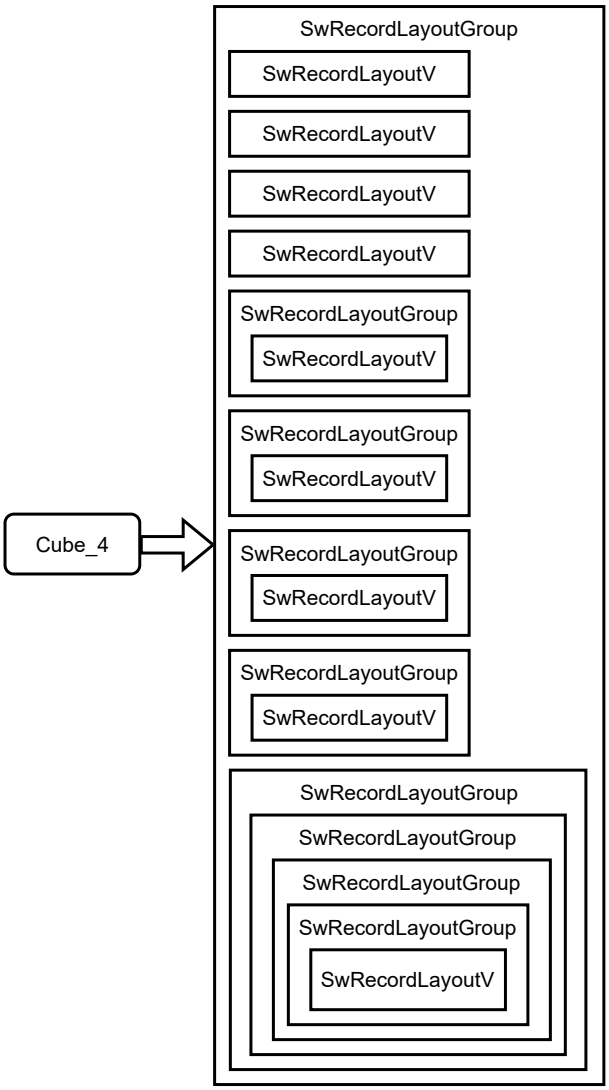

Figure 5.79: Record layout of an `AutosarDataPrototype` of `category CUBE_4` with integrated axis

Of course, it is also possible to define an `AutosarDataPrototype` of `category CUBE_4` with common axes. In this case, the record layout only consists of the record layout of the value array which is typically a four-dimensional array.

5.5.6.5.9 Record Layout for a Cube_5

The record layout of an `AutosarDataPrototype` of `category CUBE_5` with integrated axes consists of

- the record layout of the first axis,
- the record layout of the second axis,
- the record layout of the third axis,
- the record layout of the fourth axis,

- the record layout of the fifth axis, and then
- the record layout of the value array which is typically a five-dimensional array.

The pattern already described in Chapter 5.5.6.5.7 is applied here as well. The number of axis points for the five dimensions appears first in the record layout, followed by

- the array of axis points for the first axis,
- the array of axis points for the second axis,
- the array of axis points for the third axis,
- the array of axis points for the fourth axis,
- the array of axis points for the fifth axis, and finally
- the five-dimensional array of values.

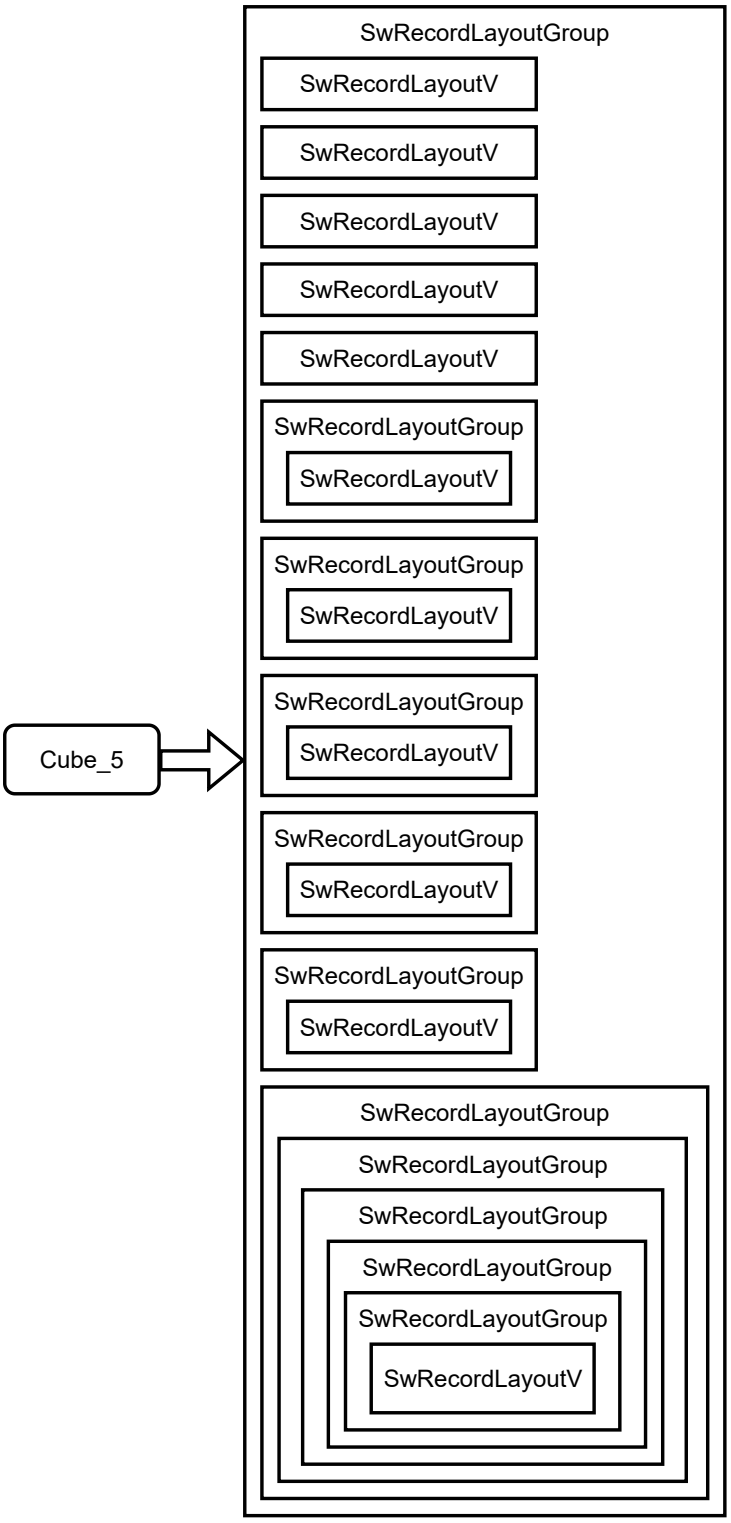

Figure 5.80: Record layout of an `AutosarDataPrototype` of `category CUBE_5` with integrated axis

Of course, it is also possible to define an `AutosarDataPrototype` of `category CUBE_5` with common axes. In this case, the record layout only consists of the record layout of the value array which is typically a five-dimensional array.

5.5.7 Display Presentation

[TPS_SWCT_01756] Semantics of SwDataDefProps.displayPresentation
⌈The attribute SwDataDefProps.displayPresentation is used to control the presentation of data within measurement and calibration tools.

When such a tool displays a series of measurement values, it is useful to indicate to the displaying tool whether the series of measurement values can be seen as a continuous graph or as a set of discrete values, i.e. step-wise.

For instance, a continuous graph is appropriate for the case that the values do not bounce arbitrarily within one measurement cycle, e.g. a temperature variable.⌋

On the other hand, a discrete handling is correct if each value of the measured variable has a distinct meaning and therefore may arbitrarily change within one measurement cycle, e.g. a state variable.

Another use case is the indication of how an ECU utilizes a DataPrototype of category CURVE, MAP, or CUBOID to determine a single value out of one or several working points in the axes.

This can be done either via interpolation between the sampling points on each axis or without interpolation by taking the nearest sampling point.

The first option requires the continuous representation for the determined value in the displaying tool whereas the second option expects a discrete handling of the determined value.

[constr_1592] Definition of SwDataDefProps.displayPresentation depending on the capabilities of the data type

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The definition of a SwDataDefProps.displayPresentation according to [constr_1288] and [constr_1289] shall only be applied for a DataPrototype of category ARRAY if the corresponding ApplicationArrayDataType or ImplementationDataType of category ARRAY supports the specification of a SwDataDefProps.displayPresentation.⌋

[constr_1602] Definition of SwDataDefProps.displayPresentation depending on the capabilities of the element

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The definition of a SwDataDefProps.displayPresentation according to [constr_1007] and [constr_1009] is only supported for an ApplicationArrayDataType or an ImplementationDataType of category ARRAY if the aggregated ApplicationArrayDataType.element or ImplementationDataType.subElement also supports the specification of a SwDataDefProps.displayPresentation.⌋

[TPS_SWCT_01757] Not-applicable scenario for `presentationContinuous` ⌈If the semantics of the `DataPrototype` is described through a `CompuMethod` of `category` `TEXTTABLE`, `BITFIELD_TEXTTABLE` or `TAB_NOINTP` the option to set attribute `displayPresentation` is meaningless because the step-wise change of data is an intrinsic property of the data object.⌋

[TPS_SWCT_01758] Applicable value range of `SwDataDefProps.displayPresentation` ⌈If the semantics of a `DataPrototype` is described through a `CompuMethod` of `category` `IDENTICAL`, `LINEAR`, `RAT_FUNC` the attribute `SwDataDefProps.displayPresentation` describes the presentation of data for the complete value range.

If the semantics of a `DataPrototype` is described through a `CompuMethod` of `category` `SCALE_LINEAR_AND_TEXTTABLE` or `SCALE_RATIONAL_AND_TEXTTABLE` the attribute `SwDataDefProps.displayPresentation` describes the presentation of data only for the value range outside the `TEXTTABLE` values.⌋

Enumeration	**DisplayPresentationEnum**
Note	This meta-class represents the ability to provide values for controlling the presentation of data within measurement and calibration tools.
Aggregated by	SwDataDefProps.displayPresentation
Literal	***Description***
presentation Continuous	The presentation of data shall form a continuous graph between data points. **Tags:** atp.EnumerationLiteralIndex=0
presentation Discrete	The presentation of data shall be step-shaped between data points. **Tags:** atp.EnumerationLiteralIndex=1

Table 5.108: DisplayPresentationEnum

5.6 Specification of Constant Values

5.6.1 Overview

[TPS_SWCT_01177] Assignment of constant values ⌈Constant values can be assigned to a meta-class by aggregating the meta-class `ValueSpecification`. This aggregation can be used in two ways:

1. by referencing a reusable `ConstantSpecification` which contains another `ValueSpecification`
2. or through an inline aggregation of a value specification of various kind.

⌋

Class	ConstantSpecification			
Note	Specification of a constant that can be part of a package, i.e. it can be defined stand-alone. **Tags:** atp.recommendedPackage=ConstantSpecifications			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
valueSpec	ValueSpecification	0..1	aggr	Specification of an expression leading to a value for this constant. **Tags:** atp.Splitkey=valueSpec

Table 5.109: ConstantSpecification

[constr_1917] Existence of `ConstantSpecification.valueSpec`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈For each `ConstantSpecification`, the aggregation of `ValueSpecification` in the role `valueSpec` shall exist.⌋

Class	*ValueSpecification* (abstract)			
Note	Base class for expressions leading to a value which can be used to initialize a data object.			
Base	*ARObject*			
Subclasses	*AbstractRuleBasedValueSpecification*, ApplicationValueSpecification, *CompositeValueSpecification*, ConstantReference, NotAvailableValueSpecification, NumericalValueSpecification, ReferenceValue Specification, TextValueSpecification			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, ConstantSpecification.valueSpec, CryptoService Key.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElement Condition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.init Value, ISignal.initValue, ISignal.timeoutSubstitutionValue, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, Nv ProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInitValue, NvRequireComSpec.init Value, ParameterDataPrototype.initValue, ParameterProvideComSpec.initValue, ParameterRequireCom Spec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, Port DefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalidValue, VariableData Prototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
shortLabel	Identifier	0..1	attr	This can be used to identify particular value specifications for human readers, for example elements of a record type.

Table 5.110: ValueSpecification

Class	*CompositeValueSpecification* (abstract)
Note	This abstract meta-class acts a base class for ValueSpecifications that have a composite form.
Base	*ARObject*, *ValueSpecification*
Subclasses	ArrayValueSpecification, RecordValueSpecification

▽

△

Class	**CompositeValueSpecification** (abstract)			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, CompositeRuleBasedValueSpecification.argument, Constant Specification.valueSpec, CryptoServiceKey.developmentValue, DiagnosticEnvDataCondition.compare Value, DiagnosticEnvDataElementCondition.compareValue, DiagnosticEnvSovdDataCondition.compare Value, FieldSenderComSpec.initValue, ISignal.initValue, ISignal.timeoutSubstitutionValue, Nonqueued ReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, Nonqueued SenderComSpec.initValue, NvProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInit Value, NvRequireComSpec.initValue, ParameterDataPrototype.initValue, ParameterProvideComSpec.init Value, ParameterRequireComSpec.initValue, PersistencyDataRequiredComSpec.initValue, Persistency KeyValuePair.initValue, PortDefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, Record ValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalid Value, VariableDataPrototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 5.111: CompositeValueSpecification

Class	**ArrayValueSpecification**			
Note	Specifies the values for an array.			
Base	*ARObject*, *CompositeValueSpecification*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, CompositeRuleBasedValueSpecification.argument, Constant Specification.valueSpec, CryptoServiceKey.developmentValue, DiagnosticEnvDataCondition.compare Value, DiagnosticEnvDataElementCondition.compareValue, DiagnosticEnvSovdDataCondition.compare Value, FieldSenderComSpec.initValue, ISignal.initValue, ISignal.timeoutSubstitutionValue, Nonqueued ReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, Nonqueued SenderComSpec.initValue, NvProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInit Value, NvRequireComSpec.initValue, ParameterDataPrototype.initValue, ParameterProvideComSpec.init Value, ParameterRequireComSpec.initValue, PersistencyDataRequiredComSpec.initValue, Persistency KeyValuePair.initValue, PortDefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, Record ValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalid Value, VariableDataPrototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
element (ordered)	ValueSpecification	*	aggr	The value for a single array element. All Value Specifications aggregated by ArrayValueSpecification shall have the same structure. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
intendedPartial Initialization Count	PositiveInteger	0..1	attr	This attribute shall only have a meaning for dynamic arrays and shall be taken as a sanity check: the number filled in the attribute shall be identical to the number of ArrayValueSpecification.element. If the attribute does not exist it means that no partial initialization is intended.

Table 5.112: ArrayValueSpecification

Class	RecordValueSpecification			
Note	Specifies the values for a record.			
Base	*ARObject*, *CompositeValueSpecification*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, CompositeRuleBasedValueSpecification.argument, Constant Specification.valueSpec, CryptoServiceKey.developmentValue, DiagnosticEnvDataCondition.compare Value, DiagnosticEnvDataElementCondition.compareValue, DiagnosticEnvSovdDataCondition.compare Value, FieldSenderComSpec.initValue, ISignal.initValue, ISignal.timeoutSubstitutionValue, Nonqueued ReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, Nonqueued SenderComSpec.initValue, NvProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInit Value, NvRequireComSpec.initValue, ParameterDataPrototype.initValue, ParameterProvideComSpec.init Value, ParameterRequireComSpec.initValue, PersistencyDataRequiredComSpec.initValue, Persistency KeyValuePair.initValue, PortDefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, Record ValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalid Value, VariableDataPrototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
field (ordered)	ValueSpecification	*	aggr	The value for a single record field. This could also be mapped explicitly to a record element of the data type using the shortName of the ValueSpecification. But this would introduce a relationship to the data type that is too strong. As of now, it is only important that the structure of the data type matches the structure of the Value Specification independently of the shortNames. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 5.113: RecordValueSpecification

[constr_1918] Existence of `RecordValueSpecification.field`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈For each `RecordValueSpecification`, the aggregation of meta-class `Value-Specification` in the role `field` shall exist.⌋

Class	TextValueSpecification			
Note	The purpose of TextValueSpecification is to define the labels that correspond to enumeration values.			
Base	*ARObject*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, ConstantSpecification.valueSpec, CryptoService Key.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElement Condition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.init Value, ISignal.initValue, ISignal.timeoutSubstitutionValue, MetaDataItem.metaDataItemType, Nonqueued ReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, Nonqueued SenderComSpec.initValue, NvProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInit Value, NvRequireComSpec.initValue, ParameterDataPrototype.initValue, ParameterProvideComSpec.init Value, ParameterRequireComSpec.initValue, PersistencyDataRequiredComSpec.initValue, Persistency KeyValuePair.initValue, PortDefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, Record ValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalid Value, VariableDataPrototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**

▽

△

Class	TextValueSpecification			
value	VerbatimString	0..1	attr	This is the value itself. Note that vt uses the | operator to separate the values for the different bitfield masks in case that the semantics of the related DataPrototype is described by means of a BITFIELD_TEXTTABLE in the associated CompuMethod.

Table 5.114: TextValueSpecification

[constr_1919] Existence of TextValueSpecification.value

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each TextValueSpecification, attribute value shall exist.⌋

Class	NumericalValueSpecification			
Note	A numerical ValueSpecification which is intended to be assigned to a Primitive data element. Note that the numerical value is a variant, it can be computed by a formula.			
Base	*ARObject*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, ConstantSpecification.valueSpec, CryptoService Key.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElement Condition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.init Value, ISignal.initValue, ISignal.timeoutSubstitutionValue, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, Nv ProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInitValue, NvRequireComSpec.init Value, ParameterDataPrototype.initValue, ParameterProvideComSpec.initValue, ParameterRequireCom Spec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, Port DefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalidValue, VariableData Prototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
value	Numerical	0..1	attr	This is the value itself. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 5.115: NumericalValueSpecification

[constr_1920] Existence of NumericalValueSpecification.value

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each NumericalValueSpecification, attribute value shall exist.⌋

Class	ReferenceValueSpecification			
Note	Specifies a reference to a data prototype to be used as an initial value for a pointer in the software.			
Base	*ARObject*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, ConstantSpecification.valueSpec, CryptoService Key.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElement Condition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.init Value, ISignal.initValue, ISignal.timeoutSubstitutionValue, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, Nv ProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInitValue, NvRequireComSpec.init Value, ParameterDataPrototype.initValue, ParameterProvideComSpec.initValue, ParameterRequireCom Spec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, Port DefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalidValue, VariableData Prototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
referenceValue	DataPrototype	0..1	ref	The referenced data prototype. **Tags:** atp.Splitkey=referenceValue

Table 5.116: ReferenceValueSpecification

[constr_1921] Existence of ReferenceValueSpecification.referenceValue

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each ReferenceValueSpecification, attribute referenceValue shall exist.⌋

Figure 5.81 shows the specialized subclasses of ValueSpecification which allow defining values for different use cases.

[TPS_SWCT_01178] Specialized subclasses of ValueSpecification ⌈The use case for specialized subclasses of ValueSpecification is:

- Reference to a constant (which is actually a reusable value specification) through a ConstantReference.
- TextValueSpecification
- NumericalValueSpecification
- ArrayValueSpecification
- RecordValueSpecification
- ApplicationValueSpecification: this shall (see [constr_10439]) be used to specify the value of Compound Primitive Data Types (see [TPS_SWCT_01179]) such as curves and maps. It is also possible to use this in general (e.g. for a primitive calibration value) for the specification of a value of a DataPrototype typed by an ApplicationDataType.

  Note that ApplicationValueSpecification is modeled after the example of [31, ASAM CDF].

- Reference to a DataPrototype: this can be used to describe initial values for pointer variables in the basic software. One use case is the exchange of data descriptions used to access calibration data for software emulation methods (see [6, TPS BSW Module Description Template] for details).
- ApplicationRuleBasedValueSpecification, inside an ArrayValueSpecification, see [constr_1779].
- NumericalRuleBasedValueSpecification, inside an ArrayValueSpecification, see [constr_1779].
- CompositeRuleBasedValueSpecification, inside an ArrayValueSpecification, see [constr_1779].

⌋

It is important to understand that although the name of the meta-class TextValueSpecification suggests that it is the preferred way for the definition of an invalidValue or initValue of a VariableDataPrototype/ParameterDataPrototype typed by an ApplicationPrimitiveDataType of category STRING, the TextValueSpecification actually has a different purpose (as defined by [constr_1284]).

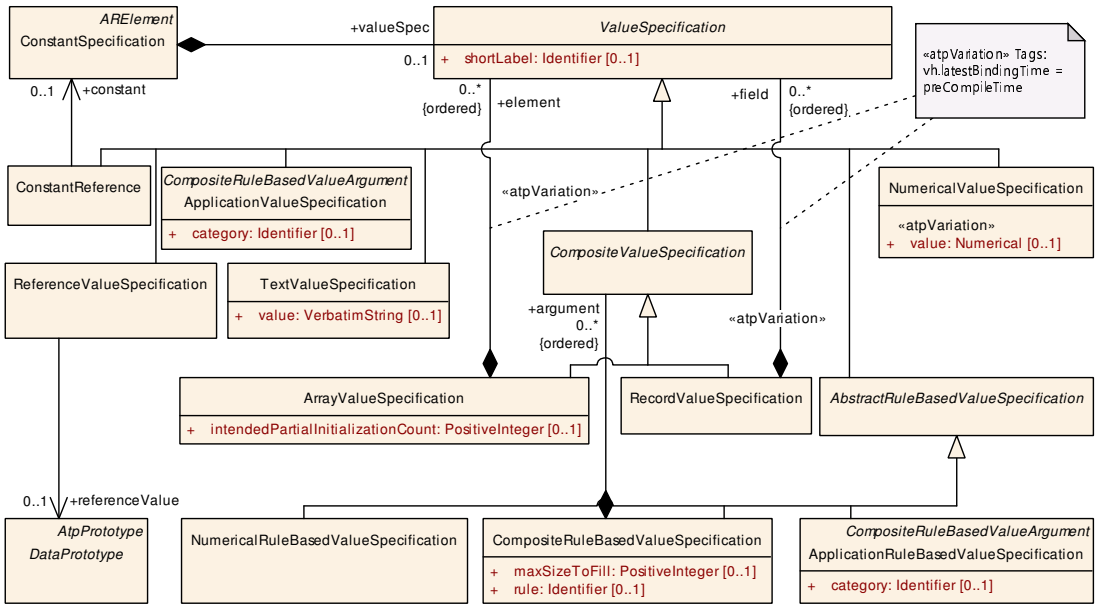

Figure 5.81: Summary of ValueSpecification

[constr_1284] Limitation of the use of TextValueSpecification

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈TextValueSpecification shall **only** be used in the context of an AutosarDataType that references a CompuMethod in the role ImplementationDataType.swDataDefProps.compuMethod of category TEXTTABLE and BITFIELD_TEXTTABLE.⌋

In other words, the purpose of TextValueSpecification is to define the labels that correspond to enumeration values.

The constraints [constr_1225] and [constr_1284] correspond to each other such that [constr_1225] demands the usage of TextValueSpecification for the definition of labels for enumeration values while [constr_1284] says that the definition of labels for enumeration values is the only use case for TextValueSpecification.

Note that ValueSpecification does not inherit from any data type. This would cause a redundancy[22] in the meta-model since the intended data type of a given ValueSpecification is already determined by the context in which it is aggregated.

Nonetheless, the intended data type imposes a certain constraint on the content of a ValueSpecification:

[TPS_SWCT_01838] ValueSpecification shall fit into data type ⌈An instance of ValueSpecification which is used to assign a value to a software object typed by an AutosarDataType shall fit into this AutosarDataType without losing information.⌋

For example, it is not allowed to assign the numerical value “1.5” as initial value to a data prototype typed by an ImplementationDataType which has an integer base type.

[constr_1271] RecordValueSpecification.fields shall be identical to the number of ApplicationRecordDataType.elements

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The initialization of a DataPrototype typed by an ApplicationRecordDataType through a RecordValueSpecification shall exactly match the structure of the ApplicationRecordDataType.

For this reason, it is required that the number of RecordValueSpecification.fields shall be identical to the number of ApplicationRecordDataType.elements.⌋

[constr_1272] RecordValueSpecification.fields shall be identical to the number of subElements of ImplementationDataType of category STRUCTURE

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The initialization of an DataPrototype typed by an ImplementationDataType of category STRUCTURE through a RecordValueSpecification shall exactly match the structure of the ImplementationDataType of category STRUCTURE.

For this reason, it is required that the number of RecordValueSpecification.fields shall be identical to the number of ImplementationDataType.subElements.⌋

[22] For example, “1” can be taken as a constant value for many data types. If the ValueSpecification were instead referring to a specific AutosarDataType it would be necessary to define a “1” for every single AutosarDataType this value is intended to be used in combination with.

If the corresponding ApplicationRecordElement is typed by an ApplicationRecordDataType, then the comparison of structural compliance between ApplicationRecordDataType and ValueSpecification shall continue beyond the encountered NotAvailableValueSpecification.

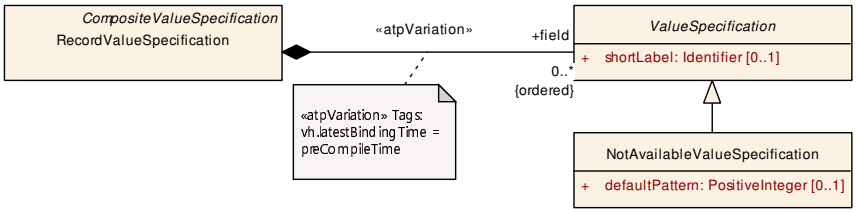

Figure 5.82: Modeling of NotAvailableValueSpecification

Class	**NotAvailableValueSpecification**			
Note	This meta-class provides the ability to specify a ValueSpecification to state that the respective element is not available. This ability is needed to support the existence of ApplicationRecordElements where attribute isOptional ist set to the value true.			
Base	*ARObject*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, ConstantSpecification.valueSpec, CryptoService Key.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElement Condition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.init Value, ISignal.initValue, ISignal.timeoutSubstitutionValue, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, Nv ProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInitValue, NvRequireComSpec.init Value, ParameterDataPrototype.initValue, ParameterProvideComSpec.initValue, ParameterRequireCom Spec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, Port DefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalidValue, VariableData Prototype.initValue			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
defaultPattern	PositiveInteger	0..1	attr	The content of this attribute shall be used to initialize gaps in the memory occupied by a structured data type in the case that an NotAvailableValueSpecification is used. Note that this pattern is only applied during initialization!

Table 5.117: NotAvailableValueSpecification

For deeply nested composite data types (including ImplementationDataTypes created in response to the existence of a Compound Primitive Data Type) [constr_1271], [constr_1272], and [constr_1273] shall be applied recursively according to the nature of the given nesting levels. For the “leaf” elements [TPS_SWCT_01838] applies.

Please find more information about the creation of rule-based ValueSpecifications in Chapter 5.6.9.

5.6.2 Reference to Constant

Note the specific meaning of ConstantReference: it passes the definition of the value on to a ConstantSpecification that is defined as part of an AUTOSAR ARPackage.

Class	ConstantReference			
Note	Instead of defining this value inline, a constant is referenced.			
Base	*ARObject*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, ConstantSpecification.valueSpec, CryptoService Key.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElement Condition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.init Value, ISignal.initValue, ISignal.timeoutSubstitutionValue, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, Nv ProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInitValue, NvRequireComSpec.init Value, ParameterDataPrototype.initValue, ParameterProvideComSpec.initValue, ParameterRequireCom Spec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, Port DefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalidValue, VariableData Prototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
constant	ConstantSpecification	0..1	ref	The referenced constant. **Tags:** atp.Splitkey=constant

Table 5.118: ConstantReference

[constr_1930] Existence of `ConstantReference.constant`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈For each `ConstantReference`, attribute `constant` shall exist.⌋

5.6.3 Constant Specification Mapping

[TPS_SWCT_01186] Semantics of `ConstantSpecificationMapping` ⌈The `ConstantSpecificationMapping` is used to associate

- a `ValueSpecification` owned by the `ConstantSpecification` referenced in the role `implConstant` (defined in the *implementation domain*) with
- a corresponding `ValueSpecification` owned by the `ConstantSpecification` referenced in the role `applConstant` (defined in the *application domain*).

⌋

The existence of a `ConstantSpecificationMapping` is required only in specific situations. One possible such situation for the application of a `ConstantSpecificationMapping` could be in the context of the definition of a `SwRecordLayout`, where the structure of the "physical" `ConstantSpecification` may be dramatically different from the structure of the mapped "internal" `ConstantSpecification`.

In other words, the existence of a `ConstantSpecificationMapping` is typically **more about data structure than data value**.

The formal definition of what a "ConstantSpecification defined in the *application domain*" looks like is not exactly straightforward. Obvious candidates are ApplicationValueSpecification or ApplicationRuleBasedValueSpecification, but this is not the end of it.

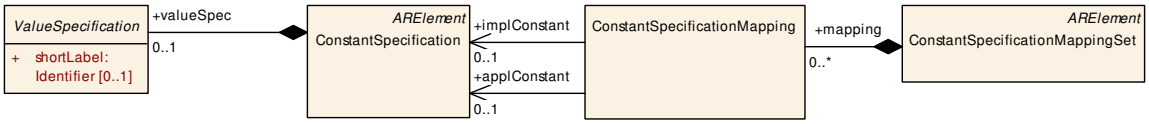

Figure 5.83: Constant Mapping

It is also necessary to extend this definition to composite ValueSpecifications, e.g. a RecordValueSpecification where all "leaf" child elements are either ApplicationValueSpecification or ApplicationRuleBasedValueSpecification.

Again, this is just one possible way to define a qualifying ConstantSpecification, resp. the aggregated ValueSpecification.

In fact, there are plenty of ways to define a "ConstantSpecification defined in the *application domain*". The criteria are summarized in [TPS_SWCT_01871].

[TPS_SWCT_01871] Definition of a ConstantSpecification in the *application domain* ⌈A ConstantSpecification qualifies as being defined in the *application domain* if its aggregated valueSpec fulfills one of the following criteria:

- The ValueSpecification is an ApplicationValueSpecification.
- The ValueSpecification is an ApplicationRuleBasedValueSpecification.
- The ValueSpecification is a RecordValueSpecification where the fields recursively (i.e. via arbitrary aggregation levels of further CompositeValueSpecifications or CompositeRuleBasedValueSpecifications) boil down to ApplicationValueSpecifications or ApplicationRuleBasedValueSpecifications.
- The ValueSpecification is an ArrayValueSpecification where the element recursively (i.e. via arbitrary aggregation levels of further CompositeValueSpecifications or CompositeRuleBasedValueSpecifications) boil down to ApplicationValueSpecifications or ApplicationRuleBasedValueSpecifications.
- The ValueSpecification is a CompositeRuleBasedValueSpecification where the arguments fulfill one of the above criteria.
- The ValueSpecification is a ConstantReference where the referenced constant fulfills one of the above criteria.

⌋

The formal definition of what a "ConstantSpecification defined in the *implementation domain*" looks like is not exactly straightforward. Obvious candidates are NumericalValueSpecification or TextValueSpecification, but this is not the end of it. It is also necessary to extend this definition to composite ValueSpecifications, e.g. a RecordValueSpecification where all "leaf" child elements are either NumericalValueSpecification or TextValueSpecification.

Again, this is just one possible way to define a qualifying ConstantSpecification, resp. the aggregated ValueSpecification.

In fact, there are plenty of ways to define a "ConstantSpecification defined in the *implementation domain*". The criteria are summarized in [TPS_SWCT_01872].

[TPS_SWCT_01872] Definition of a ValueSpecification in the *implementation domain* ⌈A ValueSpecification qualifies as being defined in the *implementation domain* if it fulfills one of the following criteria:

- The ValueSpecification is a NumericalValueSpecification.
- The ValueSpecification is a TextValueSpecification.
- The ValueSpecification is a RecordValueSpecification where the fields recursively (i.e. via arbitrary aggregation levels of further CompositeValueSpecifications or CompositeRuleBasedValueSpecifications) boil down to NumericalValueSpecifications or TextValueSpecifications.
- The ValueSpecification is an ArrayValueSpecification where the element recursively (i.e. via arbitrary aggregation levels of further CompositeValueSpecifications or CompositeRuleBasedValueSpecifications) boil down to NumericalValueSpecifications or TextValueSpecifications.
- The ValueSpecification is a CompositeRuleBasedValueSpecification where the arguments fulfill one of the above criteria.
- The ValueSpecification is a ConstantReference where the referenced constant fulfills one of the above criteria.

⌋

Class	**ConstantSpecificationMapping**
Note	This meta-class is used to create an association of two ConstantSpecifications. One Constant Specification is supposed to be defined in the application domain while the other should be defined in the implementation domain. Hence the ConstantSpecificationMapping needs to be used where a ConstantSpecification defined in one domain needs to be associated to a ConstantSpecification in the other domain. This information is crucial for the RTE generator.

▽

△

Class	ConstantSpecificationMapping			
Base	ARObject			
Aggregated by	ConstantSpecificationMappingSet.mapping			
Attribute	Type	Mult.	Kind	Note
applConstant	ConstantSpecification	0..1	ref	A ConstantSpecification defined in the application domain. **Tags:** atp.Splitkey=applConstant
implConstant	ConstantSpecification	0..1	ref	A ConstantSpecification defined in the implementation domain. **Tags:** atp.Splitkey=implConstant

Table 5.119: ConstantSpecificationMapping

[constr_1931] Existence of ConstantSpecificationMapping.applConstant

Imposition time: CP: IT_CpgExe

⌈For each ConstantSpecificationMapping, the reference to meta-class ConstantSpecification in the role applConstant shall exist.⌋

[constr_1932] Existence of ConstantSpecificationMapping.implConstant

Imposition time: CP: IT_CpgExe

⌈For each ConstantSpecificationMapping, the reference to meta-class ConstantSpecification in the role implConstant shall exist.⌋

[constr_1029] ConstantSpecificationMapping and ConstantSpecification

Imposition time: CP: IT_CpgExe

⌈It is required that the ConstantSpecification referenced from a ConstantSpecificationMapping in the role applConstant shall fulfill the criteria defined in [TPS_SWCT_01871] (i.e. be defined in the *application domain*, applConstant) and the other ConstantSpecification referenced in the role implConstant shall fulfill the criteria defined in [TPS_SWCT_01872] (i.e. be defined in the *implementation domain*, implConstant).⌋

[TPS_SWCT_01187] ConstantSpecificationMappingSet referenced by the InternalBehavior ⌈In most cases the meta-class ConstantSpecificationMappingSet will be referenced by the InternalBehavior. This ConstantSpecificationMappingSet contains the applicable ConstantSpecificationMappings.⌋

However, in some specializations the software-components will not have an InternalBehavior:

- **[TPS_SWCT_01840] A ParameterSwComponentType references a ConstantSpecificationMappingSet** ⌈ParameterSwComponentType: here, the ConstantSpecificationMappingSet is directly associated by the ParameterSwComponentType.⌋

- **[TPS_SWCT_01841] A `NvBlockSwComponentType` references a `ConstantSpecificationMappingSet`** ⌈`NvBlockSwComponentType`: in this case, the `ConstantSpecificationMappingSet` is associated with the aggregated `NvBlockDescriptor`.⌋

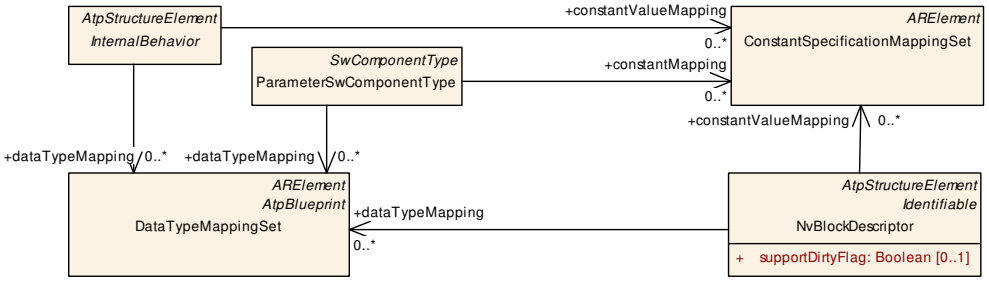

Figure 5.84: Relation between data type mapping and constant mapping

Class	**ConstantSpecificationMappingSet**			
Note	This meta-class represents the ability to map two ConstantSpecifications to each others. One Constant Specification is supposed to be described in the application domain and the other should be described in the implementation domain. **Tags:** atp.recommendedPackage=ConstantSpecificationMappingSets			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
mapping	ConstantSpecification Mapping	*	aggr	ConstantSpecificationMappings owned by the Constant SpecificationMappingSet. **Tags:** atp.Splitkey=mapping

Table 5.120: ConstantSpecificationMappingSet

From the user's perspective, the initialization of `DataPrototype`s typed by a `Compound Primitive Data Type` is typically done in the application/physical domain, i.e. through an `ApplicationValueSpecification` or `ApplicationRuleBasedValueSpecification`.

Because of its nature, the `ValueSpecification` in the physical domain only focuses on the definition of physical values for the various parts, e.g. axes, of the compound `DataPrototype`.

The structure in which the `DataPrototype` is realized on the level of `ImplementationDataType` is governed by the existence of a `SwRecordLayout` that is associated with the definition of the `Compound Primitive Data Type`, see [TPS_SWCT_01179].

This also means that there is typically no way to derive the initialization values on the level of `ImplementationDataType` without the detailed information that is provided in the definition of the `SwRecordLayout`.

The processing of a `SwRecordLayout` tends to be complex and typically comes with a lot of effort.

Therefore, AUTOSAR provides shortcuts that associate the initial value of a compound DataPrototype in the application domain to the corresponding initial value in the implementation domain, to be utilized by downstream tools (e.g. RTE generator):

- By defining a ConstantSpecificationMapping (see [TPS_SWCT_01186]) it is possible to associate two ConstantSpecifications in the different domains with each other.
- By defining a CalibrationParameterValue (see [TPS_SWCT_01188]) that refers to a FlatInstanceDescriptor, the initial values of a **specific instance** can be defined. This approach is more specific than the definition of ConstantSpecificationMapping.

[TPS_SWCT_01890] CalibrationParameterValue overrides ConstantSpecificationMapping ⌈If the user intends to initialize a compound DataPrototype by applying a ValueSpecification in the physical domain, then either a ConstantSpecificationMapping or a CalibrationParameterValue shall exist for this purpose, see [constr_10606].

But it is also perfectly possible that both ConstantSpecificationMapping **and** a CalibrationParameterValue refer to the same ApplicationValueSpecification or ApplicationRuleBasedValueSpecification.

In this case, and because the CalibrationParameterValue is more specific than the ConstantSpecificationMapping, the former "overrides" the latter, such that the definition of a CalibrationParameterValue shall be preferred over the ConstantSpecificationMapping.⌋

A CalibrationParameterValue can typically only be fully defined "at the time when the RTE is generated", but for the sake of the applicability of [constr_10606], it can be observed that the reference to the FlatInstanceDescriptor does not **yet** need to exist at the imposition time of the constraint because the constraint is only about the reference to a ConstantSpecification that aggregates an ApplicationValueSpecification or ApplicationRuleBasedValueSpecification.

[constr_10606] Existence of ConstantSpecificationMapping or CalibrationParameterValue for ApplicationValueSpecification or ApplicationRuleBasedValueSpecification of category COM_AXIS, STD_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, and CUBE_5

Imposition time: CP: IT_RteGen

⌈Any ConstantSpecification that aggregates an ApplicationValueSpecification or ApplicationRuleBasedValueSpecification of category COM_AXIS, STD_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, and CUBE_5 shall be referenced from

- a ConstantSpecificationMapping in the role applConstant and/or
- a CalibrationParameterValue in the role applInitValue.

⌋

It is not allowed that a specific ConstantSpecification that aggregates an ApplicationValueSpecification or ApplicationRuleBasedValueSpecification is referenced by more than one ConstantSpecificationMapping or CalibrationParameterValue, respectively. If the RTE generator needs to rely on the mapping between ValueSpecifications in the different domains, then this mapping should be unambiguous.

[constr_10607] Number of ConstantSpecificationMappings that are allowed to reference a ApplicationValueSpecification or ApplicationRuleBasedValueSpecification in the context of an InternalBehavior

Imposition time: CP: IT_RteGen

⌈Within the collection of all ConstantSpecificationMappings owned by ConstantSpecificationMappingSets referenced by a single InternalBehavior, at most one ConstantSpecificationMapping shall refer to any given ApplicationValueSpecification or ApplicationRuleBasedValueSpecification.⌋

[constr_10608] Number of ConstantSpecificationMappings that are allowed to reference a ApplicationValueSpecification or ApplicationRuleBasedValueSpecification in the context of a ParameterSwComponentType

Imposition time: CP: IT_RteGen

⌈Within the collection of all ConstantSpecificationMappings owned by ConstantSpecificationMappingSets referenced by a single ParameterSwComponentType, at most one ConstantSpecificationMapping shall refer to any given ApplicationValueSpecification or ApplicationRuleBasedValueSpecification.⌋

Technically, a similar condition would need to be formulated for the aggregation of ApplicationValueSpecification or ApplicationRuleBasedValueSpecification from CalibrationParameterValues.

But unfortunately the condition could not be formulated within the framework of the meta-model, with the necessary precision to make a reasonably checkable constraint.

5.6.4 Values for Variable-Size Array

Variable-size data types can change the number of valid elements at run-time. However, in many situations it is necessary to define an ArrayValueSpecification for such a data type.

An ArrayValueSpecification that can be used for a *variable-size array* data type needs to be able to handle the following cases:

- Full initialization of the entire array-data type. This case is identical to the creation of a ArrayValueSpecification for a fixed-size array data type.
- Provision of values for the **first n elements** of the *variable-size array*. This case is also known as *partial initialization*.
- Creation of an empty ArrayValueSpecification, i.e. an ArrayValueSpecification carries the semantics of intentionally initializing 0 elements of a *variable-size array*. Note the semantic difference between not initializing at all and intentionally initializing 0 elements of the *variable-size array*.

All the described cases shall be supported by AUTOSAR. As already described, the existence of an ArrayValueSpecification with the full number of elements is identical to the fixed size case. The "empty" case could be seen as a subset of the partial initialization.

The partial initialization of *variable-size array*s has two facets:

[TPS_SWCT_01793] Initialization of a *variable-size array* typed by an ImplementationDataType ⌈A *variable-size array* that is modeled through an ImplementationDataType actually exists as a structure consisting of a *size indicator* and an *array that carries the payload*.

Therefore, the *partial initialization* shall be implemented by explicitly initializing the *size indicator* to a value between 0 and the applicable ImplementationDataTypeElement.arraySize and provide the corresponding number of ValueSpecifications for the *payload*.⌋

[TPS_SWCT_01794] Initialization of a *variable-size array* typed by an ApplicationArrayDataType ⌈A *variable-size array* that is modeled through an ApplicationArrayDataType where attribute arraySizeSemantics is set to variableSize does not contain any size-indicator element and therefore requires a different approach for *partial initialization*.

For this purpose, the primitive attribute ArrayValueSpecification.intendedPartialInitializationCount shall be used for the specification of the number of elements that shall be initialized.⌋

The applicability of attribute ArrayValueSpecification.intendedPartialInitializationCount is limited to the use case of initializing a *variable-size array* typed by an ApplicationArrayDataType. AUTOSAR does not foresee any other use case for this attribute.

[constr_1712] Existence of attribute ArrayValueSpecification.intendedPartialInitializationCount

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈An ArrayValueSpecification where attribute intendedPartialInitializationCount exists shall only be applied for the initialization of an

ApplicationArrayDataType where attribute arraySizeSemantics is set to variableSize.⌋

[constr_1273] Rules for the initialization of ApplicationArrayDataType through ArrayValueSpecification

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈The following rules apply for the initialization of a DataPrototype typed by an ApplicationArrayDataType through an ArrayValueSpecification:

- If the primitive attribute ApplicationArrayDataType.element.arraySizeSemantics is set to **fixedSize** then the ArrayValueSpecification shall exactly match the structure of the ApplicationArrayDataType.

  This means that the number of ArrayValueSpecification.elements shall be identical to the value of ApplicationArrayDataType.element.maxNumberOfElements.

- If the primitive attribute ApplicationArrayDataType.element.arraySizeSemantics is set to **variableSize** and the ArrayValueSpecification **does not define** attribute intendedPartialInitializationCount then ArrayValueSpecification shall **exactly** match the structure of the ApplicationArrayDataType.

  This means that the number of ArrayValueSpecification.elements shall be identical to the value of ApplicationArrayDataType.element.maxNumberOfElements.

- If the primitive attribute ApplicationArrayDataType.element.arraySizeSemantics is set to **variableSize** and the ArrayValueSpecification specifies a value for attribute intendedPartialInitializationCount then ArrayValueSpecification shall contain **exactly** intendedPartialInitializationCount elements.

  This includes the case that the value of intendedPartialInitializationCount is set to 0 (i.e. “empty” initialization) and the case that the intendedPartialInitializationCount is set to the value of the respective ApplicationArrayElement.maxNumberOfElements (i.e. “full” initialization).

⌋

[constr_1274] Rules for the initialization of array-shaped ImplementationDataType with a fixed size through ArrayValueSpecification

Imposition time: CP: IT_CpgExe

⌈The following rule applies for the initialization of a DataPrototype typed by an ImplementationDataType of category ARRAY where attribute ImplementationDataType.subElement.arraySizeSemantics is set to fixedSize through an ArrayValueSpecification: the ArrayValueSpecification shall exactly match the structure of the ImplementationDataType.

This means that the number of ArrayValueSpecification.elements shall be identical to the value of ImplementationDataType.subElement.arraySize.⌋

The initialization of an ImplementationDataType that represents a *variable-size array* is clarified in [TPS_SWCT_01793].

More details can be found in Chapter 5.6.9.

5.6.5 Values for Compound Primitive Data Types

[TPS_SWCT_01180] Maximum possible size of Compound Primitive Data Type ⌈Note that if the size of the Compound Primitive Data Type (curve/map, see [TPS_SWCT_01179]) is defined using an AttributeValueVariationPoint (in other words swMaxAxisPoints, swValueBlockSize, swValueBlockSizeMult dependent on the value of SwSystemconst) the initValue shall provide the maximum possible amount of values.⌋

In this case it is the responsibility of the model author to ensure that the size of the specified initial values matches the range of the involved system constants.

[TPS_SWCT_01839] Size of Compound Primitive Data Type is variant ⌈For Compound Primitive Data Types (see [TPS_SWCT_01179]) where the size is subject to variation the size of the specified initValues shall match the range of the involved SwSystemconst.⌋

Class	**SwSystemconst**			
Note	This element defines a system constant which serves an input to select a particular variation point. In particular a system constant serves as an operand of the binding function (swSyscond) in a Variation point. Note that the binding process can only happen if a value was assigned to to the referenced system constants. **Tags:** atp.recommendedPackage=SwSystemconsts			
Base	*ARElement*, *ARObject*, *AtpDefinition*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
swDataDef Props	SwDataDefProps	0..1	aggr	This denotes the data definition properties of the system constant. This supports to express the limits and optionally a conversion within the internal to physical values by a compu method. **Tags:** atp.Splitkey=swDataDefProps xml.sequenceOffset=40

Table 5.121: SwSystemconst

[TPS_SWCT_01181] Bound model specifies a primitive which is smaller than the maximum defined by the range of the involved SwSystemconst ⌈The processing tools shall take the lower part of the initValues if the bound model specifies

a primitive which is smaller than the maximum defined by the range of the involved SwSystemconst.⌋

The consequences of [TPS_SWCT_01181] are exemplified by Figure 5.85.

[constr_2050] Mandatory information of a SwAxisCont

Imposition time: CP: IT_CpgExe

⌈If the attribute swAxisCont is defined for an ApplicationValueSpecification the SwAxisCont shall define

- one swAxisIndex value and
- one swArraysize value

per dimension, even in the case when the owning ApplicationValue-Specification defines only the content of a single dimensional object of (for example) category CURVE.⌋

In the context of one ApplicationValueSpecification, the number of elements of attribute swValueCont.swArraysize depends on the value of Application-ValueSpecification.category.

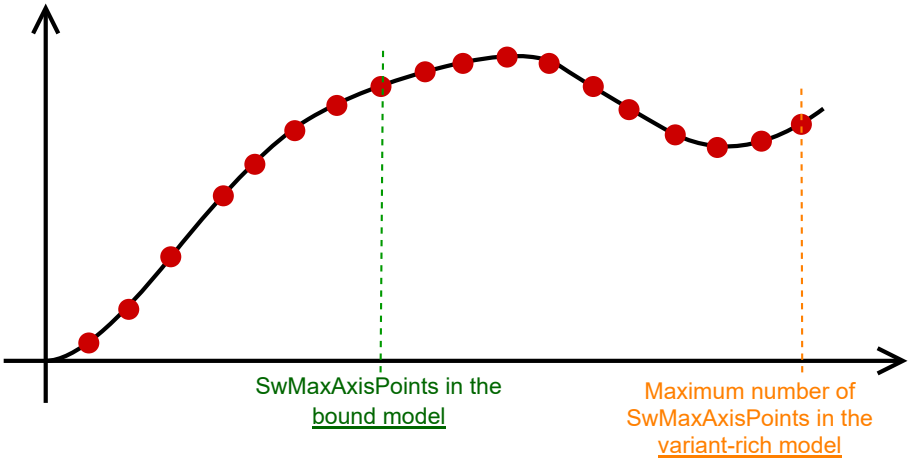

Figure 5.85: Explanation of swMaxAxisPoints

It is not possible to bind the number of elements in swValueCont.swArraysize for one of the following reasons:

- Not all axes might be considered in the definition of the ApplicationValue-Specification. If one or more of the applicable axes are group axes, then these are omitted in the definition of the ApplicationValueSpecification.

  Due to the nature of a COM_AXIS, it is initialized separately through a dedicated ApplicationValueSpecification.

- The ApplicationValueSpecification may set attribute category to the values COM_AXIS or RES_AXIS and is therefore intended to be applied to the initialization of a shared axis itself.
- For ApplicationValueSpecification where attribute category is set to VAL_BLK, no axes are defined at all.

Therefore, the number of elements of ApplicationValueSpecification.swValueCont.swArraysize depends on the value of attribute ApplicationValueSpecification.category, see [constr_10502].

Class	**SwValueCont**			
Note	This metaclass represents the content of one particular SwInstance.			
Base	*ARObject*			
Aggregated by	ApplicationValueSpecification.swValueCont			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
swArraysize	ValueList	0..1	aggr	This attribute defines the size of each dimension for compound primitives CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, RES_AXIS, VAL_BLK. For each dimension one value has to be defined, e.g. one in case of COM_AXIS and two or more in case of MAP. **Tags:** atp.Splitkey=swArraysize xml.sequenceOffset=40
swValuesPhys	SwValues	0..1	aggr	swValuesPhys represents the values in the physical domain. **Tags:** atp.Splitkey=swValuesPhys xml.sequenceOffset=50
unit	Unit	0..1	ref	This represents the physical unit of the provided values. **Tags:** atp.Splitkey=unit xml.sequenceOffset=20
unitDisplay Name	SingleLanguageUnit Names	0..1	aggr	This specifies how the physical units of the current value set shall be displayed in documents or in user interfaces of tools. **Tags:** atp.Splitkey=unitDisplayName xml.sequenceOffset=30

Table 5.122: SwValueCont

[TPS_SWCT_01882] Ordering of elements within ApplicationValueSpecification.swValueCont.swValuesPhys [The order of elements in ApplicationValueSpecification.swValueCont.swValuesPhys should be aligned with the memory layout for both the ROW_DIR and the COLUMN_DIR case. Of course, the order in swValuesPhys can be defined so that both cases can be properly supported.

But it shall be possible, just by looking at the ApplicationValueSpecification, to understand whether the ApplicationValueSpecification was created for the ROW_DIR or for the COLUMN_DIR case:

ROW_DIR The order of values in swValueCont.swArraysize is identical to the values of swAxisCont.swArraysize, as defined by the respective swAxisIndex.

This means, for example, if the array size of the x-axis is 4 and the array-size of the y-axis is 3, then the values within swValueCont.swArraysize would be 4 and 3 (in this order).

COLUMN_DIR The order of values in swValueCont.swArraysize is the reverse of the values of swAxisCont.swArraysize, as defined by the respective swAxisIndex.

This means, for example, if the array size of the x-axis is 4 and the array-size of the y-axis is 3, then the values within swValueCont.swArraysize would be 3 and 4 (in this order).

The modeling of ApplicationValueSpecification.swAxisCont is 100% identical for both cases. The only difference shows up in the modeling of ApplicationValueSpecification.swValueCont.⌋

[constr_10502] Number of elements of ApplicationValueSpecification.swValueCont.swArraysize vs. ApplicationValueSpecification.category

Imposition time: CP: IT_ValSpec, AP: IT_ValSpec

⌈

Value of category	Number of values in swValueCont.swArraysize
CURVE	1
MAP	2
CUBOID	3
CUBE_4	4
CUBE_5	5
COM_AXIS	1
RES_AXIS	1
VAL_BLK	1..*

⌋

If the Compound Primitive Data Type to which an ApplicationValueSpecification where attribute category is set to MAP, CUBOID, CUBE_4, or CUBE_5 is known in advance, then rules can be defined for the relation between the value of ApplicationValueSpecification.swValueCont.swArraysize and the definition of ApplicationPrimitiveDataType.swDataDefProps.swCalprmAxisSet.

[constr_10503] `ApplicationValueSpecification` where attribute `category` is set to `MAP`, `CUBOID`, `CUBE_4`, or `CUBE_5` and `ROW_DIR` `SwRecordLayout`

Imposition time: CP: `IT_ValSpec`

⌈In the context of an `ApplicationValueSpecification` where attribute `category` is set to `MAP`, `CUBOID`, `CUBE_4`, or `CUBE_5` that is applied to a `DataPrototype` typed by an `ApplicationPrimitiveDataType` where the `swDataDefProps.swRecordLayout` refers to a `SwRecordLayout` with a `ROW_DIR` approach, the value of `ApplicationValueSpecification.swValueCont.swArraysize.v`[*i*] (i.e., counting up from the first element of `swArraysize.v`) shall be identical to the number of axis points of the respective `SwCalprmAxisSet.swCalprmAxis` where attribute `swAxisIndex` is set to *i*:

- If the respective `SwCalprmAxis` is a `SwAxisGrouped`, then the number of axis points shall be retrieved from the attribute `subElement.arraySize` of the `ImplementationDataType` that is referenced by a `DataTypeMap` that also references the `ApplicationDataType` referenced in the role `SwAxisGrouped.sharedAxisType`.
- If the respective `SwCalprmAxis` is a `SwAxisIndividual`, the number of axis points is identical to the value of attribute `SwAxisIndividual.swMaxAxisPoints`.

⌋

Rationale for the existence of [constr_10503]: the order of the values provided in `ApplicationValueSpecification.swValueCont.swValuesPhys` shall be such that it follows the memory layout.

If this is confirmed, then the configuration of the corresponding `SwRecordLayout` is relevant and the order in which elements are put into `SwValueCont.swValuesPhys` would indeed entirely be defined by the order of elements collected in the role `ApplicationValueSpecification.swValueCont.swArraysize`.

An example for the observation made by [constr_10503] is given in Chapter B.3.6.1.

[constr_10504] `ApplicationValueSpecification` where attribute category is set to `VAL_BLK` and `ApplicationPrimitiveDataType.swDataDefProps.swValueBlockSizeMult` exists for `ROW_DIR` `SwRecordLayout`

Imposition time: CP: `IT_ValSpec`

⌈If the attribute `ApplicationPrimitiveDataType.swDataDefProps.swValueBlockSizeMult` exists, then the value of `ApplicationValueSpecification.swValueCont.swArraysize` can be identical to the value of `ApplicationPrimitiveDataType.swDataDefProps.swValueBlockSizeMult` if the referenced `ApplicationPrimitiveDataType.swDataDefProps.swRecordLayout` defines a row-first `ROW_DIR`.⌋

[constr_10505] ApplicationValueSpecification where attribute category is set to MAP, CUBOID, CUBE_4, or CUBE_5 and COLUMN_DIR SwRecordLayout

Imposition time: CP: IT_ValSpec

⌈In the context of an ApplicationValueSpecification where attribute category is set to MAP, CUBOID, CUBE_4, or CUBE_5 that is applied to a DataPrototype typed by an ApplicationPrimitiveDataType where the swDataDefProps.swRecordLayout refers to a SwRecordLayout with a COLUMN_DIR approach, the value of ApplicationValueSpecification.swValueCont.swArraysize.v[-*i*] (i.e., counting down from the last element of swArraysize.v) shall be identical to the number of axis points of the respective SwCalprmAxisSet.swCalprmAxis where attribute swAxisIndex is set to *i*:

- If the respective SwCalprmAxis is a SwAxisGrouped, then the number of axis points shall be retrieved from the attribute subElement.arraySize of the ImplementationDataType that is referenced by a DataTypeMap that also references the ApplicationDataType referenced in the role SwAxisGrouped.sharedAxisType.
- If the respective SwCalprmAxis is a SwAxisIndividual, the number of axis points is identical to the value of attribute SwAxisIndividual.swMaxAxisPoints.

⌋

Rationale for the existence of [constr_10505]: the order of the values provided in ApplicationValueSpecification.swValueCont.swValuesPhys shall be such that it follows the memory layout.

If this is confirmed, then the configuration of the corresponding SwRecordLayout is relevant and the order in which elements are put into swValuesPhys would indeed entirely be defined by the order of elements collected in the role ApplicationValueSpecification.swValueCont.swArraysize.

An example for the observation made by [constr_10505] is given in Chapter B.3.6.2.

[constr_10506] ApplicationValueSpecification where attribute category is set to VAL_BLK and ApplicationPrimitiveDataType.swDataDefProps.swValueBlockSizeMult exists for COLUMN_DIR SwRecordLayout

Imposition time: CP: IT_ValSpec

⌈If the attribute ApplicationPrimitiveDataType.swDataDefProps.swValueBlockSizeMult exists, then the value of attribute ApplicationValueSpecification.swValueCont.swArraysize can be taken over from the reversed values of ApplicationPrimitiveDataType.swDataDefProps.swValueBlockSizeMult if the referenced ApplicationPrimitiveDataType.swDataDefProps.swRecordLayout defines a column-first COLUMN_DIR layout.⌋

If the Compound Primitive Data Type to which an ApplicationValueSpecification where attribute category is set to VAL_BLK is known in advance,

then rules can be defined for the relation between the value of swValueCont.swArraysize and ApplicationPrimitiveDataType.swDataDefProps.swValueBlockSize or swDataDefProps.swValueBlockSizeMult.

For multidimensional Compound Primitive Data Types (e.g. MAP) it is necessary to know the dimensions in order to be able to process the SwValues. [constr_2050] and [constr_1519] shall support a consistent handling of single and multidimensional Compound Primitive Data Types.

[constr_10507] ApplicationValueSpecification where attribute category is set to VAL_BLK and ApplicationPrimitiveDataType.swDataDefProps.swValueBlockSize exists

Imposition time: CP: IT_ValSpec, AP: IT_ValSpec

⌈If the attribute AutosarDataType.swDataDefProps.swValueBlockSize exists, then the value of ApplicationValueSpecification.swValueCont.swArraysize shall contain a single v and the value of v shall be identical to the value of attribute swValueBlockSize.⌋

[constr_2052] Values of swArraysize and the number of values provided by swValuesPhys shall be consistent.

Imposition time: CP: IT_ValSpec, AP: IT_ValSpec

⌈swValuesPhys shall define as many values as the attribute swArraysize (if this attribute exists) defines.

In other words, in the bound model the number of descendants (v, or vf, or vt, or vtf) shall be identical to the number of elements of the related DataPrototype typed by an ApplicationPrimitiveDataType.

If several swArraysize values are provided, the values shall be multiplied in order to get the total number of swValuesPhys values.⌋

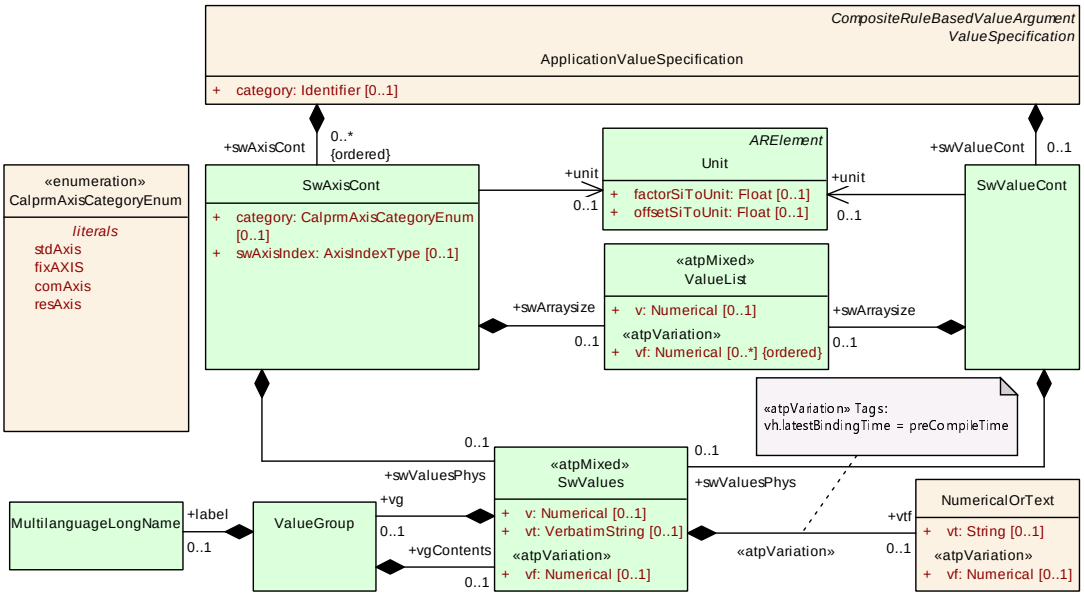

Figure 5.86: Definition of an ApplicationValueSpecification

In the case of Compound Primitive Data Types, typically the attribute swValuesPhys defines more than one value. [constr_1519] and [constr_2052] shall enable a consistent handling of the swValuesPhys values regardless how many dimensions the related Compound Primitive Data Type defines.

If the ApplicationValueSpecification defines values for a Compound Primitive Data Type with more than one input axis, the existence of the attribute swArraysize becomes mandatory to ensure the correct processing of the swValuesPhys values independent of the existence of SwValues.vg.

[TPS_SWCT_02001] Values of SwAxisCont with the category COM_AXIS, RES_AXIS are for display only ⌈If an ApplicationValueSpecification sets attribute category to one of

- CURVE
- MAP
- CUBOID
- CUBE_4
- CUBE_5

it is possible that the SwAxisCont of axes can be omitted if the axis is of category COM_AXIS or RES_AXIS.

If SwAxisCont values exists in such cases for the axes these are for display purposes only because the related DataPrototype of the MAP, CUBOID, CUBE_4, CUBE_5, or CURVE does not hold the values of such axes. These are properties of the DataPrototype of the COM_AXIS or RES_AXIS.⌋

Hence, values of the COM_AXIS itself are described by SwValueCont owned by an ApplicationValueSpecification of category COM_AXIS.

[constr_1243] NumericalOrText shall either define vf or vt

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈Within the context of one NumericalOrText, **either** the attribute vf **or** the attribute vt shall be defined. The existence of both attributes at the same time is not permitted.⌋

[constr_10525] Existence of attribute ApplicationValueSpecification.category

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each ApplicationValueSpecification, attribute category shall exist.⌋

The possible values of ApplicationValueSpecification.category are documented in [constr_1519].

Class	**NumericalOrText**			
Note	This meta-class represents the ability to yield either a numerical or a string. A typical use case is that two or more instances of this meta-class are aggregated with a VariationPoint where some instances yield strings while other instances yield numerical depending on the resolution of the binding expression.			
Base	*ARObject*			
Aggregated by	RuleArguments.vtf, SwValues.vtf			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
vf	Numerical	0..1	attr	This attribute represents the ability to provide a numerical value. The latest binding time of the VariationPoint shall be preCompileTime. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=10
vt	String	0..1	attr	This attribute represents the ability to provide a textual value. **Tags:** xml.sequenceOffset=20

Table 5.123: NumericalOrText

[constr_1519] Existence of attributes vs. `category` of `ApplicationValueSpecification`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈

	Attribute Existence per Category										
Attribute of `ApplicationValueSpecification`	`VALUE`	`VAL_BLK`	`STRING`	`BOOLEAN`	`COM_AXIS`	`RES_AXIS`	`CURVE`	`MAP`	`CUBOID`	`CUBE_4`	`CUBE_5`
`swValueCont`	D	D	D	D	D	D	D	D	D	D	D
`swValueCont.unit`	O	O	O	O	O	O	O	O	O	O	O
`swValueCont.swValuesPhys`	D	D	D	D	D	D	D	D	D	D	D
`swValueCont.swArraysize`		D			D	D	D	D	D	D	D
`swAxisCont`						D	O(1)	O(1)	O(1)	O(1)	O(1)
`swAxisCont.unit`						O	O	O	O	O	O
`swAxisCont.category`						D	D	D	D	D	D
`swAxisCont.swAxisIndex`						D	D	D	D	D	D
`swAxisCont.swArraysize`						D	D	D	D	D	D
`swAxisCont.swValuesPhys`						D	O(1)	O(1)	O(1)	O(1)	O(1)

⌋

Legend for Table inside [constr_1519]

Empty cells indicate that the attribute is not applicable for the respective combination with a `category` value.

D Define the attribute.

empty cell Attribute is **not applicable** for usage in the scope of this element.

O Optionally define the attribute.

In addition to the primary cell legend, the following annotations apply to the cells in the table contained in [constr_1519]:

(1) Optional if COM_AXIS or RES_AXIS is used, otherwise attribute shall exist.

[constr_10040] Value of ApplicationValueSpecification.swAxisCont.category

Imposition time: CP: IT_CpgExe

⌈The value of attribute ApplicationValueSpecification.swAxisCont.category shall not be set to fixAXIS.⌋

Class	**ApplicationValueSpecification**			
Note	This meta-class represents values for DataPrototypes typed by ApplicationDataTypes (this includes in particular compound primitives). For further details refer to ASAM CDF 2.0. This meta-class corresponds to some extent with SW-INSTANCE in ASAM CDF 2.0.			
Base	*ARObject*, *CompositeRuleBasedValueArgument*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, CompositeRuleBasedValueSpecification.compoundPrimitive Argument, ConstantSpecification.valueSpec, CryptoServiceKey.developmentValue, DiagnosticEnvData Condition.compareValue, DiagnosticEnvDataElementCondition.compareValue, DiagnosticEnvSovdData Condition.compareValue, FieldSenderComSpec.initValue, ISignal.initValue, ISignal.timeoutSubstitution Value, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, NvProvideComSpec.ramBlockInitValue, NvProvideComSpec.rom BlockInitValue, NvRequireComSpec.initValue, ParameterDataPrototype.initValue, ParameterProvideCom Spec.initValue, ParameterRequireComSpec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, PortDefinedArgumentValue.value, PortPrototypeBlueprintInit Value.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, Sw DataDefProps.invalidValue, VariableDataPrototype.initValue			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
category	Identifier	0..1	attr	Specifies to which category of ApplicationDataType this ApplicationValueSpecification can be applied (e.g. as an initial value), thus imposing constraints on the structure and semantics of the contained values, see [constr_1006] and [constr_1519].
swAxisCont (ordered)	SwAxisCont	*	aggr	This represents the axis values of a Compound Primitive Data Type (curve or map). The first swAxisCont describes the x-axis, the second sw AxisCont describes the y-axis, the third swAxisCont describes the z-axis. In addition to this, the axis can be denoted in swAxisIndex.
swValueCont	SwValueCont	0..1	aggr	This represents the values of a Compound Primitive Data Type. **Tags:** atp.Splitkey=swValueCont

Table 5.124: ApplicationValueSpecification

Class	**SwAxisCont**
Note	This represents the values for the axis of a compound primitive (curve, map). For standard and fix axes, SwAxisCont contains the values of the axis directly. The axis values of SwAxisCont with the category COM_AXIS, RES_AXIS are for display only. For editing and processing, only the values in the related GroupAxis are binding.
Base	*ARObject*

▽

△

Class	SwAxisCont			
Aggregated by	ApplicationValueSpecification.swAxisCont			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
category	CalprmAxisCategoryEnum	0..1	attr	This category specifies the particular axis types: • STD_AXIS • COM_AXIS • RES_AXIS (swArraysize necessary) **Tags:** xml.sequenceOffset=20
swArraysize	ValueList	0..1	aggr	For multidimensional compound primitivies (curve, map ...) it is necessary to know the dimensions.They are specified using swArraySize. • RES_AXIS **Tags:** xml.sequenceOffset=70
swAxisIndex	AxisIndexType	0..1	attr	This property allows to explicitly assign the axis contents to a particular axis. It is specified by numbers where 1 corresponds to the x-axis. It is also possible to derive the axis association from the sequence of the parent. **Tags:** xml.sequenceOffset=50
swValuesPhys	SwValues	0..1	aggr	swValuesPhys represents the values in the physical domain. **Tags:** xml.sequenceOffset=80
unit	Unit	0..1	ref	This represents the physical unit of the provided values. **Tags:** xml.sequenceOffset=30
unitDisplayName	SingleLanguageUnitNames	0..1	aggr	This represents the display name which is used for the physical unit of the axis. **Tags:** xml.sequenceOffset=40

Table 5.125: SwAxisCont

Rationale for the existence of [constr_10040]: the value `fixAXIS` for `category` indicates that the respective axis that is calculated out of the value of calibration parameters. Obviously, it does not make sense to initialize an axis of this kind and therefore it is excluded from the usage inside an `ApplicationValueSpecification`.

[constr_10018] Existence of attribute `SwAxisCont.swAxisIndex`

Imposition time: CP: `IT_CpgExe`

⌈For each `SwAxisCont`, attribute `swAxisIndex` shall exist.⌋

[constr_10019] Existence of attribute `SwAxisCont.swValuesPhys`

Imposition time: CP: `IT_CpgExe`

⌈For each `SwAxisCont`, attribute `swValuesPhys` shall exist.⌋

Class	«atpMixed» **SwValues**			
Note	This meta-class represents a list of values. These values can either be the input values of a curve (abscissa values) or the associated values (ordinate values). For multidimensional structures, the values are ordered such that they follow the memory layout, see [TPS_SWCT_01882] In particular for maps and cuboids etc. the resulting long value list can be subsectioned using Value Group. But the processing needs to be done as if vg is not there. Note that numerical values and textual values should not be mixed.			
Base	*ARObject*			
Aggregated by	SwAxisCont.swValuesPhys, SwValueCont.swValuesPhys, ValueGroup.vgContents			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
v	Numerical	0..1	attr	This is a non variant Value. It is provided for sake of Compatibility to ASAM CDF. **Tags:** xml.sequenceOffset=40
vf	Numerical	0..1	attr	This allows to specify the value as VariationPoint. It is distinguished to non variant for sake of compatibility to ASAM CDF 2.0. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.sequenceOffset=20
vg	ValueGroup	0..1	aggr	This allows to have intersections in the values in order to support specific rendering (eg. using stylesheets). For tools it is important that the v values are always processed in the same (flattened) order and the tool is able to interpret it without respecting vg. **Tags:** xml.sequenceOffset=50
vt	VerbatimString	0..1	attr	This represents the values of textual data elements (Strings). Note that vt uses the | to separate the values for the different bitfield masks in case that the semantics of the related DataPrototype is described by means of a BITFIELD_TEXTTABLE in the associated CompuMethod. **Tags:** xml.sequenceOffset=30
vtf	NumericalOrText	0..1	aggr	This aggregation represents the ability to provide a value that is either numerical or text which existence is subject to variability. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 5.126: SwValues

Class	**ValueGroup**			
Note	This element enables values to be grouped. It can be used to perform row and column-orientated groupings, so that these can be rendered properly e.g. as a table.			
Base	*ARObject*			
Aggregated by	SwValues.vg			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
label	MultilanguageLongName	0..1	aggr	This label allows to give the valueGroup a particular name. It can be used if the Values are rendered as a table. **Tags:** xml.sequenceOffset=20

▽

△

Class	**ValueGroup**			
vgContents	SwValues	0..1	aggr	This represents the contents of the value group. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=30 xml.typeElement=false xml.typeWrapperElement=false

Table 5.127: ValueGroup

Class	«atpMixed» **ValueList**			
Note	This is a generic list of numerical values.			
Base	*ARObject*			
Aggregated by	RuleBasedAxisCont.swArraysize, RuleBasedValueCont.swArraysize, SwAxisCont.swArraysize, SwServiceArg.swArraysize, SwValueCont.swArraysize			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
v	Numerical	0..1	attr	This is a particular numerical value without variation. **Tags:** xml.sequenceOffset=30
vf (ordered)	Numerical	*	attr	This is one entry in the list of numerical values **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime xml.roleElement=true xml.roleWrapperElement=false xml.typeElement=false xml.typeWrapperElement=false

Table 5.128: ValueList

5.6.6 Values for TEXTTABLE

The creation of a `ValueSpecification` applied to a `DataPrototype` that is typed by an `ImplementationDataType` that references a `CompuMethod` of category `TEXTTABLE` or `BITFIELD_TEXTTABLE` needs to ensure that the numerical value is represented in the `CompuMethod`.

This means that in this specific case, the initialization of a `DataPrototype` that is typed by an `ImplementationDataType` is – contrary to the typical approach for a `ValueSpecification` applied in the context of an `ImplementationDataType` – actually done in the **physical domain** and thereby it can be ensured that the value provided in the `ValueSpecification` is represented in the `CompuMethod`.

For example, in a specific case the values from 0..10 are covered by corresponding literals of the applicable `CompuMethod`, what the consequence is if the value of the `DataPrototype` is set to the **numerical** value 20?

This scenario should be avoided, **unless** the `ValueSpecification` represents an `invalidValue` (see Chapter 5.4.2, specifically [constr_10196]).

[constr_1225] DataPrototype is typed by an ImplementationDataType that references a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE

Imposition time: CP: IT_CpgExe

⌈If a DataPrototype is typed by an ImplementationDataType that references a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE the applicable ValueSpecification shall be a TextValueSpecification.

In this case the value provided shall match one of the applicable text values (vt, shortLabel, symbol) defined by the applicable CompuScales.⌋

Several attributes of meta-class CompuScale can be taken to describe the actual value. It is therefore necessary to clarify what happens if several of these attributes exist within the context of one CompuScale. This clarification can be found in [TPS_SWCT_01696].

5.6.7 Values for BITFIELD_TEXTTABLE

A CompuMethod of category BITFIELD_TEXTTABLE effectively defines a data type where single bits or a set of single bits have an individual meaning.

In other words, the definition of a ValueSpecification according to a CompuMethod of category BITFIELD_TEXTTABLE translates into the statement: “each unique value of attribute CompuScale.mask (because this is how the single bits or sets of single bits are identified) in the context of the enclosing CompuMethod delivers one contribution to the definition of the ValueSpecification”.

[TPS_SWCT_01792] Initialization of a DataPrototype associated with a CompuMethod of category BITFIELD_TEXTTABLE ⌈The initialization of a DataPrototype associated with a CompuMethod of category BITFIELD_TEXTTABLE requires the simultaneous initialization of all single bits or sets of bits represented by the respective definition of the bitmask represented by attribute CompuScale.mask.

Access to the elements is possible using bit-operations. Therefore, the initialization shall be defined in a way that bit-operations can be used to apply the provided value.

In other words, the overall value shall be created by bitwise or-ing (represented by the usage of the “|” symbol) contributions from the individual subsets.⌋

An example for the definition of a ValueSpecification that can be taken e.g. for the initialization of a DataPrototype typed by an ApplicationDataType that refers to a CompuMethod of category BITFIELD_TEXTTABLE is discussed in Chapter B.3.5.

Areas of the initialized DataPrototype that are not covered by the bit-masks may contain arbitrary values. If this is to be avoided, it is necessary to add “dummy” bit-masks to the semantically not relevant parts of the value of the DataPrototype.

5.6.8 Values for Strings

5.6.8.1 String is modeled by ApplicationDataType

[TPS_SWCT_01859] Specification of constant value for a String modeled by `ApplicationDataType` ⌈The specification of a constant value for a `DataPrototype` typed by an `ApplicationPrimitiveDataType` of `category STRING` shall be done by specifying an `ApplicationValueSpecification`. Inside the `ApplicationValueSpecification`, the concrete value shall be provided in `ApplicationValueSpecification.swValueCont.swValuesPhys.vt`.⌋

An example of how a constant value for a string modeled as `ApplicationDataType` is contained in Listing B.1.

5.6.8.2 String is modeled by ImplementationDataType

[TPS_SWCT_01860] Specification of constant value for a String modeled by `ImplementationDataType` ⌈The specification of a constant value for a `DataPrototype` typed by an `ImplementationDataType` that references an `SwBaseType` with a string encoding (e.g. UTF-8) shall be done on the basis of (a series of) `NumericalValueSpecification`.⌋

An example of how a constant value for a string modeled through an `ImplementationDataType` is contained in Listing B.4.

5.6.9 Specification of Values based on Rules

5.6.9.1 Support for primitive Data Types

[TPS_SWCT_01484] Meaning of `ApplicationRuleBasedValueSpecification` ⌈The purpose of the `ApplicationRuleBasedValueSpecification` is to provide means for a compact provision of values for `DataPrototype`s that otherwise would require a high volume (in terms of serialized ARXML) of e.g. initialization data.

`ApplicationRuleBasedValueSpecification` may be used for `ApplicationArrayDataType`, and also (if applicable) to the so-called `Compound Primitive Data Type`s.⌋

For example, an `ApplicationArrayDataType` that has 100 elements would need to be initialized such that for each element a dedicated initial value is provided.

In the most prominent cases the majority of these elements are initialized with an identical value (e.g. 0) and only the first few elements differ in terms of initialization values.

ApplicationRuleBasedValueSpecification applies to arrays typed by a primitive data type. Rule-based value specification of arrays of a composite data type is done through the CompositeRuleBasedValueSpecification.

Class	***AbstractRuleBasedValueSpecification*** (abstract)			
Note	This represents an abstract base class for all rule-based value specifications.			
Base	*ARObject*, *ValueSpecification*			
Subclasses	ApplicationRuleBasedValueSpecification, CompositeRuleBasedValueSpecification, NumericalRuleBasedValueSpecification			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValueSpecification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, ConstantSpecification.valueSpec, CryptoServiceKey.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElementCondition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.initValue, ISignal.initValue, ISignal.timeoutSubstitutionValue, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, NvProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInitValue, NvRequireComSpec.initValue, ParameterDataPrototype.initValue, ParameterProvideComSpec.initValue, ParameterRequireComSpec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, PortDefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalidValue, VariableDataPrototype.initValue			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.129: AbstractRuleBasedValueSpecification

[constr_1779] Scope of the definition of an AbstractRuleBasedValueSpecification

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈An AbstractRuleBasedValueSpecification shall only be defined in the context of an ArrayValueSpecification or a ConstantSpecification. If the AbstractRuleBasedValueSpecification is defined in the context of a ConstantSpecification then a reference to this ConstantSpecification shall only be created in the context of an ArrayValueSpecification.⌋

[constr_10041] Value of role ApplicationRuleBasedValueSpecification.swAxisCont.category

Imposition time: CP: IT_CpgExe

⌈The value of attribute ApplicationRuleBasedValueSpecification.swAxisCont.category shall not be set to fixAXIS⌋

Rationale for the existence of [constr_10041]: the value fixAXIS of attribute category indicates that the respective axis is calculated from the value of calibration parameters. Obviously, it does not make sense to initialize an axis of this kind and therefore it is excluded from the usage inside an ApplicationRuleBasedValueSpecification.

Class	ApplicationRuleBasedValueSpecification			
Note	This meta-class represents rule based values for DataPrototypes typed by ApplicationDataTypes (ApplicationArrayDataType or a compound ApplicationPrimitiveDataType which also boils down to an array-nature).			
Base	*ARObject*, *AbstractRuleBasedValueSpecification*, *CompositeRuleBasedValueArgument*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValueSpecification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, CompositeRuleBasedValueSpecification.compoundPrimitiveArgument, ConstantSpecification.valueSpec, CryptoServiceKey.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElementCondition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.initValue, ISignal.initValue, ISignal.timeoutSubstitutionValue, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, NvProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInitValue, NvRequireComSpec.initValue, ParameterDataPrototype.initValue, ParameterProvideComSpec.initValue, ParameterRequireComSpec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, PortDefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalidValue, VariableDataPrototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
category	Identifier	0..1	attr	This represents the category of the RuleBasedValue Specification **Tags:** xml.sequenceOffset=-20
swAxisCont (ordered)	RuleBasedAxisCont	*	aggr	This represents the axis values of a Compound Primitive Data Type (curve or map). The first swAxisCont describes the x-axis, the second sw AxisCont describes the y-axis, the third swAxisCont describes the z-axis. In addition to this, the axis can be denoted in swAxisIndex.
swValueCont	RuleBasedValueCont	0..1	aggr	This represents the values of an array or Compound Primitive Data Type. **Tags:** atp.Splitkey=swValueCont

Table 5.130: ApplicationRuleBasedValueSpecification

[constr_1922] Existence of `ApplicationRuleBasedValueSpecification.category`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈For each `ApplicationRuleBasedValueSpecification`, attribute `category` shall exist.⌋

Attribute `ApplicationRuleBasedValueSpecification.category` is mentioned in [constr_2058], which would fail if the attribute does not exist.

Class	RuleBasedAxisCont			
Note	This represents the values for the axis of a compound primitive (curve, map). For standard and fix axes, SwAxisCont contains the values of the axis directly. The axis values of SwAxisCont with the category COM_AXIS, RES_AXIS are for display only. For editing and processing, only the values in the related GroupAxis are binding.			
Base	*ARObject*			
Aggregated by	ApplicationRuleBasedValueSpecification.swAxisCont			
Attribute	**Type**	**Mult.**	**Kind**	**Note**

▽

△

Class	**RuleBasedAxisCont**			
category	CalprmAxisCategory Enum	0..1	attr	This category specifies the particular axis types: • STD_AXIS • COM_AXIS • RES_AXIS (swArraysize necessary) **Tags:** xml.sequenceOffset=20
ruleBased Values	RuleBasedValue Specification	0..1	aggr	This represents the rule based value specification for the axis of a compound primitive (curve, map). **Tags:** xml.roleElement=true xml.roleWrapperElement=false xml.sequenceOffset=80 xml.typeWrapperElement=false
swArraysize	ValueList	0..1	aggr	For multidimensional compound primitives (curve, map ...) it is necessary to know the dimensions.They are specified using swArraySize. **Tags:** xml.sequenceOffset=40
swAxisIndex	AxisIndexType	0..1	attr	This property allows to explicitly assign the axis contents to a particular axis. It is specified by numbers where 1 corresponds to the x-axis. It is also possible to derive the axis association from the sequence of the parent. **Tags:** xml.sequenceOffset=50
unit	Unit	0..1	ref	This represents the physical unit of the provided values. **Tags:** xml.sequenceOffset=30

Table 5.131: RuleBasedAxisCont

[constr_1923] Existence of `RuleBasedAxisCont.ruleBasedValues`

Imposition time: CP: `IT_CpgExe`

⌈For each `RuleBasedAxisCont`, attribute `ruleBasedValues` shall exist.⌋

Class	**RuleBasedValueCont**			
Note	This represents the values of a compound primitive (CURVE, MAP, CUBOID, CUBE_4, CUBE_5, VAL_BLK) or an array.			
Base	*ARObject*			
Aggregated by	ApplicationRuleBasedValueSpecification.swValueCont			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
ruleBased Values	RuleBasedValue Specification	0..1	aggr	This represents the rule based value specification for the array or compound primitive (CURVE, MAP, CUBOID, CUBE_4, CUBE_5, VAL_BLK). **Tags:** atp.Splitkey=ruleBasedValues xml.roleElement=true xml.roleWrapperElement=false xml.sequenceOffset=80 xml.typeWrapperElement=false

▽

△

Class	**RuleBasedValueCont**			
swArraysize	ValueList	0..1	aggr	This attribute defines the size of each dimension for compound primitives CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, RES_AXIS, VAL_BLK. For each dimension one value has to be defined, e.g. one in case of COM_AXIS and two or more in case of MAP. **Tags:** atp.Splitkey=swArraysize xml.sequenceOffset=40
unit	Unit	0..1	ref	This represents the physical unit of the provided values. **Tags:** atp.Splitkey=unit xml.sequenceOffset=30

Table 5.132: RuleBasedValueCont

[constr_1924] Existence of RuleBasedValueCont.ruleBasedValues

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each RuleBasedValueCont, attribute ruleBasedValues shall exist.⌋

If the ApplicationRuleBasedValueSpecification is applied to Compound Primitive Data Types, basically the same rules apply for ApplicationRuleBasedValueSpecification as defined for ApplicationValueSpecification.

[constr_2057] Mandatory information of a RuleBasedAxisCont

Imposition time: CP: IT_CpgExe

⌈If the attribute swAxisCont is defined for an ApplicationRuleBasedValueSpecification the RuleBasedAxisCont shall define one swAxisIndex value and one swArraysize value per dimension, even in the case when the owning ApplicationRuleBasedValueSpecification defines only the content of a single dimensional object like a CURVE.⌋

[constr_2058] Mandatory information of a RuleBasedValueCont

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈If the attribute swValueCont is defined for an ApplicationRuleBasedValueSpecification the RuleBasedValueCont shall always define the attribute swArraysize if the ApplicationRuleBasedValueSpecification is of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, RES_AXIS, or VAL_BLK.⌋

The definition of attribute swArraysize is not required for an ApplicationRuleBasedValueSpecification of category ARRAY because the applicable size can typically be derived from the context.

For multidimensional Compound Primitive Data Types (e.g. MAP) it is necessary to know the dimensions in order to be able to process the SwValues. [constr_2057] and [constr_2058] shall support a consistent handling of single and multidimensional Compound Primitive Data Types.

If the ApplicationRuleBasedValueSpecification defines values for a Compound Primitive Data Type with more than one input axis the swArraysize becomes mandatory to ensure the correct processing of the values calculated by rule.

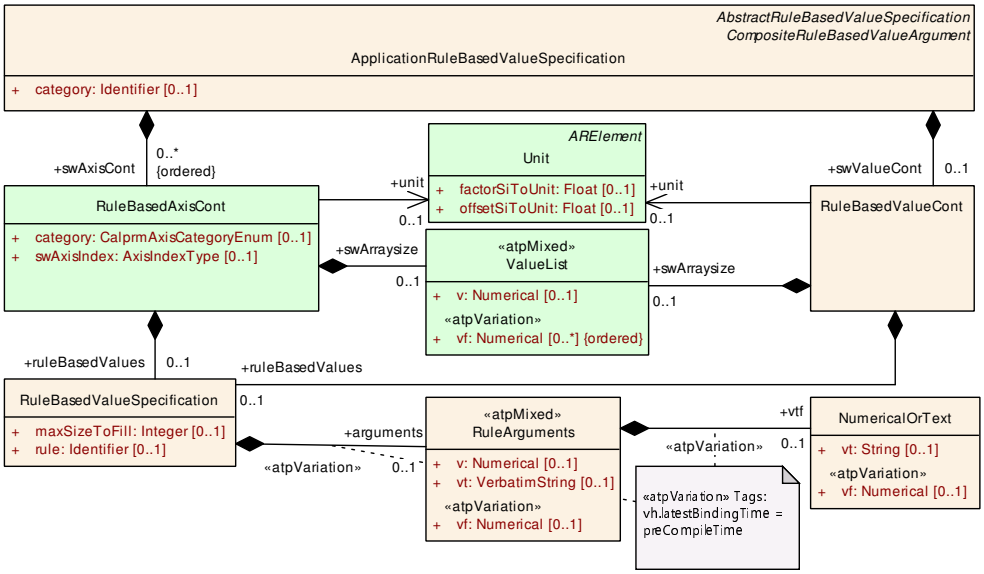

Figure 5.87: Definition of an ApplicationRuleBasedValueSpecification

[TPS_SWCT_02053] Values of RuleBasedAxisCont with the category COM_AXIS, RES_AXIS are for display only ⌈In the case of ApplicationRuleBasedValueSpecifications of category MAP, CUBOID, CUBE_4, CUBE_5 or CURVE, it is possible that the RuleBasedAxisCont of axes can be omitted if the axis is of category COM_AXIS or RES_AXIS.

If RuleBasedAxisCont values exists in such cases for the axes these are for display purposes only because the related DataPrototype of the MAP or CURVE does not hold the values of such axes. These are properties of the DataPrototype of the COM_AXIS or RES_AXIS.⌋

Hence, values of the COM_AXIS itself are described by RuleBasedValueCont.

[TPS_SWCT_01528] Meaning of NumericalRuleBasedValueSpecification ⌈The purpose of the NumericalRuleBasedValueSpecification is to provide means for a compact provision of values for DataPrototypes that otherwise would require a high volume (in terms of serialized ARXML) of e.g. initialization data.

NumericalRuleBasedValueSpecification may be used for DataPrototypes typed by ImplementationDataTypes of category ARRAY or Compound Primitive Data Types mapped to ImplementationDataTypes of category ARRAY.⌋

Concerning initValues for Compound Primitive Data Types see as well [TPS_SWCT_01185].

Class	**NumericalRuleBasedValueSpecification**			
Note	This meta-class is used to support a rule-based initialization approach for data types with an array-nature (ImplementationDataType of category ARRAY).			
Base	*ARObject*, *AbstractRuleBasedValueSpecification*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, ConstantSpecification.valueSpec, CryptoService Key.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElement Condition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.init Value, ISignal.initValue, ISignal.timeoutSubstitutionValue, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, Nv ProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInitValue, NvRequireComSpec.init Value, ParameterDataPrototype.initValue, ParameterProvideComSpec.initValue, ParameterRequireCom Spec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, Port DefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalidValue, VariableData Prototype.initValue			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
ruleBased Values	RuleBasedValue Specification	0..1	aggr	This represents the rule based value specification for the array. **Tags:** atp.Splitkey=ruleBasedValues xml.roleElement=true xml.roleWrapperElement=false xml.typeWrapperElement=false

Table 5.133: NumericalRuleBasedValueSpecification

[constr_1925] Existence of NumericalRuleBasedValueSpecification.ruleBasedValues

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each NumericalRuleBasedValueSpecification, attribute ruleBasedValues shall exist.⌋

[TPS_SWCT_01495] Standardized value of RuleBasedValueSpecification.rule ⌈AUTOSAR reserves a dedicated value of RuleBasedValueSpecification.rule and CompositeRuleBasedValueSpecification.rule in a standardized semantics:

- FILL_UNTIL_END
- FILL_UNTIL_MAX_SIZE

The meaning of this value of rule is explained in [TPS_SWCT_01494] and [TPS_SWCT_01609].⌋

[TPS_SWCT_01485] The order of RuleArguments arguments shall be respected ⌈The order of arguments in RuleArguments corresponds to the order of elements in the array, i.e. the first argument corresponds to the first element of the array, the second argument corresponds to the second element of the array, and so on.⌋

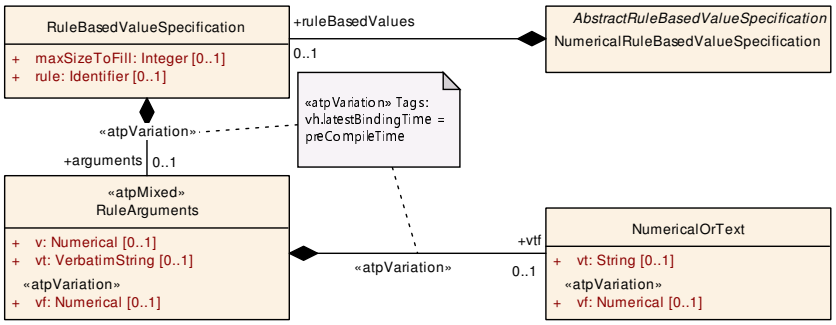

Figure 5.88: Definition of a `NumericalRuleBasedValueSpecification`

A single argument can be defined by the attributes

- `RuleArguments.v`
- `RuleArguments.vf`
- `RuleArguments.vt`
- `RuleArguments.vtf.vf`
- `RuleArguments.vtf.vt`

[TPS_SWCT_01493] The number of `RuleBasedValueSpecification.arguments` shall not exceed the array size ⌈If the number of `RuleBasedValueSpecification.arguments` exceeds the number of elements of an array that it is applied to then the `RuleBasedValueSpecification.arguments` that go beyond the last element of the array shall be ignored.⌋

[TPS_SWCT_01494] A `RuleBasedValueSpecification` of `rule` `FILL_UNTIL_END` shall fill the value of the last `RuleBasedValueSpecification.arguments` until the last element of the array ⌈The following rule applies to `RuleBasedValueSpecification`s of `rule` `FILL_UNTIL_END`:

If the number of `RuleBasedValueSpecification.arguments` is smaller than the number of elements of the array it is applied to then the value of the last `RuleBasedValueSpecification.arguments` shall be applied to any following element of the array until the last element of the array.⌋

[TPS_SWCT_01609] A `RuleBasedValueSpecification` of `rule` `FILL_UNTIL_MAX_SIZE` shall fill the value of the last `RuleBasedValueSpecification.arguments` until the number of elements specified in `maxSizeToFill` ⌈The following rule applies to `RuleBasedValueSpecification`s of `rule` `FILL_UNTIL_MAX_SIZE`:

If the number of `RuleBasedValueSpecification.arguments` is smaller than the number of elements of the array it is applied to and smaller than `maxSizeToFill`, then the value of the last `RuleBasedValueSpecification.arguments` shall be applied to so many of the following elements that the first `maxSizeToFill` elements of the array are filled.⌋

Class	RuleBasedValueSpecification			
Note	This meta-class is used to support a rule-based initialization approach for data types with an array-nature (ApplicationArrayDataType and ImplementationDataType of category ARRAY) or a compound Application PrimitiveDataType (which also boils down to an array-nature).			
Base	ARObject			
Aggregated by	NumericalRuleBasedValueSpecification.ruleBasedValues, RuleBasedAxisCont.ruleBasedValues, RuleBasedValueCont.ruleBasedValues			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
arguments	RuleArguments	0..1	aggr	This represents the arguments for the RuleBasedValue Specification. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=arguments vh.latestBindingTime=preCompileTime xml.sequenceOffset=30
maxSizeToFill	Integer	0..1	attr	If a rule is chosen which does not fill until the end, this determines until which size the rule shall fill the values. **Tags:** xml.sequenceOffset=40
rule	Identifier	0..1	attr	This denotes the name of the rule of the RuleBasedValue Specification. The rule determines the calculation specification according which the arguments are used to calculated the values. **Tags:** xml.sequenceOffset=20

Table 5.134: RuleBasedValueSpecification

[constr_1926] Existence of RuleBasedValueSpecification.rule

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each RuleBasedValueSpecification, attribute rule shall exist.⌋

[constr_1927] Existence of RuleBasedValueSpecification.arguments

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each RuleBasedValueSpecification, the aggregation of RuleArguments in the role arguments shall exist.⌋

Class	«atpMixed» **RuleArguments**			
Note	This represents the arguments for a rule-based value specification.			
Base	ARObject			
Aggregated by	RuleBasedValueSpecification.arguments			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
v	Numerical	0..1	attr	This represents a numerical value for the RuleBased ValueSpecification.
vf	Numerical	0..1	attr	This represents a numerical value for the RuleBased ValueSpecification which may subject to variability. The latest binding time of the VariationPoint shall be pre CompileTime. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
vt	VerbatimString	0..1	attr	This represents a textual value for the RuleBasedValue Specification.

▽

△

Class	«atpMixed» **RuleArguments**			
vtf	NumericalOrText	0..1	aggr	This aggregation represents the ability to provide a value that is either numerical or text which existence is subject to variability. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 5.135: RuleArguments

An example of the definition of a RuleBasedValueSpecification for primitive elements of an array in Chapter B.3.8.

It is not foreseen that an ArrayValueSpecification consists of a collection of ApplicationRuleBasedValueSpecifications or even a mixture of ApplicationRuleBasedValueSpecification with another kind of ValueSpecification.

[constr_10009] Aggregation of ApplicationRuleBasedValueSpecification

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈Each ArrayValueSpecification shall only aggregate at most one ApplicationRuleBasedValueSpecification in the role element.

If one ApplicationRuleBasedValueSpecification is aggregated then it shall be the only aggregated element, i.e. no further ValueSpecification shall exist in the same aggregation where an ApplicationRuleBasedValueSpecification is aggregated.⌋

It is not foreseen that an ArrayValueSpecification consists of a collection of NumericalRuleBasedValueSpecification or even a mixture of NumericalRuleBasedValueSpecification with another kind of ValueSpecification.

[constr_1754] Aggregation of NumericalRuleBasedValueSpecification

Imposition time: CP: IT_CpgExe

⌈Each ArrayValueSpecification shall only aggregate at most one NumericalRuleBasedValueSpecification in the role element.

If one NumericalRuleBasedValueSpecification is aggregated then it shall be the only aggregated element, i.e. no further ValueSpecification shall exist in the same aggregation where an NumericalRuleBasedValueSpecification is aggregated.⌋

5.6.9.2 Support for composite Data Types

[TPS_SWCT_01692] Meaning of CompositeRuleBasedValueSpecification
⌈The rule-based initialization of arrays of a composite data type is modeled through the CompositeRuleBasedValueSpecification.⌋

Class	CompositeRuleBasedValueSpecification			
Note	This meta-class represents rule-based values for DataPrototypes typed by composite AutosarDataTypes.			
Base	*ARObject*, *AbstractRuleBasedValueSpecification*, *ValueSpecification*			
Aggregated by	ApplicationAssocMapElementValueSpecification.key, ApplicationAssocMapElementValue Specification.value, ArrayValueSpecification.element, CalibrationParameterValue.applInitValue, CalibrationParameterValue.implInitValue, ConstantSpecification.valueSpec, CryptoService Key.developmentValue, DiagnosticEnvDataCondition.compareValue, DiagnosticEnvDataElement Condition.compareValue, DiagnosticEnvSovdDataCondition.compareValue, FieldSenderComSpec.init Value, ISignal.initValue, ISignal.timeoutSubstitutionValue, NonqueuedReceiverComSpec.initValue, NonqueuedReceiverComSpec.timeoutSubstitutionValue, NonqueuedSenderComSpec.initValue, Nv ProvideComSpec.ramBlockInitValue, NvProvideComSpec.romBlockInitValue, NvRequireComSpec.init Value, ParameterDataPrototype.initValue, ParameterProvideComSpec.initValue, ParameterRequireCom Spec.initValue, PersistencyDataRequiredComSpec.initValue, PersistencyKeyValuePair.initValue, Port DefinedArgumentValue.value, PortPrototypeBlueprintInitValue.value, RecordValueSpecification.field, *StateManagementCompareCondition*.compareValue, SwDataDefProps.invalidValue, VariableData Prototype.initValue			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
argument (ordered)	CompositeValue Specification	*	aggr	This represents the collection of aggregated Value Specifications. The last ValueSpecification in the collection shall be taken to execute the filling rule. **Tags:** xml.sequenceOffset=30
compound Primitive Argument (ordered)	CompositeRuleBased ValueArgument	*	aggr	This represents the collection of aggregated Value Specifications for compound primitive data type. The last ValueSpecification in the collection shall be taken to execute the filling rule. **Tags:** xml.sequenceOffset=35
maxSizeToFill	PositiveInteger	0..1	attr	If a rule is chosen which does not fill until the end, this determines until which size the rule shall fill the values. **Tags:** xml.sequenceOffset=40
rule	Identifier	0..1	attr	This denotes the name of the rule of the RuleBasedValue Specification. The rule determines the calculation specification according which the arguments are used to calculated the values. **Tags:** xml.sequenceOffset=20

Table 5.136: CompositeRuleBasedValueSpecification

[constr_1928] Existence of CompositeRuleBasedValueSpecification.rule

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each CompositeRuleBasedValueSpecification, attribute rule shall exist.⌋

[constr_1929] Existence of CompositeRuleBasedValueSpecification.argument

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈For each CompositeRuleBasedValueSpecification, the aggregation of CompositeValueSpecification in the role argument shall exist.⌋

An example of the definition of a RuleBasedValueSpecification for primitive elements of an array in Chapter B.3.9.

It is not foreseen that an ArrayValueSpecification consists of a collection of CompositeRuleBasedValueSpecification or even a mixture of CompositeRuleBasedValueSpecification with another kind of ValueSpecification.

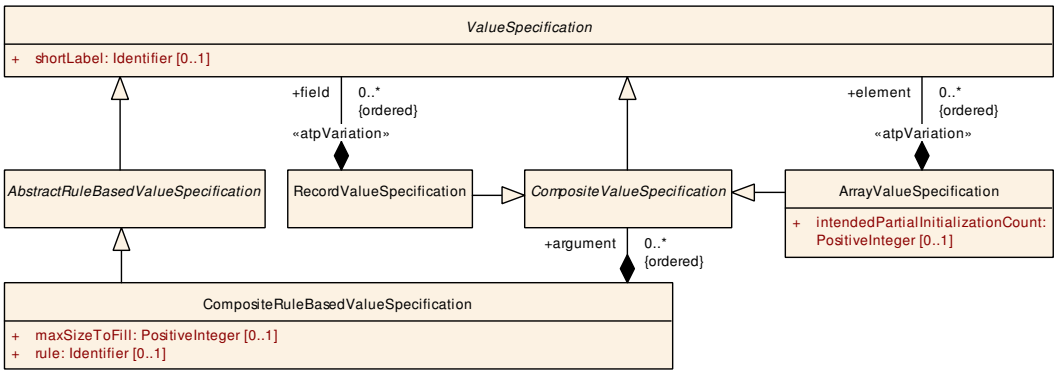

Figure 5.89: Rule-based value specification of arrays of a composite data type

[constr_1755] Aggregation of CompositeRuleBasedValueSpecification

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈Each ArrayValueSpecification shall only aggregate at most one CompositeRuleBasedValueSpecification in the role element.

If one CompositeRuleBasedValueSpecification is aggregated then it shall be the only aggregated element, i.e. no further ValueSpecification shall exist in the same aggregation where an CompositeRuleBasedValueSpecification is aggregated.⌋

An example for the definition of a CompositeRuleBasedValueSpecification can be found in Chapter B.3.10.

5.6.9.3 Support for compound primitive Data Types

The CompositeRuleBasedValueSpecification also supports the rule-based initialization of arrays[23] that are typed by a Compound Primitive Data Type, e.g. of category CURVE.

[TPS_SWCT_01836] Attributes of CompositeRuleBasedValueSpecification

⌈Meta-class CompositeRuleBasedValueSpecification can be used to fulfill two distinct use cases:

- Definition of a rule-based value specification for an array of composite data type based on the aggregation of CompositeValueSpecification in the role argument.
- Definition of a rule-based value specification for an array of Compound Primitive Data Type based on the aggregation of CompositeRuleBasedValueArgument in the role compoundPrimitiveArgument.

[23] Of course, this capability is restricted to ApplicationArrayDataType. On the level of ImplementationDataType, ValueSpecifications that reflect the structure of the respective ImplementationDataType are used.

⌋

[constr_10075] Existence of `CompositeRuleBasedValueSpecification.argument` vs. `compoundPrimitiveArgument`

Imposition time: CP: `IT_CpgExe`

⌈For every `CompositeRuleBasedValueSpecification`, at most one of the aggregations

- `argument`
- `compoundPrimitiveArgument`

⌋

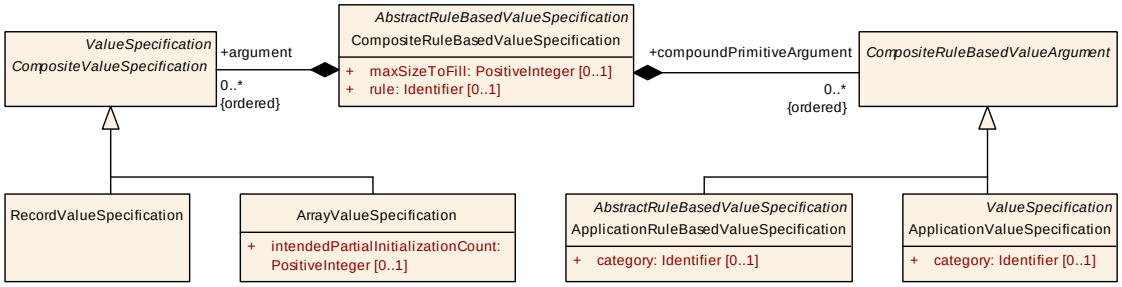

Figure 5.90: Rule-based value specification for compound primitive data objects

Class	***CompositeRuleBasedValueArgument*** (abstract)			
Note	This meta-class has the ability to serve as the abstract base class for ValueSpecifications that can be used for compound primitive data types.			
Base	*ARObject*			
Subclasses	ApplicationRuleBasedValueSpecification, ApplicationValueSpecification			
Aggregated by	CompositeRuleBasedValueSpecification.compoundPrimitiveArgument			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 5.137: CompositeRuleBasedValueArgument

A simplified example for the rule-based initialization of an array of an `ApplicationPrimitiveDataType` of `category CURVE` with an integrated axis in Chapter B.3.10.

5.7 Initial Values

5.7.1 Overview

[TPS_SWCT_01301] Importance of initial values ⌈If the value of a `VariableDataPrototype`/`ParameterDataPrototype` has not properly been set by a piece of software, it can still happen that another piece of software tries to access the value of the `VariableDataPrototype`/`ParameterDataPrototype`.

For various reasons, it is therefore advisable to be able to specify an initial value for a VariableDataPrototype/ParameterDataPrototype in case the value has not been assigned in a controlled manner. However, the definition of an initial value in many cases depends on a context in which the value is accessed.⌋

Therefore, the AUTOSAR standard foresees means for defining initial values for VariableDataPrototypes/ParameterDataPrototypes on different conceptual levels.

That is, although defined for the same VariableDataPrototype/ParameterDataPrototype, an initial value defined on one conceptual level can "supersede" the definition of another initial value on a different conceptual level provided that the priority of the first is higher than the priority of the latter.

The meaning of "supersede" in this context is that the definition of an initial value on a specific conceptual level is the only relevant definition of an initial value on that level.

[TPS_SWCT_01518] Priority of initial value definition with respect to conceptual levels ⌈Any initial value defined in the context of a conceptual level of lower priority is ignored.⌋

[TPS_SWCT_01855] Definition of initial value for data transmission ⌈Initial values for sender/receiver-based data transmission (i.e. intra-Ecu as well as inter-Ecu) shall only be defined through NonqueuedSenderComSpec.initValue resp. NonqueuedReceiverComSpec.initValue. Any definition of an initValue defined in the context of VariableDataPrototype shall be ignored.⌋

[TPS_SWCT_01182] Conceptual levels for the definition of initial values ⌈The following conceptual levels for the definition of initial values exist:

1. It is possible to aggregate an initValue directly at the definition of any VariableDataPrototype/ParameterDataPrototype. A restriction applies, refer to [TPS_SWCT_01855].
2. It is possible to aggregate an initValue at the level of a ComSpec, namely:
   - NonqueuedSenderComSpec
   - NonqueuedReceiverComSpec
   - ParameterProvideComSpec
   - ParameterRequireComSpec
   - NvRequireComSpec
   - NvProvideComSpec
3. It is possible to aggregate a implInitValue and an applInitValue at the definition of a CalibrationParameterValue.

The priority of one definition of an initial value over another is reflected by the numerical order of the above enumeration, e.g. a definition on level 3 supersedes a definition on level 2.⌋

5.7.2 Initial Value Representation

[TPS_SWCT_01183] Actual value of an initValue shall be interpreted according to the AutosarDataType ⌈A DataPrototype can be typed by either an ApplicationDataType or else an ImplementationDataType. Therefore, the actual value of an initValue shall be interpreted according to the AutosarDataType that types the DataPrototype.

That is, if the DataPrototype is typed by an ApplicationDataType, the value shall be interpreted as a physical value while, if the DataPrototype is typed by an ImplementationDataType, the value is to be interpreted as the direct numerical representation.⌋

[TPS_SWCT_01184] ApplicationPrimitiveDataTypes with category VALUE ⌈In the case of ApplicationPrimitiveDataTypes with category VALUE it is sufficient if the initValues are provided as physical values only, because the RTE Generator should be able to evaluate the related CompuMethod appropriately.⌋

DataPrototypes that refer to CompuMethods of category SCALE_LINEAR_AND_TEXTTABLE (or similar) shall be initialized through the definition of several ApplicationValueSpecification.swValueCont.swValuesPhys.vtf.

Depending on the evaluation of the binding expression either a numerical value or a string is taken to initialize the DataPrototype.

[TPS_SWCT_01185] initValues for Compound Primitive Data Types ⌈The definition of initValues in the numerical representation for Compound Primitive Data Type is done such that the initValues shall be provided as a RecordValueSpecification respectively an ArrayValueSpecification or NumericalRuleBasedValueSpecification matching to the related ImplementationDataType. The additional representation can be provided and associated through a ConstantSpecificationMapping.⌋

The definition of Compound Primitive Data Type can be found in Chapter 5.6.

[constr_1221] DataPrototype is typed by an ApplicationPrimitiveDataType

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈If a DataPrototype is typed by an ApplicationPrimitiveDataType, its initValue shall be provided by an ApplicationValueSpecification.

If the underlying ApplicationPrimitiveDataType represents an enumeration, the value provided shall match one of the applicable text values (vt, shortLabel, symbol) defined by the applicable CompuScales.⌋

Several attributes of meta-class CompuScale can be taken to describe the actual value. It is therefore necessary to clarify what happens if several of these attributes exist within the context of one CompuScale. This clarification can be found in [TPS_SWCT_01696].

[constr_1385] DataPrototype is typed by an ImplementationDataType

Imposition time: CP: IT_CpgExe

⌈If a DataPrototype is typed by an ImplementationDataType, its initValue shall **not** be provided by an ApplicationValueSpecification.⌋

[constr_1222] category of an AutosarDataType used to type a DataPrototype is set to STRING

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈If the category of an AutosarDataType used to type a DataPrototype is set to STRING, the ApplicationValueSpecification used to initialize the DataPrototype shall be of category STRING.⌋

[constr_1223] DataPrototype is typed by an ApplicationRecordDataType

Imposition time: CP: IT_CpgExe, AP: IT_BefAraApiGen

⌈If a DataPrototype is typed by an ApplicationRecordDataType, the corresponding initValue shall be provided by a RecordValueSpecification.⌋

[constr_1224] DataPrototype is typed by an ApplicationArrayDataType

Imposition time: CP: IT_CpgExe

⌈If a DataPrototype is typed by an ApplicationArrayDataType, the corresponding initValue shall be provided by an ArrayValueSpecification (that may contain an ApplicationRuleBasedValueSpecification).⌋

[constr_10439] Initialization of a DataPrototype typed by a Compound Primitive Data Type

Imposition time: CP: IT_CpgExe

⌈If a DataPrototype that is typed by a Compound Primitive Data Type according to [TPS_SWCT_01179] needs to be initialized by a constant value, then the initialization shall only be provided in the form of an ApplicationValueSpecification.⌋

5.7.3 Initial Values For Calibration Parameters

[TPS_SWCT_01188] Definition of calibration data sets through RTE-generator and compiler ⌈It is possible to provide sets of initial values for calibration parameters which are instance specific, thus overriding any initial values predefined by a `ParameterDataPrototype`, `ParameterRequireComSpec` or a `ParameterProvideComSpec`.

This allows the calibration data sets to be created through RTE-generator and compiler. These initial values are specified in `CalibrationParameterValueSet` and `CalibrationParameterValue`. The latter aggregates a `ValueSpecification` in two different roles:

- `applInitValue` for data structured according to `ApplicationDataType`. In this case the values are defined in the physical domain.
- `implInitValue` for data structured according to `ImplementationDataType`. In this case the values are defined in the numerical domain.

⌋

Furthermore, these initial values can be imported from e.g. an ASAM CDF file.

Class	**CalibrationParameterValue**			
Note	Specifies instance specific calibration parameter values used to initialize the memory objects implementing calibration parameters in the generated RTE code. RTE generator will use the implInitValue to override the initial values specified for the DataPrototypes of a component type. The applInitValue is used to exchange init values with the component vendor not publishing the transformation algorithm between ApplicationDataTypes and ImplementationDataTypes or defining an instance specific initialization of components which are only defined with ApplicationDataTypes. Note: If both representations of init values are available these need to represent the same content. Note further that in this case an explicit mapping of ValueSpecification is not implemented because calibration parameters are delivered back after the calibration phase.			
Base	*ARObject*			
Aggregated by	CalibrationParameterValueSet.calibrationParameterValue			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
applInitValue	ValueSpecification	0..1	aggr	This is the initial value specification structured according to the ApplicationDataType **Tags:** atp.Splitkey=applInitValue
implInitValue	ValueSpecification	0..1	aggr	This is the initial value specification structured according to the ImplementationDataType **Tags:** atp.Splitkey=implInitValue
initialized Parameter	FlatInstanceDescriptor	0..1	ref	This represents the parameter that is initialized by the CalibrationParameterValue. **Tags:** atp.Splitkey=initializedParameter This Attribute is only used by the AUTOSAR Classic Platform.

Table 5.138: CalibrationParameterValue

Class	**CalibrationParameterValueSet**			
Note	Specification of a constant that can be part of a package, i.e. it can be defined stand-alone. **Tags:** atp.recommendedPackage=CalibrationParameterValueSets			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
calibration ParameterValue	CalibrationParameter Value	*	aggr	This represents single CalibrationParameterValues in the CalibrationParameterValueSet. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=calibrationParameterValue, calibration ParameterValue.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

Table 5.139: CalibrationParameterValueSet

[constr_1933] Existence of the role `CalibrationParameterValue.initializedParameter`

Imposition time: CP: `IT_CpgExe`

⌈For each `CalibrationParameterValue`, the reference to meta-class `Constant-Specification` in the role `initializedParameter` shall exist.⌋

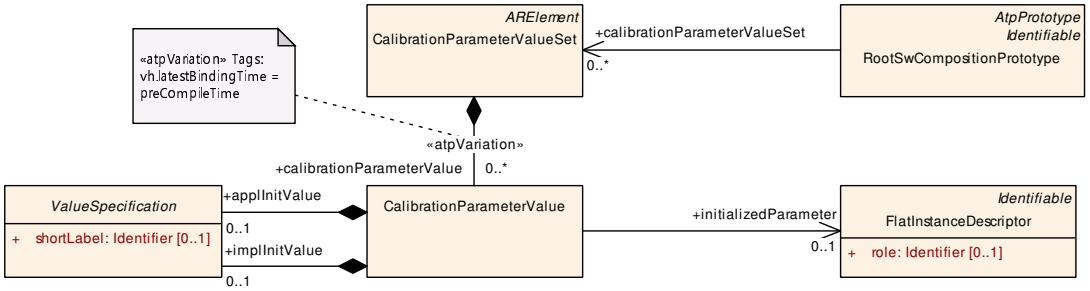

Figure 5.91: Calibration Parameter Values

5.7.4 Initial Value for optional Element

The existence of optional elements in a given `AutosarDataType` needs to be properly considered for the definition of an initial value.

5.7.4.1 Initial Value for optional Application Record Element

The initial value for a given `DataPrototype` typed by an `ApplicationRecord-DataType` is defined through a `RecordValueSpecification`.

[TPS_SWCT_01823] Definition of ValueSpecification for an ApplicationRecordDataType with unavailable optional elements ⌈If an ApplicationRecordDataType contains ApplicationRecordElements where attribute isOptional is set to true, it is still necessary that the corresponding RecordValueSpecifications fulfill [constr_1271], i.e. a ValueSpecification shall be provided for optional elements that are unavailable as far as the ValueSpecification is concerned.

The canonical approach to fulfill [constr_1271] is to fill the place in the structure that represents a non-available optional element of the structure with a special kind of ValueSpecification (the NotAvailableValueSpecification) in order to unambiguously convey the information that this element is not available for the specific DataPrototype, as far as the initial value is concerned.⌋

The statement made by [TPS_SWCT_01823] is to be interpreted such that the NotAvailableValueSpecification shall represent the place of the non-available ApplicationRecordElement in the enclosing ApplicationRecordDataType, even if the data type of the non-available ApplicationRecordElement is a composite data type (e.g. an ApplicationRecordDataType).

This understanding is sketched in a bare-bones model example:

Example 5.4

```
<CONSTANT-SPECIFICATION>
  <SHORT-NAME>DoThis</SHORT-NAME>
  <VALUE-SPEC>
    <RECORD-VALUE-SPECIFICATION>
      <FIELDS>
        <APPLICATION-VALUE-SPECIFICATION></APPLICATION-VALUE-SPECIFICATION>
        <NOT-AVAILABLE-VALUE-SPECIFICATION></NOT-AVAILABLE-VALUE-SPECIFICATION>
        <APPLICATION-VALUE-SPECIFICATION></APPLICATION-VALUE-SPECIFICATION>
      </FIELDS>
    </RECORD-VALUE-SPECIFICATION>
  </VALUE-SPEC>
</CONSTANT-SPECIFICATION>
```

Listing 5.2: Intended application of NotAvailableValueSpecification

In other words, NotAvailableValueSpecification is not limited to a primitive "leaf" element. NotAvailableValueSpecification can be applied on any level of a composite ValueSpecification.

There is **no need for delegating** the actual nature of the ValueSpecification **down to the leaf element**, as sketched in the following model excerpt:

Example 5.5

```
<CONSTANT-SPECIFICATION>
  <SHORT-NAME>DontDoThis</SHORT-NAME>
  <VALUE-SPEC>
    <RECORD-VALUE-SPECIFICATION>
      <FIELDS>
        <APPLICATION-VALUE-SPECIFICATION></APPLICATION-VALUE-SPECIFICATION>
        <RECORD-VALUE-SPECIFICATION>
          <FIELDS>
            <NOT-AVAILABLE-VALUE-SPECIFICATION></NOT-AVAILABLE-VALUE-SPECIFICATION>
```

```
            <NOT-AVAILABLE-VALUE-SPECIFICATION></NOT-AVAILABLE-VALUE-SPECIFICATION>
          </FIELDS>
        </RECORD-VALUE-SPECIFICATION>
        <APPLICATION-VALUE-SPECIFICATION></APPLICATION-VALUE-SPECIFICATION>
      </FIELDS>
    </RECORD-VALUE-SPECIFICATION>
  </VALUE-SPEC>
</CONSTANT-SPECIFICATION>
```

Listing 5.3: This application of `NotAvailableValueSpecification` is not intended

[TPS_SWCT_01821] Semantics of primitive attribute `NotAvailableValueSpecification.defaultPattern` ⌈The usage of `NotAvailableValueSpecification` explicitly defines that no specific initialization value shall be defined for an optional element.

The memory area occupied by the `NotAvailableValueSpecification` shall however be filled with a deterministic pattern during initialization.

The content of `defaultPattern` shall be used to fill the gap in the memory occupied by an optional element with `NotAvailableValueSpecification` initialization.⌋

[TPS_SWCT_01822] Application of primitive attribute `NotAvailableValueSpecification.defaultPattern` happens only during initialization ⌈The value of `NotAvailableValueSpecification.defaultPattern` is applied only during the initialization of the respective `DataPrototype`.

Therefore, if the optional element is not received during a specific reception, the memory area is untouched. It is the duty of the application to check whether that optional element has actually been received.⌋

[constr_10005] Existence of attribute `NotAvailableValueSpecification.defaultPattern`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈For each `NotAvailableValueSpecification`, attribute `defaultPattern` shall exist.⌋

[constr_10006] Valid interval of attribute `NotAvailableValueSpecification.defaultPattern`

Imposition time: CP: `IT_CpgExe`, AP: `IT_BefAraApiGen`

⌈The valid interval for attribute `NotAvailableValueSpecification.defaultPattern` is 0..255.⌋

5.7.4.2 Initial Value for optional Implementation Data Type Element

[TPS_SWCT_01785] Initial value for `ImplementationDataType` of `category STRUCTURE` where attribute `isStructWithOptionalElement` set to the value

true ⌈If an initial value is to be provided for an ImplementationDataType of category STRUCTURE where attribute isStructWithOptionalElement set to the value true then an initial value shall be defined for all ImplementationDataTypeElements including the first ImplementationDataTypeElement where the shortName is set to the value availabilityBitfield.⌋

[TPS_SWCT_01786] Initial value for the ImplementationDataTypeElement where the shortName is set to the value availabilityBitfield ⌈The initial value for the ImplementationDataTypeElement where the shortName is set to the value availabilityBitfield shall be defined in a way that the bit that represents the existence of a given element is set to true if the element shall initially be available.

If the corresponding element shall not be initially available then the respective bit shall be set to false.⌋

[TPS_SWCT_01787] Initialization of not-available ImplementationDataTypeElement ⌈If a given ImplementationDataTypeElement is not available in the context of the definition of an initial value, then a "dummy" initial value shall be defined anyway for the element in order to not break [constr_1272].

The provided ValueSpecification shall be considered as "don't care".⌋

From the perspective of performance, it is recommended to use the value 0 (on the level of a leaf element) for an initialization according to [TPS_SWCT_01787] of non-available ImplementationDataTypeElement.

The usage of a NotAvailableValueSpecification is limited to the context of ApplicationDataType. Consequently, the "dummy" initial value mentioned in [TPS_SWCT_01787] shall not be implemented as an NotAvailableValueSpecification, see [constr_10415].

[constr_10415] Initial value on the level of an ImplementationDataTypeElement where attribute isOptional is set to the value True

Imposition time: CP: IT_CpgExe

⌈The initial value used on the level of an ImplementationDataTypeElement where attribute isOptional is set to the value True shall **not** be initialized using a NotAvailableValueSpecification.⌋

6 Compatibility

6.1 Introduction

In order to connect PortPrototypes of SwComponentTypes, the compatibility of PortPrototypes needs to be verified. This section defines the basic rules for formal compatibility of PortPrototypes.

Compatibility will be defined bottom-up, i.e. first the rules for compatible AutosarDataTypes are set up, then the rules for the different types of PortInterfaces are derived.

Another aspect of compatibility is whether two model-elements (e.g. ApplicationDataType vs. ImplementationDataType) can be mapped to each other.

For the compatibility of PortInterfaces basically two options apply:

1. finding of matching pairs of elements of PortInterfaces is based on matching shortName plus the application of compatibility rules for their attributes.
2. a PortInterfaceMapping can be taken to declare two elements of PortPrototypes as compatible without applying further formal checks.

6.2 Compatibility of Data Types

The AUTOSAR meta-model defines a number of meta-classes (e.g. ApplicationPrimitiveDataType) that eventually refer to a set of attributes (e.g. a lower boundary for its values) relevant for compatibility checking.

Instantiating a data-type related meta-class defines a data type on M1 level (e.g. *temperatureType*). In other words: ApplicationPrimitiveDataType is an M2 artifact; it is taken as the template for creating a corresponding M1 artifact *temperatureType*.

In this context, the issue of compatibility refers to the M1 objects, i.e. the instances of sub-classes of AutosarDataType need to be considered. For this purpose the relevant part of the AUTOSAR meta-model needs to be fully explored with respect to compatibility.

6.2.1 Application Data Type

6.2.1.1 Application Primitive Data Type

[constr_1047] Compatibility of ApplicationPrimitiveDataTypes

Imposition time: CP: IT_RteGen

⌈Instances of ApplicationPrimitiveDataType are compatible if and only if one of the following conditions applies:

1. All the following sub conditions apply:
   (a) They have the same category.
   (b) The swDataDefProps (after consideration of [constr_1015]) attached to the M1 data types are compatible.
2. In the context of using the ApplicationPrimitiveDataType, a DataPrototypeMapping exists that refers to a DataPrototype typed by one of the ApplicationPrimitiveDataTypes in the role firstDataPrototype and to another DataPrototype typed by the other ApplicationPrimitiveDataType in the role secondDataPrototype.
3. In the context of using the ApplicationPrimitiveDataType, a DataPrototypeMapping exists that refers to a DataPrototype typed by the ApplicationPrimitiveDataType in the role secondDataPrototype and to another DataPrototype typed by an ApplicationCompositeDataType in the role firstDataPrototype and additionally for the side of the ApplicationCompositeDataType a corresponding ApplicationCompositeDataTypeSubElementRef exists in the role firstElement that in turn references an ApplicationCompositeElementDataPrototype.

⌋

The meaning of "swDataDefProps attached to the M1 data types are compatible" is explained in Chapter 6.2.4.

It is **not** required that the shortNames of two data types shall be identical in order to consider the two data types as compatible.

6.2.1.2 Application Composite Data Type

An instance of an ApplicationRecordDataType is never compatible with an instance of an ApplicationArrayDataType **unless** a PortInterfaceMapping exists that details the terms of compatibility (see [TPS_SWCT_01543]).

[constr_1048] Compatibility of ApplicationRecordDataTypes

Imposition time: CP: IT_RteGen

⌈Instances of ApplicationRecordDataTypes are compatible if and only if one of the following conditions applies:

1. All elements *at the same record position* are of compatible AutosarDataTypes (either ApplicationCompositeDataTypes or ApplicationPrimitiveDataTypes).
2. For each ApplicationRecordDataType.element, the attribute isOptional shall either
   - not exist on both sides or

- be set to the value `false` if it only exists on one side or
- have the identical value on both sides.

3. In the context of a DataPrototypeMapping, for each ApplicationRecordElement of the required ApplicationRecordDataType a SubElementMapping exists such that a ApplicationCompositeDataTypeSubElementRef in the role firstElement or secondElement exists that references the required ApplicationRecordElement **and** a corresponding ApplicationCompositeDataTypeSubElementRef exists in the **other** role (i.e. secondElement or firstElement) that in turn references an ApplicationRecordElement of the provided ApplicationRecordDataType.

⌋

[constr_1049] Compatibility of ApplicationArrayDataTypes

Imposition time: CP: IT_RteGen

⌈Instances of ApplicationArrayDataType are compatible if and only if one of the following conditions applies:

1. All the following sub conditions apply:
   (a) Their elements are of compatible AutosarDataTypes (either ApplicationCompositeDataTypes or ApplicationPrimitiveDataTypes).
   (b) The attributes maxNumberOfElements and arraySizeSemantics (given the existence) have identical values.
2. In the context of a DataPrototypeMapping, for the ApplicationArrayElement of the required ApplicationArrayDataType a SubElementMapping exists such that a ApplicationCompositeDataTypeSubElementRef in the role firstElement or secondElement exists that references the required ApplicationArrayElement **and** a corresponding ApplicationCompositeDataTypeSubElementRef exists in the **other** role (i.e. secondElement or firstElement) that in turn references an ApplicationArrayElement of the provided ApplicationArrayDataType.

⌋

6.2.2 Implementation Data Type

[constr_10667] Simple compatibility of ImplementationDataTypes

Imposition time: CP: IT_RteGen

⌈Instances of ImplementationDataType are compatible if, after all type-references are resolved, all of the following rules apply:

1. They have the same `category`.
2. They have the identical structure (this refers to `ImplementationDataTypeElement` and their `subElement`s).
3. The attributes `arraySize` and `arraySizeSemantics` have (given the existence) identical values.
4. For each `ImplementationDataType.subElement`, the attribute `isOptional` shall either
   - not exist on both sides or
   - be set to the value `false` if it only exists on one side or
   - have the identical value on both sides.
5. The `swDataDefProps` (after consideration of [constr_1015]) attached to the M1 data types are compatible.

⌋

[constr_1050] Extended compatibility of `ImplementationDataType`s

Imposition time: CP: `IT_RteGen`

⌈Instances of `ImplementationDataType` are compatible if and only if after all type-references are resolved one of the following rules applies:

1. The two `ImplementationDataType`s are compatible according to [constr_10667].
2. In the context of using the `ImplementationDataType`, a `DataPrototypeMapping` exists that refers to a `DataPrototype` typed by one of the `ImplementationDataType`s in the role `firstDataPrototype` and to another `DataPrototype` typed by the other `ImplementationDataType` in the role `secondDataPrototype`.
3. In the context of using the `ImplementationDataType`, a `DataPrototypeMapping` exists that refers to a `DataPrototype` typed by the `ImplementationDataType` in the role `secondDataPrototype` and to another `DataPrototype` typed by an `ImplementationDataType` with a `subElement` in the role `firstDataPrototype` and additionally for the side of the `ImplementationDataType` with a `subElement` a corresponding `ImplementationDataTypeSubElementRef` exists in the role `firstElement` that in turn references an `ImplementationDataTypeElement`.

⌋

The meaning of "`swDataDefProps` attached to the M1 data types are compatible" is explained in Chapter 6.2.4.

It is **not** required that the `shortName`s of two data types shall be identical in order to consider the two data types as compatible.

The following constraint applies for the case that mode manager and mode user are using different ImplementationDataTypes. From the point of view of the RTE there is only the necessity that all possible numbers used to represent ModeDeclarations of the mode manager need to fit into the range of the data type used for the mode user.

[constr_1168] Compatibility of ImplementationDataTypes used in the ModeRequestTypeMap

Imposition time: CP: IT_RteGen

⌈Both ImplementationDataTypes shall fulfill [constr_1167].

In addition to that, the possible numbers used for representing ModeDeclarations on the side of the mode manager shall match the supported range of the ImplementationDataType used for representing ModeDeclarations on the side of the mode user (see [constr_1075]).⌋

6.2.3 Compatibility of Software Base Type

[constr_1220] Compatibility of SwBaseType

Imposition time: CP: IT_RteGen

⌈Two SwBaseTypes are compatible if and only if attributes

- baseTypeSize respectively
- byteOrder,
- memAlignment,
- baseTypeEncoding, and
- nativeDeclaration

have identical values.⌋

6.2.4 Compatibility of Software Data Definition Properties

[constr_1051] Compatibility of SwDataDefProps

Imposition time: CP: IT_RteGen

⌈SwDataDefProps are compatible if and only if:

1. They refer to compatible Unit definitions, or neither of them has an associated Unit.
2. They refer to compatible conversion methods or neither of them associates such a method.

3. They both aggregate a ValueSpecification in the role invalidValue or neither of them aggregates a ValueSpecification in the role invalidValue.
4. If existent (see previous condition), one of the following conditions applies to ValueSpecifications aggregated in the role invalidValue for being considered compatible (after following and resolving indirections created by ConstantReference):
   (a) both are ApplicationValueSpecifications and the values are compatible according to [TPS_GST_02501].
   (b) both are NumericalValueSpecifications and the values are compatible according to [TPS_GST_02501].
   (c) both are TextValueSpecifications and the values are identical.
   (d) both are ArrayValueSpecifications and the values are effectively identical, e.g. if one ArrayValueSpecification specifies all values explicitly and the other ArrayValueSpecification specifies values based on a rule then the yield of both ArrayValueSpecifications (i.e. element for element) shall be identical.
   (e) both are RecordValueSpecifications and the values are identical.
   (f) if one is a NumericalValueSpecification and the other one is an ApplicationValueSpecification then the check for compatibility shall apply the CompuMethod on the physical value such that a comparison on the implementation level becomes possible. [TPS_GST_02501] applies[1].
5. They refer to compatible data constraints dataConstr.
6. They refer to compatible swRecordLayouts
7. They refer to compatible swTextProps, or neither of them references SwTextProps in the role swTextProps.

All other attributes (e.g. swCalibrationAccess do not affect compatibility).⌋

Compatible conversion methods are described in Chapter 6.2.4.5.

6.2.4.1 Compatibility of Units

[constr_1052] Compatibility of Units

Imposition time: CP: IT_RteGen

⌈Two Unit definitions are compatible if and only if:

[1] if one is a NumericalValueSpecification and the other one is an ApplicationValueSpecification and the application of the CompuMethod on the side of the ApplicationValueSpecification does not yield a valid number, a comparison is not possible.

1. They have compatible (see [TPS_GST_02501]) values of attributes factorSiToUnit and offsetSiToUnit.
2. One of the following conditions is fulfilled:
   - They refer to compatible definitions of PhysicalDimension.
   - Neither of them associates a PhysicalDimension.
   - One Unit refers to a PhysicalDimension with shortName NoDimension where all exponents are set to 0 and the other Unit does not refer to a PhysicalDimension.

⌋

The case of two referenced PhysicalDimensions with the shortName NoDimension is handled by [constr_1053].

Furthermore, it is **not** required that the shortNames of two Units shall be identical in order to consider the two units as compatible.

[TPS_SWCT_01492] Default values for factorSiToUnit and offsetSiToUnit
⌈The default value of attribute Unit.factorSiToUnit is 1.

The default value of attribute Unit.offsetSiToUnit is 0.⌋

Further constraints apply specifically for the handling of Units in the context of assigning a ValueSpecification to a given AutosarDataPrototype:

[constr_1391] Compatibility of Units in the context of assignment using an ApplicationValueSpecification

Imposition time: CP: IT_CpgExe

⌈If an ApplicationValueSpecification is used in the context of an assignment to an AutosarDataPrototype, then the ApplicationValueSpecification.swValueCont.unit shall be compatible with the Unit used in the definition of the given AutosarDataPrototype, i.e. AutosarDataType.swDataDefProps.unit.⌋

[constr_1392] Compatibility of Units in the context of assignment using an ApplicationRuleBasedValueSpecification

Imposition time: CP: IT_CpgExe

⌈If an ApplicationRuleBasedValueSpecification is used in the context of an assignment to an AutosarDataPrototype then the ApplicationRuleBasedValueSpecification.swValueCont.unit shall be compatible with the Unit used in the definition of the given AutosarDataPrototype, i.e. AutosarDataType.swDataDefProps.unit.⌋

[constr_1393] Existence of `RuleBasedValueCont.unit`

Imposition time: CP: `IT_CpgExe`

⌈For every `RuleBasedValueCont`, the reference `unit` shall exist.⌋

[constr_1771] Existence of `SwValueCont.unit`

Imposition time: CP: `IT_CpgExe`

⌈For every `SwValueCont`, the reference `unit` shall exist⌋

6.2.4.2 Compatibility of Physical Dimensions

[constr_1053] Compatibility of `PhysicalDimension`s in the context of the creation of a `SwConnector`

Imposition time: CP: `IT_RteGen`

⌈In the context of the creation of a `SwConnector`, two `PhysicalDimension` definitions are compatible if and only if the values of

- `lengthExp`
- `massExp`
- `timeExp`
- `currentExp`
- `temperatureExp`
- `molarAmountExp`
- `luminousIntensityExp`

are identical and **either**

- the `shortName`s are identical **or**
- a `PhysicalDimensionMapping` exists that maps one of the `PhysicalDimension`s in the role `firstPhysicalDimension` and the other `PhysicalDimension` in the role `secondPhysicalDimension`.

⌋

[constr_10610] Compatibility of `PhysicalDimension`s in the context is the creation of an `ApplicationValueSpecification`

Imposition time: CP: `IT_CpgExe`

⌈In the context of the creation of an `ApplicationValueSpecification`, two `PhysicalDimension` definitions are compatible if and only if the values of

- `lengthExp`
- `massExp`

- timeExp
- currentExp
- temperatureExp
- molarAmountExp
- luminousIntensityExp

are identical and **either**

- the shortNames are identical **or**
- a PhysicalDimensionMapping exists that maps one of the PhysicalDimensions in the role firstPhysicalDimension and the other PhysicalDimension in the role secondPhysicalDimension.

⌋

For clarification, there are physical dimensions that share the identical values for the exponents but still have a completely different meaning and shall therefore not be considered compatible.

For precisely this reason [constr_1053] and [constr_10610] **require** the shortNames of two PhysicalDimensions to be identical as a prerequisite for compatibility.

For example, there are at least two physical dimensions that share the values of

- lengthExp = 2
- massExp = 1
- timeExp = -2
- currentExp = 0
- temperatureExp = 0
- molarAmountExp = 0
- luminousIntensityExp = 0

The unit described by this set of exponents is usually referred to as “Nm” for *newton-meter* and it can be used for *torque* just as well as for *energy*. Obviously, two Units shall never be considered compatible if one refers to *torque* and the other one refers to *energy*.

6.2.4.3 Compatibility of Data Constraints

The compatibility of two DataConstrs depends on the context in which the owning data elements are connected:

[constr_1126] Compatibility of DataConstrs

Imposition time: CP: IT_RteGen

⌈The DataConstr (e.g. the limits) defined by the type of the providing data element shall be within the constraints defined by the type of the requiring data element.

For client-server communication, the following rules apply:

- For arguments with attribute direction set to the value in, the client shall take the role of the *provider* and the server shall take the role of the *requiring side*.
- For arguments with attribute direction set to the value inout the DataConstr shall be equal on both sides.
- For arguments with attribute direction set to the value out, the server shall take the role of the *provider* and the client shall take the role of the *requiring side*.

⌋

In addition, it is always allowed that the requiring element defines no constraints.

[constr_1278] PhysConstrs references a Unit

Imposition time: CP: IT_RteGen

⌈DataConstrs are only compatible if the DataConstr.dataConstrRule.physConstrs.unit are compatible or neither DataConstr.dataConstrRule.physConstrs.unit exist.⌋

[constr_1054] No DataConstr available at the provider

Imposition time: CP: IT_RteGen

⌈If the provider defines no constraints, it is only compatible with a receiver which also defines no constraints at all.⌋

In other words, this is not a compatibility rule for the types but for the data prototypes.

6.2.4.4 Compatibility in the Case of ImplementationDataType

If the SwDataDefProps are owned by an ImplementationDataType, further conditions shall be met to ensure compatibility.

Note that depending on the category of the ImplementationDataType, at most one of these four constraints is actually relevant:

1. category **VALUE**:

   [constr_1055] ImplementationDataType has category VALUE

   Imposition time: CP: IT_CpgExe

   ⌈The attributes baseType shall refer to a compatible SwBaseType.⌋

(see explanation in the following rule). The rules regarding the compatibility of SwBaseTypes are covered by [constr_1220].

2. category **TYPE_REFERENCE**:

   [constr_1056] ImplementationDataType has category TYPE_REFERENCE

   Imposition time: CP: IT_CpgExe

   ⌈The ImplementationDataTypes referenced by the attributes SwDataDefProps.implementationDataType shall be compatible.⌋

3. category **DATA_REFERENCE**:

   [constr_1057] ImplementationDataType has category DATA_REFERENCE

   Imposition time: CP: IT_CpgExe

   ⌈The attributes SwDataDefProps.swPointerTargetProps shall have identical targetCategory and shall refer to SwDataDefProps where all attributes are identical.⌋

   (in other words, the target types of the pointers shall be identical, not only compatible).

4. category **FUNCTION_REFERENCE**:

   [constr_1058] ImplementationDataType has category FUNCTION_REFERENCE

   Imposition time: CP: IT_CpgExe

   ⌈The attributes SwDataDefProps.swPointerTargetProps.functionPointerSignature shall refer to BswModuleEntrys which each resolve to the **same function signature**.⌋

   The term “same signature” refers to the following predicates:

   - same number of arguments
   - return values and arguments shall have **identical** - not only *compatible* - data types

Two SwBaseTypes are compatible (in the sense of allowing a connection of ports via the RTE) if a simple conversion rule exists between the two types in the underlying programming language.

Admittedly, this is a rather weak condition. But because the definition of SwBaseTypes can contain a nativeDeclaration it is not possible to state this rule more specifically.

However, conversion between base types is considered as a less common use case than the simple case that the connected types just contain two identical SwBaseTypes (which is of course included in the rule).

In addition, the existence of ApplicationDataTypes also constrains the possible SwBaseTypes via the compatibility rules for the mapping between ApplicationDataTypes and ImplementationDataType as will be explained in more detail in Chapter 6.2.5.

6.2.4.5 Compatibility of Compu Methods

[constr_1163] Compatibility of CompuMethods

Imposition time: CP: IT_RteGen

⌈Two CompuMethod definitions are compatible if and only if all attributes **except**

- shortName
- desc
- introduction
- longName
- adminData
- annotation
- displayFormat

are **identical and** the compuScales and units are compatible.⌋

[constr_1153] Applicability of compatibility requirements for CompuScales

Imposition time: CP: IT_RteGen

⌈Compatibility requirements for CompuScales shall only apply for CompuScales where the category of the enclosing CompuMethod is one of the following:

- TEXTTABLE
- SCALE_LINEAR_AND_TEXTTABLE
- SCALE_RATIONAL_AND_TEXTTABLE
- TAB_NOINTP
- BITFIELD_TEXTTABLE
- LINEAR
- RAT_FUNC
- IDENTICAL

⌋

[constr_1154] Compatibility of CompuScales for sender-receiver communication and similar use cases

Imposition time: CP: IT_RteGen

⌈For sender-receiver communication and similar use cases, it is required that the set of CompuScales defined in the CompuMethod of the provider of the communication (i.e. on the side of the PPortPrototype) shall be a subset of the set of CompuScales defined in the CompuMethod on the required side (i.e. on the side of the RPortPrototype).⌋

[constr_1155] Compatibility of CompuScales for client-server communication

Imposition time: CP: IT_RteGen

⌈For client-server communication, the following rules apply:

For arguments of direction IN the CompuScales defined in the CompuMethod of the client (i.e. on the side of the RPortPrototype) shall be a subset of the set of CompuScales defined in the CompuMethod supported at the server (i.e. on the side of the PPortPrototype).

For arguments of the direction OUT the set of CompuScales defined in the CompuMethod of the server (i.e. on the side of the PPortPrototype) shall be a subset of the set of CompuScales defined in the CompuMethod supported at the client (i.e. on the side of the RPortPrototype).

For arguments of direction INOUT the set of CompuScales defined in the CompuMethod of server and client shall be identical.⌋

[constr_1156] Relevance of "names" of CompuScales

Imposition time: CP: IT_RteGen

⌈CompuScales which contribute to tabular conversion by having a compuConst are compatible **if and only if** the "names" of the compuScales, (namely shortLabel, vt and symbol, according to the priority rules communicated in [TPS_SWCT_01431]) are equal.

If the scale has no compuConst, "names" of CompuScales are not relevant for compatibility.⌋

[TPS_SWCT_01842] Applicability of constraints of CompuScales ⌈The constraints [constr_1154], [constr_1155], and [constr_1156] shall **only** apply in the absence of a TextTableMapping which shall take precedence regarding the compatibility if it exists.⌋

[constr_1176] Compatibility of CompuScales of category LINEAR and RAT_FUNC

Imposition time: CP: IT_RteGen

⌈CompuScales of category LINEAR and RAT_FUNC are considered compatible if they yield the same conversion.⌋

For example, $\frac{n_0+n_1*phys}{d_0+d_1*phys}$ is compatible with $\frac{N_0+N_1*phys}{D_0}$ if $n_0 \sim N_0$ && $n_1 \sim N_1$ && $d_0 \sim D_0$ && $d_1 \sim 0$.

Note that $\sim$ indicates compatibility of numerical values according to [TPS_GST_02501].

[constr_1192] Compatibility of "IDENTICAL" to "RAT_FUNC" or "LINEAR"

Imposition time: CP: IT_RteGen

⌈Similar to [constr_1176], a CompuScale where the category of the enclosing CompuMethod is set to IDENTICAL is considered compatible with a CompuScale where the category of the enclosing CompuMethod is set to RAT_FUNC or LINEAR if the following rule applies:

$$int = \frac{N_0+N_1*phys+N_i*phys^i}{D_0+D_1*phys+D_i*phys^i} = phys$$

⌋

For example, this is the case for

$N_0 \sim 0$ && $D_0 \sim 1$ && $N_1 \sim 1$ && $D_1 \sim 0$ && $N_i \sim D_i \sim 0 \; \forall i > 1$.

The compatibility does not depend on the direction (compuInternalToPhys vs. compuPhysToInternal) of CompuMethods of category LINEAR.

6.2.4.6 Software Text Properties

For the case of exchanging a textual string between a source and a target end, it is important to understand the criteria for the string on the source side to properly make it into the target.

In other words, the compatibility of SwTextProps with each other needs to be clarified. For example, it would be problematic to (without further processing or conversion) provide a *UTF-16BE*-encoded string to a target end that expects a *UTF-8* encoding.

[constr_10632] Compatibility of SwTextProps

Imposition time: CP: IT_RteGen

⌈Two SwTextProps are compatible **if and only if** they have identical values of attributes

- arraySizeSemantics
- swMaxTextSize

and the following attributes of the reference in the role baseType are identical:

- baseTypebaseTypeDefinition.baseTypeEncoding
- baseTypebaseTypeDefinition.baseTypeSize
- baseTypebaseTypeDefinition.byteOrder

⌋

This means that [constr_1220] is not applicable to an SwBaseType referenced by an SwTextProps.

6.2.5 Compatibility of Application Data Type and Implementation Data Type

The usage of ApplicationDataTypes implies that also a corresponding ImplementationDataType exists at a certain point in time. The ImplementationDataType is required as the basis for configuring and generating the RTE and/or contract phase header files.

[TPS_SWCT_01461] Existence of ImplementationDataType ⌈The existence of ImplementationDataTypes is **not** required until the methodology step of generating an RTE or executing the RTE contract phase. Before arriving at this step in the methodology, it is perfectly feasible to use only ApplicationDataTypes for describing the semantics of software-components.⌋

As a consequence, it is necessary to define compatibility rules that unambiguously clarify the conformance of an ApplicationDataType with an ImplementationDataType and vice versa.

This kind of compatibility also supports situations where e.g. a dataElement typed by an ApplicationDataType without a corresponding ImplementationDataType in a PPortPrototype should be connected to a dataElement typed by an ImplementationDataType in an RPortPrototype.

In general, the compatibility rules for allowing a data type mapping are the same as the rules for connections. Exceptions are explicitly stated in the rules below.

Several rules depend on the category of the data types.

6.2.5.1 General Rule

As a general rule, if an ImplementationDataType of category TYPE_REFERENCE is targeted by a type mapping or port connection, all the rules given below apply to the ImplementationDataType which is finally valid after resolving all such references.

This is not repeated in all rules. As an example, if we say that something can be mapped/connected to an ImplementationDataType of category VALUE, then this shall include the possibility of mapping/connecting to an ImplementationDataType of category TYPE_REFERENCE which refers to another ImplementationDataType of category VALUE.

6.2.5.2 Category VALUE

[constr_1059] Compatibility of data types with `category VALUE`

Imposition time: CP: `IT_RteGen`

⌈An `ApplicationDataType` of `category VALUE` shall (after all indirections created by `ImplementationDataType`s of `category TYPE_REFERENCE` are resolved) only be mapped/connected to an `ImplementationDataType` which also has `category VALUE`.⌋

In this case, the `ImplementationDataType.baseType` shall be able to express all the numerical values required by the `ApplicationDataType`, see Figure 5.31.

This condition is fulfilled if the numerical range which can be expressed by the `SwBaseType` at least covers the range defined by the limits in `ApplicationDataType.swDataDefProps.dataConstr` (which are either internal limits or physical limits to be converted via the `CompuMethod` which also shall be provided by the `ApplicationDataType`).

Note that for sender-receiver communication of a data element via a network there is the possibility to reduce the numerical range against what has been defined via the corresponding data type. However, this is not achieved via mapping to another `ImplementationDataType` at the data element itself but via the `networkRepresentation` of the `ComSpec` (for further explanation of this aspect see Chapter 4.6.1).

6.2.5.3 Category ARRAY, VAL_BLK

[constr_1060] Compatibility of data types with `category ARRAY`, `VAL_BLK`

Imposition time: CP: `IT_CpgExe`

⌈

ApplicationDataType	**ImplementationDataType: Array of uint8**	**ImplementationDataType: Array of other**
`ApplicationArrayDataType` of `category ARRAY`, `VAL_BLK`, `arraySizeSemantics` = `fixedSize`	`ImplementationDataType` of `category ARRAY`, with `ImplementationDataTypeElement` with `arraySizeSemantics` = `fixedSize`	`ImplementationDataType` of `category ARRAY`, with `ImplementationDataTypeElement` with `arraySizeSemantics` = `fixedSize`
`ApplicationArrayDataType` of `category ARRAY`, `VAL_BLK`, `arraySizeSemantics` = `variableSize`	`ImplementationDataType` of `category ARRAY`, with `ImplementationDataTypeElement` with `arraySizeSemantics` = `variableSize` or `Variable-Size Array Data Type`	`Variable-Size Array Data Type`

⌋

In this case, the array size, the `arraySizeSemantics` (given that it exists) and the type of the array elements of the `ImplementationDataType` shall be such that they can be mapped/transferred 1:1 by order to the corresponding application data and vice versa.

Note that in the case of mapping between arrays, it is not required that a DataTypeMap exists between the data types of the array elements or that the respective shortNames are identical.

6.2.5.4 Category STRUCTURE

[constr_1061] Compatibility of data types with category STRUCTURE

Imposition time: CP: IT_CpgExe

⌈An ApplicationDataType of category STRUCTURE shall (after all indirections created by ImplementationDataTypes of category TYPE_REFERENCE are resolved) only be mapped/connected to an ImplementationDataType of category STRUCTURE.⌋

This means that the corresponding pairs of elements shall also have compatible types. Note that it is not required that the data types of the single elements have identical shortNames or that a DataTypeMap exists for each pair of single element.

[constr_1662] Compatibility of ApplicationRecordDataType and ImplementationDataType that both represent an Optional Element Structure

Imposition time: CP: IT_CpgExe

⌈An ApplicationRecordDataType that represents an Optional Element Structure shall (after all indirections created by ImplementationDataTypes of category TYPE_REFERENCE are resolved) only be mapped/connected to an ImplementationDataType of category STRUCTURE that represents an Optional Element Structure if corresponding pairs of elements have the same value of the attribute isOptional.⌋

6.2.5.5 Category BOOLEAN

[constr_1063] Compatibility of data types with category BOOLEAN

Imposition time: CP: IT_CpgExe

⌈An ApplicationDataType of category BOOLEAN shall (after all indirections created by ImplementationDataTypes of category TYPE_REFERENCE are resolved) only be mapped/connected to an ImplementationDataType of category VALUE.⌋

6.2.5.6 Category COM_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, CUBE_5

[constr_1064] Compatibility of data types with category COM_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, or CUBE_5

Imposition time: CP: IT_CpgExe

⌈An ApplicationDataType of category

- COM_AXIS,
- RES_AXIS,
- CURVE,
- MAP,
- CUBOID,
- CUBE_4, or
- CUBE_5

shall (after all indirections created by ImplementationDataTypes of category TYPE_REFERENCE are resolved) only be mapped/connected to an ImplementationDataType of category

- STRUCTURE or
- ARRAY.

⌋

There are several possibilities to express these types via plain or nested arrays and/or structures on implementation level.

Some examples are given in Chapter 5.4.4. In any case, the primitive elements of the implementation type shall fit (by their order in memory) to the corresponding SwRecordLayout.

It is not required to define DataTypeMaps for the sub-elements of both representations.

6.2.5.7 Forbidden Mappings

[constr_1066] Forbidden mappings to ImplementationDataType

Imposition time: CP: IT_CpgExe

⌈An ApplicationDataType shall never be mapped to

- an ImplementationDataType of category
  - UNION,

  - DATA_REFERENCE, or
  - FUNCTION_REFERENCE,
- or to an ImplementationDataType that contains subElements of category
  - UNION,
  - DATA_REFERENCE, or
  - FUNCTION_REFERENCE.

⌋

Concerning the SwDataDefProps of an ApplicationDataType instance or an ImplementationDataType instance which shall be mapped/connected on M1, see [constr_1015]. The following rules apply:

1. The cases where the ImplementationDataType is not allowed to set a property but only "inherits" it from the ApplicationDataType are not relevant for compatibility. These attributes are simply not allowed in the ImplementationDataType.
2. In the case that only the ImplementationDataType may "define" the property, this definition shall fit into the semantic requirements given by the ApplicationDataType in order to make the two types compatible.

   This is namely important for the attribute baseType and is explained above in the rule for types of category VALUE.
3. In the case that the ImplementationDataType may "add" a property, it may only add but not change a property defined by the ApplicationDataType (namely note, displayFormat, and swImplPolicy) in order to be compatible.

   This means that the respective computation methods can be defined in only one of the types in order to be compatible. In all other cases, only the ApplicationDataType may define the computation method.
4. For the compatibility with respect to connectors there are additional rules for the values of the attribute swImplPolicy which are considered general rules on the level of DataPrototypes and PortInterfaces.

   Therefore, these additional rules are explained in Chapter 6.3 and Chapter 6.4.4.
5. The case that an ImplementationDataType may "redefine" a property which is already set by the ApplicationDataType is not considered as relevant for the compatibility with respect to mapping of the types in general but of course there may be project specific rules as to which redefinition is allowed (e.g. for swAddrMethod or dataConstr). See also Chapter 5.5.4 about data constraints.

6. For the compatibility with respect to connectors the attribute dataConstr shall be treated in the same way as for compatibility of data types in general, for more details, refer to Chapter 6.2.4.

6.3 Compatibility of Variable Data Prototypes and Parameter Data Prototypes

[constr_1068] Compatibility of VariableDataPrototypes or ParameterDataPrototypes typed by primitive data types

Imposition time: CP: IT_RteGen

⌈Two VariableDataPrototypes or ParameterDataPrototypes of ApplicationPrimitiveDataTypes or ImplementationDataTypes of category VALUE, BOOLEAN, or STRING are compatible if and only if one of the following conditions applies:

1. All the following subconditions apply:
   (a) They are typed by (read "refer to") compatible AutosarDataTypes
   (b) The two VariableDataPrototypes or ParameterDataPrototypes have identical shortNames. This is required to map VariableDataPrototypes in unordered SenderReceiverInterfaces, NvDataInterfaces and ParameterInterfaces.
   (c) The attribute swImplPolicy is either set to queued for both or none of the VariableDataPrototypes.
2. In the context of a DataPrototypeMapping, one of the applicable VariableDataPrototypes or ParameterDataPrototypes is referenced by the DataPrototypeMapping in the role firstDataPrototype and the other VariableDataPrototypes or ParameterDataPrototypes is referenced by the same DataPrototypeMapping in the role secondDataPrototype.

⌋

[constr_1187] Compatibility of VariableDataPrototypes or ParameterDataPrototypes typed by composite data types

Imposition time: CP: IT_RteGen

⌈

DataPrototypes of ApplicationCompositeDataTypes or ImplementationDataTypes of category STRUCTURE or ARRAY are compatible if one of the following conditions evaluates to true:

1. The underlying ApplicationCompositeDataTypes or ImplementationDataTypes of category STRUCTURE or ARRAY are identical

2. The underlying ApplicationCompositeDataTypes or ImplementationDataTypes of category STRUCTURE or ARRAY fulfill the following condition:
   - They consist of the same number of elements **and**
   - They are composed of compatible AutosarDataTypes (either ApplicationCompositeDataTypes or ImplementationDataTypes of category STRUCTURE or ARRAY **OR** ApplicationPrimitiveDataTypes or ImplementationDataTypes of category VALUE, BOOLEAN, or STRING) in *the same order* **and**
   - All attributes match exactly, except for the shortName of the M1 AutosarDataType.
3. In the context of a DataPrototypeMapping, for each ApplicationCompositeElementDataPrototype of the required DataPrototype a SubElementMapping exists such that a ApplicationCompositeDataTypeSubElementRef in the role firstElement or secondElement exists that references the required ApplicationCompositeElementDataPrototype **and** a corresponding ApplicationCompositeDataTypeSubElementRef exists in the **other** role (i.e. secondElement or firstElement) that in turn references an ApplicationCompositeElementDataPrototype of the provided ApplicationCompositeDataType.
4. If and only if the DataPrototype is **not** typed by an ApplicationDataType but by an ImplementationDataType: in the context of a DataPrototypeMapping, for each ImplementationDataTypeElement of the required DataPrototype a SubElementMapping exists such that a ImplementationDataTypeSubElementRef in the role firstElement or secondElement exists that references the required ImplementationDataTypeElement **and** a corresponding ImplementationDataTypeSubElementRef exists in the **other** role (i.e. secondElement or firstElement) that in turn references an ImplementationDataTypeElement of the provided ImplementationDataType.

⌋

6.4 Compatibility of Sender Receiver Interfaces, Parameter Interfaces and Non Volatile Data Interfaces

This compatibility requirement only ensures static correctness, which means that logical consistency is not assured (e.g. that a receiver shall process a certain data value to correctly interpret the following values).

6.4.1 Connection of Required and Provided Port via AssemblySwConnector

The compatibility of SenderReceiverInterfaces, NvDataInterfaces and ParameterInterfaces is considered when connecting PortPrototypes with an AssemblySwConnector.

[constr_1069] Compatibility of PortPrototypes of different DataInterfaces in the context of AssemblySwConnectors

Imposition time: CP: IT_RteGen

⌈PortPrototypes of different DataInterfaces are compatible if and only if

1. One of the following conditions applies:
   (a) For each VariableDataPrototype or ParameterDataPrototype defined in the context of the DataInterface of the required PortPrototype a compatible (see [constr_1068]) VariableDataPrototype or ParameterDataPrototype exists in the DataInterface of the provided PortPrototype.

   The shortNames of VariableDataPrototypes and ParameterDataPrototypes are used to identify the pair.

   (b) A VariableAndParameterInterfaceMapping.dataMapping exists for which the following conditions apply:

      i. It is referenced by the corresponding SwConnector.

      ii. It references one of the two VariableDataPrototypes or ParameterDataPrototypes in the role firstDataPrototype and the other in the role secondDataPrototype.

2. For each such pair, the values of their isService attributes are identical.

⌋

The constraint [constr_1071] defines which PortInterface elements are compatible depending on the PortInterface type and the swImplPolicy attributes of the PortInterface elements.

6.4.2 Connection of Inner and Outer Port via DelegationSwConnector

The compatibility of SenderReceiverInterfaces, NvDataInterfaces and ParameterInterfaces is considered for connecting of PortPrototypes with a DelegationSwConnector.

[constr_1070] Compatibility of PortPrototypes of different DataInterfaces in the context of DelegationSwConnectors

Imposition time: CP: IT_RteGen

⌈PortPrototypes of different DataInterfaces are compatible if and only if

1. One of the following conditions applies:
   (a) For each VariableDataPrototype or ParameterDataPrototype defined in the context of the DataInterface of the required inner PortPrototype a compatible VariableDataPrototype or ParameterDataPrototype exists in the DataInterface of the required outer PortPrototype.

   The shortName of VariableDataPrototypes and ParameterDataPrototypes are used to identify the pair.

   [constr_1071] defines which PortInterface elements are compatible depending on the PortInterface type and the swImplPolicy attributes of the PortInterface elements.

   (b) A VariableAndParameterInterfaceMapping.dataMapping exists for which the following conditions apply:

      i. It is referenced by the corresponding SwConnector.

      ii. It references one of the two VariableDataPrototypes or ParameterDataPrototypes in the role firstDataPrototype and the other in the role secondDataPrototype.

2. One of the following conditions applies:
   (a) For at least one VariableDataPrototype or ParameterDataPrototype defined in the context of the SenderReceiverInterface, NvDataInterface or ParameterInterface of the provided inner PortPrototype, a compatible VariableDataPrototype or ParameterDataPrototype exists in the SenderReceiverInterface, NvDataInterface or ParameterInterface of the provided outer PortPrototype.

   The shortNames of VariableDataPrototypes and ParameterDataPrototypes are used to identify the pair.

   [constr_1071] defines which PortInterface elements are compatible depending on the PortInterface type and the swImplPolicy attributes of the PortInterface elements.

   (b) A VariableAndParameterInterfaceMapping.dataMapping exists for which the following conditions apply:

      i. It is (if a corresponding SwConnector already exists) referenced by the corresponding SwConnector.

ii. It references one of the two VariableDataPrototypes or ParameterDataPrototypes in the role firstDataPrototype and the other in the role secondDataPrototype.

3. For each such pair, the values of their isService attributes are identical.
4. For each such pair, either
   (a) no meta-data are defined on both sides or
   (b) both sides define a SenderReceiverInterface.metaDataItemSet and the content of the aggregated MetaDataItemSet is identical on both sides.

   In this context, "identical" means that the respective MetaDataItemSets define ordered collections of MetaDataItems where the corresponding MetaDataItem.metaDataItemType.value have identical content.

⌋

6.4.3 Connection of Required and Provided Port via PassThroughSwConnector

[constr_1248] Compatibility of PortPrototypes of different DataInterfaces in the context of a PassThroughSwConnector

Imposition time: CP: IT_RteGen

⌈PortPrototypes of different DataInterfaces are considered compatible if and only if

1. For **at least one** VariableDataPrototype or ParameterDataPrototype defined in the context of the DataInterface of the required outer PortPrototype a compatible VariableDataPrototype or ParameterDataPrototype exists in the DataInterface of the provided outer PortPrototype.

   Either the shortName of VariableDataPrototypes and ParameterDataPrototypes are used to identify the pair **or** a PortInterfaceMapping exists that defines which differently named elements of PortInterfaces correlate with each other.
2. For each such pair, the values of the PortInterface.isService attributes are identical.

⌋

The constraint [constr_1071] defines which elements of PortInterface are considered compatible depending on the type of PortInterface as well as the attribute swImplPolicy of the elements of PortInterfaces.

6.4.4 Compatibility of ParameterDataPrototype and VariableDataPrototype depending on PortInterface Type

Table [constr_1071] contains a comprehensive description of which combinations of `ParameterDataPrototype` and `VariableDataPrototype` used in `PortPrototype`s typed by various kinds of `PortInterface`s are considered compatible.

[constr_1071] compatibility of `ParameterDataPrototype` and `VariableDataPrototype`

Imposition time: CP: `IT_RteGen`

⌈

Provided Port Required Outer Port Provided Inner Port Required Outer Port			Required Port / Required Inner Port / Provided Outer Port / Provided Outer Port					
`PortInterface`			Prm			S/R		NvD
Interface Element			PDP			VDP		VDP
		`SwImplPolicyEnum`	`fixed`	`const`	`standard`	`standard`	`queued`	`standard`
Prm	PDP	`fixed`	yes	yes	yes	yes	no	yes
		`const`	no	yes	yes	yes	no	yes
		`standard`	no	no	yes	yes	no	yes
S/R	VDP	`standard`	no	no	no	yes	no	yes
		`queued`	no	no	no	no	yes	no
NvD	VDP	`standard`	no	no	no	yes	no	yes

⌋

Legend for Table inside [constr_1071]

Interface Element i.e. elements of `PortInterface`

PDP `ParameterDataPrototype`

VDP `VariableDataPrototype`

Port Interface i.e. kind of `PortInterface`

Prm `ParameterInterface`

S/R `SenderReceiverInterface`

NvD `NvDataInterface`

[constr_1071] defines which `PortInterface` elements are compatible depending on the kind of `PortInterface` and the `swImplPolicy` attributes of the `PortInterface` elements.

[constr_1287] Compatibility of `SenderReceiverInterface`s with respect to `invalidationPolicy`

Imposition time: CP: `IT_RteGen`

⌈`VariableDataPrototype`s defined in the context of the `SenderReceiverInterface` are only compatible if the `invalidationPolicy`s have the same value.⌋

[TPS_SWCT_01567] Default behavior for `invalidationPolicy` ⌈For `VariableDataPrototype`s and `ParameterDataPrototype`s in the context of `NvDataInterface` respectively `ParameterInterface`, the `invalidationPolicy` is treated like “Invalidation is switched off” (`dontInvalidate`).⌋

6.5 Compatibility of Mode Switch Interfaces

This compatibility requirement only ensures static correctness, which means that logical consistency is not assured (e.g. that a receiver shall process a certain data value to correctly interpret the following values).

Note that, concerning the compatibility of `ModeSwitchInterface`s, it is necessary to distinguish between the context of an `AssemblySwConnector`, the context of an `DelegationSwConnector`, and the context of a `PassThroughSwConnector`.

6.5.1 Connection of Required and Provided Port via AssemblySwConnector

Here, the compatibility of `ModeSwitchInterface`s is considered for the context of an `AssemblySwConnector`.

[constr_1072] Compatibility of `ModeSwitchInterface`s in the context of an `AssemblySwConnector`

Imposition time: CP: `IT_RteGen`

⌈`PortPrototype`s of different `ModeSwitchInterface`s are compatible if and only if

1. One of the following conditions applies:
   (a) For the `ModeDeclarationGroupPrototype` defined in the context of the `ModeSwitchInterface` of the required `PortPrototype` a compatible `ModeDeclarationGroupPrototype` exists in the `ModeSwitchInterface` of the provided `PortPrototype`.
   (b) A `ModeInterfaceMapping.modeMapping` exists for which the following conditions apply:
      i. It is referenced by the corresponding `SwConnector`.
      ii. It references one of the two `ModeDeclarationGroupPrototype`s in the role `firstModeGroup` and the other in the role `secondModeGroup`.
2. For each such pair, the values of their `isService` attributes are identical.

⌋

6.5.2 Connection of Inner and Outer Port via DelegationSwConnector

Here, the compatibility of ModeSwitchInterfaces is considered for the context of a DelegationSwConnector.

[constr_1073] Compatibility of ModeSwitchInterfaces in the context of an DelegationSwConnector

Imposition time: CP: IT_RteGen

⌈PortPrototypes of different ModeSwitchInterfaces are compatible if and only if

1. One of the following conditions applies:
   (a) For the ModeDeclarationGroupPrototype defined in the context of the ModeSwitchInterface of the inner PortPrototype a compatible ModeDeclarationGroupPrototype exists in the ModeSwitchInterface of the outer PortPrototype.
   (b) A ModeInterfaceMapping.modeMapping exists for which the following conditions apply:
      i. It is referenced by the corresponding SwConnector.
      ii. It references one of the two ModeDeclarationGroupPrototypes in the role firstModeGroup and the other in the role secondModeGroup.
2. For each such pair, the values of their isService attributes are identical.

⌋

6.5.3 Connection of Outer and Outer Port via PassThroughSwConnector

[constr_1249] Compatibility of ModeSwitchInterfaces in the context of a PassThroughSwConnector

Imposition time: CP: IT_RteGen

⌈PortPrototypes of different ModeSwitchInterfaces are considered compatible if and only if

1. For the ModeDeclarationGroupPrototype defined in the context of the ModeSwitchInterface of the required outer PortPrototype a compatible ModeDeclarationGroupPrototype exists in the ModeSwitchInterface of the provided outer PortPrototype.

   Either the shortNames of the ModeDeclarationGroupPrototypes are used to identify the pair **or** a ModeInterfaceMapping exists that maps the corresponding ModeDeclarationGroupPrototypes.

2. For each such pair, the values of the PortInterface.isService attributes are identical.

⌋

6.6 Compatibility of Mode Declaration Group Prototypes

[constr_1074] Compatibility of ModeDeclarationGroupPrototypes

Imposition time: CP: IT_RteGen

⌈

ModeDeclarationGroupPrototypes are compatible if and only if one of the following conditions applies:

1. They are typed by (read “refer to”) compatible ModeDeclarationGroups.
2. A ModeDeclarationGroupPrototypeMapping exists that identifies the differently named ModeDeclarationGroupPrototypes that correlate with each other. [constr_1210] applies.

⌋

6.7 Compatibility of Mode Declaration Groups

[constr_1075] Compatibility of ModeDeclarationGroups

Imposition time: CP: IT_RteGen

⌈ModeDeclarationGroups are compatible if and only if one of the following conditions applies:

1. All the following subconditions apply:
   (a) They define an identical number of ModeDeclarations.
   (b) Each ModeDeclaration on the required side corresponds to a ModeDeclaration on the provided side with an identical shortName.
   (c) The initialModes on both sides refer to ModeDeclarations with identical shortNames.
   (d) The attribute in the role ModeDeclarationGroup.modeUserErrorBehavior.errorReactionPolicy has identical values on both sides.
   (e) The attribute in the role ModeDeclarationGroup.modeManagerErrorBehavior.errorReactionPolicy has identical values on both sides.

(f) The attribute in the role ModeDeclarationGroup.modeUserErrorBehavior.defaultMode either does not exist on both sides or refers on both sides to ModeDeclarations with identical shortNames.

(g) The attribute in the role ModeDeclarationGroup.modeManagerErrorBehavior.defaultMode either does not exist on both sides or refers on both sides to ModeDeclarations with identical shortNames.

(h) one of the following subconditions applies:

- the attribute category has the value ALPHABETIC_ORDER on both sides.
- the attribute category has the value EXPLICIT_ORDER on both sides **and** the matching ModeDeclarations according to 1(b) have the identical values of the attributes ModeDeclaration.value **and** also the value of ModeDeclarationGroup.onTransitionValue matches on both sides.

2. A ModeDeclarationMapping is applied which identifies the corresponding ModeDeclarations.

In addition, the compatibility of corresponding ModeTransitions shall be checked, i.e. [constr_1194] and [constr_1245] apply.⌋

[constr_1245] Consideration of ModeTransitions for the compatibility of ModeDeclarationGroups

Imposition time: CP: IT_RteGen

⌈One of the following conditions for the consideration of ModeTransitions for the compatibility of ModeDeclarationGroups shall apply:

- **Either** the mode provider **or** the mode user define ModeTransitions.
- The ModeTransitions defined in the context of the mode provider are **identical** to the ModeTransitions defined in the context of the mode user **or** a ModeDeclarationMapping mapping is applied.

⌋

[constr_1194] Identical ModeTransitions

Imposition time: CP: IT_RteGen

⌈Two ModeDeclarationGroups contain identical modeTransitions if and only if

1. For each ModeTransition defined in the context of the mode provider one ModeTransition with the same shortName is defined in the context of the mode user.

2. Each pair of ModeTransitions in both ModeDeclarationGroups identified by their respective shortName have identical targets (in terms of the shortName of the referenced ModeDeclaration) of the references enteredMode and exitedMode.

⌋

6.8 Compatibility of Argument Prototypes

[constr_1076] Compatibility of ArgumentDataPrototypes

Imposition time: CP: IT_RteGen

⌈Two ArgumentDataPrototypes are compatible if and only if

1. They are typed by compatible AutosarDataTypes **or** a ClientServerOperationMapping.argumentMapping exists that references one ArgumentDataPrototype in the role firstDataPrototype and the other ArgumentDataPrototype in the role secondDataPrototype.
2. They have the same value of the argument direction (in, out or inout), i.e. [constr_1268] applies.

⌋

6.9 Compatibility of Application Errors

[constr_1077] Compatibility of ApplicationErrors

Imposition time: CP: IT_RteGen

⌈Two ApplicationErrors are compatible if and only if one of the following conditions applies:

1. All the following subconditions apply:
   (a) They have the same shortName.
   (b) They have the same attributes. Especially the errorCode shall be identical in both ApplicationErrors.
2. A ClientServerInterfaceMapping.errorMapping exists that references one of the ApplicationErrors in the role firstApplicationError and the other ApplicationErrors in the role secondApplicationError.

⌋

6.10 Compatibility of Client/Server Operations

[constr_1078] Compatibility of ClientServerOperations

Imposition time: CP: IT_RteGen

⌈Two ClientServerOperations are considered compatible if their signatures match. In particular, they are compatible if and only if

1. They have the same number of ArgumentDataPrototypes.
2. The n-th arguments of both ClientServerOperations are compatible. This implies an ordering of ArgumentDataPrototypes.
3. They have identical values of attribute diagArgIntegrity or the attribute diagArgIntegrity does not exist on both sides.
4. They have the same shortName (again allows for mapping in PortInterfaces).
5. The required ClientServerOperation specifies a compatible ApplicationError for each ApplicationError that is possibly raised by the provided ClientServerOperation, and possibly others. Thereby, ClientServerOperations that refer to a possibleError that represents the value E_OK are compatible with ClientServerOperations that do refer to possibleErrors where none of them represents the value E_OK.

⌋

6.11 Compatibility of Client Server Interfaces

This compatibility requirement only ensures static correctness, which means that logical consistency is not assured (e.g. that a client shall call a certain operation to allow the server to work correctly).

6.11.1 Connection of Required and Provided Port via AssemblySwConnector

[constr_1079] Compatibility of ClientServerInterfaces in the context of an AssemblySwConnector

Imposition time: CP: IT_RteGen

⌈ClientServerInterfaces are compatible if and only if

1. One of the following conditions applies:
   (a) For each ClientServerOperation defined in the context of the ClientServerInterface of the required PortPrototype a compatible ClientServerOperation exists in the ClientServerInterface

of the provided PortPrototype. The shortNames of ClientServer-Operations are used to identify the pair.

(b) A ClientServerInterfaceMapping.operationMapping exists for which the following conditions apply:

i. It is referenced by the corresponding SwConnector.

ii. It references one of the two ClientServerOperations in the role firstOperation and the other in the role secondOperation.

2. For each such pair, the values of their isService attributes are identical.

⌋

6.11.2 Connection of Inner and Outer Port via DelegationSwConnector

[constr_1080] Compatibility of ClientServerInterfaces in the context of an DelegationSwConnector

Imposition time: CP: IT_RteGen

⌈ClientServerInterfaces are compatible if and only if

1. One of the following conditions applies:

(a) For each ClientServerOperation defined in the context of the Client-ServerInterface of the required inner PortPrototype a compatible ClientServerOperation exists in the ClientServerInterface of the required outer PortPrototype. The shortNames of ClientServer-Operations are used to identify the pair.

(b) A ClientServerInterfaceMapping.operationMapping exists for which the following conditions apply:

i. It is referenced by the corresponding SwConnector.

ii. It references one of the two ClientServerOperations in the role firstOperation and the other in the role secondOperation.

2. One of the following conditions applies:

(a) For at least one ClientServerOperation defined in the context of the ClientServerInterface of the provided inner PortPrototype a compatible ClientServerOperation exists in the ClientServer-Interface of the provided outer PortPrototype. The shortNames of ClientServerOperations are used to identify the pair.

(b) A ClientServerInterfaceMapping.operationMapping exists for which the following conditions apply:

i. It is referenced by the corresponding SwConnector.

ii. It references one of the two ClientServerOperations in the role firstOperation and the other in the role secondOperation.

3. For each such pair, the values of their isService attributes are identical.

⌋

6.11.3 Connection of Outer and Outer Port via PassThroughSwConnector

[constr_1250] Compatibility of ClientServerInterfaces in the context of a PassThroughSwConnector

Imposition time: CP: IT_RteGen

⌈PortPrototypes of different ClientServerInterfaces are considered compatible if and only if

1. For **at least one** ClientServerOperation defined in the context of the ClientServerInterface of the provided outer PortPrototype a compatible ClientServerOperation exists in the ClientServerInterface of the required outer PortPrototype.

   Either the shortNames of the ClientServerOperations are used to identify the pair **or** a ClientServerInterfaceMapping exists that maps the corresponding ClientServerOperations.

2. For each such pair, the values of the PortInterface.isService attributes are identical.

⌋

6.12 Compatibility of Trigger Interfaces

This compatibility requirement only ensures static correctness, which means that logical consistency is not assured (e.g. that a client shall call a certain operation to allow the server to work correctly).

6.12.1 Connection of Required and Provided Port via AssemblySwConnector

[constr_1081] Compatibility of TriggerInterfaces in the context of an AssemblySwConnector

Imposition time: CP: IT_RteGen

⌈TriggerInterfaces are compatible if and only if

1. One of the following conditions applies:

(a) For each Trigger defined in the context of the TriggerInterface of the required PortPrototype a compatible Trigger exists in the TriggerInterface of the provided PortPrototype. The shortNames of Trigger are used to identify the pair.

(b) A TriggerInterfaceMapping.triggerMapping exists for which the following conditions apply:

i. It is referenced by the corresponding SwConnector.

ii. It references one of the two Triggers in the role firstTrigger and the other in the role secondTrigger.

2. For each such pair, the values of their isService attributes are identical.

⌋

6.12.2 Connection of Inner and Outer Port via DelegationSwConnector

[constr_1082] Compatibility of TriggerInterfaces in the context of an DelegationSwConnector

Imposition time: CP: IT_RteGen

⌈TriggerInterfaces are compatible if and only if all the following conditions apply:

1. One of the following subconditions applies:

(a) For each Trigger defined in the context of the TriggerInterface of the **required** inner PortPrototype a compatible Trigger exists in the TriggerInterface of the **required** outer PortPrototype. The shortNames of Trigger are used to identify the pair.

(b) For at least one Trigger defined in the context of the TriggerInterface of the **provided** outer PortPrototype a compatible Trigger exists in the TriggerInterface of the **provided** inner PortPrototype. The shortNames of Trigger are used to identify the pair.

(c) A TriggerInterfaceMapping.triggerMapping exists for which all the following conditions apply:

i. It is referenced by the corresponding SwConnector.

ii. It references one of the two Triggers in the role firstTrigger and the other in the role secondTrigger.

2. For each such pair, the values of their isService attributes are identical.

⌋

6.12.3 Connection of Outer and Outer Port via PassThroughSwConnector

[constr_1251] Compatibility of PortPrototypes of TriggerInterfaces in the context of a PassThroughSwConnector

Imposition time: CP: IT_RteGen

⌈PortPrototypes of different TriggerInterfaces are considered compatible if and only if

1. For **at least one** Trigger defined in the context of the TriggerInterface of the required outer PortPrototype a compatible Trigger exists in the TriggerInterface of the provided outer PortPrototype.

   Either the shortName of Triggers are used to identify the pair **or** a TriggerInterfaceMapping exists that refers to one of the Triggers in the role firstTrigger and to the other in the role secondTrigger.

2. For each such pair, the values of the PortInterface.isService attributes are identical.

⌋

6.13 Compatibility of Trigger

[constr_1083] Compatibility of Triggers

Imposition time: CP: IT_RteGen

⌈Triggers are compatible if one of the following conditions is fulfilled:

- They have an identical shortName.
- A TriggerMapping exists that references one of the Triggers in the role firstTrigger and the other Trigger in the role secondTrigger.

⌋

6.14 Entire Delegation of a Provided Port Prototype

[constr_1084] delegation of a provided outer PortPrototype

Imposition time: CP: IT_RteGen

⌈The delegation of a provided outer PortPrototype is properly defined if the following criteria are fulfilled:

1. For each VariableDataPrototype or ParameterDataPrototype present in the

   - SenderReceiverInterface,

- NvDataInterface, or
- ParameterInterface

of the provided outer PortPrototype, at least one connection via

- DelegationSwConnector to a provided inner PortPrototype **or**
- PassThroughSwConnector to a required outer PortPrototype

with a compatible VariableDataPrototype or ParameterDataPrototype in the

- SenderReceiverInterface,
- NvDataInterface, or
- ParameterInterface

of the

- provided inner PortPrototype **or**
- required outer PortPrototype

exists.

Either the shortNames of VariableDataPrototypes or ParameterDataPrototypes are used to identify the pair, or a PortInterfaceMapping defines which differently named PortInterface elements correlate with each other.

2. For each VariableDataPrototype provided by a PRPortPrototype that is typed by a

   - SenderReceiverInterface or
   - NvDataInterface

   and that is referenced in the role outerPort by a DelegationSwConnector, a corresponding VariableDataPrototype owned by an innerPort shall be provided by either

   - a PPortPrototype or
   - a PRPortPrototype.

   Either the shortNames of VariableDataPrototypes are used to identify the pair, or a PortInterfaceMapping defines which differently named PortInterface elements correlate with each other.

3. For the ModeDeclarationGroupPrototype present in the ModeSwitchInterface of the provided outer PortPrototype, exactly one connection via

   - DelegationSwConnector to a provided inner PortPrototype **or**

- PassThroughSwConnector to a required outer PortPrototype

with a compatible ModeDeclarationGroupPrototype in the ModeSwitchInterface of the

- provided inner PortPrototype **or**
- required outer PortPrototype

exists.

Either the shortNames of ModeDeclarationGroupPrototypes are used to identify the pair, or a PortInterfaceMapping defines which differently named PortInterface elements correlate with each other.

4. For each ClientServerOperation present in the ClientServerInterface of the provided outer PortPrototype, exactly one connection via

   - DelegationSwConnector to a provided inner PortPrototype **or**
   - PassThroughSwConnector to a required outer PortPrototype

   with a compatible ClientServerOperation in the ClientServerInterface of the

   - provided inner PortPrototype **or**
   - required outer PortPrototype

   exists.

   Either the shortNames of ClientServerOperations are used to identify the pair, or a PortInterfaceMapping defines which differently named PortInterface elements correlate with each other.

5. For each Trigger present in the TriggerInterface of the provided outer PortPrototype, exactly one connection via

   - DelegationSwConnector to a provided inner PortPrototype **or**
   - PassThroughSwConnector to a required outer PortPrototype

   with a compatible Trigger in the TriggerInterface of the provided

   - inner PortPrototype **or**
   - required outer PortPrototype

   exists.

   Either the shortNames of Triggers are used to identify the pair, or a PortInterfaceMapping defines which differently named PortInterface elements correlate with each other.

⌋

The constraint [constr_1071] defines which PortInterface elements are compatible depending on the kind of PortInterface and the swImplPolicy attributes of the PortInterface elements.

6.14.1 Split and Merge of PortInterface Elements

With the definition of compatibility rules in Chapter 6.4, Chapter 6.11, and Chapter 6.12, it is possible to split and distribute elements of a PortPrototype typed by a PortInterface containing a superset of PortInterface elements to PortPrototypes typed by PortInterfaces containing subsets of PortInterface elements.

Examples of splitting and merging are given in Chapter B.5.2.

6.15 Compatibility in the Case of a Flat ECU Extract

In the case of a flat ECU extract, software-component specific compatibility rules apply. To some extent, these rules contradict the rules existing for the pure VFB approach (see Chapter 6).

If the split-and-merge pattern has been applied on the creation of DelegationSwConnectors it might happen that compatibility rules defined in Chapter 6 are violated.

However, given that the flattened ECU extract has been created out of a valid CompositionSwComponentType the flattened ECU extract does not become invalid in this case. In other words, the transformation does not create an invalid model out of a valid model.

However, to support this statement it is necessary to define additional compatibility rules that properly cover this case and allow for a successful validation of the flattened ECU extract.

For the flat ECU extract the compatibility of SenderReceiverInterfaces, NvDataInterfaces, and ParameterInterfaces is considered when connecting PortPrototypes with a DelegationSwConnector.

[constr_1085] Compatibility in the case of a flat ECU extract

Imposition time: CP: IT_EcuExt

⌈PortPrototypes of different

- SenderReceiverInterfaces,
- NvDataInterfaces, and
- ParameterInterfaces

are compatible if and only if for at least one

- VariableDataPrototype or

- ParameterDataPrototype

defined in the context of the

- SenderReceiverInterfaces,
- NvDataInterfaces, and
- ParameterInterfaces

of the RPortPrototype, a compatible

- VariableDataPrototype or
- ParameterDataPrototype

exists in the

- SenderReceiverInterfaces,
- NvDataInterfaces, and
- ParameterInterfaces

of the provided PortPrototype.

The compatibility of PortInterface elements depends on the kind of PortInterface and the swImplPolicy attributes of the PortInterface elements.

Either the shortNames of VariableDataPrototypes and ParameterDataPrototypes are used to identify the pair, or a PortInterfaceMapping defines which differently named PortInterface elements correlate with each other.⌋

For clarification, [constr_1071] defines which PortInterface elements are compatible depending on the kind of PortInterface and the swImplPolicy attributes of the PortInterface elements.

In the case of the flat ECU extract, it might happen that AssemblySwConnectors that connect to a specific RPortPrototype also connect to PPortPrototypes that do not fulfill the compatibility rule specified in Chapter 6.4.1.

In particular, the dataElements might correspond to dataElements defined in the scope of different PPortPrototypes. In other words, in the flat ECU extract it is possible to merge dataElements from different providers.

7 Internal Behavior

7.1 Introduction

[TPS_SWCT_01075] **SwcInternalBehavior** ⌈SwcInternalBehavior provides means for formally defining the behavior of an AtomicSwComponentType.⌋

This chapter focuses on the description of the SwcInternalBehavior meta-class and the various meta-classes it aggregates. An overview of the meta-class is sketched in Figure 7.2. Note that SwcInternalBehavior inherits from InternalBehavior.

The role of SwcInternalBehavior in the context of an AUTOSAR software-component is depicted in Figure 7.1.

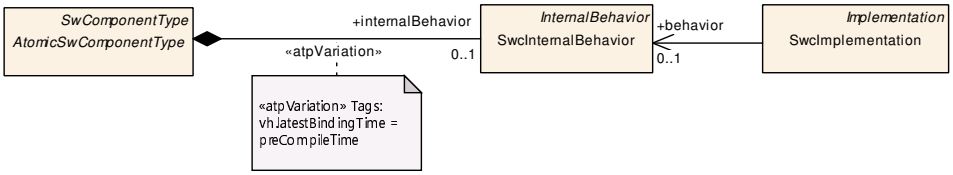

Figure 7.1: The "big picture" of SwcInternalBehavior

Class	**SwcInternalBehavior**			
Note	The SwcInternalBehavior of an AtomicSwComponentType describes the relevant aspects of the software-component with respect to the RTE, i.e. the RunnableEntitys and the RTEEvents they respond to.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *InternalBehavior*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtomicSwComponentType*.internalBehavior, *AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
arTypedPerInstanceMemory	VariableDataPrototype	*	aggr	Defines an AUTOSAR typed memory-block that needs to be available for each instance of the SW-component. This is typically only useful if supportsMultipleInstantiation is set to "true" or if the component defines NVRAM access via permanent blocks. The aggregation of arTypedPerInstanceMemory is subject to variability with the purpose to support variability in the software component's implementations. Typically different algorithms in the implementation are requiring different number of memory objects. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=arTypedPerInstanceMemory, arTypedPerInstanceMemory.shortName, arTypedPerInstanceMemory.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

▽

△

Class	SwcInternalBehavior			
event	RTEEvent	*	aggr	This is a `RTEEvent` specified for the particular `SwcInternalBehavior`. The aggregation of `RTEEvent` is subject to variability with the purpose to support the conditional existence of `RTEEvent`s. Note: the number of `RTEEvent`s might vary due to the conditional existence of `PortPrototype`s using `DataReceivedEvent`s or due to different scheduling needs of algorithms. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=event, event.shortName, event.variation Point.shortLabel vh.latestBindingTime=preCompileTime
exclusiveArea Policy	SwcExclusiveArea Policy	*	aggr	Options how to generate the ExclusiveArea related APIs. When no SwcExclusiveAreaPolicy is specified for an ExclusiveArea the default values apply. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=exclusiveAreaPolicy, exclusiveArea Policy.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
explicitInter Runnable Variable	VariableDataPrototype	*	aggr	Implement state message semantics for establishing communication among runnables of the same component. The aggregation of explicitInterRunnable Variable is subject to variability with the purpose to support variability in the software components implementations. Typically different algorithms in the implementation are requiring different number of memory objects. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=explicitInterRunnableVariable, explicitInter RunnableVariable.shortName, explicitInterRunnable Variable.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
implicitInter Runnable Variable	VariableDataPrototype	*	aggr	Implement state message semantics for establishing communication among runnables of the same component. The aggregation of implicitInterRunnable Variable is subject to variability with the purpose to support variability in the software components implementations. Typically different algorithms in the implementation are requiring different number of memory objects. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=implicitInterRunnableVariable, implicitInter RunnableVariable.shortName, implicitInterRunnable Variable.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
includedData TypeSet	IncludedDataTypeSet	*	aggr	The `includedDataTypeSet` is used by a software component for its implementation. **Tags:** atp.Splitkey=includedDataTypeSet
includedMode Declaration GroupSet	IncludedMode DeclarationGroupSet	*	aggr	This aggregation represents the included Mode DeclarationGroups **Tags:** atp.Splitkey=includedModeDeclarationGroupSet

▽

△

Class	**SwcInternalBehavior**			
instantiation DataDefProps	InstantiationDataDefProps	*	aggr	The purpose of this is that within the context of a given SwComponentType some data def properties of individual instantiations can be modified. The aggregation of InstantiationDataDefProps is subject to variability with the purpose to support the conditional existence of Port Prototypes and component local memories like "per InstanceParameter" or "arTypedPerInstanceMemory". **Stereotypes:** atpVariation **Tags:** atp.Splitkey=instantiationDataDefProps, instantiationDataDefProps.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
perInstance Memory	PerInstanceMemory	*	aggr	Defines a per-instance memory object needed by this software component. The aggregation of PerInstance Memory is subject to variability with the purpose to support variability in the software components implementations. Typically different algorithms in the implementation are requiring different number of memory objects. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=perInstanceMemory, perInstance Memory.shortName, perInstanceMemory.variation Point.shortLabel vh.latestBindingTime=preCompileTime
perInstance Parameter	ParameterData Prototype	*	aggr	Defines parameter(s) or characteristic value(s) that needs to be available for each instance of the software-component. This is typically only useful if supportsMultipleInstantiation is set to "true". The aggregation of perInstanceParameter is subject to variability with the purpose to support variability in the software components implementations. Typically different algorithms in the implementation are requiring different number of memory objects. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=perInstanceParameter, perInstance Parameter.shortName, perInstanceParameter.variation Point.shortLabel vh.latestBindingTime=preCompileTime
portAPIOption	PortAPIOption	*	aggr	Options for generating the signature of port-related calls from a runnable to the RTE and vice versa. The aggregation of PortPrototypes is subject to variability with the purpose to support the conditional existence of ports. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=portAPIOption, portAPIOption.port, port APIOption.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

▽

△

Class	SwcInternalBehavior			
runnable	RunnableEntity	*	aggr	This is a `RunnableEntity` specified for the particular `SwcInternalBehavior`. The aggregation of `RunnableEntity` is subject to variability with the purpose to support the conditional existence of `RunnableEntity`s. Note: the number of `RunnableEntity`s might vary due to the conditional existence of `PortPrototype`s using `DataReceivedEvent`s or due to different scheduling needs of algorithms. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=runnable, runnable.shortName, runnable.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
service Dependency	SwcService Dependency	*	aggr	Defines the requirements on AUTOSAR Services for a particular item. The aggregation of SwcServiceDependency is subject to variability with the purpose to support the conditional existence of ports as well as the conditional existence of ServiceNeeds. The SwcServiceDependency owned by an SwcInternal Behavior can be located in a different physical file in order to support that SwcServiceDependency might be provided in later development steps or even by different expert domain (e.g OBD expert for Obd related Service Needs) tools. Therefore the aggregation is <<atp Splitable>>. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=serviceDependency, service Dependency.shortName, serviceDependency.variation Point.shortLabel vh.latestBindingTime=preCompileTime
shared Parameter	ParameterData Prototype	*	aggr	Defines parameter(s) or characteristic value(s) shared between SwComponentPrototypes of the same Sw ComponentType The aggregation of sharedParameter is subject to variability with the purpose to support variability in the software components implementations. Typically different algorithms in the implementation are requiring different number of memory objects. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=sharedParameter, sharedParameter.short Name, sharedParameter.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
supports Multiple Instantiation	Boolean	0..1	attr	Indicate whether the corresponding software-component can be multiply instantiated on one ECU. In this case the attribute will result in an appropriate component API on programming language level (with or without instance handle).
variationPoint Proxy	VariationPointProxy	*	aggr	Proxy of a variation points in the C/C++ implementation. **Tags:** atp.Splitkey=variationPointProxy, variationPoint Proxy.shortName

Table 7.1: SwcInternalBehavior

Class	***InternalBehavior*** (abstract)			
Note	Common base class (abstract) for the internal behavior of both software components and basic software modules/clusters.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	BswInternalBehavior, SwcInternalBehavior			
Aggregated by	*AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
constant Memory	ParameterData Prototype	*	aggr	Describes a read only memory object containing characteristic value(s) implemented by this Internal Behavior. The shortName of ParameterDataPrototype has to be equal to the ''C' identifier of the described constant. The characteristic value(s) might be shared between Sw ComponentPrototypes of the same SwComponentType. The aggregation of constantMemory is subject to variability with the purpose to support variability in the software component or module implementations. Typically different algorithms in the implementation are requiring different number of memory objects. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=constantMemory, constantMemory.short Name, constantMemory.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
constantValue Mapping	ConstantSpecification MappingSet	*	ref	Reference to the ConstantSpecificationMapping to be applied for the particular InternalBehavior **Tags:** atp.Splitkey=constantValueMapping
dataType Mapping	DataTypeMappingSet	*	ref	Reference to the DataTypeMapping to be applied for the particular InternalBehavior **Tags:** atp.Splitkey=dataTypeMapping
exclusiveArea	ExclusiveArea	*	aggr	This specifies an ExclusiveArea for this InternalBehavior. The exclusiveArea is local to the component resp. module. The aggregation of ExclusiveAreas is subject to variability. Note: the number of ExclusiveAreas might vary due to the conditional existence of RunnableEntities or BswModuleEntities. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=exclusiveArea, exclusiveArea.shortName, exclusiveArea.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
exclusiveArea NestingOrder	ExclusiveAreaNesting Order	*	aggr	This represents the set of ExclusiveAreaNestingOrder owned by the InternalBehavior. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=exclusiveAreaNestingOrder, exclusiveArea NestingOrder.shortName, exclusiveAreaNesting Order.variationPoint.shortLabel vh.latestBindingTime=preCompileTime



△

Class	*InternalBehavior* (abstract)			
staticMemory	VariableDataPrototype	*	aggr	Describes a read and writeable static memory object representing measurerment variables implemented by this software component. The term "static" is used in the meaning of "non-temporary" and does not necessarily specify a linker encapsulation. This kind of memory is only supported if supportsMultipleInstantiation is FALSE. The shortName of the VariableDataPrototype has to be equal with the ''C' identifier of the described variable. The aggregation of staticMemory is subject to variability with the purpose to support variability in the software component's implementations. Typically different algorithms in the implementation are requiring different number of memory objects. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=staticMemory, staticMemory.shortName, staticMemory.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

Table 7.2: InternalBehavior

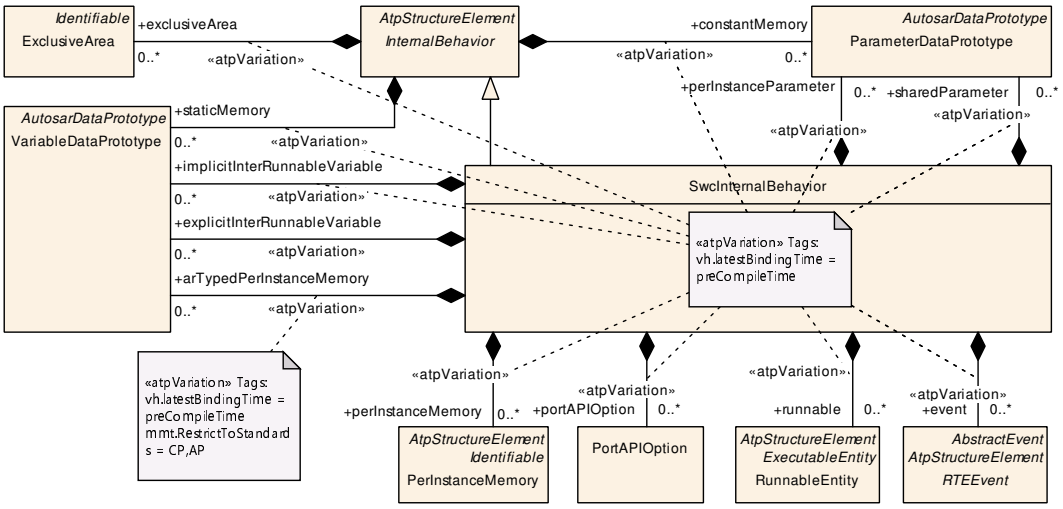

Figure 7.2: `SwcInternalBehavior`

[constr_1935] Existence of attribute `SwcInternalBehavior.supportsMultipleInstantiation`

Imposition time: CP: `IT_CpgExe`

⌈For each `SwcInternalBehavior`, attribute `supportsMultipleInstantiation` shall exist.⌋

7.2 Runnable Entity

The concept of `RunnableEntity` (more details can be found in Figure 7.3) is defined in the specification of the [3, TR Virtual Function Bus].

[TPS_SWCT_01030] **RunnableEntity** ⌈RunnableEntitys are the smallest code-fragments that are provided by a software-component and are (at least indirectly) a subject for scheduling by the underlying operating system or else (in rare cases) for execution in ISR context.⌋

[TPS_SWCT_01097] **CompositionSwComponentType cannot have RunnableEntitys** ⌈It is intentionally not possible for CompositionSwComponentType to define a SwcInternalBehavior. Consequently, CompositionSwComponentTypes do not have RunnableEntitys by themselves.⌋

[TPS_SWCT_01098] **Only AtomicSwComponentType can have RunnableEntitys** ⌈Only the AtomicSwComponentType that are populating a CompositionSwComponentType as SwComponentPrototypes may have RunnableEntitys.⌋

This correlation is depicted in Figure 7.4.

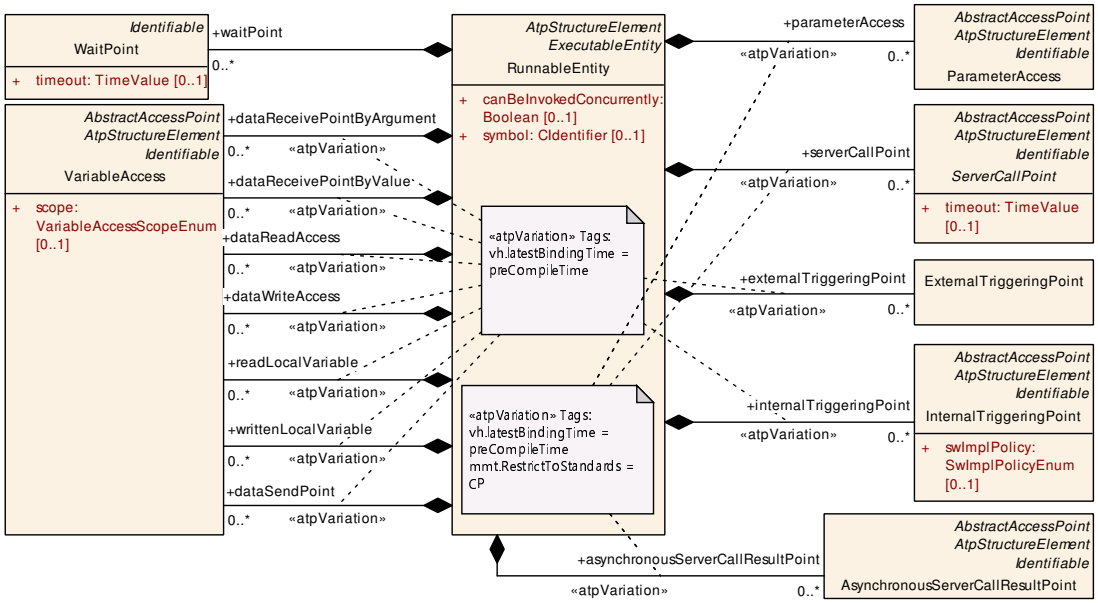

Figure 7.3: Details of RunnableEntity

Note that RunnableEntitys exist in several categories that have different properties. More explanation about categories of RunnableEntitys is given in Chapter 7.2.4.4.

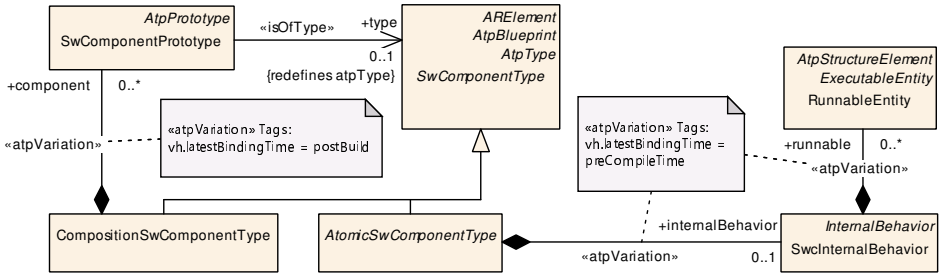

Figure 7.4: Only AtomicSwComponentTypes may have RunnableEntitys

[TPS_SWCT_01302] Semantics of `minimumStartInterval` ⌈The attribute `ExecutableEntity.minimumStartInterval` defines the time interval that the RTE will guarantee to not go below between scheduling two consecutive executions of the corresponding `RunnableEntity`.⌋

[constr_1936] Existence of attribute `RunnableEntity.symbol`

Imposition time: CP: `IT_CpgExe`

⌈For each `RunnableEntity`, attribute `symbol` shall exist.⌋

[TPS_SWCT_01303] `symbol` attribute describes the `RunnableEntity`'s entry point ⌈The `RunnableEntity.symbol` attribute is describing the `RunnableEntity`'s entry point.⌋

The implication `RunnableEntity.symbol` on the uniqueness of symbols in the scope of one `EcuInstance` is described in [constr_2025], see [9, TPS System Template].

A `RunnableEntity` inherits several attributes from its base class `ExecutableEntity` because these are also used in the [6, TPS BSW Module Description Template]. Here the following constraint applies:

[constr_4082] `RunnableEntity.reentrancyLevel` shall not be set.

Imposition time: CP: `IT_CpgExe`

⌈The optional attribute `reentrancyLevel` shall not be set for a `RunnableEntity`. This attribute would define more specific reentrancy features than the mandatory attribute `canBeInvokedConcurrently`. These features are currently only supported for Basic Software.⌋

Class	**RunnableEntity**			
Note	A `RunnableEntity` represents the smallest code-fragment that is provided by an `AtomicSwComponentType` and are executed under control of the RTE. `RunnableEntity`s are for instance set up to respond to data reception or operation invocation on a server.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *ExecutableEntity*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.runnable			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
argument (ordered)	RunnableEntityArgument	*	aggr	This represents the formal definition of an argument to a RunnableEntity.

▽

△

Class	**RunnableEntity**			
asynchronous ServerCall ResultPoint	AsynchronousServer CallResultPoint	*	aggr	The server call result point admits a runnable to fetch the result of an asynchronous server call. The aggregation of AsynchronousServerCallResultPoint is subject to variability with the purpose to support the conditional existence of client server PortPrototypes and the variant existence of server call result points in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=asynchronousServerCallResultPoint, asynchronousServerCallResultPoint.shortName, asynchronousServerCallResultPoint.variationPoint.shortLabel vh.latestBindingTime=preCompileTime This Attribute is only used by the AUTOSAR Classic Platform.
canBeInvoked Concurrently	Boolean	0..1	attr	If the value of this attribute is set to "true" the enclosing `RunnableEntity` can be invoked concurrently (even for one instance of the corresponding `AtomicSwComponentType`). This implies that it is the responsibility of the implementation of the `RunnableEntity` to take care of this form of concurrency.
dataRead Access	VariableAccess	*	aggr	RunnableEntity has implicit read access to dataElement of a sender-receiver PortPrototype or nv data of a nv data PortPrototype. The aggregation of dataReadAccess is subject to variability with the purpose to support the conditional existence of sender receiver ports or the variant existence of dataReadAccess in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dataReadAccess, dataReadAccess.shortName, dataReadAccess.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
dataReceive PointBy Argument	VariableAccess	*	aggr	RunnableEntity has explicit read access to dataElement of a sender-receiver PortPrototype or nv data of a nv data PortPrototype. The result is passed back to the application by means of an argument in the function signature. The aggregation of dataReceivePointByArgument is subject to variability with the purpose to support the conditional existence of sender receiver PortPrototype or the variant existence of data receive points in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dataReceivePointByArgument, dataReceivePointByArgument.shortName, dataReceivePointByArgument.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

▽

△

Class	**RunnableEntity**			
dataReceive PointByValue	VariableAccess	*	aggr	RunnableEntity has explicit read access to dataElement of a sender-receiver PortPrototype or nv data of a nv data PortPrototype. The result is passed back to the application by means of the return value. The aggregation of dataReceivePointBy Value is subject to variability with the purpose to support the conditional existence of sender receiver ports or the variant existence of data receive points in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dataReceivePointByValue, dataReceivePoint ByValue.shortName, dataReceivePointByValue.variation Point.shortLabel vh.latestBindingTime=preCompileTime
dataSendPoint	VariableAccess	*	aggr	RunnableEntity has explicit write access to dataElement of a sender-receiver PortPrototype or nv data of a nv data PortPrototype. The aggregation of dataSendPoint is subject to variability with the purpose to support the conditional existence of sender receiver PortPrototype or the variant existence of data send points in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dataSendPoint, dataSendPoint.shortName, dataSendPoint.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
dataWrite Access	VariableAccess	*	aggr	RunnableEntity has implicit write access to dataElement of a sender-receiver PortPrototype or nv data of a nv data PortPrototype. The aggregation of dataWriteAccess is subject to variability with the purpose to support the conditional existence of sender receiver ports or the variant existence of dataWriteAccess in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dataWriteAccess, dataWriteAccess.short Name, dataWriteAccess.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
external TriggeringPoint	ExternalTriggeringPoint	*	aggr	The aggregation of ExternalTriggeringPoint is subject to variability with the purpose to support the conditional existence of trigger ports or the variant existence of external triggering points in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=externalTriggeringPoint, externalTriggering Point.ident.shortName, externalTriggeringPoint.variation Point.shortLabel vh.latestBindingTime=preCompileTime

▽

△

Class	**RunnableEntity**			
internal TriggeringPoint	InternalTriggeringPoint	*	aggr	The aggregation of InternalTriggeringPoint is subject to variability with the purpose to support the variant existence of internal triggering points in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=internalTriggeringPoint, internalTriggering Point.shortName, internalTriggeringPoint.variation Point.shortLabel vh.latestBindingTime=preCompileTime
modeAccess Point	ModeAccessPoint	*	aggr	The runnable has a mode access point. The aggregation of ModeAccessPoint is subject to variability with the purpose to support the conditional existence of mode ports or the variant existence of mode access points in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=modeAccessPoint, modeAccess Point.ident.shortName, modeAccessPoint.variation Point.shortLabel vh.latestBindingTime=preCompileTime
modeSwitch Point	ModeSwitchPoint	*	aggr	The runnable has a mode switch point. The aggregation of ModeSwitchPoint is subject to variability with the purpose to support the conditional existence of mode ports or the variant existence of mode switch points in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=modeSwitchPoint, modeSwitchPoint.short Name, modeSwitchPoint.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
parameter Access	ParameterAccess	*	aggr	The presence of a ParameterAccess implies that a RunnableEntity needs read only access to a Parameter DataPrototype which may either be local or within a Port Prototype. The aggregation of ParameterAccess is subject to variability with the purpose to support the conditional existence of parameter ports and component local parameters as well as the variant existence of Parameter Access (points) in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=parameterAccess, parameterAccess.short Name, parameterAccess.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

▽

△

Class	**RunnableEntity**			
readLocal Variable	VariableAccess	*	aggr	The presence of a readLocalVariable implies that a RunnableEntity needs read access to a VariableData Prototype in the role of implicitInterRunnableVariable or explicitInterRunnableVariable. The aggregation of readLocalVariable is subject to variability with the purpose to support the conditional existence of implicitInterRunnableVariable and explicit InterRunnableVariable or the variant existence of read LocalVariable (points) in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=readLocalVariable, readLocalVariable.short Name, readLocalVariable.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
serverCallPoint	ServerCallPoint	*	aggr	The RunnableEntity has a ServerCallPoint. The aggregation of ServerCallPoint is subject to variability with the purpose to support the conditional existence of client server PortPrototypes or the variant existence of server call points in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=serverCallPoint, serverCallPoint.shortName, serverCallPoint.variationPoint.shortLabel vh.latestBindingTime=preCompileTime This Attribute is only used by the AUTOSAR Classic Platform.
symbol	CIdentifier	0..1	attr	The symbol describing this `RunnableEntity`'s entry point. This is considered the API of the `RunnableEntity` and is required during the RTE contract phase.
waitPoint	WaitPoint	*	aggr	The `WaitPoint` associated with the `RunnableEntity`. **Tags:** atp.Splitkey=waitPoint, waitPoint.shortName
writtenLocal Variable	VariableAccess	*	aggr	The presence of a writtenLocalVariable implies that a RunnableEntity needs write access to a VariableData Prototype in the role of implicitInterRunnableVariable or explicitInterRunnableVariable. The aggregation of writtenLocalVariable is subject to variability with the purpose to support the conditional existence of implicitInterRunnableVariable and explicit InterRunnableVariable or the variant existence of written LocalVariable (points) in the implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=writtenLocalVariable, writtenLocal Variable.shortName, writtenLocalVariable.variation Point.shortLabel vh.latestBindingTime=preCompileTime

Table 7.3: RunnableEntity

Note that the formal definition of the semantics of a `RunnableEntity` has strong relations to the specification of the [2, SWS RTE]. The definition of the RTE semantics, however, is not in the scope of this document.

However, the formal definition requires some background discussion that can't be completely left out of this document. Otherwise, the meaning of specific model elements could not be understood properly.

Note further that there are legitimate use cases for software-components without any RunnableEntitys, e.g. in following situations:

- An NvBlockSwComponentType does not require any RunnableEntity if there is no need to proxy any PortPrototype typed by either of the ClientServerInterfaces NvMService or NvMAdmin.
- A ServiceSwComponentType runs in a reduced configuration and does not have to offer any PortPrototype to any service-using application software-component.
- A software-component is configured in a reduced configuration where none of the functionality is selected. In this case, it is simpler to keep the empty software-component instead of adding further VariationPoints at many other elements, e.g. SwComponentPrototype.

  On top of that, a variation-based approach would require the conditional existence of other ARElements which are not yet supported, e.g. a SwcImplementation that references the AtomicSwComponentType.

7.2.1 Concurrency and Reentrancy of a RunnableEntity that cannot be Invoked Concurrently

This section applies to the case that the value of the attribute canBeInvokedConcurrently is false. During runtime, each RunnableEntity of each instance of an AtomicSwComponentType is in a specific run-time state.

The details of the definition and semantics of run-time states can be found in the [2, SWS RTE]. Nevertheless, this chapter contains a brief description of the fundamental concepts in order to be able to discuss properly the formal modeling of RunnableEntitys.

[TPS_SWCT_01313] Conditions for a transition from `suspended` to `to be started` ⌈The SwcInternalBehavior describes for each RunnableEntity the conditions for a transition from suspended to to be started should occur. This is done using the concept of an RTEEvent.⌋

When a RunnableEntity is in state to be started, the RTE can decide to start running the RunnableEntity. The delay between entering the state to be started (e.g. a message has been received in response to which the RunnableEntity should run) and moving into the state running (the first instruction of the RunnableEntity has been executed) depends on the scheduling strategy of the RTE, i.e. the mapping of RunnableEntitys on AUTOSAR OS tasks.

The transition from the state running into the state suspended is in the hands of the RunnableEntity: the transition occurs when the RunnableEntity returns (thereby handing over control to the [32, SWS OS]). Some RunnableEntitys (like cat. 2

RunnableEntitys) might never return to the suspended state once they entered the running state.

They might enter the preempted state when being preempted. The same applies if a RunnableEntity needs to wait for a WaitPoint to be unblocked.

[TPS_SWCT_01304] Cat. 1A and 1B RunnableEntitys will eventually terminate ⌈Cat. 1A and 1B RunnableEntitys will eventually return after having executed a specific finite algorithm (the execution time of which might be provided).⌋

[TPS_SWCT_01305] RunnableEntity as one that cannot be invoked concurrently ⌈If the SwcInternalBehavior defines a RunnableEntity as one that cannot be invoked concurrently, it is the responsibility of the RTE to ensure that the RunnableEntity is never started concurrently (for example, in two different AUTOSAR OS tasks). This implies that the implementation of the AtomicSwComponentType does not need to worry about concurrency issues.⌋

For example: The internal behavior of an AtomicSwComponentType *MyComponentType* describes a RunnableEntity *R1* which should be enabled when an operation on a client-server PPortPrototype of the AtomicSwComponentType is invoked. The AtomicSwComponentType specifies that the RunnableEntity *R1* cannot be invoked concurrently.

The AtomicSwComponentType *MyComponentType* is instantiated on an ECU. When a call of the operation is received, the corresponding instance of the RunnableEntity *R1* is enabled and the RTE will start executing the RunnableEntity (the RunnableEntity is in state running) in a task eventually managed by the AUTOSAR OS.

If another call of the operation is received while the RunnableEntity is in state running, it is not allowed that the RTE runs the RunnableEntity again in a second task. Rather, the RTE needs to wait (and possibly queue the second incoming request) until the RunnableEntity has returned and has moved to the suspended state.

7.2.2 Concurrency and Reentrancy of a RunnableEntity that can be Invoked Concurrently

This section applies to the case that the value of the attribute canBeInvokedConcurrently is set to true.

In this case, it is allowed that the same RunnableEntity is running several times concurrently in different AUTOSAR OS tasks. This implies that the state machine defined in the [2, SWS RTE] is not the state of the RunnableEntity anymore, but can be cloned an arbitrary number of times.

[TPS_SWCT_01306] Software-component description itself does not put any bounds on the number of concurrent invocations of a RunnableEntity ⌈The software-component description itself does not put any bounds on the number of concurrent invocations of the RunnableEntity that are allowed.

The software-component description only specifies whether the RunnableEntity can be invoked concurrently or not.

Allowing concurrent invocation of a RunnableEntity implies that the implementation of the AtomicSwComponentType needs to take care of this additional form of concurrency.⌋

Example 7.1

The SwcInternalBehavior of a component-type *MyComponentType* describes a RunnableEntity *R1* which should be enabled when a ClientServerOperation on a PPortPrototype typed by a ClientServerInterface of the AtomicSwComponentType is invoked.

The AtomicSwComponentType specifies that the RunnableEntity *R1* can be invoked concurrently. The AtomicSwComponentType *MyComponentType* is instantiated on an ECU.

When a call of the ClientServerOperation is received the corresponding instance of the RunnableEntity *R1* is enabled and the RTE will start executing the RunnableEntity (the RunnableEntity is in state `running`) in a task eventually managed by the AUTOSAR OS.

If another call of the ClientServerOperation is received, it is allowed that the same RunnableEntity is started again in a different task.

A typical use-case of concurrent RunnableEntitys is the implementation of AUTOSAR services. The AUTOSAR services will typically take care of concurrency internally: several software-components can directly use the services in parallel.

The ECU-integrator could then decide that the RunnableEntity implementing the AUTOSAR service runs directly in the context (in the task) of the AtomicSwComponentType invoking the service.

This is a very efficient and direct coupling between the client and the server: the connector between the client and the server is reduced to a local function-call.

7.2.3 Timed Activation of Runnable Entities

In many cases, RunnableEntitys need to be activated in response to timing events rather than related to communication (e.g. the reception of a response to an asynchronous operation invocation). Many RunnableEntitys will need to run cyclically with a fixed rate.

The approach taken in the software-component description is to define so-called TimingEvents (more details are given in Figure 7.5) as special kinds of RTEEvents. So far, only one kind of timing-related RTEEvent has been defined: a simple periodic TimingEvent.

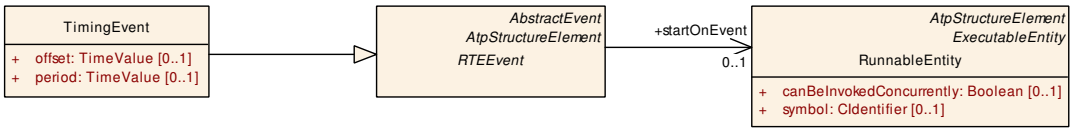

Figure 7.5: Periodic activation of RunnableEntities

[TPS_SWCT_01519] RTE executes certain `RunnableEntity` periodically ⌈If the `SwcInternalBehavior` of an `AtomicSwComponentType` requires that the RTE executes certain `RunnableEntity`s periodically, the description needs to define a `TimingEvent` with the desired period.

This `TimingEvent` then contains a reference to the `RunnableEntity` that needs to be executed with this period.⌋

Class	**TimingEvent**			
Note	This event is used to start `RunnableEntity`s that shall be executed periodically.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *Multilanguage Referrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
offset	TimeValue	0..1	attr	The value makes an assumption about the time offset of the first activation of the `RunnableEntity` triggered by the mapped `TimingEvent` relative to the periodic activation of the time base of this `TimingEvent`. Unit: second.
period	TimeValue	0..1	attr	Period of timing event in seconds. The value of this attribute shall be greater than zero.

Table 7.4: TimingEvent

[constr_2031] Value of `TimingEvent.period` shall be greater than 0

Imposition time: CP: `IT_RteGen`

⌈Attribute `TimingEvent.period` shall exist and its value shall be greater than 0.⌋

Note that it is possible to override the attribute `period` on the level of instantiation. See [TPS_SWCT_02507] for more details.

[constr_1622] Value of `TimingEvent.offset` vs. `TimingEvent.period`

Imposition time: CP: `IT_RteGen`

⌈If a value is defined for attribute `TimingEvent.offset` then this value shall be greater than 0 and less or equal than the value of attribute `TimingEvent.period` of the respective `TimingEvent`.⌋

The motivation for the existence of [constr_1622] is that the mapped `TimingEvent` could not be implemented with the given `period` if the activation `offset` is greater than the period of the `TimingEvent`.

7.2.4 Additional Remarks and Clarifications

7.2.4.1 Reentrancy and Multiple Instantiation

This chapter emphasizes the specific meanings of combinations of the attributes SwcInternalBehavior.supportsMultipleInstantiation and RunnableEntity.canBeInvokedConcurrently.

[TPS_SWCT_01307] Semantics of combining attributes supportsMultipleInstantiation and canBeInvokedConcurrently ⌈

supportsMultipleInstantiation	*canBeInvokedConcurrently*	*Implication for an implementation of a RunnableEntity*
false	false	This implies that the implementation of the RunnableEntity will never be invoked concurrently from several tasks. The implementation does not need to care about reentrancy issues and can typically use static variables to store state.
true	false	If there are several instances of the same AtomicSwComponentType on the local ECU, the implementation of the RunnableEntity can still be invoked concurrently from several tasks. However, there will be no concurrent invocations of the implementation with the same instance handle. To ensure that this is safe, the implementation will typically use per-instance memory.
true	true	In this case the RunnableEntity can be invoked concurrently from several tasks, even with the same instance handle.

⌋

If the implementation of a AtomicSwComponentType decides to map several RunnableEntitys to the same symbol, there are reentrancy problems to be sorted out. However, this scenario is not supported by the [2, SWS RTE] anyway and shall therefore be avoided.

7.2.4.2 Reentrancy and "Library Functions"

Note that all code that is called by different RunnableEntitys (like e.g. library routines, etc.) shall obviously be reentrant. A filter algorithm implemented in C, for example, is not allowed to store values from previous runs through static variables or variables with external binding.

7.2.4.3 Compatibility of Client Server Operations triggering the same Runnable Entity

[TPS_SWCT_01309] signature of a RunnableEntity depends on the connected RTEEvent and the existence of RunnableEntity.argument ⌈The signature of a RunnableEntity depends on the connected RTEEvent and the existence of RunnableEntity.argument.

Multiple OperationInvokedEvents that trigger the same RunnableEntity are only supported if either

- the server RunnableEntity does not aggregate arguments and all referenced ClientServerOperations result in the same RunnableEntity signature or
- the server RunnableEntity aggregates arguments and all RunnableEntity.arguments are compatible with the respective ClientServerOperation.arguments according to [constr_10670].

⌋

[constr_2000] Compatibility of ClientServerOperations triggering the same RunnableEntity

Imposition time: CP: IT_CpgExe

⌈The ClientServerOperations are considered compatible if

- the number of arguments (which can be ArgumentDataPrototypes or related PortDefinedArgumentValues) is equal and
- the corresponding arguments (i.e. first argument on both sides, second argument on both sides, etc.) are compatible or both are typed by "new-world" Variable-Size Array Data Types where the data types of the array elements are compatible (but the array sizes may differ).
- and the respective values of PortAPIOption.errorHandling are identical.

In particular, this means that:

- for combinations of ArgumentDataPrototypes and ArgumentDataPrototypes where the serverArgumentImplPolicy is set to useArgumentType the referred ImplementationDataTypes shall be compatible.

  In the case of data types of category STRUCTURE all by-order matching ImplementationDataTypeElements shall be named equally.

- for combinations of PortDefinedArgumentValues and ArgumentDataPrototypes where the serverArgumentImplPolicy is set to useArgumentType the referred ImplementationDataTypes shall be compatible.

  In the case of ImplementationDataTypeElements of category STRUCTURE all by-order matching ImplementationDataTypeElements of the structure shall be named equally.

- for ArgumentDataPrototypes where the serverArgumentImplPolicy is set to useVoid an arbitrary ImplementationDataType is referred to.

In addition, it is required that the **return value defined on both sides shall match** (in terms of Std_ReturnType vs. void) and also the possibleErrors are compatible.⌋

[TPS_SWCT_01520] Implication of the existence of possibleError on compatibility of ClientServerOperations ⌈An implication of [constr_2000] is that a ClientServerOperation that defines **any** possibleError is **not** compatible with

a ClientServerOperation that defines **no** possibleError at all because this configuration leads to different data type of the return value of the C function that implements the applicable RunnableEntity.⌋

7.2.4.4 Categories of Runnable Entities

[TPS_SWCT_01310] Categories of RunnableEntitys ⌈RunnableEntitys are subdivided into the following categories:

Category 1 RunnableEntitys of Category 1 do not have WaitPoints and are required to terminate in a finite amount of time. Category 1 is divided into two subcategories: Category 1A and Category 1B.

Category 1A RunnableEntitys are only allowed to use implicit APIs.

Category 1B RunnableEntitys are additionally allowed to invoke a server, to use explicit APIs, to issue triggers, to switch modes and to use ExclusiveAreas.

Category 2 In contrast to Category 1, RunnableEntitys, RunnableEntitys of Category 2 always aggregate at least one WaitPoint[1]. Typically, such a RunnableEntity implements an internal loop where one iteration through the loop is triggered whenever a WaitPoint is resolved.

⌋

For more details regarding the modeling of meta-class RunnableEntity, refer to Figure 7.3.

The resource need of a RunnableEntity in its later integration usually depends on the used features of the Runtime Environment.

In the AUTOSAR Methodology, the ECU integrator is required to map various RunnableEntitys to a limited amount of OS Tasks in a specific order.

The RunnableEntity categories are useful to indicate the later integration effort and resource need on the basis of the RunnableEntity's design.

Thereby Category 1A RunnableEntitys do not utilize RTE features which are blocking or delaying the execution of the RunnableEntity. As long as the RunnableEntity implementation guarantees stable execution times it is rather simple and reliable to integrate them in a calculation chain.

As opposed to Category 1A, the scheduling behavior of Category 2 RunnableEntitys at runtime depends on the interaction with the interfaces of the enclosing software-component.

[1]Category 2 RunnableEntitys usually need to be mapped to *Extended Tasks*, because only extended tasks provide the task state WAITING.

For instance, the suspend-times of the OS Task, where the RunnableEntity is mapped to, may depend on actual data reception and/or occurrence of timeouts.

Moreover, it is usually not possible to map more than one RunnableEntity to an OS Task when the RunnableEntity implements an infinite internal loop, triggered whenever a WaitPoint is resolved.

In the case of Category 1B, additional side conditions impact the schedule behavior and required OS features. For instance, a server call might be simply implemented as direct function call in the case of intra partition communication **or** might require a more complex implementation in the case of inter-ECU communication.

7.2.4.5 Arguments of a Runnable Entity

In many cases, an RTE generator will be able to figure out not only the number and data type of arguments to a RunnableEntity but also the name of the arguments. In some cases, however, formal support from the upstream templates is required to facilitate this task.

One use case for the definition of RunnableEntity.argument could be the necessity to define the signature of a RunnableEntity to disambiguate similar, but not identical signatures of different ClientServerOperations (defined in the context of different ClientServerInterfaces) that trigger the execution of a RunnableEntity.

[TPS_SWCT_01311] Symbol of an operation argument in the RunnableEntity's signature ⌈The definition of the symbol of a given argument in the RunnableEntity's signature is possible through the meta-class RunnableEntityArgument that contributes the name of the argument through the value of the attribute symbol.

As a RunnableEntity might need to define many arguments, the aggregation of RunnableEntityArgument at RunnableEntity in the role argument has the multiplicity 0..* and as the order of these arguments is significant the meta-model defines the aggregation as ordered[2].⌋

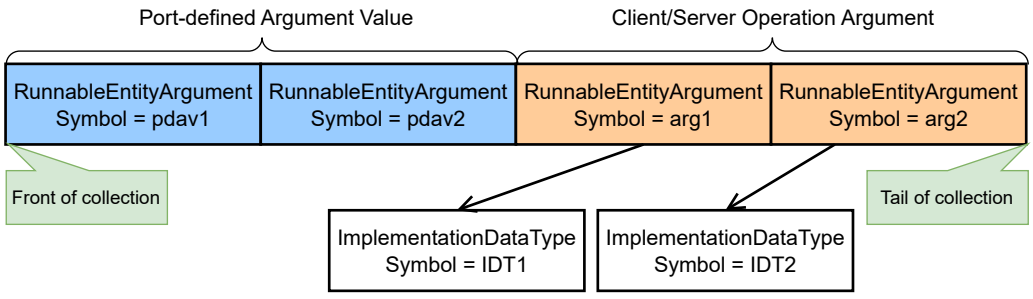

Figure 7.6: Example collection of RunnableEntityArgument

[2]as the arguments are **ordered** they do not need to be Referrable in order to be able to identify individual arguments

As defined by the meta-model, the order of RunnableEntity.argument is significant and corresponds to the order of arguments in the signature of the RunnableEntity.

If port-defined argument values are applicable for the RunnableEntity's signature, then the port-defined argument values appear first in the list of argument, followed by further argument that represent ArgumentDataPrototypes used in the definition of the signature of a ClientServerOperation. An example for such a collection of RunnableEntityArguments is depicted in Figure 7.6.

The port-defined argument values are modeled as PortDefinedArgumentValues that already maintain a reference to an ImplementationDataType and therefore the corresponding RunnableEntityArgument shall not define a reference to an ImplementationDataType again. This condition is formalized in [constr_10668].

As also mentioned in [constr_10668], the attribute serverArgumentImplPolicy shall also not appear in this case in order to avoid interference with the operation of the port-defined argument value.

[constr_10668] Restriction for the existence of attributes of RunnableEntityArgument for port-defined argument values

Imposition time: CP: IT_CpgExe

⌈Any RunnableEntity.argument that corresponds (based on the order index) to a port-defined argument value shall not define any of

- the reference in the role implementationDataType or
- the attribute serverArgumentImplPolicy.

⌋

[constr_10669] Existence of reference in the role RunnableEntityArgument.implementationDataType

Imposition time: CP: IT_CpgExe

⌈For each RunnableEntityArgument that represents an argument of a ClientServerOperation, the reference in the role implementationDataType shall exist.⌋

The statement made by [constr_10669] is depicted in Figure 7.7.

[constr_10670] Compatibility between the corresponding ClientServerOperation.argument and RunnableEntity.argument

Imposition time: CP: IT_CpgExe

⌈If a ClientServerOperation is referenced in the role operation by an OperationInvokedEvent that in turn references a RunnableEntity in the role startOnEvent and if the RunnableEntity owns RunnableEntityArguments in the role argument, the corresponding (i.e. same position in the ordered collection of

arguments) ClientServerOperation.argument and RunnableEntity.argument shall fulfill the following conditions:

- The ImplementationDataType associated with the ClientServerOperation.argument and the ImplementationDataType referenced in the role RunnableEntity.argument.implementationDataType shall be compatible according to [constr_10667].
- The attribute ClientServerOperation.argument.direction and RunnableEntity.argument.direction shall have the same value.

⌋

[constr_1164] Number of arguments owned by a RunnableEntity

Imposition time: CP: IT_CpgExe

⌈If a given RunnableEntity owns RunnableEntityArguments in the role argument, then the number of these RunnableEntityArguments shall be identical to the number of applicable portArgValues of the PortAPIOption that references the PortPrototype that in turn is referenced by the OperationInvokedEvent that references the RunnableEntity **plus** the number of ArgumentDataPrototypes aggregated in the role argument by the ClientServerOperation referenced by said OperationInvokedEvent.⌋

[constr_1165] Applicability of RunnableEntityArgument

Imposition time: CP: IT_CpgExe

⌈The existence of a RunnableEntityArgument is limited to RunnableEntitys triggered by a ClientServerOperation.⌋

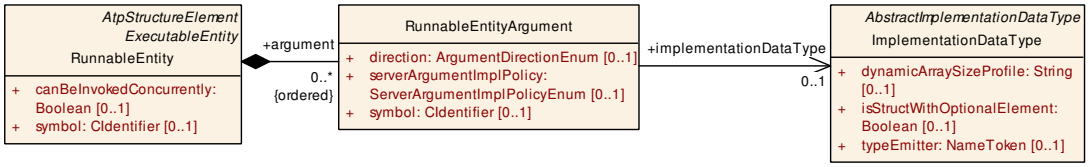

Figure 7.7: Arguments of a RunnableEntity

[TPS_SWCT_01312] RunnableEntity has a mapping to BswModuleEntry
⌈The existence of RunnableEntityArguments in the role argument owned by a RunnableEntity shall be **ignored** by an RTE generator if a mapping to a BswModuleEntry exists.

In this case the name of arguments to the RunnableEntity shall be derived from the applicable SwServiceArgs owned by the mapped BswModuleEntry.⌋

Class	**RunnableEntityArgument**			
Note	This meta-class represents the ability to provide specific information regarding the arguments to a RunnableEntity.			
Base	*ARObject*			
Aggregated by	RunnableEntity.argument			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
direction	ArgumentDirection Enum	0..1	attr	This attribute denotes the direction of the argument.
implementation DataType	ImplementationData Type	0..1	ref	This reference represents the implementationDataType used to type the RunnableEntityArgument if the Runnable EntityArgument represents an argument of a ClientServer Operation, rather than a port-defined argument value.
serverArgument ImplPolicy	ServerArgumentImpl PolicyEnum	0..1	attr	This attribute defines how the argument type of the server's RunnableEntity is implemented. If the attribute is not defined this has the same semantics as if the attribute is set to the value useArgumentType for primitive arguments and structures.
symbol	CIdentifier	0..1	attr	This represents the symbol to be generated into the actual signature on the level of the C programming language.

Table 7.5: RunnableEntityArgument

[constr_1938] Existence of attribute RunnableEntityArgument.symbol

Imposition time: CP: IT_CpgExe

⌈For each RunnableEntityArgument, attribute symbol shall exist.⌋

7.2.5 Activation Reason of a Runnable Entity

It is feasible to activate a given RunnableEntity through several RTEEvents. In many cases, it is therefore necessary to retrieve the information about the activating RTEEvent from within the implementation of the RunnableEntity.

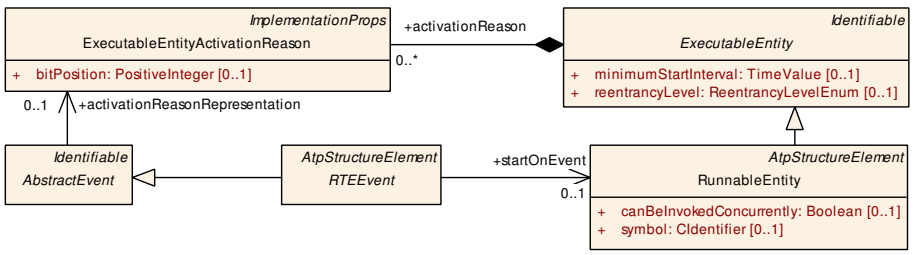

Figure 7.8: ExecutableEntityActivationReason and RunnableEntity

As a typical use case, consider a RunnableEntity that is cyclically activated (through a TimingEvent) and in addition it shall also be executed sporadically, e.g. in response to the reception (DataReceivedEvent) of a dataElement.

[TPS_SWCT_01469] RTE API for retrieving the current activation reason ⌈The aggregation of a ExecutableEntityActivationReason allows for the RTE generator to create an RTE API for retrieving the current activation reason.⌋

For details about the implementation of this feature, refer to the specification of the [2, SWS RTE].

[constr_1226] Applicable range for attribute ExecutableEntityActivationReason.bitPosition

Imposition time: CP: IT_CpgExe

⌈The value of attribute ExecutableEntityActivationReason.bitPosition shall be in the range of 0 .. 31.⌋

[constr_1227] Value of attribute ExecutableEntityActivationReason.bitPosition shall be unique

Imposition time: CP: IT_CpgExe

⌈The value of attributes ExecutableEntityActivationReason.bitPosition and ExecutableEntityActivationReason.symbol shall be unique in the context of the enclosing RunnableEntity.⌋

[constr_1228] RTEEvent that is referenced by a WaitPoint in the role trigger shall not reference ExecutableEntityActivationReason

Imposition time: CP: IT_RteGen

⌈An RTEEvent that is referenced by a WaitPoint in the role trigger shall not reference ExecutableEntityActivationReason in the role activationReasonRepresentation.⌋

The rationale for the existence of [constr_1228] is obviously that in the described situation the RunnableEntity is already activated and therefore the mentioned RTEEvent does not deliver any information related to the activation reason of said RunnableEntity.

Class	**ExecutableEntityActivationReason**			
Note	This meta-class represents the ability to define the reason for the activation of the enclosing ExecutableEntity.			
Base	*ARObject*, *ImplementationProps*, *Referrable*			
Aggregated by	*ExecutableEntity*.activationReason			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
bitPosition	PositiveInteger	0..1	attr	This attribute allows for defining the position of the enclosing ExecutableEntityActivationReason in the activation vector.

Table 7.6: ExecutableEntityActivationReason

Class	***ExecutableEntity*** (abstract)			
Note	Abstraction of executable code.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	*BswModuleEntity*, RunnableEntity			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	***ExecutableEntity*** (abstract)			
activation Reason	ExecutableEntity ActivationReason	*	aggr	If the `ExecutableEntity` provides at least one `activationReason` element the RTE resp. BSW Scheduler shall provide means to read the activation vector of this executable entity execution. If no `activationReason` element is provided the feature of being able to determine the activating RTEEvent is disabled for this `ExecutableEntity`. **Tags:** atp.Splitkey=activationReason, activation Reason.shortName
canEnter	ExclusiveArea	*	ref	This means that the executable entity can enter/leave the referenced exclusive area through explicit API calls. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=canEnter, canEnter.exclusiveArea, can Enter.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
exclusiveArea NestingOrder	ExclusiveAreaNesting Order	*	ref	This represents the set of ExclusiveAreaNestingOrders recognized by this ExecutableEntity. **Tags:** atp.Splitkey=exclusiveAreaNestingOrder
minimumStart Interval	TimeValue	0..1	attr	Specifies the time in seconds by which two consecutive starts of an ExecutableEntity are guaranteed to be separated.
reentrancyLevel	ReentrancyLevelEnum	0..1	attr	The reentrancy level of this ExecutableEntity. See the documentation of the enumeration type ReentrancyLevel Enum for details. Please note that nonReentrant interfaces can have also reentrant or multicoreReentrant implementations, and reentrant interfaces can also have multicoreReentrant implementations.
runsInside	ExclusiveArea	*	ref	The executable entity runs completely inside the referenced exclusive area. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=runsInside, runsInside.exclusiveArea, runs Inside.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
swAddrMethod	SwAddrMethod	0..1	ref	Addressing method related to this code entity. Via an association to the same SwAddrMethod, it can be specified that several code entities (even of different modules or components) shall be located in the same memory without already specifying the memory section itself. **Tags:** atp.Splitkey=swAddrMethod

Table 7.7: ExecutableEntity

[constr_1939] Existence of attribute `ExecutableEntityActivationReason.bitPosition`

Imposition time: CP: `IT_CpgExe`

⌈For each `ExecutableEntityActivationReason`, attribute `bitPosition` shall exist.⌋

Note that the attribute `ExecutableEntityActivationReason.symbol` is needed for the generation of a unique identifier that represents the specific activation reason in the RTE code.

7.2.6 Runnable Entity for Initialization Purpose

One way to ensure that certain initializations are applied before a software-component enters its state of normal operation is to use the AUTOSAR mode-management, in particular by defining a ModeDeclarationGroup that contains a specific ModeDeclaration with the semantics of representing a mode that is exclusively used for setting up and initializing a software-component.

However, this approach comes with a certain footprint that may be acceptable in some cases, but there may also be cases where a simpler approach is useful. The simple approach to initialization consists of a RunnableEntity that is triggered by a special kind of RTEEvent, i.e. the so-called InitEvent.

[TPS_SWCT_01525] InitEvent references a RunnableEntity in the role startOnEvent ⌈In addition to using a mode-based approach for executing initialization RunnableEntitys, it is also possible to let an InitEvent reference a RunnableEntity in the role startOnEvent.

This approach to the initialization of software-components is orthogonal to the mode-based approach. In particular, the RunnableEntitys triggered by an InitEvent are expected to be executed after the RTE has been fully initialized. This means restrictions regarding the availability of RTE APIs during the ECU initialization are not relevant for RunnableEntitys triggered by an InitEvent.⌋

[constr_1257] No WaitPoints allowed

Imposition time: CP: IT_RteGen

⌈A RunnableEntity referenced by an InitEvent in the role startOnEvent shall not aggregate a.⌋

Rationale: a WaitPoint may indefinitely defer the completion of the RunnableEntitys triggered by an InitEvent and therefore contradict the semantics of the RunnableEntity.

[constr_1258] Value of minimumStartInterval for RunnableEntitys triggered by an InitEvent

Imposition time: CP: IT_RteGen

⌈The value of the attribute ExecutableEntity.minimumStartInterval for a RunnableEntity that is triggered by an InitEvent shall be set to 0.⌋

Rationale: it does not make sense to talk about intervals of activating RunnableEntitys triggered by an InitEvent as these are not supposed to be executed repeatedly.

[constr_1259] Aggregation of AsynchronousServerCallPoint and AsynchronousServerCallResultPoint

Imposition time: CP: IT_RteGen

⌈A RunnableEntity referenced by an InitEvent in the role startOnEvent may aggregate an AsynchronousServerCallPoint but it shall not aggregate an AsynchronousServerCallResultPoint.⌋

Rationale: as mentioned before WaitPoints shall not be aggregated by a RunnableEntity triggered by an InitEvent in the role startOnEvent. It is allowed (although considered unlikely to happen) to have an AsynchronousServerCallPoint but it is not allowed to fetch the result of the call within the same RunnableEntity.

A RunnableEntity triggered by an InitEvent in the role startOnEvent *may* aggregate a SynchronousServerCallPoint but the use of this configuration is discouraged.

[constr_1260] No mode disabling for InitEvents

Imposition time: CP: IT_RteGen

⌈An InitEvent shall not have a reference to a ModeDeclaration in the role disabledMode.⌋

Rationale: the concept of RunnableEntity triggered by an InitEvent is (as mentioned before) orthogonal to the mode concept and therefore shall be implemented independently of modes.

7.3 RTE Event

During execution, several RTEEvents will occur, such as the reception of a remote invocation of a ClientServerOperation on a PPortPrototype or a timeout on an RPortPrototype that is not receiving the VariableDataPrototypes it expects to receive.

[TPS_SWCT_01314] RTEEvent ⌈An RTEEvent defines:

- what the trigger for the occurrence of that RTEEvent is
- whether specific ModeDeclarations disable the processing of this RTEEvent
- which RunnableEntity shall be started when this RTEEvent occurs.

⌋

Class	***AbstractEvent*** (abstract)			
Note	This meta-class represents the abstract ability to model an event that can be taken to implement application software or basic software in AUTOSAR.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	*BswEvent*, *RTEEvent*			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
activation Reason Representation	ExecutableEntity ActivationReason	0..1	ref	If the activationReasonRepresentation is referenced from the enclosing AbstractEvent this shall be taken as an indication that the latter contributes to the activating vector of this ExecutableEntity that owns the referenced ExecutableEntityActivationReason. **Tags:** atp.Splitkey=activationReasonRepresentation

Table 7.8: AbstractEvent

Class	***RTEEvent*** (abstract)			
Note	Abstract base class for all RTE-related events			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	AsynchronousServerCallReturnsEvent, BackgroundEvent, DataReceiveErrorEvent, DataReceivedEvent, DataSendCompletedEvent, DataWriteCompletedEvent, ExternalTriggerOccurredEvent, InitEvent, InternalTriggerOccurredEvent, ModeSwitchedAckEvent, OperationInvokedEvent, OsTaskExecutionEvent, SwcModeManagerErrorEvent, SwcModeSwitchEvent, TimingEvent, TransformerHardErrorEvent			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
disabledMode	ModeDeclaration	*	iref	Reference to the Modes that disable the Event. **Tags:** atp.Splitkey=disabledMode, disabledMode.contextPort, disabledMode.contextModeDeclarationGroupPrototype, disabledMode.targetModeDeclaration **InstanceRef implemented by:** RModeInAtomicSwcInstanceRef
startOnEvent	RunnableEntity	0..1	ref	The referenced `RunnableEntity` starts when the corresponding `RTEEvent` is raised. **Tags:** atp.Splitkey=startOnEvent

Table 7.9: RTEEvent

Class	**AsynchronousServerCallReturnsEvent**			
Note	This event is raised when an asynchronous server call is finished.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
eventSource	AsynchronousServerCallResultPoint	0..1	ref	The referenced AsynchronousServerCallResultPoint raises this AsynchronousServerCallReturnsEvent when the asynchronous server call returns. **Tags:** atp.Splitkey=eventSource This Attribute is only used by the AUTOSAR Classic Platform.

Table 7.10: AsynchronousServerCallReturnsEvent

[constr_1940] Existence of attribute AsynchronousServerCallReturnsEvent.eventSource

Imposition time: CP: IT_CpgExe

⌈For each AsynchronousServerCallReturnsEvent, attribute eventSource shall exist.⌋

Class	**DataSendCompletedEvent**			
Note	This event is raised when the referenced explicit data element has been sent or an error occurred.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
eventSource	VariableAccess	0..1	ref	The referenced VariableAccess raises this DataSendCompletedEvent when the explicit write access was successful or an error occurred. **Tags:** atp.Splitkey=eventSource

Table 7.11: DataSendCompletedEvent

[constr_1941] Existence of attribute DataSendCompletedEvent.eventSource

Imposition time: CP: IT_CpgExe

⌈For each DataSendCompletedEvent, attribute eventSource shall exist.⌋

Class	**DataWriteCompletedEvent**			
Note	This event is raised when an implicit write access was successful or an error occurred.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
eventSource	VariableAccess	0..1	ref	The referenced VariableAccess raises this DataWriteCompletedEvent when the implicit write access was successful or an error occurred. **Tags:** atp.Splitkey=eventSource

Table 7.12: DataWriteCompletedEvent

[constr_1942] Existence of attribute DataWriteCompletedEvent.eventSource

Imposition time: CP: IT_CpgExe

⌈For each DataWriteCompletedEvent, attribute eventSource shall exist.⌋

Class	**DataReceivedEvent**			
Note	This event is raised when the referenced data element is received.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	DataReceivedEvent			
data	VariableDataPrototype	0..1	iref	The referenced VariableDataPrototype raises this Data ReceivedEvent when the data has been received. **Tags:** atp.Splitkey=data, data.contextRPort, data.target DataElement **InstanceRef implemented by:** RVariableInAtomicSwc InstanceRef

Table 7.13: DataReceivedEvent

[constr_1943] Existence of attribute DataReceivedEvent.data

Imposition time: CP: IT_CpgExe

⌈For each DataReceivedEvent, attribute data shall exist.⌋

Class	DataReceiveErrorEvent			
Note	This event is raised when the Com layer detects and notifies an error concerning the reception of the referenced VariableDataPrototype.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
data	VariableDataPrototype	0..1	iref	The referenced VariableDataPrototype raises this Data ReceiveErrorEvent when there was an error during the reception. **Tags:** atp.Splitkey=data, data.contextRPort, data.target DataElement **InstanceRef implemented by:** RVariableInAtomicSwc InstanceRef

Table 7.14: DataReceiveErrorEvent

[constr_1944] Existence of attribute DataReceiveErrorEvent.data

Imposition time: CP: IT_CpgExe

⌈For each DataReceiveErrorEvent, attribute data shall exist.⌋

Class	OperationInvokedEvent			
Note	This event is raised when the ClientServerOperation referenced in OperationInvokedEvent.operation shall be invoked.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
operation	ClientServerOperation	0..1	iref	This represents the ClientServerOperation which shall be invoked. **Tags:** atp.Splitkey=operation, operation.contextPPort, operation.targetProvidedOperation **InstanceRef implemented by:** POperationInAtomicSwc InstanceRef

Table 7.15: OperationInvokedEvent

[constr_1945] Existence of attribute `OperationInvokedEvent.operation`

Imposition time: CP: `IT_CpgExe`

⌈For each `OperationInvokedEvent`, attribute `operation` shall exist.⌋

[constr_1523] No mode disabling for `OperationInvokedEvent`s

Imposition time: CP: `IT_RteGen`

⌈An `OperationInvokedEvent` shall not have a reference to a `ModeDeclaration` in the role `disabledMode`.⌋

Rationale for the existence of [constr_1523]:

The RTE does not support the disabling of server `RunnableEntity`s by modes. Instead, the server shall respond with an explicit error code if the execution of the server operation is not possible under specific conditions.

For more explanation about the semantics of the meta-class `TimingEvent`, refer to Chapter 7.2.3.

Class	**BackgroundEvent**			
Note	This event is used to start `RunnableEntity`s that are supposed to be executed in the background.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 7.16: BackgroundEvent

Class	**SwcModeSwitchEvent**			
Note	This event is raised when the specified mode change occurs.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
activation	ModeActivationKind	0..1	attr	Specifies if the event is raised on entering or exiting a specific mode or is raised on the transition between two modes.
mode (ordered)	ModeDeclaration	0..2	iref	The referenced mode or the transition between two modes raises this SwcModeSwitchEvent. **InstanceRef implemented by:** RModeInAtomicSwcInstanceRef

Table 7.17: SwcModeSwitchEvent

[constr_1946] Existence of attribute `SwcModeSwitchEvent.activation`

Imposition time: CP: `IT_RteGen`

⌈For each `SwcModeSwitchEvent`, attribute `activation` shall exist.⌋

[constr_1947] Existence of reference SwcModeSwitchEvent.mode

Imposition time: CP: IT_RteGen

⌈For each SwcModeSwitchEvent, the reference to ModeDeclaration in the role mode shall exist.⌋

Enumeration	**ModeActivationKind**
Note	Kind of mode switch condition used for activation of an event, as further described for each enumeration field.
Aggregated by	BswModeSwitchEvent.activation, SwcModeSwitchEvent.activation
Literal	***Description***
onEntry	On entering the referred mode. **Tags:** atp.EnumerationLiteralIndex=0
onExit	On exiting the referred mode. **Tags:** atp.EnumerationLiteralIndex=1
onTransition	On transition of the 1st referred mode to the 2nd referred mode. **Tags:** atp.EnumerationLiteralIndex=2

Table 7.18: ModeActivationKind

Class	**ModeSwitchedAckEvent**			
Note	This event is raised when the referenced ModeSwitchPoint has been processed or an error occurred.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
eventSource	ModeSwitchPoint	0..1	ref	The referenced ModeSwitchPoint raises this ModeSwitchedAckEvent when the ModeSwitchPoint has been processed. **Tags:** atp.Splitkey=eventSource

Table 7.19: ModeSwitchedAckEvent

[constr_1948] Existence of attribute ModeSwitchedAckEvent.eventSource

Imposition time: CP: IT_RteGen

⌈For each ModeSwitchedAckEvent, attribute eventSource shall exist.⌋

Class	**ExternalTriggerOccurredEvent**			
Note	This event is raised when the referenced Trigger has occurred.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	ExternalTriggerOccurredEvent			
trigger	Trigger	0..1	iref	The referenced Trigger raises this ExternalTrigger OccurredEvent. **Tags:** atp.Splitkey=trigger, trigger.contextRPort, trigger.targetTrigger **InstanceRef implemented by:** RTriggerInAtomicSwc InstanceRef

Table 7.20: ExternalTriggerOccurredEvent

[constr_1949] Existence of attribute ExternalTriggerOccurredEvent.trigger

Imposition time: CP: IT_RteGen

⌈For each ExternalTriggerOccurredEvent, attribute trigger shall exist.⌋

Class	InternalTriggerOccurredEvent			
Note	This event is raised when the referenced InternalTriggeringPoint has occurred.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *Multilanguage Referrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
eventSource	InternalTriggeringPoint	0..1	ref	The referenced InternalTriggeringPoint raises this InternalTriggerOccurredEvent. **Tags:** atp.Splitkey=eventSource

Table 7.21: InternalTriggerOccurredEvent

[constr_1950] Existence of attribute InternalTriggerOccurredEvent.eventSource

Imposition time: CP: IT_RteGen

⌈For each InternalTriggerOccurredEvent, the attribute eventSource shall exist.⌋

Class	InitEvent			
Note	This RTEEvent is supposed to be used for initialization purposes, i.e. for starting and restarting a partition. It is not guaranteed that all RunnableEntitys referenced by this InitEvent are executed before the 'regular' RunnableEntitys are executed for the first time. The execution order depends on the task mapping.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *Multilanguage Referrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 7.22: InitEvent

Class	**TransformerHardErrorEvent**			
Note	This event is raised when data are received which should trigger a Client/Server operation or an external Trigger but during transformation of the data a hard transformer error occurred.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *Multilanguage Referrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
operation	ClientServerOperation	0..1	iref	This represents the ClientServerOperation for which the transformer can raise this TransformerHardErrorEvent. **Tags:** atp.Splitkey=operation, operation.contextPPort, operation.targetProvidedOperation **InstanceRef implemented by:** POperationInAtomicSwcInstanceRef
requiredTrigger	Trigger	0..1	iref	This represents the Trigger for which the transformer can raise this TransformerHardErrorEvent. **Tags:** atp.Splitkey=requiredTrigger, requiredTrigger.contextRPort, requiredTrigger.targetTrigger **InstanceRef implemented by:** RTriggerInAtomicSwcInstanceRef

Table 7.23: TransformerHardErrorEvent

[constr_1397] Existence of attributes of `TransformerHardErrorEvent`

Imposition time: CP: `IT_CpgExe`

⌈For any given `TransformerHardErrorEvent`, **either** the attribute `TransformerHardErrorEvent.operation` **or** `TransformerHardErrorEvent.requiredTrigger` shall exist.⌋

In other words, the attributes `operation` and `requiredTrigger` of meta-class `TransformerHardErrorEvent` shall be used mutually exclusively.

[TPS_SWCT_01315] Interaction of `RunnableEntity` with `RTEEvent` ⌈As described in the specification of the [3, TR Virtual Function Bus], the `RunnableEntity`s of an `AtomicSwComponentType` can interact with the occurrence of such `RTEEvent`s in two ways:

- the RTE can be instructed to enable a specific `RunnableEntity` when the `RTEEvent` occurs
- the RTE can provide `WaitPoint`s that allow a `RunnableEntity` to block until an `RTEEvent` in a set of `RTEEvent`s occurs.

⌋

Class	**OsTaskExecutionEvent**
Note	This `RTEEvent` is supposed to execute `RunnableEntity`s which have to react on the execution of specific OsTasks. Therefore, this event is unconditionally raised whenever the OsTask on which it is mapped is executed. The main use case for this event is scheduling of `RunnableEntity`s of Complex Drivers which have to react on task executions.
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *Multilanguage Referrable*, *RTEEvent*, *Referrable*

▽

△

Class	OsTaskExecutionEvent			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	Type	Mult.	Kind	Note
–	–	–	–	–

Table 7.24: OsTaskExecutionEvent

[constr_10016] Applicability of OsTaskExecutionEvent

Imposition time: CP: IT_CpgExe

⌈An OsTaskExecutionEvent is only applicable for a SwcInternalBehavior in the context of a ComplexDeviceDriverSwComponentType, EcuAbstractionSwComponentType, or ServiceSwComponentType.⌋

7.3.1 Defining an Event

The description of the SwcInternalBehavior includes a description of all RTEEvents that the SwcInternalBehavior of the AtomicSwComponentType relies on.

[TPS_SWCT_01316] Abstract base class RTEEvent ⌈The meta-class RTEEvent shows up as an "abstract" base-class in the meta-model: the exact attributes of the RTEEvent depend on the specific sub-class of RTEEvent that is used for the purpose.⌋

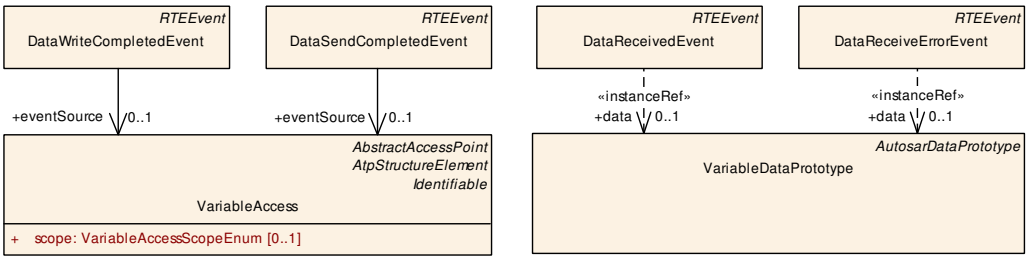

Figure 7.9: RTEEvents used in the context of sender/receiver communication

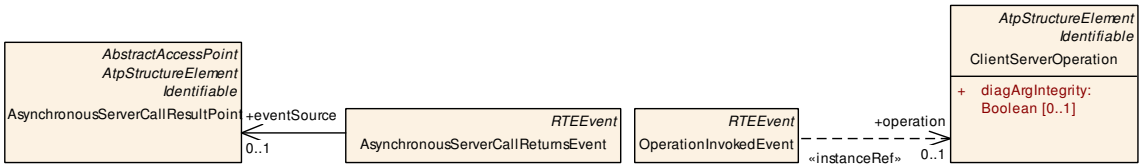

Figure 7.10: RTEEvents used in the context of client/server communication

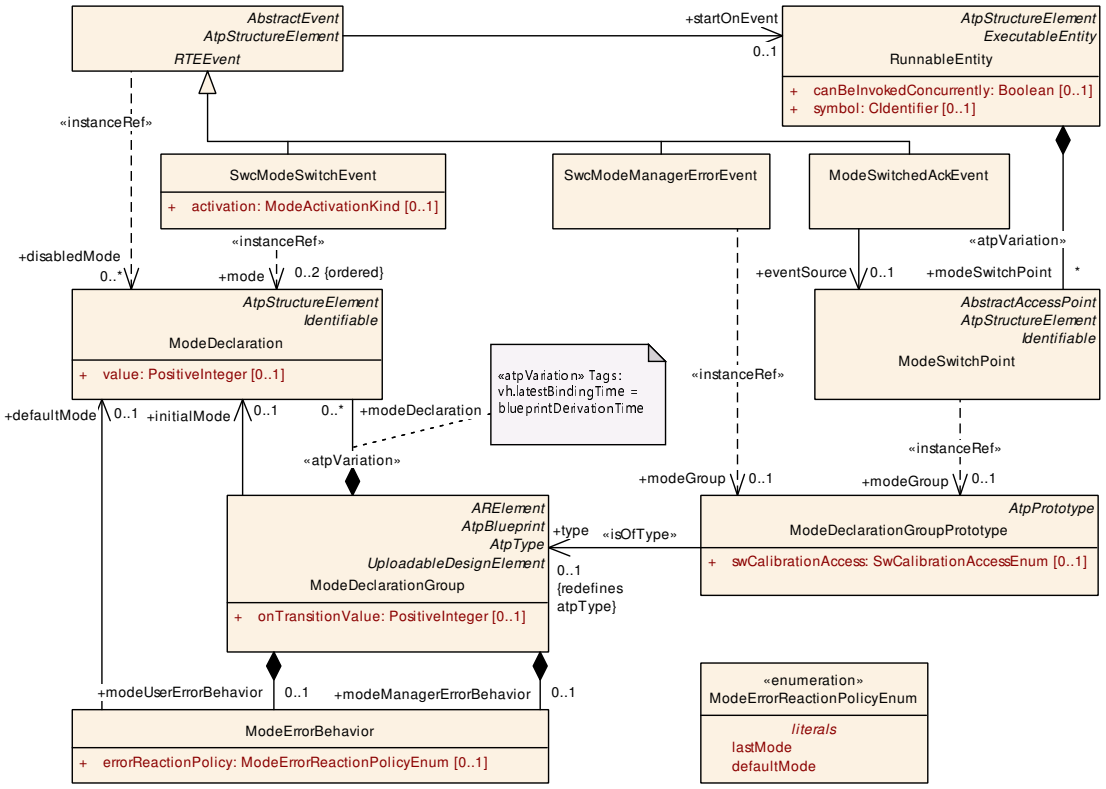

Figure 7.11: `RTEEvent`s used in the context of mode communication

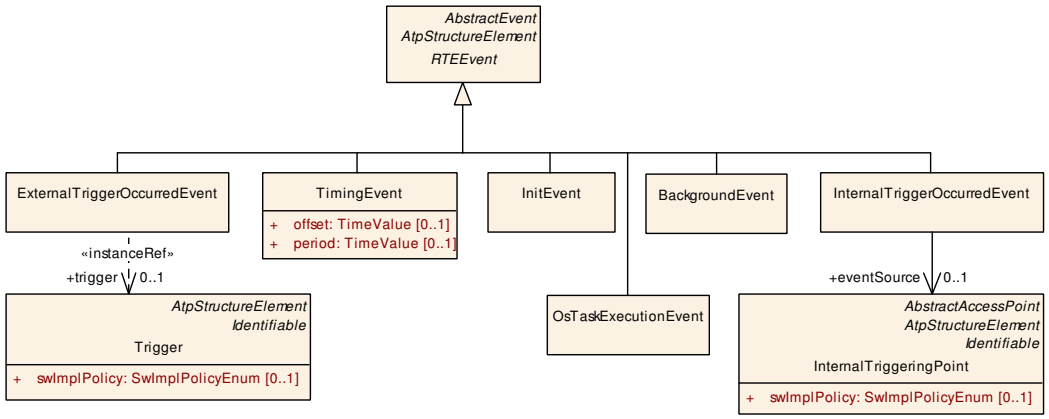

Figure 7.12: `RTEEvent`s for purposes other than communication

More explanation about the semantics of the meta-classes `SwcModeManagerErrorEvent` and `ModeErrorBehavior` is given in Chapter 9.4.

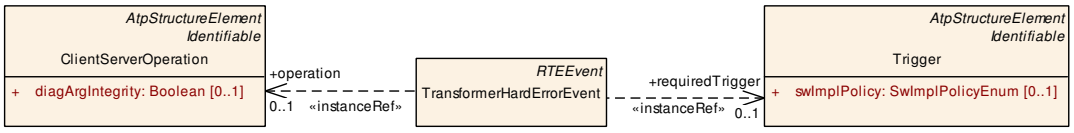

Figure 7.13: `RTEEvent` used in the context of data transformation

The details of the various kinds of concrete RTEEvents (such as the TimingEvent, DataSendCompletedEvent, etc.) are described in Chapter 7.5.1, Chapter 7.5.2 and Chapter 7.2.3.

7.3.2 Defining how to Respond to an Event

[TPS_SWCT_01317] RTE triggers RunnableEntity in response to occurring RTEEvent ⌈If the software-component description contains a reference from an RTEEvent to a RunnableEntity in the role startOnEvent, it is the responsibility of the RTE to trigger the execution of the corresponding RunnableEntity when the RTEEvent occurs.⌋

Figure 7.14 gives an overview of the modeling of WaitPoint.

[TPS_SWCT_01318] RunnableEntity and WaitPoint ⌈If the RunnableEntity wants to block and wait for RTEEvents (which makes the RunnableEntity into a cat. 2 RunnableEntity), the description of the RunnableEntity may include the definition of a WaitPoint.

Such a WaitPoint contains a reference to an RTEEvent that can unblock the specific WaitPoint. In other words: the WaitPoint will block until the referenced RTEEvents occur or the period specified in the attribute timeout expires.⌋

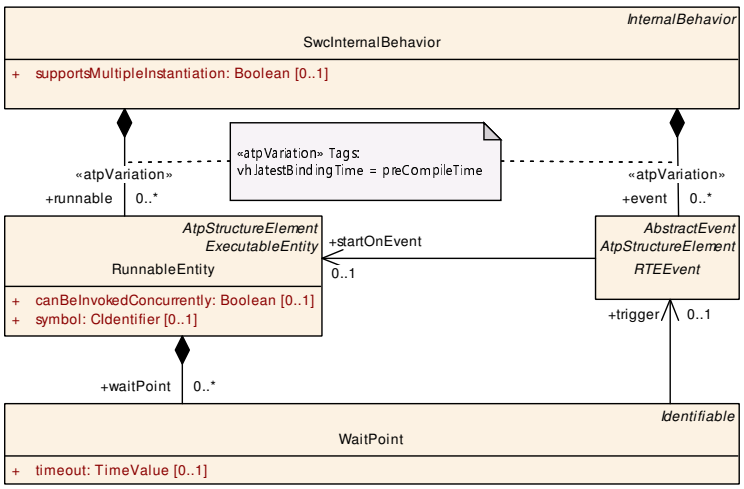

Figure 7.14: Description of the interaction between an RTEEvent and RunnableEntitys

[constr_1091] RTEEvents that may reference a WaitPoint

Imposition time: CP: IT_CpgExe

⌈A WaitPoint shall only be referenced from the listed RTEEvents:

- DataReceivedEvent
- DataSendCompletedEvent

- ModeSwitchedAckEvent
- AsynchronousServerCallReturnsEvent

⌋

[TPS_SWCT_01319] RTEEvent can be used to trigger WaitPoints in different RunnableEntitys ⌈It is in general possible that a single RTEEvent can be used to trigger WaitPoints in different RunnableEntitys.⌋

Concerning DataReceivedEvents, consider as well [constr_2021].

Class	**WaitPoint**			
Note	This defines a wait-point for which the RunnableEntity can wait.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	RunnableEntity.waitPoint			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
timeout	TimeValue	0..1	attr	Time in seconds before the WaitPoint times out and the blocking wait call returns with an error indicating the timeout.
trigger	RTEEvent	0..1	ref	This is the RTEEvent this WaitPoint is waiting for. **Tags:** atp.Splitkey=trigger

Table 7.25: WaitPoint

[constr_1951] Existence of attribute WaitPoint.timeout

Imposition time: CP: IT_RteGen

⌈For each WaitPoint, attribute timeout shall exist.⌋

[constr_1952] Existence of reference WaitPoint.trigger

Imposition time: CP: IT_CpgExe

⌈For each WaitPoint, the reference to RTEEvent in the role trigger shall exist.⌋

[constr_1096] SwcModeSwitchEvent and WaitPoint

Imposition time: CP: IT_CpgExe

⌈A RunnableEntity that has a WaitPoint shall not be referenced by a SwcModeSwitchEvent.⌋

[TPS_SWCT_01320] RunnableEntitys of category 2 ⌈RunnableEntitys that aggregate a WaitPoint are by definition of category 2 and therefore are not required to ever terminate. It is therefore difficult to let a RunnableEntity of category 2 implement a mode switch.⌋

[constr_1097] RunnableEntity that has a WaitPoint

Imposition time: CP: IT_RteGen

⌈A RunnableEntity that has a WaitPoint shall not be referenced by an RTEEvent that has a reference in the role disabledMode.⌋

[TPS_SWCT_01324] Mode switches need to be completed in finite time ⌈Mode switches need to be completed in finite time and a RunnableEntity that has a WaitPoint can never guarantee that the WaitPoint is resolved within finite time.⌋

In addition to this, the RunnableEntity with a WaitPoint that would be affected by a mode disabling would typically already be running when the mode disabling applies. It could not be terminated at this point in time.

7.4 Communication among Runnable Entities

It is taken for granted that particular RunnableEntitys within a specific AtomicSwComponentType will need to communicate among each other.

[TPS_SWCT_01321] Communication among RunnableEntitys ⌈The RTE shall provide synchronization mechanisms to the RunnableEntitys such that safe (in the multi-threading sense) exchange of data is possible.

In this case, the use of PortPrototypes is (although technically feasible) not required for the purpose.⌋

[TPS_SWCT_01592] Communication among RunnableEntitys of different instances of the same AtomicSwComponentType ⌈The communication among RunnableEntitys of different instances of the same AtomicSwComponentType is only supported via PortPrototypes.⌋

Several concepts for implementing communication among RunnableEntitys can be identified.

As an introduction, the Chapter 2.4.1 describes the various techniques that the RTE might use to provide efficient interaction between RunnableEntitys within one AtomicSwComponentType.

Two possible approaches for formal specification of this kind of communication are described:

- Specifying that several RunnableEntitys belong in a specific ExclusiveArea
- Specifying the data exchanged between the RunnableEntitys

7.4.1 Description Possibility 1: Exclusive Area

This section describes how the concept of ExclusiveAreas can be used in the description of the SwcInternalBehavior of an AtomicSwComponentType.

ExclusiveAreas are actually owned by the base class of SwcInternalBehavior, i.e. InternalBehavior. These ExclusiveAreas do not imply a specific implementation (e.g. with mutual-exclusion semaphores).

[TPS_SWCT_01031] ExclusiveArea ⌈An ExclusiveArea merely specifies a constraint on the scheduling policy and configuration of the RTE:

If two or more RunnableEntitys refer to the same ExclusiveArea, only one of these RunnableEntitys is allowed to be executed while being inside that ExclusiveArea.⌋

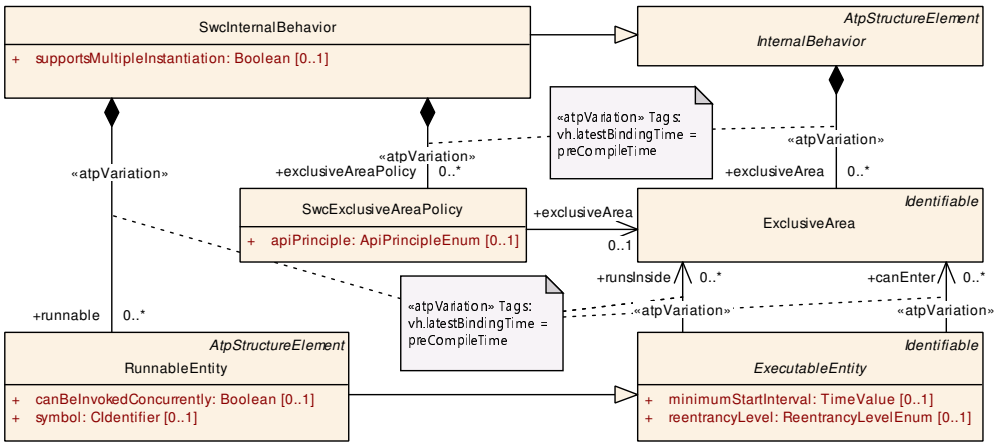

Figure 7.15: Description of logical exclusive areas

Class	**ExclusiveArea**			
Note	Prevents an executable entity running in the area from being preempted.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*InternalBehavior*.exclusiveArea			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 7.26: ExclusiveArea

In other words: these RunnableEntitys shall not run concurrently (preempt each other) while executing inside the ExclusiveArea.

Further details about the formal definition of meta-class ExclusiveArea are given in Figure 7.15.

[TPS_SWCT_01049] Two ways to use the ExclusiveAreas ⌈There are in general two ways to use the ExclusiveAreas. During its execution, a RunnableEntity can enter and exit an ExclusiveArea (in which case ExecutableEntity.canEnter shall exist).

As an alternative, it can be specified that the entire execution of a given RunnableEntity shall be guarded by an ExclusiveArea (this requires the existence of ExecutableEntity.runsInside).⌋

The options for entering an ExclusiveArea are documented in Chapter 7.4.1.1 and Chapter 7.4.1.2.

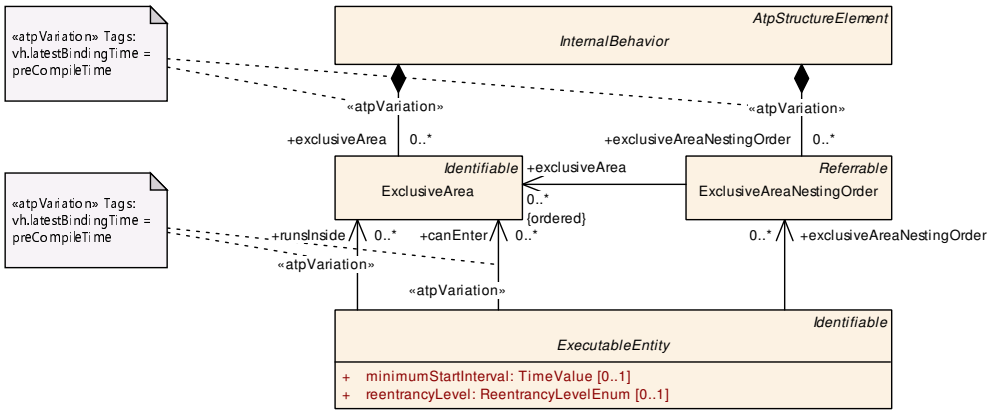

Figure 7.16: Description of nested usage of ExclusiveArea

[TPS_SWCT_01457] **ExclusiveAreaNestingOrder** ⌈The optional ExclusiveAreaNestingOrders shall (if used at all) describe possible nesting orders (including single ExclusiveAreas) which can occur in the RunnableEntity. Each possible locking situation requires its own ExclusiveAreaNestingOrder.⌋

[TPS_SWCT_01458] **Indicate that the locking behavior is fully described for RunnableEntity** ⌈All ExclusiveAreas which are configured in the InternalBehavior should be referenced by an ExclusiveAreaNestingOrder to indicate that the locking behavior is fully described for this RunnableEntity.⌋

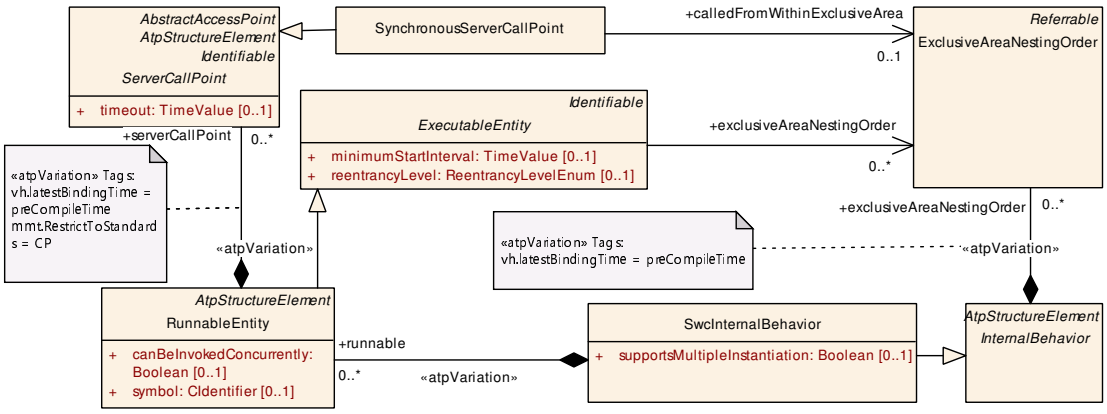

Figure 7.17: Nested usage of ExclusiveArea and the impact on SynchronousServerCallPoint

[TPS_SWCT_01459] Locking behavior is not described for this RunnableEntity ⌈If ExclusiveAreas are not referenced by any ExclusiveAreaNestingOrder (this is the default scenario), this means that the locking behavior is not described for this RunnableEntity and the provided information might be incomplete and cannot be used for a global offline analysis of locking behavior.⌋

An ExclusiveAreaNestingOrder is aggregated by the InternalBehavior that in turn also owns RunnableEntity.

Class	ExclusiveAreaNestingOrder			
Note	This meta-class represents the ability to define a nesting order of ExclusiveAreas. A nesting order (that may occur in the executable code) is formally defined to be able to analyze the resource locking behavior.			
Base	*ARObject*, *Referrable*			
Aggregated by	*InternalBehavior*.exclusiveAreaNestingOrder			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
exclusiveArea (ordered)	ExclusiveArea	*	ref	This represents a specific scenario of how Exclusive Areas can be used in terms of the nesting order.

Table 7.27: ExclusiveAreaNestingOrder

[TPS_SWCT_01460] Relation of SynchronousServerCallPoint to ExclusiveAreaNestingOrder ⌈If other RunnableEntitys are invoked synchronously from within the RunnableEntity, the ExclusiveAreaNestingOrder can then be referenced by one or several SynchronousServerCallPoints to specify the calling environment of the invoked server with regard to ExclusiveAreas.⌋

The purpose of this configuration is to analyze the resource locking behavior for complete call trees.

7.4.1.1 Entire Runnable Runs in the Exclusive Area

[TPS_SWCT_01050] RunnableEntity always runs inside an ExclusiveArea ⌈In the first approach, the formal description specifies that certain RunnableEntitys always run inside an ExclusiveArea.⌋

Example 7.2

If the formal description specifies that both RunnableEntity 'r1' and RunnableEntity 'r2' run within ExclusiveArea 's1', the RTE shall make sure that RunnableEntitys 'r1' and 'r2' never run concurrently; the scheduler should never preempt 'r1' to run 'r2'.

Note that this pattern does not force the RTE to implement this by using semaphores or mutexes that are taken before the RunnableEntity starts and given when the RunnableEntity returns. It only obliges the RTE to make sure that both RunnableEntitys are never running concurrently.

This requirement could be implemented by several of the implementation strategies described above. Examples for such implementation strategies are listed below.

Example 7.3

Scheduling strategy: if, for example, RunnableEntitys 'r1' and 'r2' (mentioned in Example 7.2) are mapped to the same task, the criterion is automatically satisfied. For this

purpose it is necessary to make sure that the OS can only execute a single instance of the task into which the RunnableEntitys are put.

Example 7.4

Mutual exclusion semaphores: if 'r1' and 'r2' are mapped to different tasks ('T1', respectively 'T2'), the OS shall make sure that while 'T1' is executing 'r1', 'T2' running 'r2' can never preempt it and vice versa. This could be implemented by taking a mutual-exclusion semaphore before executing 'r1' (or 'r2') in the context of 'T1' (or 'T2') and releasing the semaphore on exiting the RunnableEntity.

7.4.1.2 Runnable would Dynamically Enter and Leave the Exclusive Area

[TPS_SWCT_01051] RunnableEntity explicitly enters and leaves a specific ExclusiveArea ⌈In the second approach, the RunnableEntity would explicitly make API calls to the RTE within the implementation of the RunnableEntity to enter and leave a specific ExclusiveArea.⌋

This could, for example, be implemented by means of the priority ceiling concept described in Chapter 2.4.1.3.

Additionally, it is possible to define the execution time the RunnableEntity will spend in this ExclusiveArea segment. Although this aspect is described in the [6, TPS BSW Module Description Template], the concept can be applied to software-components as well.

7.4.1.3 Configuration of API Generation

For certain usage scenarios of ExclusiveAreas it is considered advantageous if each RunnableEntity uses a distinct set of enter and exit APIs.

This distinct set of APIs supports ExclusiveArea implementations where for the RunnableEntity(s) with the highest priority the lock is omitted.

This is possible when the RunnableEntity(s) with the highest priority cannot be interrupted by RunnableEntitys scheduled with lower priority.

To support this kind of implementation, the software-component description shall state (by means of attribute SwcInternalBehavior.exclusiveAreaPolicy.apiPrinciple) that it requests APIs individually for each RunnableEntity referencing an ExclusiveArea in the role canEnter.

Class	**SwcExclusiveAreaPolicy**			
Note	Options how to generate the ExclusiveArea related APIs. If no SwcExclusiveAreaPolicy is specified for an ExclusiveArea the default values apply.			
Base	*ARObject*			
Aggregated by	SwcInternalBehavior.exclusiveAreaPolicy			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
apiPrinciple	ApiPrincipleEnum	0..1	attr	Specifies for this ExclusiveArea if either one common set of Enter and Exit APIs for the whole software component is requested from the Rte or if the set of Enter and Exit APIs is expected per RunnableEntity. The default value is "common".
exclusiveArea	ExclusiveArea	0..1	ref	This reference represents the ExclusiveArea for which the policy applies. **Tags:** atp.Splitkey=exclusiveArea

Table 7.28: SwcExclusiveAreaPolicy

[constr_1953] Existence of attribute SwcExclusiveAreaPolicy.apiPrinciple

Imposition time: CP: IT_RteGen

⌈For each SwcExclusiveAreaPolicy that refers to an exclusiveArea, attribute apiPrinciple shall exist.⌋

Enumeration	**ApiPrincipleEnum**
Note	This enumeration represents the ability to control the granularity of API generation.
Aggregated by	BswExclusiveAreaPolicy.apiPrinciple, SwcExclusiveAreaPolicy.apiPrinciple
Literal	***Description***
common	The Rte or SchM API is provided for the whole software component / BSW Module **Tags:** atp.EnumerationLiteralIndex=0
perExecutable	The Rte or SchM API is provided for a specific ExecutableEntity of a software component / BSW Module **Tags:** atp.EnumerationLiteralIndex=1

Table 7.29: ApiPrincipleEnum

[TPS_SWCT_01713] ExclusiveArea is entered and exited by a common set of APIs ⌈If the value of attribute SwcExclusiveAreaPolicy.apiPrinciple is set to ApiPrincipleEnum.common, then the RTE provides **one set** of enter and exit APIs to be shared among all RunnableEntitys of the whole software-component.⌋

In this case, the same enter and exit code is executed by all affected RunnableEntitys and there is no way to have a special treatment for the RunnableEntity(s) executed in the context with the highest priority.

[TPS_SWCT_01714] ExclusiveArea is entered and exited by an individual set of APIs ⌈If the value of attribute SwcExclusiveAreaPolicy.apiPrinciple is set to ApiPrincipleEnum.perExecutable, then the RTE provides **individual** sets of APIs for entering and exiting ExclusiveAreas for each affected RunnableEntity.⌋

In this case, the implementation of enter and exit code for the RunnableEntity executed in the execution context with the highest priority can be left empty.

To avoid contradicting settings of SwcExclusiveAreaPolicys for one ExclusiveArea, [constr_1468] applies.

[constr_1468] Limitation on the number of SwcExclusiveAreaPolicys

Imposition time: CP: IT_CpgExe

⌈An ExclusiveArea shall be referenced by **at most** one SwcExclusiveAreaPolicy.⌋

7.4.2 Description Possibility 2: Inter-Runnable Variable

For certain cases the ExclusiveArea concept does not provide enough information to configure the RTE correctly. In these cases, a different approach may be advisable that is based on the guarded access to variables protected by the RTE.

For the purpose of identifying pieces of data that shall be accessed concurrently from different RunnableEntitys, formal support is required. In AUTOSAR, this aspect is summarized under the term “inter-runnable variable”.

[TPS_SWCT_01052] Inter-runnable variable ⌈These so-called “inter-runnable variables” are described with the element VariableDataPrototype aggregated in the role explicitInterRunnableVariable or implicitInterRunnableVariable.⌋

[TPS_SWCT_01053] Relationship of interchanged data with RunnableEntitys ⌈Furthermore, the relationship of these data with RunnableEntitys shall be specified.

For this specific purpose, RunnableEntity aggregates VariableAccess in the roles readLocalVariable and writtenLocalVariable.

Also, SwcInternalBehavior aggregates VariableDataPrototype in the roles explicitInterRunnableVariable and implicitInterRunnableVariable.

The connection between RunnableEntity and the explicitInterRunnableVariable and implicitInterRunnableVariable is created if the reference AutosarVariableRef.localVariable to the respective VariableDataPrototype exists.⌋

[TPS_SWCT_01521] Use AutosarVariableRef.localVariable for referencing inter-runnable variables ⌈A RunnableEntity that defines a VariableAccess in role writtenLocalVariable and readLocalVariable shall make use of AutosarVariableRef.localVariable.⌋

[constr_2026] Referenced `VariableDataPrototype` from `AutosarVariableRef` of `VariableAccess` in role `writtenLocalVariable` and `readLocalVariable`

Imposition time: CP: `IT_CpgExe`

⌈A `VariableDataPrototype` in the `localVariable` reference shall be owned by the same `SwcInternalBehavior` as this `RunnableEntity` belongs to, and the referenced `VariableDataPrototype` shall be defined in the role `implicitInterRunnableVariable` or `explicitInterRunnableVariable`.⌋

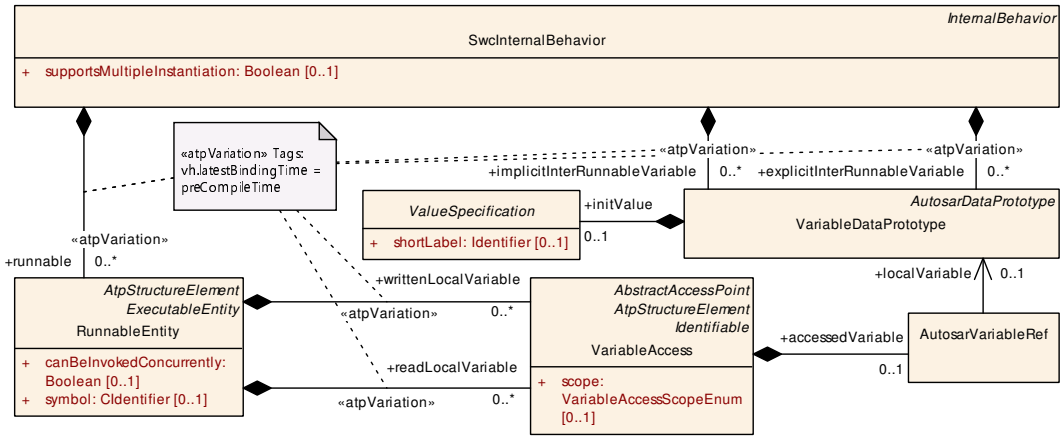

Figure 7.18: `implicitInterRunnableVariable` vs. `explicitInterRunnableVariable`

Obviously, the data-type of an `implicitInterRunnableVariable` or `explicitInterRunnableVariable` is described by the data type of the `VariableDataPrototype` (which is derived from `DataPrototype`).

[TPS_SWCT_01637] Initial value for a specific `implicitInterRunnableVariable` or `explicitInterRunnableVariable` ⌈It is possible (but not mandatory) to define an initial value for a specific `implicitInterRunnableVariable` or `explicitInterRunnableVariable`.

For this purpose the `VariableDataPrototype` in the role of `explicitInterRunnableVariable` or `implicitInterRunnableVariable` is able to aggregate a `ValueSpecification` in the role `initValue`.⌋

The statement made by [TPS_SWCT_01637] is reflected by Figure 7.18.

[TPS_SWCT_01522] No initial value is specified for `implicitInterRunnableVariable` or `explicitInterRunnableVariable` ⌈The behavior is undefined if no initial value is specified and a `RunnableEntity` reads an `implicitInterRunnableVariable` or `explicitInterRunnableVariable` before it is actually written to by another `RunnableEntity`.⌋

As already mentioned, the concept of an “inter-runnable variable” can be used in *two different flavors*. This is indicated by the two different roles explicitInterRunnableVariable or implicitInterRunnableVariable in which the VariableDataPrototype serving as the “inter-runnable variable” is aggregated.

These resemble the communication principles applied for the communication on the level of SwComponentTypes.

The two different kinds of inter-runnable variables are accessed via different [2, SWS RTE] API calls.

[TPS_SWCT_01054] Semantics of the explicitInterRunnableVariable ⌈The semantics of the explicitInterRunnableVariable is that *explicit* implies the direct access to the value of a VariableDataPrototype used in the role explicitInterRunnableVariable.

By this means it is possible to get different values for a specific VariableDataPrototype each time the corresponding API call is executed.⌋

[TPS_SWCT_01055] Semantics of implicitInterRunnableVariable ⌈The implicitInterRunnableVariable corresponds to an execution model where the value of an VariableDataPrototype does not change (for the reading RunnableEntity, obviously) during the runtime of a RunnableEntity.⌋

A detailed description of this approach is given in Chapter 2.4.1.4.

[constr_1296] DataPrototypes used as explicitInterRunnableVariable or implicitInterRunnableVariable and category DATA_REFERENCE

Imposition time: CP: IT_CpgExe

⌈A VariableDataPrototype shall not be aggregated by SwcInternalBehavior in either the role:

- explicitInterRunnableVariable, or
- implicitInterRunnableVariable

if the VariableDataPrototype (after potential indirections via TYPE_REFERENCE are resolved) is either typed by, or mapped to, an:

- ImplementationDataType of category DATA_REFERENCE, or
- ImplementationDataType that contains subElements that (after potential indirections via TYPE_REFERENCE are resolved) are of category DATA_REFERENCE.

⌋

7.4.3 Inter Runnable Triggering

The concept of *inter-runnable triggering* allows one RunnableEntity to trigger another RunnableEntity within an AtomicSwComponentType. This approach conceptually supports the decoupling of calculation and processing sequences inside a software-component.

By mapping the InternalTriggerOccurredEvents to OS Tasks running at different priorities, the triggered RunnableEntitys are in turn executed with a different priority than the triggering RunnableEntity.

For example, a cyclically triggered RunnableEntity which shall not exceed a certain worst case execution time (WCET) activates a second RunnableEntity if an error occurred to allow a (potentially) time-consuming exception handling at a lower priority level.

As illustrated in Figure 7.19, the triggering RunnableEntity needs an InternalTriggeringPoint.

The activation of RunnableEntitys in the same software-component instance is affected through the generic event-handling mechanism.

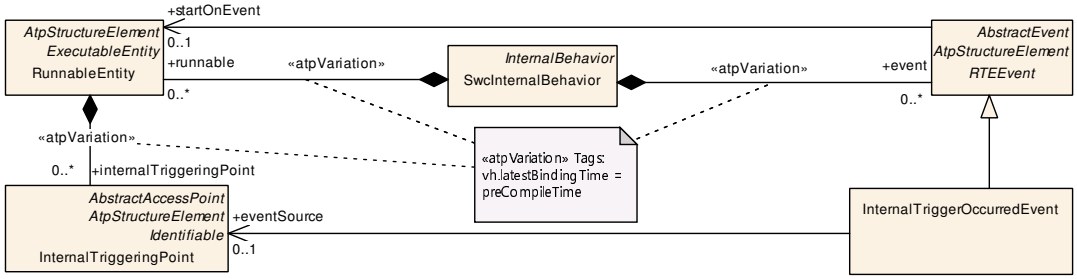

Figure 7.19: Model of software-component Inter Runnable Triggering

[TPS_SWCT_01523] Internal trigger event ⌈A RunnableEntity that shall be activated at the occurrence of an internal trigger event is defined by means of an InternalTriggerOccurredEvent which references the particular InternalTriggeringPoint and additionally the to-be-activated RunnableEntity.⌋

[TPS_SWCT_01022] Queued processing of internal trigger ⌈The attribute InternalTriggeringPoint.swImplPolicy can be used to specify a requirement whether the internal triggering of the enclosing RunnableEntity using the given InternalTriggeringPoint shall be queued.⌋

[constr_1182] Allowed values for InternalTriggeringPoint.swImplPolicy

Imposition time: CP: IT_RteGen

⌈The **only** allowed values for the attribute swImplPolicy of meta-class InternalTriggeringPoint are either STANDARD (in which case the processing of the internal triggering does not use a queue) or QUEUED (in which case the processing of internal triggering uses a queue).⌋

Class	InternalTriggeringPoint			
Note	If a RunnableEntity owns an InternalTriggeringPoint it is entitled to trigger the execution of RunnableEntitys of the corresponding software-component.			
Base	ARObject, AbstractAccessPoint, AtpClassifier, AtpFeature, AtpStructureElement, Identifiable, MultilanguageReferrable, Referrable			
Aggregated by	AtpClassifier.atpFeature, RunnableEntity.internalTriggeringPoint			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
swImplPolicy	SwImplPolicyEnum	0..1	attr	This attribute, when set to value queued, allows for a queued processing of Triggers.

Table 7.30: InternalTriggeringPoint

The description of the corresponding *external* trigger communication is contained in Chapter 7.5.3.

7.5 Data Access of Runnable Entities

This section describes the communication properties of an AtomicSwComponentType. This is done mainly from the point of view of a RunnableEntity (the concept of a RunnableEntity is introduced in Chapter 7.2).

However, the usage of a PortPrototype in a specific role within an AtomicSwComponentType also has an impact on communication behavior.

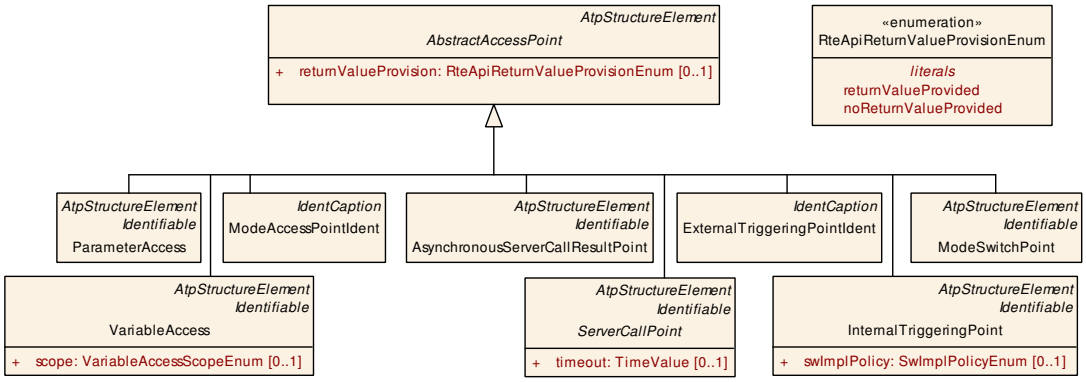

Figure 7.20: Modeling of the AbstractAccessPoint

Access of RunnableEntitys to the different elements in PortInterfaces or the InternalBehavior is modeled by a set of meta-classes specific to the communication pattern and the kind of access.

Nevertheless, all of those meta-classes inherit from AbstractAccessPoint to enable them to be referenced in a harmonized way by additional descriptions.

Class	**AbstractAccessPoint** (abstract)
Note	Abstract class indicating an access point from an ExecutableEntity.
Base	ARObject, AtpClassifier, AtpFeature, AtpStructureElement, Identifiable, MultilanguageReferrable, Referrable

△

Class	**AbstractAccessPoint** (abstract)			
Subclasses	AsynchronousServerCallResultPoint, ExternalTriggeringPointIdent, InternalTriggeringPoint, ModeAccessPointIdent, ModeSwitchPoint, ParameterAccess, *ServerCallPoint*, VariableAccess			
Aggregated by	*AtpClassifier*.atpFeature			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
returnValueProvision	RteApiReturnValueProvisionEnum	0..1	attr	This attribute controls the provision of return values for RTE APIs that correspond to the enclosing access point. This Attribute is only used by the AUTOSAR Classic Platform.

Table 7.31: AbstractAccessPoint

Enumeration	**RteApiReturnValueProvisionEnum**
Note	This meta-class provides values to control how return values from RTE APIs are provided. This Enumeration is only used by the AUTOSAR Classic Platform.
Aggregated by	*AbstractAccessPoint*.returnValueProvision
Literal	**Description**
noReturnValueProvided	The RTE API shall not provide a return value. **Tags:** atp.EnumerationLiteralIndex=1
returnValueProvided	The RTE API shall provide a return value. **Tags:** atp.EnumerationLiteralIndex=0

Table 7.32: RteApiReturnValueProvisionEnum

RunnableEntitys that access DataPrototypes in the context of PortPrototypes are **not** allowed to extend the data access to sub-elements of the respective DataPrototypes.

For example, assume a DataPrototype that effectively implements a structure of two elements A and B. It is **not** supported to send or receive only element A or only element B of the structure.

This assertion leads to the existence of [constr_1429] and, by extension, [constr_1430].

[constr_1429] Access to data within PortPrototypes from within RunnableEntitys

Imposition time: CP: IT_CpgExe

⌈For a VariableAccess that is aggregated in the roles

- RunnableEntity.dataWriteAccess
- RunnableEntity.dataReadAccess
- RunnableEntity.dataSendPoint
- RunnableEntity.dataReceivePointByArgument
- RunnableEntity.dataReceivePointByValue

the existence of the following attributes is not allowed:

- VariableAccess.accessedVariable.autosarVariable.contextDataPrototype
- VariableAccess.accessedVariable.autosarVariable.rootVariableDataPrototype
- VariableAccess.accessedVariable.autosarVariableInImplDatatype
- VariableAccess.accessedVariable.localVariable

In other words: in this case, only the references

- VariableAccess.accessedVariable.autosarVariable.portPrototype and
- VariableAccess.accessedVariable.autosarVariable.targetDataPrototype

shall exist and the latter shall **exclusively** refer to a VariableDataPrototype that is aggregated as either

- SenderReceiverInterface.dataElement or
- NvDataInterface.nvData.

⌋

[constr_1430] Access to local data from within RunnableEntitys

Imposition time: CP: IT_CpgExe

⌈For a VariableAccess that is aggregated in the roles

- RunnableEntity.writtenLocalVariable
- RunnableEntity.readLocalVariable

the existence of the following attributes is not allowed:

- VariableAccess.accessedVariable.autosarVariableInImplDatatype
- VariableAccess.accessedVariable.autosarVariable

In other words, **only** the reference VariableAccess.accessedVariable.localVariable shall be used in this case.⌋

[constr_1431] Access to parameters from within RunnableEntitys

Imposition time: CP: IT_CpgExe

⌈For a ParameterAccess that is aggregated in the role RunnableEntity.parameterAccess the existence of the following attributes is not allowed:

- ParameterAccess.accessedParameter.autosarParameter.contextDataPrototype

- ParameterAccess.accessedParameter.autosarParameter.root-ParameterDataPrototype

In other words: in this case, **one** of the following alternatives is allowed to exist:

- a combination of
  - ParameterAccess.accessedParameter.autosarParameter.port-Prototype and
  - ParameterAccess.accessedParameter.autosar-Parameter.targetDataPrototype that **exclusively** refers to a ParameterDataPrototype aggregated by a ParameterInterface in the role parameter.
- ParameterAccess.accessedParameter.localParameter that refers to a ParameterDataPrototype that is either aggregated as
  - InternalBehavior.constantMemory or
  - SwcInternalBehavior.perInstanceParameter or
  - SwcInternalBehavior.sharedParameter.

⌋

7.5.1 RunnableEntities and Sender Receiver Communication

This section describes aspects relevant for the sender-receiver communication of a software-component. These mainly influence the behavior and API of the AUTOSAR RTE.

[TPS_SWCT_01322] Interaction patterns for the application of the sender-receiver paradigm ⌈The possible interaction patterns for the application of the sender-receiver paradigm are explained, namely:

1. Data-access in a cat. 1 RunnableEntity,
2. explicit sending,
3. the DataSendCompletedEvent: dealing with the success/failure of an explicit send,
4. the DataReceivedEvent: responding to the reception of data,
5. and the DataReceiveErrorEvent: notifying an error concerning the reception of data.

⌋

7.5.1.1 Terminology

The AUTOSAR meta-model foresees two different approaches for sender-receiver communication. These are described in detail in Chapter 7.5.1.2 and Chapter 7.5.1.3. However, it turned out that it is rather cumbersome to discuss issues of communication approaches directly on the basis of meta-classes and their attributes.

Therefore, it seems appropriate to introduce a dedicated terminology for this purpose. The approach eventually selected was originally introduced by the contributors to the RTE specification.

This terminology proposes to use the term “implicit” for communication based on *data-access* (for more information about details of this approach please consult Chapter 7.5.1.2) and “explicit” for communication based on so-called *data-points* (please refer to Chapter 7.5.1.3).

The motivation for the differentiation between “implicit” and “explicit” was originally the characteristics of the RTE specification that foresaw an API for handling a `dataSendPoint` or `dataReceivePointByValue` in contrast to the *data-access* that was supposed to be part of the function signature (therefore, no API was required) of a specific `RunnableEntity`.

Although the specification of the RTE changed in the meantime (and the original motivation no longer applies), it turned out that the terminology based on “implicit” and “explicit” communication was already widely used within AUTOSAR.

As no consensus could be reached on alternative proposals, this terminology approach is taken over by this document as well.

7.5.1.2 Data Access

[TPS_SWCT_01323] Read and write access to a `dataElement` ⌈The `SwcInternalBehavior` may specify that a `RunnableEntity` needs read-access (respectively write-access) to the `VariableDataPrototype`s in the role `dataElement` of an `RPortPrototype` (respectively `PPortPrototype`, or `PRPortPrototype`).⌋

[TPS_SWCT_01325] Read and write access is only applicable for `RunnableEntity`s of category 1 ⌈The usage of the data-access mechanism to the `VariableDataPrototype`s is appropriate for cat. 1 `RunnableEntity`s only because it by concept guarantees finite response time (as opposed to e.g. unlimited blocking wait for some data).⌋

For more explanation, let’s suppose a cat. 2 `RunnableEntity` would have a `dataReadAccess` and a `dataWriteAccess`. The received `dataElement` would be updated **before** the `RunnableEntity` actually starts being executed and even if the `RunnableEntity` runs for a very long time the value of the `dataElement` would remain as is and never change.

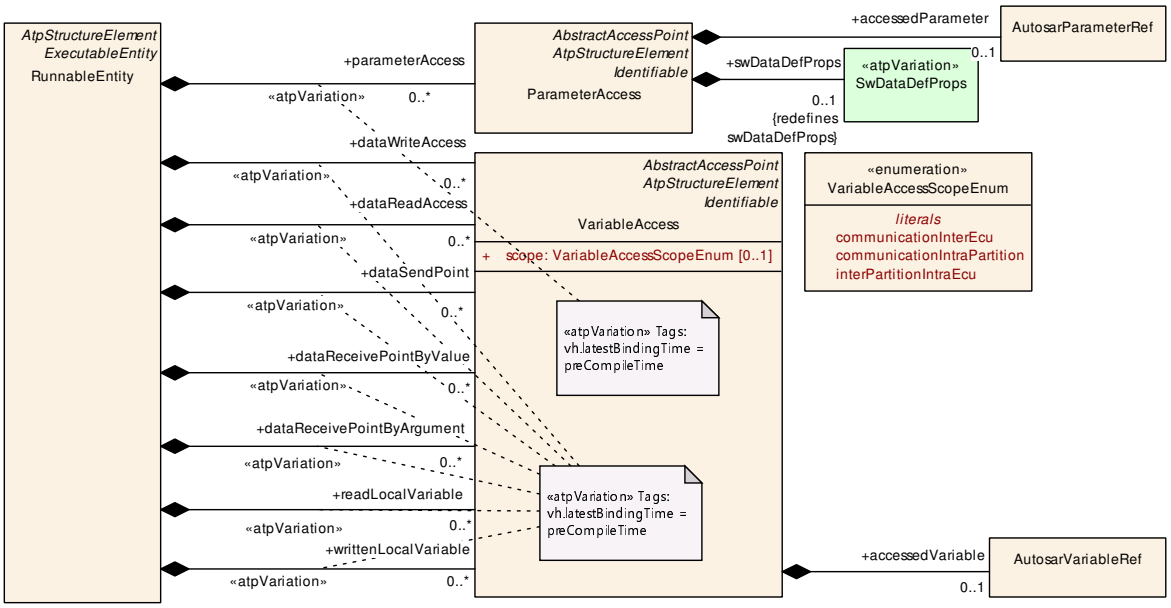

Figure 7.21: DataReadAccess and DataWriteAccess

On the other hand, the `RunnableEntity` might use its `dataWriteAccess` to perform a write access on the `dataElement` but the actual value might never make it beyond the `RunnableEntity` because

1. the latter is not required to terminate ever and
2. the actual write access is executed *after* the `RunnableEntity` terminates.

Class	**VariableAccess**			
Note	The presence of a `VariableAccess` implies that a `RunnableEntity` needs access to a `VariableDataPrototype`. The kind of access is specified by the role in which the class is used.			
Base	*ARObject*, *AbstractAccessPoint*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, *ReceiverComSpec*.replaceWith, RunnableEntity.dataReadAccess, RunnableEntity.dataReceivePointByArgument, RunnableEntity.dataReceivePointByValue, RunnableEntity.dataSendPoint, RunnableEntity.dataWriteAccess, RunnableEntity.readLocalVariable, RunnableEntity.writtenLocalVariable			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
accessedVariable	AutosarVariableRef	0..1	aggr	This denotes the accessed variable. **Tags:** atp.Splitkey=accessedVariable
scope	VariableAccessScopeEnum	0..1	attr	This attribute allows for constraining the scope of the corresponding communication. For example, it possible to express whether the communication is intended to cross the boundary of an ECU or whether it is intended not to cross the boundary of a single partition.

Table 7.33: VariableAccess

[constr_1954] Existence of attribute `VariableAccess.accessedVariable`

Imposition time: CP: `IT_CpgExe`

⌈For each `VariableAccess`, attribute `accessedVariable` shall exist.⌋

Enumeration	**VariableAccessScopeEnum**
Note	This enumeration defines scopes for communication.
Aggregated by	VariableAccess.scope
Literal	***Description***
communicationInterEcu	This case is foreseen to express that the corresponding communication shall be considered inter-ECU, i.e. it will cross the ECU boundary. This is considered the default case. **Tags:** atp.EnumerationLiteralIndex=0
communicationIntraPartition	This case is foreseen to express that the corresponding communication shall **not** cross the boundary of a partition. **Tags:** atp.EnumerationLiteralIndex=1
interPartitionIntraEcu	In this case the communication shall cross the boundaries of partitions within one ECU but it shall not cross the boundaries of the ECU itself. **Tags:** atp.EnumerationLiteralIndex=2

Table 7.34: VariableAccessScopeEnum

[TPS_SWCT_01326] Constrain the scope of a specific communication ⌈The purpose of the attribute `scope` of meta-class `VariableAccess` is to constrain the scope of the corresponding communication.

The main use-case for this ability is the development of a software-component where certain end-points of communication from or to the software-component are known to fulfill a certain constraint, e.g. execute within the same partition.⌋

[TPS_SWCT_01328] Default value of attribute `scope` ⌈The default value of attribute `scope` is set to `communicationInterEcu`.⌋

[constr_1141] Applicability of the `scope` attribute

Imposition time: CP: `IT_CpgExe`

⌈

The attribute `scope` of meta-class `VariableAccess` shall **only** be applied with respect to the aggregation of `VariableAccess` in the following roles:

- `dataReadAccess`
- `dataWriteAccess`
- `dataSendPoint`
- `dataReceivePointByValue`
- `dataReceivePointByArgument`

⌋

This aspect is depicted in Figure 7.21.

7.5.1.3 Explicit Sending and Receiving

[TPS_SWCT_01330] RunnableEntity can also have dataSendPoints ⌈A RunnableEntity can also have dataSendPoints (i.e. aggregate VariableAccess in the role dataSendPoint).

Using an instanceRef association, these eventually reference a VariableDataPrototype in the context of an AbstractProvidedPortPrototype, owned by the AtomicSwComponentType that is associated with the RunnableEntity that in turn owns the dataSendPoint.⌋

[constr_2004] Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataSendPoint

Imposition time: CP: IT_CpgExe

⌈A VariableAccess in the role dataSendPoint shall refer to a PPortPrototype or PRPortPrototype that is typed by either a SenderReceiverInterface or a NvDataInterface.⌋

[TPS_SWCT_01331] dataWriteAccess vs. dataSendPoint ⌈As opposed to the dataWriteAccess:

- Using the dataSendPoint, the RunnableEntity needs to explicitly "send" through an API; when using a dataWriteAccess, the RunnableEntity only needs to modify the value of certain variables.
- Using dataSendPoint, the RunnableEntity can decide to "send" an arbitrary number of times; when using dataWriteAccess the new value of the VariableDataPrototype is only made available after the RunnableEntity terminates.
- The presence of a dataSendPoint per definition lets the corresponding RunnableEntity attain cat. 1B.

⌋

[constr_1773] Value of attribute dataSendPoint.returnValueProvision

Imposition time: CP: IT_CpgExe

⌈All RunnableEntity.dataSendPoint that refer to the same accessedVariable shall define the identical value for attribute returnValueProvision.⌋

Rationale for the existence of [constr_1773]: different RunnableEntitys could aggregate VariableAccess in the role dataSendPoint with a different configuration of attribute returnValueProvision.

However, in such a case it would not be possible to generate the corresponding RTE API because the API exists once per software-component and it is therefore indispensable that all affected VariableAccess aggregated in the role dataSendPoint agree on the configuration of attribute returnValueProvision.

This relation is sketched in Figure 7.22.

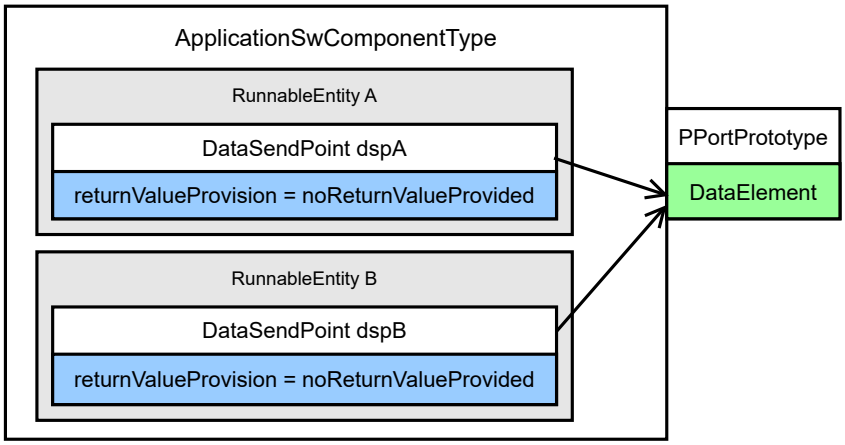

Figure 7.22: Modeling of attribute `dataSendPoint.returnValueProvision`

[TPS_SWCT_01663] `dataReadAccess` vs. `dataReceivePointByValue` or `dataReceivePointByArgument` ⌈As opposed to the `dataReadAccess`:

- Using the `dataReceivePointByValue` or `dataReceivePointByArgument`, the `RunnableEntity` always "receives" the latest value of the `dataElement` for each call to the respective API during the execution of the `RunnableEntity`.
- When using a `dataReadAccess`, the value of the respective `dataElement` is received before the `RunnableEntity` starts and does not change during the execution of the `RunnableEntity` independently of the number of API calls for implicit reception.
- The presence of a `dataReceivePointByValue` or `dataReceivePointBy-Argument` per definition lets the corresponding `RunnableEntity` attain cat. 1B.

⌋

For more details, please refer to Chapter 4.9.

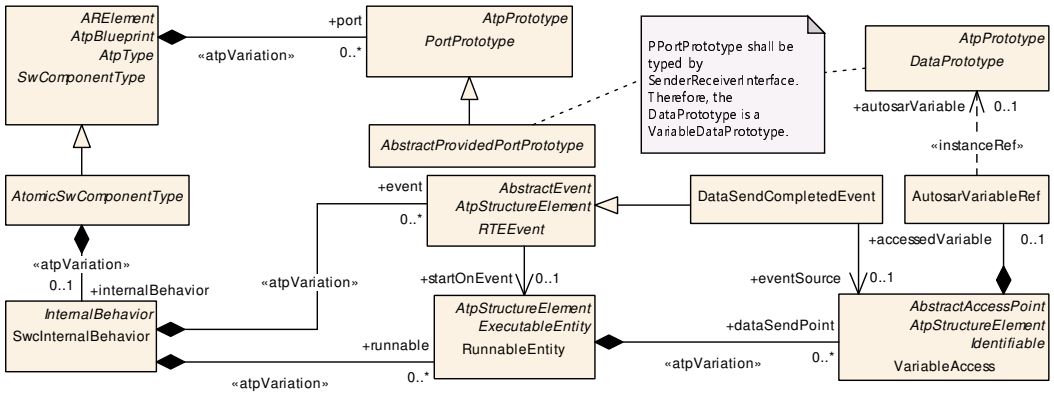

Figure 7.23: DataSendPoint

[TPS_SWCT_01332] dataReceivePointByValue vs. dataReceivePointByArgument ⌈In analogy to explicitly sending data it is also possible to define explicit polling for new available data through a dataReceivePointByValue or dataReceivePointByArgument.⌋

This aspect is visualized in Figure 7.24.

[constr_1277] SwDataDefProps.swImplPolicy of a VariableDataPrototype referenced by a VariableAccess aggregated in the role dataReceivePointByValue

Imposition time: CP: IT_CpgExe

⌈The SwDataDefProps.swImplPolicy of a VariableDataPrototype referenced by a VariableAccess aggregated in the role dataReceivePointByValue shall not be set to queued.⌋

Rationale for [constr_1277]: when using the return value of the applicable RTE API function to return the value of a VariableDataPrototype there is no way[3] to provide an indication that the queue is empty. Therefore, the only safe approach is to not permit this scenario at all, hence the constraint.

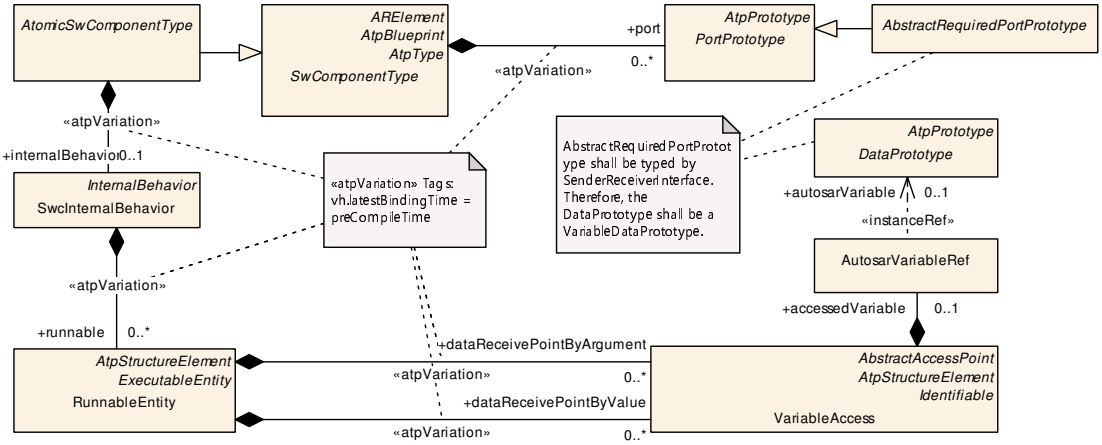

Figure 7.24: Definition of an explicit request to receive data

[TPS_SWCT_01333] dataReceivePointByValue/dataReceivePointByArgument vs. dataReadAccess ⌈By using a dataReceivePointByValue or dataReceivePointByArgument instead of dataReadAccess the constraining access to the referenced VariableDataPrototype (other RunnableEntitys shall not change the VariableDataPrototype during the read execution) is limited to a short, well-defined amount of time.⌋

[TPS_SWCT_01334] RunnableEntitys of category 1 may have dataReceivePointByValues/dataReceivePointByArguments ⌈Therefore, category 1

[3] That is, other than to use a function argument to return the status of the queue but that would obviously beat the purpose of the API function.

RunnableEntitys may also have dataReceivePointByValues/dataReceivePointByArguments and consequently become RunnableEntitys of category 1B.⌋

The categories of RunnableEntity are explained in Chapter 7.2.4.4.

Similar to the dataReadAccess, constraints apply to the reference target of the AutosarVariableRef of VariableAccess in role dataReceivePointByValue or dataReceivePointByArgument.

[constr_1774] Value of attribute dataReceivePointByArgument.returnValueProvision

Imposition time: CP: IT_CpgExe

⌈All RunnableEntity.dataReceivePointByArgument that refer to the same accessedVariable shall define the identical value for attribute returnValueProvision.⌋

Rationale for the existence of [constr_1774]: different RunnableEntitys could aggregate VariableAccess in the role dataReceivePointByArgument with a different configuration of attribute returnValueProvision.

However, in such a case it would not be possible to generate the corresponding RTE API because the API exists once per software-component and it is therefore indispensable that all affected VariableAccess aggregated in the role dataReceivePointByArgument agree on the configuration of attribute returnValueProvision.

This relation is exemplarily (for the case of dataSendPoint.returnValueProvision) sketched in Figure 7.22.

[constr_2005] Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataReceivePointByValue or dataReceivePointByArgument

Imposition time: CP: IT_CpgExe

⌈A VariableAccess in the role dataReceivePointByValue or dataReceivePointByArgument shall refer to an RPortPrototype or PRPortPrototype that is typed by either a SenderReceiverInterface or an NvDataInterface.⌋

[TPS_SWCT_01335] Combine dataReceivePointByValue or dataReceivePointByArgument with a WaitPoint ⌈In general, it is possible to combine a dataReceivePointByValue or dataReceivePointByArgument with a WaitPoint in the scope of a particular RunnableEntity.

This allows for a call to a blocking receive routine implemented by the RTE. The timeout attribute of meta-class WaitPoint can be used to specify the time until the blocking call expires.

But in the case of non-queued communication, it is **not supported** that a DataReceivedEvent is used in combination with a WaitPoint (see [constr_2021]). This contradicts the approach of the last-is-best semantics.⌋

[constr_2021] `WaitPoint` referencing a `DataReceivedEvent` cannot be used for non-queued communication

Imposition time: CP: `IT_CpgExe`

⌈A `WaitPoint` referencing a `DataReceivedEvent` is permitted **if and only if** the `swImplPolicy` of the `VariableDataPrototype` referenced by this `DataReceivedEvent` is set to `queued`.⌋

In this case, however, the `RunnableEntity` becomes category 2 in response to the presence of a `WaitPoint`.

7.5.1.4 Implicit Sending and Receiving

Implicit sending and receiving aims at the optimization of computation effort for sender-receiver communication.

Instead of executing the full amount of functionality for each call to a send-API or receive-API, the implicit communication only receives implicitly received values latest before the start of the execution of a RunnableEntity and sends implicitly sent values earliest after termination of the RunnableEntity.

[TPS_SWCT_01329] Access to specific data is implemented by means of aggregating the meta-class `VariableAccess` in specific roles ⌈From the formal point of view, access to specific data is implemented by aggregating the meta-class `VariableAccess` in specific roles.

This means that read access is defined by aggregating `VariableAccess` in the role `dataReadAccess`, while write access is defined by aggregating `VariableAccess` in the role `dataWriteAccess`.⌋

The following constraints apply to the reference target of the `AutosarVariableRef` of `VariableAccess` in role `dataReadAccess` or `dataWriteAccess`.

[constr_2002] Referenced `VariableDataPrototype` from `AutosarVariableRef` of `VariableAccess` in role `dataReadAccess`

Imposition time: CP: `IT_CpgExe`

⌈A `VariableAccess` in the role `dataReadAccess` shall refer to an `RPortPrototype` or `PRPortPrototype` that is typed by either a `SenderReceiverInterface` or a `NvDataInterface`.⌋

[constr_2003] Referenced `VariableDataPrototype` from `AutosarVariableRef` of `VariableAccess` in role `dataWriteAccess`

Imposition time: CP: `IT_CpgExe`

⌈A `VariableAccess` in the role `dataWriteAccess` shall refer to a `PPortPrototype` or `PRPortPrototype` that is typed by either a `SenderReceiverInterface` or a `NvDataInterface`.⌋

Access with VariableAccess in the dataReadAccess role always reads the last value of the VariableDataPrototype buffered before the RunnableEntity starts, and this value remains unchanged during the execution of the RunnableEntity.

It would therefore not make any sense to provide a queue of values for the purpose of accessing a dataElement in the role dataReadAccess.

[constr_2020] dataReadAccess cannot be used for queued communication

Imposition time: CP: IT_CpgExe

⌈The swImplPolicy of the VariableDataPrototype referenced by a VariableAccess in role dataReadAccess shall **not** be set to queued.⌋

[constr_1256] Acknowledgement feedback in n:1 writer case

Imposition time: CP: IT_CpgExe

⌈Within the scope of one SwcInternalBehavior, it is **not** allowed that two or more aggregated RunnableEntitys own either dataSendPoints or dataWriteAccesss that in turn point to the identical accessedVariable.autosarVariable.targetDataPrototype **if** the attribute transmissionAcknowledge exists in the context of the SenderComSpec owned by the dataSendPoint.accessedVariable.autosarVariable.portPrototype (or the respective construct for dataWriteAccess) that also refers to said dataElement.⌋

The background of [constr_1256] is that if two or more RunnableEntitys exist that can write to the identical dataElement it may happen that more than one RunnableEntity actually writes to the respective dataElement **before** the "first" acknowledgement is received. In this case it will never be possible to determine exactly which transmission has been acknowledged.

The difference between implicit and explicit sender/receiver communication is explained in [TPS_SWCT_01331] and [TPS_SWCT_01663].

7.5.1.5 DataSendCompletedEvent

[TPS_SWCT_01336] dataSendPoint also allows for the definition of a DataSendCompletedEvent ⌈The dataSendPoint also allows for the definition of a DataSendCompletedEvent. This RTEEvent occurs when the data has been successfully sent or when an error has occurred during sending.⌋

[constr_2033] Timeout of DataSendCompletedEvent

Imposition time: CP: IT_RteGen

⌈The timeout value of a WaitPoint associated with a DataSendCompletedEvent shall have the same value as the corresponding value of TransmissionAcknowledgementRequest.timeout.⌋

7.5.1.6 DataWriteCompletedEvent

[TPS_SWCT_01557] `dataWriteAccess` also allows for the definition of a `DataWriteCompletedEvent` ⌈The `dataWriteAccess` also allows for the definition of a `DataWriteCompletedEvent`. This `RTEEvent` occurs when the data has been successfully sent or when an error has occurred during sending.⌋

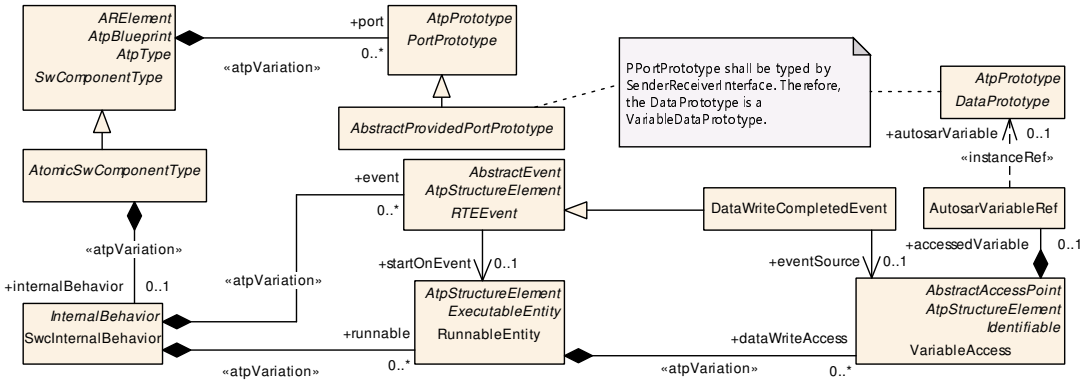

Figure 7.25: DataWriteAccess

[TPS_SWCT_01558] `DataWriteCompletedEvent` cannot be combined with a `WaitPoint` ⌈A `DataWriteCompletedEvent` cannot be associated with a `WaitPoint`, see [constr_1091].⌋

7.5.1.7 DataReceivedEvent

[TPS_SWCT_01337] `DataReceivedEvent` ⌈A receiver is notified through the same event mechanism when a `VariableDataPrototype` is received. The `DataReceivedEvent` is directly associated with the corresponding `VariableDataPrototype`.⌋

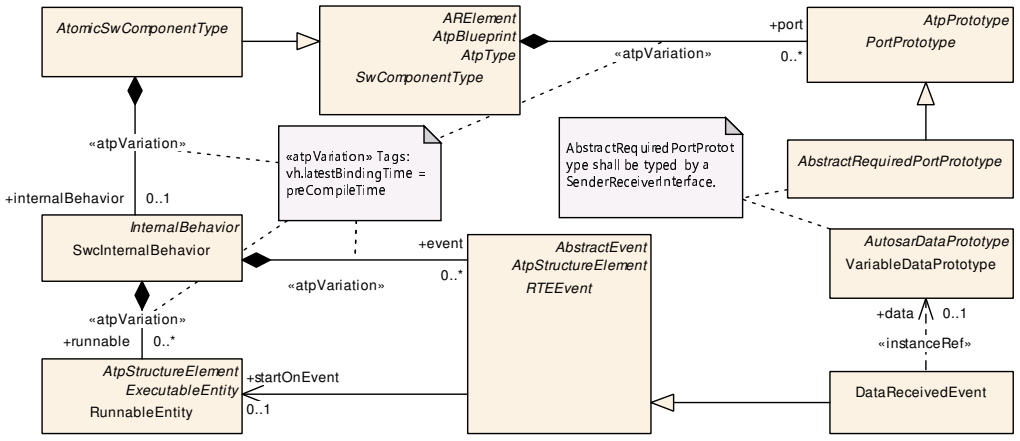

Figure 7.26: Receiver is notified by an event when new data has arrived

7.5.1.8 DataReceiveErrorEvent

[TPS_SWCT_01338] **DataReceiveErrorEvent** ⌈A receiver is notified of DataReceiveErrorEvent through the activation of its RunnableEntity which is referenced by this RTEEvent.

A DataReceiveErrorEvent includes a reference to a VariableDataPrototype and is raised by the RTE when an error concerning the reception of the referenced data is detected by the COM[4] layer.

The following cases present some situations which will cause the RTE to raise a DataReceiveErrorEvent:

- the RTE receives a signal-outdated notification from the COM layer when a monitored periodic signal is not received in time. The COM layer monitors the validity of the signal's value based on the value of the aliveTimeout attribute of ReceiverComSpec referencing the VariableDataPrototype associated with the signal. If the time elapsed since the last update of a signal's value exceeds its aliveTimeout then the COM layer notifies the RTE of a signal outdated error.
- the RTE receives a signal invalid notification from the COM layer when the COM layer detects that an incoming signal has the predefined "invalid" value.

⌋

[constr_10073] Existence of DataReceiveErrorEvent

Imposition time: CP: IT_CpgExe

⌈A DataReceiveErrorEvent shall only exist if it refers to a given VariableDataPrototype in the role data where either

- the VariableDataPrototype is referenced from a NonqueuedReceiverComSpec in the role dataElement and the attribute aliveTimeout of the NonqueuedReceiverComSpec exists and is set to a value > 0 **or**
- the VariableDataPrototype is aggregated by a SenderReceiverInterface where attribute invalidationPolicy.handleInvalid exists and is set to the value keep.

⌋

[TPS_SWCT_01339] RTE activates RunnableEntity in response to DataReceiveErrorEvent ⌈A DataReceiveErrorEvent is used by the RTE to activate a RunnableEntity that is supposed to handle the above-mentioned errors.

The error code will be made available to the activated RunnableEntity through the appropriate RTE API function.⌋

[4] In the case of internal communication, the RTE is not required to use the COM layer. It is also possible to implement the required behavior directly in the RTE.

[TPS_SWCT_01340] **DataReceiveErrorEvent cannot be combined with a WaitPoint** ⌈A DataReceiveErrorEvent cannot be associated with a WaitPoint, see [constr_1091].

It can only be used for the receiver software-component in a sender-receiver communication and its data reference is restricted to VariableDataPrototypes with their swImplPolicy attribute not set to queued.⌋

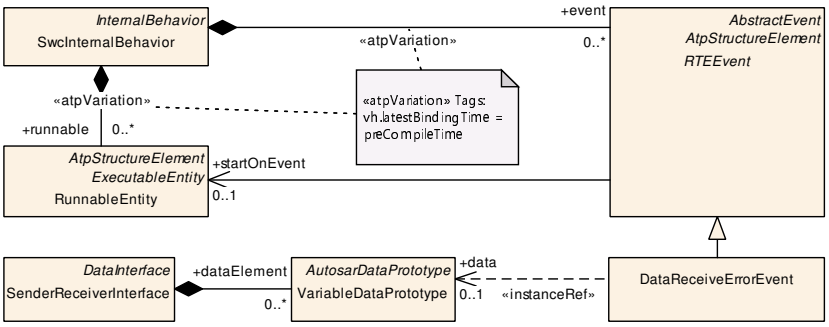

Figure 7.27: DataReceiveErrorEvent references a Runnable and a VariableDataPrototype

[TPS_SWCT_01341] **DataReceiveErrorEvent is directly associated with the corresponding VariableDataPrototype** ⌈The DataReceiveErrorEvent is directly associated with the corresponding VariableDataPrototype and references the RunnableEntity that is activated due to the occurrence of this RTEEvent.⌋

This aspect is depicted in Figure 7.27.

7.5.2 RunnableEntities and Client Server Communication

7.5.2.1 Invoking an Operation

[TPS_SWCT_01342] **Invocation of a server operation** ⌈A RunnableEntity invokes a server operation formally defined as a ClientServerOperation via an RPortPrototype of the enclosing SwComponentPrototype typed by a particular AtomicSwComponentType.⌋

[TPS_SWCT_01343] **Synchronous vs. asynchronous invocation** ⌈A ClientServerOperation itself can be invoked either “synchronously” or “asynchronously”.⌋

In the majority of cases the ClientServerOperation will be invoked at a different SwComponentPrototype but in general it would be possible to invoke a ClientServerOperation on the same SwComponentPrototype as well.

The decision whether a specific ClientServerOperation is called synchronously or asynchronously shall be specified in the formal description of the corresponding AtomicSwComponentType, namely in the context of an SwcInternalBehavior (see Figure 7.28 for more details).

But it is not supported to invoke the same instance of a ClientServerOperation synchronously and asynchronously together.

[constr_2022] Mutually exclusive use of SynchronousServerCallPoints and AsynchronousServerCallPoints

Imposition time: CP: IT_CpgExe

⌈A ClientServerOperation of a particular RPortPrototype shall be referenced by either a SynchronousServerCallPoint or an AsynchronousServerCallPoint, but not by both.⌋

[constr_1775] Value of attribute serverCallPoint.returnValueProvision

Imposition time: CP: IT_CpgExe

⌈All RunnableEntity.serverCallPoint that refer to the same operation shall define the identical value of attribute returnValueProvision.⌋

Rationale for the existence of [constr_1775]: different RunnableEntitys could aggregate ServerCallPoint with a different configuration of attribute returnValueProvision.

However, in such a case it would not be possible to generate the corresponding RTE API because the API exists once per software-component and it is therefore indispensable that all affected ServerCallPoints agree on the configuration of attribute returnValueProvision.

This relation is exemplarily (for the case of dataSendPoint.returnValueProvision) sketched in Figure 7.22.

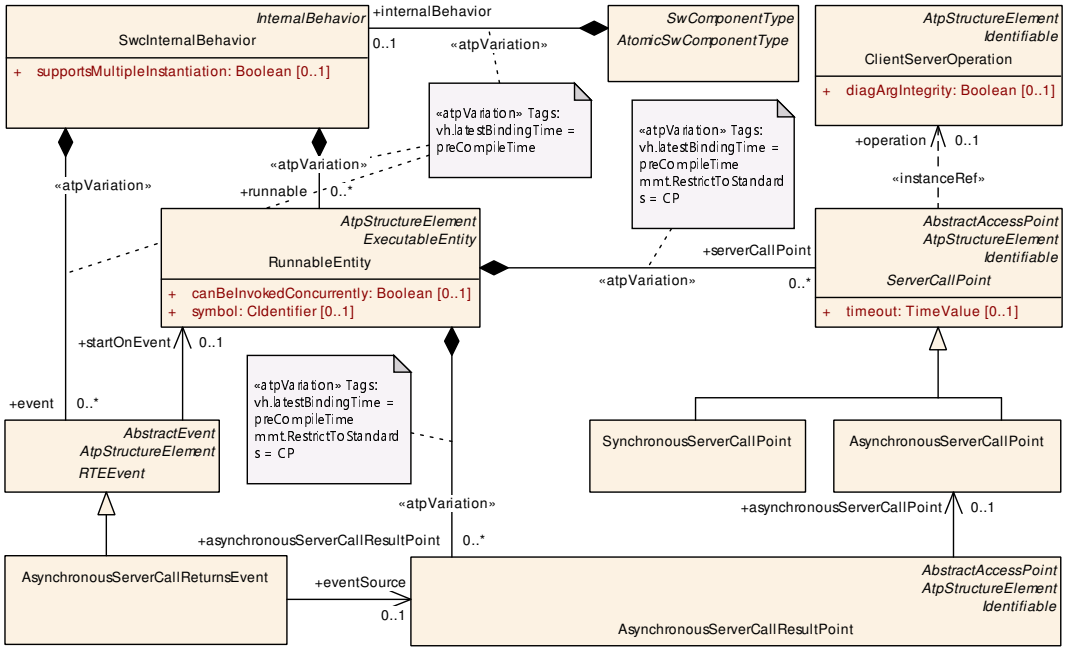

Figure 7.28: Model of a server call point.

[constr_2023] Consistency of `timeout` values

Imposition time: CP: `IT_RteGen`

⌈The `timeout` values of all `ServerCallPoint`s referencing the same instance of `ClientServerOperation` in a `RPortPrototype` shall be identical.⌋

[TPS_SWCT_01345] Synchronous operation invocation ⌈In the case of a synchronous operation invocation, the particular `RunnableEntity` merely needs a `SynchronousServerCallPoint`.⌋

More information can be found in Figure 7.28.

[TPS_SWCT_01346] Asynchronous operation invocation ⌈Asynchronous invocation is a bit more complex because it is necessary to specify how to respond to a notification about the completion of the corresponding operation.

This is done using the generic `RTEEvent` mechanism: the notification about an asynchronously executed operation having completed is implemented as an `AsynchronousServerCallReturnsEvent`.

Therefore, if an `AsynchronousServerCallReturnsEvent` is raised, the RTE can either trigger the execution of a specific `RunnableEntity` or the `AtomicSwComponentType` can implement a `WaitPoint` that blocks the execution of the calling `RunnableEntity` until the `AsynchronousServerCallReturnsEvent` is recognized.⌋

For example, let's consider the case of an asynchronous call to a remote operation where the RTE is supposed to trigger a specific `RunnableEntity` when the operation completes. The description of the corresponding `AtomicSwComponentType` would typically contain the following elements:

1. The `AtomicSwComponentType` contains an `RPortPrototype` 'myPort' typed by a `PortInterface` that in turn contains the definition of an `ClientServerOperation` 'remoteOperation'.
2. The `AtomicSwComponentType`'s `SwcInternalBehavior` contains at least two `RunnableEntity`s: the `RunnableEntity` 'main' is supposed to invoke the operation; the `RunnableEntity` 'callback' is the one that should be called when the operation completes.
3. The description of the `RunnableEntity` 'main' contains an `AsynchronousServerCallPoint` 'invokeMyOperation' referencing the respective `ClientServerOperation` in the `PortInterface` used to type the `PortPrototype` 'myPort'. This implies that the `RunnableEntity` is allowed to invoke this operation asynchronously.
4. The description of the `RunnableEntity` 'callback' contains an `AsynchronousServerCallResultPoint` 'fetchMyOperationResults' referencing the respective `AsynchronousServerCallPoint` 'invokeMyOperation'.

This implies that the RunnableEntity is allowed to fetch the results of the asynchronously invoked operation.

5. The description of the SwcInternalBehavior includes an AsynchronousServerCallReturnsEvent 'myOperationReturns' which references the previously defined AsynchronousServerCallResultPoint 'fetchMyOperationResults'.

6. The description of the AsynchronousServerCallReturnsEvent 'myOperationReturns' references the RunnableEntity 'callback', indicating that the RTE shall trigger the execution of this RunnableEntity when 'myOperationReturns' is raised.

[constr_1776] Value of attribute asynchronousServerCallResultPoint.returnValueProvision

Imposition time: CP: IT_CpgExe

⌈All RunnableEntity.asynchronousServerCallResultPoint that refer to the same AsynchronousServerCallPoint.operation shall define the identical value of attribute returnValueProvision.⌋

Rationale for the existence of [constr_1776]: different RunnableEntitys could aggregate AsynchronousServerCallResultPoint with a different configuration of attribute returnValueProvision.

However, in such a case it would not be possible to generate the corresponding RTE API because the API exists once per software-component and it is therefore indispensable that all affected AsynchronousServerCallResultPoints agree on the configuration of attribute returnValueProvision.

This relation is exemplarily (for the case of dataSendPoint.returnValueProvision) sketched in Figure 7.22.

Class	***ServerCallPoint*** (abstract)			
Note	If a RunnableEntity owns a ServerCallPoint it is entitled to invoke a particular ClientServerOperation of a specific RPortPrototype of the corresponding AtomicSwComponentType. This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARObject*, *AbstractAccessPoint*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	AsynchronousServerCallPoint, SynchronousServerCallPoint			
Aggregated by	*AtpClassifier*.atpFeature, RunnableEntity.serverCallPoint			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
operation	ClientServerOperation	0..1	iref	The operation that is called by this runnable. **Tags:** atp.Splitkey=operation, operation.contextRPort, operation.targetRequiredOperation **InstanceRef implemented by:** ROperationInAtomicSwcInstanceRef

▽

△

Class	ServerCallPoint (abstract)			
timeout	TimeValue	0..1	attr	Time in seconds before the server call times out and returns with an error message. It depends on the call type (synchronous or asynchronous) how this is reported.

Table 7.35: ServerCallPoint

[constr_1955] Existence of attribute ServerCallPoint.operation

Imposition time: CP: IT_CpgExe

⌈For each ServerCallPoint, attribute operation shall exist.⌋

[constr_1956] Existence of attribute ServerCallPoint.timeout

Imposition time: CP: IT_RteGen

⌈For each ServerCallPoint, attribute timeout shall exist.⌋

Class	SynchronousServerCallPoint			
Note	This means that the RunnableEntity is supposed to perform a blocking wait for a response from the server. This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARObject*, *AbstractAccessPoint*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServerCallPoint*			
Aggregated by	*AtpClassifier*.atpFeature, RunnableEntity.serverCallPoint			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
calledFrom WithinExclusive Area	ExclusiveAreaNesting Order	0..1	ref	This indicates that the call point is located at the deepest level inside one or more ExclusiveAreas that are nested in the given order. **Tags:** atp.Splitkey=calledFromWithinExclusiveArea

Table 7.36: SynchronousServerCallPoint

[constr_1957] Existence of reference AsynchronousServerCallResultPoint.asynchronousServerCallPoint

Imposition time: CP: IT_CpgExe

⌈For each AsynchronousServerCallResultPoint, the reference to AsynchronousServerCallPoint in the role asynchronousServerCallPoint shall exist.⌋

[constr_2006] Number of AsynchronousServerCallResultPoint referencing to one AsynchronousServerCallPoint

Imposition time: CP: IT_CpgExe

⌈The AsynchronousServerCallPoint may be referenced by at most one AsynchronousServerCallResultPoint.

If the reference exists, this means that only the RunnableEntity with this AsynchronousServerCallResultPoint can fetch the result of the asynchronous server invocation of this particular AsynchronousServerCallPoint.⌋

If a timeout occurs, the RTE shall trigger the AsynchronousServerCallReturnsEvent to deliver the information about the occurred timeout. For this purpose, an AsynchronousServerCallResultPoint shall exist.

Class	**AsynchronousServerCallPoint**			
Note	An AsynchronousServerCallPoint is used for asynchronous invocation of a ClientServerOperation. IMPORTANT: a ServerCallPoint cannot be used concurrently. Once the client RunnableEntity has made the invocation, the ServerCallPoint cannot be used until the call returns (or an error occurs!) at which point the ServerCallPoint becomes available again. This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARObject*, *AbstractAccessPoint*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServerCallPoint*			
Aggregated by	*AtpClassifier*.atpFeature, RunnableEntity.serverCallPoint			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 7.37: AsynchronousServerCallPoint

Class	**AsynchronousServerCallResultPoint**			
Note	If a RunnableEntity owns an AsynchronousServerCallResultPoint it is entitled to get the result of the referenced AsynchronousServerCallPoint. If it is associated with an AsynchronousServerCallReturnsEvent, this RTEEvent notifies the completion of the required ClientServerOperation or a timeout. The occurrence of this event can either unblock a WaitPoint or can lead to the invocation of a RunnableEntity. This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARObject*, *AbstractAccessPoint*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, RunnableEntity.asynchronousServerCallResultPoint			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
asynchronous ServerCallPoint	AsynchronousServer CallPoint	0..1	ref	The referenced Asynchronous Server Call Point defines the asynchronous server call from which the results are returned. **Tags:** atp.Splitkey=asynchronousServerCallPoint

Table 7.38: AsynchronousServerCallResultPoint

[constr_10529] Existence of AsynchronousServerCallResultPoint for AsynchronousServerCallPoint where attribute timeout is defined

Imposition time: CP: IT_CpgExe

⌈For each AsynchronousServerCallPoint where attribute timeout exists, an AsynchronousServerCallResultPoint shall exist that references the AsynchronousServerCallPoint in the role asynchronousServerCallPoint.⌋

If an AsynchronousServerCallPoint is not referenced by an AsynchronousServerCallResultPoint, this means that there is no operation result to fetch or the caller is not interested in the result. In this case, attribute timeout shall not be defined because the existence of the attribute would create a contradiction to [constr_10529].

[TPS_SWCT_01347] Blocking access to operation result in an asynchronous operation invocation ⌈If the call of the RTE fetching the operations results shall block

until the server returns, the RunnableEntity with the AsynchronousServerCall-ResultPoint shall additionally have a WaitPoint referencing the Asynchronous-ServerCallReturnsEvent which is associated with the AsynchronousServer-CallResultPoint representing the operations results access.

In this case the AsynchronousServerCallReturnsEvent shall not define a startOnEvent reference to a RunnableEntity.⌋

[constr_2030] AsynchronousServerCallResultPoint combined with Wait-Point shall belong to the same RunnableEntity

Imposition time: CP: IT_CpgExe

⌈A WaitPoint referencing a AsynchronousServerCallReturnsEvent as well as a AsynchronousServerCallResultPoint referenced by said Asynchronous-ServerCallReturnsEvent shall be aggregated by the same RunnableEntity.⌋

[constr_1521] Reference from AsynchronousServerCallReturnsEvent to AsynchronousServerCallResultPoint

Imposition time: CP: IT_CpgExe

⌈In the context of a RunnableEntity, a given AsynchronousServerCall-ResultPoint shall only be referenced by one AsynchronousServerCall-ReturnsEvent in the role eventSource.⌋

7.5.2.2 Providing an Implementation of an Operation

A software-component can define an OperationInvokedEvent for each operation inside one of the server AbstractProvidedPortPrototypes.

This way a RunnableEntity may respond to such an invocation through the generic event handling mechanisms described above (as formally expressed in Figure 7.29).

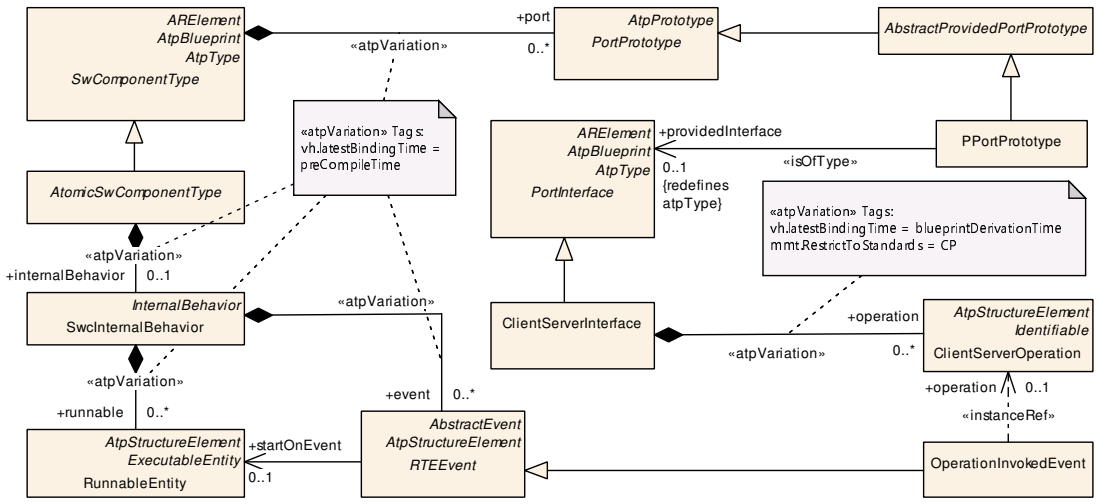

Figure 7.29: The OperationInvokedEvent references the operation that was called by a client.

7.5.2.3 Reacting on Data Transformation Errors

[TPS_SWCT_01624] Hard error occurs during the execution of a transformer chain ⌈If a hard error occurs during the execution of a transformer chain which is executed

- on the server side of a client/server communication and re-transforms the data that trigger a server RunnableEntity **or**
- on the trigger sink side of an inter-ECU external trigger communication,

this server RunnableEntity or trigger sink RunnableEntity cannot be started because the re-transformed data are not available.⌋

This might be a problem for the software-component if the software-component wants to react to transformer errors.

[TPS_SWCT_01616] Semantics of TransformerHardErrorEvent ⌈A software-component can define a TransformerHardErrorEvent

- for each ClientServerOperation inside one of the server PPortPrototypes (i.e. typed by a ClientServerInterface) or
- for each Trigger in trigger sink RPortPrototypes (i.e. typed by a TriggerInterface).

This way, a given RunnableEntity may define its response to a transformer error.⌋

7.5.3 RunnableEntities and External Trigger Event Communication

7.5.3.1 Trigger Source

[TPS_SWCT_01348] Trigger source ⌈A RunnableEntity of the triggering software-component raises an external trigger event via an AbstractProvidedPortPrototype of the enclosing SwComponentPrototype typed by a particular AtomicSwComponentType.

For this purpose the particular RunnableEntity shall have an ExternalTriggeringPoint that references the particular instance of the trigger in a PPortPrototype.⌋

[constr_1777] Value of attribute externalTriggeringPoint.returnValueProvision

Imposition time: CP: IT_CpgExe

⌈All RunnableEntity.externalTriggeringPoint that refer to the same trigger shall define the identical value of attribute returnValueProvision.⌋

Rationale for the existence of [constr_1777]: different RunnableEntitys could aggregate ExternalTriggeringPoints with a different configuration of attribute returnValueProvision.

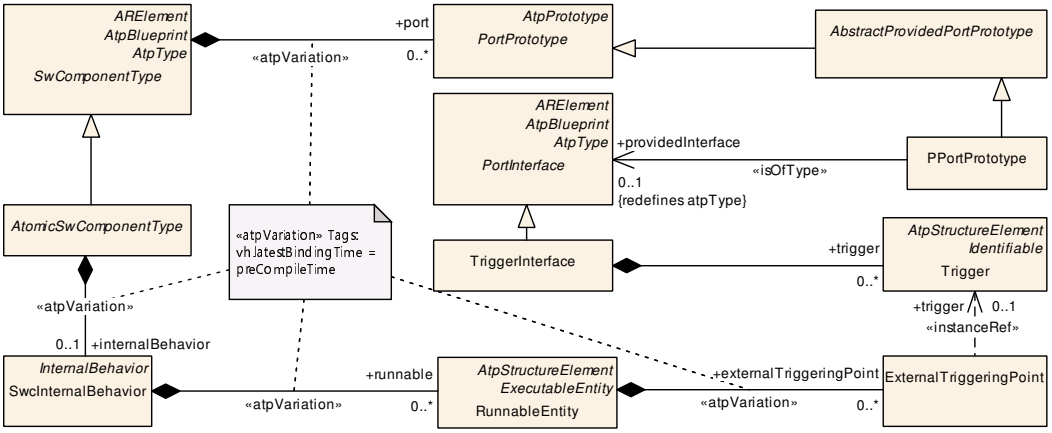

Figure 7.30: Model structure of a trigger source.

However, in such a case it would not be possible to generate the corresponding RTE API because the API exists once per software-component and it is therefore indispensable that all affected ExternalTriggeringPoints agree on the configuration of attribute returnValueProvision.

This relation is illustrated exemplarily (for the case of dataSendPoint.returnValueProvision) in Figure 7.22.

Class	**ExternalTriggeringPoint**			
Note	If a RunnableEntity owns an ExternalTriggeringPoint it is entitled to raise an ExternalTriggerOccurred Event.			
Base	*ARObject*			
Aggregated by	RunnableEntity.externalTriggeringPoint			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
ident	ExternalTriggeringPoint Ident	0..1	aggr	The aggregation in the role ident provides the ability to make the ExternalTriggeringPoint identifiable. From the semantical point of view, the ExternalTriggering Point is considered a first-class Identifiable and therefore the aggregation in the role ident shall always exist (until it may be possible to let ModeAccessPoint directly inherit from Identifiable). **Stereotypes:** atpIdentityContributor **Tags:** xml.sequenceOffset=-100

△

Class	**ExternalTriggeringPoint**			
trigger	Trigger	0..1	iref	The trigger taken for the ExternalTriggeringPoint. **Tags:** atp.Splitkey=trigger, trigger.contextPPort, trigger.target Trigger xml.namePlural=TRIGGER-IREF xml.roleElement=false xml.roleWrapperElement=true xml.typeElement=true xml.typeWrapperElement=false **InstanceRef implemented by:** PTriggerInAtomicSwc TypeInstanceRef

Table 7.39: ExternalTriggeringPoint

7.5.3.2 Trigger Sink

The activation of RunnableEntitys in the trigger sink is effected through the generic event handling mechanism.

[TPS_SWCT_01349] Trigger sink ⌈The fact that a RunnableEntity shall be activated on occurrence of an external trigger event is formally defined by means of ExternalTriggerOccurredEvent that references a particular instance of the trigger in a RPortPrototype and the RunnableEntity to be executed in response to the event.⌋

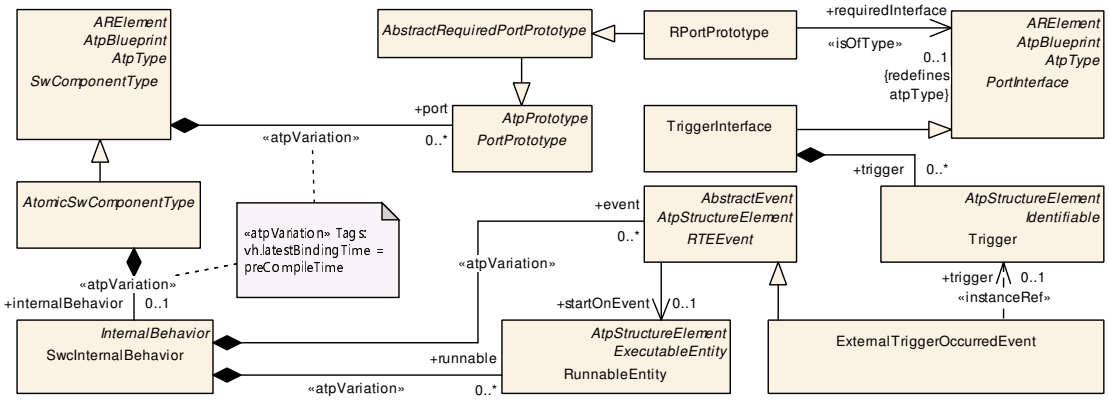

Figure 7.31: Model structure of a trigger sink

7.5.4 RunnableEntities and Parameter Access

There are several ways a Calibration Parameter is provided within a software-component.

[TPS_SWCT_01350] Calibration Parameters shared among several SwComponentTypes ⌈As mentioned above, if Calibration Parameters are shared

among several SwComponentTypes a dedicated PortInterface in a PortPrototype shall be used.⌋

The designer of a software-component can use this access mechanism when designing a RunnableEntity using, as input value, a DataPrototype:

- from an arbitrary RPortPrototype associated with a ClientServerInterface, SenderReceiverInterface or a NvDataInterface,
- VariableDataPrototype in the context of an SwcInternalBehavior

This input value will be fed to an interpolation routine whose result can be used internally or transferred to an adjacent SwComponentPrototype via dedicated PortPrototypes.

Typically, there will be a dedicated RunnableEntity that is executed on reception of the input value and that itself calls the interpolation routine with the appropriate input value and the appropriate ParameterDataPrototype.

The ParameterAccess also allows setting input values or shared axes through SwDataDefProps that are specific to the access point.

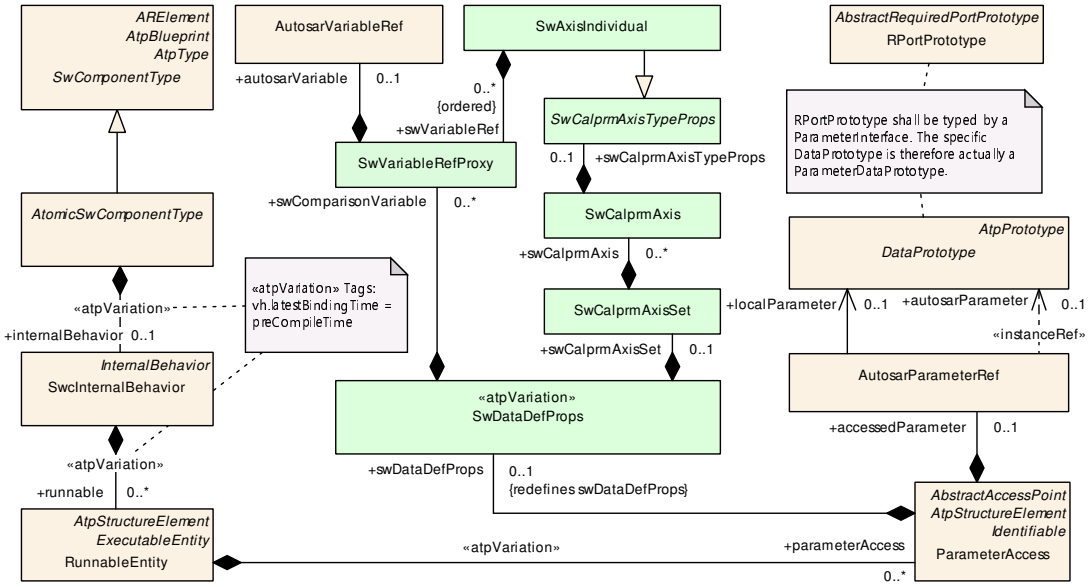

Figure 7.32: Runnable Access to a Calibration Port

The result of this interpolation routine call is provided as an ArgumentDataPrototype with direction being either set to out or inout in a ClientServerInterface.

Class	**ParameterAccess**
Note	The presence of a ParameterAccess implies that a RunnableEntity needs access to a ParameterDataPrototype.
Base	*ARObject*, *AbstractAccessPoint*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*

△

Class	ParameterAccess			
Aggregated by	*AtpClassifier*.atpFeature, RunnableEntity.parameterAccess			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
accessed Parameter	AutosarParameterRef	0..1	aggr	Reference to the accessed calibration parameter. **Tags:** atp.Splitkey=accessedParameter
swDataDef Props	SwDataDefProps	0..1	aggr	This allows denote instance and access specific properties, mainly input values and common axis. **Tags:** atp.Splitkey=swDataDefProps

Table 7.40: ParameterAccess

[constr_1958] Existence of attribute `ParameterAccess.accessedParameter`

Imposition time: CP: `IT_CpgExe`

⌈For each `ParameterAccess`, attribute `accessedParameter` shall exist.⌋

[TPS_SWCT_01351] Access to a `ParameterDataPrototype` ⌈The access to a `ParameterDataPrototype` shall be indicated

- by the `ParameterAccess` entity if the `RunnableEntity` accesses it from a `RPortPrototype`.
- by defining the `ParameterAccess` association from a `RunnableEntity` to the `ParameterDataPrototype` in the roles `sharedParameter` or `perInstanceParameter`.

⌋

More information on the topic of [TPS_SWCT_01351] can be found in Figure 7.32 as well as in Figure 2.5, in the lower association from `RunnableEntity` to `ParameterDataPrototype`.

Note: A `ParameterDataPrototype` in the roles `constantMemory` is not provided by the RTE and therefore the `ParameterAccess` association is not required to control the RTE API generation.

7.5.4.1 Instantiation Data Def Props

Typically, the accessibility and further information like alias names for a particular piece of data is modeled on the level of `DataPrototype`s (especially `VariableDataPrototype`s, `ParameterDataPrototype`s).

But due to the recursive structure of the meta-model concerning data types (an `ApplicationCompositeDataType` consists of `DataPrototype`s), a part of the relevant MCD information is described directly in the data type (in the case of a `ApplicationCompositeDataType`).

Class	**InstantiationDataDefProps**			
Note	This is a general class allowing to apply additional SwDataDefProps to particular instantiations of a DataPrototype. Typically the accessibility and further information like alias names for a particular data is modeled on the level of DataPrototypes (especially VariableDataPrototypes, ParameterDataPrototypes). But due to the recursive structure of the meta-model concerning data types (a composite (data) type consists out of data prototypes) a part of the MCD information is described in the data type (in case of ApplicationCompositeDataType). This is a strong restriction in the reuse of data typed because the data type should be re-used for different VariableDataPrototypes and ParameterDataPrototypes to guarantee type compatibility on C-implementation level (e.g. data of a Port is stored in PIM or a ParameterDataPrototype used as ROM Block and shall be typed by the same data type as NVRAM Block). This class overcomes such a restriction if applied properly.			
Base	*ARObject*			
Aggregated by	NvBlockDescriptor.instantiationDataDefProps, ParameterSwComponentType.instantiationDataDefProps, SwcInternalBehavior.instantiationDataDefProps			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
parameter Instance	AutosarParameterRef	0..1	aggr	This reference identifies the particular DataPrototype (defined in the context of a composite ParameterDataPrototype) on which the swDataDef Props shall be applied. **Tags:** atp.Splitkey=parameterInstance
swDataDef Props	SwDataDefProps	0..1	aggr	These are the particular data definition properties which shall be applied **Tags:** atp.Splitkey=swDataDefProps
variableInstance	AutosarVariableRef	0..1	aggr	This reference identifies the particular DataPrototype (defined in the context of a composite VariableDataPrototype) on which the swDataDef Props shall be applied. **Tags:** atp.Splitkey=variableInstance

Table 7.41: InstantiationDataDefProps

This is a strong restriction in the re-use of data types because the ApplicationCompositeDataType should be re-used for different VariableDataPrototypes and ParameterDataPrototypes to guarantee type compatibility on C-implementation level (e.g. data of a PortPrototype is stored in a PIM or a ParameterDataPrototype used as ROM Block and shall be typed by the same data type as NVRAM Block).

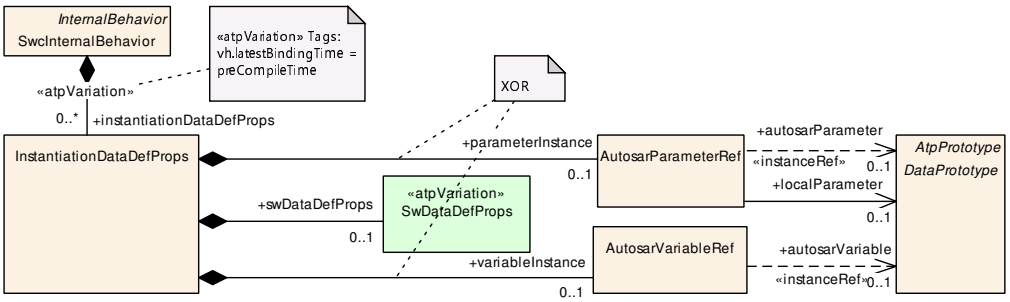

Figure 7.33: applying instantiation specific data definition properties

This restriction is overcome by InstantiationDataDefProps, as shown in Figure 7.33.

[constr_1959] Existence of attribute `InstantiationDataDefProps.swDataDefProps`

Imposition time: CP: `IT_CpgExe`

⌈For each `InstantiationDataDefProps`, attribute `swDataDefProps` shall exist.⌋

Documented use cases for the application of `InstantiationDataDefProps` can be found in [TPS_SWCT_01846], [TPS_SWCT_01847], and [TPS_SWCT_01848].

7.5.5 RunnableEntities and Mode Communication

For the communication of modes between `RunnableEntity`s, two use cases shall be distinguished.

[TPS_SWCT_01352] Requested mode is just sent and received as an ordinary data value ⌈In the first case, a requested mode is just sent and received as an ordinary data value without specifying the details of mode switching in the corresponding port interface.

This mechanism is used if the receiving `RunnableEntity` is not directly implementing a mode switch but does further processing of the mode request. This is especially required to transfer mode requests between ECUs.

In this case, the mode is transferred via sender-receiver communication so that the involved `RunnableEntity`s only require the same type of APIs against the RTE as for sender-receiver communication.

This is possible, because `ModeDeclarationGroupPrototype`s can be mapped to an `ImplementationDataType`.⌋

This concept and the meta-classes needed for the mapping are further explained in Chapter 4.3.4.

[TPS_SWCT_01353] `RunnableEntity`s react to a mode request via a corresponding `RTEEvent` ⌈In the second case, one `RunnableEntity` "sends" a mode request and one or more other `RunnableEntity`s react to the request via a corresponding `RTEEvent` or by being suppressed from being triggered any longer by other `RTEEvent`s.

In this case, special APIs against the RTE are required and the RTE shall implement the actual mode switch. This kind of communication is only possible between software-components on the same ECU.⌋

For further explanation of the general concept refer to Chapter 4.3.4 and for the details of the meta-model for mode switches refer to Chapter 9.

7.6 Port API Options

[TPS_SWCT_01354] `PortAPIOption` ⌈The RTE Generator needs additional options per `PortPrototype` to choose the proper generation schema. These are subsumed in the `PortAPIOption` element.⌋

The meta-class `PortAPIOption` is depicted in Figure 7.34.

[constr_10543] Uniqueness of reference `PortAPIOption.port`

Imposition time: CP: `IT_CpgExe`

⌈Any `PortPrototype` may be referenced **at most once** in the role `PortAPIOption.port`.⌋

[constr_10544] Ownership of reference `PortAPIOption.port`

Imposition time: CP: `IT_CpgExe`

⌈A `PortPrototype` referenced in the role `PortAPIOption.port` shall be owned by the same `AtomicSwComponentType` that also owns the `SwcInternalBehavior` that in turn owns the `PortAPIOption` from which the `PortPrototype` is referenced.⌋

[TPS_SWCT_01626] Error notification of data transformer errors ⌈If the attribute `PortAPIOption.errorHandling` is set to `transformerErrorHandling`, then all `RunnableEntity`s accessing the `PortPrototype` referenced by `port` shall handle the extended transformer error notification.⌋

Class	**PortAPIOption**			
Note	Options how to generate the signatures of calls for an AtomicSwComponentType in order to communicate over a PortPrototype (for calls into a RunnableEntity as well as for calls from a Runnable Entity to the PortPrototype).			
Base	*ARObject*			
Aggregated by	SwcInternalBehavior.portAPIOption			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
enableTake Address	Boolean	0..1	attr	If set to true, the software-component is able to use the API reference for deriving a pointer to an object.
errorHandling	DataTransformation ErrorHandlingEnum	0..1	attr	This specifies whether a RunnableEntity accessing a Port Prototype that is referenced by this PortAPIOption shall specifically handle transformer errors or not.
indirectAPI	Boolean	0..1	attr	If set to true this attribute specifies an "indirect API" to be generated for the associated port which means that the software-component is able to access the actions on a port via a pointer to an object representing a port. This allows e.g. iterating over ports in a loop. This option has no effect for PPortPrototypes of client/server interfaces.
port	PortPrototype	0..1	ref	The option is valid for generated functions related to communication over this port **Stereotypes:** atpIdentityContributor

▽

△

Class	**PortAPIOption**			
portArgValue (ordered)	PortDefinedArgument Value	*	aggr	An argument value defined by this port.
supported Feature	SwcSupportedFeature	*	aggr	This collection specifies which features are supported by the RunnableEntitys which access a PortPrototype that it referenced by this PortAPIOption. **Tags:** atp.Splitkey=supportedFeature
transformer Status Forwarding	DataTransformation StatusForwardingEnum	0..1	attr	This attribute specifies whether a RunnableEntity accessing a PortPrototype that is referenced by this Port APIOption shall be able to forward a status code to the transformer chain.

Table 7.42: PortAPIOption

Enumeration	**DataTransformationErrorHandlingEnum**
Note	This enumeration defines different ways how a RunnableEntity shall handle transformer errors.
Aggregated by	PortAPIOption.errorHandling
Literal	***Description***
noTransformerError Handling	A runnable does not handle transformer errors. **Tags:** atp.EnumerationLiteralIndex=0
transformerError Handling	The runnable implements the handling of transformer errors. **Tags:** atp.EnumerationLiteralIndex=1

Table 7.43: DataTransformationErrorHandlingEnum

[constr_1960] Existence of attribute `PortAPIOption.port`

Imposition time: CP: `IT_CpgExe`

⌈For each `PortAPIOption`, attribute `port` shall exist.⌋

[TPS_SWCT_03500] Status forwarding to data transformer ⌈If the attribute `PortAPIOption.transformerStatusForwarding` is set to `transformerStatusForwarding`, then all `RunnableEntity`s accessing the `PortPrototype` referenced in the role `PortAPIOption.port` shall provide the `argument` named `forwardedCode` to the transformer chain.⌋

[TPS_SWCT_03501] Applicability of status forwarding to data transformer ⌈The attribute `PortAPIOption.transformerStatusForwarding` shall only be set to `transformerStatusForwarding` if the transported data is originating from a transformed source and is not altered.⌋

The restriction of [TPS_SWCT_03501] is especially necessary in the case of E2E protected data routing where the source of the data is received with a *transformer error* using `PortAPIOption.errorHandling` = `transformerErrorHandling`.

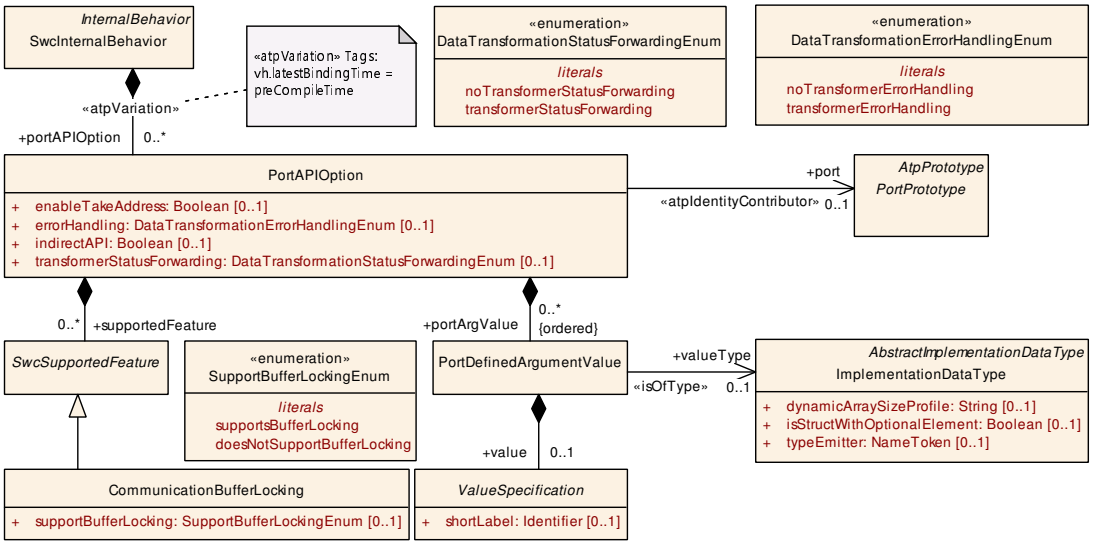

Figure 7.34: Port API Options.

Enumeration	**DataTransformationStatusForwardingEnum**
Note	This enumeration defines different ways how a RunnableEntity shall be able to forward status code into the transformer chain.
Aggregated by	PortAPIOption.transformerStatusForwarding
Literal	***Description***
noTransformer StatusForwarding	The RunnableEntity is not able to forward a transformer status code. **Tags:** atp.EnumerationLiteralIndex=0
transformerStatus Forwarding	The RunnableEntity is able to forward a transformer status code. **Tags:** atp.EnumerationLiteralIndex=1

Table 7.44: DataTransformationStatusForwardingEnum

7.6.1 Enable to Take Address

[TPS_SWCT_01355] **`enableTakeAddress` = `true`** ⌈If the attribute `enableTakeAddress` = `true`, the generated API functions related to this `PortPrototype` shall be implemented by means of true/native C functions (as opposed to function-like preprocessor macros) so that it is possible to access the API functions via their address (by means of function-pointers).⌋

The main focus of the feature is support for configuration of AUTOSAR Services which are limited to single instances.

[constr_2024] **`enableTakeAddress` is restricted to single instantiation**

Imposition time: CP: `IT_CpgExe`

⌈The definition of a `PortAPIOption` with `enableTakeAddress` set to `true` is only permitted for software-components where the attribute `SwcInternalBehavior.supportsMultipleInstantiation` is set to `false`.⌋

7.6.2 Indirect API Generation

[TPS_SWCT_01356] `indirectAPI` option switches the generation of the RTE's indirect API functionality ⌈The `indirectAPI` option switches the generation of the RTE's indirect API functionality for a certain `PortPrototype`. The generated indirect API allows iterating over ports within the SW-Component.⌋

7.6.3 Port Defined Argument Value

[TPS_SWCT_01357] Definition of implicit values that are passed by the RTE to the server's entry point ⌈In addition to the formal parameters of a client/server invocation that are defined as part of the server's `PortInterface`, it is possible to specify a number of implicit values that are passed by the RTE to the server's entry point.⌋

The initial need for this feature arises in the context of basic software services, although it is not limited to those.

For a service like the NVRAM manager, every accessing `PortPrototype` is in addition to its logical identity - as a sequence of `shortName`s - uniquely identified through an NVRAM specific memory block id. This block id shall be defined in the context of ECU integration and not by the client components.

Instead of exposing this mechanism on the logical `ClientServerInterface` level in form of a formal `argument`, one or more `PortDefinedArgumentValue`s can be specified.

[TPS_SWCT_01358] Values are hidden from the client components ⌈Because these values are specified only in the context of the `AbstractProvidedPortPrototype`, they are hidden from the client software components, keeping their design and code independent of the server software component details.⌋

In the example of the NVRAM manager, this allows defining the block id in the context of ECU integration and not by the client components. In particular, this would be just one value of type int8 or int16 holding the memory block id.

Figure 7.34 shows the meta-model of Port API Options and the `portArgValue`.

[constr_1150] Usage of `valueType` for `PortDefinedArgumentValue`

Imposition time: CP: `IT_RteGen`

⌈The `valueType` (typically this boils down to integer values used to specify an "id") associated with `PortDefinedArgumentValue` shall be of `category` `VALUE` or `TYPE_REFERENCE`. The latter case is only supported if the value of `category` of the target data type is set to `VALUE`.⌋

HINT

The stereotype ≪isOfType≫ is used to decorate the reference in the role PortDefinedArgumentValue.valueType.

According to the AUTOSAR abstract structure (see TPS GST), this stereotype is only applicable for references from an AtpPrototype to an AtpType (see [TPS_GST_00031]). PortDefinedArgumentValue **is not derived from AtpPrototype and does therefore not fulfill the prerequisite for the usage of ≪isOfType≫.**

This observation has only been made after the PortDefinedArgumentValue was already a model element that is subject to backwards-compatibility requirements.

Therefore, the stereotype cannot be revoked because its existence has an impact on the generation of the AUTOSAR XML schema.

In particular, the schema representation of the respective reference is named VALUE-TYPE-TREF instead of the canonical VALUE-TYPE-REF that is created in the absence of the stereotype, which would render the removal of the stereotype a backwards-incompatible change.

[constr_1386] A PortDefinedArgumentValue shall only be defined for AbstractProvidedPortPrototype

Imposition time: CP: IT_RteGen

⌈A PortAPIOption which aggregates at least one PortDefinedArgumentValue in the role portArgValue shall reference an AbstractProvidedPortPrototype typed by a ClientServerInterface in the role port.⌋

Consequently, PortDefinedArgumentValues shall not be used together with RPortPrototypes.

Class	**PortDefinedArgumentValue**			
Note	A PortDefinedArgumentValue is passed to a RunnableEntity dealing with the ClientServerOperations provided by a given PortPrototype. Note that this is restricted to PPortPrototypes of a ClientServer Interface.			
Base	*ARObject*			
Aggregated by	PortAPIOption.portArgValue			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
value	ValueSpecification	0..1	aggr	Specifies the actual value.
valueType	ImplementationDataType	0..1	tref	The implementation type of this argument value. It should not be composite type or a pointer. **Stereotypes:** isOfType

Table 7.45: PortDefinedArgumentValue

[constr_1961] Existence of attribute PortDefinedArgumentValue.value

Imposition time: CP: IT_RteGen

⌈For each PortDefinedArgumentValue, attribute value shall exist.⌋

[constr_1962] Existence of attribute `PortDefinedArgumentValue.valueType`

Imposition time: CP: `IT_RteGen`

⌈For each `PortDefinedArgumentValue`, attribute `valueType` shall exist.⌋

7.6.4 Supported Features

Historically, the `PortAPIOption` has undergone a number of extensions that usually ended up in additional primitive or composite attributes.

As further requests for extensions keep coming in, focus was put on limiting the complexity of the overall modeling of `PortAPIOption`. In response to this, a new extension approach has been defined to keep the surroundings of `PortAPIOption` manageable.

In particular, `PortAPIOption` aggregates the abstract meta-class `SwcSupportedFeature` in the role `supportedFeature` (see Figure 7.34).

The actual aggregation of `supportedFeature` will consist of concrete sub-classes of `SwcSupportedFeature`.

It will be possible to add further sub-classes of `SwcSupportedFeature` to add further functionality without increasing the modeling complexity of `PortAPIOption`, at the expense of having to formulate additional constraints.

Class	***SwcSupportedFeature*** (abstract)			
Note	This meta-class represents a abstract base class for features that can be supported by a RunnableEntity.			
Base	*ARObject*			
Subclasses	CommunicationBufferLocking			
Aggregated by	PortAPIOption.supportedFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 7.46: SwcSupportedFeature

7.6.4.1 Buffer Locking

[TPS_SWCT_01687] Support of locked communication buffers ⌈If a `CommunicationBufferLocking` where attribute `supportBufferLocking` is set to value `supportsBufferLocking` is aggregated in the role `PortAPIOption.supportedFeature` then all `RunnableEntity`s accessing the enclosing `PortPrototype` shall be able to support the return value `RTE_E_COM_BUSY`.⌋

[constr_1432] Multiplicity of `CommunicationBufferLocking`

Imposition time: CP: `IT_RteGen`

⌈In a concrete aggregated set of `PortAPIOption.supportedFeature`, `CommunicationBufferLocking` shall exist.⌋

[constr_10097] Buffer locking is only supported if `returnValueProvision` is set to `returnValueProvided`

Imposition time: CP: `IT_CpgExe`

⌈Setting the value of attribute `PortAPIOption.supportedFeature.supportBufferLocking` to value `supportsBufferLocking` is only supported if the `AbstractAccessPoint`s that refer to values in the respective `PortAPIOption.port` do **not** define `AbstractAccessPoint.returnValueProvision` **or** set the value of `AbstractAccessPoint.returnValueProvision` to `returnValueProvided`.⌋

Class	**CommunicationBufferLocking**			
Note	The aggregation of this meta-class specifies that a RunnableEntity supports locked communication buffers supplied by the RTE. It is able to cope with the error RTE_E_COM_BUSY.			
Base	*ARObject*, *SwcSupportedFeature*			
Aggregated by	PortAPIOption.supportedFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
supportBuffer Locking	SupportBufferLocking Enum	0..1	attr	This attribute is used to indicate the intended buffer locking behavior.

Table 7.47: CommunicationBufferLocking

[constr_1963] Existence of attribute `CommunicationBufferLocking.supportBufferLocking`

Imposition time: CP: `IT_RteGen`

⌈For each `CommunicationBufferLocking`, attribute `supportBufferLocking` shall exist.⌋

Enumeration	**SupportBufferLockingEnum**
Note	This enumeration represents the ability to define the buffer locking behavior.
Aggregated by	CommunicationBufferLocking.supportBufferLocking
Literal	***Description***
doesNotSupport BufferLocking	Buffer locking is not supported. **Tags:** atp.EnumerationLiteralIndex=0
supportsBuffer Locking	Buffer locking is supported. **Tags:** atp.EnumerationLiteralIndex=1

Table 7.48: SupportBufferLockingEnum

7.7 Per Instance Memory

[TPS_SWCT_01359] Private memory per instance ⌈`AtomicSwComponentType`s that support multiple instantiation (attribute `supportsMultipleInstantiation` == `true`) will typically need a given amount of private memory per instance.

It is the responsibility of the RTE to provide a mechanism with which each instance of an AtomicSwComponentType can access its own instance-specific memory.⌋

[TPS_SWCT_01360] Arbitrary number of per-instance memory blocks ⌈An AtomicSwComponentType can define an arbitrary number of per-instance memory blocks.⌋

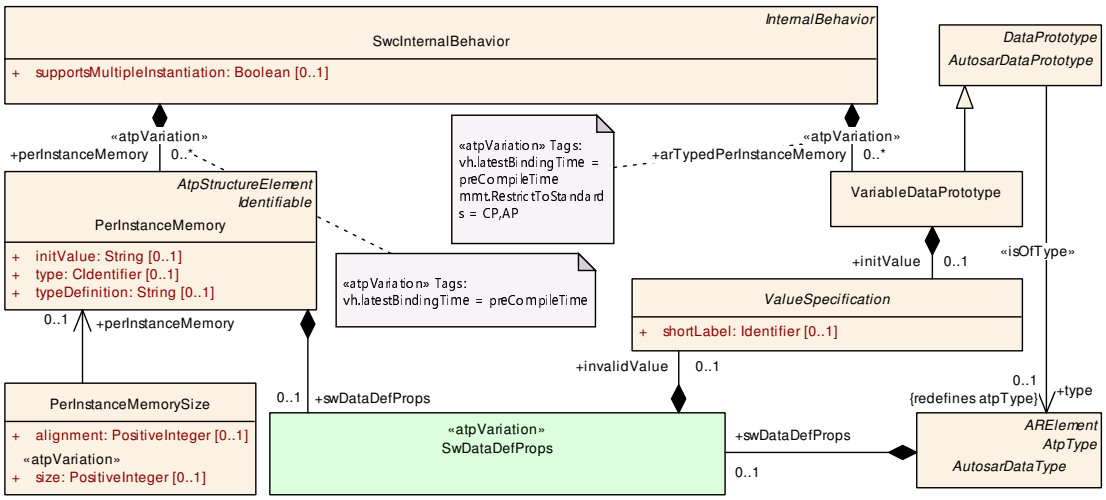

Figure 7.35: PerInstanceMemory

[TPS_SWCT_01361] attribute supportsMultipleInstantiation == false ⌈AtomicSwComponentTypes that do *not* support multiple instantiation (attribute supportsMultipleInstantiation == false) do not necessarily need to use the PerInstanceMemory: because there will only be a single instance of the AtomicSwComponentType on an ECU, the AtomicSwComponentType can use static variables to store the AtomicSwComponentType's internal state.

However, the usage of PerInstanceMemory is also allowed in this case.⌋

[TPS_SWCT_01362] Initialization of PerInstanceMemory ⌈Note that the PerInstanceMemory is not initialized by the RTE if no initValue is defined. In this case, it is the responsibility of the AtomicSwComponentType to initialize the PerInstanceMemory.⌋

7.7.1 Per Instance Memory typed by "C" Data Types

[TPS_SWCT_01363] PerInstanceMemory typed by "C" Data Types ⌈For each such memory block, the software-component description shall provide the name of the data type (the "C"-type) it needs to store in the memory block in the attribute type.

This attribute allows the RTE to generate an API function that provides a convenient and type-safe access to the data item.

In addition, the software-component description shall define the data type in the attribute `typeDefinition`. This attribute contains a *C* typedef of the data type in valid C-syntax.⌋

In other words, this `typeDefinition` shall be formulated such that it can be included verbatim in a C header file.

[constr_2007] Consistency of `typeDefinition` attribute

Imposition time: CP: `IT_CpgExe`

⌈All `PerInstanceMemory`s of the same `SwcInternalBehavior` with identical `type` attribute shall define an identical `typeDefinition` attribute as well.⌋

[TPS_SWCT_01364] Initial value of a `PerInstanceMemory` typed by "C" Data Types ⌈The `initValue` is a comma-separated list which can be used verbatim by the RTE generator as constant initializer.⌋

[TPS_SWCT_01574] `PerInstanceMemory.typeDefinition` shall not contain a function pointer ⌈The attribute `PerInstanceMemory.typeDefinition` is not allowed to contain a function pointer.⌋

Although [TPS_SWCT_01574] is formulated like a constraint, and the statement that it makes certainly has a constraint-like nature, there is hardly a way to actually **enforce** the regulation because the content of `PerInstanceMemory.typeDefinition` is non-formal (modeled by the non-specific i.e. `String`).

Therefore, a specification item has been used for the description of the respective semantics rather than a constraint.

More details on the use of these attributes in the generation of software-component header-files can be found in the [2, SWS RTE].

Class	**PerInstanceMemory**			
Note	Defines a 'C' typed memory-block that needs to be available for each instance of the SW-component. This is typically only useful if supportsMultipleInstantiation is set to "true" or if the software-component defines NVRAM access via permanent blocks.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.perInstanceMemory			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
initValue	String	0..1	attr	Specifies initial value(s) of the PerInstanceMemory
swDataDef Props	SwDataDefProps	0..1	aggr	This represents the ability to allocate RAM at specific memory sections, for example, to support the RAM Block recovery strategy by mapping to uninitialized RAM. **Tags:** atp.Splitkey=swDataDefProps
type	CIdentifier	0..1	attr	The name of the "C"-type
typeDefinition	String	0..1	attr	A definition of the type with the syntax of a 'C' typedef.

Table 7.49: PerInstanceMemory

[constr_1964] Existence of attribute `PerInstanceMemory.type`

Imposition time: CP: `IT_CpgExe`

⌈For each `PerInstanceMemory`, attribute `type` shall exist.⌋

[constr_1965] Existence of attribute `PerInstanceMemory.typeDefinition`

Imposition time: CP: `IT_CpgExe`

⌈For each `PerInstanceMemory`, attribute `typeDefinition` shall exist.⌋

7.7.2 Per Instance Memory typed by AUTOSAR Data Types

[TPS_SWCT_01365] `PerInstanceMemory` typed by AUTOSAR Data Types ⌈A `PerInstanceMemory` typed by an AUTOSAR data type is defined by a `VariableDataPrototype` aggregated in the role `SwcInternalBehavior.arTypedPerInstanceMemory`.⌋

[TPS_SWCT_01366] Initial value of a `SwcInternalBehavior.arTypedPerInstanceMemory` (typed by AUTOSAR Data Types) ⌈The `VariableDataPrototype.initValue` shall be used to define an initial value for a `SwcInternalBehavior.arTypedPerInstanceMemory`.⌋

[TPS_SWCT_01367] Typed by AUTOSAR data type vs. typed by C data type ⌈In contrast to the "C" typed `PerInstanceMemory`, the AUTOSAR-typed `SwcInternalBehavior.arTypedPerInstanceMemory` is able to define information controlling the visibility in an MCD system via `SwDataDefProps` for the purpose of measurement, or for the purpose of defining an input value of an axis.⌋

For more information about the relevance for measurement, please refer to chapter Chapter 5.4.3. The aspect of defining an input value of an axis is explained in Chapter 5.4.5.

Note: Due to the use of `AutosarDataType` the AUTOSAR-typed `PerInstanceMemory` cannot support C++ specific types or pointer types directly.

7.8 Static Memory and Constant Memory

[TPS_SWCT_01368] Describe static and constant memory ⌈Static memory (formalized by means of `InternalBehavior.staticMemory`) and constant memory (formalized by means of `InternalBehavior.constantMemory`) can be used whenever `AutosarDataType`s should be used in the implementation of an `AtomicSwComponentType` but no involvement of the RTE (for memory allocation and management) is required.⌋

This includes special cases of measurement and calibration but also debugging.

[TPS_SWCT_01483] Use static and constant memory to support Measurement and Calibration ⌈The information about these characteristic values and variables is given with the purpose to support Measurement and Calibration and has to be taken into account for the generation of A2L files.

A proprietary generator shall take care of these data for the purpose of generating A2L.⌋

Please note that the topic “measurement and calibration” is discussed in Chapter 2.3.

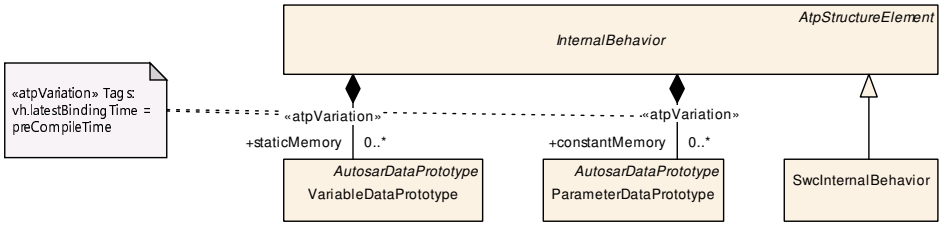

Figure 7.36: Static Memory and Constant Memory

[TPS_SWCT_01369] Static and constant memory is not instantiated by the RTE ⌈In contrast to the other kinds of memory like `implicitInterRunnableVariable`, `implicitInterRunnableVariable`, `PerInstanceMemory`, `sharedParameter` or `perInstanceParameter` the `staticMemory` and `constantMemory` are **not** instantiated by the RTE.⌋

This allows for more efficient implementations (especially for software-components provided as object code) by avoidance of the additional indirection caused by the RTE’s component data structure.

Further on, this kind of memory reduces the dependencies of the software-component implementation to generated RTE code which is appreciated for safety related functionalities.

Due to the instantiation of the memory by the software-component’s implementation the `constantMemory` behaves like a `sharedParameter` (see Chapter 2.3.3.2)

[constr_2028] `staticMemory` is restricted to single instantiation

Imposition time: CP: `IT_RteGen`

⌈The `staticMemory` is only supported if the attribute `supportsMultipleInstantiation` of the owning `SwcInternalBehavior` is set to `false`.⌋

This constraint prevents hidden communication between `SwComponentPrototype`s of the same `SwComponentType`.

[TPS_SWCT_01849] `shortName` of `constantMemory` and `staticMemory` ⌈The `shortName` of a `VariableDataPrototype` in role `staticMemory` or a `ParameterDataPrototype` in role `constantMemory` has to be equal with the ‘C’ identifier of the described variable or constant.⌋

7.9 Included AUTOSAR Data Types

[TPS_SWCT_01155] **IncludedDataTypeSet** ⌈An IncludedDataTypeSet declares that a set of AutosarDataTypes are used for the C / C++ implementation of the software-component. The AutosarDataTypes become part of the contract.⌋

[TPS_SWCT_01156] Required if the AutosarDataType is not used for any DataPrototype ⌈This information is required if the AutosarDataType is not used for any DataPrototype owned by this software-component or if a prefix for C language identifiers belonging to AutosarDataTypes shall be defined.⌋

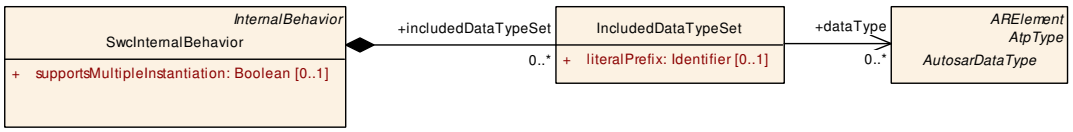

Figure 7.37: Included AUTOSAR Data Types

This supports the common usage of the AUTOSAR data type system for RTE provided memory objects and memory objects declared by the software-component implementation.

Further on, this enables the generation of the RTE Application Types Header File for AUTOSAR services containing the required data types for the C-API before the data type usage in dedicated ports for an ECU is known.

Class	**IncludedDataTypeSet**			
Note	An includedDataTypeSet declares that a set of AutosarDataType is used by a basic software module or a software component for its implementation and the AutosarDataType becomes part of the contract. This information is required if the AutosarDataType is not used for any DataPrototype owned by this software component or if the enumeration literals, lowerLimit and upperLimit constants shall be generated with a literalPrefix. The optional literalPrefix is used to add a common prefix on enumeration literals, lowerLimit and upper Limit constants created by the RTE.			
Base	*ARObject*			
Aggregated by	BswInternalBehavior.includedDataTypeSet, SwcInternalBehavior.includedDataTypeSet			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataType	AutosarDataType	*	ref	AutosarDataType belonging to the includedDataTypeSet. **Tags:** atp.Splitkey=dataType
literalPrefix	Identifier	0..1	attr	LiteralPrefix defines a common prefix for all AutosarData Types of the includedDataTypeSet to be added on enumeration literals, lowerLimit and upperLimit constants created by the RTE.

Table 7.50: IncludedDataTypeSet

[TPS_SWCT_01157] Attribute literalPrefix of IncludedDataTypeSet ⌈In addition, the literalPrefix might be used to separate the namespace of C language identifiers belonging to equally named AutosarDataTypes used for the same software-component C implementation.⌋

7.10 Included Mode Declaration Groups

[TPS_SWCT_01153] `IncludedModeDeclarationGroupSet` ⌈Similar to the consideration of data types using `IncludedDataTypeSet`, `SwcInternalBehavior` aggregates `IncludedModeDeclarationGroupSet` that in turn allows for referencing `ModeDeclarationGroup`s with the intent to express that the referenced `ModeDeclarationGroup`s are used in the context of the enclosing `AtomicSwComponentType`.⌋

[TPS_SWCT_01154] Attribute `prefix` of `IncludedModeDeclarationGroupSet` ⌈The optional attribute `prefix` of `IncludedModeDeclarationGroupSet` can be used to define a prefix that the RTE generator shall use to define symbols related to the included `ModeDeclarationGroup`s with the intent to avoid potential name clashes.⌋

Rationale: If the attribute `prefix` is required, changes to software-component source code may be necessary.

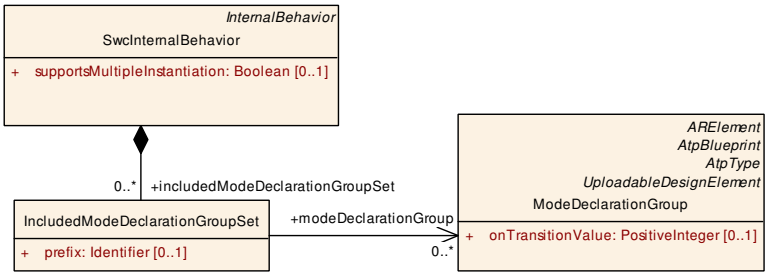

Figure 7.38: Included `ModeDeclarationGroup`s

Class	**IncludedModeDeclarationGroupSet**			
Note	An IncludedModeDeclarationGroupSet declares that a set of ModeDeclarationGroups used by the software component for its implementation and consequently these ModeDeclarationGroups become part of the contract.			
Base	*ARObject*			
Aggregated by	BswInternalBehavior.includedModeDeclarationGroupSet, SwcInternalBehavior.includedModeDeclarationGroupSet			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
mode Declaration Group	ModeDeclarationGroup	*	ref	This represents the referenced ModeDeclarationGroup. **Tags:** atp.Splitkey=modeDeclarationGroup
prefix	Identifier	0..1	attr	The prefix shall be used by the RTE generator as a prefix for the creation of symbols related to the referenced ModeDeclarationGroups, e.g RTE_TRANSITION_<Mode DeclarationGroup>.

Table 7.51: IncludedModeDeclarationGroupSet

7.11 Service Needs

7.11.1 Overview

[TPS_SWCT_01043] ApplicationSwComponentTypes are independent from actual ECU Hardware ⌈ApplicationSwComponentTypes are designed to be independent of their mapping to actual ECU Hardware.⌋

However, each software-component might need services which are provided by the ECU Basic Software through AUTOSAR Services.

[TPS_SWCT_01044] ServiceNeeds ⌈The ServiceNeeds are used to provide detailed information about what the software-component expects from the AUTOSAR Services when integrated on an actual ECU.

Note that only AtomicSwComponentTypes and NvBlockSwComponentTypes can be connected to AUTOSAR Services.⌋

Some ServiceNeeds are shown in Figure 7.39, Figure 13.15, Figure 13.13, and Figure 13.17.

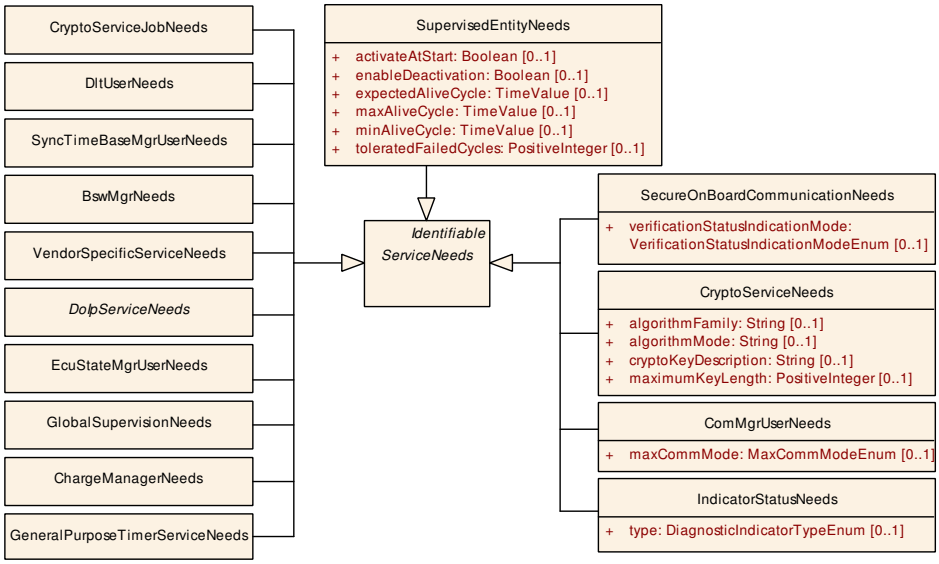

Figure 7.39: Meta-class ServiceNeeds and some of its specializations

[TPS_SWCT_01045] Actual values of ECU configuration parameters fulfill the requirements given by the ServiceNeeds ⌈When integrating application software-components on an ECU, the actual values of ECU configuration parameters shall be chosen so that they fulfill the requirements given by the ServiceNeeds of all the integrated AtomicSwComponentTypes.⌋

Note that the actual values of configuration parameters will additionally depend on the properties of the basic software and the hardware of that specific ECU, see also Chapter 11.

For further information about the relation between the ServiceNeeds and the ECU configuration parameters, see the [33, MOD Ecu Configuration Parameters].

The meta-class ServiceNeeds and the sub-classes for several Services are located in the CommonStructure package of the meta-model because they are also used in the [6, TPS BSW Module Description Template].

The semantics of sub-classes of ServiceNeeds is explained in the respective sub-chapters of Chapter 13.

The vast majority of the subclasses of meta-class ServiceNeeds are associated with standardized behavior of AUTOSAR services. However, there are cases where a user-specific behavior is required and for this purpose a specific flavor of ServiceNeeds is available.

[TPS_SWCT_01693] Usage of VendorSpecificServiceNeeds ⌈It is possible to define VendorSpecificServiceNeeds for the purpose of implementing a vendor-specific, i.e. non-standardized, service. VendorSpecificServiceNeeds does not provide any attributes and its meaning shall be described by means of the category attribute.⌋

Class	**ServiceNeeds** (abstract)			
Note	This expresses the abstract needs that a Software Component or Basic Software Module has on the configuration of an AUTOSAR Service to which it will be connected. "Abstract needs" means that the model abstracts from the Configuration Parameters of the underlying Basic Software.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	BswMgrNeeds, ChargeManagerNeeds, ComMgrUserNeeds, CryptoKeyManagementNeeds, CryptoServiceJobNeeds, CryptoServiceNeeds, *DiagnosticCapabilityElement*, DltUserNeeds, *DoIpServiceNeeds*, EcuStateMgrUserNeeds, ErrorTracerNeeds, FunctionInhibitionAvailabilityNeeds, FunctionInhibitionNeeds, GeneralPurposeTimerServiceNeeds, GlobalSupervisionNeeds, IdsMgrCustomTimestampNeeds, IdsMgrNeeds, IndicatorStatusNeeds, J1939DcmDm19Support, J1939RmIncomingRequestServiceNeeds, J1939RmOutgoingRequestServiceNeeds, NvBlockNeeds, SecureOnBoardCommunicationNeeds, SupervisedEntityCheckpointNeeds, SupervisedEntityNeeds, SyncTimeBaseMgrUserNeeds, VendorSpecificServiceNeeds			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 7.52: ServiceNeeds

Class	**VendorSpecificServiceNeeds**			
Note	This represents the ability to define vendor-specific service needs.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 7.53: VendorSpecificServiceNeeds

7.11.2 Assignment of Service Needs to Ports and Data

[TPS_SWCT_01046] **ServiceNeeds are defined in the scope of the SwcInternalBehavior** ⌈ServiceNeeds specified by AtomicSwComponentTypes are defined in the scope of the SwcInternalBehavior because in several cases they need associations to other parts of the SwcInternalBehavior.

In most cases they are related to certain PortPrototypes belonging to the AtomicSwComponentTypes because AtomicSwComponentTypes communicate with AUTOSAR Services via these PortPrototypes.⌋

In addition, a ServiceNeeds element can also have relations to some data declared within the same SwcInternalBehavior, namely some use cases of the NVRAM Service, require a Permanent RAM Block and/or ROM Block declared in the context of the single software-component.

A further use case requires that a ServiceNeeds element is linked to a PortGroup. Especially, a ServiceNeeds can represent a group of PortPrototypes as input to configure the communication manager in order to handle the communication state of those PortPrototypes.

These relationships to PortPrototypes, data and PortGroups are required as input for tools in order to generate the XML descriptions and configurations of the basic software which implements the Service according to the needs of several AtomicSwComponentTypes that are integrated on an ECU, see Chapter 11.

7.11.2.1 Swc Service Dependency

[TPS_SWCT_01883] Purpose of defining an SwcServiceDependency ⌈The creation of a SwcServiceDependency constitutes the definition of a so-called *service use case*, which describes a concerted usage of a collection of PortPrototypes to establish a complex (sometimes bidirectional) interaction between the owner of the SwcServiceDependency and an AUTOSAR service, e.g. NvM, Dcm, BswM.⌋

The definition of standardized *service use cases* can be found in Chapter 13.

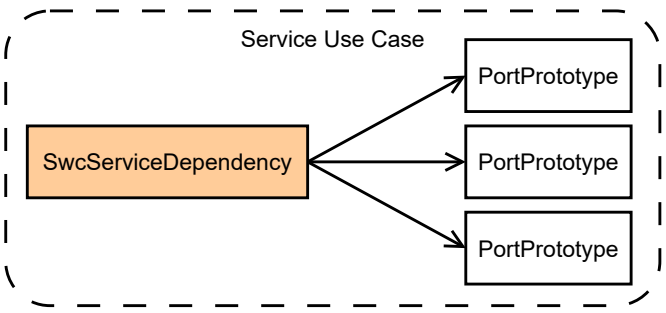

Figure 7.40: Service use case comprised of one SwcServiceDependency referencing multiple PortPrototypes

As indicated by [TPS_SWCT_01883], the usual pattern of defining a *service use case* involves one SwcServiceDependency and a collection of PortPrototypes. This pattern is sketched in Figure 7.40.

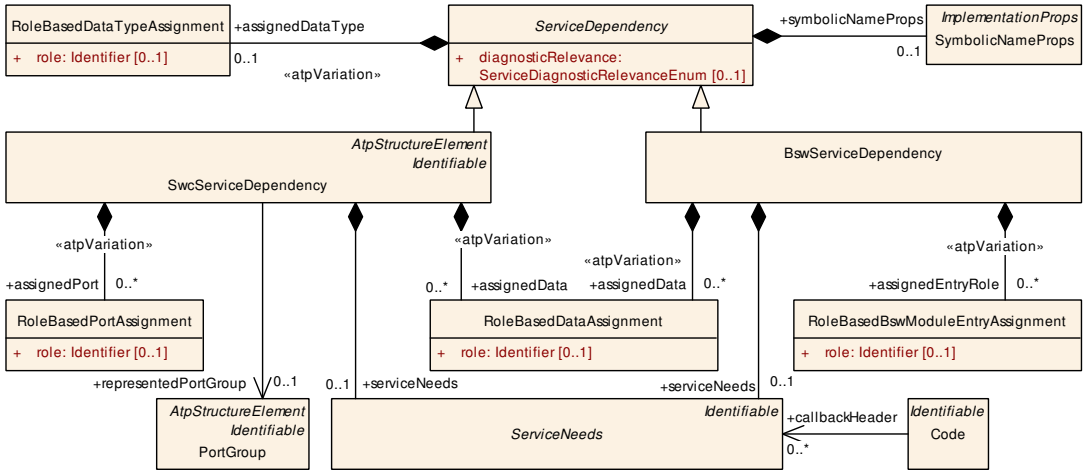

Figure 7.41: ServiceDependency is the abstract base class of SwcServiceDependency

However, rare exceptions from this rule may exist that revert the numerical relation between SwcServiceDependency and the associated PortPrototypes, i.e. multiple SwcServiceDependencys refer to one PortPrototype. This pattern is sketched in Figure 7.42.

In other words, *service use cases* may exist in the form of multiple SwcServiceDependencys referencing a single PortPrototype. This pattern is again subdivided in two cases:

- SwcServiceDependencys that aggregate different kinds of ServiceNeeds. An example for this pattern are described in Chapter 7.11.2.2.
- SwcServiceDependencys that aggregate the same kind of ServiceNeeds, but with different configuration of the attributes of the ServiceNeeds. An example for this pattern are described in Chapter 7.11.2.3.

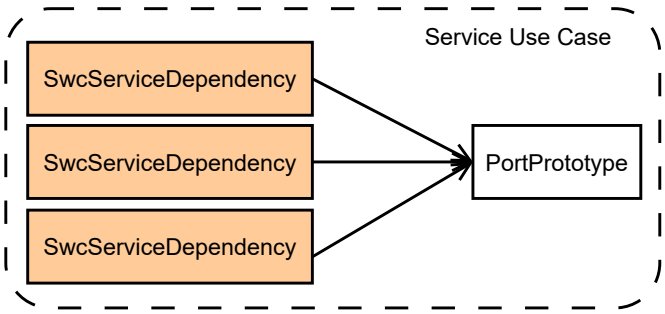

Figure 7.42: Service use case comprised of multiple SwcServiceDependency referencing one PortPrototype

The actual mapping between the ServiceNeeds element and its various relationships is provided by the meta-class SwcServiceDependency as shown in Figure 7.43.

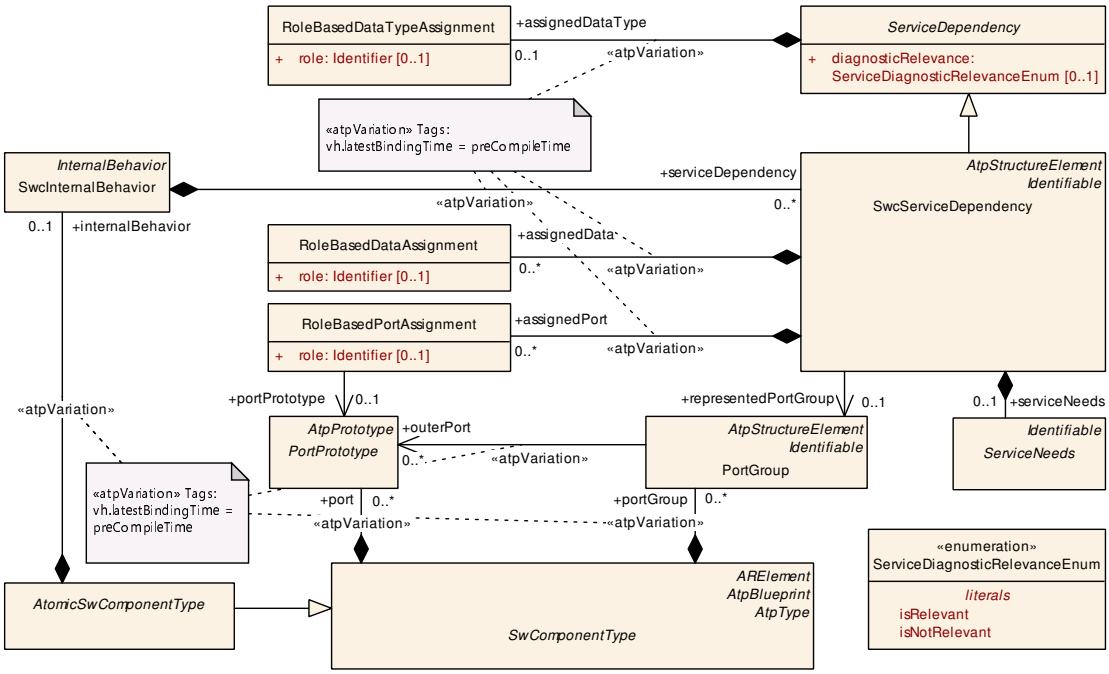

Figure 7.43: `SwcServiceDependency` in the `SwcInternalBehavior`

[constr_2027] `SwcServiceDependency` shall be defined for service ports only

Imposition time: CP: `IT_RteGen`

⌈A `PortPrototype` that is referenced by a `SwcServiceDependency` via `assignedPort` or via `assignedData` shall be typed by a `PortInterface` that has `isService` set to `true`.

This rule does **not** apply to `PortPrototype`s referenced by a `RoleBasedPortAssignment` where the attribute `role` is set to any of the following values:

- `NvMService`
- `NvMNotifyJobFinished`
- `NvMNotifyInitBlock`
- `NvMAdmin`
- `NvMMirror`
- `NvDataPort`

Furthermore, the rule does **not** apply to the case described in [TPS_SWCT_01579], [TPS_SWCT_01831], [TPS_SWCT_01580], and [TPS_SWCT_01572].⌋

The relationship to `PortPrototype`s is defined via the meta-class `RoleBasedPortAssignment` and the relationship to data is defined via the meta-class `RoleBasedDataAssignment`.

Class	**ServiceDependency** (abstract)			
Note	Collects all dependencies of a software module or component on an AUTOSAR Service related to a specific item (e.g. an NVRAM Block, a diagnostic event etc.). It defines the quality of service (Service Needs) of this item as well as (optionally) references to additional elements. This information is required for tools in order to generate the related basic software configuration and ServiceSwComponentTypes.			
Base	*ARObject*			
Subclasses	BswServiceDependency, SwcServiceDependency			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
assignedDataType	RoleBasedDataTypeAssignment	0..1	aggr	This is the role of the assignment data type in the given context. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=assignedDataType, assignedDataType.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
diagnosticRelevance	ServiceDiagnosticRelevanceEnum	0..1	attr	If this attribute indicates a relevance for diagnostics then the integrator has a much easier time identifying the candidates for the configuration of the diagnostic stack. Example: identification of mode conditions (e.g. communication between application and BswM) relevant for the Dcm.
symbolicNameProps	SymbolicNameProps	0..1	aggr	This attribute can be taken to contribute to the creation of symbolic name values. **Tags:** atp.Splitkey=symbolicNameProps, symbolicNameProps.shortName

Table 7.54: ServiceDependency

Class	**SwcServiceDependency**			
Note	Specialization of ServiceDependency in the context of an SwcInternalBehavior. It allows to associate ports, port groups and (in special cases) data defined for an atomic software component to a given ServiceNeeds element.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceDependency*			
Aggregated by	AdaptiveSwcInternalBehavior.serviceDependency, *AtpClassifier*.atpFeature, SwcInternalBehavior.serviceDependency			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
assignedData	RoleBasedDataAssignment	*	aggr	Defines the role of an associated data object of the same component. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=assignedData, assignedData.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
assignedPort	RoleBasedPortAssignment	*	aggr	Defines the role of an associated port of the same component. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=assignedPort, assignedPort.variationPoint.shortLabel vh.latestBindingTime=preCompileTime



△

Class	SwcServiceDependency			
representedPort Group	PortGroup	0..1	ref	This reference specifies an association between the ServiceNeeeds and a PortGroup, for example to request a communication mode which applies for communication via these ports. The referred PortGroup shall be local to this atomic SWC, but via the links between the Port Groups, a tool can evaluate this information such that all the ports linked via this port group on the same ECU can be found. **Tags:** atp.Splitkey=representedPortGroup
serviceNeeds	ServiceNeeds	0..1	aggr	The associated ServiceNeeds. **Tags:** atp.Splitkey=serviceNeeds, serviceNeeds.short Name

Table 7.55: SwcServiceDependency

Enumeration	ServiceDiagnosticRelevanceEnum
Note	This enumeration provides values to describe the diagnostic relevance of a SwcServiceDependency (specifically if the aggregated ServiceNeeds itself does not indicate a relevance for diagnostics).
Aggregated by	*ServiceDependency*.diagnosticRelevance
Literal	**Description**
isNotRelevant	This value indicates that a relevance for diagnostics does not exist. **Tags:** atp.EnumerationLiteralIndex=0
isRelevant	This value indicates a relevance for diagnostics. **Tags:** atp.EnumerationLiteralIndex=1

Table 7.56: ServiceDiagnosticRelevanceEnum

Class	SymbolicNameProps			
Note	This meta-class can be taken to contribute to the creation of symbolic name values.			
Base	*ARObject*, *ImplementationProps*, *Referrable*			
Aggregated by	*ServiceDependency*.symbolicNameProps			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 7.57: SymbolicNameProps

Class	RoleBasedPortAssignment			
Note	This class specifies an assignment of a role to a particular service port (RPortPrototype or PPort Prototype) of an AtomicSwComponentType. With this assignment, the role of the service port can be mapped to a specific ServiceNeeds element, so that a tool is able to create the correct connector.			
Base	*ARObject*			
Aggregated by	NvBlockDescriptor.clientServerPort, SwcServiceDependency.assignedPort			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
portPrototype	PortPrototype	0..1	ref	Service PortPrototype used in the assigned role. This PortPrototype shall either belong to the same AtomicSw ComponentType as the SwcInternalBehavior which owns the ServiceDependency or to the same NvBlockSw ComponentType as the NvBlockDescriptor. **Tags:** atp.Splitkey=portPrototype

▽

△

Class	**RoleBasedPortAssignment**			
role	Identifier	0..1	attr	This is the role of the assigned Port in the given context. The value shall be a shortName of the Blueprint of a Port Interface as standardized in the Software Specification of the related AUTOSAR Service.

Table 7.58: RoleBasedPortAssignment

Both are aggregating an attribute `role` which allows defining the role of the `PortPrototype`s or data in the specific context.

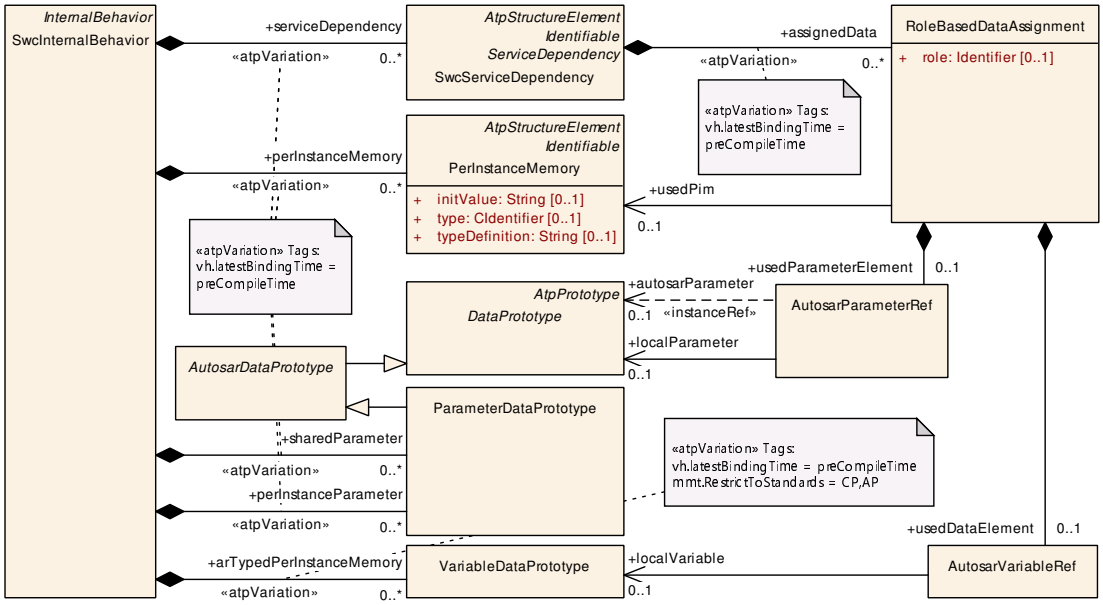

Figure 7.44: Details of `RoleBasedDataAssignment` for local data

Note the difference between the associations to `PortPrototype`s and to `PortGroup`s: While the `RoleBasedPortAssignment` is part of the `SwcInternalBehavior` a `PortGroup` is defined for the `SwComponentType` (thus belongs to the VFB level) and it is linked to the `PortGroup`s of other `SwComponentType`s.

This means a `PortGroup` represents a system feature, whereas the `RoleBasedPortAssignment` is a local feature for the purpose of communication with the AUTOSAR Service.

[TPS_SWCT_01556] Rule for setting `RoleBasedPortAssignment.role` ⌈The value of `RoleBasedPortAssignment.role` cannot be set arbitrarily but shall be equal to the `shortName` of the applicable `PortInterface` taken from the standardized AUTOSAR `Service Interface` model (this implies that the `category` of the `ARPackage` that owns the `PortInterface` is set to `BLUEPRINT`[5] and the top-most `ARPackage.shortName` is set to `AUTOSAR`, see also [29, MOD General Blueprints]).⌋

[5] see [TPS_STDT_00033]

Class	**RoleBasedDataAssignment**			
Note	This class specifies an assignment of a role to a particular data object in either • the SwcInternalBehavior of a software component (or in the BswInternalBehavior of a BSW module or BSW cluster) in the context of an AUTOSAR Service or • an NvBlockDescriptor to sort out the assignment of event-based writing strategies to data elements in a PortPrototype. With this assignment, the role of the data can be mapped to a DataPrototype that is used in the context of the definition of a specific ServiceNeeds or NvBlockDescriptor, so that a tool is able to create the correct access or writing strategy.			
Base	*ARObject*			
Aggregated by	BswServiceDependency.assignedData, NvBlockDescriptor.writingStrategy, SwcService Dependency.assignedData			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
role	Identifier	0..1	attr	This is the role of the assigned data in the given context. Possible values need to be specified on M1 level. Additionally the TPS Software Component Template provides a list of applicable roles for various service dependencies and service use cases in chapter 13 "Service Dependencies and Service Use Cases" (e.g., ramBlock in case of the needs for a permanent RAM block).
usedData Element	AutosarVariableRef	0..1	aggr	The VariableDataPrototype used in this role, e.g. • Permanent RAM Block of an NVRAM Block which shall belong to the same SwcInternalBehavior or Bsw InternalBehavior. • In the role signalBasedDiagnostics it has to refer to a VariableDataPrototype in a SenderReceiverInterface or a NvDataInterface. **Tags:** atp.Splitkey=usedDataElement
usedParameter Element	AutosarParameterRef	0..1	aggr	The ParameterDataPrototype used in this role, e.g. • ROM Block of an NVRAM Block. It shall belong to the same SwcInternalBehavior or BswInternalbehavior. • In the role signalBasedDiagnostics it has to refer to a ParameterDataPrototype in a ParameterInterface. **Tags:** atp.Splitkey=usedParameterElement
usedPim	PerInstanceMemory	0..1	ref	The (untyped) PerInstanceMemory used in this role (e.g. as a Permanent RAM Block for an NVRAM Block). **Tags:** atp.Splitkey=usedPim

Table 7.59: RoleBasedDataAssignment

[TPS_SWCT_01660] Values of `SwcServiceDependency.category` reserved by the standard ⌈The following values of `SwcServiceDependency.category` are reserved by the AUTOSAR standard:

`SERVICE` : this applies for all the cases where `SwcServiceDependency` is intended to be used for the design of `ServiceSwComponentType`s.

`NV_BLOCK_COMPONENT` : this applies if the `SwcServiceDependency` is intended to be used for the design of an `NvBlockSwComponentType`.

⌋



Figure 7.45: Details of `RoleBasedDataAssignment` for accessing `DataPrototype`s in `PortPrototype`s

[TPS_SWCT_01661] Default value of `SwcServiceDependency.category` ⌈If the attribute `SwcServiceDependency.category` does not exist then the value **`SERVICE`** shall be assumed for `SwcServiceDependency.category`.⌋

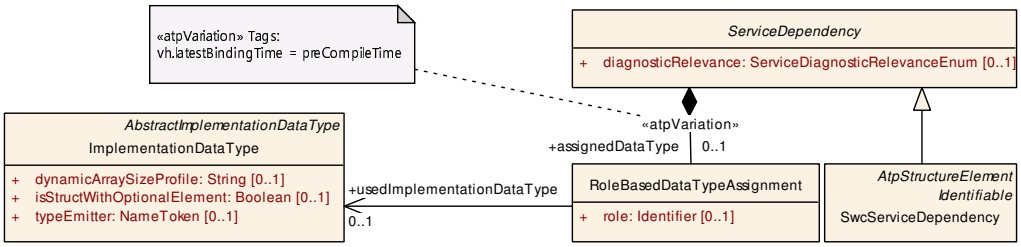

Figure 7.46: Details of `RoleBasedDataTypeAssignment` for local data

Class	**RoleBasedDataTypeAssignment**			
Note	This class specifies an assignment of a role to a particular data type of a software component (or in the BswModuleBehavior of a module or cluster) in the context of an AUTOSAR Service. With this assignment, the role of the data type can be mapped to a specific ServiceNeeds element, so that a tool is able to create the correct access.			
Base	*ARObject*			
Aggregated by	*ServiceDependency*.assignedDataType			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
role	Identifier	0..1	attr	This is the role of the associated data type in the given context.
used Implementation DataType	ImplementationData Type	0..1	ref	This represents the associated ImplementationDataType. **Tags:** atp.Splitkey=usedImplementationDataType

Table 7.60: RoleBasedDataTypeAssignment

[constr_10020] Existence of attribute `RoleBasedDataTypeAssignment.usedImplementationDataType`

Imposition time: CP: `IT_RteGen`

⌈For each `RoleBasedDataTypeAssignment`, attribute `usedImplementationDataType` shall exist.⌋

7.11.2.2 Mixed Usage of Different Kinds of Service Needs

There are cases where the granularity of existing ServiceInterfaces does not match the granularity of existing `SwcServiceDependency.serviceNeeds`.

In other words, there are Service Interfaces that cover the semantics of different kinds of ServiceNeeds. One example is the ClientServerInterface DataServices_{Data} which basically supports the access to diagnostic values **as well as** I/O control of the same value.

Figure 7.47 provides a graphical sketch of how the modeling for this case is foreseen.

[TPS_SWCT_01689] Relation between SwcServiceDependencys and PortPrototypes ⌈It is possible to create a model where two or more SwcServiceDependencys, by way of the RoleBasedPortAssignment or RoleBasedDataAssignment, refer to a single PortPrototype.⌋

As indicated by Figure 7.47, there are two potentially competing SwcServiceDependencys that could be taken to contribute their shortName for filling in the suffix of the DataServices_{Data}.

In this case, it is actually necessary to settle the "over-supply of shortNames" by regulation of the AUTOSAR standard. [TPS_SWCT_01691] has been created for this purpose.

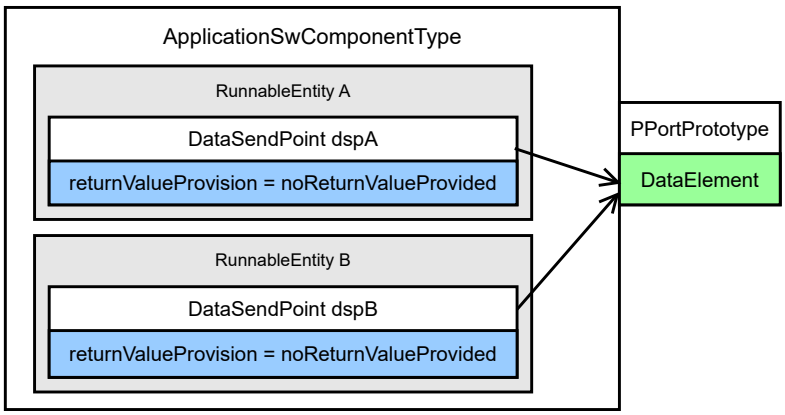

Figure 7.47: Two SwcServiceDependencys referencing one PortPrototype

Another realistic example where [TPS_SWCT_01689] applies is an AtomicSwComponentType that exposes a PPortPrototype typed by a SenderReceiverInterface and the dataElement(s) within the PPortPrototype are both accessed as diagnostic values (see Chapter 13.8.4.3) **and** are used to send mode requests to the BswM (see Chapter 13.6.4).

Note that in this case a regulation regarding the shortNames of the affected SwcServiceDependencys is not required because the applicable SenderReceiverInterface is not standardized and does not require the assignment of a name suffix from the existing model.

[TPS_SWCT_01005] Usage of SwcServiceDependencys for vendor-specific services ⌈SwcServiceDependencys can also be used for vendor-specific services. In this case the SwcServiceDependency shall not contain any of the standardized

ServiceNeeds. For this purpose the VendorSpecificServiceNeeds is available.⌋

[TPS_SWCT_01833] Semantics of ServiceDependency.diagnosticRelevance
⌈The attribute ServiceDependency.diagnosticRelevance can be used to indicate a diagnostic relevance of the ServiceDependency, especially for ServiceDependencys that are not related to diagnostics, but which are still required for the integration of the diagnostic stack.⌋

One example for the usage of ServiceDependency.diagnosticRelevance would be the communication between the application software and the BswM, i.e. in the context of a SwcServiceDependency that aggregates a BswMgrNeeds. This communication may be relevant for the configuration of so-called “mode conditions” in the Dcm.

The modeling of the attribute is very general and can be applied to every foreseeable service configuration. However, the only known use case that is actually relevant is the mentioned communication between application software and the BswM.

To avoid opening the door to uncontrolled usage of uncharted territory (that may nevertheless later be explored, use case by use case), restrictions apply for the usage of ServiceDependency.diagnosticRelevance, as documented in [constr_10032].

[constr_10032] Restrictions for the usage of ServiceDependency.diagnosticRelevance

Imposition time: CP: IT_RteGen

⌈The attribute ServiceDependency.diagnosticRelevance shall only be used for a SwcServiceDependency that aggregates a BswMgrNeeds.⌋

7.11.2.3 Same Kind of Service Needs used in Service Use Case

A prominent example for this kind of modeling SwcServiceDependencys is the interaction between SwComponentPrototypes typed by an ApplicationSwComponentType on one end and by an NvBlockSwComponentType on the other end.

The configuration of the *service use case*, as far as SwcServiceDependency is concerned, according to [TPS_SWCT_02503] is sketched by Figure 7.48.

Although a RoleBasedPortAssignment is used in the case depicted in Figure 7.48, the referenced PortPrototype is typed by either an NvDataInterface[6] or[7] a SenderReceiverInterface.

In this case, one SwcServiceDependency exists that aggregates a RoleBasedPortAssignment where attribute role is set to the value NvDataPort.

[6] This is the typical case.
[7] see [constr_2011]



Figure 7.48: Service use case comprised of single `SwcServiceDependency` utilizing a `RoleBasedPortAssignment`

The reason for the usage of a `RoleBasedPortAssignment` is that the `RoleBasedPortAssignment` makes the configuration of the `NvBlockNeeds` apply to the entire `PortPrototype`. There is no intention to apply the configuration on a finer granularity, e.g. the level of an `nvData`.

In other words, the settings defined in the `NvBlockNeeds` aggregated by the `SwcServiceDependency` are applied to all `nvData` simultaneously.

There is no way to apply different settings for different `nvData` with this approach. If different settings are required, it would be necessary to split up the `NvDataInterface` into several new `NvDataInterface`s that each carry a subset of the `nvData` of the original `NvDataInterface` and also split up the `PortPrototype` into several `PortPrototype`s and the one `SwcServiceDependency` into several `SwcServiceDependency`s.

Therefore, an alternative modeling approach is sketched in Figure 7.49. This approach does not demand a split-up of relevant model elements, it utilizes the existence of multiple `SwcServiceDependency`s that each aggregate an `NvBlockNeeds` with **individual settings**.

These settings are applicable to the corresponding `nvData` that are referenced from `RoleBasedDataAssignment`s and are aggregated individually at the respective `SwcServiceDependency`.

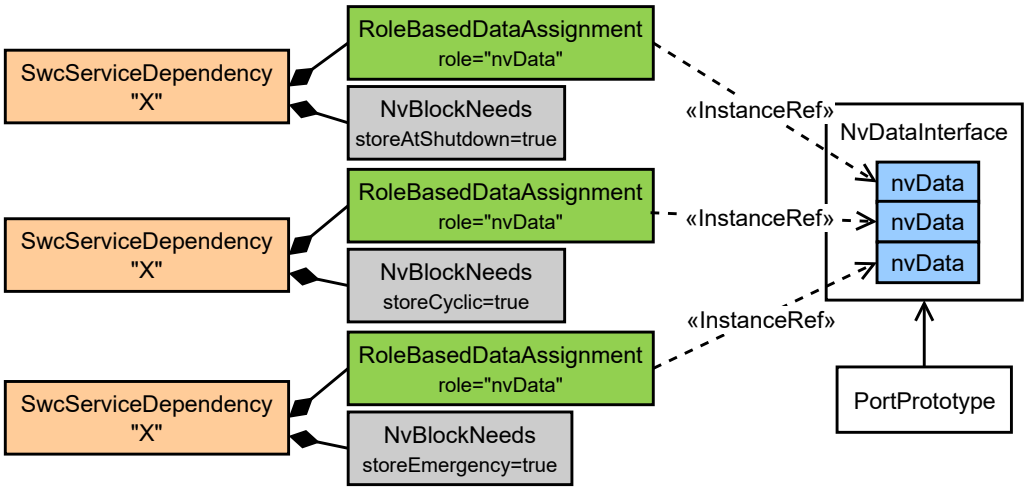

Figure 7.49: Service use case comprised of multiple `SwcServiceDependency` utilizing `RoleBasedDataAssignment`s

7.12 Variation Point Proxy

[TPS_SWCT_01370] `VariationPointProxy` ⌈Description of variability inside a software-component may exist in two different levels of abstraction:

- A **structural** variation point affects the existence or non-existence of structural model elements. A structural variation point is modeled by means of the meta-class `VariationPoint`.
- A **functional** variation point affects solely the functionality in the implementation (read: source code) of the software-component. A functional variation point is modeled by means of the meta-class `VariationPointProxy`.

In other words, this enables the developer of a software-component to implement variability that is limited to the software-component's functionality. This kind of variability is resolved

- by a code generator (`bindingTime` = `codeGenerationTime`).
- by the preprocessor (`bindingTime` = `preCompileTime`).
- as a post-build value evaluation (in this case `postBuildValueAccess` and `postBuildVariantCondition` shall exist).

⌋

Class	**VariationPointProxy**			
Note	The VariationPointProxy represents variation points of the C/C++ implementation. In case of bindingTime = compileTime the RTE provides defines which can be used for Pre Processor directives to implement compileTime variability.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	BswInternalBehavior.variationPointProxy, SwcInternalBehavior.variationPointProxy			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
conditionAccess	ConditionByFormula	0..1	aggr	This condition acts as Binding Function for the Variation Point. **Tags:** atp.Splitkey=conditionAccess
implementation DataType	AbstractImplementation DataType	0..1	ref	This association to ImplementationDataType shall be taken as an implementation hint by the RTE generator. **Tags:** atp.Splitkey=implementationDataType
postBuildValue Access	PostBuildVariant Criterion	0..1	ref	This represents the applicable PostBuildVariantCriterion in the context of a VariationPointProxy. Note that the technical details how to access the particular postBuildValueAccess are still considered internal to the RTE and are consequently not standardized. **Tags:** atp.Splitkey=postBuildValueAccess
postBuildVariant Condition	PostBuildVariant Condition	*	aggr	This represents that applicable PostBuoldVariant Condition in the context of aVariationPointProxy. **Tags:** atp.Splitkey=postBuildVariantCondition
valueAccess	AttributeValueVariation Point	0..1	aggr	This value acts as Binding Function for the VariationPoint. **Tags:** atp.Splitkey=valueAccess

Table 7.61: VariationPointProxy

Class	«atpMixedString» **ConditionByFormula**			
Note	This class represents a condition which is computed based on system constants according to the specified expression. The expected result is considered as boolean value. The result of the expression is interpreted as a condition. • "0" represents "false"; • a value other than zero is considered "true"			
Base	*ARObject*, *FormulaExpression*, *SwSystemconstDependentFormula*			
Aggregated by	VariationPoint.swSyscond, VariationPointProxy.conditionAccess			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
bindingTime	BindingTimeEnum	0..1	attr	This attribute specifies the point in time when condition may be evaluated at earliest. At this point in time all referenced system constants shall have a value. **Tags:** xml.attribute=true

Table 7.62: ConditionByFormula

Class	**PostBuildVariantCriterion**			
Note	This class specifies one particular PostBuildVariantSelector. **Tags:** atp.recommendedPackage=PostBuildVariantCriterions			
Base	*ARElement*, *ARObject*, *AtpDefinition*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
compuMethod	CompuMethod	0..1	ref	The compuMethod specifies the possible values for the variant criterion serving as an enumerator. **Tags:** atp.Splitkey=compuMethod

Table 7.63: PostBuildVariantCriterion

Class	**PostBuildVariantCondition**			
Note	This class specifies the value which shall be assigned to a particular variant criterion in order to bind the variation point. If multiple criterion/value pairs are specified, they shall all match to bind the variation point. In other words binding can be represented by (criterion1 == value1) && (condition2 == value2) ...			
Base	*ARObject*			
Aggregated by	VariationPoint.postBuildVariantCondition, VariationPointProxy.postBuildVariantCondition			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
matching Criterion	PostBuildVariant Criterion	0..1	ref	This is the criterion which needs to match the value in order to make the PostbuildVariantCondition to be true. **Tags:** atp.Splitkey=matchingCriterion
value	Integer	0..1	attr	This is the particular value of the post-build variant criterion. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 7.64: PostBuildVariantCondition

In the first two cases of the second bullet list in [TPS_SWCT_01370], the evaluation of `conditionAccess` shall replace the formula by the result.

The name VariationPointProxy was motivated by the fact that it represents a model element that is not directly related to the **structure** but to the code and from this point of view acts as a proxy to the **functional** variation existing in the code.

The consequence of the two levels of abstraction is that (from a model processing point of view) it would be possible to bind all structural variation points entirely while keeping some or all of the functional variation points unbound. This is an explanation for the existence of [TPS_SWCT_01371].

[TPS_SWCT_01371] VariationPointProxy vs. VariationPoint ⌈The difference between a VariationPoint and a VariationPointProxy is that if during the process of binding the formula evaluates to 0 the VariationPointProxy remains in the model while the VariationPoint as well as its owner is removed from the model.⌋

Nevertheless, the binding of the variability is described by means of SwSystemconstantValueSets and PostBuildVariantCriterionValueSets.

[TPS_SWCT_01448] Pre-defined values for the category of VariationPointProxy ⌈AUTOSAR pre-defines two possible values for the category of VariationPointProxy. The meaning of the values, however, depends on the particular modeling of individual VariationPointProxys, see [TPS_SWCT_01370].

VALUE In the "pre-build" case this means that valueAccess shall yield an integer literal. In the "post-build" case, on the other hand, this means that postBuildValueAccess shall yield an integer value conform with the implementationDataType.

In this context, [constr_1388] applies.

CONDITION In this case it is **possible** (though not mandatory) to define a VariationPointProxy that actually works in a combination of the "pre-build" and "post-build" scenario.

In other words, in the "pre-build" case conditionAccess shall yield a *boolean* value and in the "post-build" case postBuildVariantCondition shall also yield a *boolean* value.

An *and* operator shall be applied to all boolean values returned by conditionAccess and the collection of postBuildVariantCondition in order to yield the actual result of the condition. [TPS_GST_00259] and [SWS_Rte_08069] apply.

For the postBuildVariantCondition an implicit reference to the Platform Data Type boolean shall be assumed.

In contrast to the value VALUE it is possible to define a VariationPointProxy that uses **both** conditionAccess **and** postBuildVariantCondition.

⌋

[constr_1388] `VariationPointProxy` of `category VALUE` shall not mix "pre-build" and "post-build" use-cases

Imposition time: CP: `IT_CpgExe`

⌈If the value of `category` of the `VariationPointProxy` is set to `VALUE` then there can only be one value yielded from the evaluation of a `VariationPointProxy`. In other words, a `VariationPointProxy` of `category VALUE` shall not mix the "pre-build" and "post-build" use-cases.⌋

[constr_1389] Restriction regarding the value of `category` of `VariationPointProxy.implementationDataType`

Imposition time: CP: `IT_CpgExe`

⌈`VariationPointProxy.implementationDataType` shall **not** be of `category` `STRUCTURE`, `ARRAY`, `UNION`, `FUNCTION_REFERENCE`, and `DATA_REFERENCE`.

The `VariationPointProxy.implementationDataType` shall be of `category` `VALUE` or `TYPE_REFERENCE` that, after all references are resolved, yields an `ImplementationDataType` of `category VALUE`.⌋

[TPS_SWCT_01372] `bindingTime` = `preCompileTime` ⌈If `bindingTime` = `preCompileTime` the RTE provides macro definitions that can be used for preprocessor directives to implement `preCompileTime` variability in C/C++ code.⌋

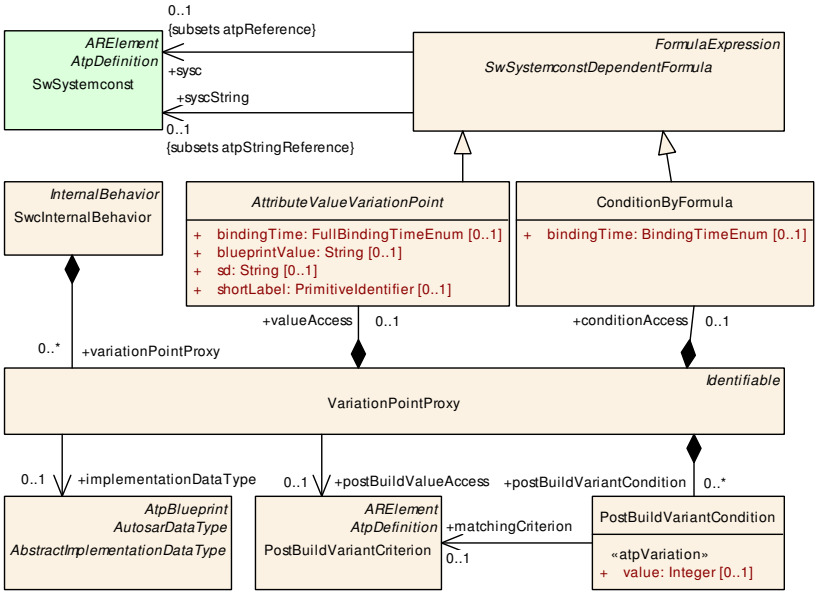

Figure 7.50: `VariationPointProxy`

The generation of macro definitions implies the creation of suffixes that indicate the type of the constant value (e.g. "u" for "unsigned") defined in the context of the macro. This is especially important where the [34, MISRA C] rules need to be observed.

According to the definition of the AUTOSAR formula language (see [10, TPS Generic Structure Template]), numerical values yielded by a formula expression will not have a suffix that clarifies the data type associated with the constant value.

It is therefore in general necessary to provide a formal association between the value yielded by a formula expression and an ImplementationDataType that can provide the information about the suffix to be applied in the specific case.

[TPS_SWCT_01858] Optional existence of reference VariationPointProxy.implementationDataType if the bindingTime is set to preCompileTime ⌈If the value of attribute bindingTime of VariationPointProxy.valueAccess is set to the value preCompileTime, then the creation of a reference to an ImplementationDataType in the role VariationPointProxy.implementationDataType shall be used to determine the suffix to qualify the numerical value yielded from the formula expression for the creation of a preprocessor macro.⌋

For more clarification, the actual information about the suffix shall be derived from the value of ImplementationDataType.swDataDefProps.baseType.baseTypeDefinition.baseTypeEncoding and baseTypeSize.

[TPS_SWCT_01373] RTE generator shall evaluate the SwSystemconstDependentFormula ⌈It is in the scope of the RTE generator to evaluate the SwSystemconstDependentFormula which has a higher precedence than the standard C Preprocessor and to provide the resulting values to the software-component's implementation.⌋

For further details (beyond the statements made in [TPS_SWCT_01372] and [TPS_SWCT_01373]) about the impact of the existence of a VariationPointProxy on the RTE, please refer to the [2, SWS RTE].

Class	«atpMixedString» ***AttributeValueVariationPoint*** (abstract)			
Note	This class represents the ability to derive the value of the Attribute from a system constant (by Sw SystemconstDependentFormula). It also provides a bindingTime.			
Base	*ARObject*, *FormulaExpression*, *SwSystemconstDependentFormula*			
Subclasses	*AbstractEnumerationValueVariationPoint*, *AbstractNumericalVariationPoint*, BooleanValueVariationPoint, FloatValueVariationPoint, IntegerValueVariationPoint, PositiveIntegerValueVariationPoint, TimeValue ValueVariationPoint, UnlimitedIntegerValueVariationPoint			
Aggregated by	VariationPointProxy.valueAccess			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
bindingTime	FullBindingTimeEnum	0..1	attr	This is the binding time in which the attribute value needs to be bound. If this attribute is missing, the attribute is not a variation point. In particular this means that It needs to be a single value according to the type specified in the pure model. It is an error if it is still a formula. **Tags:** xml.attribute=true
blueprintValue	String	0..1	attr	This represents a description that documents how the value shall be defined when deriving objects from the blueprint. **Tags:** xml.attribute=true

▽

△

Class	«atpMixedString» ***AttributeValueVariationPoint*** (abstract)			
sd	String	0..1	attr	This special data is provided to allow synchronization of Attribute value variation points with variant management systems. The usage is subject of agreement between the involved parties. **Tags:** xml.attribute=true
shortLabel	PrimitiveIdentifier	0..1	attr	This allows to identify the variation point. It is also intended to allow RTE support for CompileTime Variation points. **Tags:** xml.attribute=true

Table 7.65: AttributeValueVariationPoint

The usage of attributes of meta-class `VariationPointProxy` is not arbitrarily possible but subject to conditions. In particular, there are certain use-cases that dictate how and with which multiplicity attributes of `VariationPointProxy` shall be used.

In particular, the applicable use-cases are defined by a combination of the binding time, i.e. *PreBuild* (all pre-build binding times are summarized as *PreBuild*) vs. *PostBuild*, and the value of `VariationPointProxy.category` (the details are explained in [constr_1253]).

For clarification, the multiplicities of attributes of meta-class `VariationPointProxy` that are **not** explicitly mentioned in a given row of the table contained in [constr_1253] shall be interpreted as [0].

[constr_1253] Allowed multiplicities for attributes of `VariationPointProxy` depending on the applicable binding time and the value of `VariationPointProxy.category`

Imposition time: CP: `IT_CpgExe`

⌈

BindingTime	`category`	Allowed Attribute Multiplicity
PreBuild	`VALUE`	`valueAccess` [1], `implementationDataType` [0..1]
	`CONDITION`	`conditionAccess` [1]
PostBuild	`VALUE`	`postBuildValueAccess` [1], `implementationDataType` [1]
	`CONDITION`	`postBuildVariantCondition` [1..*], `conditionAccess` [0..1]

⌋

8 Implementation

Previous versions of this document contained a comprehensive description of the meta-class `Implementation`. This meta-class still exists but the description of most of its content has been moved to another document, in particular the specification of the [6, TPS BSW Module Description Template].

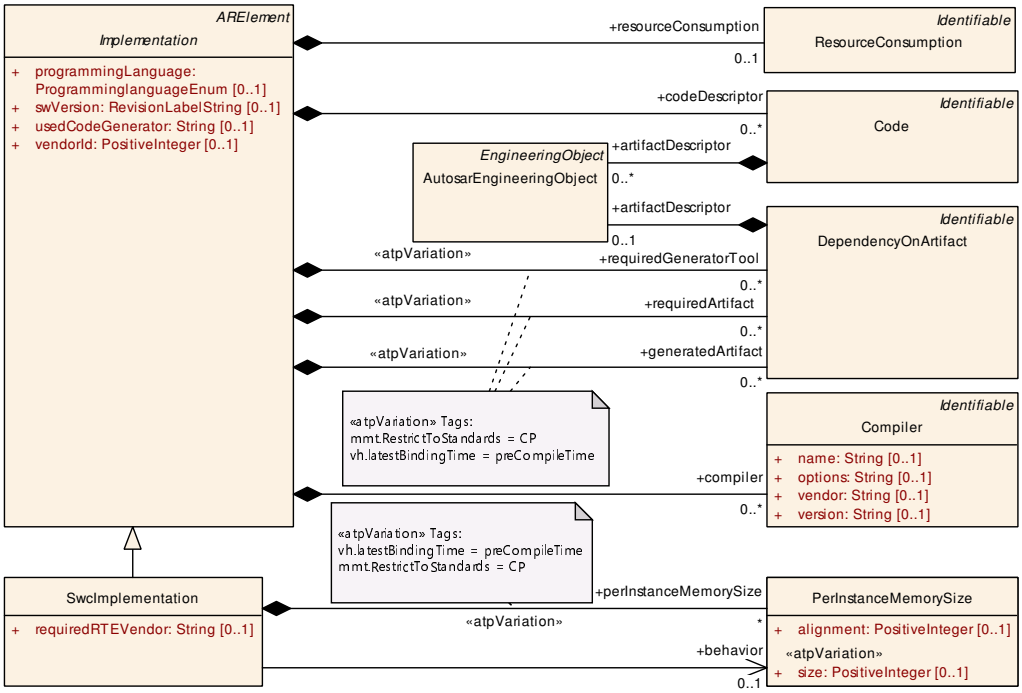

Figure 8.1: Implementation part specific to the Software Component Template

The AUTOSAR TPS Software Component Template and the AUTOSAR TPS BSW Module Description Template share the content of `Implementation`. However, the semantics of `Implementation` is closer to the AUTOSAR TPS BSW Module Description Template.

Nevertheless, there is still content strictly related to the AUTOSAR TPS Software Component Template. This part of `Implementation` consisting of `SwcImplementation` (see Figure 8.1) remains in this document.

Enumeration	**ProgramminglanguageEnum**
Note	Programming language the implementation was created in.
Aggregated by	*Implementation*.programmingLanguage
Literal	***Description***
c	C language **Tags:** atp.EnumerationLiteralIndex=0
cpp	C++ language **Tags:** atp.EnumerationLiteralIndex=1

△

Enumeration	**ProgramminglanguageEnum**
java	Java language **Tags:** atp.EnumerationLiteralIndex=2
rust	Rust language **Tags:** atp.EnumerationLiteralIndex=3

Table 8.1: ProgramminglanguageEnum

Class	***Implementation*** (abstract)			
Note	Description of an implementation a single software component or module. This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Subclasses	BswImplementation, SwcImplementation			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
buildAction Manifest	BuildActionManifest	0..1	ref	A manifest specifying the intended build actions for the software delivered with this implementation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=buildActionManifest, buildAction Manifest.buildActionManifest, buildAction Manifest.variationPoint.shortLabel vh.latestBindingTime=codeGenerationTime
codeDescriptor	Code	*	aggr	Specifies the provided implementation code. **Tags:** atp.Splitkey=codeDescriptor, codeDescriptor.short Name
compiler	Compiler	*	aggr	Specifies the compiler for which this implementation has been released **Tags:** atp.Splitkey=compiler, compiler.shortName
generated Artifact	DependencyOnArtifact	*	aggr	Relates to an artifact that will be generated during the integration of this Implementation by an associated generator tool. Note that this is an optional information since it might not always be in the scope of a single module or component to provide this information. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=generatedArtifact, generatedArtifact.short Name, generatedArtifact.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
hwElement	HwElement	*	ref	The hardware elements (e.g. the processor) required for this implementation. **Tags:** atp.Splitkey=hwElement
linker	Linker	*	aggr	Specifies the linker for which this implementation has been released. **Tags:** atp.Splitkey=linker, linker.shortName
mcSupport	McSupportData	0..1	aggr	The measurement & calibration support data belonging to this implementation. The measurement & calibration support data belonging to this implementation. **Tags:** atp.Splitkey=mcSupport
programming Language	Programminglanguage Enum	0..1	attr	Programming language the implementation was created in.

▽

△

Class	***Implementation*** (abstract)			
requiredArtifact	DependencyOnArtifact	*	aggr	Specifies that this Implementation depends on the existence of another artifact (e.g. a library). This aggregation of DependencyOnArtifact is subject to variability with the purpose to support variability in the implementations. Different algorithms in the implementation might cause different dependencies, e.g. the number of used libraries. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=requiredArtifact, requiredArtifact.shortName, requiredArtifact.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
required GeneratorTool	DependencyOnArtifact	*	aggr	Relates this Implementation to a generator tool in order to generate additional artifacts during integration. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=requiredGeneratorTool, requiredGenerator Tool.shortName, requiredGeneratorTool.variation Point.shortLabel vh.latestBindingTime=preCompileTime
resource Consumption	ResourceConsumption	0..1	aggr	All static and dynamic resources for each implementation are described within the ResourceConsumption class. **Tags:** atp.Splitkey=resourceConsumption, resource Consumption.shortName
swcBsw Mapping	SwcBswMapping	0..1	ref	This allows a mapping between an SWC and a BSW behavior to be attached to an implementation description (for AUTOSAR Service, ECU Abstraction and Complex Driver Components). It is up to the methodology to define whether this reference has to be set for the Swc- or Bsw Implementtion or for both. **Tags:** atp.Splitkey=swcBswMapping
swVersion	RevisionLabelString	0..1	attr	Software version of this implementation. The numbering contains three levels (like major, minor, patch), its values are vendor specific.
usedCode Generator	String	0..1	attr	Optional: code generator used.
vendorId	PositiveInteger	0..1	attr	Vendor ID of this Implementation according to the AUTOSAR vendor list

Table 8.2: Implementation

Class	**Compiler**			
Note	Specifies the compiler attributes. In case of source code this specifies requirements how the compiler shall be invoked. In case of object code this documents the used compiler settings.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*Implementation*.compiler			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
name	String	0..1	attr	Compiler name (like gcc).
options	String	0..1	attr	Specifies the compiler options.
vendor	String	0..1	attr	Vendor of compiler.
version	String	0..1	attr	Exact version of compiler executable.

Table 8.3: Compiler

Class	Linker			
Note	Specifies the linker attributes used to describe how the linker shall be invoked.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*Implementation*.linker			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
name	String	0..1	attr	Linker name.
options	String	0..1	attr	Specifies the linker options.
vendor	String	0..1	attr	Vendor of linker.
version	String	0..1	attr	Exact version of linker executable.

Table 8.4: Linker

[constr_1966] Existence of attribute `Implementation.swVersion`

Imposition time: CP: `IT_RteGen`

⌈For each `Implementation`, attribute `swVersion` shall exist.⌋

[constr_1967] Existence of attribute `Implementation.vendorId`

Imposition time: CP: `IT_RteGen`

⌈For each `Implementation`, attribute `vendorId` shall exist.⌋

[constr_1968] Existence of attribute `Implementation.codeDescriptor`

Imposition time: CP: `IT_RteGen`

⌈For each `Implementation`, at least one aggregation of `Code` in the role `codeDescriptor` shall exist.⌋

Class	Code			
Note	A generic code descriptor. The type of the code (source or object) is defined via the category attribute of the associated engineering object.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*Implementation*.codeDescriptor			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
artifact Descriptor	AutosarEngineering Object	*	aggr	Refers to the artifact belonging to this code descriptor. **Tags:** atp.Splitkey=artifactDescriptor
callbackHeader	ServiceNeeds	*	ref	The association callbackHeader describes in which header files the function declarations of callback functions are provided to a service module. With this information the service module can include the appropriate header files in its configuration files. **Tags:** atp.Splitkey=callbackHeader

Table 8.5: Code

The reference in the role `Code.callbackHeader` is only applicable for basic-software modules, see [constr_4089] in the [6, TPS BSW Module Description Template].

Class	AutosarEngineeringObject			
Note	This denotes an engineering object being part of the process. It is a specialization of the abstract class EngineeringObject for usage within AUTOSAR.			
Base	*ARObject*, *EngineeringObject*			
Aggregated by	AclObjectSet.engineeringObject, *BuildActionEntity*.deliveryArtifact, Code.artifactDescriptor, Dependency OnArtifact.artifactDescriptor			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 8.6: AutosarEngineeringObject

Class	SwcImplementation			
Note	This meta-class represents a specialization of the general Implementation meta-class with respect to the usage in application software. **Tags:** atp.recommendedPackage=SwcImplementations This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *Implementation*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
behavior	SwcInternalBehavior	0..1	ref	The internal behavior implemented by this Implementation. **Tags:** atp.Splitkey=behavior
perInstance MemorySize	PerInstanceMemory Size	*	aggr	Allows a definition of the size of the per-instance memory for this implementation. The aggregation of PerInstance MemorySize is subject to variability with the purpose to support variability in the software components implementations. Typically different algorithms in the implementation are requiring different number of memory objects, in this case PerInstanceMemory. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=perInstanceMemorySize, perInstance MemorySize.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
required RTEVendor	String	0..1	attr	Identify a specific RTE vendor. This information is potentially important at the time of integrating (in particular: linking) the application code with the RTE. The semantics is that (if the association exists) the corresponding code has been created to fit to the vendor-mode RTE provided by this specific vendor. Attempting to integrate the code with another RTE generated in vendor mode is in general not possible.

Table 8.7: SwcImplementation

[constr_1969] Existence of attribute `SwcImplementation.behavior`

Imposition time: CP: `IT_RteGen`

⌈For each `SwcImplementation`, attribute `behavior` shall exist.⌋

Class	**PerInstanceMemorySize**			
Note	Resources needed by the allocation of PerInstanceMemory for each SWC instance. Note that these resources are not covered by an ObjectFileSection, because they are supposed to be allocated by the RTE.			
Base	*ARObject*			
Aggregated by	SwcImplementation.perInstanceMemorySize			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
alignment	PositiveInteger	0..1	attr	Required alignment (1,2,4,...) of the referenced Per InstanceMemory. Unit: byte.
perInstance Memory	PerInstanceMemory	0..1	ref	This represents the referenced PerInstanceMemory. **Tags:** atp.Splitkey=perInstanceMemory
size	PositiveInteger	0..1	attr	Size (in bytes) of the reference perInstanceMemory. The aggregation of PerInstanceMemorySize is subject to variability with the purpose to support variability in the software components implementations. Different algorithms in the implementation might require a different PerInstanceMemorySize. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 8.8: PerInstanceMemorySize

[constr_1970] Existence of attribute `PerInstanceMemorySize.alignment`

Imposition time: CP: `IT_RteGen`

⌈For each `PerInstanceMemorySize`, attribute `alignment` shall exist.⌋

[constr_1971] Existence of attribute `PerInstanceMemorySize.perInstanceMemory`

Imposition time: CP: `IT_RteGen`

⌈For each `PerInstanceMemorySize`, the reference to `PerInstanceMemory` in the role `perInstanceMemory` shall exist.⌋

[constr_1972] Existence of attribute `PerInstanceMemorySize.size`

Imposition time: CP: `IT_RteGen`

⌈For each `PerInstanceMemorySize`, attribute `size` shall exist.⌋

9 Mode Management

In general, the Software Component Template doesn't define the kind of modes that shall be supported by State Managers or software-components explicitly. However, the Software Component Template provides generic mechanisms for describing modes.

In this section the general relationship between modes, interfaces, and software-components is discussed.

The assumption from the software-component point of view is that State Managers are using a Standardized AUTOSAR PortInterface[1] to influence the SwComponentType and also provide a PortInterface to get requests and confirmations from the SwComponentType.

They will be implemented as AUTOSAR services and be part of the Basic Software on each ECU. The actual modes a State Manager provides will have to be standardized as well to allow compatibility between software-components.

It is also possible to define a mode manager in the Application Software and the same functionality is supported as for mode managers implemented in the Basic Software.

[TPS_SWCT_01581] Communication patterns for mode-related communication ⌈Mode-related communication shall implement a 1:1 or 1:n scenario but the creation of an n:1 configuration shall be considered invalid.⌋

As a consequence of [TPS_SWCT_01581], [constr_1101] is formulated.

[constr_1101] Mode-related communication

Imposition time: CP: IT_RteGen

⌈An RPortPrototype typed by ModeSwitchInterface shall not be referenced by more than one SwConnector.⌋

9.1 Declaration of Modes

The SW-Component Template provides some simple means to define collections of modes.

[TPS_SWCT_01071] ModeDeclaration ⌈The name of the mode is the most important attribute that shall be provided for each ModeDeclaration. The ModeDeclarations are grouped together within the ModeDeclarationGroup.⌋

[TPS_SWCT_01067] Initial mode ⌈The initialMode is active before any mode switches occurred.⌋

[1] See also AUTOSAR Glossary for "Standardized AUTOSAR Interface".

This is shown in Figure 9.1

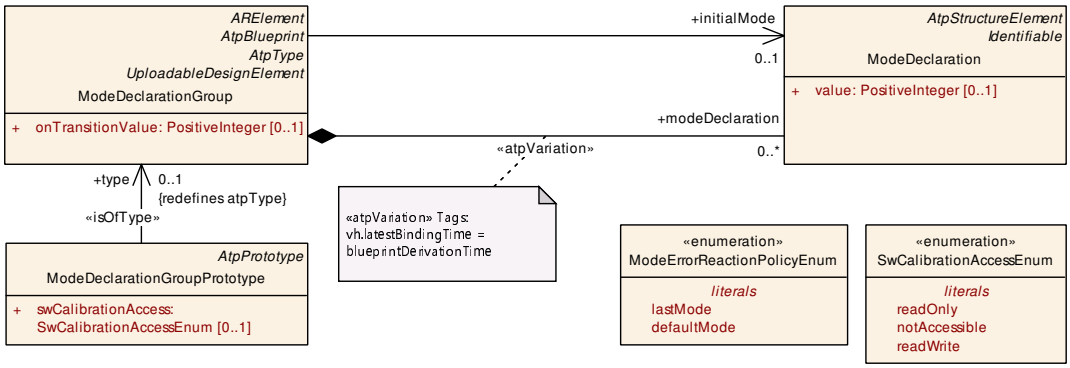

Figure 9.1: ModeDeclaration

The class ModeDeclarationGroup has been introduced to support the grouping of modes and (on M1 level) to provide predefined sets of modes that could be standardized and re-used. The set of modes eventually defines a flat (i.e. no hierarchical states) state-machine where only one mode can be active at a given point in time.

Again, the actual definition of modes and their relationship is not in the responsibility of this document. In other words: the definition of modes represents M1 artifacts whereas this document is limited to describing M2 model elements.

Both ModeDeclaration and ModeDeclarationGroup own attributes that facilitate the generation of C source code from the formal definition.

[TPS_SWCT_01008] Definition of positive integer values that are directly taken over by the RTE generator for creating the programmatic representations of the ModeDeclaration ⌈The attributes ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue allow for the definition of positive integer values that are directly taken over by the RTE generator for creating the programmatic representations of the ModeDeclaration and ModeDeclarationGroup in the source code.⌋

[constr_1399] Standardized values of ModeDeclarationGroup.category

Imposition time: CP: IT_CpgExe

⌈The AUTOSAR standard defines the following values of the attribute ModeDeclarationGroup.category with a standardized meaning:

- EXPLICIT_ORDER
- ALPHABETIC_ORDER

[TPS_SWCT_01010] defines the meaning of these values.

It is **not allowed** to define any custom or project-specific value of the attribute ModeDeclarationGroup.category.⌋

As the attributes ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue are optional the following rule applies:

[constr_1298] Existence of attributes if category of a ModeDeclarationGroup is set to EXPLICIT_ORDER

Imposition time: CP: IT_CpgExe

⌈The attributes ModeDeclarationGroup.onTransitionValue and ModeDeclaration.value (for each ModeDeclaration) shall be set if the category of a ModeDeclarationGroup is set to EXPLICIT_ORDER.⌋

[constr_1299] Existence of attributes if category of a ModeDeclarationGroup is set to other than EXPLICIT_ORDER

Imposition time: CP: IT_CpgExe

⌈The attributes ModeDeclarationGroup.onTransitionValue or ModeDeclaration.value (for any ModeDeclaration) shall **not** be set if the category of a ModeDeclarationGroup is set to any value **other than** EXPLICIT_ORDER.⌋

[constr_1181] Numerical values used in ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue

Imposition time: CP: IT_CpgExe

⌈The numerical values used to define the value attributes and the onTransitionValue attribute of a ModeDeclarationGroup shall not overlap.⌋

In other words, it is not allowed that the values of two value attributes within one ModeDeclarationGroup have the same numerical value. Neither is it allowed that the numerical value of the ModeDeclarationGroup.onTransitionValue attribute and the numerical value of one of the corresponding value attributes are identical.

[TPS_SWCT_01009] The numerical values used to define the values of ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue can be arbitrarily defined ⌈As long as the constraints [constr_1181], [constr_1298], and [constr_1299] are fulfilled, the numerical values used to define the values of ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue can be arbitrarily defined. The numerical values are not required to be consecutive. Gaps are allowed.⌋

Example 9.1

The following set of numerical values fulfills all requirements on the definition of ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue: {1,2, 5, 100}.

The ability to define ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue introduces a second heuristic for “ordering” ModeDeclarations.

If ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue are not defined, the assignment of numerical values to the representations of individual ModeDeclarations, it is up to the RTE generator to come up with the applicable numerical values.

[TPS_SWCT_01010] categorys for the definition of a ModeDeclarationGroup ⌈In order to support a clear separation between the two possible ways to influence the definition of the programmatic representation of ModeDeclarations two categorys shall be defined for the definition of a ModeDeclarationGroup.

- The value of category of a ModeDeclarationGroup shall be set to EXPLICIT_ORDER if it is intended to control the source code generation by means of the values of the attributes ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue.
- The value of category of a ModeDeclarationGroup shall be set to ALPHABETIC_ORDER if it is intended to let the RTE generator control the source code generation according to the alphabetical sorting.

⌋

More information regarding this aspect can be found in [SWS_Rte_02568].

[TPS_SWCT_01011] Default category of a ModeDeclarationGroup ⌈For reasons of backwards-compatibility with previous releases of AUTOSAR the default value of the category of a ModeDeclarationGroup shall be ALPHABETIC_ORDER.⌋

Class	**ModeDeclaration**			
Note	Declaration of one Mode. The name and semantics of a specific mode is not defined in the meta-model.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, ModeDeclarationGroup.modeDeclaration			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
value	PositiveInteger	0..1	attr	The RTE shall take the value of this attribute for generating the source code representation of this Mode Declaration.

Table 9.1: ModeDeclaration

Class	**ModeDeclarationGroup**			
Note	A collection of Mode Declarations. Also, the initial mode is explicitly identified. **Tags:** atp.recommendedPackage=ModeDeclarationGroups			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *UploadableDesignElement*, *Uploadable PackageElement*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	**ModeDeclarationGroup**			
initialMode	ModeDeclaration	0..1	ref	The initial mode of the ModeDeclarationGroup. This mode is active before any mode switches occurred. **Tags:** atp.Splitkey=initialMode
mode Declaration	ModeDeclaration	*	aggr	The ModeDeclarations collected in this ModeDeclaration Group. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=modeDeclaration, modeDeclaration.short Name, modeDeclaration.variationPoint.shortLabel vh.latestBindingTime=blueprintDerivationTime
modeManager ErrorBehavior	ModeErrorBehavior	0..1	aggr	This represents the ability to define the error behavior expected by the mode manager in case of errors on the mode user side (e.g. terminated mode user). **Tags:** atp.Splitkey=modeManagerErrorBehavior This Attribute is only used by the AUTOSAR Classic Platform.
modeTransition	ModeTransition	*	aggr	This represents the avaliable ModeTransitions of the ModeDeclarationGroup **Tags:** atp.Splitkey=modeTransition, modeTransition.short Name This Attribute is only used by the AUTOSAR Classic Platform.
modeUserError Behavior	ModeErrorBehavior	0..1	aggr	This represents the definition of the error behavior expected by the mode user in case of errors on the mode manager side (e.g. terminated mode manager). **Tags:** atp.Splitkey=modeUserErrorBehavior This Attribute is only used by the AUTOSAR Classic Platform.
onTransition Value	PositiveInteger	0..1	attr	The value of this attribute shall be taken into account by the RTE generator for programmatically representing a value used for the transition between two statuses. This Attribute is only used by the AUTOSAR Classic Platform.

Table 9.2: ModeDeclarationGroup

[constr_1973] Existence of attribute `ModeDeclarationGroup.initialMode`

Imposition time: CP: `IT_CpgExe`

⌈For each `ModeDeclarationGroup`, the reference to `ModeDeclaration` in the role `initialMode` shall exist.⌋

[constr_1974] Existence of attribute `ModeDeclarationGroup.modeDeclaration`

Imposition time: CP: `IT_CpgExe`

⌈For each `ModeDeclarationGroup`, at least one `ModeDeclaration` shall be aggregated in the role `modeDeclaration`.⌋

[TPS_SWCT_01450] Semantics of a `ModeTransition` ⌈In addition to the ability to specify `ModeDeclaration`s within a `ModeDeclarationGroup` it is also feasible

to define possible transitions between ModeDeclarations within the given ModeDeclarationGroup. This can be done by means of aggregation ModeTransition at ModeDeclarationGroup in the role modeTransition.⌋

More details are explained in Figure 9.2.

[TPS_SWCT_01451] Relations between meta-classes ModeTransition and ModeDeclaration ⌈ModeTransition has two associations to ModeDeclaration:

- The reference enteredMode denotes a ModeDeclaration that can be entered as part of the enclosing ModeTransition.
- The reference exitedMode denotes a ModeDeclaration that can be exited as part of the enclosing ModeTransition.

⌋

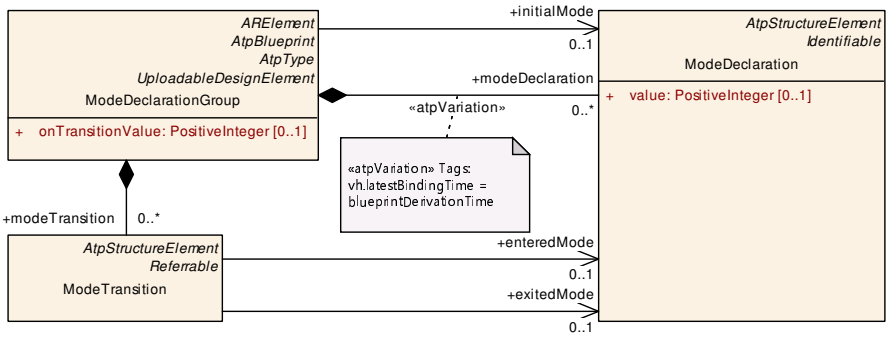

Figure 9.2: ModeTransition

The existence of the roles enteredMode and exitedMode is governed by the constraints [constr_1975] and [constr_1976].

[constr_1193] ModeDeclaration shall be referenced by at least one ModeTransition in the role enteredMode

Imposition time: CP: IT_RteGen

⌈For each ModeDeclaration, at least one ModeTransition shall reference the ModeDeclaration in the role enteredMode.

This constraint shall apply **only** if there is at least one ModeTransition defined in the context of the enclosing ModeDeclarationGroup and it shall **not** apply to the initialMode.⌋

For clarification, the ModeDeclarationGroup.initialMode does not need to be referenced by an enteredMode because identifying this ModeDeclaration in the role initialMode makes it clear that the ModeDeclaration will be entered at least once.

Class	**ModeTransition**			
Note	This meta-class represents the ability to describe possible ModeTransitions in the context of a Mode DeclarationGroup.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, ModeDeclarationGroup.modeTransition			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
enteredMode	ModeDeclaration	0..1	ref	This represents the entered model of the ModeTransition. **Tags:** atp.Splitkey=enteredMode
exitedMode	ModeDeclaration	0..1	ref	This represents the exited mode of the ModeTransition **Tags:** atp.Splitkey=exitedMode

Table 9.3: ModeTransition

[constr_1975] Existence of attribute ModeTransition.enteredMode

Imposition time: CP: IT_RteGen

⌈For each ModeTransition, the reference to ModeDeclaration in the role enteredMode shall exist.⌋

[constr_1976] Existence of attribute ModeTransition.exitedMode

Imposition time: CP: IT_RteGen

⌈For each ModeTransition, the reference to ModeDeclaration in the role exitedMode shall exist.⌋

9.2 Modes and Events

[TPS_SWCT_01376] Software-components need to be capable of reacting to state changes ⌈Software-components need to be capable of reacting to state changes issued by some Mode Manager and adapt their behavior to the new situation.⌋

Such a mode-dependent software-component is shown in Figure 9.3.

[TPS_SWCT_01077] Configure the response to mode changes ⌈Since the behavior of AtomicSwComponentTypes is mainly determined by the RunnableEntitys contained in the SwcInternalBehavior, it is necessary to configure the response to mode changes on the level of RunnableEntitys.⌋

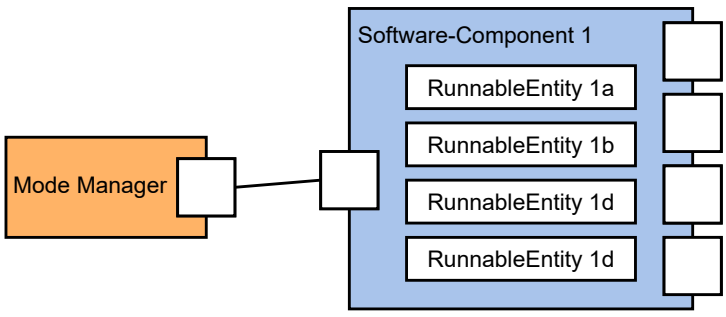

Figure 9.3: State Managers and software-components

Figure 9.4 shows an excerpt of the meta-model illustrating how the relationship between the current mode and the SwcInternalBehavior of the AtomicSwComponentType can be described.

[TPS_SWCT_01377] Two mechanisms to define how SwcInternalBehavior should interact with the mode management ⌈A AtomicSwComponentType can use two mechanisms to define how its SwcInternalBehavior should interact with the mode management.⌋

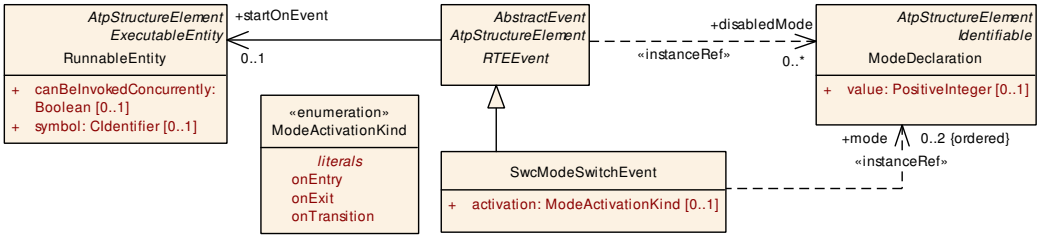

Figure 9.4: Modes and events

Both mechanisms are visible in Figure 9.4.

[TPS_SWCT_01378] AtomicSwComponentType can define an SwcModeSwitchEvent to execute RunnableEntity ⌈Using the first mechanism, an AtomicSwComponentType can define an SwcModeSwitchEvent to specify that a particular RunnableEntity shall be started whenever a mode is entered, exited, or a transition between two specified modes occurs.⌋

[constr_4003] Semantics of SwcModeSwitchEvent

Imposition time: CP: IT_RteGen

⌈If the value of SwcModeSwitchEvent.activation is onTransition, then SwcModeSwitchEvent shall refer to two different ModeDeclarations belonging to the same instance of ModeDeclarationGroup.

Their order defines the direction of the transition from one mode into another. In all other cases SwcModeSwitchEvent shall refer to exactly one ModeDeclaration.⌋

[constr_1195] SwcModeSwitchEvent and the definition of ModeTransition

Imposition time: CP: IT_RteGen

⌈For each pair of ModeDeclarations referenced by a SwcModeSwitchEvent with attribute activation set to onTransition a ModeTransition shall be defined in the corresponding direction (i.e. from exitedMode to enteredMode). This constraint shall only apply if the respective ModeDeclarationGroup defines at least one modeTransition.⌋

[TPS_SWCT_01379] AtomicSwComponentType can indicate whether an RTEEvent that starts an associated RunnableEntity is disabled in a certain mode ⌈Using the second mechanism, the AtomicSwComponentType can indicate

whether an RTEEvent that starts an associated RunnableEntity is disabled in a certain mode.

That is, RTEEvents without an association in the role disabledMode are processed regularly according to their definition.

RTEEvents with the optional association disabledMode have the additional limitation that the associated RunnableEntity is *not* started when the ModeDeclaration referenced as disabledMode is active.⌋

The mechanisms discussed so far shall be applied to the SwcInternalBehavior on the receiver side of mode switches. Since mode switches are received via PortPrototypes, the following constraints apply:

[TPS_SWCT_01380] Mode management behavior on the sender side ⌈On the sender side, a RunnableEntity shall have ModeSwitchPoints that eventually associate a RunnableEntity with the specific ModeDeclarationGroups which it manages.⌋

For more information, please refer to Figure 9.5.

[constr_1778] Value of attribute modeSwitchPoint.returnValueProvision

Imposition time: CP: IT_CpgExe

⌈All RunnableEntity.modeSwitchPoint that refer to the same modeGroup shall define the identical value of attribute returnValueProvision.⌋

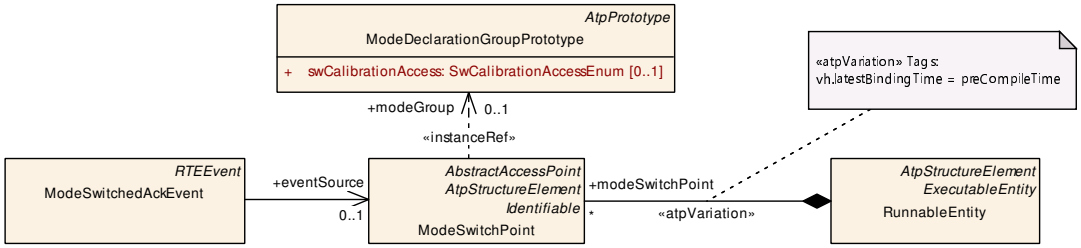

Figure 9.5: ModeSwitchPoint

Rationale for the existence of [constr_1778]: different RunnableEntitys could aggregate ModeSwitchPoints with a different configuration of attribute returnValueProvision.

However, in such a case it would not be possible to generate the corresponding RTE API because the API exists once per software-component and it is therefore indispensable to have all affected ModeSwitchPoints agree on the configuration of attribute returnValueProvision.

This relation is exemplarily (for the case of dataSendPoint.returnValueProvision) sketched in Figure 7.22.

Class	ModeSwitchPoint			
Note	A ModeSwitchPoint is required by a RunnableEntity owned a Mode Manager. Its semantics implies the ability to initiate a mode switch.			
Base	ARObject, AbstractAccessPoint, AtpClassifier, AtpFeature, AtpStructureElement, Identifiable, MultilanguageReferrable, Referrable			
Aggregated by	AtpClassifier.atpFeature, RunnableEntity.modeSwitchPoint			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
modeGroup	ModeDeclarationGroup Prototype	0..1	iref	The mode declaration group that is switched by this runnable. **Tags:** atp.Splitkey=modeGroup, modeGroup.context PPort, modeGroup.targetModeGroup **InstanceRef implemented by:** PModeGroupInAtomic SwcInstanceRef

Table 9.4: ModeSwitchPoint

[TPS_SWCT_01383] **ModeSwitchPoint** ⌈The ModeSwitchPoint also allows for the definition of a ModeSwitchedAckEvent if this is requested by the definition of the PPortPrototype. This RTEEvent is eventually owned by a mode manager to allow for getting confirmation of a mode change.⌋

[TPS_SWCT_01555] **ModeSwitchedAckEvent is triggered by the RTE regardless** ⌈The ModeSwitchedAckEvent is triggered by the RTE (for more details please refer to the [2, SWS RTE]) regardless of which RunnableEntity has requested the mode switch notification, even if the Meta-Model implies a reference from ModeSwitchedAckEvent to a specific ModeSwitchPoint in the role eventSource.⌋

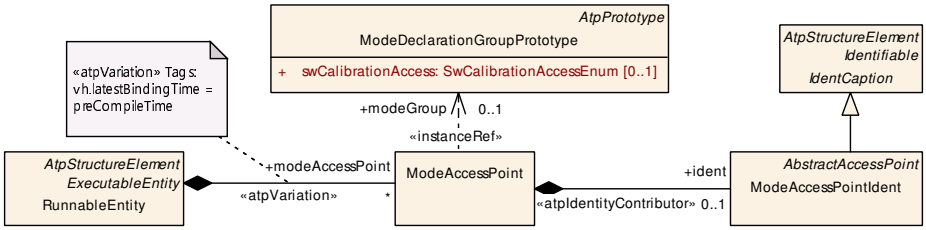

Figure 9.6: ModeAccessPoint

[constr_4012] Timeout of ModeSwitchedAckEvent

Imposition time: CP: IT_RteGen

⌈The timeout value of a WaitPoint associated with a ModeSwitchedAckEvent shall be equal to the corresponding ModeSwitchedAckRequest.timeout.⌋

[TPS_SWCT_01381] Read the currently active mode ⌈For *Mode Manager* and *Mode User*, it might additionally be required to read the currently active mode. For that purpose, a RunnableEntity that requires read-access to the ModeDeclarationGroupPrototype's current mode shall define a ModeAccessPoint.⌋

[TPS_SWCT_01382] Mode switch requests may be handled asynchronously by the RTE ⌈Depending on the value of attribute ModeSwitchReceiverComSpec.supportsAsynchronousModeSwitch in the context of all affected *Mode*

Users (the details are explained in [SWS_Rte_07150] and [SWS_Rte_07151]), mode switch requests may be handled **asynchronously** by the RTE.

Therefore, if a *Mode Manager* is interested in the confirmation that the *Mode User* has really reacted to the mode switch, then the *Mode Manager* shall define a ModeAccessPoint for this purpose.⌋

Class	**ModeAccessPoint**			
Note	A ModeAccessPoint is required by a RunnableEntity owned by a Mode Manager or Mode User. Its semantics implies the ability to access the current mode (provided by the RTE) of a ModeDeclaration GroupPrototype's ModeDeclarationGroup.			
Base	*ARObject*			
Aggregated by	RunnableEntity.modeAccessPoint			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
ident	ModeAccessPointIdent	0..1	aggr	The aggregation in the role ident provides the ability to make the ModeAccessPoint identifiable. From the semantical point of view, the ModeAccessPoint is considered a first-class Identifiable and therefore the aggregation in the role ident shall always exist (until it may be possible to let ModeAccessPoint directly inherit from Identifiable). **Stereotypes:** atpIdentityContributor **Tags:** xml.sequenceOffset=-100
modeGroup	ModeDeclarationGroup Prototype	0..1	iref	The mode declaration group that is accessed by this runnable. **Tags:** atp.Splitkey=modeGroup, modeGroup.contextPPort, modeGroup.contextRPort, modeGroup.targetModeGroup xml.typeElement=true **InstanceRef implemented by:** ModeGroupInAtomicSwc InstanceRef

Table 9.5: ModeAccessPoint

[constr_1098] Mode switch and mode disabling

Imposition time: CP: IT_RteGen

⌈A SwcModeSwitchEvent shall not simultaneously reference to the same ModeDeclaration in both the roles mode and disabledMode.⌋

If [constr_1098] did not apply, it might happen that a RunnableEntity would be triggered by a SwcModeSwitchEvent and, at the same time, it would be suppressed by the mode disabling.

9.3 Initialization / Finalization

The AUTOSAR standard shall support the execution of initialization code for every AtomicSwComponentType.

[TPS_SWCT_01384] Execution of initialization code for software-components ⌈Most AtomicSwComponentTypes will need to initialize by executing specific code;

this code shall complete before any other code in the component is executed. Data is initialized to specific values before the “normal” application software is running.⌋

[TPS_SWCT_01385] Execution of finalization code for software-components ⌈Most AtomicSwComponentTypes will need to finalize by calling specific code; this code shall complete before the functionality of the application software shuts down (e.g. a motor drive in a start or end position).⌋

[TPS_SWCT_01388] Initial modes of AtomicSwComponentTypes are defined by the initialMode ⌈The initial modes of AtomicSwComponentTypes are defined by the initialMode references of the required ModeDeclarationGroups. These modes are activated before any other mode activation has occurred. It is the responsibility of the RTE to activate all initial modes on a certain ECU.⌋

For more details, please refer to the specification of the [2, SWS RTE].

9.4 Mode Error Behavior

With the advent of partitions in the AUTOSAR standard, it is important to consider the behavior of mode management with respect to the following scenarios:

- The partition of the mode manager is terminated.
- The partition of the mode user is terminated.

Whenever one of the two scenarios occurs, it is important to implement a stable reaction of both mode manager and mode user to the event. In addition, mode manager and mode user should be able to synchronize in terms of which mode shall apply as fast and seamlessly as possible.

For this purpose, additional modeling support has been defined such that the applicable ModeDeclarationGroup (which is part of the contract between mode manager and mode user) becomes the place where the policy for a reaction to e.g. a partition restart is defined.

[TPS_SWCT_01530] Error behavior of mode manager and mode user ⌈The behavior in response to a mode manager getting out of sync with a mode user (because the partition of the mode user has been terminated) or vice versa (because the partition of the mode manager has been terminated) can be defined for the mode manager by means of the attribute ModeDeclarationGroup.modeManagerErrorBehavior and for the mode user by means of the attribute ModeDeclarationGroup.modeUserErrorBehavior.⌋

[TPS_SWCT_01531] The semantics of ModeErrorReactionPolicyEnum ⌈The attribute ModeErrorBehavior.errorReactionPolicy shall be used to specify the behavior in the event of a mode error:

lastMode The last mode applicable before the event shall be assumed.

defaultMode This represents the ability to specify a dedicated mode that shall be made applicable. The identified ModeDeclaration could be identical to the ModeDeclarationGroup.initialMode but it can just as well be any other ModeDeclaration defined in the context of the enclosing ModeDeclarationGroup.

⌋

[TPS_SWCT_01532] The role of ModeErrorBehavior.defaultMode ⌈The attribute ModeErrorBehavior.defaultMode shall be used to identify the particular ModeDeclaration if ModeErrorBehavior.errorReactionPolicy is set to defaultMode.⌋

[constr_1263] Existence of ModeErrorBehavior.defaultMode

Imposition time: CP: IT_RteGen

⌈The optional attribute ModeErrorBehavior.defaultMode **shall exist** if the value of the attribute ModeErrorBehavior.errorReactionPolicy is set to defaultMode.⌋

The modeling of the ModeErrorBehavior is depicted in Figure 7.11.

[TPS_SWCT_01533] ModeDeclarationGroup.initialMode shall be assumed in the absence of ModeDeclarationGroup.modeManagerErrorBehavior ⌈If the attribute ModeDeclarationGroup.modeManagerErrorBehavior is not defined, it shall be assumed that the ModeDeclarationGroup.initialMode becomes applicable in the case of the mode manager getting out of sync with a mode user (because the partition of the mode user has been terminated).⌋

[TPS_SWCT_01534] ModeDeclarationGroup.initialMode shall be assumed in the absence of ModeDeclarationGroup.modeUserErrorBehavior ⌈If the attribute ModeDeclarationGroup.modeUserErrorBehavior is not defined, it shall be assumed that the ModeDeclarationGroup.initialMode becomes applicable in the case of the mode user getting out of sync with a mode manager (because the partition of the mode manager has been terminated).⌋

Class	**ModeErrorBehavior**			
Note	This represents the ability to define the error behavior in the context of mode handling.			
Base	*ARObject*			
Aggregated by	ModeDeclarationGroup.modeManagerErrorBehavior, ModeDeclarationGroup.modeUserErrorBehavior			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
defaultMode	ModeDeclaration	0..1	ref	This represents the ModeDeclaration that is considered the error mode in the context of the enclosing Mode DeclarationGroup. **Tags:** atp.Splitkey=defaultMode
errorReaction Policy	ModeErrorReaction PolicyEnum	0..1	attr	This represents the ability to define the policy in terms of which default model shall apply in case an error occurs.

Table 9.6: ModeErrorBehavior

[constr_1977] Existence of attribute ModeErrorBehavior.errorReactionPolicy

Imposition time: CP: IT_RteGen

⌈For each ModeErrorBehavior, the attribute errorReactionPolicy shall exist.⌋

Enumeration	**ModeErrorReactionPolicyEnum**
Note	This represents the ability to specify the reaction on a mode error.
Aggregated by	ModeErrorBehavior.errorReactionPolicy
Literal	*Description*
defaultMode	This represents the ability to switch to the defaultMode in case of a mode error. **Tags:** atp.EnumerationLiteralIndex=0
lastMode	This represents the ability to keep the last mode in case of a mode error. **Tags:** atp.EnumerationLiteralIndex=1

Table 9.7: ModeErrorReactionPolicyEnum

[TPS_SWCT_01535] Mode manager reacts on mode error ⌈If the mode manager is getting out of sync with a mode user (because the partition of the mode user has been terminated) or vice versa (because the partition of the mode manager has been terminated), it shall be possible for the mode manager to react on such an event.

For this purpose, the formal SwcModeManagerErrorEvent is defined that can be used to e.g. trigger the execution of a RunnableEntity in response to an error with respect to mode switch communication.⌋

Class	**SwcModeManagerErrorEvent**			
Note	This event is raised when an error occurred during the handling of the referenced ModeDeclarationGroup Prototype.			
Base	*ARObject*, *AbstractEvent*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *RTEEvent*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, SwcInternalBehavior.event			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
modeGroup	ModeDeclarationGroup Prototype	0..1	iref	This represents the ModeDeclarationGroupPrototype for which this SwcModeManagerErrorEvent is raised in case of an error. **Tags:** atp.Splitkey=modeGroup, modeGroup.context PPort, modeGroup.targetModeGroup **InstanceRef implemented by:** PModeGroupInAtomic SwcInstanceRef

Table 9.8: SwcModeManagerErrorEvent

[constr_1978] Existence of attribute SwcModeManagerErrorEvent.modeGroup

Imposition time: CP: IT_RteGen

⌈For each SwcModeManagerErrorEvent, the instance reference to ModeDeclaration in the role modeGroup shall exist.⌋

As mentioned in [constr_1075], it is possible to overrule the default compatibility rules by the definition of a PortInterfaceMapping.

In this case the demand for having identical definitions of ModeDeclarationGroup.modeUserErrorBehavior and ModeDeclarationGroup.modeManagerErrorBehavior is no longer valid.

However, there is one additional caveat to observe in this case. This affects the implementation of error behavior in the case that several mode users are connected to a mode manager.

[TPS_SWCT_01536] Coherent behavior of all mode users in the case of errors in the mode switch communication ⌈The behavior in the case of errors with the communication of mode switches shall be **coherent for all** connected mode users **especially** if the individual SwConnectors are legitimized by the existence of a PortInterfaceMapping.⌋

[TPS_SWCT_01541] Preferential selection of modeUserErrorBehavior ⌈The definition of mode error behavior on the provided side shall be considered **dominant** over the definition of mode error behavior on the required side.

This means that a ModeSwitchInterface.modeGroup.type.modeUserErrorBehavior used to type an AbstractProvidedPortPrototype shall be considered **dominant** over the definition of a corresponding modeUserErrorBehavior defined in the context of an AbstractRequiredPortPrototype.⌋

[TPS_SWCT_01542] Preferential selection of modeManagerErrorBehavior ⌈The definition of mode error behavior on the provided side shall be considered **dominant** over the definition of mode error behavior on the required side.

This means that a ModeSwitchInterface.modeGroup.type.modeManagerErrorBehavior used to type an AbstractProvidedPortPrototype shall be considered **dominant** over the definition of a corresponding modeManagerErrorBehavior defined in the context of an AbstractRequiredPortPrototype.⌋

The consequence of [TPS_SWCT_01541] and [TPS_SWCT_01542] is that the **mode manager shall be considered the master of the definition of mode error behavior**.

The details of how the run-time behavior of mode manager and mode user shall appear in the event of the mode manager getting out of sync with a mode user (because the partition of the mode user has been terminated) or vice versa (because the partition of the mode manager has been terminated) as well as the applicable RTE APIs are explained in the [2, SWS RTE].

9.5 Summary Meta-Model Excerpt Related to Modes

Figure 9.7 provides an overview of all meta-model elements that have a direct relationship to the meta-classes involved in the modeling of mode switches.

To get the complete picture, it should be noted that also the concepts of PortGroups (see Chapter 4.7) and ServiceProxySwComponentType (see Chapter 11.3) have a

semantical relationship to mode management, though this is not expressed via relations in the meta-model.

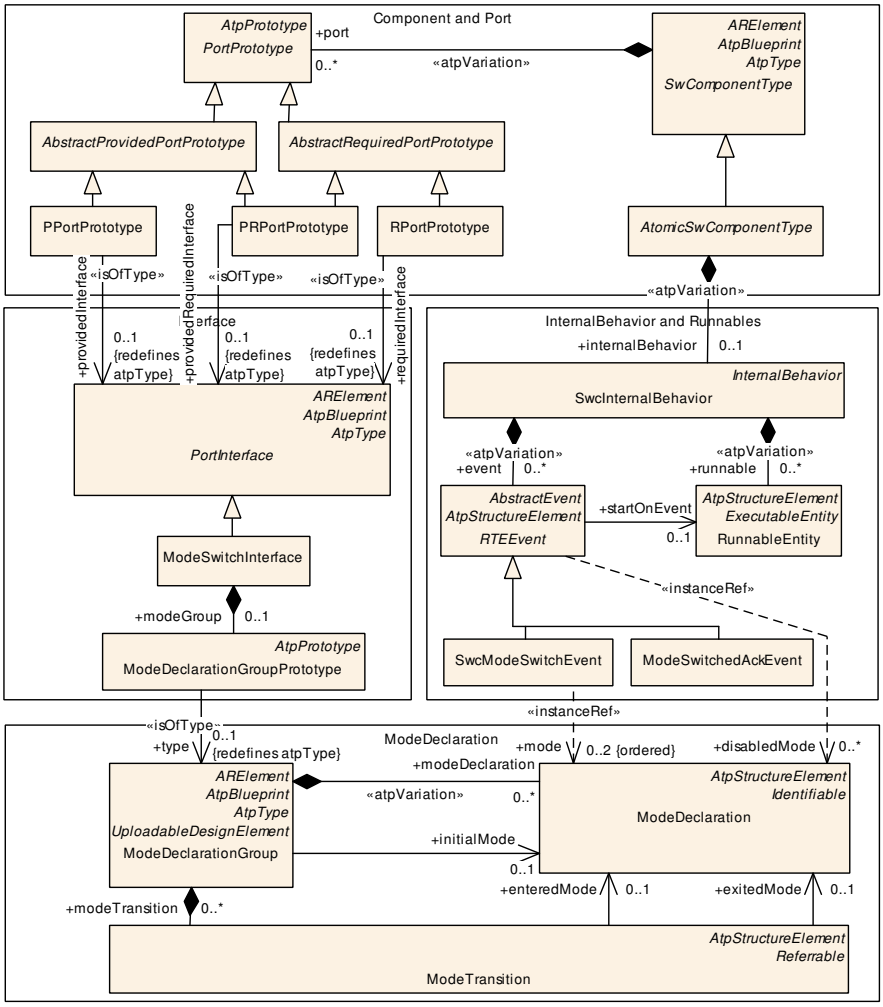

Figure 9.7: Summary meta-model excerpt related to modes

10 ECU Abstraction and Complex Drivers

10.1 Introduction

During the design of embedded systems there is one crucial point where the hardware and software have to be related. In AUTOSAR the `ECU Resource Template` describes the provided hardware resources.

On the other hand, the `Software Component Template` describes software generally without specific hardware in mind. But there are some places where both have to meet and fit.

One interface between hardware and software is discussed in the memory and execution time section of the [6, TPS BSW Module Description Template]. In this chapter, the overall system view of the interface between sensors/actuators and software is described and the consequences for the `Software Component Template` are derived.

10.2 High Level Hardware and Software Architecture

The AUTOSAR concept defines a software architecture (see Figure 10.1) and within this layered architecture the interfaces between the hardware and the software are explicitly modeled.

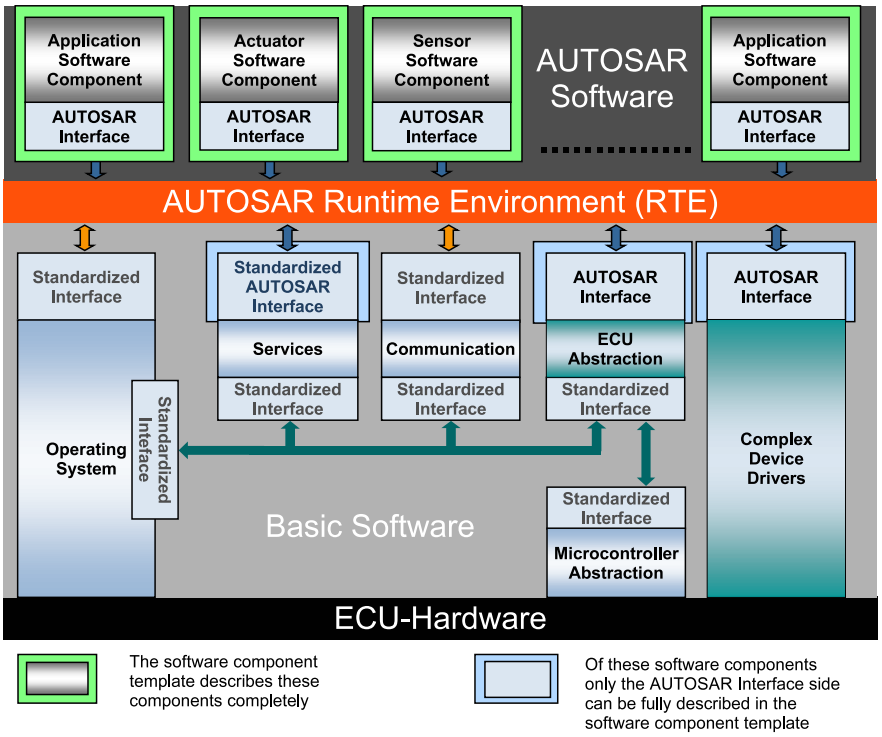

Figure 10.1: AUTOSAR ECU Software Architecture

The signal[1] flow from hardware to software and vice versa is described in the following sections.

A sensor[2] converts a physical value (1) in Figure 10.2 (e.g. temperature, force, light intensity) into an electrical signal (2), which can be either a current or a voltage.

Inside the ECU, there is generally some electronics to enhance the electrical signal provided by the sensor. In AUTOSAR, this is called ECU Electronics. This electronics device is also responsible for converting the electrical signal into a micro-controller compatible form (3), usually a voltage.

After the electrical signal has been enhanced and converted, it is captured by the micro-controller. This can be done by a simple digital input, an analogue-to-digital converter, or possibly a pulse-width demodulation module. Now the electrical signal is available as a software data value (4).

This signal flow is sketched in the top part of Figure 10.2.

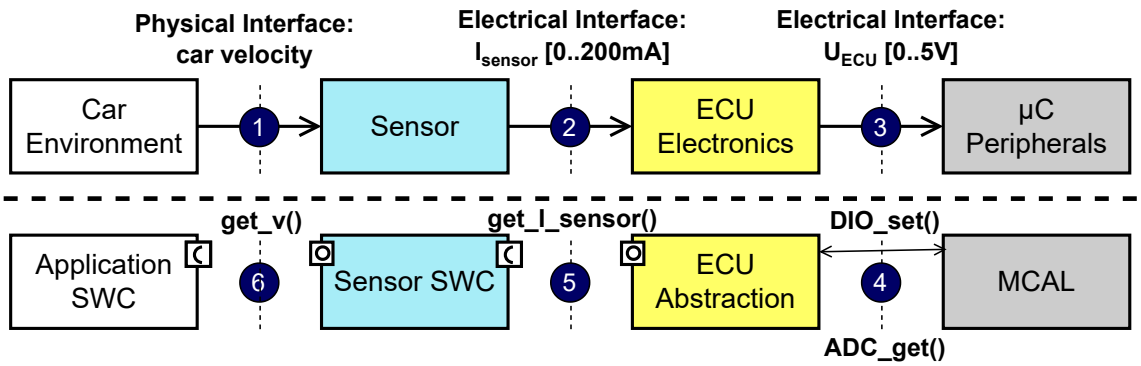

Figure 10.2: Interfaces between hardware and software

The interaction shown in Figure 10.2 shows an exemplary scenario. The usage of `ClientServerInterface` is just an example for the interaction pattern.

This signal chain is represented one-to-one in the AUTOSAR software architecture and depicted in the lower part of Figure 10.2.

In an implementation of AUTOSAR, only the micro-controller Abstraction (MCAL) has direct access to the peripheral hardware. This layer is standardized, and all hardware access should go through this layer. The idea of the AUTOSAR signal flow is to map the hardware to the corresponding software modules.

If an electrical current is the input to the micro-controller peripheral, the MCAL delivers a data value that represents this current. As the ECU Electronics has enhanced and converted the electrical signal prior to the micro-controller, the corresponding software

[1]The term “signal” is not used on its own here, but more specific terms are used for the different abstractions of signals at the different stages of the signal flow.

[2]For simplicity, this discussion is limited to sensor aspects. Nevertheless, the same applies to actuators.

entity reverses this conversion. This conversion is performed in the ECU Abstraction layer.

If the input to the ECU is an electrical current and the ECU Electronics has converted this current into a voltage (from 2 to 3), the ECU Abstraction converts the data value representing the voltage into an AUTOSAR signal representing a current (from 4 to 5). This AUTOSAR signal represents the actual current provided by the sensor (2).

Now the first step in the conversion has to be reversed: the sensor has converted a physical value into an electrical signal. Consequently, the Sensor Software Component has to reverse this step as well. The Sensor Software Component reads the AUTOSAR signal representing the electrical value and transforms it into an AUTOSAR signal representing the physical value (from 5 to 6).

Now this physical value is available on the RTE and can be consumed or read by other SW-Components. Although the interface between the ECU Abstraction and the Sensor Software Component is also an AUTOSAR interface and could be routed through some communication bus, it is not practical to separate the ECU Abstraction and the corresponding `SensorActuatorSwComponentType` due to the potentially high communication effort.

In Figure 10.3 a complete signal flow from a sensor input to an actuator output is shown.

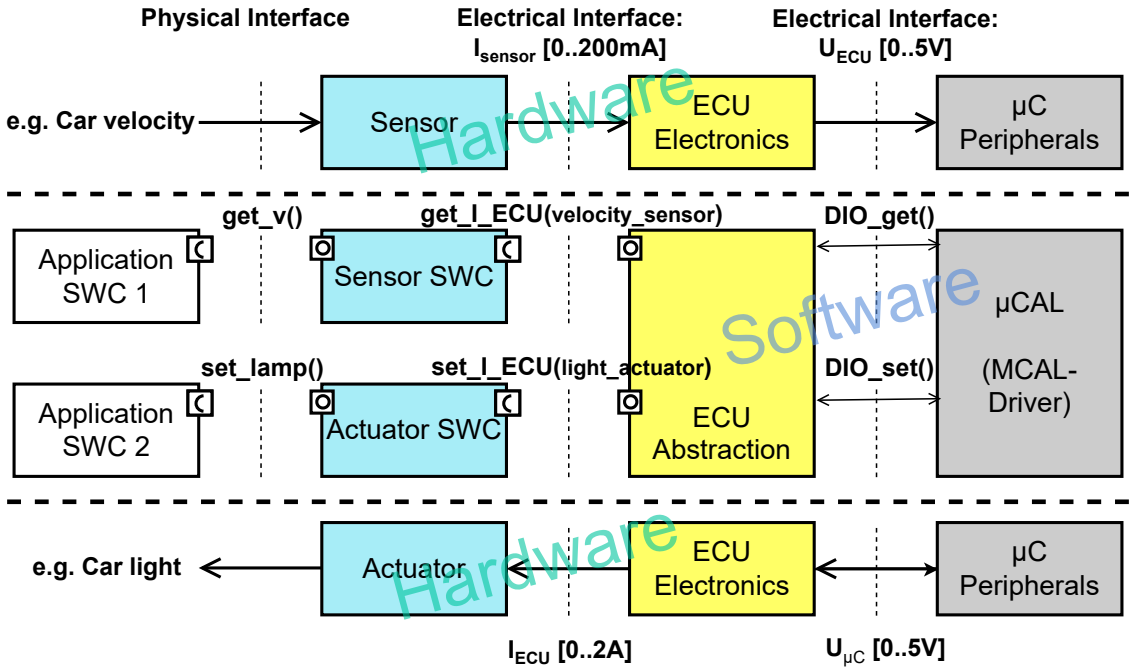

Figure 10.3: Sensor and Actuator Signal Flow

The interaction shown in Figure 10.3 shows an exemplary scenario. The usage of `ClientServerInterface` is just an example for the interaction pattern.

In the next section the interfaces between the involved software modules are discussed.

10.3 Interfaces and APIs

Two fundamentally different interfaces are involved when converting from sensors/actuators to software-components, see markers “4” and “5” in Figure 10.2.

The interface between the micro-controller Abstraction and the ECU Abstraction is a Standardized Interface (see [35, TR Glossary]). This interface is not visible on the `Virtual Functional Bus` and therefore the MCAL and ECU Abstraction have to be present on the same ECU.

For further description of this interface, refer to the `ECU Resource Template` documentation.

The interface to the `SensorActuatorSwComponentType`s is visible on the `Virtual Functional Bus`. In general the `SensorActuatorSwComponentType` should be on the same ECU as the ECU hardware abstraction.

Also, the interface between the `SensorActuatorSwComponentType`s and the actual `AtomicSwComponentType`s representing the application is visible on the VFB. To describe the data exchanged via this interface, the standard AUTOSAR interface description mechanisms are used (see Chapter 4.2).

10.3.1 ECU Abstraction and its AUTOSAR Interfaces

Since the AUTOSAR standard is designed to integrate software-components coming from different contractors, the interfaces between the different software-components have to be compatible.

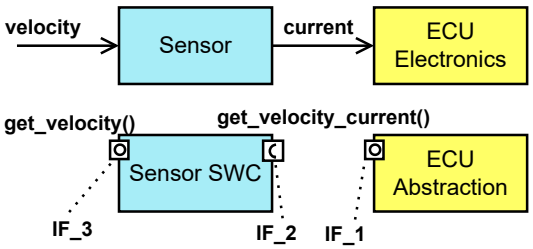

Figure 10.4: Interfaces of signals in software

For sensors and actuators, the interface is bundled in the ECU Abstraction. For each sensor and actuator there is one AUTOSAR `PortPrototype` that represents the AUTOSAR Signal that is delivered by the sensor or the AUTOSAR Signal that is consumed by the actuator. This relationship is depicted in Figure 10.4.

The interaction shown in Figure 10.4 shows an exemplary scenario. The usage of `ClientServerInterface` is just an example for the interaction pattern.

Each sensor and actuator has an AUTOSAR PortPrototype at the ECU Abstraction. This port is connected to the SensorActuatorSwComponentType.

The SensorActuatorSwComponentType has one PortPrototype (i.e. IF_2) to the ECU Abstraction (which provides the values via IF_1) where it gets the AUTOSAR signals from the hardware, and one PortPrototype (i.e. IF_3) to AtomicSwComponentTypes where it provides the actual physical value to the rest of AUTOSAR on the RTE.

In addition, the interfaces between the ECU Abstraction and the SensorActuatorSwComponentType have to be compatible as defined in Chapter 6.

10.4 Sensors/Actuators

In the layered software architecture described in the [5, EXP Layered Software Architecture] each hardware sensor/actuator is coupled to a SensorActuatorSwComponentType (see Figure 10.5).

[TPS_SWCT_01047] Reference from the software representation of a sensor/actuator to the actual hardware element ⌈Since the Software Component Template also describes the SensorActuatorSwComponentType, a reference is needed from the software representation of a sensor/actuator to the actual hardware element described in the ECU Resource description.⌋



Figure 10.5: Shipment of a sensor

Thus, whenever a sensor/actuator is selected for connection to an ECU, the corresponding SensorActuatorSwComponentType is also available.

[constr_1144] SensorActuatorSwComponentType, EcuAbstractionSwComponentType, and ComplexDeviceDriverSwComponentType may only reference a HwType

Imposition time: CP: IT_CpgExe

⌈The attribute sensorActuator of SensorActuatorSwComponentType, the attribute hardwareElement of EcuAbstractionSwComponentType, and the attribute hardwareElement of ComplexDeviceDriverSwComponentType may

only reference a HwType. References to other subclasses of HwDescriptionEntity are not allowed.⌋

Figure 10.6 depicts the reference of SensorActuatorSwComponentType designed as a specialization of an AtomicSwComponentType with an additional reference to a HwType.



Figure 10.6: Sensor/actuator to Hardware Relationship

[constr_1109] Mapping of SwComponentPrototypes typed by a SensorActuatorSwComponentType

Imposition time: CP: IT_RteGen

⌈A SwComponentPrototype typed by a SensorActuatorSwComponentType needs to be mapped and run on exactly that ECU that contains the HwElement corresponding to the HwType that its SensorActuatorSwComponentType refers to if it accesses the hardware via the I/O hardware abstraction layer.⌋

[TPS_SWCT_01048] SensorActuatorSwComponentType may use the I/O hardware abstraction directly ⌈In contrast to an ApplicationSwComponentType, a SensorActuatorSwComponentType may use the I/O hardware abstraction directly (via ports/connectors).⌋

If the sensor/actuator hardware is accessed via bus communication, for example because it is located on a LIN slave, no such mapping constraints apply (this case is not handled via the I/O hardware abstraction layer).

Class	**SensorActuatorSwComponentType**			
Note	The SensorActuatorSwComponentType introduces the possibility to link from the software representation of a sensor/actuator to its hardware description provided by the ECU Resource Template. **Tags:** atp.recommendedPackage=SwComponentTypes			
Base	*ARElement*, *ARObject*, *AtomicSwComponentType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *Collectable Element*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *SwComponentType*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
sensorActuator	HwDescriptionEntity	0..1	ref	Reference from the Sensor Actuator Software Component Type to the description of the actual hardware. **Tags:** atp.Splitkey=sensorActuator

Table 10.1: SensorActuatorSwComponentType

10.5 I/O Hardware Abstraction

[TPS_SWCT_01389] I/O Hardware Abstraction interfaces MCAL drivers ⌈The I/O Hardware Abstraction interfaces the MCAL drivers on one side via

Standardized Interfaces and the Sensor Actuator Software Component on the other side via AUTOSAR Interfaces. On the [3, TR Virtual Function Bus] the I/O Hardware Abstraction is represented by the EcuAbstractionSwComponentType.⌋

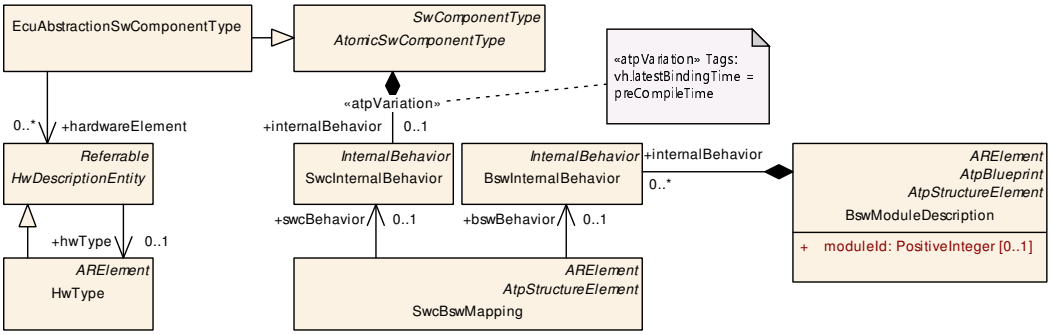

Figure 10.7: EcuAbstractionSwComponentType

[TPS_SWCT_01390] I/O Hardware Abstraction might have sub-structures ⌈Depending on the complexity of an ECU, the I/O Hardware Abstraction might have sub-structures. In this case the I/O Hardware Abstraction Layer is described by several EcuAbstractionSwComponentTypes on M1.⌋

Class	**EcuAbstractionSwComponentType**			
Note	The ECUAbstraction is a special AtomicSwComponentType that resides between a software-component that wants to access ECU periphery and the Microcontroller Abstraction. The EcuAbstractionSw ComponentType introduces the possibility to link from the software representation to its hardware description provided by the ECU Resource Template. **Tags:** atp.recommendedPackage=SwComponentTypes			
Base	*ARElement*, *ARObject*, *AtomicSwComponentType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *Collectable Element*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *SwComponentType*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
hardware Element	HwDescriptionEntity	*	ref	Reference from the EcuAbstractionComponentType to the description of the used HwElements. **Tags:** atp.Splitkey=hardwareElement

Table 10.2: EcuAbstractionSwComponentType

[TPS_SWCT_01391] I/O Hardware Abstraction abstracts from the location of peripheral I/O devices ⌈The I/O Hardware Abstraction abstracts from the location of peripheral I/O devices (on-chip or on-board) and the ECU hardware layout and has therefore dependencies to ECU Hardware described by HwElements. In addition, the EcuAbstractionSwComponentType is a hybrid concept sharing features of both software-components and basic software modules.⌋

[TPS_SWCT_01392] Mapping between the EcuAbstractionSwComponentType and the corresponding BswModuleDescription ⌈The BSW part is described by means of the Basic Software Module Template. The mapping between the EcuAbstractionSwComponentType and the corresponding BswModuleDescription is provided by the class SwcBswMapping, which also maps

the two corresponding InternalBehaviors. This mechanism is further explained in [6, TPS BSW Module Description Template].⌋

10.6 Complex Driver

[TPS_SWCT_01393] Complex Driver ⌈A Complex Driver implements complex sensor evaluation and actuator control with direct access to the micro-controller using specific interrupts and/or complex micro-controller peripherals to fulfill the special functional and timing requirements.

In addition, it might be used to implement enhanced services / protocols or to encapsulate legacy functionality of a non-AUTOSAR system.⌋

See also document [3, TR Virtual Function Bus].

[TPS_SWCT_01394] Complex Driver is represented by the ComplexDeviceDriverSwComponentType ⌈On the VFB the Complex Driver is represented by the ComplexDeviceDriverSwComponentType. An ECU might have zero to many ComplexDeviceDriverSwComponentTypes.⌋

Class	**ComplexDeviceDriverSwComponentType**			
Note	The ComplexDeviceDriverSwComponentType is a special AtomicSwComponentType that has direct access to hardware on an ECU and which is therefore linked to a specific ECU or specific hardware. The ComplexDeviceDriverSwComponentType introduces the possibility to link from the software representation to its hardware description provided by the ECU Resource Template. **Tags:** atp.recommendedPackage=SwComponentTypes			
Base	*ARElement*, *ARObject*, *AtomicSwComponentType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *Collectable Element*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *SwComponentType*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
hardware Element	HwDescriptionEntity	*	ref	Reference from the ComplexDeviceDriverSwComponent Type to the description of the used HwElements. **Tags:** atp.Splitkey=hardwareElement

Table 10.3: ComplexDeviceDriverSwComponentType

[TPS_SWCT_01395] ComplexDeviceDriverSwComponentType has dependencies to ECU Hardware ⌈Similar to the EcuAbstractionSwComponentType, the ComplexDeviceDriverSwComponentType has dependencies to ECU Hardware described by HwElements and is a hybrid between Software Component and Basic Software Module.⌋

[TPS_SWCT_01396] Mapping between the ComplexDeviceDriverSwComponentType and the corresponding BswModuleDescription ⌈The BSW part is described by means of the Basic Software Module Template.

The mapping between the ComplexDeviceDriverSwComponentType and the corresponding BswModuleDescription is provided by the class SwcBswMapping, which also maps the two corresponding InternalBehaviors.

This mechanism is further explained in [6, TPS BSW Module Description Template].⌋

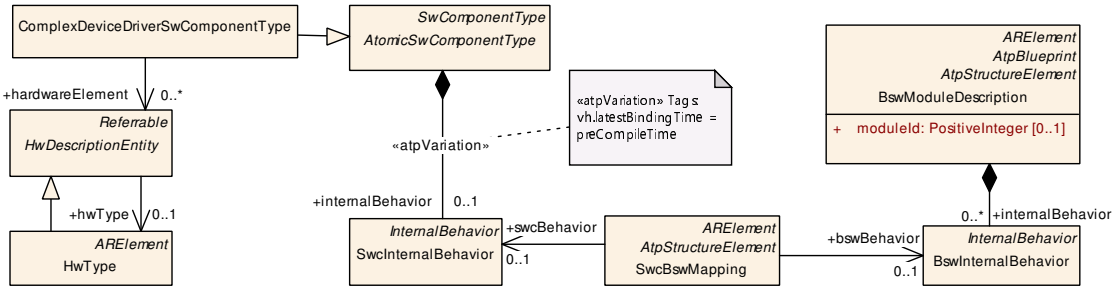

Figure 10.8: ComplexDeviceDriverSwComponentType

[constr_1979] Existence of the reference SwcBswMapping.bswBehavior

Imposition time: CP: IT_RteGen

⌈For each SwcBswMapping, the reference to BswInternalBehavior in the role bswBehavior shall exist.⌋

[constr_1980] Existence of the reference SwcBswMapping.swcBehavior

Imposition time: CP: IT_RteGen

⌈For each SwcBswMapping, the reference to BswInternalBehavior in the role swcBehavior shall exist.⌋

Class	**BswInternalBehavior**			
Note	Specifies the behavior of a BSW module or a BSW cluster w.r.t. the code entities visible by the BSW Scheduler. It is possible to have several different BswInternalBehaviors referring to the same BswModule Description.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *InternalBehavior*, *Multilanguage Referrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, BswModuleDescription.internalBehavior			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
arTypedPer Instance Memory	VariableDataPrototype	*	aggr	Defines an AUTOSAR typed memory-block that needs to be available for each instance of the Basic Software Module. The aggregation of arTypedPerInstanceMemory is subject to variability with the purpose to support variability in the Basic Software Module's implementations. Typically different algorithms in the implementation are requiring different number of memory objects. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=arTypedPerInstanceMemory, arTypedPer InstanceMemory.shortName, arTypedPerInstance Memory.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

△

Class	**BswInternalBehavior**			
bswPerInstance MemoryPolicy	BswPerInstance MemoryPolicy	*	aggr	Policy for a arTypedPerInstanceMemory The policy selects the options of the Schedule Manager API generation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=bswPerInstanceMemoryPolicy, bswPer InstanceMemoryPolicy.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
clientPolicy	BswClientPolicy	*	aggr	Policy for a requiredClientServerEntry. The policy selects the options of the Schedule Manager API generation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=clientPolicy, clientPolicy.variationPoint.short Label vh.latestBindingTime=preCompileTime
distinguished Partition	BswDistinguished Partition	*	aggr	Indicates an abstract partition context in which the enclosing BswModuleEntity can be executed. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=distinguishedPartition, distinguished Partition.shortName, distinguishedPartition.variation Point.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=60
entity	BswModuleEntity	*	aggr	A code entity for which the behavior is described **Stereotypes:** atpVariation **Tags:** atp.Splitkey=entity, entity.shortName, entity.variation Point.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=5
event	BswEvent	*	aggr	An event required by this module behavior. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=event, event.shortName, event.variation Point.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=10
exclusiveArea Policy	BswExclusiveArea Policy	*	aggr	Policy for an ExclusiveArea in this BswInternalBehavior. The policy selects the options of the Schedule Manager API generation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=exclusiveAreaPolicy, exclusiveArea Policy.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
includedData TypeSet	IncludedDataTypeSet	*	aggr	The includedDataTypeSet is used by a basic software module for its implementation. **Tags:** atp.Splitkey=includedDataTypeSet
includedMode Declaration GroupSet	IncludedMode DeclarationGroupSet	*	aggr	This aggregation represents the included Mode DeclarationGroups **Tags:** atp.Splitkey=includedModeDeclarationGroupSet

▽

△

Class	**BswInternalBehavior**			
internal TriggeringPoint	BswInternalTriggering Point	*	aggr	An internal triggering point. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=internalTriggeringPoint, internalTriggering Point.shortName, internalTriggeringPoint.variation Point.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=2 This Attribute is only used by the AUTOSAR Classic Platform.
internal TriggeringPoint Policy	BswInternalTriggering PointPolicy	*	aggr	Policy for an internalTriggeringPoint in this BswInternal Behavior.. The policy selects the options of the Schedule Manager API generation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=internalTriggeringPointPolicy, internal TriggeringPointPolicy.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
modeReceiver Policy	BswModeReceiver Policy	*	aggr	Implementation policy for the reception of mode switches. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=modeReceiverPolicy, modeReceiver Policy.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=25
modeSender Policy	BswModeSenderPolicy	*	aggr	Implementation policy for providing a mode group. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=modeSenderPolicy, modeSender Policy.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=20
parameterPolicy	BswParameterPolicy	*	aggr	Policy for a perInstanceParameter in this BswInternal Behavior. The policy selects the options of the Schedule Manager API generation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=parameterPolicy, parameterPolicy.variation Point.shortLabel vh.latestBindingTime=preCompileTime
perInstance Parameter	ParameterData Prototype	*	aggr	Describes a read only memory object containing characteristic value(s) needed by this BswInternal Behavior. The role name perInstanceParameter is chosen in analogy to the similar role in the context of SwcInternal Behavior. In contrast to constantMemory, this object is not allocated locally by the module's code, but by the BSW Scheduler and it is accessed from the BSW module via the BSW Scheduler API. The main use case is the support of software emulation of calibration data. The aggregation is subject to variability with the purpose to support implementation variants. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=perInstanceParameter, perInstance ▽

▽

△

Class	**BswInternalBehavior**			
				△ Parameter.shortName, perInstanceParameter.variation Point.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=45
receptionPolicy	BswDataReception Policy	*	aggr	Data reception policy for inter-partition and/or inter-core communication. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=receptionPolicy, receptionPolicy.variation Point.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=55
releasedTrigger Policy	BswReleasedTrigger Policy	*	aggr	Policy for a releasedTrigger. The policy selects the options of the Schedule Manager API generation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=releasedTriggerPolicy, releasedTrigger Policy.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
schedulerName Prefix	BswSchedulerName Prefix	*	aggr	Optional definition of one or more prefixes to be used for the BswScheduler. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=schedulerNamePrefix, schedulerName Prefix.shortName, schedulerNamePrefix.variation Point.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=50
sendPolicy	BswDataSendPolicy	*	aggr	Policy for a providedData. The policy selects the options of the Schedule Manager API generation. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=sendPolicy, sendPolicy.variationPoint.short Label vh.latestBindingTime=preCompileTime
service Dependency	BswService Dependency	*	aggr	Defines the requirements on AUTOSAR Services for a particular item. The aggregation is subject to variability with the purpose to support the conditional existence of ServiceNeeds. The aggregation is splitable in order to support that ServiceNeeds might be provided in later development steps. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=serviceDependency, service Dependency.ident.shortName, service Dependency.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=40

▽

△

Class	**BswInternalBehavior**			
triggerDirect Implementation	BswTriggerDirect Implementation	*	aggr	Specifies a trigger to be directly implemented via OS calls. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=triggerDirectImplementation, triggerDirect Implementation.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=15
variationPoint Proxy	VariationPointProxy	*	aggr	Proxy of a variation points in the C/C++ implementation. **Tags:** atp.Splitkey=variationPointProxy, variationPoint Proxy.shortName

Table 10.4: BswInternalBehavior

11 Services

11.1 Overview: Generation of Service-related Model Elements

This chapter covers the description and handling of AUTOSAR Service configuration.

[TPS_SWCT_01397] Hybrid concept between Basic Software Modules and a SwComponentType ⌈AUTOSAR Services can be seen as a hybrid concept between Basic Software Modules and a SwComponentType. The AUTOSAR Services provide access to low-level and ECU-wide "standard functionalities" commonly referred to as "service".

AtomicSwComponentTypes that require AUTOSAR Services use Standardized AUTOSAR Interfaces to communicate with them. The connection of PortPrototypes of the ServiceSwComponentTypes and PortPrototypes of the AtomicSwComponentTypes implements several communication patterns.⌋

[TPS_SWCT_01398] Communication patterns for AUTOSAR services ⌈

I	II	III	IV
A	1..n	PPort:RPort	Distribution of data or modes to *n* software-components, e.g. used for ECU mode.
A*	1..n	RPort:PPort	Currently not used, not supported for client-server communication.
A**	1..n	PRPort:RPort	Distribution of data or modes to n software-components, e.g. used for ECU mode.
B	1..1	PPort:RPort	Software-component acts as Server, used for so called "call-backs".
B	1..1	RPort:PPort	Service acts as Server, typical Service usage.
C*	n..1	PPort:RPort	Conceptually not used to support index abstraction via PortDefinedArgumentValues.
C	n..1	RPort:PPort	Software-component acts as Server, used for so called "call-backs" invoked by more than one Service.
D	1..1	PR-Port:PRPort	I/O control data.

⌋

Legend for Table inside [TPS_SWCT_01398]

I Pattern name

II Communication pattern (client/server, sender/receiver)

III Kind of PortPrototype at service: software-component

IV Description, use case

[TPS_SWCT_01403] Impact of AUTOSAR services on the methodology ⌈Due to this special nature, such AUTOSAR Services need to be handled with particular attention in the [4, TR Methodology]. That is, a number of elements need to be generated during ECU integration.⌋

The following list of paragraphs presents a short overview of the steps required for the configuration of AUTOSAR Services.

Most of these steps are performed by tools. The model elements created in these steps are specific to Service configuration and are not to be modeled manually within AUTOSAR authoring tools.

In particular, the following requirements apply:

- **[TPS_SWCT_01399] Dependency is modeled by aggregating required and provided PortPrototypes** ⌈The dependency of an AtomicSwComponentType (or more precisely, one of its non-abstract derived meta-classes) on an AUTOSAR Service is modeled by aggregating required and provided PortPrototypes.⌋

  [TPS_SWCT_01400] PortInterface selected from the set of standardized Service Interfaces ⌈The PortInterface being implemented by the PortPrototypes needs to be one of a number of standardized Service Interfaces which is indicated by having its isService attribute set to true and is (via several levels of indirection) finally referenced by ServiceNeeds.⌋

  Additionally, the software-components and Basic Software Modules shall specify ServiceNeeds containing further input information for the later Service configuration step.

- **[TPS_SWCT_01401] Form a top-level RootSwCompositionPrototype** ⌈When defining a software system, the AtomicSwComponentType is used in the form of SwComponentPrototypes within a CompositionSwComponentType.

  In this step, the non-service ports of all required interfaces are connected using AssemblySwConnectors and DelegationSwConnectors to eventually form a top-level RootSwCompositionPrototype that can be referenced in an AUTOSAR System.⌋

- **[TPS_SWCT_01402] Mapping of all AtomicSwComponentType instances to EcuInstances** ⌈In System Configuration Phase, the mapping of all AtomicSwComponentType instances to EcuInstances is performed (for the specification of EcuInstance see [9, TPS System Template]).

  The ServiceNeeds may be used by tools to check for available resources on the targeted ECUs.⌋

- **[TPS_SWCT_01404] Creation of the Ecu Extract** ⌈The ECU Extract is derived from the System Configuration for each ECU. As explained in the [9, TPS System Template], this contains an ECU-centric view of the system description.

  This includes a reduced version of the system's RootSwCompositionPrototype where SwComponentPrototypes not mapped to the ECU are left out and all Compositions are stripped off, so that in the ECU Extract only

one instance of CompositionSwComponentType remains, which aggregates all SwComponentPrototypes on the ECU in a flat manner.⌋

- **[TPS_SWCT_01405] Creation of the ServiceSwComponentTypes** ⌈In ECU Configuration, for each Service required on the ECU exactly one ServiceSwComponentType is created based on the needs from the AtomicSwComponentTypes: An adequate number of PortPrototypes are created on this ServiceSwComponentType for each needed port at the AtomicSwComponentType.

  Thereby, the specified communication pattern A, B, C or D for a specific kind of ServicePort has to be considered.⌋

  See also Chapter 11.2 and [TPS_SWCT_01398].

- **[TPS_SWCT_01406] Creation of SwComponentPrototype typed by a ServiceSwComponentType** ⌈Per Service exactly one SwComponentPrototype typed by a ServiceSwComponentType is created based on the ServiceSwComponentType. Additionally, connectors are constructed that connect the pairs of PortPrototypes belonging to the SwComponentPrototypes requiring services and those belonging to the actual services.⌋

- **[TPS_SWCT_01407] Creation of InternalBehavior typed by a ServiceSwComponentType** ⌈For each ServiceSwComponentType an SwcInternalBehavior is created or extended providing the information about PortDefinedArgumentValues, RunnableEntitys and RTEEvents necessary for RTE generation.⌋

  Furthermore, detailing of the service ports by filling in these PortDefinedArgumentValues is also performed in ECU Configuration phase. See also Chapter 7.6.3.

- **[TPS_SWCT_01408] Creation of SwcBswMapping** ⌈For the RTE module configuration an implementation of the AUTOSAR Service described by a Basic Software Module Description needs to be selected. The SwcBswMapping to the corresponding SwComponentPrototype needs to be created accordingly.

  For each SwcInternalBehavior one SwcImplementation is created. The information for SwcImplementation should be generated based on the available information of BswImplementation[1].⌋

- **[TPS_SWCT_01409] Update of PortDefinedArgumentValues** ⌈Depending on the configuration of the Service BSW it might be necessary to update

[1]This step generally does not require copying any attributes or elements aggregated in BswImplementation into the generated instance of SwcImplementation since the only mandatory information for the RTE configuration is the reference from SwcImplementation to the selected SwcInternalBehavior.

the ValueSpecifications belonging to the PortDefinedArgumentValues generated in a previous step.⌋

Class	**SwcBswMapping**			
Note	Maps an SwcInternalBehavior to an BswInternalBehavior. This is required to coordinate the API generation and the scheduling for AUTOSAR Service Components, ECU Abstraction Components and Complex Driver Components by the RTE and the BSW scheduling mechanisms. **Tags:** atp.recommendedPackage=SwcBswMappings This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARElement*, *ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element, *AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
bswBehavior	BswInternalBehavior	0..1	ref	The mapped BswInternalBehavior **Tags:** atp.Splitkey=bswBehavior
runnable Mapping	SwcBswRunnable Mapping	*	aggr	A mapping between a pair of SWC and BSW runnables. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=runnableMapping, runnable Mapping.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
swcBehavior	SwcInternalBehavior	0..1	ref	The mapped SwcInternalBehavior. **Tags:** atp.Splitkey=swcBehavior
synchronized ModeGroup	SwcBswSynchronized ModeGroupPrototype	*	aggr	A pair of SWC and BSW mode group prototypes to be synchronized by the scheduler. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=synchronizedModeGroup, synchronized ModeGroup.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
synchronized Trigger	SwcBswSynchronized Trigger	*	aggr	A pair of SWC and BSW Triggers to be synchronized by the scheduler. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=synchronizedTrigger, synchronized Trigger.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

Table 11.1: SwcBswMapping

11.2 Service Software Component Type

As mentioned in [TPS_SWCT_01405], AUTOSAR Services are represented by a meta-model class of their own, the ServiceSwComponentType. As can be seen in Figure 11.1, ServiceSwComponentType is a specialization of AtomicSwComponentType.

Like any other SwComponentType, they can aggregate PortPrototypes.

[constr_2019] `ServiceSwComponentType` shall have service ports only

Imposition time: CP: `IT_RteGen`

⌈In the case of `ServiceSwComponentType`, all aggregated `PortPrototype`s need to have an ≪`isOfType`≫ relationship to a `PortInterface` which has its `isService` attribute set to `true`.

The exceptions described in

- [TPS_SWCT_01572],
- [TPS_SWCT_01579],
- [TPS_SWCT_01831] and
- [TPS_SWCT_01580]

apply.⌋

[TPS_SWCT_01579] `Dcm` can directly access `SenderReceiverInterface.dataElement`s, `NvDataInterface.nvData`s, or `ParameterInterface.parameter`s in `AbstractProvidedPortPrototype` ⌈An exception to the rule described in [constr_2019] applies: the `Dcm` can directly access `SenderReceiverInterface.dataElement`s, `NvDataInterface.nvData`s, or `ParameterInterface.parameter`s in `AbstractProvidedPortPrototype`s (`PPortPrototype` in the case of `ParameterInterface.parameter`) as long as [constr_1071] is fulfilled.

For this purpose, the `ServiceSwComponentType` that represents the `Dcm` functionality can have `AbstractRequiredPortPrototype`s typed by a compatible `SenderReceiverInterface` that may set attribute `isService` to `false`.⌋

The inclusion of `ParameterInterface.parameter`s in [TPS_SWCT_01579] is done under the assumption that the `ServiceSwComponentType` that represents the `Dcm` would connect to a `PPortPrototype` owned by a `ParameterSwComponentType`.

[TPS_SWCT_01831] `Dcm` can directly access `SenderReceiverInterface.dataElement`s or `NvDataInterface.nvData`s in `AbstractRequiredPortPrototype`s ⌈An exception to the rule described in [constr_2019] applies: the `Dcm` can directly access `SenderReceiverInterface.dataElement`s or `NvDataInterface.nvData`s in `AbstractRequiredPortPrototype`s as long as [constr_1071] is fulfilled.

For this purpose, the `ServiceSwComponentType` that represents the `Dcm` functionality can have `AbstractProvidedPortPrototype`s typed by a compatible `SenderReceiverInterface` that may set attribute `isService` to `false`.⌋

The exclusion of ParameterInterface.parameters from [TPS_SWCT_01831] is a direct consequence of [constr_1137], i.e. the ServiceSwComponentType that represents the Dcm is not allowed to expose a PPortPrototype typed by a ParameterInterface.

[TPS_SWCT_01580] Dem can directly access SenderReceiverInterface.dataElements, NvDataInterface.nvDatas, or ParameterInterface.parameters in PPortPrototypes ⌈An exception to the rule described in [constr_2019] applies: the Dem can directly access SenderReceiverInterface.dataElements, NvDataInterface.nvDatas, or ParameterInterface.parameters in AbstractProvidedPortPrototypes (PPortPrototype in the case of ParameterInterface.parameter) as long as [constr_1071] is fulfilled.

For this purpose, the ServiceSwComponentType that represents the Dem functionality can have RPortPrototypes typed by a compatible SenderReceiverInterface that may set attribute isService to false.⌋

The inclusion of ParameterInterface.parameters in [TPS_SWCT_01580] is done under the assumption that the ServiceSwComponentType that represents the Dem would connect to a PPortPrototype owned by a ParameterSwComponentType.

[TPS_SWCT_01411] Use cases for a ServiceSwComponentType to express ServiceNeeds ⌈There are valid use cases for a ServiceSwComponentType to express ServiceNeeds[2]. This leads to a situation where ServiceSwComponentTypes are iteratively created in response to ServiceNeeds expressed by other ServiceSwComponentTypes. For more details on how this shall be implemented into the workflow, refer to the [4, TR Methodology].⌋

Similar to an EcuAbstractionSwComponentType and a ComplexDeviceDriverSwComponentType, the ServiceSwComponentType represents a hybrid concept between Software Component and Basic Software Module. The BSW part is described by means of the [6, TPS BSW Module Description Template].

The mapping between the ServiceSwComponentType and the corresponding BswModuleDescription is provided by the class SwcBswMapping which also maps the two corresponding InternalBehaviors (see [TPS_SWCT_01408]). This mechanism is further explained in the [6, TPS BSW Module Description Template].

[TPS_SWCT_01412] ServiceSwComponentType shall be added in ECU Configuration phase ⌈ServiceSwComponentType shall not be used when modeling application software using CompositionSwComponentType; they are only added in ECU Configuration phase where exactly one SwComponentPrototype per ServiceSwComponentType per ECU is added to the ECU Description model.

[2]Thereby, the previously existing constraint 1127 becomes invalid.

The Base ECU Config Generator tool shall ensure that, for all service PortPrototypes of SwComponentPrototypes mapped to the ECU, service PortPrototypes at the appropriate ServiceSwComponentTypes are created.

SwComponentPrototypes typed by ServiceSwComponentTypes shall be created as direct components within the CompositionSwComponentType that is referenced in the role System.rootSoftwareComposition.softwareComposition.

If pattern A is applied for each different type of service PortPrototype, one PortPrototype on the ServiceSwComponentType is created.

If pattern B and C is applied for each service PortPrototype of a SwComponentPrototype, one PortPrototype on the ServiceSwComponentType is created.

More explicitly, all instances of AtomicSwComponentType need to be checked for PortPrototypes typed by PortInterfaces where attribute isService is set to true and which are referenced by an SwcServiceDependency.

For each of these PortInterface instances belonging to the AUTOSAR Service to be configured, one PortPrototype implementing the same or a compatible PortInterface needs to be created on the ServiceSwComponentType.⌋

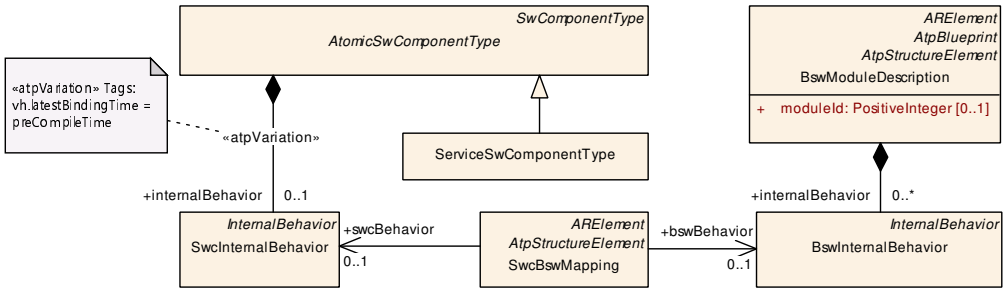

Figure 11.1: ServiceSwComponentType

Class	**ServiceSwComponentType**			
Note	ServiceSwComponentType is used for configuring services for a given ECU. Instances of this class are only to be created in ECU Configuration phase for the specific purpose of the service configuration. **Tags:** atp.recommendedPackage=SwComponentTypes			
Base	*ARElement*, *ARObject*, *AtomicSwComponentType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *Collectable Element*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *SwComponentType*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 11.2: ServiceSwComponentType

In the process of creating PortPrototypes the specified communication pattern A, B, or C for a specific kind of service port has to be considered, see [TPS_SWCT_01398].

[TPS_SWCT_02500] Roles on application/service components need to match ⌈The roles of the PortPrototypes (required/provided) on the Application Component and the Service Component side need to match. For example an RPortPrototype

attached to an application AtomicSwComponentType matches a PPortPrototype attached to a ServiceSwComponentType.⌋

11.3 Service Proxy Component Type

[TPS_SWCT_01413] Local communication with services ⌈Application software-components may communicate with an instance of a ServiceSwComponentType only locally on an ECU.⌋

[TPS_SWCT_01414] Mode manager needs to communicate with application software-components located on other ECUs ⌈However, there are use cases for the application and vehicle mode management, where a mode manager (namely the [19, SWS BSW Mode Manager]) is part of the basic software but conceptually still needs to communicate with application software-components located on other ECUs.

To make this communication possible, the ServiceProxySwComponentType is used.

For the application software and the RTE it behaves like a "normal" AtomicSwComponentType, but it is a proxy for an AUTOSAR Service.⌋

The concept of mode requests across ECU boundaries is exemplified in Figure 11.2.

[TPS_SWCT_01415] Interfaces of ServiceProxySwComponentType ⌈On the one hand, it has to communicate over service ports with the ECU-local ServiceSwComponentType it represents. On the other hand, it has to offer the corresponding PortPrototypes to the ApplicationSwComponentTypes.⌋

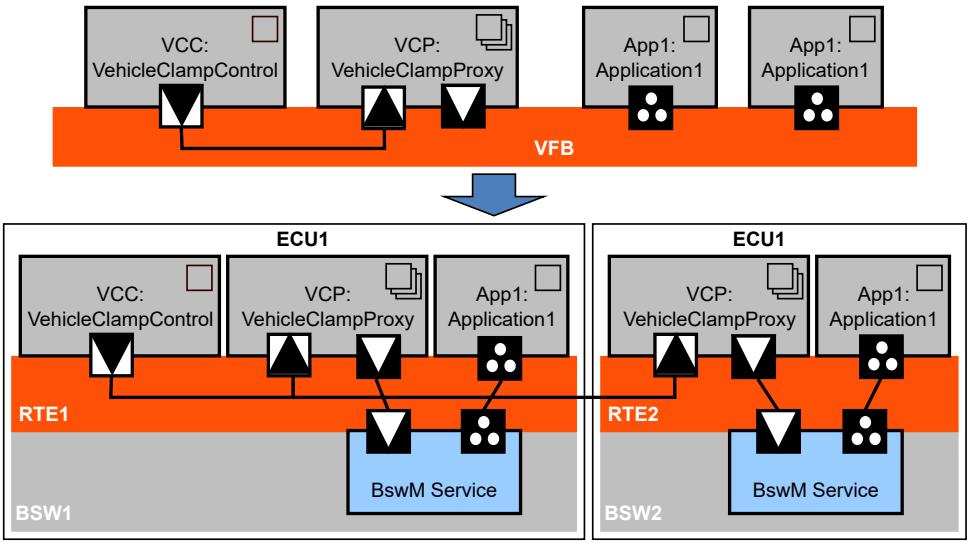

Figure 11.2: Mode request over the network, see [3, TR Virtual Function Bus]

In the meta-model, the ServiceProxySwComponentType does not differ from an ApplicationSwComponentType except by its class. It is up to the implementer to meet the restrictions imposed by the semantics as a proxy.

[TPS_SWCT_01416] Difference between a ServiceProxySwComponentType and an ApplicationSwComponentType ⌈The main difference between a ServiceProxySwComponentType and an ApplicationSwComponentType is on system level:

A prototype of a ServiceProxySwComponentType can be mapped to several ECUs even if it appears only once in the VFB system, because such a prototype is required on each ECU, where it has to address a local ServiceSwComponentType.

As a result of this, a ServiceProxySwComponentType can only receive but not send signals over the network. More details are explained in the class table below.⌋

[constr_2016] Connections between SwComponentPrototypes of type ServiceProxySwComponentType

Imposition time: CP: IT_RteGen

⌈A connection between PortPrototypes belonging to SwComponentPrototypes where both are typed by ServiceProxySwComponentType is not permitted.⌋

Class	**ServiceProxySwComponentType**			
Note	This class provides the ability to express a software-component which provides access to an internal service for remote ECUs. It acts as a proxy for the service providing access to the service. An important use case is the request of vehicle mode switches: Such requests can be communicated via sender-receiver interfaces across ECU boundaries, but the mode manager being responsible to perform the mode switches is an AUTOSAR Service which is located in the Basic Software and is not visible in the VFB view. To handle this situation, a ServiceProxySwComponentType will act as proxy for the mode manager. It will have R-Ports to be connected with the mode requestors on VFB level and Service-Ports to be connected with the local mode manager at ECU integration time. Apart from the semantics, a ServiceProxySwComponentType has these specific properties: • A prototype of it can be mapped to more than one ECUs in the system description. • Exactly one additional instance of it will be created in the ECU-Extract per ECU to which the prototype has been mapped. • For remote communication, it can have only R-Ports with sender-receiver interfaces and 1:n semantics. • There shall be no connectors between two prototypes of any ServiceProxySwComponentType. **Tags:** atp.recommendedPackage=SwComponentTypes			
Base	*ARElement*, *ARObject*, *AtomicSwComponentType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *Collectable Element*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *SwComponentType*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 11.3: ServiceProxySwComponentType

[constr_2017] Ports of ServiceProxySwComponentTypes

Imposition time: CP: IT_RteGen

⌈ServiceProxySwComponentType is only permitted to define

- RPortPrototypes that are typed by SenderReceiverInterface or

- PortPrototypes that are typed by a PortInterface where the isService attribute is set to true.

⌋

[constr_2018] Supported remote communication of a ServiceProxySwComponentType

Imposition time: CP: IT_RteGen

⌈For remote communication, ServiceProxySwComponentType can have only RPortPrototypes typed by SenderReceiverInterfaces in a 1:n communication scenario.⌋

11.4 Non-Volatile Memory

11.4.1 Introduction

The AUTOSAR Architecture defines two alternatives for how a software-component can access non-volatile memory.

- The first option is that the software-component defines in its InternalBehavior a PerInstanceMemory and a NvBlockNeeds referring to the PerInstanceMemory via a RoleBasedDataAssignment.

  In this case the NVRAM Block is exclusively accessed by this software-component and the [36, SWS NVRAM Manager]. Therefore, the *nv data* is encapsulated inside the software-component and cannot be accessed directly by other software-components.

  The PerInstanceMemory can be typed with AutosarDataTypes in the case of arTypedPerInstanceMemory or with C data types in the case of perInstanceMemory. For further information, see Chapter 7.7 and Chapter 13.

- The second option is that the software-component uses communication based on PortPrototypes to access *nv data* provided by a NvBlockSwComponentType.

  In this case it is possible that *nv data* used by different AtomicSwComponentTypes is packed in one larger NVRAM Block to reduce the NVRAM Block management overhead, or that the same *nv data* is used by several software-components with a reduced RAM overhead. The *nv data* of a NvBlockSwComponentType is typed with AutosarDataTypes.

More details on particular scenarios of interacting with the [36, SWS NVRAM Manager] can be found in Chapter 13.2.

11.4.2 NvBlockComponent

[TPS_SWCT_01142] non-volatile data are provided by a specialized AtomicSwComponentType ⌈On the VFB, see [3, TR Virtual Function Bus], the non-volatile data are provided by a specialized AtomicSwComponentType, the NvBlockSwComponentType.

An NvBlockSwComponentType can represent one or more NVRAM Blocks managed by the *NVRAM Manager*. The *nv data* PortPrototypes of the NvBlockSwComponentType are exclusively typed by NvDataInterfaces.⌋

[TPS_SWCT_01143] Non-volatile data represented by an NvBlockSwComponentType can be read and written ⌈The non-volatile data represented by an NvBlockSwComponentType can be read and written. For this purpose, the NvBlockSwComponentType is allowed to have PPortPrototypes and RPortPrototypes.⌋

Additionally, the NvBlockSwComponentType might have client-server PortPrototypes to offer the block-related services, administrative services or notifications.

[constr_2009] Supported kinds of PortPrototypes of a NvBlockSwComponentType

Imposition time: CP: IT_RteGen

⌈With respect to external communication, NvBlockSwComponentType is limited to the definition of the following kinds of PortPrototype:

- PortPrototypes typed by either NvDataInterfaces or ClientServerInterfaces
- RPortPrototypes typed by ModeSwitchInterfaces

⌋

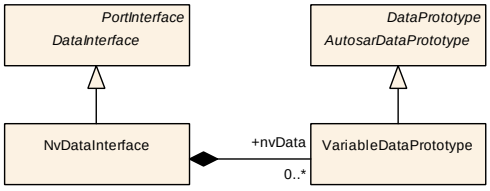

Figure 11.3: NvDataInterface

[constr_2010] Connections between SwComponentPrototypes of type NvBlockSwComponentType

Imposition time: CP: IT_RteGen

⌈The existence of SwConnectors that refer to PortPrototypes belonging to SwComponentPrototypes where both are typed by NvBlockSwComponentType is not permitted.⌋

[constr_10575] No multiple instantiation of NvBlockSwComponentType

Imposition time: CP: IT_RteGen

⌈For each NvBlockSwComponentType, attribute internalBehavior.supports-MultipleInstantiation shall **always** be set to false.⌋

Class	**NvBlockSwComponentType**			
Note	The NvBlockSwComponentType defines non volatile data which data can be shared between Sw ComponentPrototypes. The non volatile data of the NvBlockSwComponentType are accessible via provided and required ports. **Tags:** atp.recommendedPackage=SwComponentTypes This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARElement*, *ARObject*, *AtomicSwComponentType*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *Collectable Element*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *SwComponentType*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
bulkNvData Descriptor	BulkNvDataDescriptor	*	aggr	This aggregation formally defines the bulk Nv Blocks that are provided to the application software by the enclosing NvBlockSwComponentType. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=bulkNvDataDescriptor, bulkNvData Descriptor.shortName, bulkNvDataDescriptor.variation Point.shortLabel vh.latestBindingTime=preCompileTime
nvBlock Descriptor	NvBlockDescriptor	*	aggr	Specification of the properties of exactly one NVRAM Block. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=nvBlockDescriptor, nvBlockDescriptor.short Name, nvBlockDescriptor.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

Table 11.4: NvBlockSwComponentType

Class	**NvDataInterface**			
Note	A non volatile data interface declares a number of VariableDataPrototypes to be exchanged between non volatile block components and atomic software components. **Tags:** atp.recommendedPackage=PortInterfaces			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpType*, *CollectableElement*, *DataInterface*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *PortInterface*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
nvData	VariableDataPrototype	*	aggr	The VariableDataPrototype of this nv data interface. **Tags:** atp.Splitkey=nvData, nvData.shortName

Table 11.5: NvDataInterface

11.4.3 Software-Components using *NVRAM data* of NvBlockComponents

[TPS_SWCT_01141] AtomicSwComponentType may have AbstractRequiredPortPrototypes typed by an NvDataInterface ⌈An AtomicSwComponentType may have AbstractRequiredPortPrototypes typed by an NvDataInterface.

If such an AbstractRequiredPortPrototype remains unconnected, the nvData still needs to have a reasonable value[3].⌋

[constr_2011] Connections between SwComponentPrototypes typed by NvBlockSwComponentType and SwComponentPrototypes typed by other AtomicSwComponentTypes

Imposition time: CP: IT_RteGen

⌈A PortPrototype typed by an NvDataInterface owned by a SwComponentPrototype typed by an NvBlockSwComponentType shall be connected to a PortPrototype typed by **either** an NvDataInterface **or** a SenderReceiverInterface owned by a SwComponentPrototype that is typed by another subclass of AtomicSwComponentType.⌋

There is no valid use case to connect a PortPrototype typed by a ParameterInterface to a PortPrototype typed by an NvDataInterface.

[constr_1148] PortInterfaces of PortPrototypes used to connect to NvBlockSwComponentTypes

Imposition time: CP: IT_RteGen

⌈PortInterfaces of PortPrototypes used to connect to NvBlockSwComponentTypes as well as the PortInterfaces used in the context of NvBlockSwComponentTypes shall **always** set the value of the attribute isService to false.⌋

[constr_1149] PortPrototypes used for NV data management

Imposition time: CP: IT_RteGen

⌈A PortPrototype typed by a ClientServerInterface used for NV data management, i.e. the interaction of ApplicationSwComponentTypes with NvBlockSwComponentTypes, shall be typed by ClientServerInterfaces that are compatible to the particular ClientServerInterfaces derived from [29, MOD General Blueprints]. [constr_1148] applies.

This rule shall be imposed.⌋

[3] It is assumed that only a subset of meta-classes that inherit from AtomicSwComponentType will apply for the definition of initial values for nvData. Most likely, the ApplicationSwComponentType and the SensorActuatorSwComponentType will be candidates for using this feature, but it will not be reasonable for e.g. NvBlockSwComponentType.

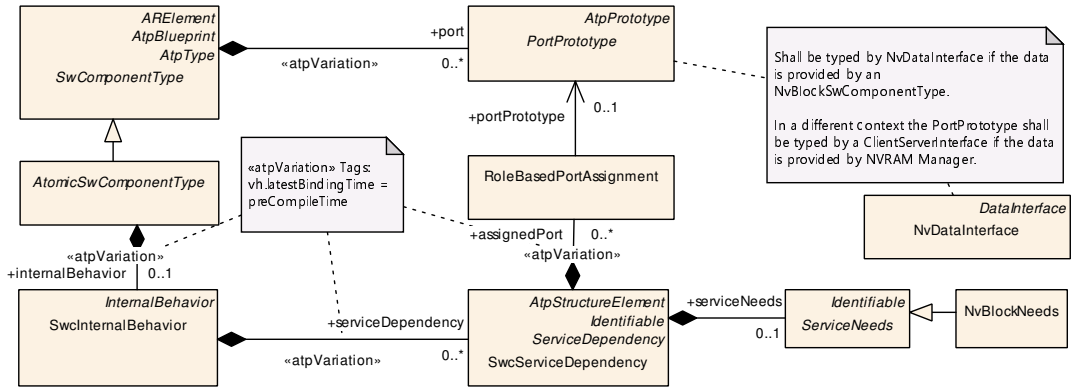

Figure 11.4: `NvBlockNeeds` for *nv data* `PortPrototype`s

For details, see Chapter 6.4.4.

Note: In the case of *nv data* which is read and written and shared between several `SwComponentPrototype`s, the `NvBlockSwComponentType` establishes a communication that is not directly obvious.

Nevertheless, this is intentionally supported, and it is the responsibility of the VFB designer to ensure that only *nv data* is shared where the functionality of the software-components is not impaired.

To help a VFB designer determine which *nv data* can potentially be mapped into the same `NVRAM Block`, a software-component can specify further attributes for its *nv data* `PortPrototype`s by the definition of `SwcServiceDependency`(s) with `NvBlockNeeds`.

In this case the role attribute of the `assignedPort` has to be set to the value `NvDataPort`. This aspect is also explained in Chapter 13.2.4.

In contrast to the `NvBlockNeeds` that describe the expected configuration of a whole `NVRAM Block`, the `NvBlockNeeds` for *nv data* `PortPrototype`s defines only the attributes which are required from the point of view of a software-component to ensure its functionality.

This means that an empty attribute has the semantics of “don’t care”.

Furthermore, the VFB designer has the freedom to specify how the requested `NVRAM Block` attributes are fulfilled by the created `NvBlockDescriptor`.

For instance, *nv data* with different `writingFrequency` might be mapped to one `NVRAM Block`. In this case the `NvBlockNeeds` of the `NvBlockDescriptor` has to indicate the worst case, which is the higher frequency.

With respect to the completeness of [TPS_SWCT_01675] (which intentionally does not contain a remark regarding the value of `cyclicWritingPeriod`), according to [TPS_SWCT_01585] the value of `NvBlockDescriptor.nvBlockNeeds.cyclicWritingPeriod` shall be ignored in favor of `NvBlockDescriptor.timingEvent.period`.

However, [TPS_SWCT_01675] does not represent a binding constraint.

[TPS_SWCT_01675] Recommendations for attributes of NvBlockNeeds or for NvBlockDescriptor ⌈

Attribute of NvBlockNeeds	NvBlockNeeds of different *nv data* PortPrototypes of software-components	NvBlockNeeds of NvBlockDescriptor
readonly	Recommended to match for all connected *nv data* PortPrototypes if specified.	Recommended to be identical as requested by *nv data* PortPrototypes.
reliability	Can be different.	Recommended to be set to the highest reliability class request by any mapped *nv data* PortPrototypes.
resistantToChangedSw	Recommended to match for all connected *nv data* PortPrototypes if specified.	Recommended to be identical as requested by *nv data* PortPrototypes.
restoreAtStart	Recommended to match for all connected *nv data* PortPrototypes if specified.	Recommended to be identical as requested by *nv data* PortPrototypes.
storeAtShutdown	Recommended to match for all connected *nv data* PortPrototypes if specified.	Recommended to be identical as requested by *nv data* PortPrototypes.
writeOnlyOnce	Recommended to match for all connected *nv data* PortPrototypes if specified.	Recommended to be identical as requested by *nv data* PortPrototypes.
writingFrequency	Can be different.	Recommended to be set to the highest requested frequency of the mapped *nv data* PortPrototypes.
writingPriority	Can be different.	Recommended to be set to the highest requested priority of the mapped *nv data* PortPrototypes.
writeVerification	Can be different.	Recommended to set to true if any of the *nv data* PortPrototypes requests a write verification.
calcRamBlockCrc	Can be different.	Recommended to set to true if any of the *nv data* PortPrototypes requests a CRC calculation.
checkStaticBlockId	Can be different.	Recommended to set to true if any of the *nv data* PortPrototypes requests a check of the static block ID.
ramBlockStatusControl	Can be different.	Recommended to set to RamBlockStatusControlEnum.api if any of the *nv data* PortPrototypes requests a use of the API for accessing the block.
storeCyclic	Can be different.	Recommended to set to true if any of the *nv data* PortPrototypes requests cyclic writing.
storeEmergency	Can be different.	Recommended to set to true if any of the *nv data* PortPrototypes requests emergency writing.
storeImmediate	Can be different.	Recommended to set to true if any of the *nv data* PortPrototypes requests immediate writing.
storeOnChange	Can be different.	Recommended to set to true if any of the *nv data* PortPrototypes requests on-change writing.
selectBlockForFirstInitAll	Recommended to match for all connected *nv data* PortPrototypes if specified.	Recommended to be identical as requested by *nv data* PortPrototypes.

⌋

Therefore, the missing statement for cyclicWritingPeriod in the spirit of [TPS_SWCT_01675] is that the values of SwcServiceDependency.serviceNeeds.cyclicWritingPeriod can be different from the value of NvBlockDescriptor.timingEvent.period.

It is recommended that the value of NvBlockDescriptor.timingEvent.period should be set to the lowest requested time value of the mapped *nv data* PortPrototypes (implemented by SwcServiceDependency.serviceNeeds.cyclicWritingPeriod).

11.4.4 Software-Components connected to NvBlockComponents

Restrictions apply to the creation of AssemblySwConnectors between NvBlockSwComponentType and other AtomicSwComponentTypes.

In particular, ApplicationSwComponentTypes communicating with each other use buffers generated and controlled by the RTE to exchange data. An NvBlockSwComponentType, however, maintains its own buffer in the form of the ramBlock.

Thus, an ApplicationSwComponentType that reads a dataElement that may be provided by either another ApplicationSwComponentType or an NvBlockSwComponentType cannot access the dataElement because it cannot decide whether it needs to access the buffer provided by the RTE or the ramBlock.

Therefore, such scenarios are considered invalid by the AUTOSAR standard.

[constr_1417] Invalid connection between NvBlockSwComponentType and other AtomicSwComponentType (I)

Imposition time: CP: IT_RteGen

⌈A configuration where an RPortPrototype owned by an AtomicSwComponentType is simultaneously and directly connected to AbstractProvidedPortPrototypes of a collection of AtomicSwComponentTypes where at least one in the collection is an NvBlockSwComponentType for a matching set of dataElements in all these PortPrototypes shall be considered invalid.⌋

The scenario covered by [constr_1417] is depicted in Figure B.45 and Figure B.46.

[constr_1418] Invalid connection between NvBlockSwComponentType and other AtomicSwComponentType (II)

Imposition time: CP: IT_RteGen

⌈A configuration where a PRPortPrototype owned by an AtomicSwComponentType is connected to a PPortPrototype owned by an NvBlockSwComponentType for a matching set of dataElements in all these PortPrototypes shall be considered invalid.⌋

The scenario covered by [constr_1418] is depicted in Figure B.47.

The constraints [constr_1417] and [constr_1418] follow up on the general regulation for the creation of SwConnectors between kinds of PortPrototype as described by [constr_1202]. That is, [constr_1202] is agnostic of the specific SwComponentTypes that own the respective PortPrototypes.

In contrast, [constr_1417] and [constr_1418] add some information about the nature of the SwComponentTypes that own the respective PortPrototypes to the overall picture and therefore refine (rather than contradict) the regulations imposed by [constr_1202].

11.4.5 NvBlockDescriptor

[TPS_SWCT_01144] NvBlockDescriptor specifies the properties of exactly one NVRAM Block ⌈A NvBlockDescriptor specifies the properties of exactly one NVRAM Block of a NvBlockSwComponentType.

It contains information about the requested NVRAM Block configuration of the *NVRAM Manager*, ramBlock and romBlock, the mapping between the PortPrototypes of the NvBlockSwComponentType and the data inside a ramBlock as well as the role of the clientServerPorts expressed in terms of RoleBasedPortAssignment.⌋

Class	**NvBlockDescriptor**			
Note	Specifies the properties of exactly one NVRAM Block. This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, NvBlockSwComponentType.nvBlockDescriptor			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
clientServerPort	RoleBasedPort Assignment	*	aggr	The RoleBasedPortAssignement defines which client server port of the NvBlockSwComponentType serves for which kind of service or notification. In case of notifications one common callback function is provided by the RTE for each individual kind of notification defined by the "role". The aggregation of RoleBasedPortAssignment is subject to variability with the purpose to support the conditional existence of ports. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=clientServerPort, clientServerPort.variation Point.shortLabel vh.latestBindingTime=preCompileTime
constantValue Mapping	ConstantSpecification MappingSet	*	ref	Reference to the ConstantSpecificationMapping to be applied for the particular NVRAM Block **Tags:** atp.Splitkey=constantValueMapping
dataType Mapping	DataTypeMappingSet	*	ref	Reference to the DataTypeMapping to be applied for the particular NVRAM Block. **Tags:** atp.Splitkey=dataTypeMapping

▽

△

Class	**NvBlockDescriptor**			
instantiation DataDefProps	InstantiationDataDefProps	*	aggr	The purpose of InstantiationDataDefProps are the refinement of some data def properties of individual instantiations within the context of a NvBlockSwComponentType. The aggregation of InstantiationDataDefProps is subject to variability with the purpose to support the conditional existence of ports, component internal memory objects and those attributes. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=instantiationDataDefProps, instantiationDataDefProps.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
modeSwitchEventTriggeredActivity	ModeSwitchEventTriggeredActivity	*	aggr	This represents the collection of ModeSwitchEventTriggeredActivities related to the enclosing NvBlockDescriptor. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=modeSwitchEventTriggeredActivity, modeSwitchEventTriggeredActivity.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
nvBlockDataMapping	NvBlockDataMapping	*	aggr	Defines the mapping between the VariableDataPrototypes in the NvBlockComponents ports and the VariableDataPrototypes of the RAM Block. The aggregation of NvBlockDataMapping is subject to variability with the purpose to support the conditional existence of nv data ports. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=nvBlockDataMapping, nvBlockDataMapping.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
nvBlockNeeds	NvBlockNeeds	0..1	aggr	Specifies the abstract needs on the configuration of the NVRAM Manager for the single NVRAM Block described by this NvBlockDescriptor. In addition, it may define requirements for writing strategies in an implementation of an NvBlockSwComponentType by the RTE. Please note that the attributes nDataSets and nRomBlocks are not relevant for this aggregation because the RTE will allocate just one block anyway. In a different context, however, they do make sense. **Tags:** atp.Splitkey=nvBlockNeeds, nvBlockNeeds.shortName
ramBlock	VariableDataPrototype	0..1	aggr	Defines the RAM Block of the NVRAM Block provided by NvBlockSwComponentType. **Tags:** atp.Splitkey=ramBlock, ramBlock.shortName
romBlock	ParameterDataPrototype	0..1	aggr	Defines the ROM Block of the NVRAM Block provided by NvBlockSwComponentType. **Tags:** atp.Splitkey=romBlock, romBlock.shortName
supportDirtyFlag	Boolean	0..1	attr	Specifies whether calling of NvM functions for writing and/or status control of potentially modified RAM Blocks to NV memory shall be controlled by the RTE.

▽

△

Class	NvBlockDescriptor			
timingEvent	TimingEvent	0..1	ref	this reference can be taken to identify the TimingEvent to be used by the RTE for implementing a cyclic writing strategy for this block **Tags:** atp.Splitkey=timingEvent
writingStrategy	RoleBasedData Assignment	*	aggr	This attribute allows for assigning a specific writing strategy for an incoming AutosarDataPrototype. **Tags:** atp.Splitkey=writingStrategy

Table 11.6: NvBlockDescriptor

[constr_1981] Existence of attribute NvBlockDescriptor.nvBlockNeeds

Imposition time: CP: IT_RteGen

⌈For each NvBlockDescriptor, attribute nvBlockNeeds shall exist.⌋

For more explanation of the semantics of the attribute NvBlock-Descriptor.supportDirtyFlag, refer to the [2, SWS RTE].

[constr_1095] Values of nDataSets vs. reliability

Imposition time: CP: IT_RteGen

⌈If the value of nDataSets is greater than 0, the value of reliability shall not be set to errorCorrection.⌋

The reason for the existence of [constr_1095] is that the [36, SWS NVRAM Manager] does not support error correction for NV data sets.

If the value of nDataSets is equal to 0, the value of reliability can take any value out of NvBlockNeedsReliabilityEnum.

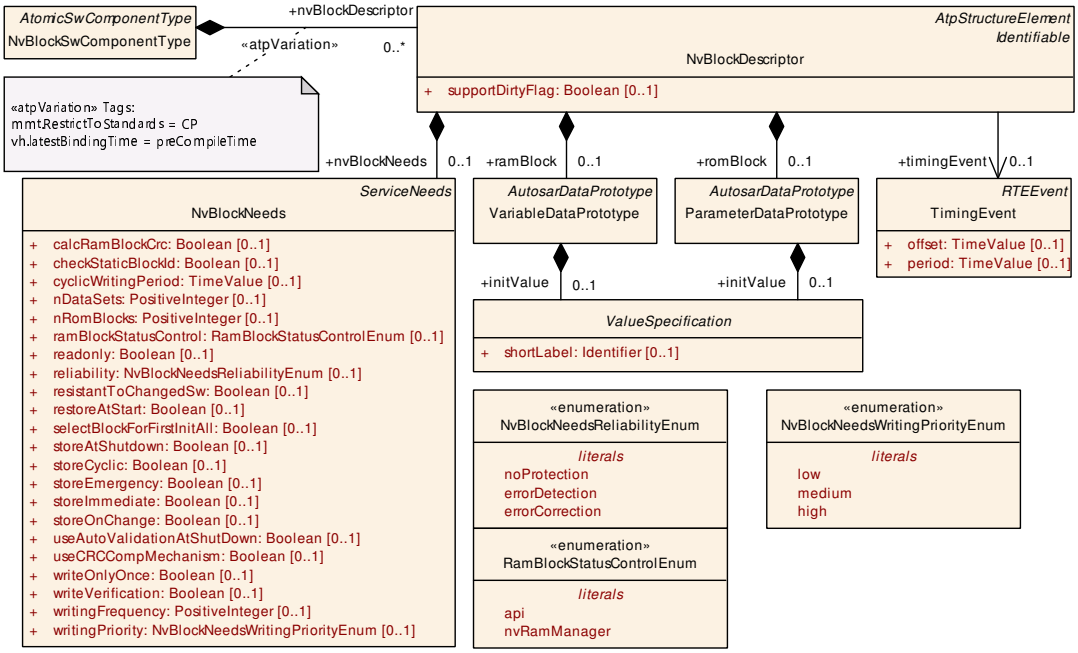

Figure 11.5: NvBlockSwComponentType and NvBlockDescriptor

11.4.5.1 Writing Strategies

[TPS_SWCT_01586] Writing strategies for *nv data* ⌈By setting certain attributes in the meta-class NvBlockDescriptor, it is possible to configure different writing strategies for the values of a RAM Block to the NVRAM storage. [constr_1310] applies.

The following use cases are supported:

- Write data **cyclically**. This use case requires the existence of attribute NvBlockDescriptor.nvBlockNeeds.storeCyclic with the value true and the attribute NvBlockDescriptor.nvBlockNeeds.cyclicWritingPeriod needs to exist and have a reasonable value.

  In the context of using the attribute NvBlockDescriptor.nvBlockNeeds.cyclicWritingPeriod the constraints [constr_1308] and [constr_1309] apply.

- Write data **immediately**. This means that data sent to the NvBlockSwComponentType will be written immediately to NVRAM storage.

  This use case corresponds to setting the value of attribute NvBlockDescriptor.nvBlockNeeds.storeImmediate to the value true.

- Write on **emergency**. With this setting, data shall be written to NVRAM storage if the ECU fails in some way.

  This use case corresponds to setting the value of attribute NvBlockDescriptor.nvBlockNeeds.storeEmergency to true.

  As explained in [TPS_SWCT_01589], setting the value of this attribute is not sufficient to achieve the intended semantics.

- Write at **shutdown**. Here, the data is written to NVRAM storage when the ECU shuts down.

  This use case corresponds to setting the value of attribute NvBlockDescriptor.nvBlockNeeds.storeAtShutdown to true.

- Write on **mode switch**. Here, the data is written to NVRAM in response to a mode switch configured to trigger the writing.

  This use case corresponds to the existence of attribute NvBlockDescriptor.modeSwitchEventTriggeredActivity.

- Write on **change**. Here, the data is written to NVRAM if the value is different from the respective value in the ramMirror.

  This use case corresponds to setting the value of attribute NvBlockDescriptor.nvBlockNeeds.storeOnChange to true.

⌋

For more information about how the use case to write data cyclically can be configured, see [TPS_SWCT_01587] and Figure 11.6.

For more information about how the use case to write data immediately can be configured, see [TPS_SWCT_01588] and Figure 11.7.

The actual implementation of the different writing strategies goes beyond setting the value of attributes and requires the existence of dedicated `RunnableEntity`s in the `SwcInternalBehavior` of the enclosing `NvBlockSwComponentType` that are triggered in response to `RTEEvent`s applicable for the particular use case.

[TPS_SWCT_01587] The cyclic writing of *nv data* requires the existence of a `TimingEvent` ⌈The implementation of cyclic writing of *nv data* requires the existence of a `TimingEvent` that can be taken to trigger a corresponding `RunnableEntity` that in turn takes care of calling the respective APIs for writing the data.⌋

This aspect is depicted in Figure 11.6.

[TPS_SWCT_01588] `DataReceivedEvent` for storing *nv data* immediately ⌈The approach to store data immediately after reception by an `NvBlockSwComponentType` requires the activation of a `RunnableEntity` by a `DataReceivedEvent`.⌋

This approach is depicted in Figure 11.7.

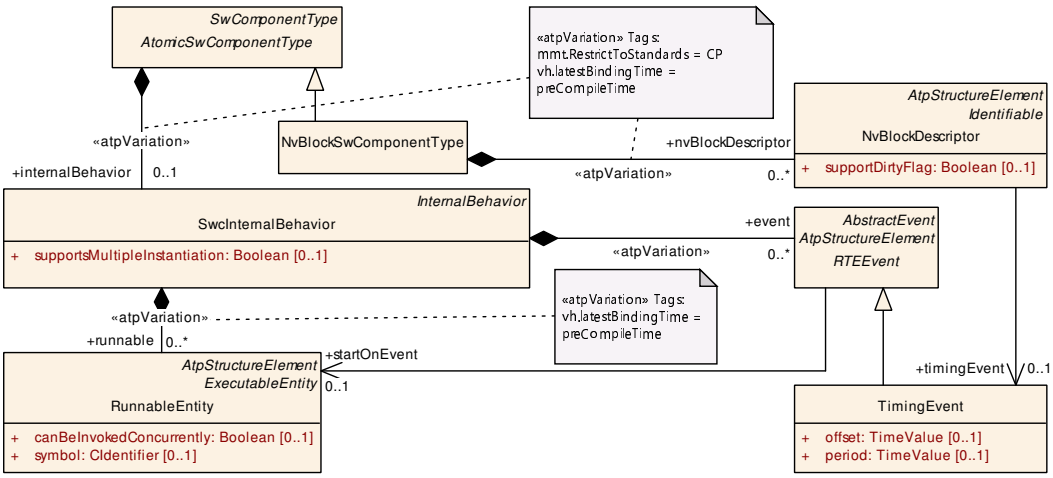

Figure 11.6: How to model a cyclic writing strategy for *nv data*

[TPS_SWCT_01589] Implementation of emergency storing of *nv data* ⌈The use case for `storeEmergency` can only be implemented by means of a `Complex Driver`.

In particular, the `Complex Driver` is responsible for the detection of an ECU failure. If a relevant error occurs, the `Complex Driver` should call the `NvM` write block operation for the emergency blocks directly.⌋

This consequently means that the NvM shall react to write operations coming from the Complex Driver by giving them the highest priority (re-queuing of NvM write block requests).

The behavior described in [TPS_SWCT_01587] is generally supported by AUTOSAR by requiring that NVRAM Blocks shall be configured with “immediate priority”. The technical implications are explained in the respective [36, SWS NVRAM Manager], e.g. in [SWS_NvM_00182] and [SWS_NvM_00300].

[TPS_SWCT_01590] Combination of writing strategies for *nv data* is possible ⌈AUTOSAR positively supports the configuration of a combination of writing strategies for *nv data*.⌋

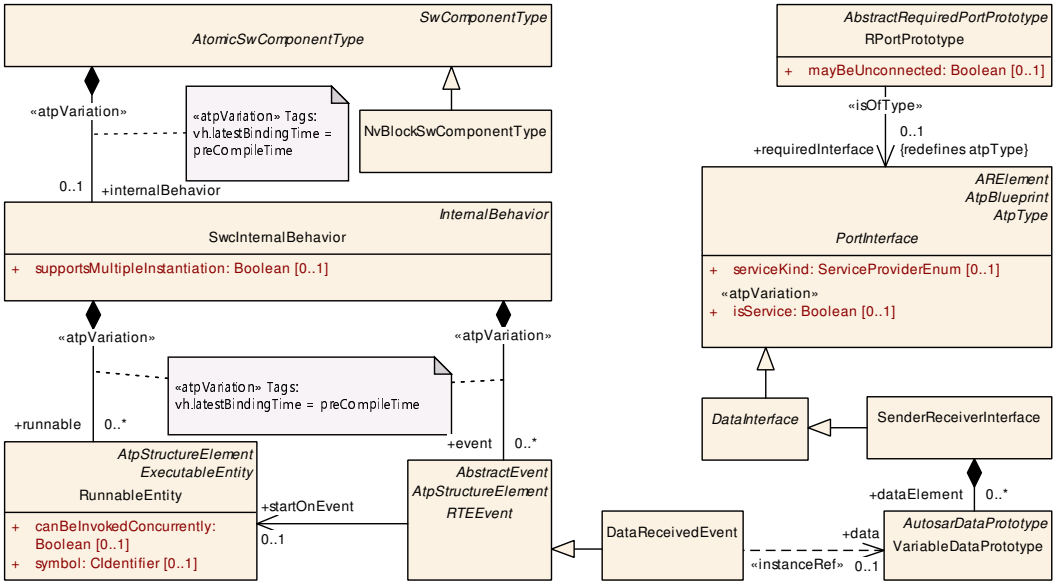

Figure 11.7: How to model an immediate writing strategy for *nv data*

In other words, as a consequence of [TPS_SWCT_01590] it is possible that (for example) both NvBlockDescriptor.nvBlockNeeds.storeImmediate and NvBlockDescriptor.nvBlockNeeds.storeCyclic may exist and be set to true in the context of the same NvBlockNeeds.

[TPS_SWCT_01665] Usage of SwcModeSwitchEvent for triggering a write procedure of *nv data* ⌈The approach to manage data of an NvBlockSwComponentType in response to a mode switch notification received from a mode manager requires the activation of a RunnableEntity by a SwcModeSwitchEvent.⌋

[TPS_SWCT_01666] Semantics of ModeSwitchEventTriggeredActivity.role ⌈If the role ModeSwitchEventTriggeredActivity.role is set to the value WriteBlock then NvM gets requested to write the *nv data* block after the corresponding SwcModeSwitchEvents occurs.⌋

[constr_1415] Supported values of ModeSwitchEventTriggeredActivity.role

Imposition time: CP: IT_RteGen

⌈The only supported value of ModeSwitchEventTriggeredActivity.role is WriteBlock.⌋

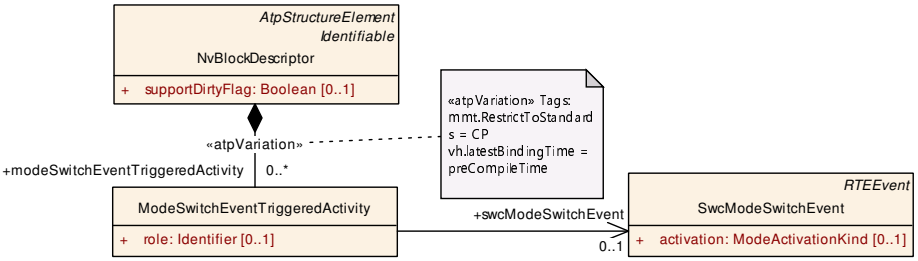

Figure 11.8: Usage of mode switch notification for the activation of a write-procedure of *nv data*

Class	**ModeSwitchEventTriggeredActivity**			
Note	This meta-class defines an activity of the NvBlockSwComponentType for a specific NvBlock which is triggered by a ModeSwitchEvent.			
Base	*ARObject*			
Aggregated by	NvBlockDescriptor.modeSwitchEventTriggeredActivity			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
role	Identifier	0..1	attr	This attribute indicates which service of the NvM for the NvBlock shall be requested.
swcModeSwitch Event	SwcModeSwitchEvent	0..1	ref	This reference identifies the SwcModeSwitchEvent that triggers the activity. **Tags:** atp.Splitkey=swcModeSwitchEvent

Table 11.7: ModeSwitchEventTriggeredActivity

[constr_1982] Existence of attribute ModeSwitchEventTriggeredActivity.role

Imposition time: CP: IT_RteGen

⌈For each ModeSwitchEventTriggeredActivity, attribute role shall exist.⌋

[constr_1983] Existence of attribute ModeSwitchEventTriggeredActivity.swcModeSwitchEvent

Imposition time: CP: IT_RteGen

⌈For each ModeSwitchEventTriggeredActivity, attribute swcModeSwitch-Event shall exist.⌋

11.4.5.1.1 Existence of multiple event-driven Writing Strategies

A use case might exist where multiple event-based writing strategies for NvRam exist at the same time, potentially in addition to a cyclic writing strategy.

Writing strategies are typically implemented by means of different RunnableEntitys that need to be triggered by the arrival of data at the NvBlockSwComponentType. In this case, however, it is necessary to assign the relation between incoming data and the RunnableEntity that applies the appropriate writing strategy.

Example 11.1

In the example scenario depicted in Figure 11.9, two dataElements are received by the NvBlockSwComponentType. One dataElement shall be associated with the writing strategy to *store at shutdown* and the other dataElement shall be associated with an *immediate storage*.

Two DataReceivedEvents exist that can be taken to trigger RunnableEntitys. However, without further formal specification, it is up to speculation which DataReceivedEvent shall be associated with which RunnableEntity.

To remove the degree of uncertainty sketched in Example 11.1, it is possible to use standardized values for the attribute RoleBasedDataAssignment.role and let the RoleBasedDataAssignment itself refer to the respective dataElement.

The approach is sketched in Figure 11.10 and its application to the depicted scenario is sketched in Figure 11.11.

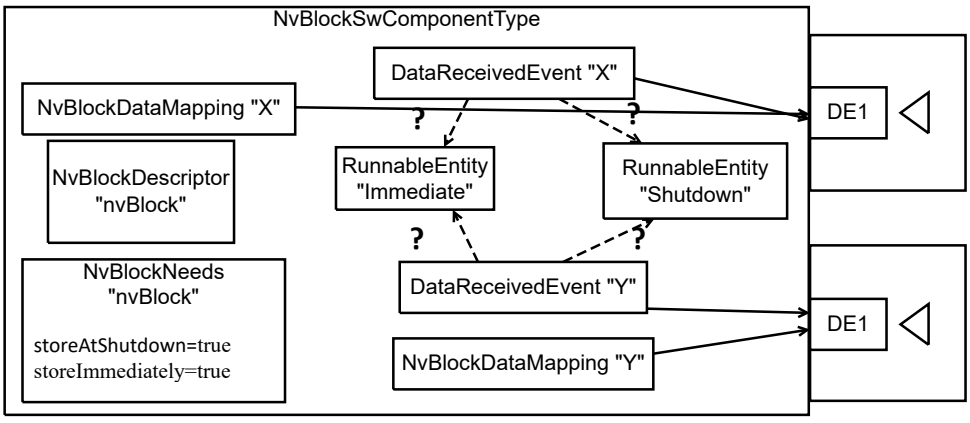

Figure 11.9: Existence of several event-based writing strategies for the same NvBlockDescriptor

[TPS_SWCT_01795] Further specification to facilitate the association of writing strategies to the corresponding RunnableEntity ⌈NvBlockDescriptor may aggregate RoleBasedDataAssignment in the role writingStrategy and the attribute NvBlockDescriptor.writingStrategy.role can be used to assign a writing strategy to an AutosarDataPrototype (referenced by means of NvBlockDescriptor.writingStrategy.usedDataElement) in the context of a PortPrototype.⌋



Figure 11.10: Modeling of RoleBasedDataAssignment in the context of NvBlockDescriptor

[constr_1713] `NvBlockDescriptor.writingStrategy.usedDataElement` shall refer to `AutosarDataPrototype`

Imposition time: CP: `IT_RteGen`

⌈The reference `NvBlockDescriptor.writingStrategy.usedDataElement` shall **only** refer to an `AutosarDataPrototype`.⌋

Rationale: the activation of a `RunnableEntity` that implements the respective writing strategy is triggered by the reception of an entire `AutosarDataPrototype`. The ability to refer to a `DataPrototype` inside the `AutosarDataPrototype` might give a false impression.

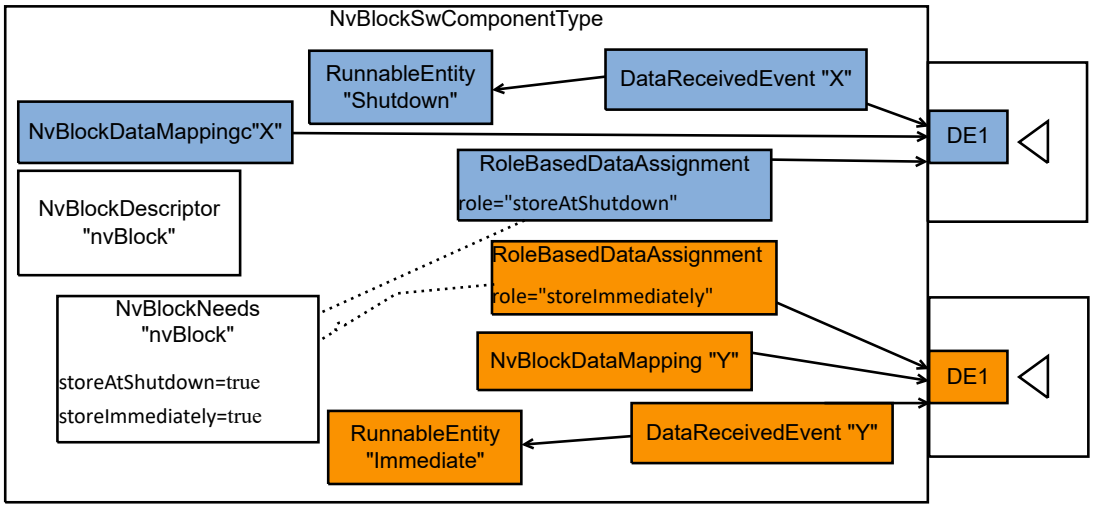

Figure 11.11: Solution for the existence of several event-based writing strategies for the same `NvBlockDescriptor`

[constr_1714] `AutosarDataPrototype` shall only be referenced by a single `NvBlockDescriptor.writingStrategy`

Imposition time: CP: `IT_RteGen`

⌈If an `AutosarDataPrototype` in the context of a `PortPrototype` is referenced from a `NvBlockDescriptor.writingStrategy` then this `AutosarDataPrototype` shall not be referenced from any other `NvBlockDescriptor.writingStrategy`.⌋

[constr_1715] Possible values of attribute `NvBlockDescriptor.writingStrategy.role`

Imposition time: CP: `IT_RteGen`

⌈The attribute `NvBlockDescriptor.writingStrategy.role` shall only have one of the following values (see [TPS_SWCT_01586]):

- **`storeAtShutdown`**
- **`storeImmediate`**
- **`storeOnChange`**

⌋

[constr_1716] Consistency of the attribute NvBlockDescriptor.writingStrategy.role set to storeAtShutdown

Imposition time: CP: IT_RteGen

⌈The existence of NvBlockDescriptor.writingStrategy where attribute role is set to storeAtShutdown is only supported if NvBlockDescriptor.nvBlockNeeds.storeAtShutdown exists and is set to true.⌋

[constr_1717] Consistency of the attribute NvBlockDescriptor.writingStrategy.role set to storeImmediate

Imposition time: CP: IT_RteGen

⌈The existence of NvBlockDescriptor.writingStrategy where attribute role is set to storeImmediate is only supported if NvBlockDescriptor.nvBlockNeeds.storeImmediate exists and is set to true.⌋

[constr_10074] Consistency of the attribute NvBlockDescriptor.writingStrategy.role set to storeOnChange

Imposition time: CP: IT_RteGen

⌈The existence of NvBlockDescriptor.writingStrategy where attribute role is set to storeOnChange is only supported if NvBlockDescriptor.nvBlockNeeds.storeOnChange exists and is set to true.⌋

11.4.5.2 NvBlockNeeds

The requested NVRAM Block configuration of the *NVRAM Manager* is described by the NvBlockNeeds of the NvBlockDescriptor.

This information can be evaluated during ECU configuration similar to the NvBlockNeeds of an atomic software-component or a BSW module. For further details, see Chapter 13.

[constr_1310] Existence of attributes of meta-class NvBlockNeeds

Imposition time: CP: IT_RteGen

⌈If in the context of an ApplicationSwComponentType the attribute SwcServiceDependency.serviceNeeds is implemented by an NvBlockNeeds then the following attributes

- NvBlockNeeds.storeCyclic
- NvBlockNeeds.cyclicWritingPeriod
- NvBlockNeeds.storeEmergency
- NvBlockNeeds.storeImmediate

- NvBlockNeeds.storeOnChange

shall only exist if in the context of the same SwcServiceDependency a SwcServiceDependency.assignedPort exists that has the attribute role set to the value NvDataPort.⌋

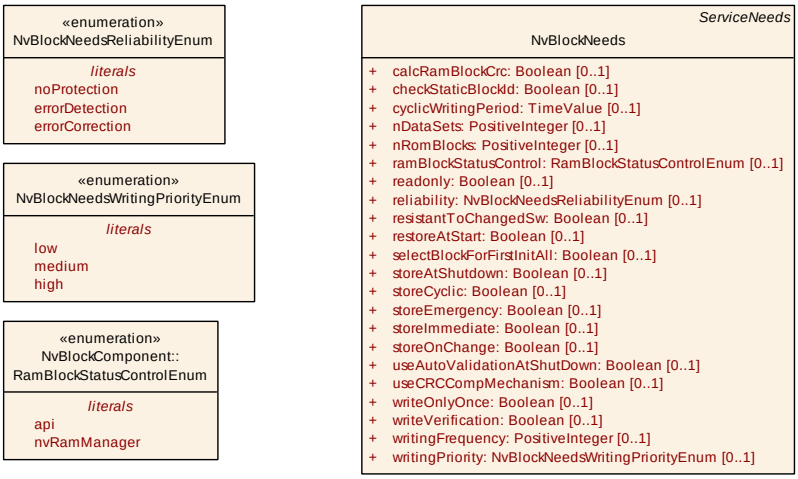

Figure 11.12: NvBlockNeeds

[constr_1308] Existence of NvBlockNeeds.cyclicWritingPeriod

Imposition time: CP: IT_RteGen

⌈The attribute NvBlockNeeds.cyclicWritingPeriod shall exist if and only if the attribute NvBlockNeeds.storeCyclic exists and its value is set to true.⌋

Class	**NvBlockNeeds**			
Note	Specifies the abstract needs on the configuration of a single NVRAM Block.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, NvBlockDescriptor.nvBlockNeeds, SwcService Dependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
calcRamBlock Crc	Boolean	0..1	attr	Defines if CRC (re)calculation for the permanent RAM Block is required.
checkStatic BlockId	Boolean	0..1	attr	Defines if the Static Block Id check shall be enabled.
cyclicWriting Period	TimeValue	0..1	attr	This represents the period for cyclic writing of NvData to store the associated RAM Block.
nDataSets	PositiveInteger	0..1	attr	Number of data sets to be provided by the NVRAM manager for this block. This is the total number of ROM Blocks and RAM Blocks.
nRomBlocks	PositiveInteger	0..1	attr	Number of ROM Blocks to be provided by the NVRAM manager for this block. Please note that these multiple ROM Blocks are given in a contiguous area.
ramBlockStatus Control	RamBlockStatusControl Enum	0..1	attr	This attribute defines how the management of the RAM Block status is controlled.

▽

△

Class	**NvBlockNeeds**			
readonly	Boolean	0..1	attr	true: data of this NVRAM Block are write protected for normal operation (but protection can be disabled) false: no restriction
reliability	NvBlockNeeds ReliabilityEnum	0..1	attr	Reliability against data loss on the non-volatile medium.
resistantTo ChangedSw	Boolean	0..1	attr	Defines whether an NVRAM Block shall be treated resistant to configuration changes (true) or not (false). For details how to handle initialization in the latter case, please refer to the NVRAM specification.
restoreAtStart	Boolean	0..1	attr	Defines whether the associated RAM Block shall be implicitly restored during startup by the basic software.
selectBlockFor FirstInitAll	Boolean	0..1	attr	If this attribute is set to true the NvM shall process this block in the NvM_FirstInitAll() function.
storeAt Shutdown	Boolean	0..1	attr	Defines whether or not the associated RAM Block shall be implicitly stored during shutdown by the basic software.
storeCyclic	Boolean	0..1	attr	Defines whether or not the associated RAM Block shall be implicitly stored periodically by the basic software.
store Emergency	Boolean	0..1	attr	Defines whether or not the associated RAM Block shall be implicitly stored in case of ECU failure (e.g. loss of power) by the basic software. If the attribute store Emergency is set to true the associated RAM Block shall be configured to have immediate priority.
storeImmediate	Boolean	0..1	attr	Defines whether or not the associated RAM Block shall be implicitly stored immediately during or after execution of the according SW-C RunnableEntity by the basic software.
storeOnChange	Boolean	0..1	attr	This attribute defines whether the associated RAM Block shall be stored immediately if the written value is different to the value stored in the associated RAM Block(s) during or after execution of the according SW-C RunnableEntity.
useAuto ValidationAt ShutDown	Boolean	0..1	attr	If set to true the RAM Block shall be auto validated during shutdown phase.
useCRCComp Mechanism	Boolean	0..1	attr	If set to true the CRC of the RAM Block shall be compared during a write job with the CRC which was calculated during the last successful read or write job in order to skip unnecessary NVRAM writings.
writeOnlyOnce	Boolean	0..1	attr	Defines write protection after first write: true: This block is prevented from being changed/erased or being replaced with the default ROM data after first initialization by the software-component. false: No such restriction.
writeVerification	Boolean	0..1	attr	Defines if Write Verification shall be enabled for this NVRAM Block.
writing Frequency	PositiveInteger	0..1	attr	Provides the amount of updates to this block from the application point of view. It has to be provided in "number of write access per year".
writingPriority	NvBlockNeedsWriting PriorityEnum	0..1	attr	Requires the priority of writing this block in case of concurrent requests to write other blocks.

Table 11.8: NvBlockNeeds

Enumeration	**NvBlockNeedsWritingPriorityEnum**
Note	Specifies the priority of writing this block in case of concurrent requests to write other blocks.
Aggregated by	NvBlockNeeds.writingPriority
Literal	***Description***
high	Writing priority is high. **Tags:** atp.EnumerationLiteralIndex=0
low	Writing priority is low. **Tags:** atp.EnumerationLiteralIndex=1
medium	Writing priority is medium. **Tags:** atp.EnumerationLiteralIndex=2

Table 11.9: NvBlockNeedsWritingPriorityEnum

Enumeration	**NvBlockNeedsReliabilityEnum**
Note	Reliability against data loss on the non-volatile medium. These requirements give only a relative indication, for example on the required degree of redundancy for storage. They do, however, not specify by which means (e.g. software or hardware) the reliability is actually achieved.
Aggregated by	NvBlockNeeds.reliability
Literal	***Description***
errorCorrection	Errors shall be corrected **Tags:** atp.EnumerationLiteralIndex=0
errorDetection	Errors shall be detected **Tags:** atp.EnumerationLiteralIndex=1
noProtection	Data need not to be handled with protection **Tags:** atp.EnumerationLiteralIndex=2

Table 11.10: NvBlockNeedsReliabilityEnum

11.4.5.3 RAM Block and ROM Block

[TPS_SWCT_01145] `ramBlock` and the `romBlock` are described by a `VariableDataPrototype` and a `ParameterDataPrototype` ⌈The `ramBlock` and the `romBlock` are described by a `VariableDataPrototype` and a `ParameterDataPrototype` which are typed by an `AutosarDataType`.⌋

[TPS_SWCT_01146] `romBlock` is optional ⌈The `romBlock` is optional. If a `romBlock` is configured, the RTE copies the `romBlock` constants into the `RAM Block` in the case of a block initialization notification (*NvMNotifyInitBlock*).⌋

[TPS_SWCT_01147] No `romBlock` is configured ⌈If there is no `romBlock` configured the connected software-components are either required to offer this functionality by a proper implementation of block initialization notification or the `NVRAM Block` has to be configured so that no `ROM Block` is needed.⌋

As a mitigation against a failed read operation from NV memory, it is recommended to always define a `romBlock` with suitable initial values to ensure the proper initialization of the corresponding `ramBlock`.

In particular, for software-components that do not define a PortPrototype typed by the ClientServerInterface with the standardized shortName NotifyInitBlock (see [36, MVRAM Manager]) it may happen that the ramBlock is not properly initialized in the case of failure.

[constr_2012] Compatibility of ImplementationDataTypes used for ramBlock and romBlock

Imposition time: CP: IT_RteGen

⌈The ramBlock and the romBlock shall have compatible ImplementationDataTypes to ensure that the NVRAM Block default values in the ROM Block can be copied into the RAM Block.⌋

[TPS_SWCT_01848] Semantics of NvBlockDescriptor.instantiationDataDefProps ⌈It is possible that NvBlockDescriptor.ramBlock and NvBlockDescriptor.romBlock shall be able to be calibrated or measured.

This represents another use case for overwriting existing SwDataDefProps (defined on data type level) in the context of NvBlockDescriptor.instantiationDataDefProps to fine-tune the respective MCD-information.⌋

11.4.5.4 NvBlockDataMapping

[TPS_SWCT_01148] NvBlockDataMapping ⌈The meta-class NvBlockDataMapping specifies the mapping of (bits of) DataPrototypes of the NvBlockSwComponentType's PPortPrototypes resp. RPortPrototypes to (bits of) DataPrototypes inside the RAM Block.⌋

This ensures a flexible but deterministic NVRAM Block memory structure given by the ImplementationDataType of the ramBlock and romBlock and its association to the PortPrototypes of the NvBlockSwComponentType.

[constr_2013] Compatibility of ImplementationDataTypes for NvBlockDataMapping

Imposition time: CP: IT_RteGen

⌈Unless both the attribute bitfieldTextTableMaskNvBlockDescriptor and attribute bitfieldTextTableMaskPortPrototype is defined in the context of a given NvBlockDataMapping, the NvBlockDataMapping is only valid if the ImplementationDataType of the referenced VariableDataPrototype or ImplementationDataTypeElement in the role nvRamBlockElement is compatible to the ImplementationDataType used to type the DataPrototype aggregated by NvBlockDataMapping in the role writtenNvData, writtenReadNvData, or readNvData.⌋

[constr_1285] Applicability of roles vs. PortPrototypes

Imposition time: CP: IT_RteGen

⌈The aggregation of AutosarVariableRef aggregated by NvBlockDataMapping in the roles writtenNvData, writtenReadNvData, or readNvData is subject to limitation, depending on the applicable subclass of PortPrototype:

- The role writtenNvData shall only be used if the corresponding PortPrototype is a RPortPrototype
- The role writtenReadNvData shall only be used if the corresponding PortPrototype is a PRPortPrototype
- The role readNvData shall only be used if the corresponding PortPrototype is a PPortPrototype

⌋

But nevertheless it is valid, that not all ImplementationDataTypeElements within the VariableDataPrototype aggregated by NvBlockDescriptor in the role ramBlock are mapped to a VariableDataPrototype located in a PortPrototype.

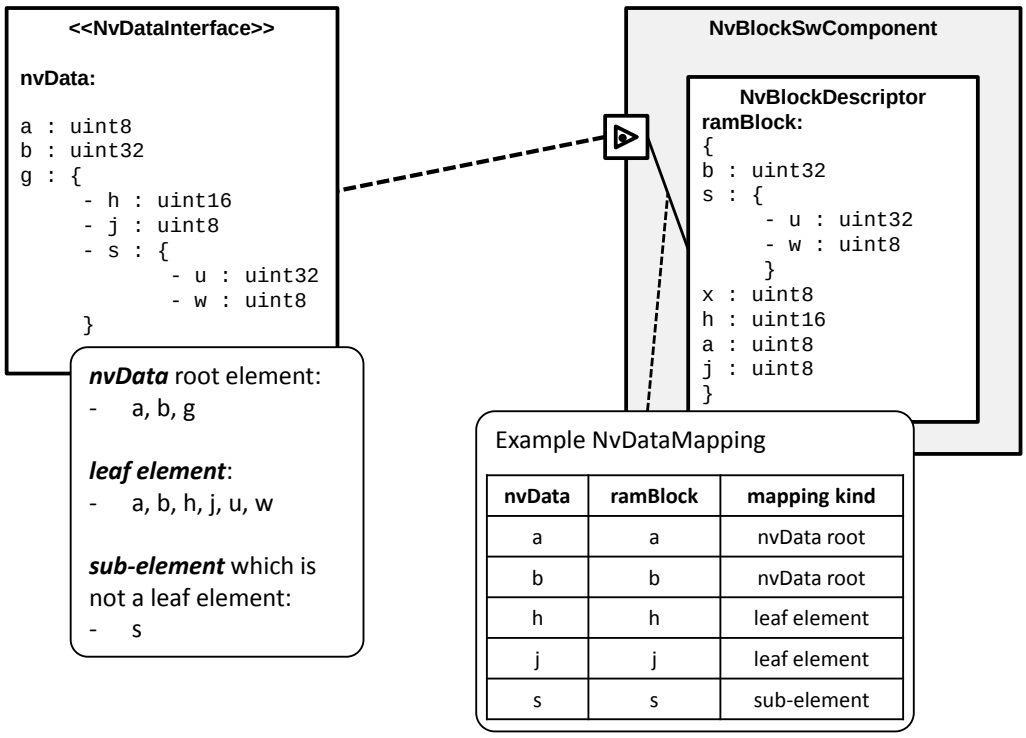

Figure 11.13: Sample NvBlockDataMapping to explain the three ways to map a VariableDataPrototype to either an NvBlockDescriptor.ramBlock or a sub-element thereof

This enables to have fill elements or logistic data in the NVRAM Block which are not accessed by software-components. This is exemplified by the element *x* in Figure 11.13.

The VariableDataPrototype located in the PortPrototype will, in the vast majority of cases, be typed by an ApplicationDataType which in turn (at least before the actual code generation starts) shall finally have a mapping to an ImplementationDataType. This aspect is explained in Chapter 5.2.2.

[TPS_SWCT_01659] Mapping of VariableDataPrototype to a NvBlockDescriptor ⌈There are three ways to map a VariableDataPrototype (i.e. NvDataInterface.nvData in the context of a specific PortPrototype) to either an NvBlockDescriptor.ramBlock or a *sub-element* thereof:

- NvDataInterface.nvData is directly and completely mapped, i.e. AutosarVariableRef.autosarVariable shall exist and autosarVariable.targetDataPrototype shall refer to the NvDataInterface.nvData.
- **Every** *leaf* element of NvDataInterface.nvData is mapped individually. This means that either
  - AutosarVariableRef.autosarVariableInImplDatatype shall exist and autosarVariableInImplDatatype.targetDataPrototype shall refer to the respective *leaf* element of NvDataInterface.nvData.
  - AutosarVariableRef.autosarVariable shall exist and autosarVariable.targetDataPrototype shall refer to the respective *leaf* element of NvDataInterface.nvData.

  In other words: the mapping shall be defined either via the used ImplementationDataType or else via the used ApplicationDataType.
- A *sub-element* of NvDataInterface.nvData - which is **not** a *leaf* element - may be directly mapped and consequently **all** the *leaf* elements of the respective *sub-element* of NvDataInterface.nvData are **indirectly mapped** as well. This means that
  - AutosarVariableRef.autosarVariableInImplDatatype shall exist and autosarVariableInImplDatatype.targetDataPrototype shall refer to the *sub-element* element of NvDataInterface.nvData.
  - AutosarVariableRef.autosarVariable shall exist and autosarVariable.targetDataPrototype shall refer to the *sub-element* element of NvDataInterface.nvData.

  In other words: the mapping shall be defined either via the used ImplementationDataType or else via the used ApplicationDataType.

⌋

A mixing of **mutually exclusive** mappings for entire *sub-elements* or *leaf* elements as described by [TPS_SWCT_01659] is positively supported (see Figure 11.13).

[constr_1395] `NvBlockDataMapping` shall be complete

Imposition time: CP: `IT_RteGen`

⌈If an `NvBlockDataMapping` refers to *sub-elements* or *leaf* elements of the `NvDataInterface.nvData` in the context of a particular `PortPrototype`, then **all remaining** *sub-elements* or *leaf* elements **shall effectively be mapped** according to [TPS_SWCT_01659] by means of a collection of `NvBlockDataMapping`s.⌋

[constr_1403] `NvBlockDataMapping`s to a given `nvData` shall be unambiguous

Imposition time: CP: `IT_RteGen`

⌈If an `NvBlockDataMapping` exists that **directly** and **completely** maps a specific `NvDataInterface.nvData` in the context of a particular `PortPrototype`, then **no** other `NvBlockDataMapping` which maps sub-elements of the `NvDataInterface.nvData` shall exist.⌋

The interaction with AUTOSAR services is centrally defined in the context of the `SwcServiceDependency`. The latter gathers a collection of `PortPrototype`s by means of `RoleBasedPortAssignment`s that implement a closely related service functionality.

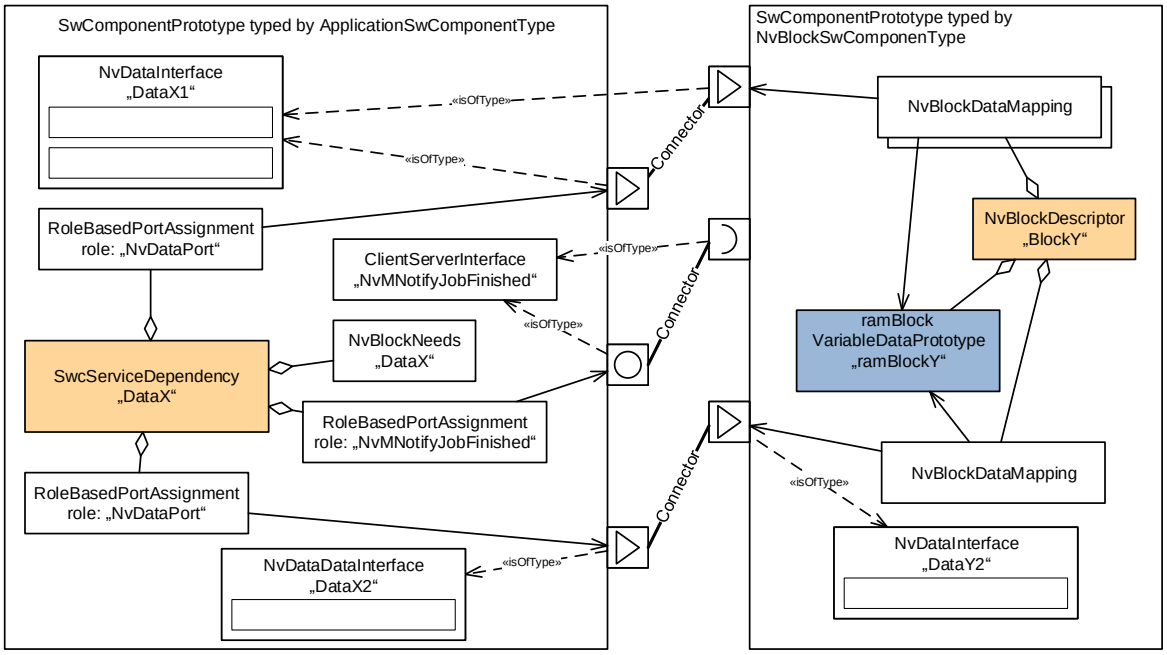

Figure 11.14: Visualization of the statement made by [constr_1404]

In the specific case of interaction between AtomicSwComponentType and NvBlockSwComponentType (as described by [TPS_SWCT_02503]), there are PortPrototypes referenced by a RoleBasedPortAssignment with attribute RoleBasedPortAssignment.role set to NvDataPort. These PortPrototypes contain the collected *Nv Data* of the service use case.

Furthermore, there is the possibility to receive notifications when the writing of the mapped NV Block to the NvRam is finished.

[TPS_SWCT_01863] Existence of VariableInAtomicSWCTypeInstanceRef.rootVariableDataPrototype in the context of NvBlockDataMapping.nvRamBlockElement ⌈In the context of NvBlockDataMapping.nvRamBlockElement, the reference in the VariableInAtomicSWCTypeInstanceRef.rootVariableDataPrototype is redundant because the information carried by this reference is already conveyed by the aggregation NvBlockDescriptor.ramBlock.

Therefore, VariableInAtomicSWCTypeInstanceRef.rootVariableDataPrototype shall be ignored in the context of NvBlockDataMapping.nvRamBlockElement.⌋

To properly assign such a notification to the content of the related *Nv Data* PortPrototypes in the scope of the same SwcServiceDependency it is necessary that the *Nv Data* of **all** these PortPrototypes is mapped to the **same** Nv Block (because the notifications are created **per block**).

This aspect represents one motivation for the existence of [constr_1404].

[constr_1404] All NvDataInterface.nvData of PortPrototypes in the context of a specific SwcServiceDependency shall be mapped to the same NvBlockDescriptor

Imposition time: CP: IT_RteGen

⌈In the context of a given SwcServiceDependency (which, in turn, is owned by an AtomicSwComponentType), **all** NvDataInterface.nvData of PortPrototypes referenced by a RoleBasedPortAssignment with attribute RoleBasedPortAssignment.role set to NvDataPort shall be connected (either directly or via the definition of suitable PortInterfaceMappings) to NvDataInterface.nvData (on the side of the NvBlockSwComponentType) that are **completely mapped** (via NvBlockDataMappings) **to the identical** NvBlockDescriptor.ramBlock.⌋

The statement made by [constr_1404] is visualized in Figure 11.14. The context-defining model elements, i.e. SwcServiceDependency owned by the AtomicSwComponentType as well as NvBlockDescriptor owned by the NvBlockSwComponentType, are colored in light orange.

The diagram is focused on the NvBlockDescriptor.ramBlock. As stressed by [constr_1404], all *Nv Data* provided by the PortPrototypes referenced by the specific SwcServiceDependency finally ends up in the one depicted ramBlock (colored in blue).

The graphical representation of the NvBlockDataMapping in Figure 11.14 has been simplified for clarity.

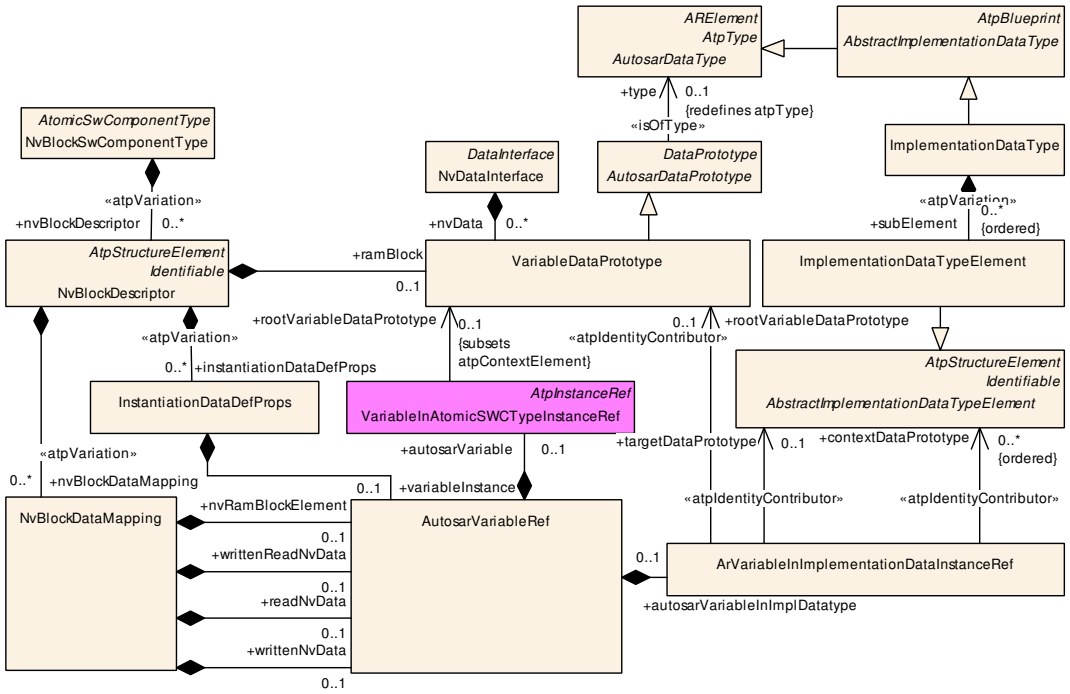

Figure 11.15: NvBlockDataMapping and InstantiationDataDefProps

In summary, several motivations lead to the creation of [constr_1404]:

- The handling of the dirty-flag within the RTE is done in the context of a PortPrototype.
- The currently implemented approach allows for an easy understanding of the relation of data in the application to data in NV-RAM.
- All data in the context of one SwcServiceDependency have the identical storage life cycle.
- Jobs triggered in the NvM via operations in the NvMService (see [SWS_NvM_00734]) interface belong to exactly one NvBlockDescriptor.
- As already mentioned, notifications of the NvM towards software-components (e.g. NvMNotifyJobFinished as described in [SWS_NvM_00735] or NvMNotifyInitBlock, see [SWS_NvM_00736]) belong to exactly one NvBlockDescriptor.

[constr_1984] Existence of instance reference NvBlockDataMapping.nvRamBlockElement

Imposition time: CP: IT_RteGen

⌈For each NvBlockDataMapping, the instance reference to ModeDeclaration in the role nvRamBlockElement shall exist.⌋

There are use cases for numerous fine-grained (e.g. single bits) data in non-volatile RAM. For this purpose, it would be very inefficient to copy the value of a whole DataPrototype that is at least 8 bits long into the non-volatile RAM.

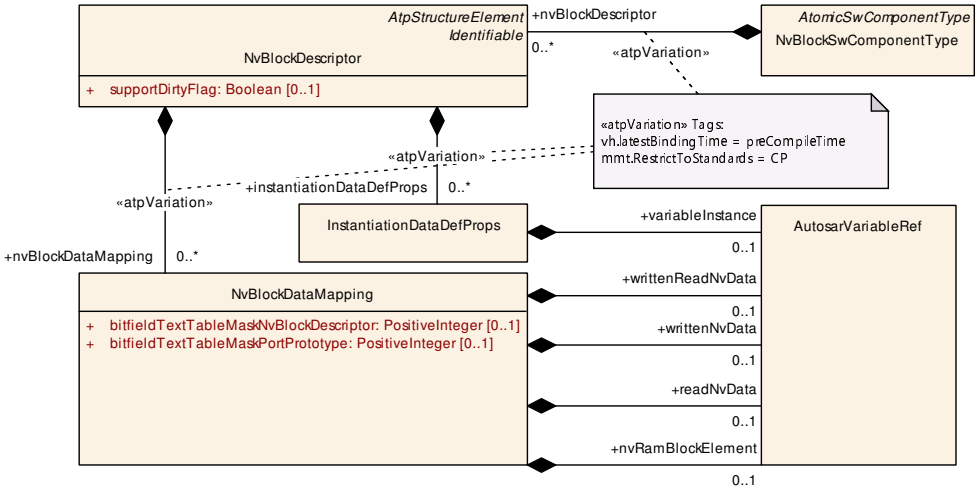

Figure 11.16: Attributes of NvBlockDataMapping

A much better approach is to allow for the mapping of single bits or bit-fields inside a DataPrototype in a PortPrototype to the ramBlock of an NvBlockDescriptor directly.

For this purpose the NvBlockDataMapping provides the attributes bitfieldTextTableMaskNvBlockDescriptor and bitfieldTextTableMaskPortPrototype[4].

[TPS_SWCT_01799] Mapping of bit-fields between NvBlockDescriptor and PortPrototype ⌈It is possible to map a bitfield contained in the DataPrototype representing the ramBlock to a bitfield contained in a DataPrototype defined in the context of a PortPrototype on the surface of the enclosing NvBlockSwComponentType by means of the definition of attributes NvBlockDataMapping.bitfieldTextTableMaskNvBlockDescriptor and NvBlockDataMapping.bitfieldTextTableMaskPortPrototype.

In this case [constr_2013] is not applicable.⌋

The general approach for mapping bit-fields onto each other in the context of an NvBlockSwComponentType is sketched in Figure 11.17.

[4]The alternative to this approach would have been to shift this “distillation process” into the connection between e.g. an ApplicationSwComponentType and an NvBlockSwComponentType.

Such an approach comes with considerably heavier side effects and complexity (usage in DelegationSwConnectors or as part of a network connection) and is therefore not supported.

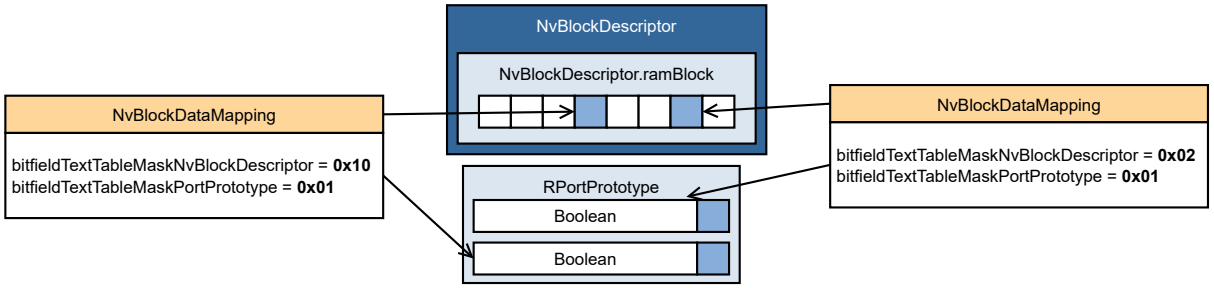

Figure 11.17: Visualization of the approach to map bit-fields inside an `NvBlockSwComponentType`

Class	**NvBlockDataMapping**			
Note	Defines the mapping between the VariableDataPrototypes in the NvBlockComponents ports and the VariableDataPrototypes of the RAM Block. The data types of the referenced VariableDataPrototypes in the ports and the referenced sub-element (inside a CompositeDataType) of the VariableDataPrototype representing the RAM Block shall be compatible. This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARObject*			
Aggregated by	BulkNvDataDescriptor.nvBlockDataMapping, NvBlockDescriptor.nvBlockDataMapping			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
bitfieldTextTableMaskNvBlockDescriptor	PositiveInteger	0..1	attr	This attribute identifies the applicable bit mask on the side of the Nv Block.
bitfieldTextTableMaskPortPrototype	PositiveInteger	0..1	attr	This attribute identifies the applicable bit mask on the side of the PortPrototype.
nvRamBlockElement	AutosarVariableRef	0..1	aggr	Reference to a VariableDataPrototype of a RAM Block. **Tags:** atp.Splitkey=nvRamBlockElement
readNvData	AutosarVariableRef	0..1	aggr	Reference to a VariableDataPrototype of a pPort of the NvBlockComponent providing read access to the RAM Block.If there is no PortPrototype providing read access (write-only) the reference can be omitted. **Tags:** atp.Splitkey=readNvData
writtenNvData	AutosarVariableRef	0..1	aggr	Reference to a VariableDataPrototype of a rPort of the Nv BlockComponent providing write access to the RAM Block. If there is no port providing write access (read-only) the reference can be omitted. **Tags:** atp.Splitkey=writtenNvData
writtenReadNvData	AutosarVariableRef	0..1	aggr	Reference to a VariableDataPrototype of a PRPort Prototype of the NvBlockSwComponentType providing write and read access to the RAM Block. **Tags:** atp.Splitkey=writtenReadNvData

Table 11.11: NvBlockDataMapping

11.4.5.5 Client Server Ports

[TPS_SWCT_01149] `RoleBasedPortAssignment` of `NvBlockDescriptor` ⌈The `clientServerPort` of the `NvBlockDescriptor` describes which client/server `PortPrototype` of the `NvBlockSwComponentType` serves for which purpose. The

role specifies if the port serves for block-related services, administrative services or notification.⌋

[constr_2014] Limitation of NvBlockDescriptor.clientServerPort.role

Imposition time: CP: IT_RteGen

⌈The value of attribute NvBlockDescriptor.clientServerPort.role shall be set to a valid name of one of the standardized AUTOSAR (client/server) Interfaces used for the NVRAM Manager, as described by [TPS_SWCT_02501], [TPS_SWCT_02502], [TPS_SWCT_02503] and [TPS_SWCT_02504].⌋

Rationale for the existence of [constr_2014]: the job of the NvBlock-Descriptor.clientServerPort is to qualify the PortPrototypes on the NvBlockSwComponentType that interact with the PortPrototypes described by the service use cases documented in [TPS_SWCT_02501], [TPS_SWCT_02502], [TPS_SWCT_02503] and [TPS_SWCT_02504].

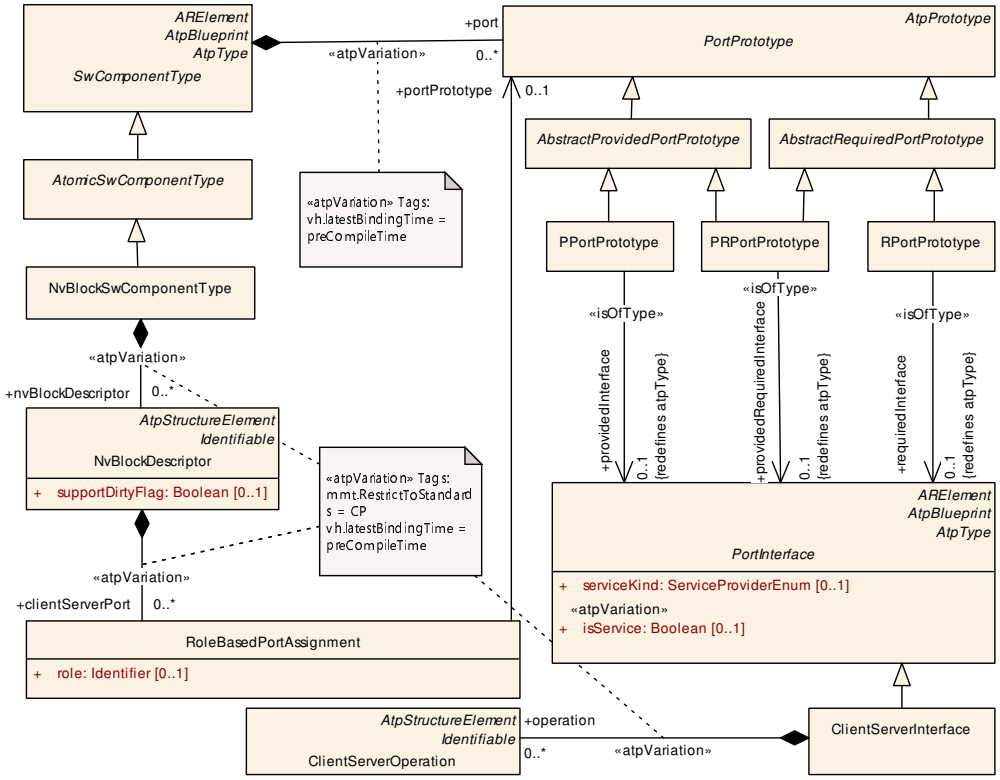

Figure 11.18: NvBlockNotification

In the case of notifications, one common callback function is provided by the RTE for each individual kind of notification defined by the attribute role.

The PPortPrototypes related to a given NvBlockDescriptor need to be provided with the same value for a PortDefinedArgumentValue in order to make the software work correctly. The provision of the PortDefinedArgumentValue is heuristic, but with a further “trick” the reliability of this operation can be much improved.

For all NvBlockDescriptor.clientServerPort of a given NvBlockDescriptor where attribute role is set to the value NvMService or NvMAdmin collect the PortPrototype if it is a PPortPrototype. The resulting collection of PortPrototypes needs to be provided with the same value (of PortDefinedArgumentValue).

In this case it is no longer necessary to explicitly model the existence of PortDefinedArgumentValues for these PortPrototypes since the applicable ID value of the NvM can be derived by RTE configuration.

To make this approach work the role value needs to be standardized, see [constr_2014].

11.4.6 BulkNvDataDescriptor

There is a strong use case where application software gets read-only access to data of significant size located in non-volatile memory. The actual data is created or updated e.g. at the end of the production line or, in some cases, during maintenance in a garage.

If such a scenario were to be implemented using an NvBlockDescriptor then the creation of a RAM mirror of the data in the non-volatile memory would be obligatory. But as described before, the existence of **a RAM mirror would not be necessary at all** in this use case and would only waste a significant amount of precious resources.

It is therefore necessary to clearly separate the use case for utilizing an NvBlockDescriptor from the direct read-only access to non-volatile memory in the meta-model.

For this purpose, model support is provided by the existence of meta-class BulkNvDataDescriptor, aggregated at NvBlockSwComponentType in the role bulkNvDataDescriptor. This modeling is depicted in Figure 11.19.

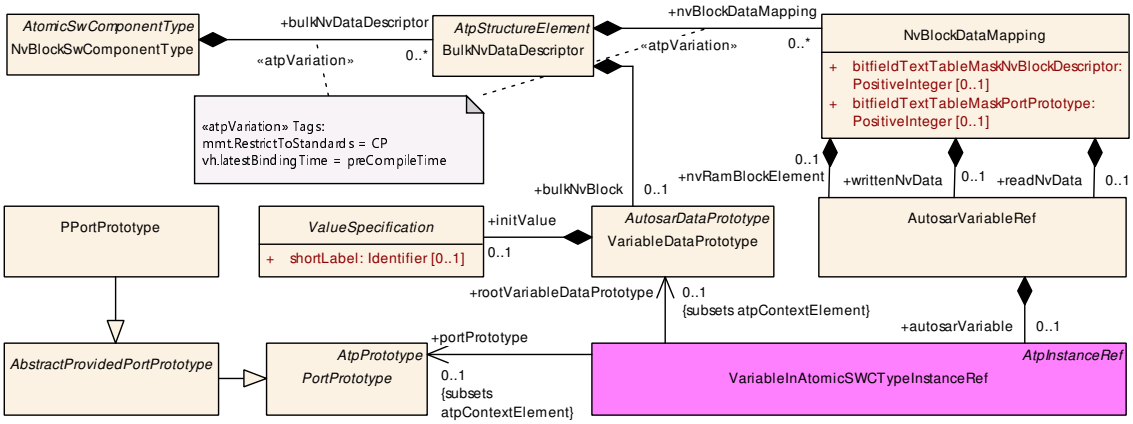

Figure 11.19: NvBlockSwComponentType and BulkNvDataDescriptor

[TPS_SWCT_01805] Semantics of the aggregation NvBlockSwComponentType.bulkNvDataDescriptor [The existence of an aggregation at meta-class

NvBlockSwComponentType in the role bulkNvDataDescriptor indicates that read-only access to a block of data in non-volatile memory shall be provided.

Access to this block of data is **provided directly from non-volatile memory** as opposed to via a RAM mirror.⌋

[TPS_SWCT_01806] Simultaneous aggregation of NvBlockSwComponentType.bulkNvDataDescriptor and NvBlockSwComponentType.nvBlockDescriptor ⌈The simultaneous existence of aggregations in the roles bulkNvDataDescriptor and nvBlockDescriptor in the context of the same NvBlockSwComponentType is positively supported.⌋

[TPS_SWCT_01807] Application of NvBlockDataMapping on BulkNvDataDescriptor ⌈Via the aggregation of NvBlockDataMapping in the role nvBlockDataMapping it is possible to make the content of the BulkNvDataDescriptor available to a PPortPrototype on the surface of the enclosing NvBlockSwComponentType.

It is also supported to make only a subset of the content of the BulkNvDataDescriptor available at the PPortPrototype.⌋

[constr_1735] Limitation of the aggregation of AutosarVariableRef in the context of an NvBlockDataMapping owned by a BulkNvDataDescriptor

Imposition time: CP: IT_RteGen

⌈Any NvBlockDataMapping owned by a BulkNvDataDescriptor shall only aggregate an AutosarVariableRef in the role readNvData and nvRamBlockElement (that in turn refers to the BulkNvDataDescriptor.bulkNvBlock).⌋

[constr_1285] also applies to the usage of BulkNvDataDescriptor.

Class	**BulkNvDataDescriptor**			
Note	This meta-class represents one bulk NV Data Block that is read-only for the application software. The purpose of a bulk NV Data Block is to provide access to information uploaded to the vehicle at e.g. the end of the production line.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, NvBlockSwComponentType.bulkNvDataDescriptor			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
bulkNvBlock	VariableDataPrototype	0..1	aggr	This aggregation represents the actual bulk NVBlock. **Tags:** atp.Splitkey=bulkNvBlock, bulkNvBlock.shortName

▽

△

Class	**BulkNvDataDescriptor**			
nvBlockData Mapping	NvBlockDataMapping	*	aggr	Defines the mapping between the VariableData Prototypes in the NvBlockComponents ports and the VariableDataPrototypes of the non-volatile memory. The aggregation of NvBlockDataMapping is subject to variability with the purpose to support the conditional existence of nv data ports. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=nvBlockDataMapping, nvBlockData Mapping.variationPoint.shortLabel vh.latestBindingTime=preCompileTime This Attribute is only used by the AUTOSAR Classic Platform.

Table 11.12: BulkNvDataDescriptor

11.4.7 SwcInternalBehavior of an NvBlockSwComponentType

[TPS_SWCT_01150] `InternalBehavior` of a `NvBlockSwComponentType` to enable access to the `NVRAM Block` management API ⌈In general, the InternalBehavior of a NvBlockSwComponentType is only used for a limited scope.

The main use case is that the NvBlockSwComponentType defines PPortPrototypes typed by a ClientServerInterface to enable access to the NVRAM Block management API.

To enable the configuration of the server invocation in the RTE's ECU configuration, the NvBlockSwComponentType needs to provide the following model elements:

- OperationInvokedEvents
- server RunnableEntity
- PortDefinedArgumentValues to define the NVRAM Block ID which has to be passed to the NvM

In addition to the above list further model elements may qualify; the details are explained in [TPS_SWCT_01584].⌋

[TPS_SWCT_01152] `InternalBehavior` does not have further attributes ⌈It is not expected, that such InternalBehavior do have further attributes like ExclusiveAreas, per-instance memory or inter-runnable variables, etc.⌋

[TPS_SWCT_01584] `InternalBehavior` of a `NvBlockSwComponentType` for implementing a writing strategy ⌈For the use case that NvBlockDescriptors exists that aggregate NvBlockNeeds which, in turn, define particular NV data writing strategies (by defining any of the attributes storeAtShutdown, storeImmediate, storeEmergency, or storeCyclic) the InternalBehavior of a NvBlockSwComponentType needs to support further model elements.

Particularly, In addition to the model elements listed in [TPS_SWCT_01150], the following list of model elements can be used in the InternalBehavior of a NvBlockSwComponentType for implementing writing strategies:

- TimingEvents (which may include references to ModeDeclarations in the role disabledMode)
- DataReceivedEvents (which may include references to ModeDeclarations in the role disabledMode)
- SwcModeSwitchEvents
- RunnableEntitys

⌋

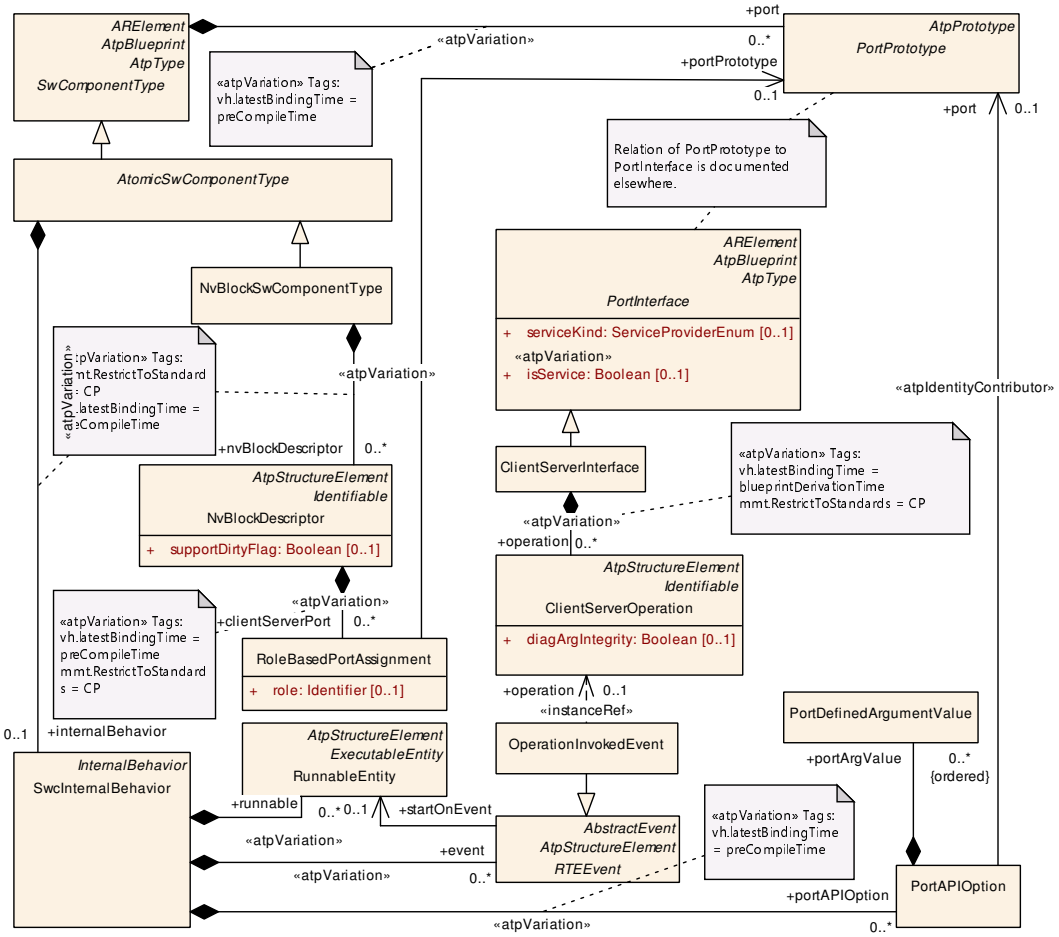

Figure 11.20: NvBlockSwComponentType and SwcInternalBehavior

[TPS_SWCT_01151] RunnableEntitys do not have further attributes ⌈The same condition exists for the RunnableEntitys of such InternalBehavior which shall not define further attributes, e.g. data access points (implemented by means of references from SwcInternalBehavior to VariableAccess) or ServerCallPoints.⌋

[constr_1234] Value of RunnableEntity.symbol

Imposition time: CP: IT_RteGen

⌈The value of a RunnableEntity.symbol owned by an NvBlockSwComponentType that is triggered by an OperationInvokedEvent shall only be taken from the set of API names associated with the NvM.⌋

For example, RunnableEntity.symbol owned by an NvBlockSwComponentType could rightfully be set to NvM_ReadBlock (see [36, NVRAM Manager]) but an arbitrary value like ReadThisBlock is not permitted.

The rationale for [constr_1234] is that the RunnableEntitys that are triggered by an OperationInvokedEvent are not existing as such but are mapped to the respective function calls of the NvM. For more details of how this mapping can be achieved please refer to the [6, TPS BSW Module Description Template].

Please note that no restriction applies for the value of attribute RunnableEntity.symbol of any RunnableEntity owned by an NvBlockSwComponentType that is triggered by an RTEEvent other than OperationInvokedEvent.

[constr_2015] Limitation of SwcInternalBehavior of a NvBlockSwComponentType

Imposition time: CP: IT_RteGen

⌈The SwcInternalBehavior of a NvBlockSwComponentType is only permitted to define

- OperationInvokedEvents
- RunnableEntitys triggered by OperationInvokedEvents (server RunnableEntitys)
- RunnableEntitys which defines only the mandatory attributes symbol and canBeInvokedConcurrently
- PortAPIOptions defining PortDefinedArgumentValues
- TimingEvents (which may include references to ModeDeclarations in the role disabledMode)
- DataReceivedEvents (which may include references to ModeDeclarations in the role disabledMode)
- SwcModeSwitchEvents
- RunnableEntitys triggered by TimingEvents
- RunnableEntitys triggered by DataReceivedEvents
- RunnableEntitys triggered by SwcModeSwitchEvents
- DataTypeMappingSet

⌋

[constr_1309] Existence of NvBlockDescriptor.timingEvent

Imposition time: CP: IT_RteGen

⌈The attribute NvBlockDescriptor.timingEvent shall exist if and only if the NvBlockDescriptor.nvBlockNeeds.storeCyclic exists and is set to the value true.⌋

Note that there is a conceptual connection between the values of the two attributes NvBlockDescriptor.timingEvent.period and SwcServiceDependency.serviceNeeds.cyclicWritingPeriod.

Specifically, the SwcServiceDependency.serviceNeeds.cyclicWritingPeriod represents a requirement and the NvBlockDescriptor.timingEvent.period is supposed to fulfill the requirement.

[TPS_SWCT_01585] Relevance of NvBlockDescriptor.timingEvent.period
⌈For any given NvBlockDescriptor, the value of the attribute NvBlockDescriptor.nvBlockNeeds.cyclicWritingPeriod shall be ignored and the value of NvBlockDescriptor.timingEvent.period shall be taken to specify the effective writing frequency for cyclic storage.⌋

[TPS_SWCT_01662] Applicability of DataTypeMappingSets inside an NvBlockSwComponentType ⌈The DataTypeMappingSets to be applied for a given NvBlockDescriptor is the superset of NvBlockDescriptor.dataTypeMapping and InternalBehavior.dataTypeMapping.⌋

12 Software Component Documentation

12.1 Introduction

AUTOSAR supports integrated and well-structured documentation of software-component types by adopting the principles of [37, ASAM FSX].

More details about the AUTOSAR Documentation Support Concept can be found in [10, TPS Generic Structure Template].

[TPS_SWCT_01062] Documentation of software-components ⌈The documentation of a SwComponentType is composed of several Chapters aggregated in dedicated roles:

- The role swTestDesc can be used for all testing-related documentation of the SwComponentType.
- The role swMaintenanceNotes is available for describing all aspects of maintenance of the SwComponentType.
- The role swCalibrationNotes can be used to provide calibration and measurement-related documentation of the SwComponentType.
- The role swDiagnosticsNotes can be used to add diagnostic-related documentation of the SwComponentType.
- The role swFeatureDesc can be used to describe the features of the SwComponentType.
- The role swCarbDoc is used to store documentation requested by CARB.
- The role swFeatureDef can be used for defining the physical functionality of the SwComponentType.

In addition, the role chapter can be used to add free-form documentation, e.g. informal guidelines or recommendations, that is not covered by any of the dedicated roles listed above.⌋

Formal information can be captured using special data groups (see [10, TPS Generic Structure Template]) or by annotating documentation constructs with semantic information. These can be used to extend the predefined Chapters or to add separate free Chapters.

Note that the documentation of a software-component can be stored in a different file than the component itself.

The role SwComponentDocumentation.chapter is also decorated with the stereotype ≪atpVariation≫ to support variant handling (see [10, TPS Generic Structure Template]) on the documentation at the Chapter level.

The documentation of a SwComponentType is shown in Figure 12.1.

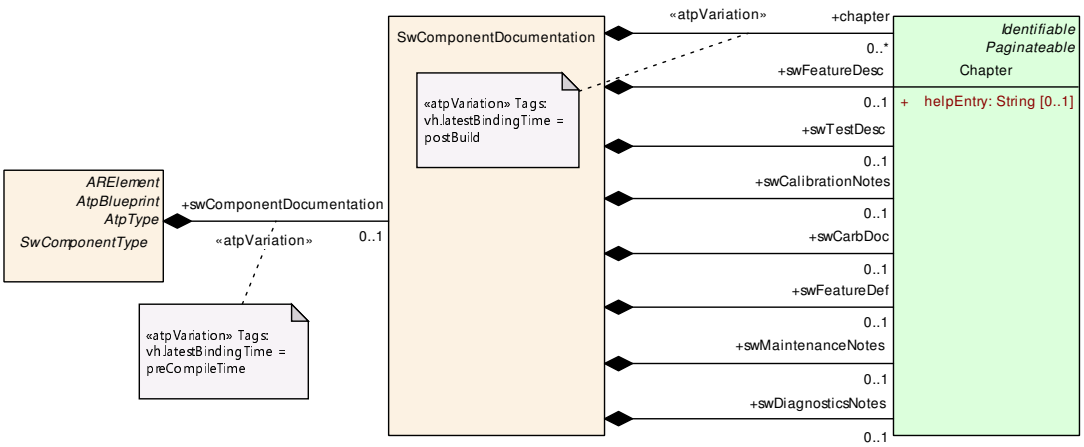

Figure 12.1: Software component documentation

Class	**SwComponentDocumentation**			
Note	This class specifies the ability to write dedicated documentation to a component type according to ASAM FSX.			
Base	*ARObject*			
Aggregated by	BswModuleDescription.bswModuleDocumentation, *SwComponentType*.swComponentDocumentation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
chapter	Chapter	*	aggr	These chapters provide additional information about the software component that do not fit in the other chapters. Note that this is subject to variation because Chapter aggregations in the role chapter are variant within the documentation in general. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=chapter, chapter.shortName, chapter.variationPoint.shortLabel vh.latestBindingTime=postBuild xml.roleElement=true xml.roleWrapperElement=false xml.sequenceOffset=100 xml.typeElement=false
swCalibration Notes	Chapter	0..1	aggr	This element contains calibration instructions and hints for a calibration engineer. **Tags:** atp.Splitkey=swCalibrationNotes, swCalibration Notes.shortName xml.roleElement=true xml.sequenceOffset=60 xml.typeElement=false
swCarbDoc	Chapter	0..1	aggr	This element records the documentation requested by CARB. **Tags:** atp.Splitkey=swCarbDoc, swCarbDoc.shortName xml.roleElement=true xml.sequenceOffset=80 xml.typeElement=false

▽

△

Class	**SwComponentDocumentation**			
swDiagnostics Notes	Chapter	0..1	aggr	This element contains general information about diagnostics issues within the component. **Tags:** atp.Splitkey=swDiagnosticsNotes, swDiagnostics Notes.shortName xml.roleElement=true xml.sequenceOffset=75 xml.typeElement=false
swFeatureDef	Chapter	0..1	aggr	This element contains the definition of the physical functionality of this software component. This definition is more or less formal and is intended to be delivered from modeling tools. **Tags:** atp.Splitkey=swFeatureDef, swFeatureDef.shortName xml.roleElement=true xml.sequenceOffset=20 xml.typeElement=false
swFeatureDesc	Chapter	0..1	aggr	This element contains the textual description of the software functionality of this software component. Expert should write this description. **Tags:** atp.Splitkey=swFeatureDesc, swFeatureDesc.shortName xml.roleElement=true xml.sequenceOffset=30 xml.typeElement=false
swMaintenance Notes	Chapter	0..1	aggr	This element contains information regarding the software maintenance of the component. **Tags:** atp.Splitkey=swMaintenanceNotes, swMaintenance Notes.shortName xml.roleElement=true xml.sequenceOffset=70 xml.typeElement=false
swTestDesc	Chapter	0..1	aggr	This element contains suggestions and hints for the test of the software functionality of this software component. **Tags:** atp.Splitkey=swTestDesc, swTestDesc.shortName xml.roleElement=true xml.sequenceOffset=50 xml.typeElement=false

Table 12.1: SwComponentDocumentation

Class	**Chapter**			
Note	This meta-class represents a chapter of a document. Chapters are the primary structuring element in documentation.			
Base	*ARObject*, *DocumentViewSelectable*, *Identifiable*, *MultilanguageReferrable*, *Paginateable*, *Referrable*			
Aggregated by	ChapterOrMsrQuery.chapter, MsrQueryResultChapter.chapter, SwComponentDocumentation.chapter, SwComponentDocumentation.swCalibrationNotes, SwComponentDocumentation.swCarbDoc, SwComponentDocumentation.swDiagnosticsNotes, SwComponentDocumentation.swFeatureDef, SwComponentDocumentation.swFeatureDesc, SwComponentDocumentation.swMaintenanceNotes, SwComponentDocumentation.swTestDesc, System.systemDocumentation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	**Chapter**			
chapterModel	ChapterModel	0..1	aggr	This represents the overall contents of the chapter. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.typeElement=false xml.typeWrapperElement=false
helpEntry	String	0..1	attr	This specifies an entry point in an online help system to be linked with the parent class. The syntax shall be defined by the applied help system respectively help system generator. Maybe it is a concatenated Identifier, but as of now we leave it as an arbitrary string. **Tags:** xml.attribute=true

Table 12.2: Chapter

Class	**ChapterModel**			
Note	This is the basic content model of a chapter except the Chapter title. This can be utilized in general chapters as well as in predefined chapters. A chapter has content on three levels: 1. chapter content 2. topics 3. subchapters			
Base	*ARObject*			
Aggregated by	Chapter.chapterModel, PredefinedChapter.chapterModel			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
chapter	ChapterOrMsrQuery	0..1	aggr	This is a particular subchapter. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=200 xml.typeElement=false xml.typeWrapperElement=false
chapterContent	ChapterContent	0..1	aggr	This is the chapter content which is not a topic or a subchapter. It is the content which is directly in the chapter. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=30 xml.typeElement=false xml.typeWrapperElement=false
topic1	TopicOrMsrQuery	0..1	aggr	This is a topic within the chapter. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=170 xml.typeElement=false xml.typeWrapperElement=false

Table 12.3: ChapterModel

13 Service Dependencies and Service Use Cases

13.1 Overview

Meta-class SwcServiceDependency represents a powerful concept to describe the service-related capabilities of an AtomicSwComponentType because it can be applied universally for all configurations of service-related interaction with ServiceSwComponentTypes (that represent the service-related basic software, as explained in Chapter 11.1) from the perspective of an AtomicSwComponentType.

Having this flexibility at one's disposal means that it is still necessary to understand in detail how to configure SwcServiceDependency and related meta-classes for specific service use cases.

This chapter contains a detailed description of the meta-classes related to SwcServiceDependency in the context of specific service use cases, as well as modeling hints for the configuration of the respective service use cases.

13.2 NvM Service Dependencies

The meta-class NvBlockNeeds is used to define requirements for configuring the NVRAM Manager Service from the perspective of an AtomicSwComponentType. In addition, it may define requirements on how the RTE shall implement writing strategies of an NvBlockSwComponentType.

An SwcInternalBehavior may provide several SwcServiceDependencys that in turn aggregate an NvBlockNeeds element where each defines the requirements from one NVRAM Block (for more information, see [36, SWS NVRAM Manager]).

A diagram that explains the modeling of ServiceNeeds for the NVRAM Manager Service can be found in Figure 11.12.

There are several use cases in which a software-component can interact with the NVRAM Manager service. Each use case is discussed in a separate sub-chapter.

Enumeration	**RamBlockStatusControlEnum**
Note	This enumeration type defines options for how the management of the ramBlock status is controlled.
Aggregated by	NvBlockNeeds.ramBlockStatusControl
Literal	***Description***
api	The ramBlock status is controlled via service interface by usage of the SetRamBlockStatus operation. **Tags:** atp.EnumerationLiteralIndex=0
nvRamManager	The ramBlock status is controlled exclusively by the Nv Ram Manager. **Tags:** atp.EnumerationLiteralIndex=1

Table 13.1: RamBlockStatusControlEnum

13.2.1 NvM Use Case: Permanent RAM Block

Scenario: a AtomicSwComponentType is using an NVRAM Block with a Permanent RAM Block implemented by a PerInstanceMemory section or a VariableDataPrototype in the role arTypedPerInstanceMemory. In either case, the required memory for the Permanent RAM Block is allocated by the RTE during ECU Configuration.

In this case the following rules apply:

[TPS_SWCT_02501] Setup for NvM Use Case: Permanent RAM Block ⌈

ServiceNeeds kind NvBlockNeeds

RoleBasedPortAssignment

For every used ClientServerInterface provided by the NvM it is necessary to create a RoleBasedPortAssignment and set the value of the attribute role of the RoleBasedPortAssignment to the name of the used standardized ClientServerInterface. The following ClientServerInterfaces shall (i.e. lower multiplicity > 0) or can (lower multiplicity = 0) be used in this context:

- NvMService [0..1]
- NvMNotifyJobFinished [0..1]
- NvMNotifyInitBlock [0..1]
- NvMAdmin [0..1]

RoleBasedDataAssignment

RoleBasedDataAssignment shall be created that refers to either the untyped PerInstanceMemory in the role usedPim or to the (typed variant of per-instance memory) VariableDataPrototype in the role usedDataElement. The value of the attribute role of the RoleBasedDataAssignment shall be set to ramBlock.

Optionally, it is possible to create an additional RoleBasedDataAssignment to a ParameterDataPrototype in the role usedParameterElement. The value of the ParameterDataPrototype is then taken as the initial or default value for the NVRAM Block. In this case the value of the attribute role of the RoleBasedDataAssignment shall be set to defaultValue.
Therefore, the following roles are applicable:

- ramBlock [1]
- defaultValue [0..1]

RepresentedPortGroup

N/A

⌋

The intention here is that the usage of the role usedDataElement, which is typed by AutosarVariableRef, shall only be done in a local scope, i.e. that usedDataElement.localVariable shall exist and the instanceRef in the role usedDataElement.autosarVariable shall **NOT** exist.

[constr_10527] Existence of RoleBasedDataAssignment.usedDataElement.autosarVariable for RoleBasedDataAssignment.role = ramBlock

Imposition time: CP: IT_RteGen

⌈If the attribute RoleBasedDataAssignment.role is set to the value ramBlock, then the reference RoleBasedDataAssignment.usedDataElement.autosarVariable shall not exist.⌋

The same issue does not necessarily apply for the mentioned usage of usedParameterElement. It would be possible to source this parameter value from a PortPrototype without breaking any AUTOSAR rules.

For more information, refer to [SWS_NvM_00734], [SWS_NvM_00735], [SWS_NvM_00736], and [SWS_NvM_00737].

This service use case can be applied alternatively for a connection to the NvM service component and for a connection to an NvBlockSwComponentType.

It is the responsibility of the NVRAM Manager to provide the content of the NVRAM Block in this Permanent RAM Block during startup or on explicit request and to write back the content to the storage medium during shut-down or on explicit request.

13.2.2 NvM Use Case: Temporary RAM Block

Scenario: an AtomicSwComponentType is using some NVRAM Block with a Temporary RAM Block.

In this case the AtomicSwComponentType is responsible for allocating sufficient memory. In other words, the AtomicSwComponentType shall provide a memory area that is available to the API call to the NVRAM Manager for storage of the NV data.

[TPS_SWCT_02502] Setup for NvM Use Case: Temporary RAM Block ⌈

ServiceNeeds kind NvBlockNeeds

RoleBasedPortAssignment

This is mandatory for the described scenario. For every used ClientServerInterface provided by the NvM it is necessary to create a RoleBasedPortAssignment and set the value of the attribute role of the RoleBasedPortAssignment to the name of the used ClientServerInterface. The following ClientServerInterfaces shall (i.e. lower multiplicity > 0) or can (lower multiplicity = 0) be used in this context:

- NvMService [1]

- NvMNotifyJobFinished [0..1]
- NvMNotifyInitBlock [0..1]
- NvMAdmin [0..1]

RoleBasedDataAssignment
The usage of a RoleBasedDataAssignment with attribute role set to defaultValue is optional and depends on whether an initial value is required.

- defaultValue [0..1]

RoleBasedDataTypeAssignment
By this means it is possible to define the data-type of a Temporary RAM Block. The data type information can be used to calculate the NVRAM Block size. [constr_1301] applies.

- temporaryRamBlock [0..1]

RepresentedPortGroup
N/A

⌋

[constr_1301] Existence of RoleBasedDataTypeAssignment.role vs. RoleBasedDataAssignment.role

Imposition time: CP: IT_RteGen

⌈The usage of a RoleBasedDataTypeAssignment with attribute role set to the value temporaryRamBlock is only allowed if **no** RoleBasedDataAssignment defined with attribute role set to value defaultValue exists in the owning SwcServiceDependency.⌋

The rationale for [constr_1301] is that the existence of a RoleBasedDataAssignment would already provide sufficient information for the intended purpose. The parallel existence of a RoleBasedDataTypeAssignment is therefore fully redundant and could only lead to potential inconsistencies.

For more information, refer to [SWS_NvM_00734], [SWS_NvM_00735], [SWS_NvM_00736], and [SWS_NvM_00737].

13.2.3 NvM Use Case: RAM Block with explicit synchronization using Mirror Interfaces

Scenario: an AtomicSwComponentType is using an NVRAM Block where the RAM Block uses explicit synchronization by means of mirror interfaces. In this case the RAM Block does not necessarily have to be formally described by means of a PerInstanceMemory or a VariableDataPrototype in the role arTypedPerInstanceMemory.

Consequently, the software-component itself is responsible for the allocation of memory. On the other hand, this can also mean that the software-component can use several RAM Blocks instead of just one RAM Block.

[TPS_SWCT_02504] Setup for NvM Use Case: RAM Block with explicit synchronization using Mirror Interfaces ⌈

ServiceNeeds kind NvBlockNeeds

RoleBasedPortAssignment
This is mandatory for the described scenario. For every used ClientServerInterface provided by the NvM it is necessary to create a RoleBasedPortAssignment and set the value of the attribute role of the RoleBasedPortAssignment to the name of the used ClientServerInterface. The following ClientServerInterfaces shall (i.e. lower multiplicity > 0) or can (lower multiplicity = 0) be used in this context:

- NvMService [0..1]
- NvMNotifyJobFinished [0..1]
- NvMNotifyInitBlock [0..1]
- NvMAdmin [0..1]
- NvMMirror [1]

RoleBasedDataAssignment
In this scenario the existence of a RoleBasedDataAssignment is optional. The RoleBasedDataAssignment needs to reference a ParameterDataPrototype aggregated by the enclosing SwcInternalBehavior in the role perInstanceParameter or sharedParameter.

- defaultValue [0..1]

RoleBasedDataTypeAssignment
By this means it is possible to define the data-type of a temporary RAM Block and used internal data structure in the case of explicit synchronization with NvM-Mirror interface respectively. The data type information can be used to calculate the NVRAM Block size and minimum Permanent RAM Block size. [constr_1301] applies.

- temporaryRamBlock [0..1]

RepresentedPortGroup
N/A

⌋

For more information, refer to [SWS_NvM_00734], [SWS_NvM_00735], [SWS_NvM_00736], [SWS_NvM_00737], and [SWS_NvM_00738].

13.2.4 NvM Use Case: Software-Components using Nv Data provided by NvBlockSwComponentType (not ServiceSwComponent of NvM)

Scenario: an AtomicSwComponentType is using an NVRAM Block managed by an NvBlockSwComponentType (see Chapter 11.4.2, as opposed to an NVRAM Block provided by a ServiceSwComponentType). Constraints [constr_1148], [constr_1149], and [constr_2011] apply.

[TPS_SWCT_02503] Setup for NvM Use Case: Software-Components using Nv Data provided by NvBlockSwComponentType ⌈

ServiceNeeds kind NvBlockNeeds

RoleBasedPortAssignment

This is mandatory for the described scenario. For every used ClientServerInterface provided by the NvM it is necessary to create a RoleBasedPortAssignment and set the value of the attribute role of the RoleBasedPortAssignment to the name of the used ClientServerInterface. The following ClientServerInterfaces shall (i.e. lower multiplicity > 0) or can (lower multiplicity = 0) be used in this context:

- NvMService [0..1]
- NvMNotifyJobFinished [0..1]
- NvMNotifyInitBlock [0..1]
- NvMAdmin [0..1]

For every PortPrototype of a software-component typed by an NvDataInterface defining a SwcServiceDependency it is necessary to create a RoleBasedPortAssignment and set the value of the attribute role of the attribute assignedPort to the value NvDataPort:

- NvDataPort [1..*]

RoleBasedDataAssignment

N/A

RepresentedPortGroup

N/A

For supporting this use case the value of attribute SwcServiceDependency.category shall be set to **NV_BLOCK_COMPONENT**.⌋

Although a RoleBasedPortAssignment is used in the case sketched in [TPS_SWCT_02503], the referenced PortPrototype is typed by either an NvDataInterface[1] or[2] a SenderReceiverInterface.

[1] This is the typical case.
[2] see [constr_2011]

For more information, refer to [SWS_NvM_00734], [SWS_NvM_00735], [SWS_NvM_00736], and [SWS_NvM_00737]. Note that NvBlockNeeds (described in Chapter 11.4.5) is not in the scope of this use case.

13.2.5 NvM Use Case: Software-Components using Nv Data provided by NvBlockSwComponentType with individual settings in NvBlockNeeds

Scenario: an AtomicSwComponentType is using an NVRAM Block managed by an NvBlockSwComponentType (see Chapter 11.4.2). This service use case is similar to [TPS_SWCT_02503].

In contrast to [TPS_SWCT_02503], this use case foresees the existence of an NvDataInterface that aggregates multiple nvData and the user expects individual nvData to observe different configurations provided by NvBlockNeeds, as explained in Chapter 7.11.2.3.

This way, the configuration of NvBlockNeeds can be applied on a finer granularity, i.e. on the level of individual nvData, in comparison to the service use case described in [TPS_SWCT_02503].

[TPS_SWCT_01884] Setup for NvM Use Case: Software-Components using individually configured Nv Data provided by NvBlockSwComponentType ⌈

ServiceNeeds kind NvBlockNeeds

RoleBasedPortAssignment valid roles:

- NvMService [0..1]
- NvMNotifyJobFinished [0..1]
- NvMNotifyInitBlock [0..1]
- NvMAdmin [0..1]

RoleBasedDataAssignment valid roles:

- nvData [1..*]

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

For supporting this use case the value of attribute SwcServiceDependency.category shall be set to **NV_BLOCK_COMPONENT**.⌋

13.3 Watchdog Service Dependencies

The meta-class SupervisedEntityNeeds is used to define requirements for configuring the Watchdog Service. For the terms related to the [38, Watchdog Manager].

13.3.1 Watchdog Service Use Case: Local Supervision

The service interaction with the *Watchdog Manager* consists of two aspects:

- supervised entity
- checkpoint

For each of the two aspects a separate ServiceNeeds is defined. However, the SwcServiceDependencys that own these ServiceNeeds are semantically bound and cannot be used independently of each other.

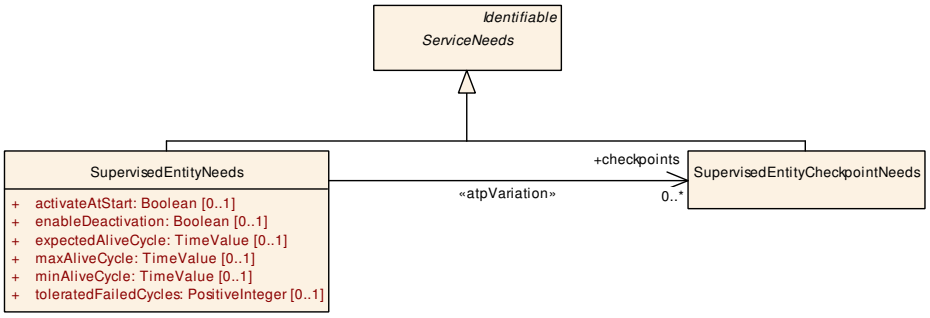

Figure 13.1: Modeling of ServiceNeeds for the watchdog

In other words, the usage of two kinds of SwcServiceDependency in concert creates a higher-level semantics. Of course, in order to express this higher-level semantics a reference between the SwcServiceDependencys has to be available.

However, since the SwcServiceDependency represents a generic concept, the actual reference needs to be implemented on the level of a specific subclass of ServiceNeeds, in this case the SupervisedEntityNeeds and the SupervisedEntityCheckpointNeeds.

The former refers to the latter in order to express the relation of a supervised entity to its checkpoints.

Class	**SupervisedEntityNeeds**			
Note	Specifies the abstract needs on the configuration of the Watchdog Manager for one specific Supervised Entity.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
activateAtStart	Boolean	0..1	attr	true/false: supervision activation status of Supervised Entity shall be enabled/disabled at start.

▽

△

Class	**SupervisedEntityNeeds**			
checkpoints	SupervisedEntity CheckpointNeeds	*	ref	This reference indicates the checkpoints belonging to the Supervised Entity. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=checkpoints, checkpoints.supervisedEntity CheckpointNeeds, checkpoints.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
enable Deactivation	Boolean	0..1	attr	true: software-component shall be allowed to deactivate supervision of this SupervisedEntity false: software-component shall be not allowed to deactivate supervision of this SupervisedEntity
expectedAlive Cycle	TimeValue	0..1	attr	Expected cycle time of alive trigger of this Supervised Entity (in seconds).
maxAliveCycle	TimeValue	0..1	attr	Maximum cycle time of alive trigger of this Supervised Entity (in seconds).
minAliveCycle	TimeValue	0..1	attr	Minimum cycle time of alive trigger of this Supervised Entity (in seconds).
toleratedFailed Cycles	PositiveInteger	0..1	attr	Number of consecutive failed alive cycles for this SupervisedEntity which shall be tolerated until the supervision status of the SupervisedEntity is set to WDGM_ALIVE_EXPIRED (see SWS WdgM for more details). Note that this value has to be recalculated with respect to the WdgM's own cycle time for ECU configuration.

Table 13.2: SupervisedEntityNeeds

[constr_1985] Existence of the reference in the role `SupervisedEntityNeeds.toleratedFailedCycles`

Imposition time: CP: `IT_RteGen`

⌈For each `SupervisedEntityNeeds`, the reference to `BswInternalBehavior` in the role `toleratedFailedCycles` shall exist.⌋

Class	**SupervisedEntityCheckpointNeeds**			
Note	Specifies the abstract needs on the configuration of the Watchdog Manager to support a Checkpoint for a Supervised Entity.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.3: SupervisedEntityCheckpointNeeds

13.3.2 Watchdog Service Use Case: *Global Supervision Status* notification

Scenario: an `AtomicSwComponentType` requires receiving the *Global Supervision Status* that is combined from all individual *Supervised Entities*. In this case the following setup applies:

[TPS_SWCT_02019] Setup for `AtomicSwComponentType` which requires *Global Supervision Status* notification ⌈

ServiceNeeds kind `GlobalSupervisionNeeds`

RoleBasedPortAssignment valid `role`s:

- `WdgM_GlobalMode` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

For more information, refer to [SWS_WdgM_00336].

13.3.3 Watchdog Service Use Case: Control global supervision or get global supervision status

Scenario: an `AtomicSwComponentType` either controls the global operation of the watchdog manager or gets information about the current operation status, requiring at least one of the following use cases:

- Set the current mode of Watchdog Manager
- Get the current mode of the Watchdog Manager
- Get the global supervision status of the Watchdog Manager
- Identifier of the supervised entity that first reached the expired state
- Instruct the Watchdog Manager to cause a watchdog reset

For instance, the software-component sets the current mode of the Watchdog Manager according to the operational state of the ECU or polls the global supervision status.

In this case the following setup applies:

[TPS_SWCT_01703] Setup for `AtomicSwComponentType` which sets or gets the Global Supervision Status ⌈

ServiceNeeds kind `GlobalSupervisionNeeds`

RoleBasedPortAssignment valid `role`s:

- `WdgM_GlobalSupervision` [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Class	**GlobalSupervisionNeeds**			
Note	Specifies the abstract needs on the configuration of the Watchdog Manager to get access on the Global Supervision control and status interface.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.4: GlobalSupervisionNeeds

13.3.4 Watchdog Service Use Case: Software-component wants to obtain the status of a local supervision

Scenario: a software-component wants to obtain the status of a local supervision. For this purpose, it exposes an RPortPrototype typed by ClientServerInterface WdgM_LocalSupervisionStatus towards the WdgM.

[TPS_SWCT_01704] Definition of supervised entity ⌈

ServiceNeeds kind : SupervisedEntityNeeds

RoleBasedPortAssignment valid roles:

- WdgM_LocalSupervisionStatus [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

An SwcInternalBehavior may provide several SupervisedEntityNeeds elements, where each defines the requirements in relation to one supervised entity.

Note that in this situation an AtomicSwComponentType contains several *Checkpoints* that refer to a *Supervised Entity*.

In this case the *Supervised Entity* shall indicate to the *Watchdog Manager* the existence of this *Checkpoint* for configuration, and shall indicate at runtime that the *Supervised Entity* has reached the *Checkpoint*.

For more information, refer to [SWS_WdgM_91004].

13.3.5 Watchdog Service Use Case: Software-component wants to report a checkpoint

Scenario: a software-component wants to report a checkpoint to the WdgM. For this purpose the software-component exposes an `RPortPrototype` to the WdgM.

[TPS_SWCT_01705] Definition of Checkpoints ⌈

ServiceNeeds kind : `SupervisedEntityCheckpointNeeds`

RoleBasedPortAssignment valid `role`s:

- `WdgM_LocalSupervision` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

This scenario covers the reporting of a single checkpoint. In many cases, several checkpoints are reported in the context of a given supervised entity.

For more information, refer to [SWS_WdgM_00333].

13.4 COM Manager Service Needs

The meta-class `ComMgrUserNeeds` is used to define requirements for configuring the `ComM` Service.

An `SwcInternalBehavior` may provide several `ComMgrUserNeeds` elements where each defines the requirements from one “user” of the ComM Service. In particular, it defines which `PortGroup` is associated with this “user”.

Class	**ComMgrUserNeeds**			
Note	Specifies the abstract needs on the configuration of the Communication Manager for one "user".			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
maxComm Mode	MaxCommModeEnum	0..1	attr	Maximum communication mode requested by this ComM user.

Table 13.5: ComMgrUserNeeds

Enumeration	**MaxCommModeEnum**
Note	Maximum bus communication mode required by a user of the Communication Manager Service.
Aggregated by	ComMgrUserNeeds.maxCommMode
Literal	***Description***
full	Full communication is requested. **Tags:** atp.EnumerationLiteralIndex=0
none	No communication is requested. **Tags:** atp.EnumerationLiteralIndex=1
silent	Silent communication is requested: Only listening but not "talking". **Tags:** atp.EnumerationLiteralIndex=2

Table 13.6: MaxCommModeEnum

13.4.1 ComM Use Case: read current ComM Mode

Scenario: a `AtomicSwComponentType` reads the current ComM mode.

In this case the following rules apply:

[TPS_SWCT_01019] `AtomicSwComponentType` reads the current ComM mode ⌈

ServiceNeeds kind `ComMgrUserNeeds`

RoleBasedPortAssignment valid `role`s:

- `ComM_CurrentMode` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroup
Reference to the applicable `PortGroup` [0..1]

⌋

For more information, refer to [SWS_ComM_00847].

13.4.2 ComM Use Case: request ComM Mode

Scenario: a AtomicSwComponentType requests a ComM mode. It may also check later whether the requested ComM mode has become effective.

In this case the following rules apply:

[TPS_SWCT_01020] AtomicSwComponentType requests a ComM mode. It may also check later whether the requested ComM mode has become effective ⌈

ServiceNeeds kind ComMgrUserNeeds

RoleBasedPortAssignment valid roles:

- ComM_CurrentMode [1]
- ComM_UserRequest [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
Reference to the applicable PortGroup [0..1]

⌋

For more information, refer to [SWS_ComM_00848].

13.4.3 ComM Use Case: Software-Component acts as a Mode Manager that influences the ECU State

Scenario: a AtomicSwComponentType acts as a mode manager that influences the ECU state.

In this case the following rules apply:

[TPS_SWCT_01021] AtomicSwComponentType acts as a mode manager that influences the ECU state ⌈

ServiceNeeds kind ComMgrUserNeeds

RoleBasedPortAssignment valid roles:

- ComM_CurrentMode [0..1]
- ComM_UserRequest [0..1]
- ComM_ECUModeLimitation [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

For more information, refer to [SWS_ComM_00741].

13.4.4 Read PNC ComM Mode

Scenario: an AtomicSwComponentType reads the current PNC ComM mode.

[TPS_SWCT_01811] AtomicSwComponentType reads the current PNC ComM mode ⌈

ServiceNeeds kind : ComMgrUserNeeds

RoleBasedPortAssignment valid roles:

- ComM_UserRequest [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
Reference to the applicable PortGroup associated with the particular partial network.

⌋

For clarification, the difference between the two service use case descriptions [TPS_SWCT_01019] and [TPS_SWCT_01811] is that the latter reads the ComM mode in the context of a PNC definition while the former does not consider partial networking.

13.5 ECU State Manager Service Needs

The meta-class EcuStateMgrUserNeeds is used to define the requirements for configuring the ECU State Manager Service.

An SwcInternalBehavior may provide several EcuStateMgrUserNeeds elements where each defines the requirements from one “user” of the EcuM Service (for the terms related to the [39, SWS ECU State Manager]).

Class	**EcuStateMgrUserNeeds**			
Note	Specifies the abstract needs on the configuration of the ECU State Manager for one "user". This class currently contains no attributes. Its name can be regarded as a symbol identifying the user from the viewpoint of the component or module which owns this class.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
–	–	–	–	–

Table 13.7: EcuStateMgrUserNeeds

13.5.1 EcuM Use Case: read current ECU Mode

Scenario: a AtomicSwComponentType reads the current ECU mode.

In this case the following rules apply:

[TPS_SWCT_01856] AtomicSwComponentType reads the current ECU mode ⌈

ServiceNeeds kind EcuStateMgrUserNeeds

RoleBasedPortAssignment valid roles:

- EcuM_CurrentMode [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

13.5.2 EcuM Use Case: request a certain ECU state

Scenario: a AtomicSwComponentType needs to keep the ECU alive or needs to execute operations before the ECU is shut down. For this purpose the AtomicSwComponentType may request either the state RUN or POST_RUN.

In this case the following rules apply:

[TPS_SWCT_01857] AtomicSwComponentType shall keep the ECU alive ⌈

AtomicSwComponentType needs to keep the ECU alive or needs to execute operations before the ECU is shut down.

ServiceNeeds kind EcuStateMgrUserNeeds

RoleBasedPortAssignment valid roles:

- EcuM_StateRequest [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

13.5.3 EcuM Use Case: select Shutdown Target

Scenario: a AtomicSwComponentType wants to select a shutdown target.

In this case the following rules apply:

[TPS_SWCT_01016] AtomicSwComponentType wants to select a shutdown target ⌈

ServiceNeeds kind EcuStateMgrUserNeeds

RoleBasedPortAssignment valid roles:

- EcuM_ShutdownTarget [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

13.5.4 EcuM Use Case: select Boot Target

Scenario: a AtomicSwComponentType wants to select a boot target.

In this case the following rules apply:

[TPS_SWCT_01017] `AtomicSwComponentType` wants to select a boot target ⌈

ServiceNeeds kind `EcuStateMgrUserNeeds`

RoleBasedPortAssignment valid `role`s:

- `EcuM_BootTarget` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroup
N/A

⌋

13.6 BswM

All use cases for interaction of an application software-component with the `BswM` require the aggregation in the role `serviceNeeds` of `BswMgrNeeds`, a subclass of `ServiceNeeds`, at `SwcServiceDependency`.

Class	**BswMgrNeeds**			
Note	Specifies the abstract needs on the configuration of the Basic Software Manager for one "user".			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
–	–	–	–	–

Table 13.8: BswMgrNeeds

13.6.1 Partial Networking

One specific use case for the existence of a `SwcServiceDependency` with respect to the interaction with the `BswM` is the support for partial networking, in particular the association of a `PortGroup` and the associated `PortPrototype`s that act as *VFC control ports* and *VFC status ports*.

For more details, refer to Chapter 4.8.

In this case the following rules apply:

[TPS_SWCT_01126] Access to partial networking via BswM ⌈

ServiceNeeds kind `BswMgrNeeds`

RoleBasedPortAssignment valid `role`s:

- control [0 .. 1]
- status [0 .. 1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
Reference to the applicable PortGroup associated with the particular partial network.

⌋

The multiplicities of the RoleBasedPortAssignments for this case have been defined under the assumption that a given software-component may or may not have a *VFC control port*. Also, it may have a *VFC status port*. Technically, there could be several *VFC status ports* per software-component but most likely there is only one *VFC status port*.

13.6.2 Mode Manager

A software-component that acts as a mode manager exposes a PPortPrototype typed by a ModeSwitchInterface. By this means the mode manager communicates changes of the particular mode to the connected mode users.

On the side of the BswM, an RPortPrototype typed by a ModeSwitchInterface used to receive notifications of mode switches will have to be established (for more details, refer to [SWS_BswM_00200]).

In this case the following rules apply:

[TPS_SWCT_01552] Software-component acts as a mode manager ⌈

ServiceNeeds kind BswMgrNeeds

RoleBasedPortAssignment valid roles:

- AppModeInterface [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

A slight variation of this use case exists if the Application Mode Manager serves mode users that consist of both the BswM and other ApplicationSwComponentTypes.

[TPS_SWCT_01572] Application Mode Manager interacts with both BswM and other ApplicationSwComponentTypes ⌈If an Application Mode Manager interacts with both BswM and other ApplicationSwComponentTypes the following requirements on the modeling of this scenario shall be taken into account:

Mode Request For the configuration of mode requests two separate AbstractRequiredPortPrototypes shall exist:

- One AbstractRequiredPortPrototype shall be typed by a SenderReceiverInterface with attribute isService set to true.

  This AbstractRequiredPortPrototype shall be connected to the SwComponentPrototype typed by a ServiceSwComponentType representing the BswM.

- One AbstractRequiredPortPrototype shall be typed by a SenderReceiverInterface with attribute isService set to false.

  This AbstractRequiredPortPrototype shall be connected to SwComponentPrototypes typed by ApplicationSwComponentTypes that request mode changes.

Mode Switch Notification An Application Mode Manager that sends mode switch notifications to both BswM and other ApplicationSwComponentTypes shall expose a single AbstractProvidedPortPrototype for sending the mode switch notification to both the BswM and ApplicationSwComponentTypes.

The value of the attribute ModeSwitchInterface.isService shall be set to false.

⌋

Rationale for [TPS_SWCT_01572]: technically, the existence of two separate AbstractProvidedPortPrototype for sending the mode switch notification to both the BswM and ApplicationSwComponentTypes would end up in two separate mode machines in the RTE and it would be a tough challenge to keep both mode machines perfectly synchronized.

Therefore, the exception regarding the usage of the attribute isService is justified to mitigate this effect.

On the mode request side, however, the situation is entirely different because the mode requests need arbitration by the Application Mode Manager anyway. This is completely in the scope of the implementation of the Application Mode Manager and AUTOSAR has no stakes in further standardizing this aspect.

Therefore, there is no motivation for a further exception with respect to the value of isService.

[TPS_SWCT_01664] BswM acts as a mode requester towards an application mode manager ⌈The SwcServiceDependency that covers this use case shall refer to an RPortPrototype for the reception of the mode request and optionally to a PPortPrototype for the sending of the mode switch notification.

ServiceNeeds kind BswMgrNeeds

RoleBasedPortAssignment valid roles:

- AppModeInterface [0..1]

RoleBasedDataAssignment valid roles:

- AppModeRequestInterface [1]

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

[constr_1680] Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = AppModeRequestInterface

Imposition time: CP: IT_RteGen

⌈If the attribute RoleBasedDataAssignment.role is set to the value AppModeRequestInterface, then the reference RoleBasedDataAssignment.usedDataElement.localVariable shall not exist.⌋

For an explanation of the existence of [constr_1680], it is not intended to provide access to local variables inside the SwcInternalBehavior.

13.6.3 Mode User

A software-component that acts as a mode user exposes an RPortPrototype typed by a ModeSwitchInterface. By this means the software-component can be notified by mode switches executed at the mode manager (in this case the BswM).

On the side of the BswM, a PPortPrototype typed by a ModeSwitchInterface used to send out notifications of mode switches will have to be established (for more details, refer to [SWS_BswM_00202]).

In this case the following rules apply:

[TPS_SWCT_01553] Software-component acts as a mode user ⌈

ServiceNeeds kind BswMgrNeeds

RoleBasedPortAssignment valid roles:

- AppModeInterface [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

13.6.4 Mode Requester

A software-component that acts as a mode requester exposes a PPortPrototype typed by a SenderReceiverInterface. By this means the software-component can send mode requests towards the mode manager (in this case the BswM).

On the side of the BswM, an RPortPrototype typed by a SenderReceiverInterface used to request mode switches will have to be established (for more details, refer to [SWS_BswM_00201]).

In this case the following rules apply:

[TPS_SWCT_01554] Software-component acts as a mode requester ⌈

ServiceNeeds kind BswMgrNeeds

RoleBasedPortAssignment valid roles:
N/A

RoleBasedDataAssignment valid roles:

- AppModeRequestInterface [1]

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

The constraint [constr_1680] applies for this service use case.

13.6.5 Service Oriented Use Cases

Support for service oriented communication is represented by a set of service use cases utilizing SwcServiceDependency in the interaction with the BswM. Specifically

the interaction of application software-components with ServiceDiscovery (via the BswM) is handled in this section.

The AUTOSAR ServiceDiscovery can be configured to run autonomously (without the need of application software-components to initiate the ServiceDiscovery) during the startup of the ECU. In such cases there is no need to define any service oriented use cases at the respective application software-components.

This approach has the advantage that the ServiceDiscovery is performed without knowledge of the application software-components. But it has the disadvantage that all the ServiceDiscovery is performed at startup, even if some application software-components might not require that service functionality right after startup.

Providing the application software-components with the possibility to individually control the ServiceDiscovery only when the functionality actually needs that information may allow a fine-grained control of the communication amount.

Whether a specific service instance is controlled autonomously or whether there is a dedicated application interaction to control the availability or subscription of a service can be defined individually per service instance in the [9, TPS System Template] (ProvidedServiceInstance.autoAvailable, ConsumedServiceInstance.autoRequire, and ConsumedEventGroup.autoRequire).

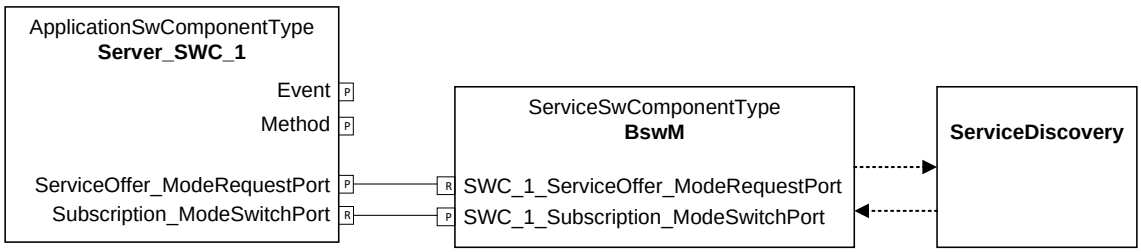

Figure 13.2: General interaction of Application - BswM - ServiceDiscovery

13.6.5.1 PortGroup supports Relation between Software-Component and service Instance

A service can be composed of an arbitrary number of

- SenderReceiverInterfaces representing events, field notifiers, and fire-and-forget methods
- ClientServerInterfaces representing methods, field getters, and field setters
- TriggerInterfaces representing fire-and-forget methods without arguments.

The [9, TPS System Template] provides means to define which SenderReceiverInterfaces and ClientServerInterfaces eventually build up the service in section titled “Description of Service Discovery Services in Classic Platform”.

This definition applies to the PortInterface level, thus it is not focusing on individual PortPrototypes.

If an application software-component would like to consume two instances of the same service, it would not be possible to identify which set of PortPrototypes belongs to one service instance and which set of PortPrototypes belongs to the other service instance.

The relation between PortPrototypes and service instances is defined using a PortGroup.

Example 13.1

In the example depicted in Figure 13.3, a server software-component provides two PortPrototypes, an event and a method. A PortGroup is used to group these two PortPrototypes.

Service use cases described later in this section utilize the SwcServiceDependency.representedPortGroup reference to define for which PortGroup (service instance) a dedicated service use case applies.

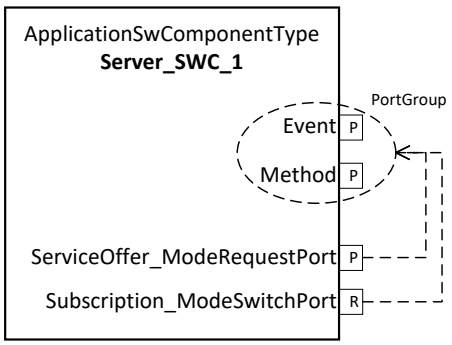

Figure 13.3: Usage of PortGroup to define which PortPrototypes belong to a service instance

The [9, TPS System Template] also provides means for defining event groups (ProvidedServiceInstance.eventHandler and ConsumedServiceInstance.consumedEventGroup).

Those event groups are not directly related to the PortGroups discussed in this section. They may be defined in a consistent way, but it is also possible that the event groups are defined in a different way than the PortGroups of a specific service instance.

It is the duty of the BswM configuration to define one or more adequate BswMRules to associate the event groups to the respective events collected in the PortGroups.

13.6.5.2 General Server interaction

The server has 2 use cases defined for the interaction with service discovery:

- service offer (Chapter 13.6.5.5)
- subscription status for events (Chapter 13.6.5.6).

The service offer makes this service instance available in the system.

As soon as the service offer has been made, every client can directly call the methods offered by this service instance. There is no way to place a dedicated subscription for calling the methods (including fire-and-forget methods).

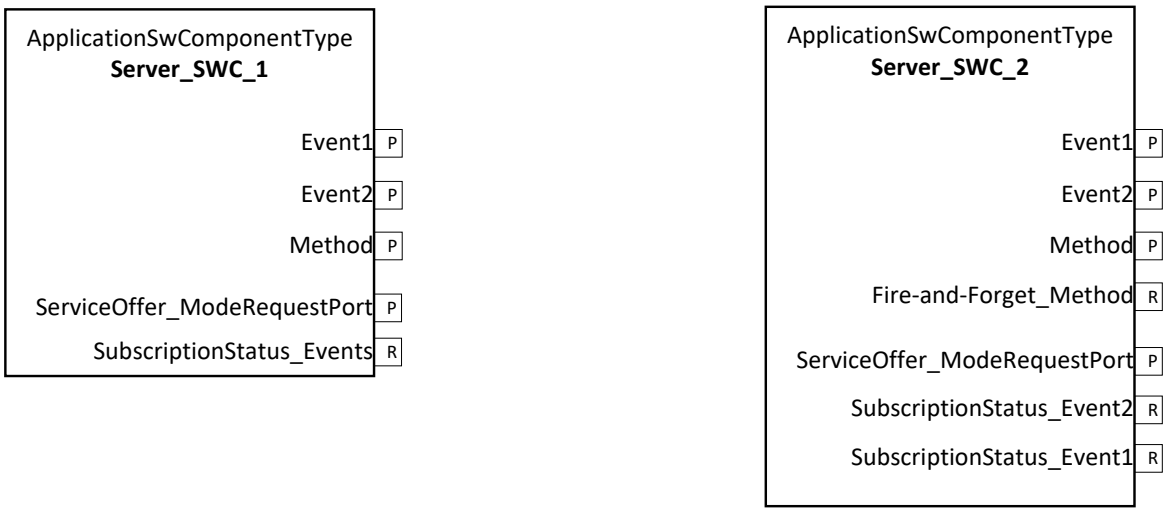

Figure 13.4: Server examples

The server may be interested in the information about the subscription of events (or groups of events) by any client. The granularity of the status information can be defined by the server application software-component.

Example 13.2

The servers depicted in the example in Figure 13.4 illustrate some aspects of the server service discovery approach:

The server *Server_SWC_1* is simple and just provides two events and one method. One `PPortPrototype` has been defined to offer this service and another `RPortPrototype` is used to receive information about the subscription status.

The server *Server_SWC_2* has some more features, it also provides two events and one method, and additionally receives a “call” of a fire-and-forget method. One `PPortPrototype` offers this service and two `RPortPrototype`s are used to receive information about the subscription status.

13.6.5.3 General Client interaction

The client has several use cases defined for the interaction with service discovery:

- event (and method) subscription (Chapter 13.6.5.7)
- event (and method) subscription status (Chapter 13.6.5.8)

The service discovery for clients in AUTOSAR is specified to consist of two steps from the client's perspective:

- *finding* a service instance and
- *subscribing* to an event (group).

On the level of application software-components and service definitions, the event groups are not visible. Event groups get introduced in the system description (see [9, TPS System Template]) in the context of definition of the communication matrix.

The event subscription in the service use cases are defined on the level of events. It is the duty of the `BswM` configuration to define one or more adequate `BswMRules` to derive the corresponding event groups out of the individual service instance events for subscriptions in the service discovery.

The application software-components on the *AUTOSAR classic Platform* do not have any means to influence the choice on the offered service instances during the service discovery *find*. This is the reason why there is no explicit *find* service use case defined in this section. The *find* is included in the respective subscription use cases.

From the client's perspective, there is no difference between subscribing to an event or "subscribing" to a method. The use case defined in Chapter 13.6.5.7 does not distinguish whether there are just

- events,
- events and methods,
- or just methods

involved. It is again the `BswM` which is configured to represent the corresponding actions for the service discovery.

Example 13.3

The example clients in Figure 13.5 illustrate some aspects of the client service discovery approach:

The exemplary client *Client_SWC_1* is simple and just consumes two events and one method. One `PPortPrototype` is defined to subscribe for all of the events and methods of this service.

One `RPortPrototype` is used to inform the client whether the subscription to the whole service was successful. This means: if there is a service instance *found* (this

enables the usage of the method) **and** the *subscription* to **both** events is successful, then the RPortPrototype indicates that the subscription is successful.

This also means, that if the *subscription* to at least one of the events is not successful, the indication for the whole service is not successful.

The client *Client_SWC_2* has some more features: it requires two events and one method, and additionally sends a fire-and-forget method. One PPortPrototype is defined to subscribe to this service's events and a second PPortPrototype exists to "subscribe" to the service's methods. Two RPortPrototypes are defined to receive the subscription status of the events and methods.

For the PPortPrototype, to "subscribe" to this service's methods means that (if not already performed by the other subscription to this service) a *find* is issued to the service discovery. If the *find* is successful, the notification on the *subscription* status at the RPortPrototype for the methods is performed with a successful indication. Thus the application software-component can start calling the methods of that service.

For the PPortPrototype, to subscribe to this service's events means that (if not already performed by the other subscription to this service) a *find* is issued to the service discovery.

If the *find* is successful, the *subscription* to the events is issued to the service discovery. If then the *subscription* to **both** events is successful, the notification on the *subscription* status at the RPortPrototype for the events is performed with a successful indication.

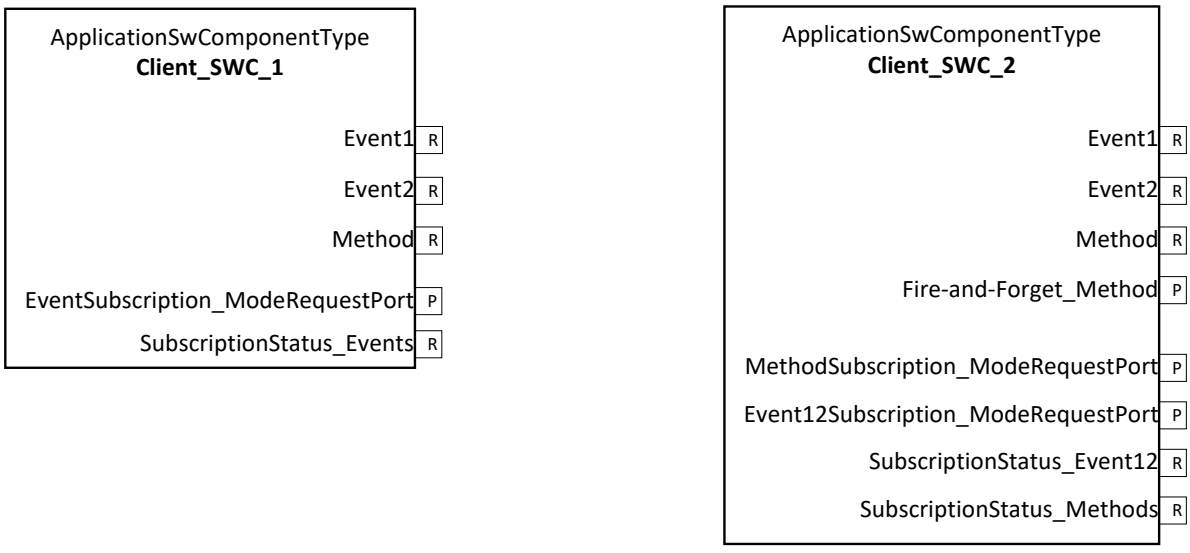

Figure 13.5: Client examples

Another example of the client interaction is given in Figure 13.8.

13.6.5.4 Event Reception Without Subscription

A side effect, which needs to be taken into account by the application software-components, arises from the separate handling of service discovery mode requests and the event communication.

As soon as an event is subscribed by one application software-component inside the ECU, this event is forwarded to all receivers on that ECU, regardless of whether they actually have subscribed to that event or not.

The communication path is not restricted by the service discovery or the BswM. Thus, there is no way to prevent the reception of events that have not been subscribed to by each individual receiving application software-component.

Example 13.4

One cause for the unintended reception of events is sketched in Figure 13.6. Two independent application software-components are interested in the same event of the same service instance.

Each application software-component has an RPortPrototype to actually receive the event. Each of the application software-components has a PPortPrototype to initiate the subscription to that event and an RPortPrototype to get notification on the event subscription status.

When one of the application software-component starts the subscription of the event (e.g. *Client_SWC_1*), then the BswM will forward the subscription request to the service discovery.

When the service discovery eventually receives the subscription acknowledgement the BswM gets notified and forwards that subscription status notification to **all** application software-components which have a corresponding event subscription status notification RPortPrototype defined.

Thus, *Client_SWC_1* gets a notification on the successful subscription of the event. But **also** *Client_SWC_2* get a notification on the successful subscription of that event, although *Client_SWC_2* didn't subscribe to that event!

Now, when the event messages actually arrive at that ECU, the events are indicated to be received to **all** the application software-components which have an RPortPrototype to receive the event. Thus *Client_SWC_1* will receive that event but also *Client_SWC_2* will receive the event.

One possible solution to that issue is to guard any subscription status notification and event reception with the application software-component own event subscription request: Only if the application software-component actually did subscribe to that event, then incoming subscription status notifications and event receptions will be considered by the application software-component.

Another approach might be to use RTEEvent.disabledMode configuration to disable the notification in a specific mode.

Another source of unintended event reception may be the definition of the communication matrix and the assignments of events to event groups.

If two events on the client application software-component are handled via two separate PPortPrototypes for the subscription of these events, but the events are defined to be part of the same event group in the communication matrix, then both events will be received by the application software-component, even if it asked only for the subscription of one event.

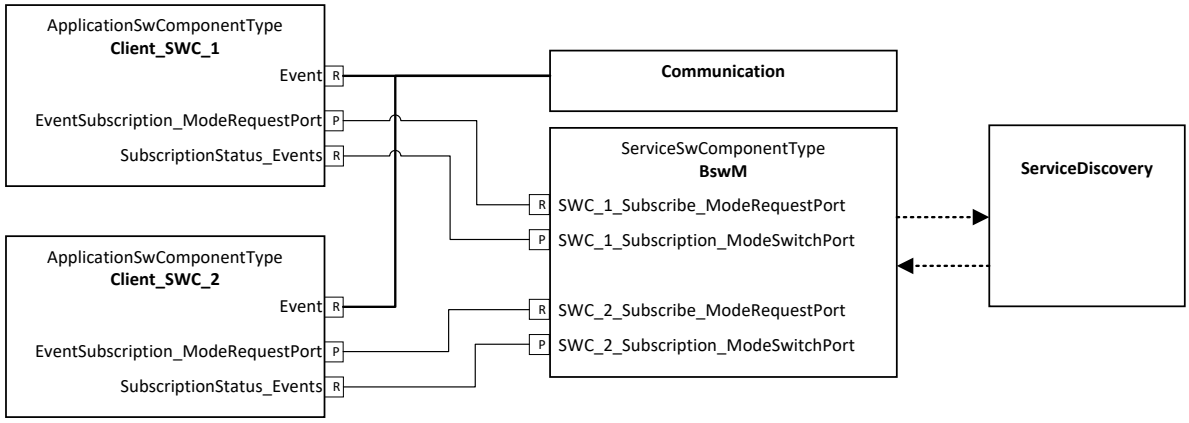

Figure 13.6: Unintended event reception

13.6.5.5 Use Case: Server Service Offer

A software-component that implements the server functionality acts as a mode requester and exposes a PPortPrototype typed by a SenderReceiverInterface. By this means, the software-component can send mode requests towards the BswM in order to *offer* and *stop offer* that service instance.

On the side of the BswM, a RPortPrototype typed by the same SenderReceiverInterface is used to request mode switches.

In this case the following rule applies:

[TPS_SWCT_03502] Software-component acts as a server and offers the service
⌈

ServiceNeeds kind BswMgrNeeds

RoleBasedPortAssignment valid roles:
N/A

RoleBasedDataAssignment valid roles:

- ServerServiceOffer [1]

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
Reference to the service instance PortGroup representing this server's PortPrototypes [1]

⌋

[constr_3688] Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = ServerServiceOffer

Imposition time: CP: IT_RteGen

⌈If the attribute RoleBasedDataAssignment.role is set to the value ServerServiceOffer, then the reference RoleBasedDataAssignment.usedDataElement.localVariable shall not exist.⌋

For an explanation of the existence of [constr_3688], it is not intended to provide access to local variables inside the SwcInternalBehavior.

13.6.5.6 Use Case: Server Service Subscription Status

A server instance sending events or field notifications might not need to produce and send those events if there are no subscriptions for that server instance events.

In order to notify the server instance whether there is at least one subscriber interested in the server's events a ModeSwitchInterface is available to receive the subscription notifications.

A software-component that acts as a server and is interested in the subscription status for the service instance events exposes an RPortPrototype typed by a ModeSwitchInterface. By this means, the software-component can be notified by the BswM on subscription changes.

On the side of the BswM, a PPortPrototype typed by the ModeSwitchInterface is used to send out notifications.

In this case, the following rules apply:

[TPS_SWCT_03503] Software-component receives notification on server event subscription status changes ⌈

ServiceNeeds kind BswMgrNeeds

RoleBasedPortAssignment valid roles:

- ServerEventSubscriptionStatus [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup

Reference to the service instance PortGroup representing this server's PortPrototypes (or the subset relevant for this notification) [1]

⌋

The granularity of the referenced representedPortGroup PortGroup may vary depending on the desired notification granularity.

One approach can be to use one PortGroup for the entire service instance. This may be the same PortGroup which is also used for the service offer in [TPS_SWCT_03502].

In this case any included PortPrototypes typed by a ClientServerInterface or TriggerInterface are ignored, as they do not participate in the subscription of events. This approach is sketched in the example *Service_SWC_1* in Figure 13.7.

Another approach can be to group one or some PortPrototypes in separate PortGroups and define a dedicated SwcServiceDependency for each of these PortGroups.

Example 13.5

This approach is illustrated in the example *Service_SWC_2* in Figure 13.7, where the *Service_SWC_2* has two RPortPrototypes to receive individual notification for *PortGroup1* and *PortGroup2*.

It is the duty of the BswM configuration to define one or more adequate BswMRules, which take the subscription status from the ServiceDiscovery and combine them to get the status which represents the subscription status of the events included in the specific PortGroup.

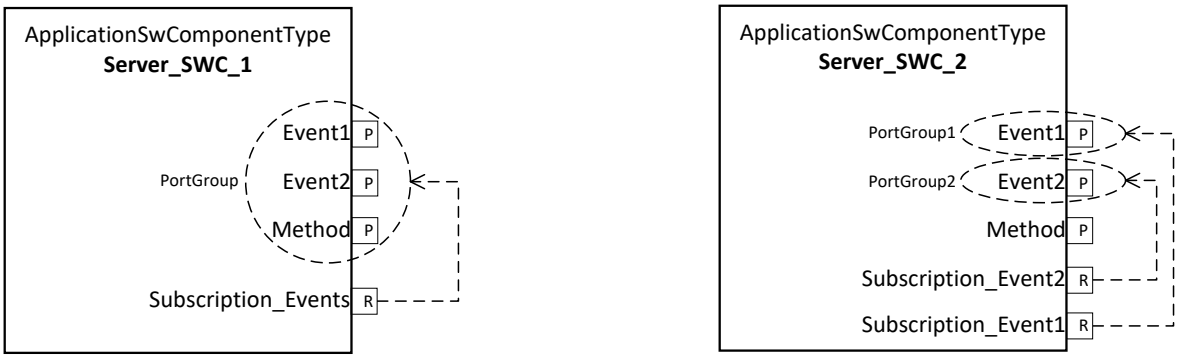

Figure 13.7: Service subscription notification examples

The server event subscription status use case ([TPS_SWCT_03503]) is not limited to servers where the offer is controlled by the application software-component. It is also possible to get subscription status information on a server's events where the server is autonomously offered.

13.6.5.7 Use Case: Client Event / Method Subscription

A software-component that implements the client functionality acts as a mode requester and exposes a PPortPrototype typed by a SenderReceiverInterface.

By this means, the software-component can send mode requests towards the BswM in order to *subscribe* and *stop subscribe* of dedicated events and methods.

On the side of the BswM, an RPortPrototype typed by the same SenderReceiverInterface is used to request mode switches.

In this case the following rule applies:

[TPS_SWCT_03504] Software-component acts as a client and subscribe to events and methods ⌈

ServiceNeeds kind BswMgrNeeds

RoleBasedPortAssignment valid roles:
N/A

RoleBasedDataAssignment valid roles:

- ClientEventSubscription [1]

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
Reference to the service instance PortGroup representing this client's PortPrototypes (or the subset relevant for this notification) [1]

⌋

[constr_3689] Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = ClientEventSubscription

Imposition time: CP: IT_RteGen

⌈If the attribute RoleBasedDataAssignment.role is set to the value ClientEventSubscription, then the reference RoleBasedDataAssignment.usedDataElement.localVariable shall not exist.⌋

For an explanation of the existence of [constr_3689], it is not intended to provide access to local variables inside the SwcInternalBehavior.

13.6.5.8 Use Case: Client Event and Method Subscription Status

A software-component that acts as a client and is interested in the subscription status for the events and methods exposes an RPortPrototype typed by a ModeSwitchInterface. By this means the software-component can be notified by the BswM whether subscription was successful.

On the side of the BswM, a PPortPrototype typed by the ModeSwitchInterface is used to send out notifications.

In this case the following rules apply:

[TPS_SWCT_03505] Software-component receives notification on client event and method subscription status changes ⌈

ServiceNeeds kind BswMgrNeeds

RoleBasedPortAssignment valid roles:

- ClientEventSubscriptionStatus [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
Reference to the service instance PortGroup representing this client's PortPrototypes (or the subset relevant for this notification) [1]

⌋

Generally, it is up to the definition of the PortGroups which PortPrototypes are included in the event status notification use case. A different definition of PortGroups for the subscription status notification from the definition of PortGroups for the subscription itself is possible.

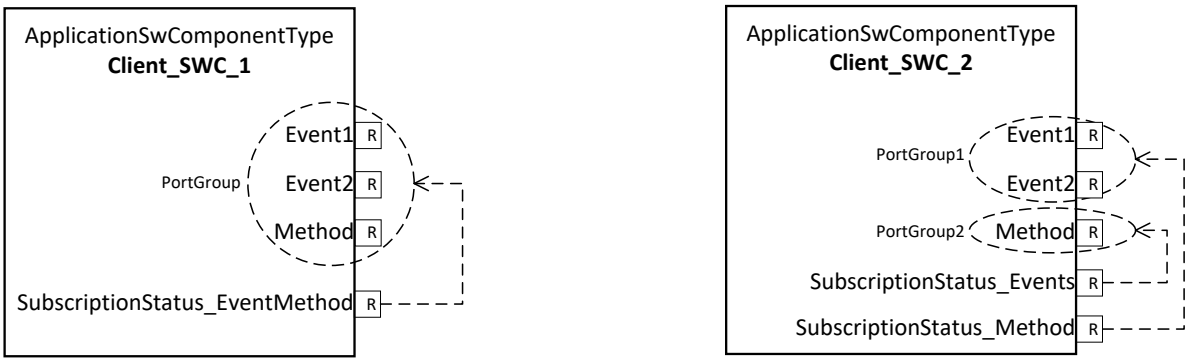

Figure 13.8: Event and Method subscription notification examples

Figure 13.8 shows two setups for the event subscription status notification of the same client service instance which consists of two events and one method.

In the illustrative *Client_SWC_1*, the *SubscriptionStatus_EventMethod* uses a `PortGroup` to include both events and the method in one status notification.

This setup might be a good approach for the client subscription (see Chapter 13.6.5.7), as it requests the two events and the method to become available in one go.

But for the status notification this results in a combined notification status: Only when both events **and** the method are subscribed the notification will result in a successful subscription.

The method could be already called when the first part of the service discovery (the service instance *find*) was successful. If this information is required by the application software-component, an alternative definition of subscription notifications and `PortGroup`s could be more suitable:

In the illustrative *Client_SWC_2*, two notifications have been defined: one *SubscriptionStatus_Events* and one *SubscriptionStatus_Method*.

While the notification for *SubscriptionStatus_Events* still has to wait until a successful subscription acknowledgement for both events is available, the notification on the availability of the method can already be given when the service instance *find* was successful. Thus the method can be called already even though the events are not yet available.

13.7 Crypto Service Dependencies

13.7.1 Overview

The meta-classes `CryptoServiceNeeds` and `CryptoServiceJobNeeds` are used to define requirements for the configuration of the CryptoServiceManager respectively the crypto stack.

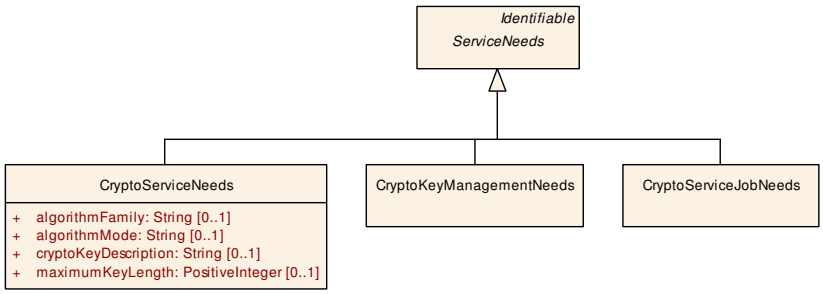

Figure 13.9: Modeling of subclasses of `ServiceNeeds` for cryptographic use cases

The usage of meta-class `CryptoKeyManagementNeeds` is described in Chapter 13.7.4.

There are cryptographic APIs that build upon the creation of jobs that run asynchronously. The reason for this policy is that cryptographic operations - in many cases by design - tend to run for comparatively long time for each call. This behavior is visualized in Figure 13.10.

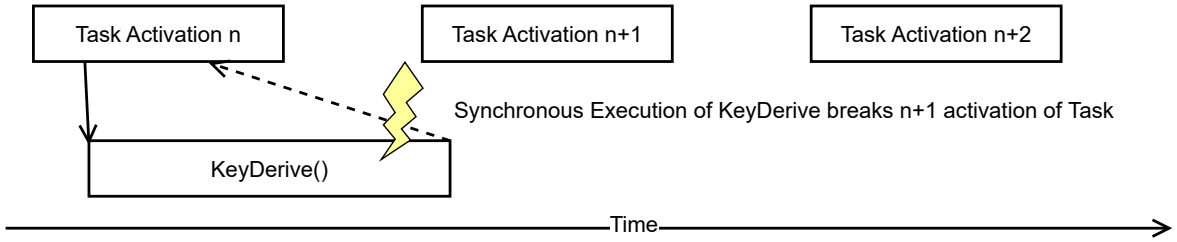

Figure 13.10: Cryptographic operation that requires a too-long execution time

Execution of these operations synchronously in the main function would block the respective module intolerably and therefore the job API is an important measure to keep the execution of software manageable. This behavior is visualized in Figure 13.11.

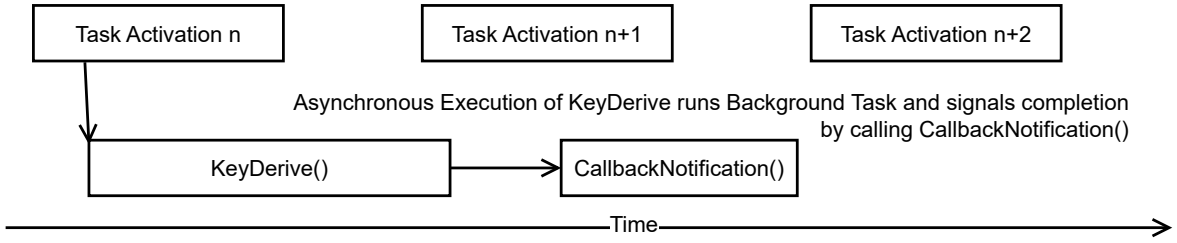

Figure 13.11: Execution of cryptographic operation using the job API

It is important to note that the asynchronous character of the execution is implemented on the server side and has nothing to do with asynchronous calling behavior on the client side (for more explanation about client-side calling behavior, refer to Chapter 7.5.2.1).

Class	**CryptoServiceNeeds**			
Note	Specifies the needs on the configuration of the CryptoServiceManager for one ConfigID (see Specification AUTOSAR_SWS_CSM.doc). An instance of this class is used to find out which ports of a software-component belong to this ConfigID.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
algorithmFamily	String	0..1	attr	This attribute represents a description of the family (e.g. AES) of crypto algorithm implemented by the crypto service use case.
algorithmMode	String	0..1	attr	This meta-class has the ability to represent a crypto service use case.
cryptoKey Description	String	0..1	attr	This attribute allows for a verbal description of the applicable cryptographic key. The goal is to pass a hint for the integrator about how to treat the corresponding service use case.

△

Class	CryptoServiceNeeds			
maximumKey Length	PositiveInteger	0..1	attr	The maximum length of a cryptographic key, that is used by the software-component or module for this configuration. Unit: bit.

Table 13.9: CryptoServiceNeeds

Class	CryptoServiceJobNeeds			
Note	This meta-class shall be taken to indicate that the service use case modeled with this kind of Service Needs assumes the usage of the crypto job API.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	Type	Mult.	Kind	Note
–	–	–	–	–

Table 13.10: CryptoServiceJobNeeds

[TPS_SWCT_01727] Suffix used for the resulting name of the `PortInterface` for crypto `PortInterface`s ⌈The *_{Config}* or (where applicable) *_{Primitive}* suffix used for the resulting name of the `PortInterface` for the respective crypto service shall be taken from the `shortName` of the applicable `SwcServiceDependency`.⌋

13.7.2 Crypto Service Use Cases

13.7.2.1 Crypto Service Use Case: Hash calculation

Scenario: a `AtomicSwComponentType` uses the hash calculation of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02020] `AtomicSwComponentType` uses the hash calculation of the Crypto Service ⌈

ServiceNeeds kind : `CryptoServiceNeeds`

RoleBasedPortAssignment valid `role`s:

- `CsmHash` [0..1]
- `CsmHash_{Config}` [0..1]
- `CallbackNotification` [0..1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmHash_{Config} is regulated by [TPS_SWCT_01727].

13.7.2.2 Crypto Service Use Case: MAC calculation

Scenario: a AtomicSwComponentType uses the message authentication code (MAC) calculation of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02021] AtomicSwComponentType uses the message authentication code (MAC) calculation of the Crypto Service ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmMacGenerate [0..1]
- CsmMacGenerate_{Config} [0..1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmMacGenerate_{Config} is regulated by [TPS_SWCT_01727].

13.7.2.3 Crypto Service Use Case: MAC verification

Scenario: a AtomicSwComponentType uses the message authentication code (MAC) verification of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02022] AtomicSwComponentType uses the message authentication code (MAC) verification of the Crypto Service ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmMacVerify [0..1]
- CsmMacVerify_{Config} [0..1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmMacVerify_{Config} is regulated by [TPS_SWCT_01727].

13.7.2.4 Crypto Service Use Case: generation of random numbers

Scenario: a AtomicSwComponentType uses the generation of random numbers of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02024] AtomicSwComponentType uses the generation of random numbers of the Crypto Service ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmRandomGenerate [0..1]
- CsmRandomGenerate_{Config} [0..1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmRandomGenerate_{Config} is regulated by [TPS_SWCT_01727].

13.7.2.5 Crypto Service Use Case: Encryption with Authenticated Encryption with Associated Data (AEAD)

Scenario: a AtomicSwComponentType uses the Authenticated Encryption with Associated Data (AEAD) of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02025] AtomicSwComponentType uses the Authenticated Encryption with Associated Data (AEAD) of the Crypto Service ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmAEADEncrypt [0..1]
- CsmAEADEncrypt_{Config} [0..1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmAEADEncrypt_{Config} shall be resolved according to [TPS_SWCT_01727].

13.7.2.6 Crypto Service Use Case: Decryption with Authenticated Encryption with Associated Data (AEAD)

Scenario: a AtomicSwComponentType uses the Authenticated Encryption with Associated Data (AEAD) of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02026] AtomicSwComponentType uses the Authenticated Encryption with Associated Data (AEAD) of the Crypto Service ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmAEADDecrypt [0..1]
- CsmAEADDecrypt_{Config} [0..1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmAEADDecrypt_{Config} is regulated by [TPS_SWCT_01727].

13.7.2.7 Crypto Service Use Case: encryption

Scenario: a AtomicSwComponentType uses the encryption of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02027] **AtomicSwComponentType uses the encryption of the Crypto Service** ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmEncrypt [0..1]
- CsmEncrypt_{Config} [0..1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmEncrypt_{Config} is regulated by [TPS_SWCT_01727].

13.7.2.8 Crypto Service Use Case: decryption

Scenario: a AtomicSwComponentType uses the decryption of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02028] AtomicSwComponentType uses the decryption of the Crypto Service ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmDecrypt [0..1]
- CsmDecrypt_{Config} [0..1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmDecrypt_{Config} is regulated by [TPS_SWCT_01727].

13.7.2.9 Crypto Service Use Case: signature generation

Scenario: a AtomicSwComponentType uses the signature generation of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02031] AtomicSwComponentType uses the signature generation of the Crypto Service ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmSignatureGenerate [0..1]

- CsmSignatureGenerate_{Config} [0..1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmSignatureGenerate_{Config} is regulated by [TPS_SWCT_01727].

13.7.2.10 Crypto Service Use Case: signature verification

Scenario: a AtomicSwComponentType uses the signature verification of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_02032] AtomicSwComponentType uses the signature verification of the Crypto Service ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmSignatureVerify [0..1]
- CsmSignatureVerify_{Config} [0..1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmSignatureVerify_{Config} is regulated by [TPS_SWCT_01727].

13.7.2.11 Crypto Service Use Case: usage of key management

Scenario: a AtomicSwComponentType uses the key management of the Crypto Service. In this case the following setup applies:

[TPS_SWCT_01726] AtomicSwComponentType uses the key management of the Crypto Service ⌈

ServiceNeeds kind : CryptoServiceNeeds

RoleBasedPortAssignment valid roles:

- CsmKeyManagement_{Config} [1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Config} that appears in the shortName of the ClientServerInterface CsmKeyManagement_{Config} is regulated by [TPS_SWCT_01727].

13.7.3 Crypto Service Job Use Cases

13.7.3.1 Crypto Service Use Case: usage of job API to set key valid

Scenario: a AtomicSwComponentType uses the **job API** of the Crypto Service to set a key valid. In this case the following setup applies:

[TPS_SWCT_01776] AtomicSwComponentType uses the API of the Crypto Service to set a key valid ⌈

ServiceNeeds kind : CryptoServiceJobNeeds

RoleBasedPortAssignment valid roles:

- CsmJobKeySetValid_{Primitive} [1]
- CallbackNotification [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Primitive} that appears in the shortName of the ClientServerInterface CsmJobKeySetValid_{Primitive} is regulated by [TPS_SWCT_01727].

13.7.3.2 Crypto Service Use Case: usage of job API to create a random seed

Scenario: a AtomicSwComponentType uses the **job API** of the Crypto Service to create a random seed. In this case the following setup applies:

[TPS_SWCT_01777] AtomicSwComponentType uses the API of the Crypto Service to create a random seed ⌈

ServiceNeeds kind : CryptoServiceJobNeeds

RoleBasedPortAssignment valid roles:

- CsmJobRandomSeed_{Primitive} [1]
- CallbackNotification [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Primitive} that appears in the shortName of the ClientServerInterface CsmJobRandomSeed_{Primitive} is regulated by [TPS_SWCT_01727].

13.7.3.3 Crypto Service Use Case: usage of job API to generate a key

Scenario: a AtomicSwComponentType uses the **job API** of the Crypto Service to generate a key. In this case the following setup applies:

[TPS_SWCT_01778] `AtomicSwComponentType` uses the API of the Crypto Service to generate a key ⌈

ServiceNeeds kind : `CryptoServiceJobNeeds`

RoleBasedPortAssignment valid `role`s:

- `CsmJobKeyGenerate_{Primitive}` [1]
- `CallbackNotification` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment `{Primitive}` that appears in the `shortName` of the `ClientServerInterface` `CsmJobKeyGenerate_{Primitive}` is regulated by [TPS_SWCT_01727].

13.7.3.4 Crypto Service Use Case: usage of job API to derive a key

Scenario: a `AtomicSwComponentType` uses the **job API** of the Crypto Service to derive a key. In this case the following setup applies:

[TPS_SWCT_01779] `AtomicSwComponentType` uses the API of the Crypto Service to derive a key ⌈

ServiceNeeds kind : `CryptoServiceJobNeeds`

RoleBasedPortAssignment valid `role`s:

- `CsmJobKeyDerive_{Primitive}` [1]
- `CallbackNotification` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Primitive} that appears in the shortName of the ClientServerInterface CsmJobKeyDerive_{Primitive} is regulated by [TPS_SWCT_01727].

13.7.3.5 Crypto Service Use Case: usage of job API to execute calculation of the public value for key exchange

Scenario: a AtomicSwComponentType uses the **job API** of the Crypto Service to execute calculation of the public value for key exchange. In this case the following setup applies:

[TPS_SWCT_01780] AtomicSwComponentType uses the API of the Crypto Service to execute calculation of the public value for key exchange ⌈

ServiceNeeds kind : CryptoServiceJobNeeds

RoleBasedPortAssignment valid roles:

- CsmJobKeyExchangeCalcPubVal_{Primitive} [1]
- CallbackNotification [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Primitive} that appears in the shortName of the ClientServerInterface CsmJobKeyExchangeCalcPubVal_{Primitive} is regulated by [TPS_SWCT_01727].

13.7.3.6 Crypto Service Use Case: usage of job API to execute calculation of shared secret for key exchange

Scenario: a AtomicSwComponentType uses the **job API** of the Crypto Service to execute calculation of shared secret for key exchange. In this case the following setup applies:

[TPS_SWCT_01781] AtomicSwComponentType uses the API of the Crypto Service to execute calculation of shared secret for key exchange ⌈

ServiceNeeds kind : CryptoServiceJobNeeds

RoleBasedPortAssignment valid `role`s:

- `CsmJobKeyExchangeCalcSecret_{Primitive}` [1]
- `CallbackNotification` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment `{Primitive}` that appears in the `shortName` of the `ClientServerInterface` `CsmJobKeyExchangeCalcSecret_{Primitive}` is regulated by [TPS_SWCT_01727].

13.7.3.7 Crypto Service Use Case: usage of job API to execute certificate parsing

Scenario: a `AtomicSwComponentType` uses the **job API** of the Crypto Service to execute certificate parsing. In this case the following setup applies:

[TPS_SWCT_01782] `AtomicSwComponentType` uses the API of the Crypto Service to execute certificate parsing ⌈

ServiceNeeds kind : `CryptoServiceJobNeeds`

RoleBasedPortAssignment valid `role`s:

- `CsmJobCertificateParse_{Primitive}` [1]
- `CallbackNotification` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment `{Primitive}` that appears in the `shortName` of the `ClientServerInterface` `CsmJobCertificateParse_{Primitive}` is regulated by [TPS_SWCT_01727].

13.7.3.8 Crypto Service Use Case: usage of job API to execute certificate verification

Scenario: a AtomicSwComponentType uses the **job API** of the Crypto Service to execute certificate verification. In this case the following setup applies:

[TPS_SWCT_01783] AtomicSwComponentType uses the API of the Crypto Service to execute certificate verification ⌈

ServiceNeeds kind : CryptoServiceJobNeeds

RoleBasedPortAssignment valid roles:

- CsmJobCertificateVerify_{Primitive} [1]
- CallbackNotification [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The resolution of the name fragment {Primitive} that appears in the shortName of the ClientServerInterface CsmJobCertificateVerify_{Primitive} is regulated by [TPS_SWCT_01727].

13.7.3.9 Crypto Service Use Case: Wrap plain-text key using AES algorithms

According to [40, RFC 3394], there is a use case to encrypt a plain-text key using AES. This process is called a *key wrap*.

In this case, the software-component acts as a client, i.e. uses RPortPrototype for this purpose. As usual with job-based interactions, it is possible to define a callback that gets executed as a notification of the completion of the Csm job.

[TPS_SWCT_01892] Csm Use Case: Wrap plain-text key using AES algorithms ⌈

ServiceNeeds kind : CryptoServiceJobNeeds

RoleBasedPortAssignment valid roles:

- CsmJobKeyWrap [1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.7.3.10 Crypto Service Use Case: Unwrap cipher-text using AES algorithms

According to [40, RFC 3394], there is a use case to decrypt cipher-text to unveil a plain-text cryptographic key using AES. This process is called a *key unwrap*.

In this case, the software-component acts as a client, i.e. uses RPortPrototype for this purpose. As usual with job-based interactions, it is possible to define a callback that gets executed as a notification of the completion of the Csm job.

[TPS_SWCT_01893] Csm Use Case: Unwrap cipher-text key using AES algorithms ⌈

ServiceNeeds kind : CryptoServiceJobNeeds

RoleBasedPortAssignment valid roles:

- CsmJobKeyUnwrap [1]
- CallbackNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.7.4 Crypto Key Management Use Cases

The service use cases for cryptographic key management are indicated by the presence of a CryptoKeyManagementNeeds aggregated at SwcServiceDependency in the role serviceNeeds.

Class	**CryptoKeyManagementNeeds**			
Note	This meta-class can be used to indicate a service use case for key management.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.11: CryptoKeyManagementNeeds

13.7.4.1 KeyM Service Use Case: Atomic Software-Component wants check a certificate on KeyM

Scenario: A software-component wants check a certificate on `KeyM`. The software-component sends the certificate to `KeyM` (`SetCertificate`) and then initiates a verification of the certificate (`VerifyCertificate`).

While the verification is still running it is possible to obtain the status of the verification (`GetStatus`).

[TPS_SWCT_01813] Software-Component wants check a certificate on `KeyM` ⌈

ServiceNeeds kind : `CryptoKeyManagementNeeds`

RoleBasedPortAssignment valid `role`s:

- `KeyMCertificate` [1]
- `KeyMCertificateNotification` [0..1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

13.7.4.2 KeyM Service Use Case: Atomic Software-Component wants to retrieve a certificate from KeyM

Scenario: A software-component wants to retrieve a certificate on `KeyM`. The software-component request the certificate by using GetCertificate. This step represents a synchronous operation.

[TPS_SWCT_01814] `AtomicSwComponentType` wants to retrieve a certificate from `KeyM` ⌈

ServiceNeeds kind : CryptoKeyManagementNeeds

RoleBasedPortAssignment valid roles:

- KeyMCertificate [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.7.4.3 KeyM Service Use Case: Atomic Software-Component wants to retrieve elements of a certificate from KeyM

Scenario: A software-component wants to retrieve elements of a certificate on KeyM (CertificateElementGet, CertificateElementGetByIndex, CertificateElementGetCount). This step represents a synchronous operation.

[TPS_SWCT_01815] AtomicSwComponentType wants to retrieve elements of a certificate from KeyM ⌈

ServiceNeeds kind : CryptoKeyManagementNeeds

RoleBasedPortAssignment valid roles:

- KeyMCertificateElement [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.7.4.4 KeyM Service Use Case: Atomic Software-Component wants to check the existence of a certificate from KeyM

Scenario: A software-component wants to check the existence of a certificate from KeyM (GetStatus).

[TPS_SWCT_01816] `AtomicSwComponentType` wants to check the existence of a certificate from `KeyM` ⌈

ServiceNeeds kind : `CryptoKeyManagementNeeds`

RoleBasedPortAssignment valid `role`s:

- `KeyMCertificate` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

13.7.4.5 KeyM Service Use Case: Atomic Software-Component wants to store a (derived) key in KeyM

Scenario: A software-component wants to store a (derived) key in `KeyM`.

[TPS_SWCT_01817] `AtomicSwComponentType` wants to store a (derived) key in `KeyM` ⌈

ServiceNeeds kind : `CryptoKeyManagementNeeds`

RoleBasedPortAssignment valid `role`s:

- `KeyMCryptoKey` [1]
- `KeyMCryptoKeyNotification` [0..1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

13.7.4.6 KeyM Service Use Case: Atomic Software-Component wants to store a container with (encrypted) keys in KeyM

Scenario: A software-component wants to store a container with (encrypted) keys in KeyM. The processing of the container is done in the context of a session that enables the usage of the Start and Finish operations.

By calling the Prepare operation the software-component passes the container to the KeyM, which reads the content of the container and extracts the contained cryptographic keys. The next step is that the KeyM updates every key extracted from the container.

[TPS_SWCT_01818] AtomicSwComponentType wants to store a container with encrypted keys (e.g. She-keys) in KeyM ⌈

ServiceNeeds kind : CryptoKeyManagementNeeds

RoleBasedPortAssignment valid roles:

- KeyMCryptoKey [1]
- KeyMCryptoKeyNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.7.4.7 KeyM Service Use Case: Atomic Software-Component wants to verify if cryptographic operation was executed using a specific key

Scenario: A software-component wants to verify if cryptographic operation was executed using a specific key (Verify).

[TPS_SWCT_01819] AtomicSwComponentType wants to verify if cryptographic operation was executed using a specific key ⌈

ServiceNeeds kind : CryptoKeyManagementNeeds

RoleBasedPortAssignment valid roles:

- KeyMCryptoKey [1]
- KeyMCryptoKeyNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.8 Diagnostic Service Dependency

This chapter describes the usage of the specific diagnostic meta-classes derived from ServiceNeeds within an atomic software-component. An overview of common diagnostic service needs has already been introduced in Figure 7.39 and can be divided into four main parts:

- Function Inhibition Needs in Chapter 13.8.2
- Diagnostic Event Needs in Chapter 13.8.3
- Diagnostic Communication Needs in Chapter 13.8.4
- Service Needs to fulfill the OBD related requirements in Chapter 13.8.5

For the described use cases of the Diagnostic Services, the following rule applies:

[TPS_SWCT_01129] Express diagnostic capabilities ⌈For every used ClientServerInterface it is necessary to create a RoleBasedPortAssignment. Thereby the value of the attribute role of the RoleBasedPortAssignment has to be set to the name of the used standardized ClientServerInterface.

The possible role attribute values and the multiplicity of the related PortPrototypes are listed at the use case descriptions in the paragraph **RoleBasedPortAssignment**.⌋

[constr_1640] No use of Optional Element Structure for interaction with the diagnostic stack

Imposition time: CP: IT_RteGen

⌈An SwcServiceDependency that aggregates a diagnostic-related subclass of ServiceNeeds shall not refer to any PortPrototype by means of either a RoleBasedPortAssignment or RoleBasedDataAssignment where the respective PortInterface contains any DataPrototype typed by an Optional Element Structure.⌋

13.8.1 Development Approach

AUTOSAR supports in many cases the implementation of a bottom-up or top-down configuration for various aspects of the development workflow.

Before the advent of the [21, TPS Diagnostic Extract Template], AUTOSAR officially supported a modeling approach where the configuration of an `ApplicationSwComponentType` might contain contributions to the external configuration of the diagnostic stack. This was considered an approach to implement a top-down configuration approach for diagnostics.

However, the development approach introduced with the [21, TPS Diagnostic Extract Template] turned out to be superior and less prone to mistakes and limitations in comparison to the configuration that each developer contributed without necessarily having the knowledge about the greater scope of diagnostic configuration.

Therefore, the usage of the [21, TPS Diagnostic Extract Template] has become the canonical approach to the configuration of the external behavior of the AUTOSAR diagnostic stack.

The respective configuration attributes available in the scope of `SwcServiceDependency` have been removed from the AUTOSAR methodology in order to reduce potential confusion in the audience.

In particular, a top-down approach using a [21, TPS Diagnostic Extract Template] can be implemented if the [21, TPS Diagnostic Extract Template] also provides the mappings between diagnostic elements and elements of the application model.

If the mappings are not wanted or not available, it is also possible to use the [21, TPS Diagnostic Extract Template] to derive a bottom-up configuration of the diagnostic stack without the relations to application software.

13.8.2 Function Inhibition Needs

The meta-class `FunctionInhibitionNeeds` is used to define requirements in order to configure the Diagnostic Event Manager Service.

An `SwcInternalBehavior` may provide `FunctionInhibitionNeeds` as well as `FunctionInhibitionAvailabilityNeeds` elements in the context of an `SwcServiceDependency`.

Each `FunctionInhibitionNeeds` and `FunctionInhibitionAvailabilityNeeds` defines the requirements related to one function inhibition ID (for the terms related to the [41, SWS Function Inhibition Manager]).

Class	FunctionInhibitionNeeds			
Note	Specifies the abstract needs on the configuration of the Function Inhibition Manager for one Function Identifier (FID). This class currently contains no attributes. Its name can be regarded as a symbol identifying the FID from the viewpoint of the component or module which owns this class.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 13.12: FunctionInhibitionNeeds

Class	FunctionInhibitionAvailabilityNeeds			
Note	Specifies the abstract needs on the configuration of the Function Inhibition Manager to provide the control function for one Function Identifier (FID).			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
controlledFid	FunctionInhibitionNeeds	0..1	ref	This reference represents the controlled FID **Tags:** atp.Splitkey=controlledFid

Table 13.13: FunctionInhibitionAvailabilityNeeds

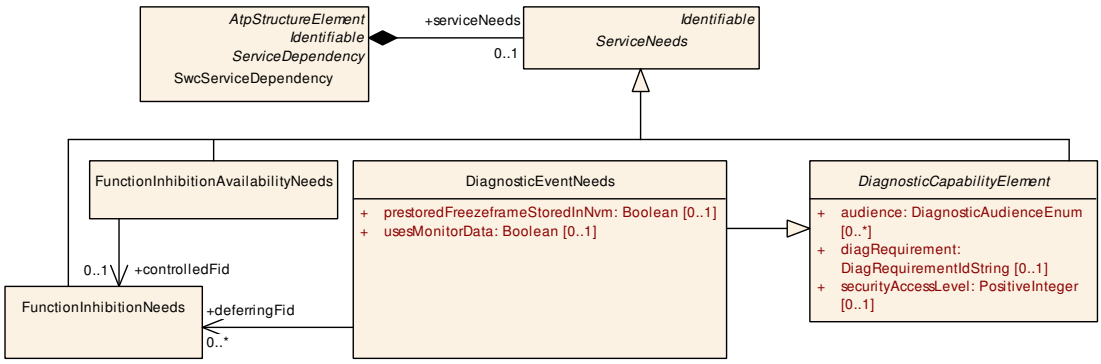

Figure 13.12: Modeling of `FunctionInhibitionNeeds` and `FunctionInhibitionAvailabilityNeeds`

13.8.2.1 Function Inhibition Manager Service use Case: read function permission

[TPS_SWCT_02505] Setup for Function Inhibition Manager Service use Case: read function permission ⌈Scenario: a `AtomicSwComponentType` reads the function permission from FiM in order to enable or disable a functionality. In this case the following setup applies:

ServiceNeeds kind `FunctionInhibitionNeeds`

RoleBasedPortAssignment valid `role`s:

- `FunctionInhibition` [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information, refer to [SWS_Fim_00090].

13.8.2.2 Function Inhibition Manager Use Case: react on suppressed or unavailable events

[TPS_SWCT_01739] Function Inhibition Manager Use Case: react on suppressed or unavailable events ⌈Scenario: an AtomicSwComponentType wants to react on suppressed or unavailable events and disable the permission to run for a FID. In this case, the following setup applies:

ServiceNeeds kind FunctionInhibitionAvailabilityNeeds

RoleBasedPortAssignment valid roles:

- ControlFunctionAvailable [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Note: For variant coding ClientServerInterface ControlFunctionAvailable is used to deactivate a certain functionality (e.g. to set the FID to not available).

For more information, refer to [SWS_Fim_00107].

13.8.2.3 Function Inhibition Manager Use Case: Atomic Software-Component wants to get notified when FID state changes

[TPS_SWCT_01891] Function Inhibition Manager Use Case: Software-component wants to get notified when FID state changes ⌈Scenario: a software-component wants a notification when the status of a given FID permission state changes.

The notification is delivered as a call to a callback implemented by the software-component. Therefore, the software-component has to define a `PPortPrototype` for this purpose.

ServiceNeeds kind `FunctionInhibitionNeeds`

RoleBasedPortAssignment valid `role`s:

- `FunctionInhibitionCallback` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

13.8.2.4 Function Inhibition Manager Use Case: Atomic Software-Component wants to query the list of diagnostic events that are inhibiting a FID

[TPS_SWCT_01910] Function Inhibition Manager Use Case: Atomic Software-Component wants to query the list of diagnostic events that are inhibiting a FID ⌈Scenario: a software-component wants to retrieve a list of diagnostic events that are currently inhibiting a FID.

As the software-component acts as the client in this interaction, it needs to define an `RPortPrototype` for this purpose.

ServiceNeeds kind `FunctionInhibitionNeeds`

RoleBasedPortAssignment valid `role`s:

- `FunctionInhibition` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

13.8.3 Diagnostic Event Needs

The meta-class `DiagnosticEventManagerNeeds` is used to define requirements in order to configure the Diagnostic Event Manager Service.

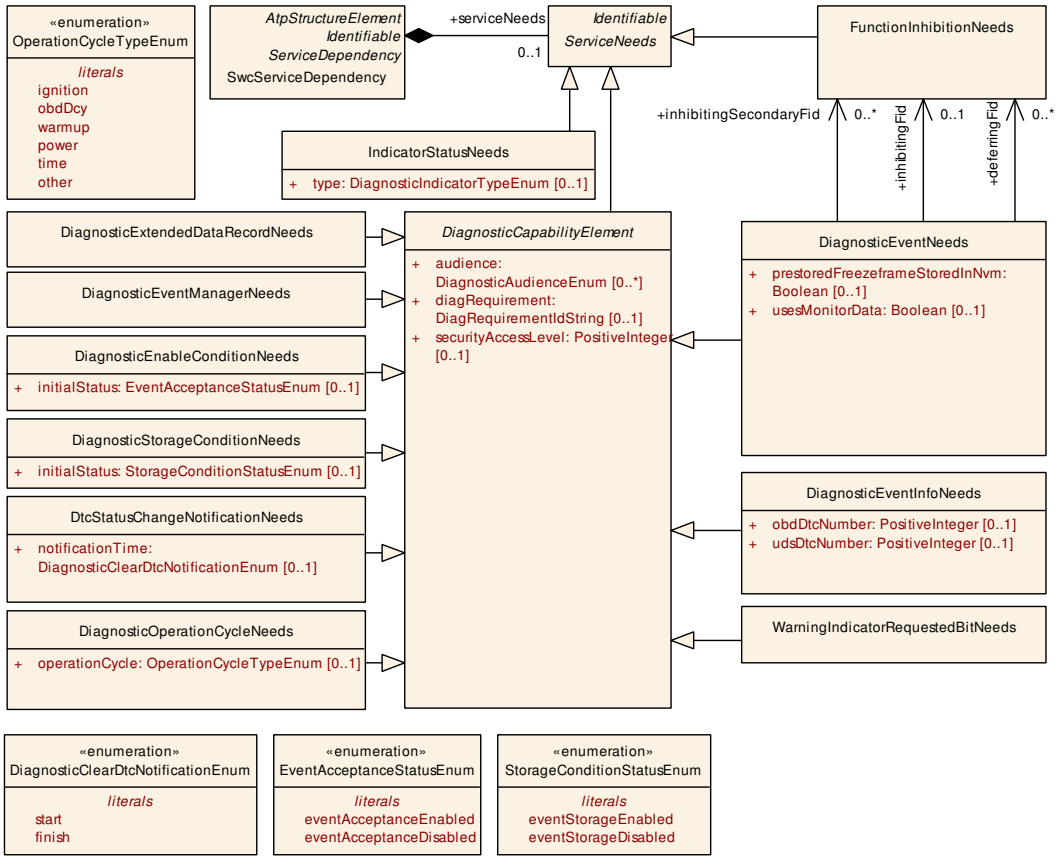

Figure 13.13: General diagnostic event-handling related `ServiceNeeds`

An `SwcInternalBehavior` may provide several `DiagnosticEventManagerNeeds` elements that define the mappings for the general diagnostic event manager behavior (for the terms related to the [42, SWS Diagnostic Event Manager]).

The meta-class `DiagnosticCapabilityElement` is used to provide generic information about diagnostic capabilities. Further on, the usage of `DiagnosticCapabilityElement` indicates that all `ServiceNeeds` which inherit from `DiagnosticCapabilityElement` express the following intentions:

- Need to interact with AUTOSAR Service `Dem` or `Dcm`.
- Provide services for the on-board diagnostics.

Class	DiagnosticEventManagerNeeds			
Note	Specifies the general needs on the configuration of the Diagnostic Event Manager (Dem) which are not related to a particular item.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 13.14: DiagnosticEventManagerNeeds

Class	***DiagnosticCapabilityElement*** (abstract)			
Note	This class identifies the capability to provide generic information about diagnostic capabilities			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Subclasses	DiagnosticCommunicationManagerNeeds, DiagnosticComponentNeeds, DiagnosticControlNeeds, DiagnosticEnableConditionNeeds, DiagnosticEventInfoNeeds, DiagnosticEventManagerNeeds, DiagnosticEventNeeds, DiagnosticExtendedDataRecordNeeds, DiagnosticIoControlNeeds, DiagnosticOperationCycleNeeds, DiagnosticRequestFileTransferNeeds, DiagnosticRoutineNeeds, DiagnosticStorageConditionNeeds, DiagnosticUploadDownloadNeeds, DiagnosticValueNeeds, DiagnosticsCommunicationSecurityNeeds, DtcStatusChangeNotificationNeeds, ObdControlServiceNeeds, ObdInfoServiceNeeds, ObdMonitorServiceNeeds, ObdPidServiceNeeds, ObdRatioDenominatorNeeds, ObdRatioServiceNeeds, WarningIndicatorRequestedBitNeeds			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
audience	DiagnosticAudienceEnum	*	attr	This specifies the intended audience for the diagnostic object. Note that this is not only for the documentation but also subsequent audience specific implementation.
diagRequirement	DiagRequirementIdString	0..1	attr	This denotes the requirement identifier to which the object can be linked to. Note that with the implementation of a generic tracing concept in AUTOSAR this attribute might become obsolete.
securityAccessLevel	PositiveInteger	0..1	attr	This attribute denotes the level of security which is touched by the diagnostic object. The higher the level the more relevance for the security exists. This level shall be mapped to the security level in the ECU.

Table 13.15: DiagnosticCapabilityElement

Primitive	DiagRequirementIdString
Note	This string denotes an Identifier for a requirement. **Tags:** xml.xsd.customType=DIAG-REQUIREMENT-ID-STRING xml.xsd.pattern=[0-9a-zA-Z_\-]+ xml.xsd.type=string

Table 13.16: DiagRequirementIdString

Enumeration	DiagnosticAudienceEnum
Note	The possible values of the intended audience for a diagnostic object.
Aggregated by	*DiagnosticCapabilityElement*.audience
Literal	**Description**

▽

△

Enumeration	DiagnosticAudienceEnum
aftermarket	The object is for free aftermarket service organizations. **Tags:** atp.EnumerationLiteralIndex=1
afterSales	The object is relevant for the OEM after-sales organization. **Tags:** atp.EnumerationLiteralIndex=2
development	The object is relevant for engineering only. **Tags:** atp.EnumerationLiteralIndex=3
manufacturing	The object is relevant for manufacturing. **Tags:** atp.EnumerationLiteralIndex=4
supplier	The object is relevant for the ECU-supplier aftermarket organization. **Tags:** atp.EnumerationLiteralIndex=5

Table 13.17: DiagnosticAudienceEnum

The meta-class DiagnosticEventNeeds is used to define requirements to configure the Diagnostic Event Manager Service.

An SwcInternalBehavior may provide several DiagnosticEventNeeds elements where each defines all the requirements related to one diagnostic event (for the terms related to the [42, SWS Diagnostic Event Manager]).

In addition, ObdPidServiceNeeds and ObdRatioServiceNeeds are required in order to specify the needs for OBD diagnostic service calls.

The diagEventDebounceAlgorithm attribute defines the kind of expected debouncing by the Diagnostic Event Manager or defines that the debouncing is implemented by the software-component.

The class DiagEventDebounceAlgorithm inherits from Identifiable in order to allow further documentation of the debouncing algorithm as well as non-formalized or non-standardized description by means of Sdg on expected configuration of the DiagEventDebounceAlgorithm in the Diagnostic Event Manager.

[constr_1138] Role SwcServiceDependency.assignedPort and DiagEventDebounceMonitorInternal

Imposition time: CP: IT_RteGen

⌈If a SwcServiceDependency aggregates DiagnosticEventNeeds in the role serviceNeeds, then an assignedPort with attribute role set to the value CallbackGetFaultDetectCounter shall only exist if the monitor implements internal debouncing, i.e concrete subclass DiagEventDebounceMonitorInternal is aggregated in the role DiagnosticEventNeeds.diagEventDebounceAlgorithm.⌋

Rationale for the existence of [constr_1138]: the *fault detect counter* is typically an internal state of the Dem, i.e. if the debouncing is executed in the Dem internally.

If, on the other hand, the debouncing is implemented in the monitor software-component, it may happen that a diagnostic tester requests the value of the *fault detect counter*.

In this case, the Dem will request the value of the fault detect counter via the PortPrototype to which the assignedPort with attribute role set to the value CallbackGetFaultDetectCounter refers to.

If the monitor does not implement the debouncing, then this PortPrototype shall not exist.

[constr_10104] RoleBasedPortAssignment where attribute role is set to CallbackGetFaultDetectCounter shall refer to a PPortPrototype in the role portPrototype

Imposition time: CP: IT_RteGen

⌈If a SwcServiceDependency aggregates both

- a DiagnosticEventNeeds that in turn aggregates DiagEventDebounceMonitorInternal in the role diagEventDebounceAlgorithm and
- a RoleBasedPortAssignment in the role assignedPort where attribute role is set to CallbackGetFaultDetectCounter,

then the target of the reference SwcServiceDependency.assignedPort.portPrototype shall be a PPortPrototype.⌋

Class	**DiagnosticEventNeeds**			
Note	Specifies the abstract needs on the configuration of the Diagnostic Event Manager for one diagnostic event. Its shortName can be regarded as a symbol identifying the diagnostic event from the viewpoint of the component or module which owns this element. In case the diagnostic event specifies a production error, the shortName shall be the name of the production error.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
deferringFid	FunctionInhibitionNeeds	*	ref	This reference contains the link to a function identifier within the FiM which is used by the monitor before delivering a result. **Tags:** atp.Splitkey=deferringFid
diagEvent DebounceAlgorithm	DiagEventDebounceAlgorithm	0..1	aggr	Specifies the abstract need on the Debounce Algorithm applied by the Diagnostic Event Manager. **Tags:** atp.Splitkey=diagEventDebounceAlgorithm, diagEventDebounceAlgorithm.shortName
inhibitingFid	FunctionInhibitionNeeds	0..1	ref	This represents the primary Function Inhibition Identifier used for inhibition of the diagnostic monitor. The FID might either inhibit the monitoring of a symptom or the reporting of detected faults. **Tags:** atp.Splitkey=inhibitingFid

▽

△

Class	**DiagnosticEventNeeds**			
inhibiting SecondaryFid	FunctionInhibitionNeeds	*	ref	This represents the secondary Function Inhibition Identifier used for inhibition of the diagnostic monitor. Any of the FID inhibitions leads to an inhibition of the monitoring of a symptom or the reporting of detected faults. **Tags:** atp.Splitkey=inhibitingSecondaryFid
prestored Freezeframe StoredInNvm	Boolean	0..1	attr	If the Event uses a prestored freeze-frame (using the operations PrestoreFreezeFrame and ClearPrestored FreezeFrame of the service interface DiagnosticMonitor) this attribute indicates if the Event requires the data to be stored in non-volatile memory. TRUE = Dem shall store the prestored data in non-volatile memory, FALSE = Data can be lost at shutdown (not stored in Nvm).
usesMonitor Data	Boolean	0..1	attr	This attribute defines whether additional monitor data shall be added to the reporting of events.

Table 13.18: DiagnosticEventNeeds

Class	***DiagEventDebounceAlgorithm*** (abstract)			
Note	This class represents the ability to specify the pre-debounce algorithm which is selected and/or required by the particular monitor. This class inherits from Identifiable in order to allow further documentation of the expected or implemented debouncing and to use the category for the identification of the expected / implemented debouncing.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	DiagEventDebounceCounterBased, DiagEventDebounceMonitorInternal, DiagEventDebounceTimeBased			
Aggregated by	DiagnosticDebounceAlgorithmProps.debounceAlgorithm, DiagnosticEventNeeds.diagEventDebounceAlgorithm			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.19: DiagEventDebounceAlgorithm

Class	**DiagEventDebounceCounterBased**			
Note	This meta-class represents the ability to indicate that the counter-based debounce algorithm shall be used by the DEM for this diagnostic monitor. This is related to set the ECUC choice container DemDebounceAlgorithmClass to DemDebounceCounterBased.			
Base	*ARObject*, *DiagEventDebounceAlgorithm*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	DiagnosticDebounceAlgorithmProps.debounceAlgorithm, DiagnosticEventNeeds.diagEventDebounceAlgorithm			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
counterBased FdcThreshold StorageValue	Integer	0..1	attr	Threshold to allocate an event memory entry and to capture the Freeze Frame.
counter DecrementStep Size	Integer	0..1	attr	This value shall be taken to decrement the internal debounce counter. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

▽

△

Class	**DiagEventDebounceCounterBased**			
counterFailed Threshold	Integer	0..1	attr	This value defines the event-specific limit that indicates the "failed" counter status. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
counter IncrementStep Size	Integer	0..1	attr	This value shall be taken to increment the internal debounce counter. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
counterJump Down	Boolean	0..1	attr	This value activates or deactivates the counter jump-down behavior. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
counterJump DownValue	Integer	0..1	attr	This value represents the initial value of the internal debounce counter if the counting direction changes from incrementing to decrementing. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
counterJumpUp	Boolean	0..1	attr	This value activates or deactivates the counter jump-up behavior. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
counterJumpUp Value	Integer	0..1	attr	This value represents the initial value of the internal debounce counter if the counting direction changes from decrementing to incrementing. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
counterPassed Threshold	Integer	0..1	attr	This value defines the event-specific limit that indicates the "passed" counter status. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 13.20: DiagEventDebounceCounterBased

Class	**DiagEventDebounceTimeBased**			
Note	This meta-class represents the ability to indicate that the time-based pre-debounce algorithm shall be used by the Dem for this diagnostic monitor. This is related to set the EcuC choice container DemDebounceAlgorithmClass to DemDebounceTime Base.			
Base	*ARObject*, *DiagEventDebounceAlgorithm*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	DiagnosticDebounceAlgorithmProps.debounceAlgorithm, DiagnosticEventNeeds.diagEventDebounce Algorithm			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
timeBasedFdc Threshold StorageValue	TimeValue	0..1	attr	Threshold to allocate an event memory entry and to capture the Freeze Frame. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime
timeFailed Threshold	TimeValue	0..1	attr	This value represents the event-specific delay indicating the "failed" status. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

▽

△

Class	**DiagEventDebounceTimeBased**			
timePassed Threshold	TimeValue	0..1	attr	This value represents the event-specific delay indicating the "passed" status. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 13.21: DiagEventDebounceTimeBased

Class	**DiagEventDebounceMonitorInternal**			
Note	This meta-class represents the ability to indicate that no Dem pre-debounce algorithm shall be used for this diagnostic monitor. The SWC might implement an internal debouncing algorithm and report qualified (debounced) results to the Dem/DM.			
Base	*ARObject*, *DiagEventDebounceAlgorithm*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	DiagnosticDebounceAlgorithmProps.debounceAlgorithm, DiagnosticEventNeeds.diagEventDebounceAlgorithm			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.22: DiagEventDebounceMonitorInternal

The Figure 13.14 shows the relationship of the class `DiagnosticEventNeeds`. The given M2 structure supports the expression of the following properties of a diagnostic monitor in addition to the basic set of attributes provided by `DiagnosticCapabilityElement`:

The used `PortPrototype` which has to be connected to the Function Inhibition Managers is determined by the `RoleBasedPortAssignment` of the related `FunctionInhibitionNeeds` instance on M1.

The reference from a M1 instance of an `ObdRatioServiceNeeds` to an M1 instance of a `DiagnosticEventNeeds` specifies that the related Diagnostic Monitor supports Rate Based Monitoring. For further details see Chapter 13.8.5.

[TPS_SWCT_01864] Semantics of `DiagnosticEventNeeds.inhibitingFid` and `inhibitingSecondaryFid` ⌈Diagnostic monitor implementations use Function Identifiers (`FID`) to acquire permission from `FiM` before executing the fault detection.

Typically, the permission is not granted by `FiM` if other diagnostic events have already been reported as FAILED, which would lead to a double-detection of the same failure.

These Function Inhibitions are specified by means of the references in the roles `DiagnosticEventNeeds.inhibitingFid` and `DiagnosticEventNeeds.inhibitingSecondaryFid`.

Semantically, there is no difference between the roles `DiagnosticEventNeeds.inhibitingFid` and `DiagnosticEventNeeds.inhibitingSecondaryFid`, i.e. the collections of relevant references in the “inhibiting” role is created out of the merged content of `DiagnosticEventNeeds.inhibitingFid` and `DiagnosticEventNeeds.inhibitingSecondaryFid`.⌋

This relationship describes the implementation of the software-component. Through this formal reference, the implementer of the software-component can make this information available for later process steps.

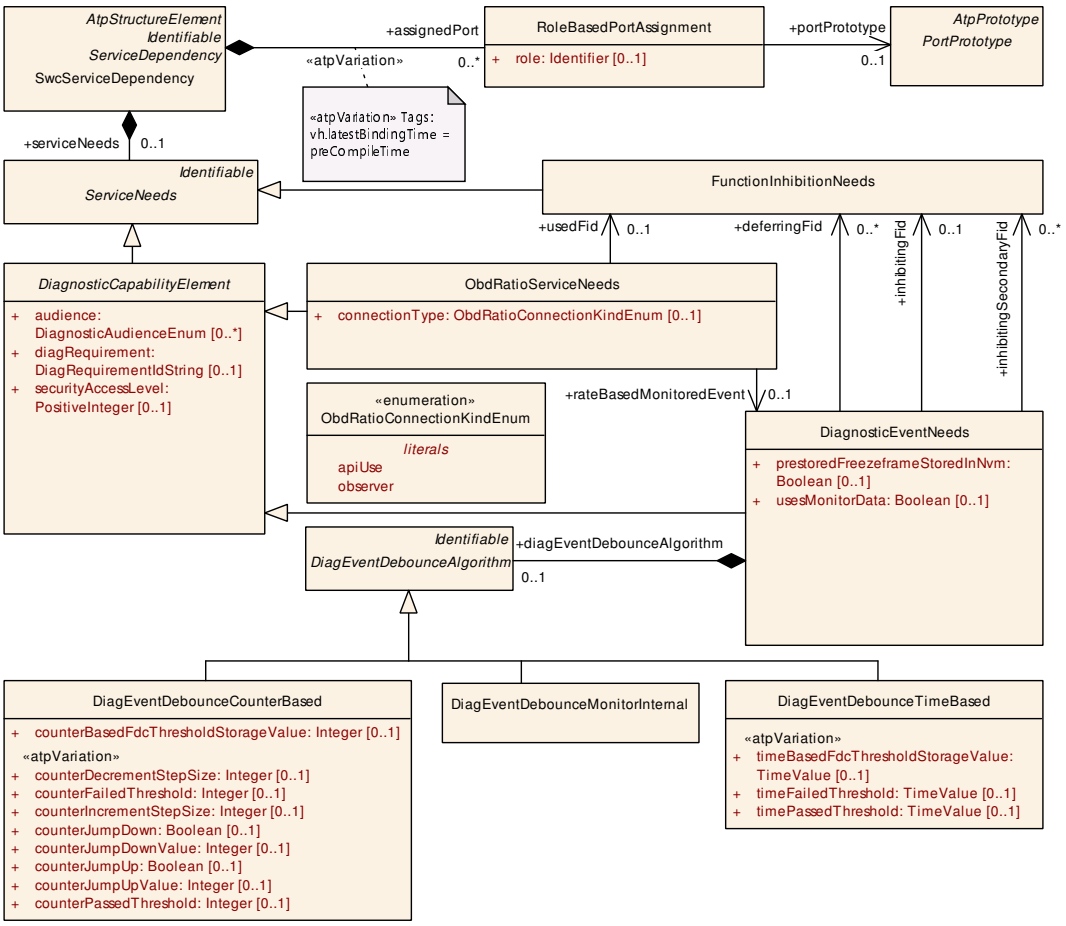

Figure 13.14: Relationship of `DiagnosticEventNeeds` and `FunctionInhibitionNeeds`

Example 13.6

Certification documentation requires a description of the inhibitions.

Example 13.7

If a Ratio is added to the ECU-configuration at a later step for a `DemEvent` (not requested through a `ServiceDependency` with `ObdRatioServiceNeeds`), the configurator can derive the related `FID`s for the ratio from the inhibiting/deferring `FID`s of the `DemEvent` itself.

[TPS_SWCT_01582] Semantics of `DiagnosticEventNeeds.deferringFid`
⌈Diagnostic monitor implementations use *Function Identifiers* (`FID`) to acquire permission from `FiM` before executing the fault detection.

Typically, the permission is not granted by `FiM` if other *Events* have already been reported as *FAILED*, which would lead to a double-detection of the same failure.

In some cases (see the [41, SWS Function Inhibition Manager]), diagnostic monitor implementations do not only shut down completely in the case of “no permission”, but fully compute their result and do not deliver it to Dem before further conditions are fulfilled.

Typically, such diagnostics can detect a coarse failure quickly. However, it avoids reporting *FAIL* early to give other Events a chance to deliver a more precise *FAIL*.

In such cases, the delivery of the result is only allowed when FiM grants a permission, with inhibitions on NOT_TESTED of other Events. These *Function Inhibitions* are specified by means of the attribute DiagnosticEventNeeds.deferringFid.

⌋

As a corresponding concept to DiagnosticEventNeeds, the DiagnosticEventInfoNeeds represents the needs of a given software-component that is interested to get information about specific DTCs.

Class	**DiagnosticEventInfoNeeds**			
Note	This meta-class represents the needs of a software-component interested to get information regarding specific DTCs.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
obdDtcNumber	PositiveInteger	0..1	attr	This represents a reasonable Diagnostic Trouble Code. This allows to predefine the Diagnostic Trouble Code, e.g. if the function developer has received a particular requirement from the OEM or from a standardization body. This attribute applies for the OBD diagnostics use case.
udsDtcNumber	PositiveInteger	0..1	attr	This represents a reasonable Diagnostic Trouble Code. This allows to predefine the Diagnostic Trouble Code, e.g. if the function developer has received a particular requirement from the OEM or from a standardization body. This attribute applies for the UDS diagnostics use case.

Table 13.23: DiagnosticEventInfoNeeds

Class	**DiagnosticOperationCycleNeeds**			
Note	This meta-class represents the needs of a software-component to provide information regarding the operation cycle management to the Dem module.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
operationCycle	OperationCycleType Enum	0..1	attr	Operation cycles types for the Dem to be supported by cycle-state APIs.

Table 13.24: DiagnosticOperationCycleNeeds

Enumeration	**OperationCycleTypeEnum**
Note	The possible values of the operation cycles types for the Dem.
Aggregated by	DiagnosticOperationCycleNeeds.operationCycle
Literal	***Description***
ignition	Ignition ON / OFF cycle. **Tags:** atp.EnumerationLiteralIndex=0
obdDcy	OBD Driving cycle. **Tags:** atp.EnumerationLiteralIndex=1
other	Further operation cycle. **Tags:** atp.EnumerationLiteralIndex=2
power	Power ON / OFF cycle. **Tags:** atp.EnumerationLiteralIndex=3
time	Time based operation cycle. **Tags:** atp.EnumerationLiteralIndex=4
warmup	OBD Warm up cycle. **Tags:** atp.EnumerationLiteralIndex=5

Table 13.25: OperationCycleTypeEnum

Class	**DiagnosticEnableConditionNeeds**			
Note	This meta-class represents the needs of a software-component to provide the capability to set an enable condition.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
initialStatus	EventAcceptanceStatus Enum	0..1	attr	Defines the initial status for enable or disable of acceptance of event reports of a diagnostic event.

Table 13.26: DiagnosticEnableConditionNeeds

Enumeration	**EventAcceptanceStatusEnum**
Note	This enumerator specifies the initial status for enable or disable of acceptance of event reports of a diagnostic event.
Aggregated by	DiagnosticEnableConditionNeeds.initialStatus
Literal	***Description***
eventAcceptance Disabled	Acceptance of a diagnostic event is disabled. **Tags:** atp.EnumerationLiteralIndex=0
eventAcceptance Enabled	Acceptance of a diagnostic event is enabled. **Tags:** atp.EnumerationLiteralIndex=1

Table 13.27: EventAcceptanceStatusEnum

Class	**DiagnosticStorageConditionNeeds**
Note	This meta-class represents the needs of a software-component to provide the capability to set a storage condition.
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds

▽

△

Class	**DiagnosticStorageConditionNeeds**			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
initialStatus	StorageConditionStatus Enum	0..1	attr	Defines the initial status for enable or disable of storage of a diagnostic event.

Table 13.28: DiagnosticStorageConditionNeeds

Enumeration	**StorageConditionStatusEnum**
Note	This enumeration specifies the initial status for enable or disable of storage of a diagnostic event.
Aggregated by	DiagnosticStorageConditionNeeds.initialStatus
Literal	***Description***
eventStorage Disabled	Storage of a diagnostic event is disabled. **Tags:** atp.EnumerationLiteralIndex=0
eventStorage Enabled	Storage of a diagnostic event is enabled. **Tags:** atp.EnumerationLiteralIndex=1

Table 13.29: StorageConditionStatusEnum

13.8.3.1 Dem Service Use Case: diagnostic monitor, debouncing by Dem

Scenario: an `AtomicSwComponentType` implements a Diagnostic Monitor. The debouncing of the failure condition shall be configured and processed by the Dem. In this case the following setup apply:

[TPS_SWCT_01028] `AtomicSwComponentType` implements a Diagnostic Monitor
⌈

ServiceNeeds kind `DiagnosticEventNeeds`

RoleBasedPortAssignment valid `role`s:

- `DiagnosticMonitor` [1]
- `DiagnosticInfo` [0..1]
- `CallbackInitMonitorForEvent` [0..1]
- `CallbackEventUdsStatusChanged` [0..1]
- `CallbackClearEventAllowed` [0..1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

Please note that for the implementation of this scenario DiagEventDebounceCounterBased or DiagEventDebounceTimeBased algorithm should be used as diagEventDebounceAlgorithm.

13.8.3.2 Dem Service Use Case: diagnostic monitor, debouncing by SWC

Scenario: an AtomicSwComponentType implements a Diagnostic Monitor. The debouncing of the failure condition shall be processed by the software-component. In this case the following setup applies:

[TPS_SWCT_01029] AtomicSwComponentType implements a Diagnostic Monitor
⌈

ServiceNeeds kind DiagnosticEventNeeds

RoleBasedPortAssignment valid roles:

- DiagnosticMonitor [1]
- DiagnosticInfo [0..1]
- CallbackInitMonitorForEvent [0..1]
- CallbackEventUdsStatusChanged [0..1]
- CallbackClearEventAllowed [0..1]
- CallbackGetFaultDetectCounter [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Please note that for the implementation of this scenario DiagEventDebounceMonitorInternal algorithm should be used as diagEventDebounceAlgorithm.

13.8.3.3 Dem Service Use Case: Atomic Software-Component provides Information about Operation Cycles

Scenario: an AtomicSwComponentType provides information about operating cycles, e.g. ignition cycle or driving cycle.

[TPS_SWCT_01132] `AtomicSwComponentType` provides information about operating cycles ⌈

ServiceNeeds kind `DiagnosticOperationCycleNeeds`

RoleBasedPortAssignment valid `role`s:

- `OperationCycle` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00601].

13.8.3.4 Dem Service Use Case: Atomic Software-Component enables Reporting of Dtcs In General

Scenario: a `AtomicSwComponentType` enables the reporting of DTCs in general.

[TPS_SWCT_01134] `AtomicSwComponentType` enables reporting of DTCs in general ⌈

ServiceNeeds kind `DiagnosticEnableConditionNeeds`

RoleBasedPortAssignment valid `role`s:

- `EnableCondition` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00604] and [ECUC_Dem_00656].

13.8.3.5 Dem Service Use Case: Atomic Software-Component enables Storage of Subsequent DTCs

Scenario: an AtomicSwComponentType enables the storage of subsequent DTCs.

[TPS_SWCT_01135] AtomicSwComponentType enables storage of subsequent DTCs ⌈

ServiceNeeds kind DiagnosticStorageConditionNeeds

RoleBasedPortAssignment valid roles:

- StorageCondition [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00605].

The relevant DTCs shall be configured in ECUC because at the time the AtomicSwComponentType is designed the information about which DTCs are relevant is not fully available.

13.8.3.6 Dem Service Use Case: retrieve Information of the Lamp Status

Scenario: an AtomicSwComponentType retrieves information of the lamp status.

[TPS_SWCT_01136] AtomicSwComponentType retrieves information of the lamp status ⌈

ServiceNeedsKind IndicatorStatusNeeds

RoleBasedPortAssignment valid roles:

- IndicatorStatus [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00606].

Class	**IndicatorStatusNeeds**			
Note	This meta-class shall be taken to signal a service use case that affects the indicator status.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
type	DiagnosticIndicatorType Enum	0..1	attr	Defines the type of the indicator.

Table 13.30: IndicatorStatusNeeds

Enumeration	**DiagnosticIndicatorTypeEnum**
Note	Type of an indicator.
Aggregated by	DiagnosticIndicator.type, IndicatorStatusNeeds.type
Literal	***Description***
amberWarning	Amber Warning Lamp **Tags:** atp.EnumerationLiteralIndex=0
malfunction	Malfunction Indicator Lamp **Tags:** atp.EnumerationLiteralIndex=1
protectLamp	Protect Lamp **Tags:** atp.EnumerationLiteralIndex=2
redStopLamp	Red Stop Lamp **Tags:** atp.EnumerationLiteralIndex=3
warning	Warning **Tags:** atp.EnumerationLiteralIndex=4

Table 13.31: DiagnosticIndicatorTypeEnum

13.8.3.7 Dem Service Use Case: DEM provides Information that the Fault Storage Overflows

Scenario: the `Dem` provides information that the fault storage overflows.

[TPS_SWCT_01137] `Dem` provides information that the fault storage overflows ⌈

ServiceNeeds kind `DiagnosticEventManagerNeeds`

RoleBasedPortAssignment valid `role`s:

- `EvMemOverflowIndication` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00607].

13.8.3.8 Dem Service Use Case: Atomic Software-Component suppresses the Storage of DTCs

Scenario: an AtomicSwComponentType suppresses the storage of DTCs within the Dem.

[TPS_SWCT_01138] AtomicSwComponentType suppresses the storage of DTCs within the Dem ⌈

ServiceNeeds kind DiagnosticEventManagerNeeds

RoleBasedPortAssignment valid roles:

- DTCSuppression [1]
- ClearDTC [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Please note that DTC can only be suppressed if it has been selected before. This means that the suppression requires a prior call to the ClientServerOperation named SelectDTC that is part of the ClientServerInterface named ClearDTC to get the respective DTC in the focus of the workflow.

For more information please refer to [SWS_Dem_01253] and [SWS_Dem_00608].

13.8.3.9 Dem Service Use Case: Atomic Software-Component informs that the PTO is active

Scenario: an AtomicSwComponentType informs the Dem that the PTO is active.

[TPS_SWCT_01139] AtomicSwComponentType informs the Dem that the PTO is active ⌈

ServiceNeeds kind DiagnosticEventManagerNeeds

RoleBasedPortAssignment valid roles:

- PowerTakeOff [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00612].

13.8.3.10 Dem Service Use Case: Atomic Software-Component needs Information about any DTC Status Change

Scenario: an AtomicSwComponentType needs information about any DTC status change. There is no limitation on the number of software-components requesting the information.

[TPS_SWCT_01140] AtomicSwComponentType needs information about specific DTC without being a diagnostic monitor ⌈

ServiceNeeds kind DtcStatusChangeNotificationNeeds

RoleBasedPortAssignment valid roles:

- CallbackDTCStatusChange [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00617].

In the case the software-component needs notifications about different kinds of the DTC status change, it is advised to create a SwcServiceDependency for each kind of status change.

13.8.3.11 Dem Service Use Case: Call Operation if the Data of a given Diagnostic Event changes (I)

Scenario: an AtomicSwComponentType provides a PPortPrototype typed by the ClientServerInterface CallbackEventDataChanged. The service component calls the ClientServerOperation EventDataChanged if the corresponding diagnostic event changes in terms of the underlying data.

For each diagnostic events to which the AtomicSwComponentType is conceptually connected it needs to provide one PPortPrototype towards the service component.

[TPS_SWCT_01425] AtomicSwComponentType provides one callback per event if diagnostic event data change ⌈

ServiceNeeds kind DiagnosticEventInfoNeeds

RoleBasedPortAssignment valid roles:

- CallbackEventDataChanged [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00618].

13.8.3.12 Dem Service Use Case: Call Operation if the Data or Status of any Diagnostic Event Changes (II)

Scenario: an AtomicSwComponentType shall react on any diagnostic event status change and/or any diagnostic event data change. For instance this may be used to write a time stamp when any event status changes regardless of the event id.

In contrast to the scenario described in Chapter 13.8.3.11 or Chapter 13.8.3.10 this case foresees the existence of a single PPortPrototype that covers all relevant diagnostic events.

[TPS_SWCT_01426] AtomicSwComponentType provides callback if any diagnostic event data and/or status changed ⌈

ServiceNeeds kind DiagnosticEventManagerNeeds

RoleBasedPortAssignment valid roles:

- GeneralCallbackEventDataChanged [0..1]
- GeneralCallbackEventUdsStatusChange [0..1]
- GeneralDiagnosticInfo [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

For more information please refer to [SWS_Dem_00616], [SWS_Dem_00619], and [SWS_Dem_00600].

In order to react on diagnostic event status changes the software-component shall provide a single PPortPrototype typed as a client server interface compatible to GeneralCallbackEventDataChanged.

In order to react on diagnostic event data changes the software-component shall provide a single PPortPrototype typed as a client server interface compatible to GeneralCallbackEventDataChanged.

If the software-component additionally has to read further information of the specific diagnostic event from Dem it shall provide a RPortPrototype typed as a client server interface compatible to GeneralDiagnosticInfo. It shall also specify DiagnosticEventInfoNeeds.⌋

13.8.3.13 Dem Service Use Case: Atomic Software-Component provides Data for Diagnostic Purposes

Scenario: an AtomicSwComponentType provides data to be used for diagnostic purposes. The provision of data can be done by means of PPortPrototypes typed by either ClientServerInterfaces or SenderReceiverInterfaces. The usage of the latter, however, is not further detailed in the applicable [42, SWS Diagnostic Event Manager] and therefore no more details are to be provided in this document.

[TPS_SWCT_01427] AtomicSwComponentType provides data for diagnostic purposes via ClientServerInterface ⌈

ServiceNeeds kind DiagnosticValueNeeds

RoleBasedPortAssignment valid roles:

- DataServices [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01634] Suffix used for the resulting name of the PortInterface for the Data Services ⌈The *suffix* used for the resulting name of the PortInterface for the Data Services (DataServices_{Data}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dem_00621].

13.8.3.14 Dem Service Use Case: Atomic Software-Component gets Information about a specific DTC

Scenario: an AtomicSwComponentType specifies DiagnosticEventInfoNeeds in order to be able to get information about specific DTCs. This use case to some extent is similar to [TPS_SWCT_01426] but does not replace that use case.

[TPS_SWCT_01453] Software-component gets information about a specific DTC ⌈

ServiceNeeds kind DiagnosticEventInfoNeeds

RoleBasedPortAssignment valid roles:

- DiagnosticInfo [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00599].

13.8.3.15 Dem Service Use Case: Atomic Software-Component wants to be triggered on Monitor Status Changes

Scenario: a software-component wants to be triggered on monitor status changes if this is supported for the specific monitor status. Events reported from basic-software modules cannot be considered in this service use case.

The Dem will not provide corresponding `PortPrototype`s for events reported by basic-software modules.

This way, the service use case cannot be used for events reported by the basic-software.

However, for the creator of the service use case there is no way to find out whether the event will be reported by basic software of application software-component.

[TPS_SWCT_01715] Software-Component wants to be triggered on Monitor Status Changes ⌈

ServiceNeeds kind `DiagnosticEventManagerNeeds`

RoleBasedPortAssignment valid `role`s:

- `CallbackMonitorStatusChange` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

13.8.3.16 Dem Service Use Case: Write Parameter Identifier (PID) by Atomic Software-Component

Scenario: A software-component computes the PIDs, and pushes them to Dem for storage and reporting to Dcm.

[TPS_SWCT_01766] Software-component computes the PIDs, and pushes them to Dem for storage and reporting to Dcm ⌈

ServiceNeeds kind `ObdPidServiceNeeds`

RoleBasedPortAssignment valid `role`s:

- `SetDataOfPID21` [1]
- `SetDataOfPID4D` [1]

- SetDataOfPID4E [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.8.3.17 Dem Service Use Case: Read Parameter Identifier by Atomic Software-Component

Scenario: A software-component located on an OBD master ECU reads the PID 21, and sends the value around via "regular" sender-receiver communication to other software-components located on OBD primary ECUs with the obligation to push the PID value to their local Dems.

[TPS_SWCT_01767] Software-component located on an OBD master ECU reads the PID 21, and sends the value around via "regular" sender-receiver communication ⌈

ServiceNeeds kind ObdPidServiceNeeds

RoleBasedPortAssignment valid roles:

- GetDataOfPID21 [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.8.3.18 Dem Service Use Case: Diagnostic Monitor provides Monitor Data, debouncing by Dem

Scenario: an AtomicSwComponentType implements a Diagnostic Monitor that is able to provide monitor data. The debouncing of the failure condition shall be configured and processed by the Dem. In this case the following setup applies:

[TPS_SWCT_01789] `AtomicSwComponentType` implements a Diagnostic Monitor that provides monitor data, debouncing by Dem ⌈

ServiceNeeds kind `DiagnosticEventNeeds` (with attribute `usesMonitorData` set to `true`)

RoleBasedPortAssignment valid `role`s:

- `DiagnosticMonitor` [0..1]
- `DiagnosticMonitor_MonitorData` [1]
- `DiagnosticInfo` [0..1]
- `CallbackInitMonitorForEvent` [0..1]
- `CallbackEventStatusChange` [0..1]
- `CallbackClearEventAllowed` [0..1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

Please note that for the implementation of this scenario the sub-class `DiagEventDebounceCounterBased` or `DiagEventDebounceTimeBased` algorithm should be used as the value for attribute `DiagnosticEventNeeds.diagEventDebounceAlgorithm`.

13.8.3.19 Dem Service Use Case: Diagnostic Monitor provides Monitor Data, debouncing by Atomic Software-Component

Scenario: an `AtomicSwComponentType` implements a Diagnostic Monitor that is able to provide monitor data. The debouncing of the failure condition shall be configured and processed by the software-component that implements the monitor. In this case the following setup applies:

[TPS_SWCT_01790] `AtomicSwComponentType` implements a Diagnostic Monitor that provides monitor data, debouncing by software-component ⌈

ServiceNeeds kind `DiagnosticEventNeeds` (with attribute `usesMonitorData` set to `true`)

RoleBasedPortAssignment valid `role`s:

- DiagnosticMonitor [0..1]
- DiagnosticMonitor_MonitorData [1]
- DiagnosticInfo [0..1]
- CallbackInitMonitorForEvent [0..1]
- CallbackEventStatusChange [0..1]
- CallbackClearEventAllowed [0..1]
- CallbackGetFaultDetectCounter [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Please note that for the implementation of this scenario the sub-class DiagEventDebounceMonitorInternal should be used as the value for attribute DiagnosticEventNeeds.diagEventDebounceAlgorithm.

13.8.3.20 Dem Service Use Case: Atomic Software-Component checks whether an Event is suppressed

Scenario: a software-component representing a monitor of a given event needs to check for the availability of the event in order to decide whether reporting of that event is cleared by the Dem.

A typical use case for this ability is a scenario where actuators are moved to their limits for testing purposes. During this phase the monitoring shall cease.

For this purpose the software-component needs to expose an RPortPrototype towards the Dem.

[TPS_SWCT_01808] Dem Service Use Case: software-component checks whether an event is suppressed ⌈

ServiceNeeds kind DiagnosticEventInfoNeeds

RoleBasedPortAssignment valid roles:

- DiagnosticInfo [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.8.3.21 Dem Service Use Case: Atomic Software-Component wants Information about DTC Clearance

An AtomicSwComponentType wants information about DTC clearance. The execution of the ClearDtcNotification callback can be triggered at the start of the DTC operation (i.e. DtcStatusChangeNotificationNeeds.notificationTime = DiagnosticClearDtcNotificationEnum.start) or when the DTC operation ends (i.e. DtcStatusChangeNotificationNeeds.notificationTime = DiagnosticClearDtcNotificationEnum.finish).

For this purpose, the AtomicSwComponentType shall expose a PPortPrototype typed by the standardized AUTOSAR ClientServerInterface named ClearDtcNotification (see [SWS_Dem_91003]).

[TPS_SWCT_01862] AtomicSwComponentType wants information about DTC clearance ⌈

ServiceNeeds kind DtcStatusChangeNotificationNeeds

RoleBasedPortAssignment valid roles:

- ClearDtcNotification [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_01240] and [SWS_Dem_01241].

[constr_10123] Existence of attribute DtcStatusChangeNotificationNeeds.notificationTime

Imposition time: CP: IT_RteGen

⌈Attribute DtcStatusChangeNotificationNeeds.notificationTime shall only exist if the enclosing SwcServiceDependency contains a RoleBasedPortAssignment where attribute role is set to the value ClearDtcNotification.⌋

Class	**DtcStatusChangeNotificationNeeds**			
Note	This meta-class represents the needs of a software-component interested to get information regarding any DTC status change.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
notificationTime	DiagnosticClearDtc NotificationEnum	0..1	attr	This attribute determines the time when the notification about the DTC operation shall be executed. This attribute is only relevant for the configuration of the ClearDtc Notification.

Table 13.32: DtcStatusChangeNotificationNeeds

Enumeration	**DiagnosticClearDtcNotificationEnum**
Note	This enumeration supports the specification of the time when the ClearDtcNotification callback is supposed to be executed.
Aggregated by	DtcStatusChangeNotificationNeeds.notificationTime
Literal	***Description***
finish	The ClearDtcCallback shall be executed when the DTC operation finishes. **Tags:** atp.EnumerationLiteralIndex=1
start	The ClearDtcCallback shall be executed when the DTC operation starts. **Tags:** atp.EnumerationLiteralIndex=0

Table 13.33: DiagnosticClearDtcNotificationEnum

13.8.3.22 Dem Service Use Case: Atomic Software-Component wants to reset a Degradation State

Scenario: an AtomicSwComponentType wants to reset a degradation state and therefore deactivate the “limp home” mode.

For this purpose, the software-component uses the ClientServerOperation ResetMonitorStatus that is defined in ClientServerInterface DiagnosticMonitor.

In this case, the following setup applies:

[TPS_SWCT_01870] AtomicSwComponentType wants to reset a degradation state ⌈

ServiceNeeds kind DiagnosticEventNeeds

RoleBasedPortAssignment valid roles:

- DiagnosticMonitor [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Please note that the software-component might want to choose getting information about the associated DTC first, see [TPS_SWCT_01453].

13.8.3.23 Dem Service Use Case: Atomic Software-Component wants to clear a DTC

Scenario: an AtomicSwComponentType wants to clear a DTC. For this purpose, the AtomicSwComponentType exposes an RPortPrototype typed by the standardized AUTOSAR ClientServerInterface named ClearDTC (see [SWS_Dem_00666]).

In this case, the following setup applies:

[TPS_SWCT_01880] AtomicSwComponentType wants to clear a DTC ⌈

ServiceNeeds kind DiagnosticEventManagerNeeds

RoleBasedPortAssignment valid roles:

- ClearDTC [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Please note that the clearing of the DTC is done via the ClientServerOperation named ClearDTC, which requires a prior call to the ClientServerOperation named SelectDTC that is part of the ClientServerInterface named ClearDTC to get the respective DTC in the focus of the workflow.

For more information please refer to [SWS_Dem_01253].

13.8.3.24 Dem Service Use Case: Atomic Software-Component wants to contribute data to an Extended Data Record of a DTC

Scenario: an AtomicSwComponentType wants to contribute data to an extended data record. For this purpose, the ClientServerInterface named DataServices_{Data} shall be used.

In this case, the following setup applies:

[TPS_SWCT_01907] AtomicSwComponentType wants to contribute data to an extended data record of a DTC ⌈

ServiceNeeds kind DiagnosticExtendedDataRecordNeeds

RoleBasedPortAssignment valid roles:

- DataServices [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01908] Suffix used for the resulting name of the PortInterface for the Data Services ⌈The *suffix* used for the resulting name of the PortInterface for the Data Services (DataServices_{Data}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dem_00621].

Class	**DiagnosticExtendedDataRecordNeeds**			
Note	This meta-class represents the needs of a software-component interested to provide data for the extended data record of a DTC.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.34: DiagnosticExtendedDataRecordNeeds

13.8.4 Diagnostic Communication Needs

The meta-class DiagnosticCommunicationManagerNeeds is used to define requirements in order to configure the Diagnostic Communication Manager Service.

An SwcInternalBehavior may provide a DiagnosticCommunicationManagerNeeds element which defines the mappings for the general diagnostic communication (for the terms related to the [43, SWS Diagnostic Communication Manager]).

The meta-class DiagnosticRoutineNeeds is used to define requirements to configure the Diagnostic Communication Manager Service. A PPortPrototype typed by a ClientServerInterface[3] may provide ClientServerOperations (for example, “start”, “stop”, and “RequestResults”).

The PPortPrototype corresponds to the diagnostic service RoutineControl. Within the SwcInternalBehavior up to three RunnableEntitys are defined for implementing the ClientServerOperations mentioned before.

The enumeration parameter DiagnosticRoutineTypeEnum is used to define whether the diagnostic server or client is responsible for stopping the routine.

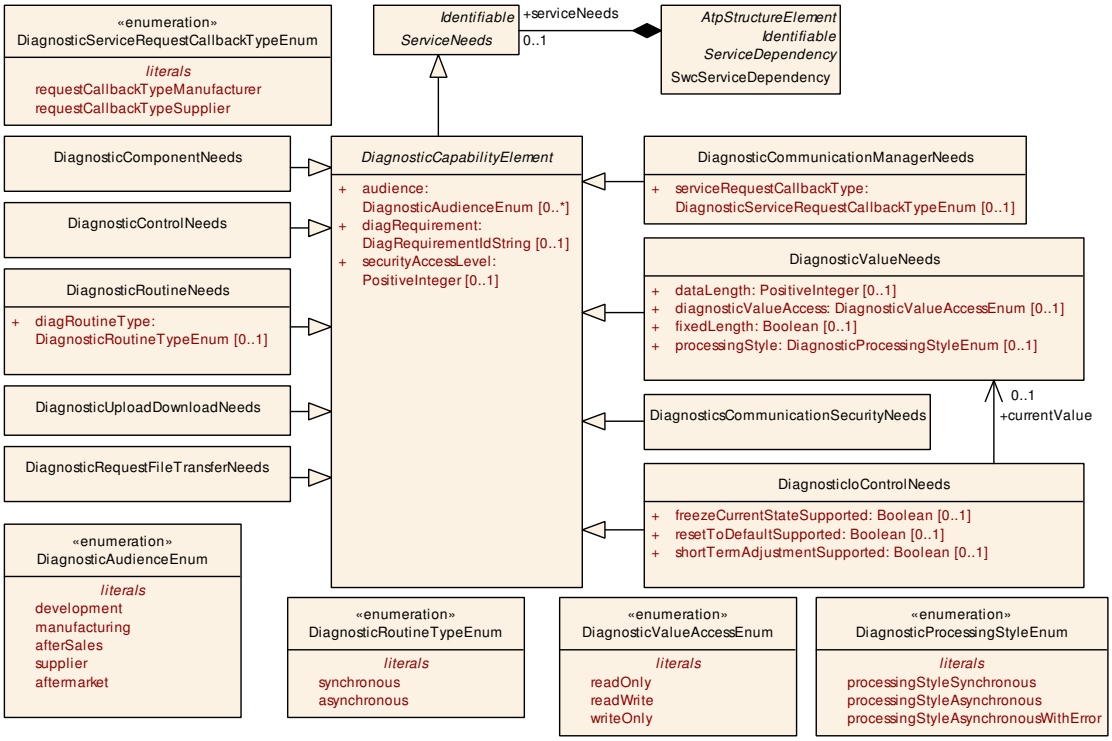

Figure 13.15: General diagnostic service-related ServiceNeeds

Please note that [constr_1340] and [constr_1341] apply for the application of DiagnosticRoutineNeeds. These constraints are part of the specification of the [21, TPS Diagnostic Extract Template].

[3]where attribute isService shall be set to true

Class	**DiagnosticCommunicationManagerNeeds**			
Note	Specifies the general needs on the configuration of the Diagnostic Communication Manager (Dcm) which are not related to a particular item (e.g. a PID or DiagnosticRoutineNeeds). The main use case is the mapping of service ports to the Dcm which are not related to a particular item.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
serviceRequest CallbackType	DiagnosticService RequestCallbackType Enum	0..1	attr	This represents the ability to define whether the usage of PortInterface ServiceRequestNotification has the characteristics of being initiated by a manufacturer or by a supplier.

Table 13.35: DiagnosticCommunicationManagerNeeds

Enumeration	**DiagnosticServiceRequestCallbackTypeEnum**
Note	This represents the ability to define whether a Service Request Notification was used in the role of a manufacturer or a supplier.
Aggregated by	DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType
Literal	***Description***
requestCallback TypeManufacturer	This represents the case that the usage of PortInterface ServiceRequestNotification has the characteristics of being used by a manufacturer. **Tags:** atp.EnumerationLiteralIndex=0
requestCallback TypeSupplier	This represents the case that the usage of PortInterface ServiceRequestNotification has the characteristics of being used by a supplier. **Tags:** atp.EnumerationLiteralIndex=1

Table 13.36: DiagnosticServiceRequestCallbackTypeEnum

Class	**DiagnosticRoutineNeeds**			
Note	Specifies the general needs on the configuration of the Diagnostic Communication Manager (Dcm) which are not related to a particular item (e.g. a PID). The main use case is the mapping of service ports to the Dcm which are not related to a particular item.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
diagRoutine Type	DiagnosticRoutineType Enum	0..1	attr	This denotes the type of diagnostic routine which is implemented by the referenced server port.

Table 13.37: DiagnosticRoutineNeeds

[constr_1986] Existence of the reference DiagnosticRoutineNeeds.diagRoutineType

Imposition time: CP: IT_RteGen

⌈For each DiagnosticRoutineNeeds, the attribute diagRoutineType shall exist.⌋

Enumeration	**DiagnosticRoutineTypeEnum**
Note	This enumerator specifies the different types of diagnostic routines.
Aggregated by	DiagnosticRoutineNeeds.diagRoutineType
Literal	***Description***
asynchronous	This indicates that the diagnostic server is not blocked while the diagnostic routine is running. **Tags:** atp.EnumerationLiteralIndex=0
synchronous	This indicates that the diagnostic routine blocks the diagnostic server in the ECU while the routine is running. **Tags:** atp.EnumerationLiteralIndex=1

Table 13.38: DiagnosticRoutineTypeEnum

The meta-class `DiagnosticIoControlNeeds` is used to define requirements to configure the Diagnostic Communication Manager Service. The `PPortPrototype` corresponds to the diagnostic service `InputOutputControlByIdentifier`. Within the `SwcInternalBehavior` up to three `RunnableEntity`s are defined for implementing the `ClientServerOperation`s mentioned before.

Class	**DiagnosticIoControlNeeds**			
Note	Specifies the general needs on the configuration of the Diagnostic Communication Manager (DCM) which are not related to a particular item (e.g. a PID). The main use case is the mapping of service ports to the Dcm which are not related to a particular item.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
currentValue	DiagnosticValueNeeds	0..1	ref	Reference to the DiagnosticValueNeeds indicating the access to the current value via signalBasedDiagnostics. **Tags:** atp.Splitkey=currentValue
freezeCurrent StateSupported	Boolean	0..1	attr	This attribute determines, if the referenced port supports temporary freezing of I/O value.
resetToDefault Supported	Boolean	0..1	attr	This represents a flag for the existence of the ResetTo Default operation in the service interface.
shortTerm Adjustment Supported	Boolean	0..1	attr	This attribute determines, if the referenced port supports temporarily setting of I/O value to a specific value provided by the diagnostic tester.

Table 13.39: DiagnosticIoControlNeeds

The meta-class `DiagnosticValueNeeds` is used to define requirements in order to configure the Diagnostic Communication Manager Service as well as the Diagnostic Event Manager Service.

The DCM can access either local values via a `ClientServerInterface` or it may access `dataElement`s in a `PPortPrototype` typed by a `SenderReceiverInterface`. For this purpose, the `DiagnosticValueNeeds` require associations to local values (i.e. inside `InternalBehavior`) or respectively `dataElement`s.

The attribute `DiagnosticValueNeeds.diagnosticValueAccess` of type `DiagnosticValueAccessEnum` allows for distinguishing between current values to read diagnostic information (readOnly) and data elements which are additionally classified as configurable (readWrite).

[constr_1363] Existence of attributes of `DiagnosticValueNeeds`

Imposition time: CP: `IT_CpgExe`

⌈if `DiagnosticValueNeeds` is aggregated by a `SwcServiceDependency` in the role `serviceNeeds` then the attributes

- `DiagnosticValueNeeds.diagnosticValueAccess`
- `DiagnosticValueNeeds.dataLength`
- `DiagnosticValueNeeds.fixedLength`

shall **not** exist.⌋

For all intents and purposes, the statement made by [constr_1363] boils down to the fact that these attributes can only be reasonably used in the context of a `BswService-Dependency`.

Class	**DiagnosticValueNeeds**			
Note	Specifies the general needs on the configuration of the Diagnostic Communication Manager (DCM) which are not related to a particular item (e.g. a PID). The main use case is the mapping of service ports to the DCM which are not related to a particular item. In the case of using a sender receiver communicated value, the related value shall be taken via assigned Data in the role "signalBasedDiagnostics". In case of using a client/server communicated value, the related value shall be communicated via the port referenced by assignedPort. The details of this communication (e.g. appropriate naming conventions) are specified in the related software specifications (SWS).			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataLength	PositiveInteger	0..1	attr	This attribute is applicable only if the DiagnosticValue Needs is aggregated within a BswModuleDependency. This attribute represents the length of data (in bytes) provided for this particular PID signal. This Attribute is only used by the AUTOSAR Classic Platform.
diagnosticValue Access	DiagnosticValueAccess Enum	0..1	attr	This attribute is applicable only if the DiagnosticValue Needs is aggregated within a BswModuleDependency. This attribute controls whether the data can be read and written or whether it is to be handled read-only.
fixedLength	Boolean	0..1	attr	This attribute is applicable only if the DiagnosticValue Needs is aggregated within a BswModuleDependency. This attribute controls whether the data length of the data is fixed.
processingStyle	DiagnosticProcessing StyleEnum	0..1	attr	This attribute controls whether interaction requires the software-component to react synchronously on a request or whether it processes the request in background but still the DCM has to issue the call again to eventually obtain the result of the request.

Table 13.40: DiagnosticValueNeeds

Enumeration	**DiagnosticValueAccessEnum**
Note	Defines the access of the configured diagnostic current values which will be used by the Dem or Dcm module.
Aggregated by	DiagnosticValueNeeds.diagnosticValueAccess
Literal	***Description***
readOnly	The access to the data element is limited to read-only. This is typically used to read-out diagnostic information (e.g. current values). **Tags:** atp.EnumerationLiteralIndex=0
readWrite	The value of the diagnostic data element is classified as configurable (read and write access is possible). **Tags:** atp.EnumerationLiteralIndex=1
writeOnly	The access to the data element is limited to write-only. This supports the use case where the Dcm just writes data to the application software without the intention to read it back, **Tags:** atp.EnumerationLiteralIndex=2

Table 13.41: DiagnosticValueAccessEnum

Enumeration	**DiagnosticProcessingStyleEnum**
Note	This meta-class represents the ability to define the processing style of diagnostic requests.
Aggregated by	DiagnosticValueNeeds.processingStyle
Literal	***Description***
processingStyle Asynchronous	The software-component processes the request in background but still the Dcm has to issue the call again to eventually obtain the result of the request. **Tags:** atp.EnumerationLiteralIndex=0
processingStyle AsynchronousWith Error	The software-component processes the request in background but still the Dcm has to issue the call again to eventually obtain the result of the request or handle error code. **Tags:** atp.EnumerationLiteralIndex=1
processingStyle Synchronous	The software-component is supposed to react synchronously on the request. **Tags:** atp.EnumerationLiteralIndex=2

Table 13.42: DiagnosticProcessingStyleEnum

Class	**DiagnosticsCommunicationSecurityNeeds**			
Note	This meta-class represents the needs of a software-component to verify the access to security level via diagnostic services.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.43: DiagnosticsCommunicationSecurityNeeds

13.8.4.1 Dcm Service Use Case: read/write current values by Client Server Interface

Scenario: an `AtomicSwComponentType` defines a `PPortPrototype` typed by `ClientServerInterface` to read/write current value via diagnostic services (e.g. measurements, variant coding)

[TPS_SWCT_02002] **AtomicSwComponentType defines a PPortPrototype typed by ClientServerInterface to read/write current value via diagnostic services** ⌈

ServiceNeeds kind DiagnosticValueNeeds

RoleBasedPortAssignment valid roles:

- DataServices [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01628] Suffix used for the resulting name of the PortInterface for the Data Services ⌈The *suffix* used for the resulting name of the PortInterface for the Data Services (DataServices_{Data}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dcm_00686].

13.8.4.2 Dcm Service Use Case: read/write current values of specific DID by Client Server Interface

Scenario: an AtomicSwComponentType defines a PPortPrototype typed by ClientServerInterface to read/write current values via diagnostic services (e.g. measurements, variant coding) where the applicable DID is passed as an argument to the access functions. This use case applies mostly if the software-component provides the information related to more than one DID.

[TPS_SWCT_01639] **AtomicSwComponentType defines a PPortPrototype typed by ClientServerInterface to read/write current value via diagnostic services where the applicable DID is passed as an argument to the access functions** ⌈

ServiceNeeds kind DiagnosticValueNeeds

RoleBasedPortAssignment valid roles:

- DataServices_DIDRange [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01640] Suffix used for the resulting name of the PortInterface for the Data Services ⌈The *suffix* used for the resulting name of the PortInterface for the Data Services (DataServices_DIDRange_{Range}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dcm_00769].

13.8.4.3 Dcm Service Use Case: read/write current values by Sender Receiver Interface or Nv Data Interface

Scenario: an AtomicSwComponentType defines PortPrototypes typed by SenderReceiverInterfaces or NvDataInterfaces to read/write current values via diagnostic services (e.g. measurements, variant coding) that correspond to elements of a DID (as opposed to the entire DID at once, which is described in [TPS_SWCT_01853]).

This is mainly used for data which are available at ports anyhow used for other communication purpose.

Note: this scenario can be implemented as a regular sender/receiver communication without the necessity to use a SwcServiceDependency. The description of a SwcServiceDependency (even if it is technically not required) may help to advertise the special role of the corresponding dataElement with respect to diagnostics.

[TPS_SWCT_02003] AtomicSwComponentType defines PortPrototypes typed by SenderReceiverInterfaces or NvDataInterfaces to read/write current values via diagnostic services ⌈

ServiceNeeds kind DiagnosticValueNeeds

RoleBasedPortAssignment
N/A

RoleBasedDataAssignment valid roles:

- signalBasedDiagnostics [1..2]

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups valid roles:
N/A

To read the signal, the AtomicSwComponentType shall define an AbstractProvidedPortPrototype. To write the signal, the AtomicSwComponentType shall define an AbstractRequiredPortPrototype.⌋

For more information please refer to [TPS_SWCT_01579], [TPS_SWCT_01831] and [SWS_Dcm_00687].

The service interface used for this purpose is DataServices_{Data}, see also [SWS_Dcm_00687]. For more information please refer to [TPS_SWCT_01579], [TPS_SWCT_01831].

[constr_1679] Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = signalBasedDiagnostics

Imposition time: CP: IT_RteGen

⌈If the attribute RoleBasedDataAssignment.role is set to the value signalBasedDiagnostics then the reference RoleBasedDataAssignment.usedDataElement.localVariable shall not exist.⌋

For explanation of the existence of [constr_1679], it is not intended to provide diagnostic access to local variables inside the SwcInternalBehavior.

13.8.4.4 Dcm Service Use Case: read/write entire DID by Sender Receiver Interface or Nv Data Interface

Scenario: an AtomicSwComponentType defines PortPrototypes typed by SenderReceiverInterfaces or NvDataInterfaces to read/write the content of an entire DID via diagnostic services.

[TPS_SWCT_01853] AtomicSwComponentType defines PortPrototype typed by SenderReceiverInterface or NvDataInterfaces to read/write the content of an entire DID via diagnostic services ⌈

ServiceNeeds kind DiagnosticValueNeeds

RoleBasedPortAssignment
N/A

RoleBasedDataAssignment valid roles:

- signalBasedDiagnostics [1..2]

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups valid roles:
N/A

To read the data, the AtomicSwComponentType shall define an AbstractProvidedPortPrototype. To write the data, the AtomicSwComponentType shall define an AbstractRequiredPortPrototype.⌋

The service interface used for this purpose is DataServices_{DID}, see also [SWS_Dcm_91057]. For more information please refer to [TPS_SWCT_01579], [TPS_SWCT_01831].

[constr_1679] applies.

13.8.4.5 Dcm Service Use Case: start/stop or request Routine Results

Scenario: an AtomicSwComponentType defines a PortPrototype typed by a ClientServerInterface to start/stop or request routine results of diagnostic routines.

[TPS_SWCT_02004] AtomicSwComponentType defines a PortPrototype typed by a ClientServerInterface to start/stop or request routine results of diagnostic routines ⌈

ServiceNeeds kind DiagnosticRoutineNeeds

RoleBasedPortAssignment valid roles:

- RoutineServices [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01632] Suffix used for the resulting name of the PortInterface for the Routine Services ⌈The *suffix* used for the resulting name of the PortInterface for the Routine Services (RoutineServices_{RoutineName}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dcm_00690].

[constr_1724] Usage of attribute ClientServerOperation.diagArgIntegrity

Imposition time: CP: IT_RteGen

⌈With the exception of the context of a ServiceSwComponentType, the attribute ClientServerOperation.diagArgIntegrity shall only have the value

true if the ClientServerInterface containing the respective ClientServer-Operation is used to type a PPortPrototype that is referenced by a RoleBased-PortAssignment aggregated by a SwcServiceDependency that in turn aggregates DiagnosticRoutineNeeds.⌋

In other words, on the level of application software the attribute diagArgIntegrity shall only exist in the context of a PPortPrototype.

Obviously, the ServiceSwComponentType that is used to represent the Dcm will use an RPortPrototype for the other end of the AssemblySwConnector that connects to said PortPrototype in the application software.

13.8.4.6 Dcm Service Use Case: IO control by Client Server Interface

Scenario: an AtomicSwComponentType defines a PortPrototype typed by a ClientServerInterface to adjust the IO signal via diagnostic services.

[TPS_SWCT_02005] AtomicSwComponentType defines PortPrototypes typed by ClientServerInterfaces to adjust the IO signal via diagnostic services ⌈

ServiceNeeds kind DiagnosticIoControlNeeds

RoleBasedPortAssignment valid roles:

- DataServices [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01629] Suffix used for the resulting name of the PortInterface for the Data Services ⌈The *suffix* used for the resulting name of the PortInterface for the Data Services (DataServices_{Data}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dcm_00686].

13.8.4.7 Dcm Service Use Case: IO control by Sender Receiver Interface

This use case represents an alternative to the use case described in Chapter 13.8.4.6, i.e. for the same purpose it is also possible to utilize a SenderReceiverInterface.

The essential idea behind the existence of I/O PortPrototypes typed by SenderReceiverInterface is the possibility to have quick access to the dataElements currently under control.

Especially cases where access to dataElements is required from different partitions (for example in multi core systems) can benefit from this approach.

Scenario: an AtomicSwComponentType defines an RPortPrototype typed by a SenderReceiverInterface (in particular: IOControlRequest) to adjust the I/O signal via diagnostic services and defines a PPortPrototype typed by a SenderReceiverInterface (in particular: IOControlResponse) to provide the IO "operation response".

In the case of using IOControlRequest (which owns **three** dataElements) and IOControlResponse, the whole PortPrototype is related to **exactly one** IO control and needs to be consistent.

Therefore, the usage of RoleBasedPortAssignment (instead of the RoleBasedDataAssignment, which would otherwise typically be used for a sender/receiver-based scenario) is required for avoiding modeling overhead.

[TPS_SWCT_01654] AtomicSwComponentType defines PortPrototypes typed by SenderReceiverInterfaces to adjust the IO signal via diagnostic services
⌈

ServiceNeeds kind DiagnosticIoControlNeeds

RoleBasedPortAssignment valid roles:

- IOControlRequest [1]
- IOControlResponse [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The IOControl service requires in its diagnostic response the current value of the IO-DID, which is identical to the current value represented by DiagnosticValueNeeds of the ReadDataByIdentifer response.

[TPS_SWCT_01655] Reference from DiagnosticIoControlNeeds to DiagnosticValueNeeds ⌈In the scenario described by [TPS_SWCT_01654], the DiagnosticIoControlNeeds shall reference the DiagnosticValueNeeds

which relates to the access of the current value via diagnostic services (see [TPS_SWCT_02003]).⌋

[TPS_SWCT_01656] Suffix used for the resulting name of the `PortInterface` for `IOControlRequest` and `IOControlResponse` ⌈The *suffix* used for the resulting name of the `PortInterface` for the `IOControlRequest_{Data}` and `IOControlResponse_{Data}` shall be taken from the `shortName` of the applicable `SwcServiceDependency`.⌋

The service use case is visualized in Figure 13.16. The `SwComponentPrototype` contains two `SwcServiceDependency`s, one for the I/O Control, and one for the access of the `dataElement` with the `shortName` “IOx” by the Dcm.

Please note that, in this example, the `SenderReceiverInterface` used on the `PPortPrototype` of the `ApplicationSwComponentType` has several `dataElement`s (where the `dataElement` with the `shortName` “IOx” is one of them). This is a perfectly valid configuration.

On the other hand, the `SenderReceiverInterface` used on the `RPortPrototype` of the `ServiceSwComponentType` representing the Dcm can only have **one** `dataElement`. This single `dataElement` shall (as far as the example is concerned) be given the `shortName` “IOx”.

Note the reference from the `DiagnosticIoControlNeeds` to the `DiagnosticValueNeeds`. This reference explicitly expresses that access to a DID is combined with the usage of I/O control.

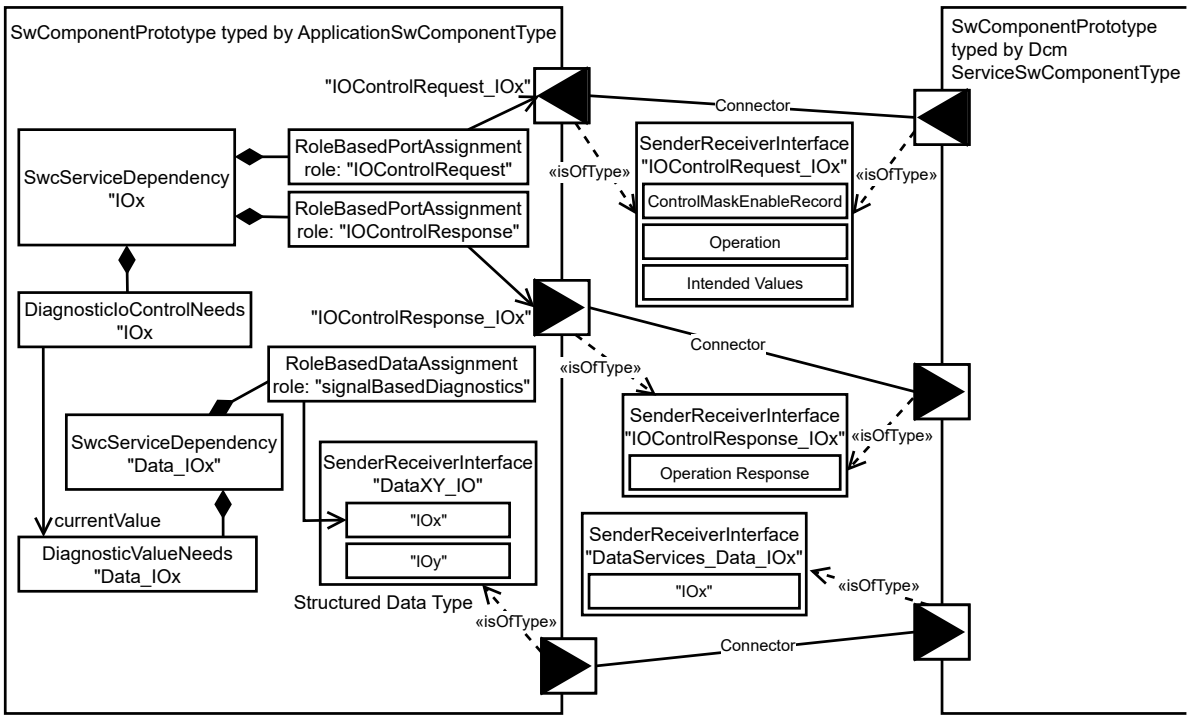

Figure 13.16: Visualization of the service use case

[TPS_SWCT_01657] NamingRule for RPortPrototype referenced by a RoleBasedPortAssignment with attribute role set to "IOControlRequest" ⌈The shortName of a RPortPrototype referenced by a RoleBasedPortAssignment with attribute role set to "IOControlRequest" shall be created by concatenating the prefix "IOControlRequest" and the SwcServiceDependency.shortName, separated by a single underscore character (i.e. "_").⌋

For more information please refer to [SWS_Dcm_01308] and [SWS_Dcm_01309].

[constr_1741] Restriction to explicit sending semantics for the usage of DataServices in the context of a SwcServiceDependency that aggregates DiagnosticValueNeeds that in turn is referenced by a DiagnosticIoControlNeeds

Imposition time: CP: IT_RteGen

⌈A dataElement

- that is referenced by a RoleBasedDataAssignment (where the attribute role is set to signalBasedDiagnostics) owned by a SwcServiceDependency that aggregates DiagnosticValueNeeds that in turn is referenced by a DiagnosticIoControlNeeds
- **shall also be referenced** by a VariableAccess aggregated in the role dataSendPoint by a given RunnableEntity that in turn belongs to the enclosing SwcInternalBehavior.
- **shall not be referenced** by a VariableAccess aggregated in the role dataWriteAccess by a given RunnableEntity that in turn belongs to the enclosing SwcInternalBehavior.

⌋

In other words, the data handled by the diagnostics transformer shall only be sent explicitly. The usage of **implicit sending of these data is not supported**.

13.8.4.8 Dcm Service Use Case: Access to Protocol, Session and Security Information

Scenario: an AtomicSwComponentType defines a client port to get protocol, session and security information or to request a Reset to Default Session.

[TPS_SWCT_02013] AtomicSwComponentType defines a client port to get protocol, session and security information or to request a Reset to Default Session ⌈

Please note that this use case requires the software-component to define an RPortPrototype.

ServiceNeeds kind DiagnosticCommunicationManagerNeeds

RoleBasedPortAssignment valid roles:

- DCMServices [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dcm_00698]

13.8.4.9 Dcm Service Use Case: Verify the Access to Security Level

Scenario: an AtomicSwComponentType provides a server port to verify the access to security level via diagnostic services.

[TPS_SWCT_02015] AtomicSwComponentType verifies the access to security level via diagnostic services ⌈

ServiceNeeds kind DiagnosticsCommunicationSecurityNeeds

RoleBasedPortAssignment valid roles:

- SecurityAccess [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01627] Suffix used for the resulting name of the PortInterface for the Security Access ⌈The *suffix* used for the resulting name of the PortInterface for the Security Access (SecurityAccess_{SecurityLevel}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dcm_00685]

13.8.4.10 Dcm Service Use Case: Service Request Notification

Scenario: an AtomicSwComponentType provides a server port to get notified about a Service Request via diagnostic services. This indicates the successful reception of a new request to application.

Within this Service Request Notification this function application can examine the permission of the diagnostic service / environment.

Please note that the Service Request Notification can be used in two characteristics, i.e. as *manufacturer* ([TPS_SWCT_01577] applies) or as a *supplier* ([TPS_SWCT_01578] applies).

[TPS_SWCT_01577] AtomicSwComponentType requires the notification about a Service Request via diagnostic services with *manufacturer* characteristics ⌈

The attribute DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType shall be set to the value requestCallbackTypeManufacturer.

ServiceNeeds kind DiagnosticCommunicationManagerNeeds

RoleBasedPortAssignment valid roles:

- ServiceRequestNotification [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01578] AtomicSwComponentType requires the notification about a Service Request via diagnostic services with *supplier* characteristics ⌈

The attribute DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType shall be set to the value requestCallbackTypeSupplier.

ServiceNeeds kind DiagnosticCommunicationManagerNeeds

RoleBasedPortAssignment valid roles:

- ServiceRequestNotification [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dcm_00694]

13.8.4.11 Dcm Service Use Case: read/write and IOCtrl current Values by Client Server Interface

Scenario: an AtomicSwComponentType defines a PPortPrototype typed by ClientServerInterface to read/write and IOCtrl current value via diagnostic services (e.g. measurements, variant coding).

In this specific case, two SwcServiceDependencys are referencing the same PPortPrototype via RoleBasedPortAssignment because the PortInterface used to type the PPortPrototype covers the scope of multiple subclasses of ServiceNeeds, as further explained in Chapter 7.11.2.2.

[TPS_SWCT_01690] AtomicSwComponentType defines a PPortPrototype typed by ClientServerInterface to read/write and IOCtrl current value via diagnostic services ⌈

ServiceNeeds kind DiagnosticValueNeeds, DiagnosticIoControlNeeds

RoleBasedPortAssignment valid roles:

- DataServices [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01691] Suffix used for the resulting name of the PortInterface for the Data Services ⌈The suffix used for the resulting name of the PortInterface for the Data Services (DataServices_{Data}) shall be taken from the shortName of the SwcServiceDependency that aggregates the DiagnosticIoControlNeeds.⌋

13.8.4.12 Dcm Service Use Case: Atomic Software-Component acts as a “File Server” to a Diagnostic Tester

Scenario: an AtomicSwComponentType acts as a “file server” to a diagnostic tester.

[TPS_SWCT_01791] `AtomicSwComponentType` acts as a "file server" to a diagnostic tester ⌈

ServiceNeeds kind `DiagnosticRequestFileTransferNeeds`

RoleBasedPortAssignment valid `role`s:

- `RequestFileTransfer` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

Class	**DiagnosticRequestFileTransferNeeds**			
Note	This meta-class indicates the existence of a service use case that involves UDS service 0x38, Request File Transfer.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.44: DiagnosticRequestFileTransferNeeds

13.8.4.13 Dem Service Use Case: Deliver Authentication Notification

Scenario: A software-component receives a notification of a successful execution of a proprietary authentication mechanism. As result of this notification the local diagnostic authentication rights are set to a requested role.

For this purpose, the software-component defines a `PPortPrototype` typed by the `ClientServerInterface` "Authentication".

An example of such an authentication is a central authentication mechanism in a central gateway where a successful authentication will authenticate all ECUs that are behind the gateway.

Such a mechanism provides quick authentication of a larger amount of ECUs with a single authentication request.

In this case, the following setup applies:

[TPS_SWCT_01894] Deliver Authentication Notification ⌈

ServiceNeeds kind `DiagnosticControlNeeds`

RoleBasedPortAssignment valid roles:

- Authentication [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The role “Authentication” is applicable for a PPortPrototype typed by the ClientServerInterface “Authentication”.

13.8.5 OBD related Needs

The ObdRatioServiceNeeds describes further properties of the implementation of the Rate Based Monitoring (e.g. connectionType) as well as the logical dependencies relevant for the ECU configuration.

Class	**ObdRatioServiceNeeds**			
Note	Specifies the abstract needs of a component or module on the configuration of OBD Services in relation to a particular "ratio monitoring" which is supported by this component or module.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
connectionType	ObdRatioConnectionKindEnum	0..1	attr	Defines how the DEM is connected to the component or module to perform the IUMPR (In use monitor performance ratio) service.
rateBasedMonitoredEvent	DiagnosticEventNeeds	0..1	ref	The rate based monitored Diagnostic Event. **Tags:** atp.Splitkey=rateBasedMonitoredEvent
usedFid	FunctionInhibitionNeeds	0..1	ref	This represents the primary Function Inhibition Identifier used for the rate based monitor. This is an optional attribute. **Tags:** atp.Splitkey=usedFid

Table 13.45: ObdRatioServiceNeeds

Class	**ObdControlServiceNeeds**
Note	Specifies the abstract needs of a component or module on the configuration of OBD Service 08 (request control of on-board system) in relation to a particular test-Identifier (TID) supported by this component or module.
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds

▽

△

Class	**ObdControlServiceNeeds**			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.46: ObdControlServiceNeeds

Enumeration	**ObdRatioConnectionKindEnum**
Note	Defines the way how the IUMPR service connection between the Dem and the client component or module is handled (for details see the DEM Specification).
Aggregated by	ObdRatioServiceNeeds.connectionType
Literal	***Description***
apiUse	The IUMPR service (of the DEM) uses an explicit API to connect to the component or module. **Tags:** atp.EnumerationLiteralIndex=0
observer	The IUMPR service (of the Dem) uses no API but "observes" the associated diagnostic event. **Tags:** atp.EnumerationLiteralIndex=1

Table 13.47: ObdRatioConnectionKindEnum

In addition, `ObdPidServiceNeeds`, `ObdInfoServiceNeeds`, `ObdMonitorServiceNeeds` and `ObdControlServiceNeeds` are required in order to specify the specific needs for OBD diagnostic service calls. Note that `ObdPidServiceNeeds` is used for the Diagnostic Event Manager as well.

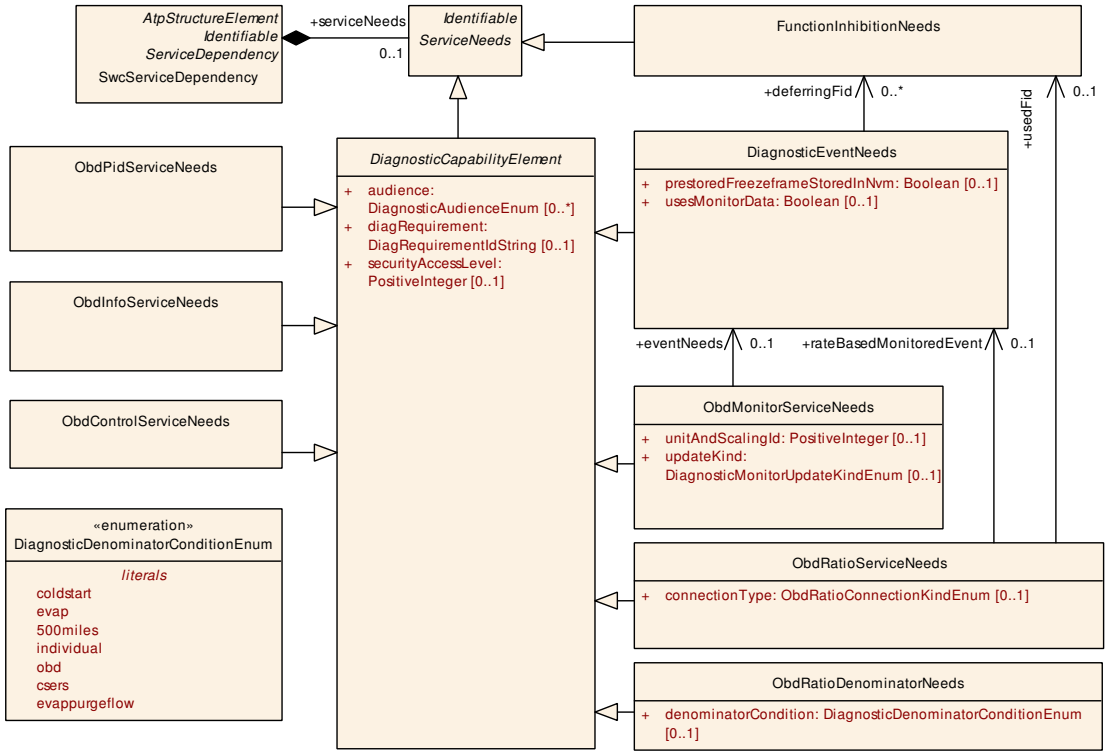

Figure 13.17: `ServiceNeeds`: Diagnostic-related `ServiceNeeds` with emphasis on OBD

[constr_1520] Semantics of ObdRatioServiceNeeds.rateBasedMonitoredEvent

Imposition time: CP: IT_RteGen

⌈In the context of an SwcServiceDependency, each DiagnosticEventNeeds referenced in the role rateBasedMonitoredEvent shall only be referenced by at most a single ObdRatioServiceNeeds.⌋

Class	**ObdPidServiceNeeds**			
Note	Specifies the abstract needs of a component or module on the configuration of OBD Services in relation to a particular PID (parameter identifier) which is supported by this component or module. In case of using a client/server communicated value, the related value shall be communicated via the port referenced by assignedPort. The details of this communication (e.g. appropriate naming conventions) are specified in the related software specifications (SWS).			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.48: ObdPidServiceNeeds

Class	**ObdInfoServiceNeeds**			
Note	Specifies the abstract needs of a component or module on the configuration of OBD Services in relation to a given InfoType (OBD Service 09) which is supported by this component or module.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.49: ObdInfoServiceNeeds

Class	**ObdMonitorServiceNeeds**			
Note	Specifies the abstract needs of a component or module on the configuration of OBD Services in relation to a particular on-board monitoring test supported by this component or module. (OBD Service 06).			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
applicationDataType	ApplicationDataType	0..1	ref	reference to an ApplicationDataType that describes the scaling of the data reported by the software-component to the Dem. **Tags:** atp.Splitkey=applicationDataType
eventNeeds	DiagnosticEventNeeds	0..1	ref	This reference identifies the corresponding diagnostic event. **Tags:** atp.Splitkey=eventNeeds
unitAndScalingId	PositiveInteger	0..1	attr	Unit and scaling ID according to ISO 15031-5.
updateKind	DiagnosticMonitorUpdateKindEnum	0..1	attr	This attribute indicates the settings for the acceptance of updates to the Dem.

Table 13.50: ObdMonitorServiceNeeds

Enumeration	**DiagnosticMonitorUpdateKindEnum**
Note	This enumeration indicates the acceptance criteria for a diagnostic monitor.
Aggregated by	ObdMonitorServiceNeeds.updateKind
Literal	***Description***
always	The value 'always' configures Dem to accept the call to SetDTR() regardless of the state of the diagnostics. **Tags:** atp.EnumerationLiteralIndex=0
steady	The value 'steady' configures Dem to accept it only when debouncing is at the limit. **Tags:** atp.EnumerationLiteralIndex=1

Table 13.51: DiagnosticMonitorUpdateKindEnum

13.8.5.1 Dem Service Use Case: In-Use-Monitor Performance Ratio calculation

Scenario: an `AtomicSwComponentType` implements a OBD system monitor with In-Use-Monitor Performance Ratio (IUMPR) and defines client ports to provide the capability to define the number of times a fault could have been found.

[TPS_SWCT_02007] `AtomicSwComponentType` implements a OBD system monitor with In-Use-Monitor Performance Ratio ⌈

ServiceNeeds kind `ObdRatioServiceNeeds`

RoleBasedPortAssignment valid `role`s:

- `IUMPRNumerator` [0..1]
- `IUMPRDenominator` [0..1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00610] and [SWS_Dem_00611].

[constr_2053] Consistency between `role` `IUMPRNumerator` and `ObdRatioServiceNeeds.connectionType`

Imposition time: CP: `IT_RteGen`

⌈If a `SwcServiceDependency` with a `ObdRatioServiceNeeds` is defined and the attribute `connectionType` of the contained `ObdRatioServiceNeeds` is set to `ObdRatioConnectionKindEnum.apiUse`, a `RoleBasedPortAssignment` with the `role` value `IUMPRNumerator` shall be defined.

If the attribute connectionType of the contained ObdRatioServiceNeeds is set to ObdRatioConnectionKindEnum.observer, the role value IUMPRNumerator is not applicable.⌋

13.8.5.2 Dcm Service Use Case: read Parameter Identifier via Diagnostic Services by Client Server Interface

Scenario: an AtomicSwComponentType defines a server port to read/write current value via OBD services.

[TPS_SWCT_02008] AtomicSwComponentType defines a server port to read-/write current value via OBD services ⌈

ServiceNeeds kind ObdPidServiceNeeds

RoleBasedPortAssignment valid roles:

- DataServices [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01630] Suffix used for the resulting name of the PortInterface for the Data Services ⌈The *suffix* used for the resulting name of the PortInterface for the Data Services (DataServices_{Data}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dcm_00686].

13.8.5.3 Dcm Service Use Case: read Parameter Identifier via Diagnostic Services by Sender Receiver Interface

Scenario: an AtomicSwComponentType defines sender receiver ports to read/write current values via OBD services.

[TPS_SWCT_02009] AtomicSwComponentType defines sender receiver ports to read/write current values via OBD services ⌈

ServiceNeeds kind ObdPidServiceNeeds

RoleBasedPortAssignment valid roles:
N/A

RoleBasedDataAssignment valid roles:

- signalBasedDiagnostics [1..2]

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

To read the signal the AtomicSwComponentType shall define an AbstractProvidedPortPrototype, to write the signal the AtomicSwComponentType shall define an AbstractRequiredPortPrototype.⌋

For more information please refer to [SWS_Dcm_00687].

Please note that [constr_1679] applies for this service use case.

13.8.5.4 Dcm Service Use Case: Request Vehicle Information

Scenario: an AtomicSwComponentType defines a server port to read vehicle information values via OBD services.

[TPS_SWCT_02010] AtomicSwComponentType defines a server port to read vehicle information values via OBD services ⌈

ServiceNeeds kind ObdInfoServiceNeeds

RoleBasedPortAssignment valid roles:

- InfotypeServices [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01631] Suffix used for the resulting name of the PortInterface for the Infotype Services ⌈The *suffix* used for the resulting name of the PortInterface for the Infotype Services (InfotypeServices_{VehInfoData}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dcm_00688].

13.8.5.5 Dem Service Use Case: Read DTR Data from SW-C for OBD Service $06

Scenario: an `AtomicSwComponentType` exposes a client port to read DTR value.

[TPS_SWCT_02011] `AtomicSwComponentType` defines a client port to read DTR value ⌈

ServiceNeeds kind `ObdMonitorServiceNeeds`

RoleBasedPortAssignment valid `role`s:

- `DTRCentralReport` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

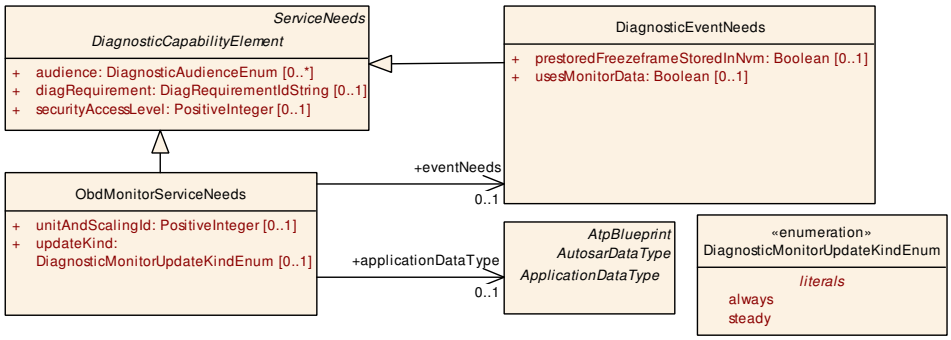

Figure 13.18: Modeling of `ObdMonitorServiceNeeds`

13.8.5.6 Dcm Service Use Case: request Control of On-Board System, Test or Component

Scenario: an `AtomicSwComponentType` defines a server port for request control of on-board system, test or component via OBD services.

[TPS_SWCT_02012] `AtomicSwComponentType` defines a server port for request control of on-board system, test or component via OBD services ⌈

ServiceNeeds kind `ObdControlServiceNeeds`

RoleBasedPortAssignment valid `role`s:

- `RequestControlServices` [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01633] Suffix used for the resulting name of the PortInterface for the Request Control Services ⌈The *suffix* used for the resulting name of the PortInterface for the Request Control Services (RequestControlServices_{Tid}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

For more information please refer to [SWS_Dcm_00691].

13.8.5.7 Dem Service Use Case: In-Use-Monitoring Performance Ratio Denominator Interface

Scenario: an AtomicSwComponentType implements a denominator (or accesses a ratio for transmission to other control units).

[TPS_SWCT_01765] Dem Service Use Case: In-Use-Monitoring Performance Ratio Denominator interface ⌈

ServiceNeeds kind ObdRatioDenominatorNeeds

RoleBasedPortAssignment valid roles:

- IUMPRDenominatorCondition [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information please refer to [SWS_Dem_00742].

Class	**ObdRatioDenominatorNeeds**			
Note	This meta-class shall be used to indicate that a software-component wants to access the in-use-monitoring performance ration denominator.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
denominator Condition	DiagnosticDenominator ConditionEnum	0..1	attr	This attribute indicates the applicable denominator condition.

Table 13.52: ObdRatioDenominatorNeeds

Enumeration	**DiagnosticDenominatorConditionEnum**
Note	This enumeration contains valid denominator types.
Aggregated by	ObdRatioDenominatorNeeds.denominatorCondition
Literal	***Description***
_500miles	Condition based on definition of 500miles conditions as defined for OBD2. **Tags:** atp.EnumerationLiteralIndex=2 xml.name=-500-MILES
coldstart	Condition based on definition of "cold start" as defined for EU5+ **Tags:** atp.EnumerationLiteralIndex=0
csers	Conditions based on the "Cold start emission reduction strategy" denominator **Tags:** atp.EnumerationLiteralIndex=5
evap	Condition based on definition of "EVAP" conditions as defined for OBD2. **Tags:** atp.EnumerationLiteralIndex=1
evappurgeflow	Conditions based on the "EVAP purge flow" denominator. **Tags:** atp.EnumerationLiteralIndex=6
individual	condition based on definition of individual requirements. **Tags:** atp.EnumerationLiteralIndex=3
obd	Condition based on definition of OBD requirements. **Tags:** atp.EnumerationLiteralIndex=4

Table 13.53: DiagnosticDenominatorConditionEnum

13.8.5.8 Dem Service Use Case: SW-C sets DTR for OBD Service $06

Scenario: an `AtomicSwComponentType` that implements an OBD-relevant diagnostics including DTR (Mode $06) data calls `SetEventStatus()` with pass/fail (Monitor-Internal (no)-debouncing by Dem) or prepass/prefail to move the debouncing in Dem. The DTR/Mode $06 data is delivered by a call to `SetDTR()`.

[TPS_SWCT_01879] `AtomicSwComponentType` defines a client port to set DTR value ⌈

ServiceNeeds kind `ObdMonitorServiceNeeds`

RoleBasedPortAssignment valid `role`s:

- `DTRCentralReport` [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Please note that a very similar modeling exists in the form of DiagnosticTestResult.updateKind in the context of the TPS Diagnostic Extract.

The implementer of the software-component is aware of the way the software-component uses debouncing and how it calls the Dem.

The implementer of the software-component has all the information needed to set a proper value for the attribute ObdMonitorServiceNeeds.updateKind.

The author of the DEXT, on the other end, might notice that a diagnostics software-component is broken, and might use the DEXT as work-around to fix a wrong setting of ObdMonitorServiceNeeds.updateKind by means of DiagnosticTestResult.updateKind.

Class	**DiagnosticTestResult**			
Note	This meta-class represents the ability to define diagnostic test results. **Tags:** atp.recommendedPackage=DiagnosticTestResults			
Base	*ARElement*, *ARObject*, *CollectableElement*, *DiagnosticCommonElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
diagnosticEvent	DiagnosticEvent	0..1	ref	This attribute represents the diagnostic event that is related to the diagnostic test result. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=diagnosticEvent, diagnosticEvent.diagnosticEvent, diagnosticEvent.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
monitoredIdentifier	DiagnosticMeasurementIdentifier	0..1	ref	This attribute represents the related diagnostic monitored identifier. **Tags:** atp.Splitkey=monitoredIdentifier
testIdentifier	DiagnosticTestIdentifier	0..1	aggr	This attribute represents the applicable test identifier. **Tags:** atp.Splitkey=testIdentifier
updateKind	DiagnosticTestResultUpdateEnum	0..1	attr	This attribute controls the update behavior of the enclosing DiagnosticTestResult. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

Table 13.54: DiagnosticTestResult

13.8.6 Diagnostics over IP

This chapter describes the usage of specific meta-classes to support the specification of diagnostics over IP. For more details, please refer to [44, ISO 13400].

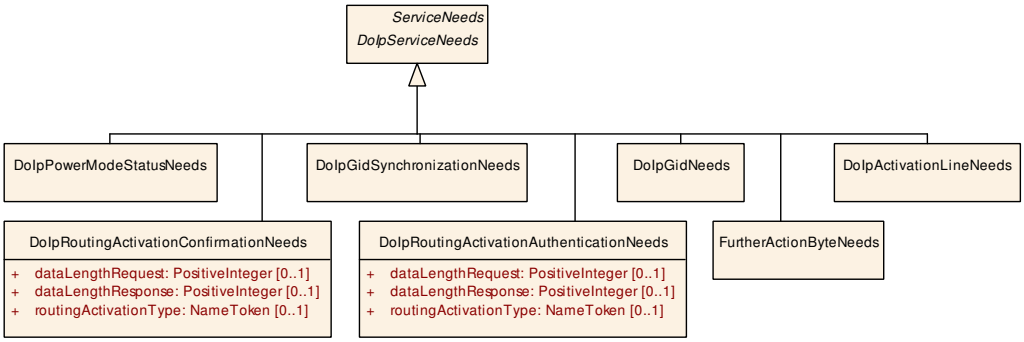

Figure 13.19: Subclasses of `ServiceNeeds` for implementing diagnostics over IP

Class	***DoIpServiceNeeds*** (abstract)			
Note	This represents an abstract base class for ServiceNeeds related to DoIP.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Subclasses	DoIpActivationLineNeeds, DoIpGidNeeds, DoIpGidSynchronizationNeeds, DoIpPowerModeStatus Needs, DoIpRoutingActivationAuthenticationNeeds, DoIpRoutingActivationConfirmationNeeds, Further ActionByteNeeds			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.55: DoIpServiceNeeds

Class	**DoIpGidNeeds**			
Note	The DoIpGidNeeds indicates that the software-component owning this ServiceNeeds is providing the GID number either after a GID Synchronisation or by other means like e.g. flashed EEPROM parameter. This need can be used independent from DoIpGidSynchronizationNeeds and is necessary if the GID can not be provided out of the DoIP configuration options.			
Base	*ARObject*, *DoIpServiceNeeds*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.56: DoIpGidNeeds

Class	**DoIpGidSynchronizationNeeds**			
Note	The DoIpGidSynchronizationNeeds indicates that the software-component owning this ServiceNeeds is triggered by the DoIP entity to start a synchronization of the GID (Group Identification) on the DoIP service 0x0001, 0x0002, 0x0003 or before announcement via service 0x0004 according to ISO 13400-2:2012 if necessary. Note that this need is only relevant for DoIP synchronization masters.			
Base	*ARObject*, *DoIpServiceNeeds*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.57: DoIpGidSynchronizationNeeds

Class	DoIpPowerModeStatusNeeds			
Note	The DoIpPowerModeStatusNeeds indicates that the software-component owning this ServiceNeeds is providing the PowerModeStatus for the DoIP service 0x4003 according to ISO 13400-2:2012.			
Base	*ARObject*, *DoIpServiceNeeds*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table 13.58: DoIpPowerModeStatusNeeds

Class	DoIpRoutingActivationAuthenticationNeeds			
Note	DoIPRoutingActivationAuthenticationNeeds indicates that the software-component owning this Service Needs will have an authentication required for a DoIP routing activation service (0x0005) according to ISO 13400-2:2012.			
Base	*ARObject*, *DoIpServiceNeeds*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
dataLength Request	PositiveInteger	0..1	attr	Describes the length in byte of the additional information for RA authentication that is needed by the software entity. If the software entity is a software-component the attribute does not need to exist as the information is available via the length of the uint8 Array type. Otherwise (i.e the software entity is a Complex Driver) this attribute needs to be filled out if additional information is needed.
dataLength Response	PositiveInteger	0..1	attr	Describes the length in byte of the additional information for RA authentication that is provided by the software entity. If the software entity is a software-component the attribute does not need to exist as the information is available via the length of the uint8 Array type. Otherwise (i.e the software entity is a Complex Driver) this attribute needs to be filled in if additional information is provided.
routing ActivationType	NameToken	0..1	attr	Describes the ISO 13400-2:2012 "routing activation request activation type" which is received via DoIP service 0x0005. 0x00 is DEFAULT, 0x01 is WWH-OBD. If neither of the specified values (0x00 or 0x01) is needed the token shall contain RA_ + hex value representation of the integer value shall be used (i.e: RA_0xE1).

Table 13.59: DoIpRoutingActivationAuthenticationNeeds

Class	DoIpRoutingActivationConfirmationNeeds			
Note	DoIpRoutingActivationConfirmationNeeds indicates that the software-component that owns this Service Needs will have a confirmation required for a DoIP routing activation service (0x0005) according to ISO 13400-2:2012.			
Base	*ARObject*, *DoIpServiceNeeds*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
dataLength Request	PositiveInteger	0..1	attr	Describes the length in byte of the additional information for RA confirmation that is needed by the software entity. If the software entity is a software-component the attribute does not need to exist as the information is available via the length of the uint8 Array type. Otherwise (i.e the software entity is a Complex Driver) this attribute needs to be filled out if additional information is needed.

△

Class	**DoIpRoutingActivationConfirmationNeeds**			
dataLength Response	PositiveInteger	0..1	attr	Describes the length in byte of the additional information for RA confirmation that is provided by the software entity. If the software entity is a software-component the attribute does not need to exist as the information is available via the length of the uint8 Array type. Otherwise (i.e the software entity is a Complex Driver) this attribute needs to be filled out if additional information is provided.
routing ActivationType	NameToken	0..1	attr	Describes the ISO 13400-2:2012 "routing activation request activation type" which is received via DoIP service 0x0005. 0x00 is DEFAULT, 0x01 is WWH-OBD. If neither of the specified values (0x00 or 0x01) is needed the token shall contain RA_ + hex value representation of the integer value shall be used (i.e: RA_0xE1).

Table 13.60: DoIpRoutingActivationConfirmationNeeds

Class	**DoIpActivationLineNeeds**			
Note	A DoIP entity needs to be informed when an external tester is attached or activated. The DoIpActivation ServiceNeeds specifies the trigger for such an event. Examples would be a Pdu via a regular communication bus, a PWM signal, or an I/O. For details please refer to the ISO 13400.			
Base	*ARObject*, *DoIpServiceNeeds*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.61: DoIpActivationLineNeeds

13.8.6.1 DoIP Service Use Case: GID Synchronization can be necessary if the ECU is DoIP Gid Synchronization Master

Scenario: on the event of connecting a tester to an ECU a GID synchronization can be necessary if the ECU is DoIP Gid synchronization master. In this case, it is necessary to define a `DoIpGidSynchronizationNeeds`.

[TPS_SWCT_01537] GID synchronization can be necessary if the ECU is DoIP Gid synchronization master ⌈

ServiceNeeds kind `DoIpGidSynchronizationNeeds`

RoleBasedPortAssignment valid `role`s:

- `CallbackTriggerGIDSynchronization` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

13.8.6.2 DoIP Service Use Case: Vehicle Information is broadcast or can be requested by the Tester

Scenario: vehicle information is broadcast or can be requested by the tester. In this case, it is necessary to define a DoIpGidNeeds.

[TPS_SWCT_01538] Vehicle information is broadcast or can be requested by the tester ⌈

ServiceNeeds kind DoIpGidNeeds

RoleBasedPortAssignment valid roles:

- CallbackGetGID [1]

RoleBasedDataAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.8.6.3 DoIP Service Use Case: Tester could also request the Power Status with respect to Diagnostics

Scenario: before starting the diagnostics processing for the DoIP entity or sub-networks connected via DoIP, the tester could also request the power status with respect to diagnostics. To support this option it will be necessary to define a DoIpPowerModeStatusNeeds.

[TPS_SWCT_01539] Tester can also request before starting diagnostic processing for the DoIP entity or sub-networks connected via DoIP the power status with respect to diagnostics ⌈

ServiceNeeds kind DoIpPowerModeStatusNeeds

RoleBasedPortAssignment valid roles:

- CallbackGetPowerMode [1]

RoleBasedDataAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.8.6.4 DoIP Service Use Case: Routing Activation Mechanism is used which can lead to additional Impact regarding Authentication or Confirmation

Scenario: to enable diagnostics of the tester to a different target address, the routing activation mechanism is used which can lead to additional impact regarding authentication or confirmation. Here, the definition of DoIpRoutingActivationAuthenticationNeeds and/or DoIpRoutingActivationConfirmationNeeds would be applicable.

[TPS_SWCT_01544] *prefix* used for the actual name of the used PortInterface for the routing activation ⌈The *prefix* used for the actual name of the used PortInterface for the routing activation shall be taken from the shortName of the enclosing SwcServiceDependency.⌋

[TPS_SWCT_01540] Routing activation mechanism is used which can lead to additional impact regarding authentication or confirmation ⌈

ServiceNeeds kind

- DoIpRoutingActivationAuthenticationNeeds [0..1]
- DoIpRoutingActivationConfirmationNeeds [0..1]

RoleBasedPortAssignment valid roles:

- RoutingActivation [1]

RoleBasedDataAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.8.6.5 DoIP Service Use Case: a DoIP Entity needs to be informed when an External Tester is attached or activated.

Scenario: to enable diagnostics by connecting a tester to an ECU it is necessary that the application software becomes aware of the tester's presence.

For this purpose, the applicable ServiceSwComponentType is supposed to provide a PPortPrototype typed by the ModeSwitchInterface named DoIPActivationLineStatus towards the application.

To trigger the existence of the PPortPrototype, DoIpActivationLineNeeds shall be defined.

[TPS_SWCT_01546] Notification when an external tester is attached or activated ⌈

ServiceNeeds kind DoIpActivationLineNeeds

RoleBasedPortAssignment valid roles:

- DoIPActivationLineStatus [1]

RoleBasedDataAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.8.6.6 Service Use Case: Set and reset Warning Indicator Request Bit

Scenario: In some cases (e.g. controlling a failsafe reaction in application) the “Warning Indicator Request”-bit of a corresponding event in Dem shall be set/reset by a special “failsafe software-component”.

The failsafe software-component has to ensure a proper status of the “Warning Indicator Request”-bit (e.g. regarding ISO14229-1 or manufacture specific requirements).

Therefore, the failsafe SW-C can use existing Dem mechanism to get the information about status changes of events in Dem (e.g. CallbackEventUdsStatusChanged).

For this purpose, the applicable ServiceSwComponentType is supposed to provide a PPortPrototype typed by the ClientServerInterface named EventStatus towards the application.

To trigger the existence of the PPortPrototype, WarningIndicatorRequestedBitNeeds shall be defined.

[TPS_SWCT_01547] Ability to set and reset the Warning Indicator Request bit ⌈

ServiceNeeds kind WarningIndicatorRequestedBitNeeds

RoleBasedPortAssignment valid roles:

- EventStatus [1]

RoleBasedDataAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Class	WarningIndicatorRequestedBitNeeds			
Note	This meta-class represents the ability to explicitly request the existence of the WarningIndicator RequestedBit.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	Type	Mult.	Kind	Note
–	–	–	–	–

Table 13.62: WarningIndicatorRequestedBitNeeds

13.8.6.7 DoIP Service Use Case: Atomic Software-Component provides the further Action Byte to the DoIP Service Component

Scenario: An `AtomicSwComponentType` provides the “further action byte” used in vehicle identification/announcement message.

[TPS_SWCT_01746] Atomic Software-Component provides the further action byte to the DoIP Service Component ⌈

ServiceNeeds kind `FurtherActionByteNeeds`

RoleBasedPortAssignment valid `role`s:

- `CallbackGetFurtherActionByte` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

Class	FurtherActionByteNeeds			
Note	The FurtherActionByteNeeds indicates that the software-component is able to provide the "further action byte" to the DoIp Service Component.			
Base	*ARObject*, *DoIpServiceNeeds*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	Type	Mult.	Kind	Note
–	–	–	–	–

Table 13.63: FurtherActionByteNeeds

13.8.7 Miscellaneous Diagnostic Service Use-Cases

13.8.7.1 Dcm Service Use Case: DiagnosticSessionControl

Scenario: an AtomicSwComponentType defines an RPortPrototype typed by a ModeSwitchInterface to get informed about the diagnostic session.

[TPS_SWCT_01706] AtomicSwComponentType supports *DiagnosticSessionControl* to get informed about the diagnostic session ⌈

ServiceNeeds kind DiagnosticControlNeeds

RoleBasedPortAssignment valid roles:

- Dcm_DiagnosticSessionControlModeSwitchInterface [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

The role Dcm_DiagnosticSessionControlModeSwitchInterface is applicable for an RPortPrototype typed by a ModeSwitchInterface.⌋

Class	**DiagnosticControlNeeds**			
Note	This meta-class indicates a service use-case for reporting the controlled status by diagnostic services.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.64: DiagnosticControlNeeds

13.8.7.2 Dcm Service Use Case: EcuReset

Scenario: an AtomicSwComponentType defines an RPortPrototype typed by a ModeSwitchInterface to get informed about the current status of *EcuReset* service.

[TPS_SWCT_01707] AtomicSwComponentType supports *EcuReset* service via diagnostic services ⌈

ServiceNeeds kind DiagnosticControlNeeds

RoleBasedPortAssignment valid roles:

- Dcm_EcuResetModeSwitchInterface [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

The role Dcm_EcuResetModeSwitchInterface is applicable for an RPortPrototype typed by a ModeSwitchInterface.⌋

13.8.7.3 Dcm Service Use Case: EcuReset ModeRapidPowerShutDown

Scenario: an AtomicSwComponentType defines an RPortPrototype typed by a ModeSwitchInterface to get informed about the current status of the *EcuReset ModeRapidPowerShutDown* service.

[TPS_SWCT_01708] AtomicSwComponentType supports *EcuReset ModeRapidPowerShutDown* service via diagnostic services ⌈

ServiceNeeds kind DiagnosticControlNeeds

RoleBasedPortAssignment valid roles:

- Dcm_ModeRapidPowerShutDownModeSwitchInterface [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

The role Dcm_ModeRapidPowerShutDownModeSwitchInterface is applicable for an RPortPrototype typed by a ModeSwitchInterface.⌋

13.8.7.4 Dcm Service Use Case: CommunicationControl

Scenario: an AtomicSwComponentType defines an RPortPrototype typed by a ModeSwitchInterface to get informed about the current status of the *CommunicationControl* service per ComM Channel.

[TPS_SWCT_01709] AtomicSwComponentType supports *CommunicationControl* service via diagnostic services ⌈

ServiceNeeds kind DiagnosticControlNeeds

RoleBasedPortAssignment valid roles:

- Dcm_CommunicationControlModeSwitchInterface [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

The role Dcm_CommunicationControlModeSwitchInterface is applicable for an RPortPrototype typed by a ModeSwitchInterface.⌋

13.8.7.5 Dcm Service Use Case: ControlDTCSetting

Scenario: an AtomicSwComponentType defines an RPortPrototype typed by a ModeSwitchInterface to get informed about the current status of the *ControlDTC-Setting* service.

[TPS_SWCT_01711] AtomicSwComponentType supports *ControlDTCSetting* service via diagnostic services ⌈

ServiceNeeds kind DiagnosticControlNeeds

RoleBasedPortAssignment valid roles:

- Dcm_ControlDTCSettingModeSwitchInterface [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

The role Dcm_ControlDTCSettingModeSwitchInterface is applicable for an RPortPrototype typed by a ModeSwitchInterface.⌋

13.8.7.6 Dcm Service Use Case: SecurityAccess

Scenario: an AtomicSwComponentType defines an RPortPrototype typed by a ModeSwitchInterface to get informed about the current diagnostic security level.

[TPS_SWCT_01712] `AtomicSwComponentType` supports SecurityAccess to get informed about the security level ⌈

ServiceNeeds kind `DiagnosticControlNeeds`

RoleBasedPortAssignment valid `role`s:

- `Dcm_SecurityAccessModeSwitchInterface` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

The role `Dcm_SecurityAccessModeSwitchInterface` is applicable for an `RPortPrototype` typed by a `ModeSwitchInterface`.⌋

13.8.7.7 Service Use Case: Atomic Software-Component implements a Hardware Shutdown

Scenario: if a hardware component is detected as being defective, the Dem shall inform the `SwComponentPrototype` typed by an `AtomicSwComponentType` which is responsible for executing a hardware-shutdown.

[TPS_SWCT_01680] Dem Use Case: Atomic Software-Component implements a Hardware Shutdown ⌈

ServiceNeeds kind `DiagnosticComponentNeeds`

RoleBasedPortAssignment valid `role`s:

- `CallbackComponentStatusChanged` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

Class	**DiagnosticComponentNeeds**			
Note	This meta-class represents the ability to specify the service needs for the configuration of component events.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.65: DiagnosticComponentNeeds

13.8.7.8 Service Use Case: Upload and Download of Data

Scenario: a software-component implements the ability to accept data for upload and/or provide data for download. For this purpose the software-component provides a `PPortPrototype` that is supposed to be connected to the Dcm service component.

[TPS_SWCT_01769] Dcm Use Case: Upload and download of data ⌈

ServiceNeeds kind `DiagnosticUploadDownloadNeeds`

RoleBasedPortAssignment valid `role`s:

- `UploadDownloadServices` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

Class	**DiagnosticUploadDownloadNeeds**			
Note	This meta-class represents the ability to specify needs regarding upload and download by means of diagnostic services.			
Base	*ARObject*, *DiagnosticCapabilityElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *Service Needs*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.66: DiagnosticUploadDownloadNeeds

13.9 Diagnostic Log and Trace Dependency

The meta-class `DltUserNeeds` is used together with the `SwcServiceDependency` to define requirements in order to configure the Diagnostic Log and Trace module (for the terms related to the [45, SWS Diagnostic Log and Trace]).

Class	**DltUserNeeds**			
Note	This meta-class specifies the needs on the configuration of the Diagnostic Log and Trace module for one SessionId. This class currently contains no attributes. An instance of this class is used to find out which PortPrototypes of an AtomicSwComponentType belong to this SessionId in order to group the request and response PortPrototypes of the same SessionId. The actual SessionId value is stored in the PortDefinedArgumentValue of the respective PortPrototype specification.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.67: DltUserNeeds

For the described use case of the Dlt Service, the following rule applies:
For every used `ClientServerInterface` it is necessary to create a `RoleBasedPortAssignment`.

Thereby the value of the attribute `role` of the `RoleBasedPortAssignment` has to be set to the name of the used standardized `ClientServerInterface`.

The possible role attribute values and the multiplicity of the related `PortPrototype`s are listed at the use case descriptions in the paragraph **RoleBasedPortAssignment**.

13.9.1 Dlt Use Case: Atomic Software-Component transmits Debug Information

Scenario: `AtomicSwComponentType` sends log messages. In this case the following setup applies:

[TPS_SWCT_02506] Setup for Dlt Use Case: Application software-component accesses the Dlt module ⌈

ServiceNeeds kind : `DltUserNeeds`

RoleBasedPortAssignment valid `role`s:

- `DltControlService` [1]
- `LogTraceSessionControl` [1]
- `InjectionCallback` [0..1]
- `DltSwcMessageService` [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information, refer to [SWS_Dlt_00495], [SWS_Dlt_00496], and [SWS_Dlt_00498].

In this case the software-component has to provide one Client Port (DLTService) in order to register and de-register the context and to send log or trace messages.

13.10 Synchronized Time-Base Manager Dependency

The meta-class SyncTimeBaseMgrUserNeeds is used together with the SwcServiceDependency to define requirements in order to configure the Synchronized Time-Base Manager module (for the terms related to the AUTOSAR Specification of Module StbM see the [46, AUTOSAR Synchronized Time Base Manager]).

Class	**SyncTimeBaseMgrUserNeeds**			
Note	Specifies the needs on the configuration of the Synchronized Time-base Manager for one time-base. This class currently contains no attributes. An instance of this class is used to find out which ports of a software-component belong to this time-base in order to group the request and response ports of the same time-base. The actual time-base value is stored in the PortDefinedArgumentValue of the respective port specification.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
–	–	–	–	–

Table 13.68: SyncTimeBaseMgrUserNeeds

For the described use cases of the StbM Service, the following rule applies:
For every used ClientServerInterface it is necessary to create a RoleBasedPortAssignment.

Thereby the value of the attribute role of the RoleBasedPortAssignment has to be set to the name of the used standardized ClientServerInterface.

The possible role attribute values and the multiplicity of the related PortPrototypes are listed at the use case descriptions in the paragraph **RoleBasedPortAssignment**.

The general idea behind the time synchronization concept is that the roles of global time master and global time slave are partly implemented in the application software.

For this purpose, the application software provides PortPrototypes typed by the standardized PortInterfaces GlobalTime_Master and GlobalTime_Slave.

In many cases both PortInterfaces GlobalTime_Master and GlobalTime_Slave will be used by the application software of one ECU. This means that the ECU is a global time slave on one domain and a global time master on another domain.

In terms of modeling, a given global time domain is represented by a SwcServiceDependency.

If one software-component has to deal with different global time domains (e.g. because it represents a slave in one domain and a master in another) then the corresponding SwcInternalBehavior needs to define one SwcServiceDependency per global time domain.

13.10.1 StbM Use Case: start Timer and potentially get notified about its Expiration

Scenario: a software-component wants to start a timer in the StbM with a given expiration time. The software-component may want to receive a notification when the timer expires. In this case the following setup applies:

[TPS_SWCT_01678] StbM Use Case: start timer and potentially get notified about its expiration ⌈

ServiceNeeds Kind : SyncTimeBaseMgrUserNeeds

RoleBasedPortAssignment valid roles:

- StartTimer [1]
- TimeNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

In this case the software-component needs to have an RPortPrototype typed by the ClientServerInterface StartTimer and (if applicable) a PPortPrototype typed by the ClientServerInterface TimeNotification.

13.10.2 StbM Use Case: Atomic Software-Component wants to get Notifications of Status Changes

Scenario: a software-component wants to receive events whenever the status of the StbM changes. For this purpose, the software-component has a sender/receiver RPortPrototype. In this case the following setup applies:

[TPS_SWCT_01679] StbM Use Case: Software-Component wants to get notifications of status changes ⌈

ServiceNeeds Kind : SyncTimeBaseMgrUserNeeds

RoleBasedPortAssignment valid roles:

- StatusNotification [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The events received from the StbM have a fixed structure. For more details, refer to [SWS_StbM_00284].

13.10.3 StbM Use Case: Process Time Snapshot obtained from Global Time slave for Diagnostics Purposes

Scenario: a software-component provides a PPortPrototype onto which the global time slave pushes snapshots of time synchronization records. This data is typically used for diagnostic purposes.

[TPS_SWCT_01740] StbM Use Case: Process time snapshot obtained from global time slave for diagnostics purposes ⌈

ServiceNeeds Kind : SyncTimeBaseMgrUserNeeds

RoleBasedPortAssignment valid roles:

- MeasurementNotification [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Note that in this case the software-component acts as a server, and the StbM implements a client role.

[TPS_SWCT_01741] Suffix used for the resulting name of the PortInterface for measurement notification ⌈The suffix used for the resulting name of the PortInterface for the measurement notification MeasurementNotification_{TB_Name} shall be taken from the shortName of the applicable SwcServiceDependency.⌋

13.10.4 StbM Use Case: Atomic Software-Component represents a Global Time Master

Scenario: a software-component implements the application-software part of the global time master role. For this purpose the software-component exposes an RPortPrototype that is supposed to be connected to the StbM service component.

[TPS_SWCT_01742] StbM Use Case: Software-component represents a global time master ⌈

ServiceNeeds Kind : SyncTimeBaseMgrUserNeeds

RoleBasedPortAssignment valid roles:

- GlobalTime_Master [1]
- StatusNotification [0..1]
- MeasurementNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Note that in the scope of one SwcServiceDependency (e.g. [TPS_SWCT_01742]) several RoleBasedPortAssignments may be defined. This results in the combination of [TPS_SWCT_01742], [TPS_SWCT_01679], and [TPS_SWCT_01740].

[TPS_SWCT_01743] Suffix used for the resulting name of the PortInterface for the global time master role ⌈The suffix used for the resulting name of the PortInterface for the global time master role GlobalTime_Master_{Name} shall be taken from the shortName of the applicable SwcServiceDependency.⌋

13.10.5 StbM Use Case: Atomic Software-Component represents a Global Time Slave

Scenario: a software-component implements the application-software part of the global time slave role. For this purpose the software-component exposes an RPortPrototype that is supposed to be connected to the StbM service component.

[TPS_SWCT_01744] StbM Use Case: Software-component represents a global time slave ⌈

ServiceNeeds Kind : SyncTimeBaseMgrUserNeeds

RoleBasedPortAssignment valid roles:

- GlobalTime_Slave [1]
- StatusNotification [0..1]
- MeasurementNotification [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

Note that in the scope of one SwcServiceDependency (e.g. [TPS_SWCT_01744]) several RoleBasedPortAssignments may be defined. This results in the combination of [TPS_SWCT_01744], [TPS_SWCT_01679], and [TPS_SWCT_01740].

[TPS_SWCT_01745] Suffix used for the resulting name of the PortInterface for the global time slave role ⌈The suffix used for the resulting name of the PortInterface for the global time slave role GlobalTime_Slave_{Name} shall be taken from the shortName of the applicable SwcServiceDependency.⌋

13.10.6 StbM Use Case: Atomic Software-Component analyzes Predictions about the Time Synchronization Process

Scenario: a time slave collects information on the time synchronization process, to predict e.g. the sync ingress based on its local instance of the global time and check whether master and slave agree upon the current time. The software-component analyzes the predictions to detect any impairments.

[TPS_SWCT_01810] Software-component analyzes predictions about the time synchronization process ⌈

ServiceNeeds Kind : `SyncTimeBaseMgrUserNeeds`

RoleBasedPortAssignment valid `role`s:

- `TimeBaseProviderNotification` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

For this purpose, the analyzer software-component exposes a `PPortPrototype` typed by the `ClientServerInterface` `TimeBaseProviderNotification_{bus}_{TimeBase}` to the StbM service component.

13.10.7 StbM Use Case: Software-Component wants to initiate the Cloning of a Time Base

Scenario: a software-component wants to initiate the cloning of an existing time base by using the standardized Service Interface `GlobalTime_Master`, specifically the `ClientServerOperation` named `Clone`. In this case the following setup applies:

[TPS_SWCT_01854] Software-Component wants to initiate the cloning of a time base ⌈

ServiceNeeds Kind : `SyncTimeBaseMgrUserNeeds`

RoleBasedPortAssignment valid `role`s:

- `GlobalTime_Master` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

The cloning of a time base is subject to certain pre-conditions. For more information, refer to [SWS_StbM_00530]. Regarding the determination of the "{Name}" suffix, [TPS_SWCT_01743] applies.

13.11 Secure On-Board Communication

The meta-class SecureOnBoardCommunicationNeeds is used together with the SwcServiceDependency to define requirements in order to configure the Secure On-Board Communication module (for the terms related to the AUTOSAR Specification of Module SecOc, see the [47, SWS Secure Onboard Communication]).

Class	**SecureOnBoardCommunicationNeeds**			
Note	Specifies the need for the existence of the SecOc module on the respective ECU. This class currently contains no attributes. An instance of this class is used to find out which ports of a software-component deal with the administration of secure communication in order to group the request and response ports.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
verification StatusIndication Mode	VerificationStatus IndicationModeEnum	0..1	attr	This attribute provides the ability to control the mode in which the application software is notified about the result of authentication attempts.

Table 13.69: SecureOnBoardCommunicationNeeds

Enumeration	**VerificationStatusIndicationModeEnum**
Note	This enumeration provides options for setting the mode of a verification status indication.
Aggregated by	SecureOnBoardCommunicationNeeds.verificationStatusIndicationMode
Literal	***Description***
failureAndSuccess	Verification attempts that came out "false" or "true" shall be forwarded to the application software. **Tags:** atp.EnumerationLiteralIndex=1
failureOnly	Only verification attempts that came out "false" shall be forwarded to the application software. **Tags:** atp.EnumerationLiteralIndex=0

Table 13.70: VerificationStatusIndicationModeEnum

13.11.1 SecOc Use Case: obtain the Verification Status of Secure Communication

In this scenario, the ApplicationSwComponentType wants to obtain the status of secure communication.

It is not interested in the details (and would not be able to help anyway even if the details were available).

The SwcServiceDependency shall aggregate a SecureOnBoardCommunicationNeeds.

[TPS_SWCT_01668] SecOc Use Case: obtain the verification status of secure communication ⌈

ServiceNeeds kind SecureOnBoardCommunicationNeeds

RoleBasedPortAssignment valid roles:
N/A

RoleBasedDataAssignment valid roles:

- VerificationStatus [1]

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[constr_1681] Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = VerificationStatus

Imposition time: CP: IT_RteGen

⌈If the attribute RoleBasedDataAssignment.role is set to the value VerificationStatus then the reference RoleBasedDataAssignment.usedDataElement.localVariable shall not exist.⌋

For an explanation of the existence of [constr_1681], it is not intended to provide access to local variables inside the SwcInternalBehavior.

13.11.2 SecOc Use Case: Atomic Software-Component retires from Secure Communication for a given Period

In this scenario, the ApplicationSwComponentType undergoes a reconfiguration period in which it is not able to process any security-related data. During this period, the verification status shall always be set to “failed”.

The SwcServiceDependency shall aggregate a SecureOnBoardCommunicationNeeds.

[TPS_SWCT_01672] SecOc Use Case: software-component retires from secure communication for a given period ⌈

ServiceNeeds kind SecureOnBoardCommunicationNeeds

RoleBasedPortAssignment valid roles:

- VerifyStatusConfiguration [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.11.3 SecOc Use Case: deliver Freshness to SecOC I

Scenario: a dedicated software-component computes and delivers the freshness to SecOc. The freshness can optionally be truncated by the software-component.

For this purpose, the software-component exposes a PPortPrototype to SecOc. This is used for sending a secured message by using the ClientServerOperation GetTxFreshness or GetTxFreshnessTruncData.

[TPS_SWCT_01716] SecOc Use Case: deliver freshness to SecOC I ⌈

ServiceNeeds kind SecureOnBoardCommunicationNeeds

RoleBasedPortAssignment valid roles:

- FreshnessManagement [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.11.4 SecOc Use Case: deliver Freshness to SecOC II

Scenario: SecOc invokes a transmit notification (SPduTxConfirmation) towards the freshness manager. This information can be vital for the computation of the freshness.

[TPS_SWCT_01717] SecOc Use Case: deliver freshness to SecOC II ⌈

ServiceNeeds kind SecureOnBoardCommunicationNeeds

RoleBasedPortAssignment valid roles:

- FreshnessManagement [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.11.5 SecOc Use Case: deliver Freshness to SecOC III

Scenario: caused by out-of-sync freshness, SecOC cannot verify a MAC, and contacts the freshness manager (software-component) again to obtain a recalculated freshness value.

Each recalculation of the freshness inside the freshness manager is counted. After a given threshold of retries, SecOC has to drop the received message. For this purpose, the ClientServerOperation GetRxFreshness or GetRxFreshnessAuthData is used.

[TPS_SWCT_01718] SecOc Use Case: deliver freshness to SecOC III ⌈

ServiceNeeds kind SecureOnBoardCommunicationNeeds

RoleBasedPortAssignment valid roles:

- FreshnessManagement [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.11.6 SecOc Use Case: enable the Sending of Pdus even if Computation of the MAC is not possible

Scenario: there are cases where the ability to send authenticated messages associated with a given freshness id using a default-MAC is required, e.g. if an ECU has been replaced but was not yet provided with cryptographic keys.

Receivers can distinguish this case from the regular authenticated data exchange by looking at the MAC, i.e. a (configurable) default MAC is used in the described case.

[TPS_SWCT_01784] SecOc Use Case: enable the sending of Pdus even if computation of the MAC is not possible ⌈

ServiceNeeds kind SecureOnBoardCommunicationNeeds

RoleBasedPortAssignment valid roles:

- SendDefaultAuthenticationInformation [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.11.7 SecOc Use Case: Receive Notification about an Authentication Attempt

Scenario: a software-component wants to receive a notification about the status of an authentication attempt.

Such a notification can be used to continuously monitor the number of failed verification attempts with the goal to set up a security management system/intrusion detection system that is able to detect an attack that consists of a flood of authentication requests and react with adequate dynamic counter-measures.

For this purpose, the software-component exposes a PPortPrototype that implements the notification handler. The handler may be interested in only *failed* attempts **or** *failed and passed* attempts.

This aspect can be configured by using the attribute SecureOnBoardCommunicationNeeds.verificationStatusIndicationMode.

[TPS_SWCT_01832] SecOc Use Case: Receive notification about an authentication attempt ⌈

ServiceNeeds kind SecureOnBoardCommunicationNeeds

RoleBasedPortAssignment valid roles:

- VerificationStatusIndication [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.11.8 SecOc Use Case: deliver Freshness to SecOC IV

In this scenario, a dedicated software-component computes and delivers the freshness of confidential IPdus to SecOc. The freshness can optionally be truncated by the software-component. For this purpose, the software-component exposes a PPortPrototype to SecOc.

This PPortPrototype is used for supporting the sending of a secured message by using the ClientServerOperations GetTxNonce, GetRxNonce or GetTxNonceTruncData.

[TPS_SWCT_01911] SecOc Use Case: deliver Freshness to SecOc IV ⌈

ServiceNeeds kind SecureOnBoardCommunicationNeeds

RoleBasedPortAssignment valid roles:

- FreshnessManagement [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.12 J1939 Communication

The J1939-specific meta-classes J1939RmOutgoingRequestServiceNeeds and J1939RmIncomingRequestServiceNeeds are used together with the SwcServiceDependency to define requirements in order to configure the J1939 request manager (for the terms related to the AUTOSAR Specification of Module **J1939RM**, see the [48, AUTOSAR SWS SAE J1939 Request Manager]).

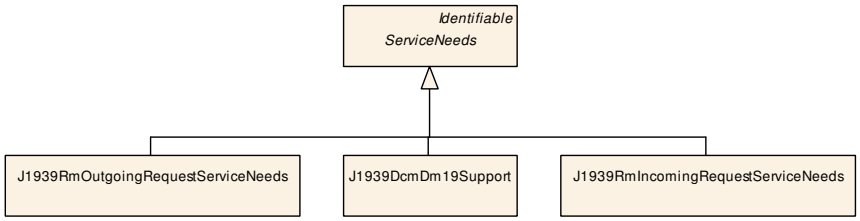

Figure 13.20: ServiceNeeds: J1939-related ServiceNeeds

Class	**J1939RmOutgoingRequestServiceNeeds**			
Note	This meta-class shall be used to specify needs with respect to the configuration of the J1939Rm, in particular for the case where an ApplicationSwComponentType needs to send a request to another J1939 node.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.71: J1939RmOutgoingRequestServiceNeeds

Class	**J1939RmIncomingRequestServiceNeeds**			
Note	"This meta-class shall be used to specify needs with respect to the configuration of the J1939Rm, in particular for the case where an ApplicationSwComponentType needs to accept a request from another J1939 node.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.72: J1939RmIncomingRequestServiceNeeds

13.12.1 J1939RM Use Case: Atomic Software-Component sends Requests to the Bus

Scenario: An AtomicSwComponentType sends requests to the bus. In this case the following setup applies:

To indicate the scenario described in this use case the SwcServiceDependency shall aggregate a J1939RmOutgoingRequestServiceNeeds.

[TPS_SWCT_01673] Application Software Component sends requests using the J1939Rm ⌈

ServiceNeeds kind J1939RmOutgoingRequestServiceNeeds

RoleBasedPortAssignment valid roles:

- AppSendRequest [1]
- AppAckIndication [1]
- AppRequestTimeoutIndication [0..1]
- AppCancelRequestTimeout [0..1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information, refer to the following specification items: [SWS_J1939Rm_00104], [SWS_J1939Rm_00106], [SWS_J1939Rm_00108], and [SWS_J1939Rm_00105].

13.12.2 J1939RM Use Case: Atomic Software-Component accepts Requests from the Bus

Scenario: An AtomicSwComponentType accepts requests from the bus. In this case the following setup applies:

To indicate the scenario described in this use case the SwcServiceDependency shall aggregate a J1939RmIncomingRequestServiceNeeds.

[TPS_SWCT_01674] Application Software Component accepts requests using the J1939Rm ⌈

ServiceNeeds kind J1939RmIncomingRequestServiceNeeds

RoleBasedPortAssignment valid roles:

- AppRequestIndication [1]
- AppSendAck [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

For more information, refer to the following specification items: [SWS_J1939Rm_00103] and [SWS_J1939Rm_00107].

13.12.3 J1939Dcm wants to retrieve Calibration Verification Numbers from an Atomic Software-Component

Scenario: J1939Dcm wants to retrieve calibration verification numbers from an application software-component. For this purpose, the software-component exposes a `PPortPrototype` to the J1939Dcm.

[TPS_SWCT_01809] J1939Dcm wants to retrieve calibration verification numbers from an application software-component ⌈

ServiceNeeds kind `J1939DcmDm19Support`

RoleBasedPortAssignment valid `role`s:

- `J1939Dcm_CalibrationInformation` [1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

Class	**J1939DcmDm19Support**			
Note	The software-component provides information about calibration verification numbers for inclusion in DM19			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.73: J1939DcmDm19Support

13.13 Error Tracer

The meta-class `ErrorTracerNeeds` is used to define requirements in order to configure the Default Error Tracer.

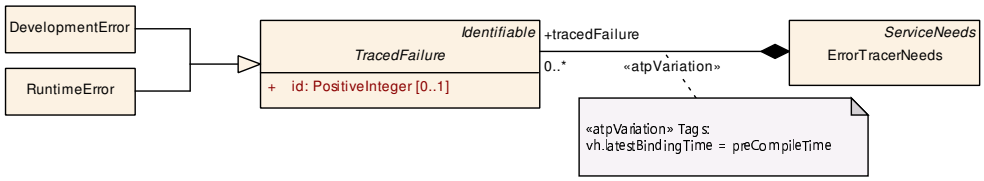

Figure 13.21: Modeling of `ErrorTracerNeeds`

In particular, `ErrorTracerNeeds` provides the exhaustive list of all `tracedFailure` implemented in the enclosing software-component and reported via the `PortPrototype` referenced via `RoleBasedPortAssignment`.

Each `tracedFailure` relates to one ID, represented by attribute `TracedFailure.id`.

For more explanation, consult the specification of the [49, Default Error Tracer].

Class	**ErrorTracerNeeds**			
Note	Specifies the need to report failures to the error tracer.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
tracedFailure	TracedFailure	*	aggr	list of traced failures **Stereotypes:** atpVariation **Tags:** atp.Splitkey=tracedFailure, tracedFailure.shortName, tracedFailure.variationPoint.shortLabel vh.latestBindingTime=preCompileTime

Table 13.74: ErrorTracerNeeds

Class	***TracedFailure*** (abstract)			
Note	Specifies the ability to report a specific failure to the error tracer. The short name specifies the literal applicable for the Default Error Tracer.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	DevelopmentError, RuntimeError			
Aggregated by	ErrorTracerNeeds.tracedFailure			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
id	PositiveInteger	0..1	attr	ID of detected failure used in reporting API as error or fault id.

Table 13.75: TracedFailure

Class	**DevelopmentError**			
Note	The reported failure is classified as development error.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *TracedFailure*			
Aggregated by	ErrorTracerNeeds.tracedFailure			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.76: DevelopmentError

Class	**RuntimeError**			
Note	The reported failure is classified as runtime error.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *TracedFailure*			
Aggregated by	ErrorTracerNeeds.tracedFailure			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
–	–	–	–	–

Table 13.77: RuntimeError

13.13.1 Error Tracer Use Case: report Failure

[TPS_SWCT_01694] Setup for Default Error Tracer Service Use Case: development errors or runtime errors ⌈

Scenario: a software-component reports development errors or runtime errors to the Default Error Tracer. In this case the following setup applies.

ServiceNeeds kind `ErrorTracerNeeds`

RoleBasedPortAssignment valid `role`s:

- DETService[1]

RoleBasedDataAssignment valid `role`s:
N/A

RoleBasedDataTypeAssignment valid `role`s:
N/A

RepresentedPortGroups
N/A

⌋

13.14 Intrusion Detection System Manager

The interaction with the Intrusion Detection System Manager consists of the ability to report security events.

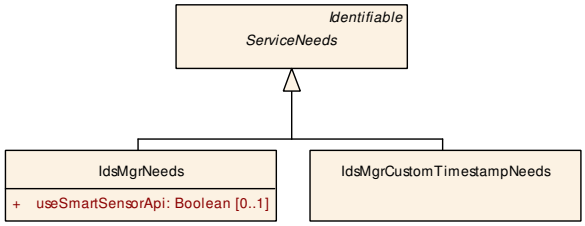

Figure 13.22: Modeling of `ServiceNeeds` for intrusion detection system management

For this purpose, two different kinds of ServiceNeeds are provided: IdsMgrNeeds for the actual reporting of security events, and IdsMgrCustomTimestampNeeds for the retrieval of a timestamp by the IdsM.

Class	**IdsMgrNeeds**			
Note	This meta-class is used to indicate that the enclosing SwcServiceDependency represents a service use case for the Intrusion Detection System Manager. **Tags:** atp.Status=draft			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
useSmart SensorApi	Boolean	0..1	attr	This attribute controls whether the reporting of the security event shall be done by means of the smart sensor API.

Table 13.78: IdsMgrNeeds

Class	**IdsMgrCustomTimestampNeeds**			
Note	This meta-class is used to indicate that the enclosing SwcServiceDependency represents a service use case for the retrieval of a custom timestamp by the Intrusion Detection System Manager. **Tags:** atp.Status=draft			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.79: IdsMgrCustomTimestampNeeds

13.14.1 IdsM Service Use Case: Atomic Software-Component reports Security Event

Scenario: An AtomicSwComponentType reports a security event. It does not use the so-called Smart Sensor API.

To indicate the scenario described in this use case, the SwcServiceDependency shall aggregate a IdsMgrNeeds.

[TPS_SWCT_01826] Application Software Component reports security event

Status: DRAFT

⌈

ServiceNeeds kind IdsMgrNeeds

RoleBasedPortAssignment valid roles:

- IdsMService [1]

RoleBasedDataAssignment valid roles:

N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

[TPS_SWCT_01827] Suffix used for the resulting name of the PortInterface for the IdsM Services

Status: DRAFT

⌈The *suffix* used for the resulting name of the PortInterface for the Data Services (IdsMService_{EventName}) shall be taken from the shortName of the applicable SwcServiceDependency.⌋

13.14.2 IdsM Service Use Case: Atomic Software-Component sets or retrieves Security Event Reporting Mode

Scenario: An AtomicSwComponentType wants to set or retrieve the reporting mode of security events.

To indicate the scenario described in this use case, the SwcServiceDependency shall aggregate a IdsMgrNeeds.

[TPS_SWCT_01900] Application Software Component sets or retrieves security event reporting mode

Status: DRAFT

⌈

ServiceNeeds kind IdsMgrNeeds

RoleBasedPortAssignment valid roles:

- IdsMReportingModeService [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.14.3 IdsM Service Use Case: Atomic Software-Component provides Custom Time Stamp to IdsM

Scenario: An AtomicSwComponentType is able to provide a custom time stamp on request of the IdsM. For this purpose, the AtomicSwComponentType defines a PPortPrototype typed by the ClientServerInterface named "IdsM_RequestCustomTimestamp".

To indicate the scenario described in this use case, the SwcServiceDependency shall aggregate an IdsMgrNeeds.

[TPS_SWCT_01909] Application Software Component provides custom time stamp to IdsM

Status: DRAFT

⌈

ServiceNeeds kind IdsMgrNeeds

RoleBasedPortAssignment valid roles:

- IdsM_RequestCustomTimestamp [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

13.15 Charge Manager

Service use cases for the AUTOSAR Charge Manager are indicated by letting an SwcServiceDependency aggregate ChargeManagerNeeds.

Class	**ChargeManagerNeeds**			
Note	This meta-class shall be taken to indicate that the service use case modeled with this kind of Service Needs assumes the usage of the Charge Manager API.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 13.80: ChargeManagerNeeds

13.15.1 ChrgM Use Case: ChrgM requests Message Data from Atomic Software-Component

The AtomicSwComponentType exposes a PPortPrototype and acts as the server in this interaction.

In this case the following rules apply:

[TPS_SWCT_01885] ChrgM requests message data from the AtomicSwComponentType using Request messages

Status: DRAFT

⌈

ServiceNeeds kind ChargeManagerNeeds

RoleBasedPortAssignment valid roles:

- V2GMessageRequest [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

13.15.2 ChrgM Use Case: ChrgM sends Message Response to Atomic Software-Component

The AtomicSwComponentType exposes a PPortPrototype and acts as the server in this interaction.

In this case the following rules apply:

[TPS_SWCT_01886] ChrgM sends message response to the AtomicSwComponentType, which the ChrgM has received from the EVSE

Status: DRAFT

⌈

ServiceNeeds kind ChargeManagerNeeds

RoleBasedPortAssignment valid roles:

- V2GMessageResponse [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

13.15.3 ChrgM Use Case: ChrgM sends Error Notification to Atomic Software-Component

The AtomicSwComponentType exposes a PPortPrototype and acts as the server in this interaction.

In this case the following rules apply:

[TPS_SWCT_01887] ChrgM sends error notification to the AtomicSwComponentType

Status: DRAFT

⌈

ServiceNeeds kind ChargeManagerNeeds

RoleBasedPortAssignment valid roles:

- V2GMessageResponse [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

13.15.4 ChrgM Use Case: ChrgM provides Connection Setup Parameters to the Atomic Software-Component

The AtomicSwComponentType exposes a PPortPrototype and acts as the server in this interaction.

In this case the following rules apply:

[TPS_SWCT_01888] ChrgM provides connection setup parameters to the AtomicSwComponentType

Status: DRAFT

⌈

ServiceNeeds kind ChargeManagerNeeds

RoleBasedPortAssignment valid roles:

- ConnectionDetails [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroup
N/A

⌋

13.16 General Purpose Time Services

The meta-class GeneralPurposeTimerServiceNeeds is used to define requirements for configuring the general purpose time service.

Class	**GeneralPurposeTimerServiceNeeds**			
Note	This meta-class is used to indicate that the enclosing ServiceDependency interacts with the time service module.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*, *ServiceNeeds*			
Aggregated by	BswServiceDependency.serviceNeeds, SwcServiceDependency.serviceNeeds			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
–	–	–	–	–

Table 13.81: GeneralPurposeTimerServiceNeeds

13.16.1 General Purpose Time Service Use Case

Scenario: an AtomicSwComponentType needs a timer instance from the Time Service module. In this case the following setup applies:

[TPS_SWCT_01889] General Purpose Timer Use Case: Atomic SoftwareComponent needs a timer instance from the Time Service module ⌈

ServiceNeeds kind GeneralPurposeTimerServiceNeeds

RoleBasedPortAssignment valid roles:

- TmPreDefTimerService [1]

RoleBasedDataAssignment valid roles:
N/A

RoleBasedDataTypeAssignment valid roles:
N/A

RepresentedPortGroups
N/A

⌋

14 Rapid Prototyping Scenarios

14.1 Definition of Rapid Prototyping Scenario

A Rapid Prototyping Scenario consists of two main aspects: The description of the byPassPoints (see Figure 14.1) and the relation to a rptHook (see Figure 14.2).

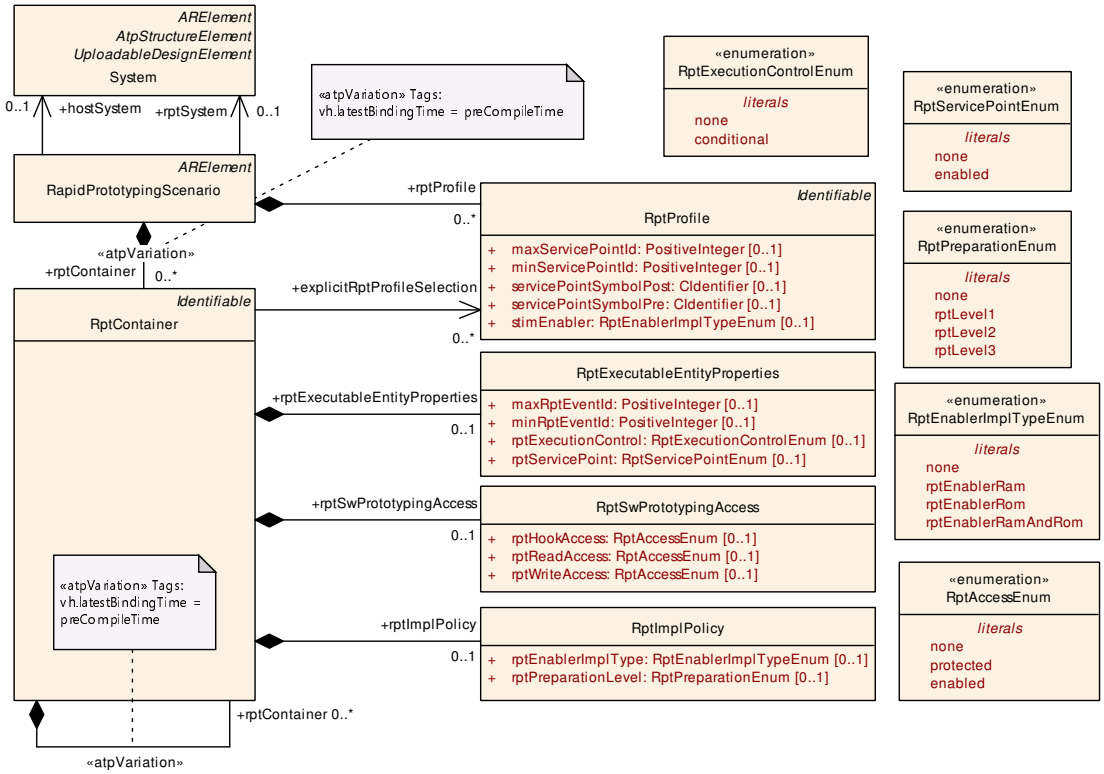

Figure 14.1: Rapid Prototyping Scenario

A Rapid Prototyping Scenario is structured by means of RptContainers. The correct usage of RptContainer structure is described in Chapter 14.2.

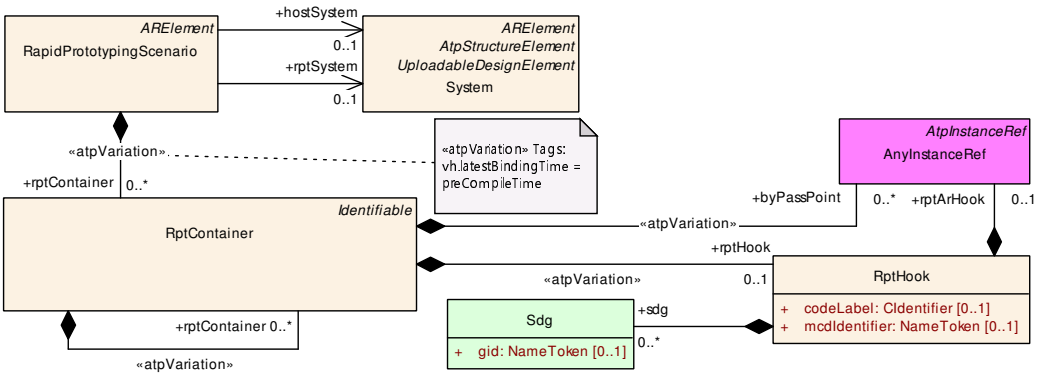

Figure 14.2: Rapid Prototyping Hooks

Class	**RapidPrototypingScenario**			
Note	This meta-class provides the ability to describe a Rapid Prototyping Scenario. Such a Rapid Prototyping Scenario consist out of two main aspects, the description of the byPassPoints and the relation to an rpt Hook. **Tags:** atp.recommendedPackage=RapidPrototypingScenarios			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
hostSystem	System	0..1	ref	System which describes the software components of the host ECU. **Tags:** atp.Splitkey=hostSystem
rptContainer	RptContainer	*	aggr	Top-level rptContainer definitions of this specific rapid prototyping scenario. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=rptContainer, rptContainer.shortName, rpt Container.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
rptProfile	RptProfile	*	aggr	Defiens the applicable Rapid Prototyping profils which are especially defining the smbol of the service functions and the valid id range. The order of the RptProfiles determines the order of the service function invocation by RTE. **Tags:** atp.Splitkey=rptProfile, rptProfile.shortName atp.Status=obsolete
rptSystem	System	0..1	ref	System which describes the rapid prototyping algorithm in the format of AUTOSAR Software Components. **Tags:** atp.Splitkey=rptSystem

Table 14.1: RapidPrototypingScenario

[constr_1987] Existence of instance reference RapidPrototyping-Scenario.hostSystem

Imposition time: CP: IT_RteGen

⌈For each RapidPrototypingScenario, the instance reference to Mode-Declaration in the role hostSystem shall exist.⌋

Class	**RptContainer**			
Note	This meta-class defines a byPassPoint and the relation to a rptHook. Additionally it may contain further rptContainers if the byPassPoint is not atomic. For example a byPass Point referencing to a RunnableEntity may contain rptContainers referring to the data access points of the RunnableEntity. The RptContainer structure on M1 shall follow the M1 structure of the Software Component Descriptions. The category attribute denotes which level of the Software Component Description is annotated.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	RapidPrototypingScenario.rptContainer, RptContainer.rptContainer			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	**RptContainer**			
byPassPoint	AtpFeature	*	iref	byPassPoint describes the required preparation of the host ECU. At a byPassPoint the host ECU shall be capable to communicate with a RPT System in order to support the execution of the rapid prototyping algorithms with the original data calculated by the host system and to replace dedicated results of the host system by the results of the rapid prototyping algorithm. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=byPassPoint, byPassPoint.contextElement, byPassPoint.target, byPassPoint.variationPoint.shortLabel vh.latestBindingTime=preCompileTime **InstanceRef implemented by:** AnyInstanceRef
explicitRpt ProfileSelection	RptProfile	*	ref	This attribute defines the applicable RptProfiles for the specific RptContainer. If not any references to a specific RptProfile is defined, all RptProfiles defined in the Rapid PrototypingScenario are applicable. **Tags:** atp.Splitkey=explicitRptProfileSelection atp.Status=obsolete
rptContainer	RptContainer	*	aggr	Sub-level rptContainer definitions of this specific rapid prototyping scenario. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=rptContainer, rptContainer.shortName, rpt Container.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
rptExecutable EntityProperties	RptExecutableEntity Properties	0..1	aggr	Describes the required code preparation for rapid prototyping at ExecutableEntity invocation. **Tags:** atp.Splitkey=rptExecutableEntityProperties atp.Status=obsolete
rptHook	RptHook	0..1	aggr	The rptHook describes the link between a byPassPoint and the rapid prototyping algorithm. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=rptHook, rptHook.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
rptImplPolicy	RptImplPolicy	0..1	aggr	Describes the required code preparation for rapid prototyping at data accesses. **Tags:** atp.Splitkey=rptImplPolicy atp.Status=obsolete
rptSw Prototyping Access	RptSwPrototyping Access	0..1	aggr	Describes the required accessibility of data and modes by the rapid prototyping tooling. **Tags:** atp.Splitkey=rptSwPrototypingAccess atp.Status=obsolete

Table 14.2: RptContainer

Class	**RptHook**
Note	This meta-class provide the ability to describe a rapid prototyping hook. This can either be described by an other AUTOSAR system with the category RPT_SYSTEM or as a non AUTOSAR software.
Base	*ARObject*

▽

△

Class	**RptHook**			
Aggregated by	RptContainer.rptHook			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
codeLabel	CIdentifier	0..1	attr	This attribute provides a code label which is used in the implementation of the hook. For example this can be an C function name or the name of data definition.
mcdIdentifier	NameToken	0..1	attr	This attribute provides an identifier which shall be used in a MCD System to display the Rpt Hook.
rptArHook	AtpFeature	0..1	iref	This describes the hook with the means of another AUTOSAR system. **Tags:** atp.Splitkey=rptArHook, rptArHook.context Element, rptArHook.target **InstanceRef implemented by:** AnyInstanceRef
sdg	Sdg	*	aggr	This property allows to keep special data which is not represented by the standard model. It can be utilized to keep e.g. tool specific data. **Tags:** atp.Splitkey=sdg, sdg.sdgCaption.shortName

Table 14.3: RptHook

[TPS_SWCT_02046] `byPassPoint` **specifies the rapid prototyping capability** ⌈The `byPassPoint`s are used to describe the preparation of the host ECU.

At the `byPassPoint`s the host ECU shall be capable of communicating with an RPT System in order to support the execution of the rapid prototyping algorithms with the original data calculated by the host system and to replace dedicated results of the host system by the results of the rapid prototyping algorithm.⌋

[TPS_SWCT_02047] `RptHook` **specifies the link to rapid prototyping algorithm** ⌈The `rptHook` describes the link between the `byPassPoint` and the rapid prototyping algorithm.

If the rapid prototyping algorithm is described as an AUTOSAR Software Component, the `rptArHook` reference is applicable. Otherwise, the definition of a `codeLabel` and optionally `mcdIdentifier` shall be used.⌋

In order to describe an RPT system as AUTOSAR software-component a `System` with the `category` `RPT_SYSTEM` shall be defined.

[constr_2054] Valid targets of `rptSystem`

Imposition time: CP: `IT_RteGen`

⌈The `System` referenced in the role `rptSystem` shall be of `category` `RPT_SYSTEM`.⌋

14.2 Usage of RptContainers on M1

[TPS_SWCT_02048] Implicit `SwComponentPrototype` **selection for Rapid Prototyping Scenario** ⌈If a `SwComponentPrototype` is referenced in the role `byPassPoint` by a `RptContainer` without further "Sub" `rptContainer`, all RTE Interfaces

of the AtomicSwComponentType shall be able to support a connection to a rptHook.⌋

[TPS_SWCT_02049] Implicit RunnableEntity selection for Rapid Prototyping Scenario ⌈If a RunnableEntity is referenced in the role byPassPoint by a RptContainer without further "Sub" rptContainer, all RTE Interfaces of the RunnableEntity shall be able to support a connection to a rptHook.⌋

[TPS_SWCT_02050] Explicit selection of access points for Rapid Prototyping Scenario ⌈If a VariableAccess, ParameterAccess, ServerCallPoint, AsynchronousServerCallResultPoint, InternalTriggeringPoint, ModeSwitchPoint, ModeAccessPoint or ExternalTriggeringPoint is referenced in the role byPassPoint by a RptContainer, only RTE Interfaces related to the specific access point are required to be able to support a connection to a rptHook.⌋

[TPS_SWCT_02051] Explicit DataPrototype selection for Rapid Prototyping Scenario ⌈If a DataPrototype instance in a PortPrototype is referenced in the role byPassPoint by a RptContainer, only RTE Interfaces related to the specific DataPrototype are required to be able to support a connection to a rptHook.⌋

[constr_2056] Consistency of RapidPrototypingScenario with respect to rptSystem and rptArHook references

Imposition time: CP: IT_RteGen

⌈Within one RapidPrototypingScenario all rptSystem references shall point to instances in one and only one System, and if existent, all rptArHook shall point to instances in one other and only one other System.⌋

The RptContainer structure on M1 shall follow the M1 structure of the Software Component Descriptions. The category attribute denotes which level of the Software Component Description is annotated.

The following values of the attribute category are predefined by the AUTOSAR standard:

[constr_2055] Valid targets of byPassPoint and rptHook reference, depending on the value of attribute category

Imposition time: CP: IT_RteGen

⌈

Category	*Meaning*	*Specific properties*
SW_COMPONENT_PROTOTYPE	Adds one SwComponentPrototype to an Rapid Prototyping Scenario.	The byPassPoint and rptArHook shall reference a SwComponentPrototypes.
DATA_PROTOTYPE	Adds one instance of a DataPrototype to an Rapid Prototyping Scenario.	The byPassPoint and rptArHook shall reference a DataPrototype instances in PortPrototypes.

▽

△

RUNNABLE_ENTITY	Adds one RunnableEntity to an Rapid Prototyping Scenario.	The byPassPoint and rptArHook shall reference a RunnableEntity instances.
ACCESS_POINTS	Adds one VariableAccess, ParameterAccess, ServerCallPoint, AsynchronousServerCallResultPoint, InternalTriggeringPoint, ModeSwitchPoint, ModeAccessPoint or ExternalTriggeringPoint to a Rapid Prototyping Scenario.	The byPassPoint and rptArHook shall reference a VariableAccess, ParameterAccess, ServerCallPoint, AsynchronousServerCallResultPoint, InternalTriggeringPoint, ModeSwitchPoint, ModeAccessPoint or ExternalTriggeringPoint instances.

▽

14.3 Usage of Ability to split into partial Models for RptContainers on M1

[TPS_SWCT_02052] Definition of Rapid Prototyping Scenario is splittable ⌈The aggregations in the roles rptContainer, byPassPoint, explicitRptProfileSelection, and rptHook at RptContainer are decorated by stereotype ≪atpSplitable≫. By this means, it is possible to specify aspects of RptContainers in a later process step.⌋

The later specification of RptHooks may require additional byPassPoints as well to show their relationship to lower level elements in a component description, such as VariableAccess, where in contrast the byPassPoints may only be specified on higher level elements such as SwComponentPrototypes in a first step.

14.4 Modifications of the Meta-Model for supporting the RPT scenario

The implementation of the rapid-prototyping scenario implies the definition of *access points* (see [constr_2055]). To be able to fulfill this role, the *access points* shall be represented by meta-classes derived from Referrable.

Most candidates for becoming *access points* are already inheriting from Referrable and therefore do not require further treatment (see Figure 14.3). Two meta-classes in this collection, however, are not derived from Referrable:

- ExternalTriggeringPoint
- ModeAccessPoint

It is not feasible to fix this issue by simply letting the two meta-classes inherit from Referrable because this would break the backwards compatibility of the AUTOSAR XML Schema[1].

Therefore, a different approach (as sketched in Figure 14.3) has been implemented.

[1] Because in this case the shortName becomes mandatory.

A new meta-class IdentCaption is created that introduces the capabilities of the meta-class Identifiable (that, in turn, inherits from Referrable) to its subclasses, ModeAccessPointIdent and ExternalTriggeringPointIdent.

These, in turn, are **optionally**[2] aggregated in the role ident by ModeAccessPoint, or in the role ident by meta-class ExternalTriggeringPoint.

An example of the definition of a RapidPrototypingScenario can be found in Chapter B.6.1.

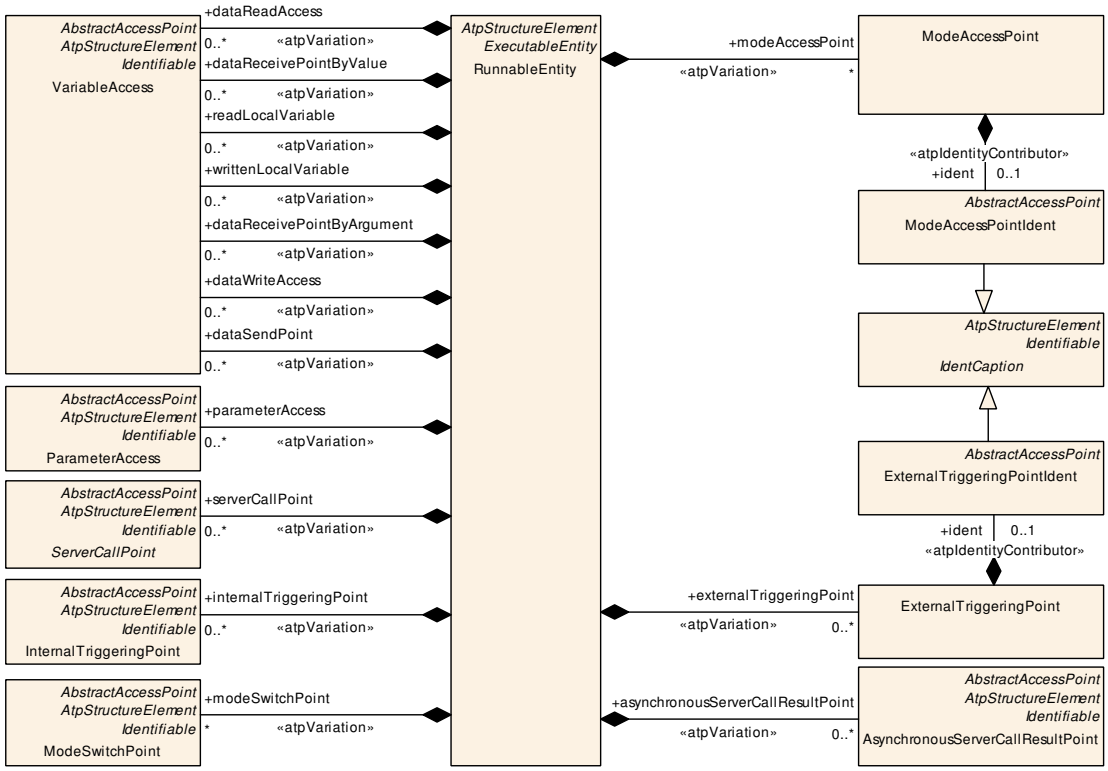

Figure 14.3: Access Points used in the context of the Rapid Prototyping Scenario

Class	***IdentCaption*** (abstract)			
Note	This meta-class represents the caption. This allows having some meta-classes optionally identifiable.			
Base	*ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	BswServiceDependencyIdent, DiagnosticParameterIdent, ExternalTriggeringPointIdent, ModeAccessPointIdent			
Aggregated by	*AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 14.4: IdentCaption

[2] Again, the optional aggregation is a necessary prerequisite to not break the backwards compatibility of the AUTOSAR XML schema.

Class	**ModeAccessPointIdent**			
Note	This meta-class has been created to introduce the ability to become referenced into the meta-class `ModeAccessPoint` without breaking backwards compatibility.			
Base	*ARObject*, *AbstractAccessPoint*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *IdentCaption*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, ModeAccessPoint.ident			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 14.5: ModeAccessPointIdent

Class	**ExternalTriggeringPointIdent**			
Note	This meta-class has been created to introduce the ability to become referenced into the meta-class `ExternalTriggeringPoint` without breaking backwards compatibility.			
Base	*ARObject*, *AbstractAccessPoint*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *IdentCaption*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, ExternalTriggeringPoint.ident			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table 14.6: ExternalTriggeringPointIdent

A Reference Material

This chapter contains some relevant reference material for this specification.

A.1 Abbreviations

The content of this appendix chapter is *informative* in nature and shall **not** be considered as *normative* content.

The following table contains a list of abbreviations used in the scope of this document along with the spelled-out meaning of each of the abbreviations.

Abbreviation	*Meaning*
API	Application Programming Interface
BOM	Byte Order Mark
CAN	Controller Area Network
CARB	California Air Resources Board
CSE	Codes for Scaling Units
DCM	Diagnostics Communication Manager
DCY	Driving Cycle
DEM	Diagnostics Event Manager
DID	Diagnostic Identifier
DTC	Diagnostic Trouble Code
DoIp	Diagnostics over IP
ECU	Electrical Control Unit
EPROM	Erasable Programmable Read-Only Memory
EEPROM	Electrically Erasable Programmable Read-Only Memory
FID	Function Identifier
GID	Group Identifier
ID	Identifier
IO	Input/Output
IP	Internet Protocol
IUMPR	In-Use Monitor Performance Ratio
ISO	International Standardization Organization
MAC	Message Authentication Code
MCAL	Micro-Controller Abstraction
LIN	Local Interconnect Network
MCD	Measurement, Calibration, Diagnostics
NM	Network Management
NV	Non-Volatile
OBD	On-Board Diagnostic
OEM	Original Equipment Manufacturer
OS	Operating System
PDU	Protocol Data Unit
PID	Parameter Identifier

▽

△

Abbreviation	*Meaning*
PTO	Power Take Off
RA	Routing Activation
RAM	Random Access Memory
ROM	Read-Only Memory
RPT	Rapid Prototyping
RTE	Runtime Environment
SWC	Software Component
TID	Test Identifier
UDS	Unified Diagnostic Services
UML	Unified Modeling Language
VFB	Virtual Functional Bus
WCET	Worst Case Execution Time
WWH-OBD	World-Wide Harmonized On-Board Diagnostics
XML	Extensible Markup Language
XSD	XML Schema Definition

Table A.1: Abbreviations used in the scope of this Document

A.2 Imposition Times of Constraints

The constraints formulated in this document have different *actual* imposition times which denote the steps in the workflow when the respective constraint has to be imposed.

The imposition times that are considered applicable in the scope of this document[1] are listed in Table A.2.

Please note that the imposition times are intentionally rendered as technical terms such that it is possible to link back from each constraint to the definition of the affected imposition time in Table A.2.

This document has been created to apply primarily for the *AUTOSAR classic platform* and therefore the discussed imposition times also apply exclusively to the *AUTOSAR classic platform*.

Some constraints, however, *may* also be meaningful in the context of other imposition times, applicable for other *AUTOSAR platforms*.

That is, from the appearance of an imposition time that only applies to the *AUTOSAR classic platform* in the text of a constraint in this document, it **shall not be concluded that the constraint is exclusively applicable to the *AUTOSAR classic platform***.

[1] Different imposition times may be defined in the context of other AUTOSAR standard documents

Imposition Time	Description	Motivation
IT_BefAraApiGen	Before the generation of the ara API starts	This imposition time is aimed at the time when a software-component is ready for generating the header files such that the implementation of the software-component can be started.
IT_CompSwcT	Creation of the CompositionSw ComponentType is finished	This imposition time applies to the creation of compositions of software-components. This imposition time is considered optional. In other words, there may be use cases to deliver CompositionSwComponentTypes that violate constraints with this imposition time to another party. But it may also make sense in some cases to make sure, that a CompositionSwComponentType that is going to be delivered to another party fulfills the constraints associated with this binding time.
IT_CpgExe	Contract Phase generation is executed	This imposition time is aimed at the time when a software-component is ready for generating the contract phase header files such that the implementation of the software-component can be started.
IT_EcuExt	ECU_EXTRACT is completed	This imposition time denotes the step in the workflow where the ECU_EXTRACT model is considered complete such that it can be used as input for the generation of the RTE.
IT_RteGen	RTE is generated	This imposition time denotes the step in the workflow where the model is considered complete such that the generation of the RTE can be executed. This means that *at the time when the RTE is generated*, all constraints that need to be imposed *at the time when the contract phase generation is executed* **and** those that are imposed *at any time in the workflow* also need to be observed. In other words, a constraint that is imposed *at the time when the contract phase generation is executed* shall also be imposed *at the time when the RTE is generated*.
IT_ValSpec	ValueSpecification is applied	This imposition time is aimed at the point in time where a ValueSpecification is applied to data object and consistency requirements between the ValueSpecification and the data object can be checked.

Table A.2: Imposition Times of constraints in this document

B Examples

The content of this appendix chapter is *informative* in nature and shall **not** be considered as *normative* content.

This section contains a collection of examples for **select modeling aspects** discussed in this document. It is not foreseen to create examples for every single aspect of using the model elements discussed in this document.

B.1 Examples of Data Types

This section contains a compilation of examples for the definition of data types. Note that the purpose of the section is to highlight specific and notable aspects of the modeling of data types.

There is no intention to create a comprehensive example for the creation of any possible data type that the AUTOSAR methodology may support.

B.1.1 Definition of a String Data Type

B.1.1.1 UTF-8 String

This sub-section describes an example of the definition of a string data type with `UTF-8` encoding, including the definition of the `SwRecordLayout`[1] that applies to `ApplicationPrimitiveDataType` of `category STRING`.

On the level of `ImplementationDataType`, the string data type is implemented as a structured data type that consists of:

1. the **size** of an instance of the string data type in terms of the number of characters plus
2. an **array** that can be used to store the individual characters contained in an instance of the string data type.

```
<APPLICATION-PRIMITIVE-DATA-TYPE>
  <SHORT-NAME>MyApplicationStringType</SHORT-NAME>
  <CATEGORY>STRING</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <SW-TEXT-PROPS>
          <ARRAY-SIZE-SEMANTICS>VARIABLE-SIZE</ARRAY-SIZE-SEMANTICS>
          <SW-MAX-TEXT-SIZE>50</SW-MAX-TEXT-SIZE>
          <BASE-TYPE-REF BASE="default" DEST="SW-BASE-TYPE">BaseTypes/MyTextBaseType</BASE-
              TYPE-REF>
        </SW-TEXT-PROPS>
        <INVALID-VALUE>
          <APPLICATION-VALUE-SPECIFICATION>
            <CATEGORY>STRING</CATEGORY>
            <SW-VALUE-CONT>
```

[1] A further example for the modeling of a `SwRecordLayout` is given in Chapter B.2.4.

```
            <SW-VALUES-PHYS>
              <VT>inv</VT>
            </SW-VALUES-PHYS>
          </SW-VALUE-CONT>
        </APPLICATION-VALUE-SPECIFICATION>
      </INVALID-VALUE>
      <SW-RECORD-LAYOUT-REF BASE="default" DEST="SW-RECORD-LAYOUT">RecordLayouts/
          StringDescriptor</SW-RECORD-LAYOUT-REF>
    </SW-DATA-DEF-PROPS-CONDITIONAL>
  </SW-DATA-DEF-PROPS-VARIANTS>
</SW-DATA-DEF-PROPS>
</APPLICATION-PRIMITIVE-DATA-TYPE>
```

Listing B.1: Example for the definition of a string `ApplicationPrimitiveDataType`

Depending on the used encoding, the **array** may need to be bigger (in terms of the number of elements) than the corresponding value of the **size**.

Furthermore, the definition of the `SwRecordLayout` already takes into account that the implementation of an array data type by means of an `ImplementationDataType` requires the definition of an `ImplementationDataTypeElement`.

The meaning of the standardized values of `SwRecordLayoutV.swRecordLayoutVProp` are documented in [TPS_SWCT_01489]. In the scope of this example the values `COUNT` and `VALUE` are used.

The fact that the `swRecordLayoutGroupTo` contains the value -1 means that the iteration ends at the last element of the array.

Furthermore, the discussed example of an `ApplicationPrimitiveDataType` of `category STRING` also contains the definition of an `invalidValue` for the string data type.

The next step is the definition of an `ImplementationDataType` that represents the string type on the implementation level.

The definition of the `ImplementationDataType` can be derived from the definition of the applicable `SwRecordLayout`.

```
<SW-RECORD-LAYOUT>
  <SHORT-NAME>StringDescriptor</SHORT-NAME>
  <LONG-NAME>
    <L-4 L="EN">String by descriptor</L-4>
  </LONG-NAME>
  <INTRODUCTION>
    <VERBATIM>
      <L-5 L="EN" xml:space="default">
struct{
  size,
  char[]
}
      </L-5>
    </VERBATIM>
  </INTRODUCTION>
  <SW-RECORD-LAYOUT-GROUP>
    <SW-RECORD-LAYOUT-V>
      <SHORT-LABEL>size</SHORT-LABEL>
      <SW-RECORD-LAYOUT-V-AXIS>STRING</SW-RECORD-LAYOUT-V-AXIS>
      <SW-RECORD-LAYOUT-V-PROP>COUNT</SW-RECORD-LAYOUT-V-PROP>
    </SW-RECORD-LAYOUT-V>
    <SW-RECORD-LAYOUT-GROUP>
      <SHORT-LABEL>chars</SHORT-LABEL>
```

```
      <SW-RECORD-LAYOUT-GROUP-AXIS>STRING</SW-RECORD-LAYOUT-GROUP-AXIS>
      <SW-RECORD-LAYOUT-GROUP-FROM>1</SW-RECORD-LAYOUT-GROUP-FROM>
      <SW-RECORD-LAYOUT-GROUP-TO>-1</SW-RECORD-LAYOUT-GROUP-TO>
      <SW-RECORD-LAYOUT-V>
        <SHORT-LABEL>char</SHORT-LABEL>
        <SW-RECORD-LAYOUT-V-PROP>VALUE</SW-RECORD-LAYOUT-V-PROP>
      </SW-RECORD-LAYOUT-V>
    </SW-RECORD-LAYOUT-GROUP>
  </SW-RECORD-LAYOUT-GROUP>
</SW-RECORD-LAYOUT>
```

Listing B.2: Example for the definition of a `SwRecordLayout` applicable for an `ApplicationPrimitiveDataType` of `category STRING`

The next listing describes the data type of one character within the string data type.

```
<IMPLEMENTATION-DATA-TYPE>
  <SHORT-NAME>uint8</SHORT-NAME>
  <CATEGORY>VALUE</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <BASE-TYPE-REF BASE="default" DEST="SW-BASE-TYPE">BaseTypes/uint8BT</BASE-TYPE-REF>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
</IMPLEMENTATION-DATA-TYPE>
```

Listing B.3: Example for the definition of a possible character data type for an `ImplementationDataType` that represents as string

The `ImplementationDataType` **also** defines an `invalidValue`.

```
<IMPLEMENTATION-DATA-TYPE>
  <SHORT-NAME>MyImplementationStringType</SHORT-NAME>
  <CATEGORY>STRUCTURE</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <INVALID-VALUE>
          <RECORD-VALUE-SPECIFICATION>
            <FIELDS>
              <NUMERICAL-VALUE-SPECIFICATION>
                <VALUE>3</VALUE>
              </NUMERICAL-VALUE-SPECIFICATION>
              <ARRAY-VALUE-SPECIFICATION>
                <ELEMENTS>
                  <NUMERICAL-VALUE-SPECIFICATION>
                    <VALUE>105</VALUE>
                  </NUMERICAL-VALUE-SPECIFICATION>
                  <NUMERICAL-VALUE-SPECIFICATION>
                    <VALUE>110</VALUE>
                  </NUMERICAL-VALUE-SPECIFICATION>
                  <NUMERICAL-VALUE-SPECIFICATION>
                    <VALUE>118</VALUE>
                  </NUMERICAL-VALUE-SPECIFICATION>
                </ELEMENTS>
              </ARRAY-VALUE-SPECIFICATION>
            </FIELDS>
          </RECORD-VALUE-SPECIFICATION>
        </INVALID-VALUE>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
  <DYNAMIC-ARRAY-SIZE-PROFILE>VSA_LINEAR</DYNAMIC-ARRAY-SIZE-PROFILE>
  <SUB-ELEMENTS>
    <IMPLEMENTATION-DATA-TYPE-ELEMENT>
      <SHORT-NAME>size</SHORT-NAME>
      <CATEGORY>TYPE_REFERENCE</CATEGORY>
```

```
      <SW-DATA-DEF-PROPS>
        <SW-DATA-DEF-PROPS-VARIANTS>
          <SW-DATA-DEF-PROPS-CONDITIONAL>
            <IMPLEMENTATION-DATA-TYPE-REF BASE="default" DEST="IMPLEMENTATION-DATA-TYPE">
              ImplementationDataTypes/uint8</IMPLEMENTATION-DATA-TYPE-REF>
          </SW-DATA-DEF-PROPS-CONDITIONAL>
        </SW-DATA-DEF-PROPS-VARIANTS>
      </SW-DATA-DEF-PROPS>
    </IMPLEMENTATION-DATA-TYPE-ELEMENT>
    <IMPLEMENTATION-DATA-TYPE-ELEMENT>
      <SHORT-NAME>string</SHORT-NAME>
      <CATEGORY>ARRAY</CATEGORY>
      <SUB-ELEMENTS>
        <IMPLEMENTATION-DATA-TYPE-ELEMENT>
          <SHORT-NAME>character</SHORT-NAME>
          <CATEGORY>TYPE_REFERENCE</CATEGORY>
          <ARRAY-SIZE>200</ARRAY-SIZE>
          <ARRAY-SIZE-HANDLING>ALL-INDICES-SAME-ARRAY-SIZE</ARRAY-SIZE-HANDLING>
          <ARRAY-SIZE-SEMANTICS>VARIABLE-SIZE</ARRAY-SIZE-SEMANTICS>
          <SW-DATA-DEF-PROPS>
            <SW-DATA-DEF-PROPS-VARIANTS>
              <SW-DATA-DEF-PROPS-CONDITIONAL>
                <IMPLEMENTATION-DATA-TYPE-REF BASE="default" DEST="IMPLEMENTATION-DATA-TYPE">
                  ImplementationDataTypes/uint8</IMPLEMENTATION-DATA-TYPE-REF>
              </SW-DATA-DEF-PROPS-CONDITIONAL>
            </SW-DATA-DEF-PROPS-VARIANTS>
          </SW-DATA-DEF-PROPS>
        </IMPLEMENTATION-DATA-TYPE-ELEMENT>
      </SUB-ELEMENTS>
    </IMPLEMENTATION-DATA-TYPE-ELEMENT>
  </SUB-ELEMENTS>
</IMPLEMENTATION-DATA-TYPE>
```

Listing B.4: Example for the definition of a string `ImplementationDataType`

As mentioned in [TPS_SWCT_01487], the consistency of the `invalidValue` defined in the scope of the `ApplicationPrimitiveDataType` of `category STRING` and the `invalidValue` defined in the scope of the corresponding `ImplementationDataType` cannot formally be checked.

The `ImplementationDataType` with the `shortName` `MyImplementationStringType` (as exemplified in Listing B.4) represents a variable-size string, i.e. the number of characters may change at run-time. Of course, it is also possible to model a fixed-size string, but in that case a size-indicator is not required.

Furthermore, the size of the payload array in the definition of the `ImplementationDataType` in Listing Listing B.4 has been set to the value 200 in order to accommodate the definition of `swMaxTextSize` in the definition of the corresponding `ApplicationDataType` in combination with the fact that the value of `baseTypeEncoding` has been set to `UTF-8`.

For background, the value of attribute `SwTextProps.swMaxTextSize` shall be specified as the number of *code points* in the string.

Each *code point* will be encoded by a sequence of bytes, depending on the applicable encoding. In the case of `UTF-8`, for example, each *code point* will be encoded by up to four bytes.

On the level of ImplementationDataType, an array designed to hold a string consisting of *code points* encoded using UTF-8 needs to be big enough to carry the number of *code points* (which may have been described by SwTextProps.swMaxTextSize) times 4 bytes.

The interesting part about this definition is the fact that on the implementation level, it was (driven by the definition of the SwRecordLayout) decided to implement the string as a structure of a size element (that goes by the shortName "size") and a value element (that goes by the shortName "string").

The value element is defined as an array data type and therefore has a sub-element that goes by the shortName "character".

```
<SW-BASE-TYPE>
  <SHORT-NAME>uint8BT</SHORT-NAME>
  <CATEGORY>FIXED_LENGTH</CATEGORY>
  <BASE-TYPE-SIZE>8</BASE-TYPE-SIZE>
</SW-BASE-TYPE>
```

Listing B.5: Example for the definition of a string SwBaseType

The latter references (in the role swDataDefProps.implementationDataType) the Platform Data Type "uint8" (that, according to the rules of Platform Data Types, is realized by an ImplementationDataType "uint8").

The ApplicationPrimitiveDataType named "MyApplicationStringType" references the SwBaseType named "MyTextBaseType", which is defined in the following XML fragment:

```
<SW-BASE-TYPE>
  <SHORT-NAME>MyTextBaseType</SHORT-NAME>
  <CATEGORY>FIXED_LENGTH</CATEGORY>
  <BASE-TYPE-ENCODING>UTF-8</BASE-TYPE-ENCODING>
</SW-BASE-TYPE>
```

Listing B.6: Example for the definition of a string SwBaseType

"MyTextBaseType" intentionally does not define a value for attribute baseTypeSize. The contribution of this definition of SwBaseType to the overall definition of a string data type is represented by the definition of the character encoding (which is set to UTF-8).

```
<DATA-TYPE-MAPPING-SET>
  <SHORT-NAME>theExample</SHORT-NAME>
  <DATA-TYPE-MAPS>
    <DATA-TYPE-MAP>
      <APPLICATION-DATA-TYPE-REF BASE="default" DEST="APPLICATION-PRIMITIVE-DATA-TYPE">
          ApplicationDataTypes/MyApplicationStringType</APPLICATION-DATA-TYPE-REF>
      <IMPLEMENTATION-DATA-TYPE-REF BASE="default" DEST="IMPLEMENTATION-DATA-TYPE">
          ImplementationDataTypes/MyImplementationStringType</IMPLEMENTATION-DATA-TYPE-REF>
    </DATA-TYPE-MAP>
  </DATA-TYPE-MAPS>
</DATA-TYPE-MAPPING-SET>
```

Listing B.7: Example for the definition of the applicable DataTypeMappingSet

However, there is still one important part missing, i.e. the definition of the mapping of ApplicationPrimitiveDataType to ImplementationDataType (and vice versa, see Listing B.7).

As mentioned before, the definition of an ImplementationDataType that corresponds to an ApplicationPrimitiveDataType of category STRING can be to some extent derived from the ApplicationPrimitiveDataType.swDataDefProps.swRecordLayout.

B.1.1.2 UTF-16 String

This section discusses the modeling of a string data type with UTF-16 encoding. On the level of ApplicationDataType, the encoding is not directly visible, see Listing B.8.

The glyphs included in ARXML files are **always** encoded as UTF-8 because that is the only supported encoding in ARXML. On the level of code implementation, and if UTF-16 encoding is foreseen, each glyph taken from an ARXML file shall be represented by the applicable UTF-16 *code point*.

```
<APPLICATION-PRIMITIVE-DATA-TYPE>
  <SHORT-NAME>MyApplicationStringType</SHORT-NAME>
  <CATEGORY>STRING</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <SW-TEXT-PROPS>
          <ARRAY-SIZE-SEMANTICS>VARIABLE-SIZE</ARRAY-SIZE-SEMANTICS>
          <SW-MAX-TEXT-SIZE>50</SW-MAX-TEXT-SIZE>
          <BASE-TYPE-REF BASE="default" DEST="SW-BASE-TYPE">BaseTypes/MyTextBaseType</BASE-
              TYPE-REF>
        </SW-TEXT-PROPS>
        <INVALID-VALUE>
          <APPLICATION-VALUE-SPECIFICATION>
            <CATEGORY>STRING</CATEGORY>
            <SW-VALUE-CONT>
              <SW-VALUES-PHYS>
                <VT>inv</VT>
              </SW-VALUES-PHYS>
            </SW-VALUE-CONT>
          </APPLICATION-VALUE-SPECIFICATION>
        </INVALID-VALUE>
        <SW-RECORD-LAYOUT-REF BASE="default" DEST="SW-RECORD-LAYOUT">RecordLayouts/
            StringDescriptor</SW-RECORD-LAYOUT-REF>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
</APPLICATION-PRIMITIVE-DATA-TYPE>
```

Listing B.8: Example for the definition of a UTF-16-encoded string on the level of ApplicationPrimitiveDataType

The modeling of the SwTextProps with the reference to the SwBaseType leads the way. “MyTextBaseType” intentionally does define a value for attribute baseTypeSize, because this information is not relevant on the level of ApplicationDataType.

```
<SW-BASE-TYPE>
  <SHORT-NAME>MyTextBaseType</SHORT-NAME>
  <CATEGORY>FIXED_LENGTH</CATEGORY>
  <BASE-TYPE-ENCODING>UTF-16</BASE-TYPE-ENCODING>
</SW-BASE-TYPE>
```

Listing B.9: Example for the definition of a UTF-16-encoded SwBaseType

The recipe of how to get from ApplicationDataType to ImplementationDataType is given by means of the corresponding SwRecordLayout, hence the reference in the role SwDataDefProps.swRecordLayout in the modeling of the ApplicationPrimitiveDataType in Listing B.9.

```
<SW-RECORD-LAYOUT>
  <SHORT-NAME>StringDescriptor</SHORT-NAME>
  <LONG-NAME>
    <L-4 L="EN">String by descriptor</L-4>
  </LONG-NAME>
  <INTRODUCTION>
    <VERBATIM>
      <L-5 L="EN" xml:space="default">
struct{
  size,
  char[]
}
      </L-5>
    </VERBATIM>
  </INTRODUCTION>
  <SW-RECORD-LAYOUT-GROUP>
    <SW-RECORD-LAYOUT-V>
      <SHORT-LABEL>size</SHORT-LABEL>
      <BASE-TYPE-REF BASE="default" DEST="SW-BASE-TYPE">BaseTypes/uint8BT</BASE-TYPE-REF>
      <SW-RECORD-LAYOUT-V-AXIS>STRING</SW-RECORD-LAYOUT-V-AXIS>
      <SW-RECORD-LAYOUT-V-PROP>COUNT</SW-RECORD-LAYOUT-V-PROP>
    </SW-RECORD-LAYOUT-V>
    <SW-RECORD-LAYOUT-GROUP>
      <SHORT-LABEL>chars</SHORT-LABEL>
      <SW-RECORD-LAYOUT-GROUP-AXIS>STRING</SW-RECORD-LAYOUT-GROUP-AXIS>
      <SW-RECORD-LAYOUT-GROUP-FROM>1</SW-RECORD-LAYOUT-GROUP-FROM>
      <SW-RECORD-LAYOUT-GROUP-TO>-1</SW-RECORD-LAYOUT-GROUP-TO>
      <SW-RECORD-LAYOUT-V>
        <SHORT-LABEL>char</SHORT-LABEL>
        <BASE-TYPE-REF BASE="default" DEST="SW-BASE-TYPE">BaseTypes/uint16BT</BASE-TYPE-REF>
        <SW-RECORD-LAYOUT-V-PROP>VALUE</SW-RECORD-LAYOUT-V-PROP>
      </SW-RECORD-LAYOUT-V>
    </SW-RECORD-LAYOUT-GROUP>
  </SW-RECORD-LAYOUT-GROUP>
</SW-RECORD-LAYOUT>
```

Listing B.10: Example for the definition of a SwRecordLayout of UTF-16-encoded SwBaseType

The recipe defined by the SwRecordLayout creates a structured ImplementationDataType that consists of:

1. the **size** of an instance of the string data type in terms of the number of characters plus
2. an **array** that can be used to store the individual characters contained in an instance of the string data type.

Structurally, the definition of the ImplementationDataType for the UTF-8 case (see Chapter B.1.1.1) and the UTF-16 case are identical, see Listing B.11. The difference can be observed in the value of individual attributes.

```
<IMPLEMENTATION-DATA-TYPE>
  <SHORT-NAME>MyImplementationStringType</SHORT-NAME>
  <CATEGORY>STRUCTURE</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <INVALID-VALUE>
          <RECORD-VALUE-SPECIFICATION>
```

```
            <FIELDS>
              <NUMERICAL-VALUE-SPECIFICATION>
                <VALUE>3</VALUE>
              </NUMERICAL-VALUE-SPECIFICATION>
              <ARRAY-VALUE-SPECIFICATION>
                <ELEMENTS>
                  <NUMERICAL-VALUE-SPECIFICATION>
                    <VALUE>105</VALUE>
                  </NUMERICAL-VALUE-SPECIFICATION>
                  <NUMERICAL-VALUE-SPECIFICATION>
                    <VALUE>110</VALUE>
                  </NUMERICAL-VALUE-SPECIFICATION>
                  <NUMERICAL-VALUE-SPECIFICATION>
                    <VALUE>118</VALUE>
                  </NUMERICAL-VALUE-SPECIFICATION>
                </ELEMENTS>
              </ARRAY-VALUE-SPECIFICATION>
            </FIELDS>
          </RECORD-VALUE-SPECIFICATION>
        </INVALID-VALUE>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
  <DYNAMIC-ARRAY-SIZE-PROFILE>VSA_LINEAR</DYNAMIC-ARRAY-SIZE-PROFILE>
  <SUB-ELEMENTS>
    <IMPLEMENTATION-DATA-TYPE-ELEMENT>
      <SHORT-NAME>size</SHORT-NAME>
      <CATEGORY>TYPE_REFERENCE</CATEGORY>
      <SW-DATA-DEF-PROPS>
        <SW-DATA-DEF-PROPS-VARIANTS>
          <SW-DATA-DEF-PROPS-CONDITIONAL>
            <IMPLEMENTATION-DATA-TYPE-REF BASE="default" DEST="IMPLEMENTATION-DATA-TYPE">
                ImplementationDataTypes/uint8</IMPLEMENTATION-DATA-TYPE-REF>
          </SW-DATA-DEF-PROPS-CONDITIONAL>
        </SW-DATA-DEF-PROPS-VARIANTS>
      </SW-DATA-DEF-PROPS>
    </IMPLEMENTATION-DATA-TYPE-ELEMENT>
    <IMPLEMENTATION-DATA-TYPE-ELEMENT>
      <SHORT-NAME>string</SHORT-NAME>
      <CATEGORY>ARRAY</CATEGORY>
      <SUB-ELEMENTS>
        <IMPLEMENTATION-DATA-TYPE-ELEMENT>
          <SHORT-NAME>character</SHORT-NAME>
          <CATEGORY>TYPE_REFERENCE</CATEGORY>
          <ARRAY-SIZE>100</ARRAY-SIZE>
          <ARRAY-SIZE-HANDLING>ALL-INDICES-SAME-ARRAY-SIZE</ARRAY-SIZE-HANDLING>
          <ARRAY-SIZE-SEMANTICS>VARIABLE-SIZE</ARRAY-SIZE-SEMANTICS>
          <SW-DATA-DEF-PROPS>
            <SW-DATA-DEF-PROPS-VARIANTS>
              <SW-DATA-DEF-PROPS-CONDITIONAL>
                <IMPLEMENTATION-DATA-TYPE-REF BASE="default" DEST="IMPLEMENTATION-DATA-TYPE">
                    ImplementationDataTypes/uint16</IMPLEMENTATION-DATA-TYPE-REF>
              </SW-DATA-DEF-PROPS-CONDITIONAL>
            </SW-DATA-DEF-PROPS-VARIANTS>
          </SW-DATA-DEF-PROPS>
        </IMPLEMENTATION-DATA-TYPE-ELEMENT>
      </SUB-ELEMENTS>
    </IMPLEMENTATION-DATA-TYPE-ELEMENT>
  </SUB-ELEMENTS>
</IMPLEMENTATION-DATA-TYPE>
```

Listing B.11: Example for the definition of a UTF-16-encoded string on the level of ImplementationDataType

Furthermore, the size of the *payload array* in the definition of the ImplementationDataType in Listing Listing B.11 has been set to the value **100** in order to accommodate the definition of swMaxTextSize in the definition of the corresponding

ApplicationDataType in combination with the fact that the value of baseTypeEncoding has been set to **UTF-16**.

For background, the value of attribute SwTextProps.swMaxTextSize shall be specified as the number of *code points* in the string.

Each *code point* will be encoded by a sequence of bytes, depending on the applicable encoding. In the case of UTF-16, for example, each *code point* will be encoded by either **2** or **4** bytes.

On the level of ImplementationDataType, an array designed to hold a string consisting of *code points* encoded using UTF-16 needs to be big enough to carry the number of *code points* (which may have been described by SwTextProps.swMaxTextSize) times 2.

The interesting part about this definition is the fact that on the implementation level, it was (driven by the definition of the SwRecordLayout) decided to implement the string as a structure of a size element (that goes by the shortName "size") and a value element (that goes by the shortName "string").

The value element is defined as an array data type and therefore has a sub-element that goes by the shortName "character".

The mentioned ImplementationDataType with the shortName "uint16" is sketched in Listing B.12:

```
<IMPLEMENTATION-DATA-TYPE>
  <SHORT-NAME>uint16</SHORT-NAME>
  <CATEGORY>VALUE</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <BASE-TYPE-REF BASE="default" DEST="SW-BASE-TYPE">BaseTypes/uint16BT</BASE-TYPE-REF>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
</IMPLEMENTATION-DATA-TYPE>
```

Listing B.12: Example for the definition of a "uint16" ImplementationDataType

The SwBaseType mentioned in Listing B.12 is depicted in Listing B.13.

```
<SW-BASE-TYPE>
  <SHORT-NAME>uint16BT</SHORT-NAME>
  <CATEGORY>FIXED_LENGTH</CATEGORY>
  <BASE-TYPE-SIZE>16</BASE-TYPE-SIZE>
  <BASE-TYPE-ENCODING>NONE</BASE-TYPE-ENCODING>
</SW-BASE-TYPE>
```

Listing B.13: Example for the definition of a "uint16BT" SwBaseType

B.1.2 Definition of an Index Data Type

The following (see Listing B.14) example shows a simplified and stripped-down (e.g. without the SwDataDefProps required to make the model complete) model of a so-called index data type. For more information, refer to Chapter 5.2.4.2.1.3.

```
<APPLICATION-ARRAY-DATA-TYPE>
  <SHORT-NAME>CylinderArray</SHORT-NAME>
  <ELEMENT>
    <SHORT-NAME>CylinderArrayElement</SHORT-NAME>
    <ARRAY-SIZE-SEMANTICS>FIXED-SIZE</ARRAY-SIZE-SEMANTICS>
    <INDEX-DATA-TYPE-REF BASE="default" DEST="APPLICATION-PRIMITIVE-DATA-TYPE">myIndexDataType
      </INDEX-DATA-TYPE-REF>
  </ELEMENT>
</APPLICATION-ARRAY-DATA-TYPE>
<APPLICATION-PRIMITIVE-DATA-TYPE>
  <SHORT-NAME>myIndexDataType</SHORT-NAME>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <COMPU-METHOD-REF BASE="default" DEST="COMPU-METHOD">cylinders</COMPU-METHOD-REF>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
</APPLICATION-PRIMITIVE-DATA-TYPE>
```

Listing B.14: Example for array index data type

Listing B.15 contains an example of a `CompuMethod` eligible for an `indexDataType`.

```
<COMPU-METHOD>
  <SHORT-NAME>cylinders</SHORT-NAME>
  <CATEGORY>TEXTTABLE</CATEGORY>
  <COMPU-INTERNAL-TO-PHYS>
    <COMPU-SCALES>
      <COMPU-SCALE>
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">0</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="CLOSED">0</UPPER-LIMIT>
        <COMPU-CONST>
          <VT>Cylinder1</VT>
        </COMPU-CONST>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">1</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="CLOSED">1</UPPER-LIMIT>
        <COMPU-CONST>
          <VT>Cylinder2</VT>
        </COMPU-CONST>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">2</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="CLOSED">2</UPPER-LIMIT>
        <COMPU-CONST>
          <VT>Cylinder3</VT>
        </COMPU-CONST>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">3</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="CLOSED">3</UPPER-LIMIT>
        <COMPU-CONST>
          <VT>Cylinder4</VT>
        </COMPU-CONST>
      </COMPU-SCALE>
    </COMPU-SCALES>
  </COMPU-INTERNAL-TO-PHYS>
</COMPU-METHOD>
```

Listing B.15: Example for a `CompuMethod` used by an array index data type

B.1.3 Definition of variable-size Arrays

This section contains some modeling examples for the definition of variable-size arrays (see Chapter 2.8, Chapter 5.2.4.2.1.1 and Chapter 5.2.5.5.2) and its four defined use cases: Linear, square, rectangular and fully flexible.

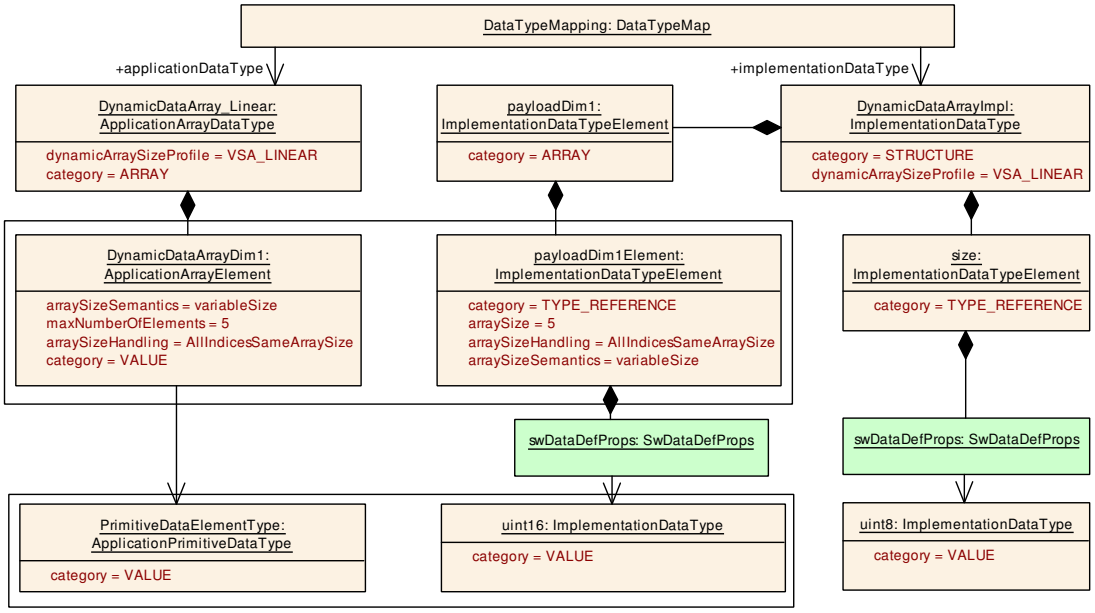

Figure B.1: Example of a linear variable size array

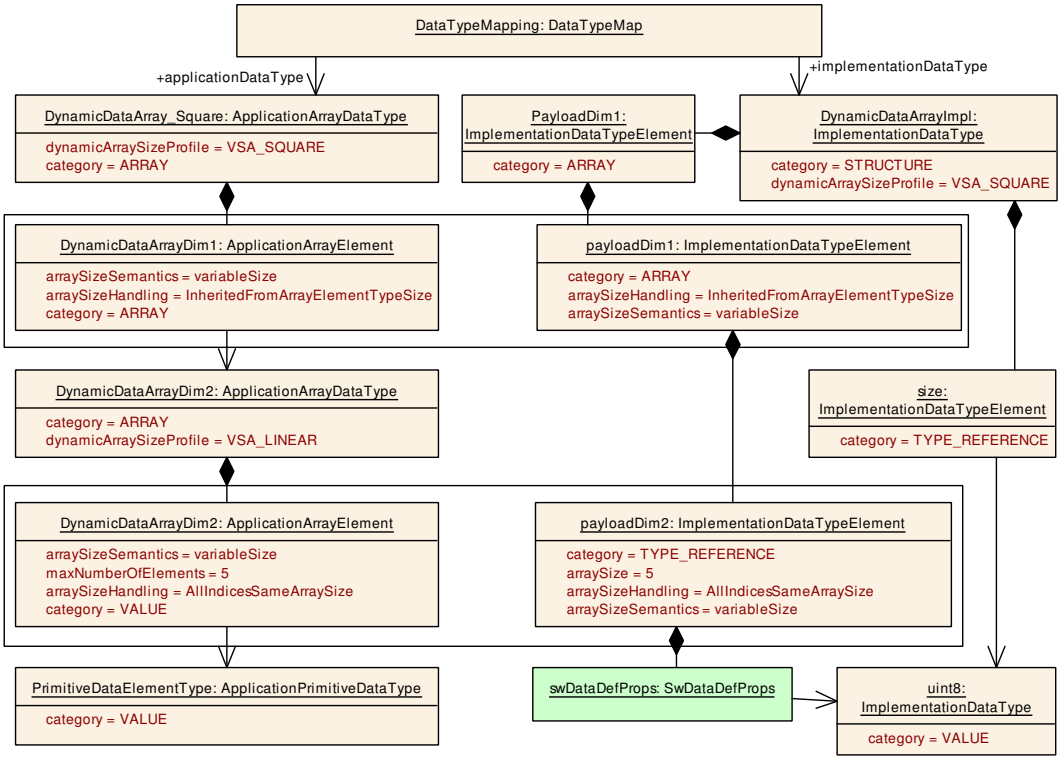

Figure B.2: Example of a square variable size array

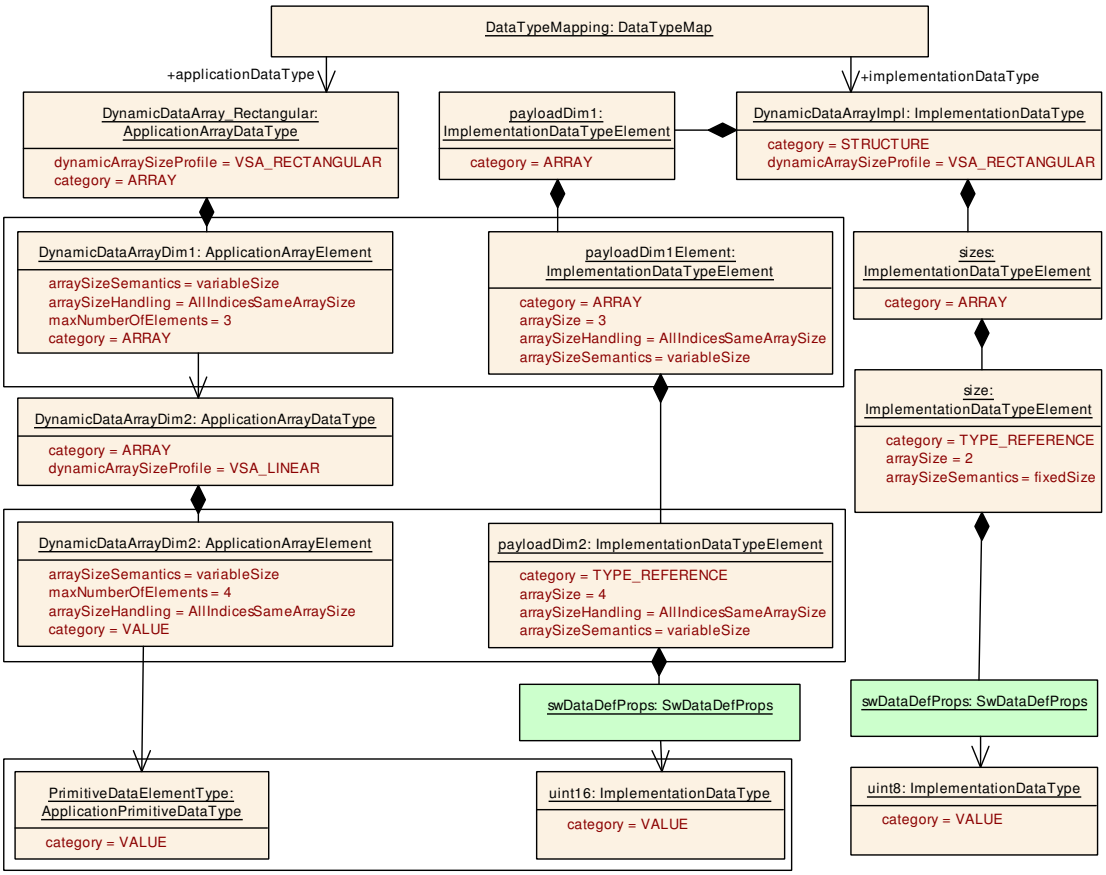

Figure B.3: Example of a rectangular variable size array

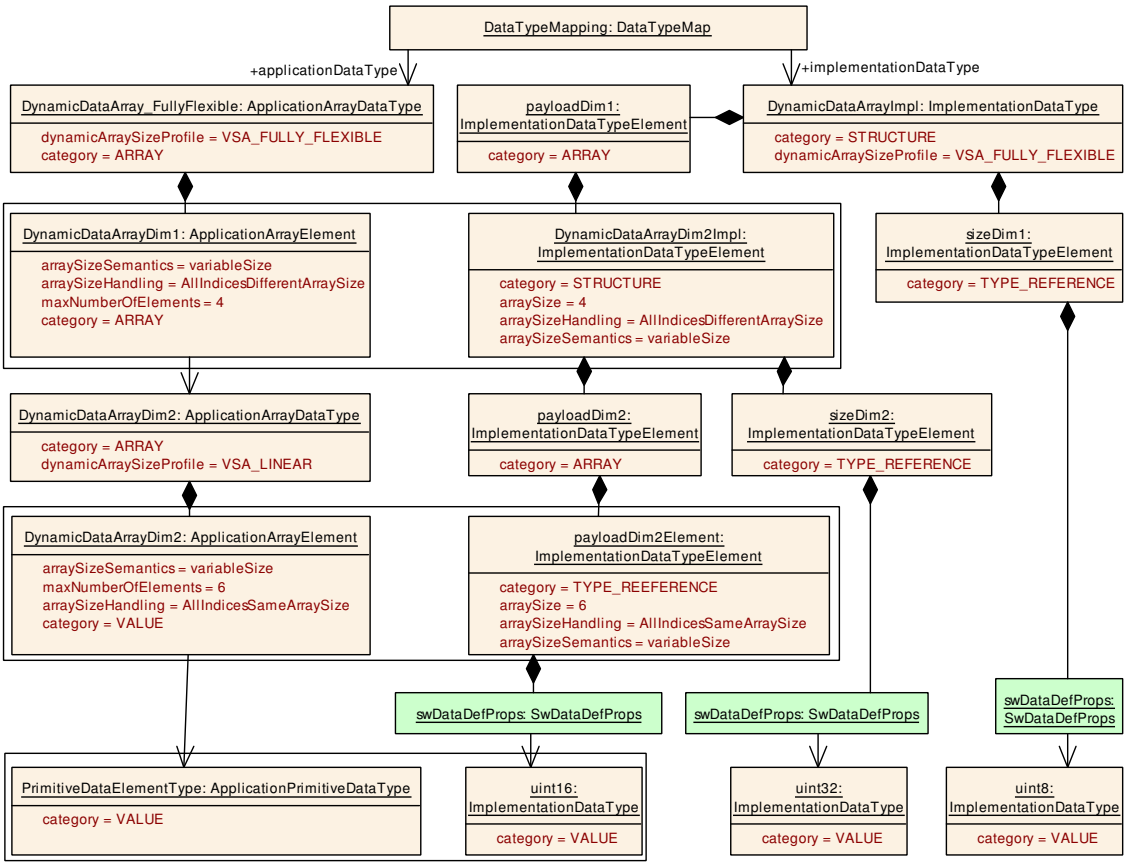

Figure B.4: Example of a fully flexible variable size array

All of these examples can be realized only using `ImplementationDataType`s or, as shown here, starting with the definition of `ApplicationDataType`s with corresponding `ImplementationDataType`s.

B.1.4 Definition of a Wrapped Union Data Type

The following Listing B.16 represents a simple example of the modeling of a `Wrapped Union Data Type` according to [TPS_SWCT_01700]/[TPS_SWCT_01701].

```
<IMPLEMENTATION-DATA-TYPE>
  <SHORT-NAME>UnionExample</SHORT-NAME>
  <CATEGORY>STRUCTURE</CATEGORY>
  <SUB-ELEMENTS>
    <IMPLEMENTATION-DATA-TYPE-ELEMENT>
      <SHORT-NAME>memberSelector</SHORT-NAME>
      <CATEGORY>VALUE</CATEGORY>
    </IMPLEMENTATION-DATA-TYPE-ELEMENT>
    <IMPLEMENTATION-DATA-TYPE-ELEMENT>
      <SHORT-NAME>payload</SHORT-NAME>
      <CATEGORY>UNION</CATEGORY>
      <SUB-ELEMENTS>
        <IMPLEMENTATION-DATA-TYPE-ELEMENT>
          <SHORT-NAME>primitive</SHORT-NAME>
          <CATEGORY>VALUE</CATEGORY>
        </IMPLEMENTATION-DATA-TYPE-ELEMENT>
        <IMPLEMENTATION-DATA-TYPE-ELEMENT>
          <SHORT-NAME>array</SHORT-NAME>
          <CATEGORY>ARRAY</CATEGORY>
```

```
          <SUB-ELEMENTS>
            <IMPLEMENTATION-DATA-TYPE-ELEMENT>
              <SHORT-NAME>arraySub</SHORT-NAME>
              <CATEGORY>VALUE</CATEGORY>
              <ARRAY-SIZE>4</ARRAY-SIZE>
              <ARRAY-SIZE-SEMANTICS>FIXED-SIZE</ARRAY-SIZE-SEMANTICS>
            </IMPLEMENTATION-DATA-TYPE-ELEMENT>
          </SUB-ELEMENTS>
        </IMPLEMENTATION-DATA-TYPE-ELEMENT>
      </SUB-ELEMENTS>
    </IMPLEMENTATION-DATA-TYPE-ELEMENT>
  </SUB-ELEMENTS>
</IMPLEMENTATION-DATA-TYPE>
```

Listing B.16: Simplified example of a Wrapped Union Data Type

B.1.5 Definition of a Multi-Dimensional Array Data Type

Figure B.5 shows a three-dimensional array described with a set of ApplicationArrayDataTypes on the left-hand side. The array element is typed by an ApplicationPrimitiveDataType of category BOOLEAN.

On the right-hand side the implementation of the three-dimensional array is described with an ImplementationDataType which contains three nested ImplementationDataTypeElements.

Matching ApplicationArrayElements and ImplementationDataTypeElements are shown on the same layer.

For the sake of clarity correlating maxNumberOfElements and arraySize attributes are described with the identical instance of a SwSystemconst instead of a value. Further details of variant rich M1 models are not in the scope of this example.

The data type of the array element is described by the ApplicationArrayDataType by means of a ApplicationPrimitiveDataType of category BOOLEAN. In order to fulfill [constr_1152], the category of ApplicationArrayElement “Dim3” is set to BOOLEAN.

This ApplicationPrimitiveDataType “BOOLEAN” correlates to the ImplementationDataType “boolean” of category VALUE which is typically the boolean type of the AUTOSAR Platform Types. Here, [constr_1063] applies.

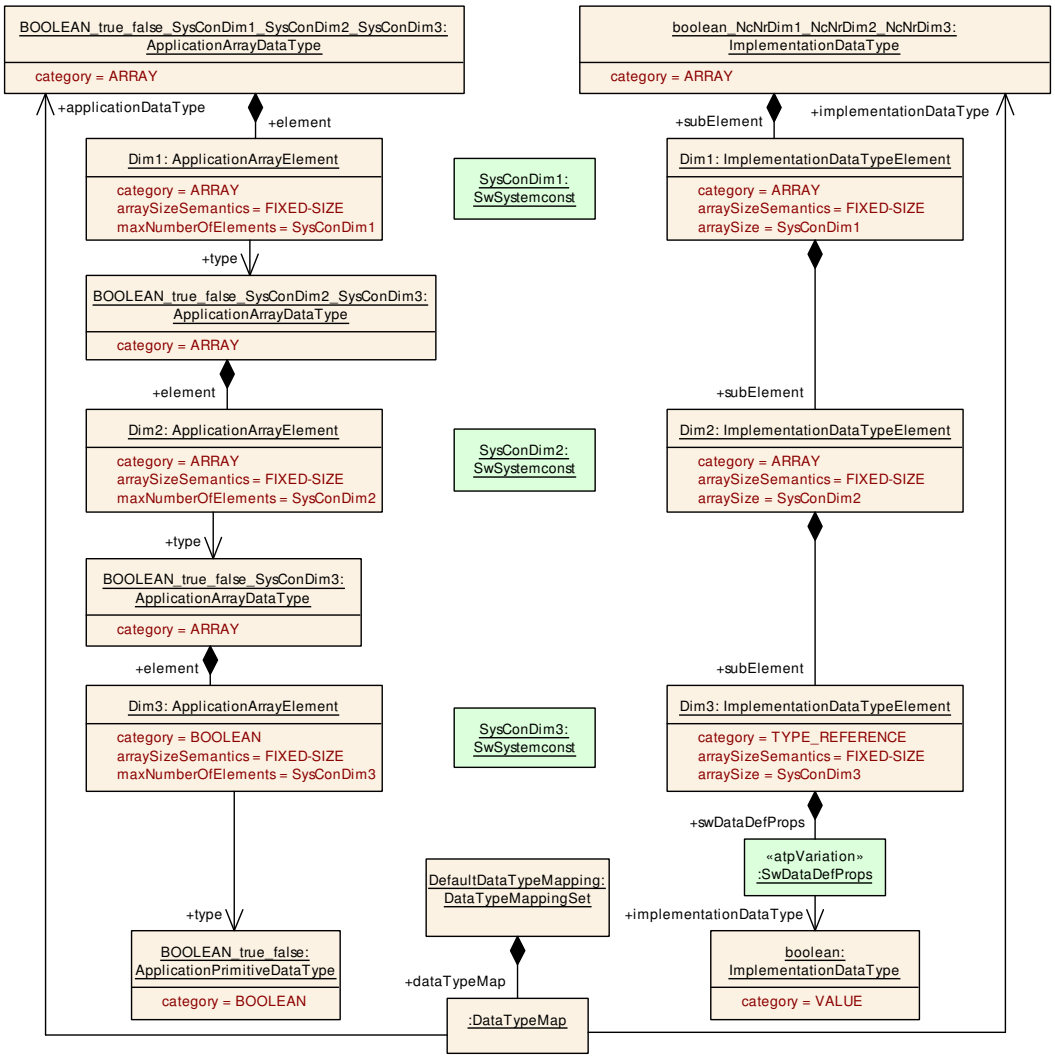

Figure B.5: Example of a three-dimensional array type

B.1.6 Definition of “Typedefs”

The examples in this section exemplify the modeling aspects described in Chapter 5.2.5.6. For primitive data types, the creation of the “typedef” mentioned in the examples happens according to [SWS_Rte_07104] in the [2, SWS RTE].

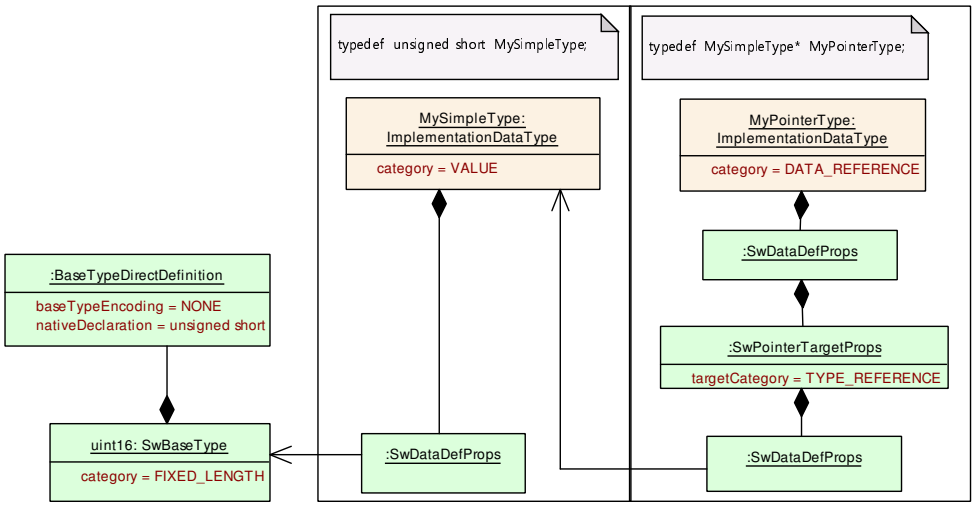

Figure B.6: Example (1) for TypeDefs

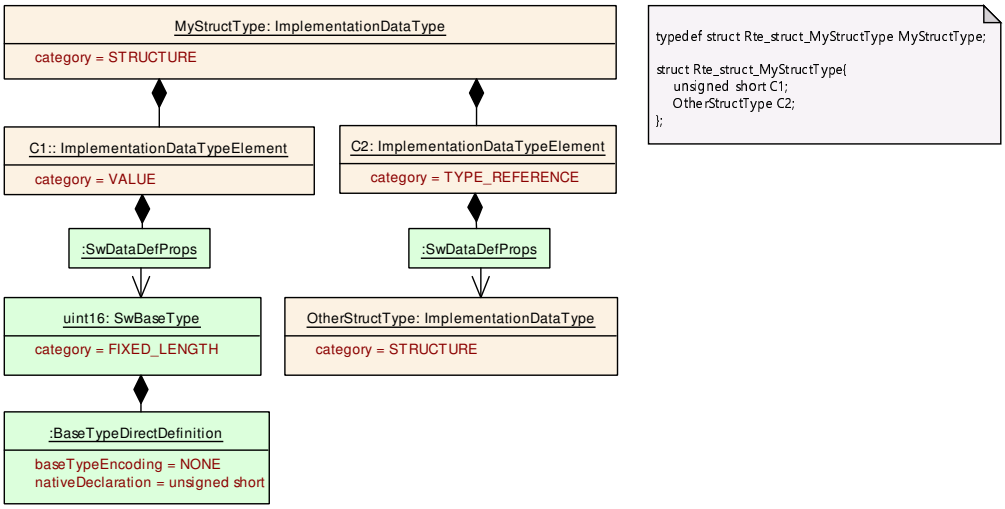

Figure B.7: Example (2) for TypeDefs

The examples depicted in Figure B.8 are backed by [SWS_Rte_07148] ff. in the [2, SWS RTE].

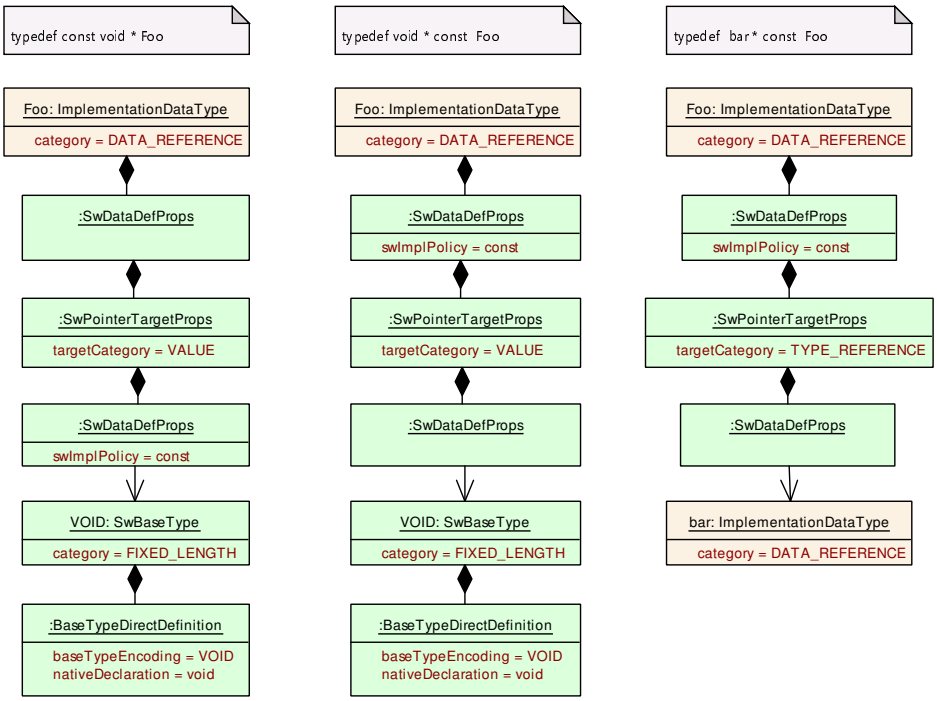

Figure B.8: Example (3) for TypeDefs

B.1.7 Definition of Base Type for Arrays

The value of attribute `baseTypeSize` (see Chapter 5.2.6.4) in the context of the definition of an `ImplementationDataType` where attribute `category` is set to the value `ARRAY` is modeled as part of the `ImplementationDataTypeElement`, see Listing B.17.

```
<IMPLEMENTATION-DATA-TYPE>
  <SHORT-NAME>MyImplDataType</SHORT-NAME>
  <CATEGORY>ARRAY</CATEGORY>
  <SUB-ELEMENTS>
    <IMPLEMENTATION-DATA-TYPE-ELEMENT>
      <SHORT-NAME>MyArrayElement</SHORT-NAME>
      <CATEGORY>VALUE</CATEGORY>
      <ARRAY-SIZE>6</ARRAY-SIZE>
      <ARRAY-SIZE-SEMANTICS>FIXED-SIZE</ARRAY-SIZE-SEMANTICS>
      <SW-DATA-DEF-PROPS>
        <SW-DATA-DEF-PROPS-VARIANTS>
          <SW-DATA-DEF-PROPS-CONDITIONAL>
            <BASE-TYPE-REF DEST="SW-BASE-TYPE">/SwBaseTypes/MyBaseType</BASE-TYPE-REF>
          </SW-DATA-DEF-PROPS-CONDITIONAL>
        </SW-DATA-DEF-PROPS-VARIANTS>
      </SW-DATA-DEF-PROPS>
    </IMPLEMENTATION-DATA-TYPE-ELEMENT>
  </SUB-ELEMENTS>
</IMPLEMENTATION-DATA-TYPE>
```

Listing B.17: Definition of an `ImplementationDataType` that represents an array

The referenced `SwBaseType` is sketched in Listing B.18.

```
<SW-BASE-TYPE>
  <SHORT-NAME>MyBaseType</SHORT-NAME>
  <BASE-TYPE-SIZE>32</BASE-TYPE-SIZE>
```

```
  <BASE-TYPE-ENCODING>NONE</BASE-TYPE-ENCODING>
</SW-BASE-TYPE>
```

Listing B.18: Definition of `SwBaseType` of the elements of an `ImplementationDataType` that represents an array

Because the value of `baseTypeSize` is defined in the context of the `SwDataDefProps` referenced by the `ImplementationDataTypeElement`, it should be clear that this value is **not supposed to determine the size of the entire array in bits**. Instead, it is clearly dedicated to specify the **size of a primitive element of the array in bits**.

In the case of the example presented in Listing B.17 and Listing B.18, the size of an element of the array is 32 bits. Thus, the entire array occupies $32 * 6 = 192$ bits.

B.1.8 Definition of Optional Elements and the Availability Bitfield

The statement made by [TPS_SWCT_01881] is depicted in Figure B.9.

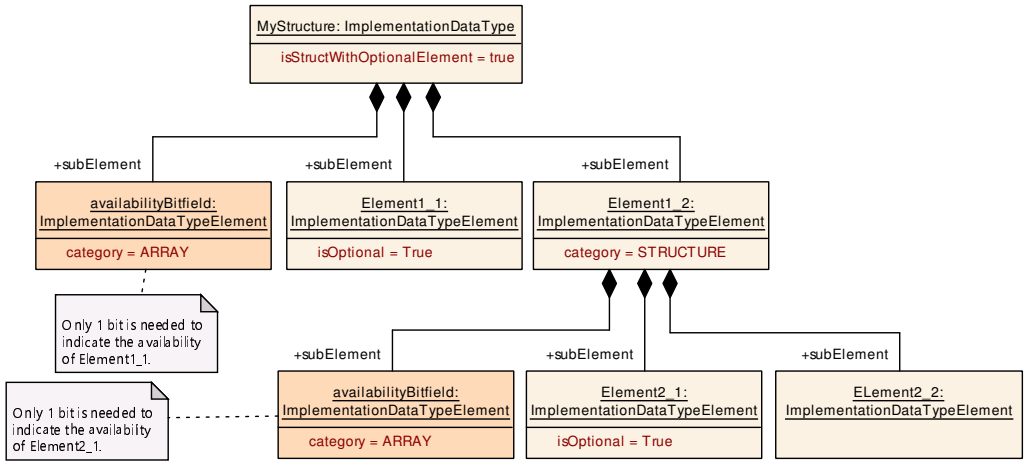

Figure B.9: Modeling of the `availabilityBitfield`

As formalized in [constr_1639], by using the `category TYPE_REFERENCE` it is assured that a separate `ImplementationDataType` of `category` `STRUCTURE` is generated for the sub-structure. Figure B.10 shows an example for the statement made in [constr_1639]:

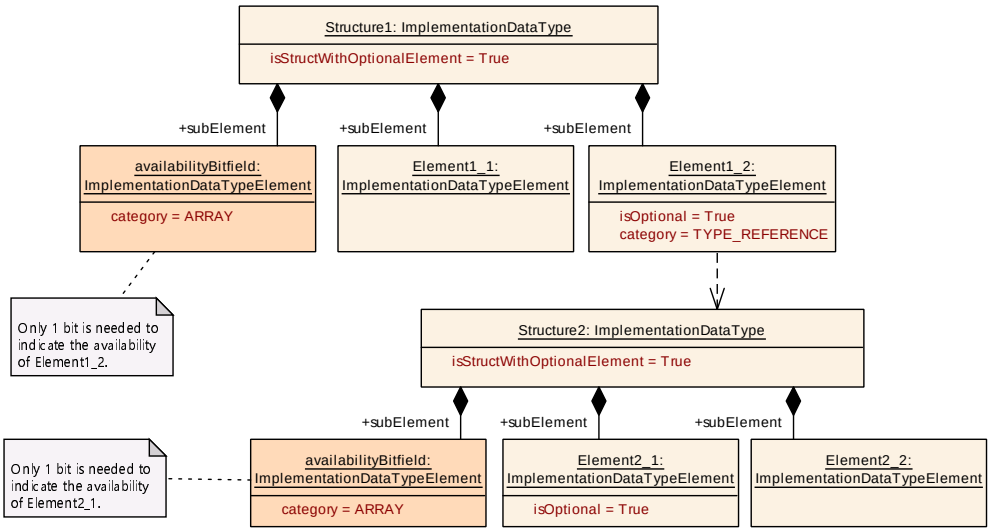

Figure B.10: Example of a structure with an optional element using a separate `ImplementationDataType`

B.1.9 Usage of ArVariableInImplementationDataInstanceRef

Figure B.11 contains an example of a **nested** `ImplementationDataType` along with the application of `ArVariableInImplementationDataInstanceRef`.

The example contains both cases for the definition of a `contextDataPrototype` mentioned in [constr_1423].

The example describes a reference that involves **two levels** of `contextDataPrototype`. The first `contextDataPrototype` (from the top of the diagram) reference points to a “self-contained” `ImplementationDataTypeElement`, i.e. that does not refer to an `ImplementationDataType`.

In contrast, the second `contextDataPrototype` refers to an `ImplementationDataTypeElement` that in turn references an `ImplementationDataType`, which happens to form a nested structure in which the `ImplementationDataTypeElement` exists that is referenced in the role `targetDataPrototype`.

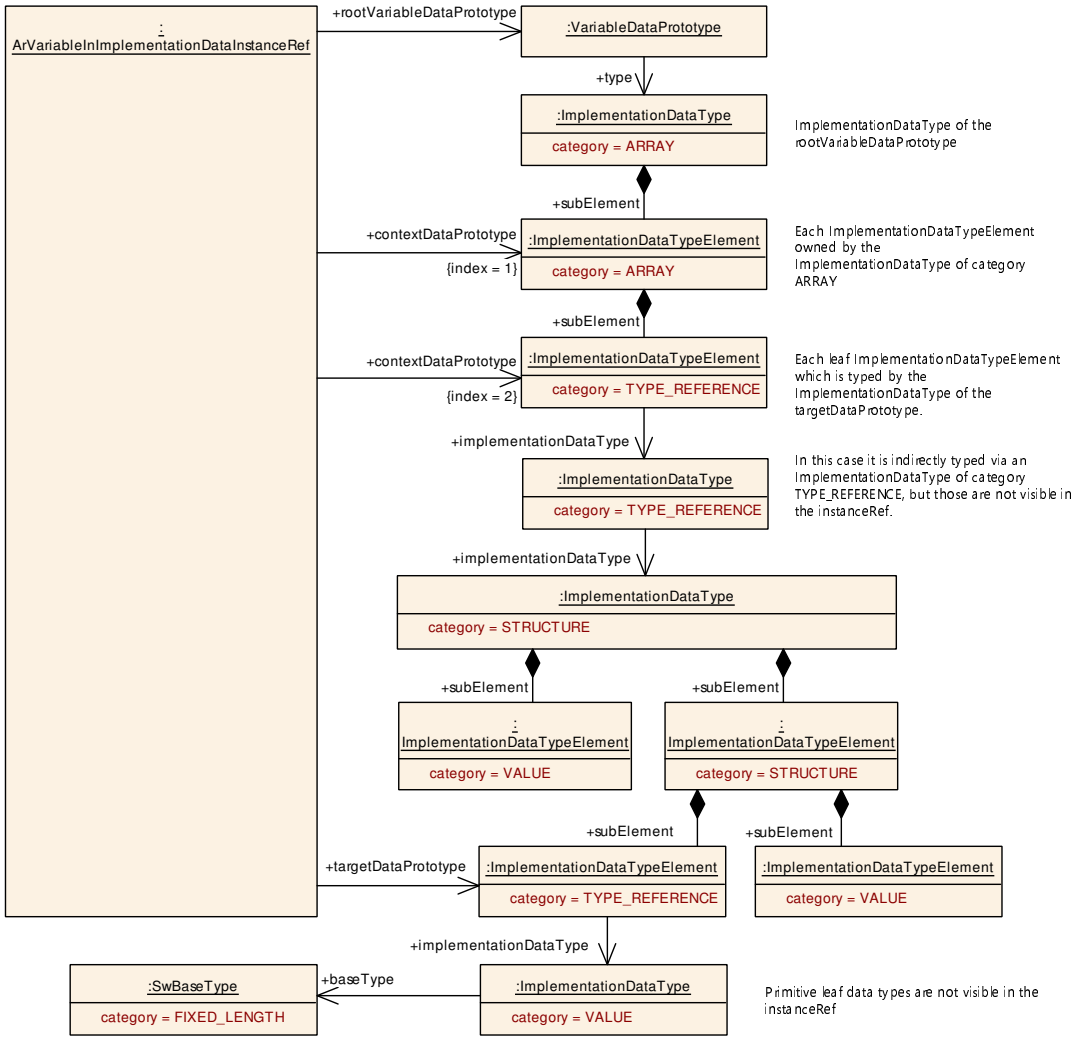

Figure B.11: Example for the usage of `ArVariableInImplementationDataInstanceRef`

B.2 Examples of Data Properties

B.2.1 Definition of a Data Dependency

The following Listing B.19 exemplifies the definition of a data dependency. More information on the nature of a data dependency can be found in Chapter 5.4.7.

```
<PER-INSTANCE-PARAMETERS>
  <PARAMETER-DATA-PROTOTYPE>
    <SHORT-NAME>A</SHORT-NAME>
    <DESC>
      <L-2 L="DE">The independent Parameter</L-2>
    </DESC>
    <CATEGORY>VALUE</CATEGORY>
  </PARAMETER-DATA-PROTOTYPE>
  <PARAMETER-DATA-PROTOTYPE>
    <SHORT-NAME>B</SHORT-NAME>
    <DESC>
      <L-2 L="DE">The dependent Parameter</L-2>
```

```
    </DESC>
    <SW-DATA-DEF-PROPS>
      <SW-DATA-DEF-PROPS-VARIANTS>
        <SW-DATA-DEF-PROPS-CONDITIONAL>
          <SW-DATA-DEPENDENCY>
            <SW-DATA-DEPENDENCY-FORMULA>SQRT(1 - (X1 * X1))</SW-DATA-DEPENDENCY-FORMULA>
            <SW-DATA-DEPENDENCY-ARGS>
              <AR-PARAMETER>
                <LOCAL-PARAMETER-REF DEST="PARAMETER-DATA-PROTOTYPE">/DataDependency/foo/bar/A
                    </LOCAL-PARAMETER-REF>
              </AR-PARAMETER>
            </SW-DATA-DEPENDENCY-ARGS>
          </SW-DATA-DEPENDENCY>
        </SW-DATA-DEF-PROPS-CONDITIONAL>
      </SW-DATA-DEF-PROPS-VARIANTS>
    </SW-DATA-DEF-PROPS>
  </PARAMETER-DATA-PROTOTYPE>
  <PARAMETER-DATA-PROTOTYPE>
    <SHORT-NAME>B_AREA</SHORT-NAME>
    <DESC>
      <L-2 L="DE">The dependent Parameter</L-2>
    </DESC>
    <SW-DATA-DEF-PROPS>
      <SW-DATA-DEF-PROPS-VARIANTS>
        <SW-DATA-DEF-PROPS-CONDITIONAL>
          <SW-DATA-DEPENDENCY>
            <SW-DATA-DEPENDENCY-FORMULA>X1 * X1</SW-DATA-DEPENDENCY-FORMULA>
            <SW-DATA-DEPENDENCY-ARGS>
              <AR-PARAMETER>
                <LOCAL-PARAMETER-REF DEST="PARAMETER-DATA-PROTOTYPE">/DataDependency/foo/bar/B
                    </LOCAL-PARAMETER-REF>
              </AR-PARAMETER>
            </SW-DATA-DEPENDENCY-ARGS>
          </SW-DATA-DEPENDENCY>
        </SW-DATA-DEF-PROPS-CONDITIONAL>
      </SW-DATA-DEF-PROPS-VARIANTS>
    </SW-DATA-DEF-PROPS>
  </PARAMETER-DATA-PROTOTYPE>
  <PARAMETER-DATA-PROTOTYPE>
    <SHORT-NAME>TRIANGULAR_AREA</SHORT-NAME>
    <DESC>
      <L-2 L="DE">The dependent Parameter</L-2>
    </DESC>
    <SW-DATA-DEF-PROPS>
      <SW-DATA-DEF-PROPS-VARIANTS>
        <SW-DATA-DEF-PROPS-CONDITIONAL>
          <SW-DATA-DEPENDENCY>
            <SW-DATA-DEPENDENCY-FORMULA>(X1 * X2) / 2</SW-DATA-DEPENDENCY-FORMULA>
            <SW-DATA-DEPENDENCY-ARGS>
              <AR-PARAMETER>
                <LOCAL-PARAMETER-REF DEST="PARAMETER-DATA-PROTOTYPE">/DataDependency/foo/bar/A
                    </LOCAL-PARAMETER-REF>
              </AR-PARAMETER>
              <AR-PARAMETER>
                <LOCAL-PARAMETER-REF DEST="PARAMETER-DATA-PROTOTYPE">/DataDependency/foo/bar/B
                    </LOCAL-PARAMETER-REF>
              </AR-PARAMETER>
            </SW-DATA-DEPENDENCY-ARGS>
          </SW-DATA-DEPENDENCY>
        </SW-DATA-DEF-PROPS-CONDITIONAL>
      </SW-DATA-DEF-PROPS-VARIANTS>
    </SW-DATA-DEF-PROPS>
  </PARAMETER-DATA-PROTOTYPE>
</PER-INSTANCE-PARAMETERS>
```

Listing B.19: Data Dependency

B.2.2 Definition of Unit and Physical Dimension

In the following example for the usage of `Unit` (see Chapter 5.5.3) and `PhysicalDimension` (see Chapter 5.5.2), the units “km” and “m” and their physical dimension named “Len1” are specified. The SI base unit is “m” (Meter).

The default value of attribute `Unit.offsetSiToUnit` is 0, the default of `Unit.factorSiToUnit` is 1 (see [TPS_SWCT_01492]).

Given the equality 1 km == 1000 m, the following equation applies:

$$x[km] := y * [m] * 0.001[km/m] + 0[km]$$

This correlation is reflected in the example ARXML contained in Listing B.20.

```
<UNIT>
  <SHORT-NAME>KiloMtr</SHORT-NAME>
  <LONG-NAME>
    <L-4 L="EN">Kilo Meter</L-4>
  </LONG-NAME>
  <DISPLAY-NAME>km</DISPLAY-NAME>
  <FACTOR-SI-TO-UNIT>0.001</FACTOR-SI-TO-UNIT>
  <OFFSET-SI-TO-UNIT>0</OFFSET-SI-TO-UNIT>
  <PHYSICAL-DIMENSION-REF BASE="PhysicalDimensions" DEST="PHYSICAL-DIMENSION">/SiUnit/Len1</
     PHYSICAL-DIMENSION-REF>
</UNIT>

<UNIT>
  <SHORT-NAME>Mtr</SHORT-NAME>
  <LONG-NAME>
    <L-4 L="EN">Meter</L-4>
  </LONG-NAME>
  <DISPLAY-NAME>m</DISPLAY-NAME>
  <FACTOR-SI-TO-UNIT>1</FACTOR-SI-TO-UNIT>
  <OFFSET-SI-TO-UNIT>0</OFFSET-SI-TO-UNIT>
  <PHYSICAL-DIMENSION-REF BASE="PhysicalDimensions" DEST="PHYSICAL-DIMENSION">/SiUnit/Len1</
     PHYSICAL-DIMENSION-REF>
</UNIT>

<PHYSICAL-DIMENSION>
  <SHORT-NAME>Len1</SHORT-NAME>
  <LONG-NAME>
    <L-4 L="EN">Length 1</L-4>
  </LONG-NAME>
  <LENGTH-EXP>1</LENGTH-EXP>
</PHYSICAL-DIMENSION>
```

Listing B.20: Example for `Unit` and `PhysicalDimension`

A slightly more complicated example can be found below: the definition of the unit “Fahrenheit”. The conversion between the SI unit “Kelvin” and “Fahrenheit” is done using the following formula:

$$x[F] := y * [K] * 1,8[F/K] - 459.67[F]$$

The ARXML serialization of the definition of the unit “Fahrenheit” can be found in Listing B.21.

```
<UNIT>
  <SHORT-NAME>Fahrenheit</SHORT-NAME>
```

```
  <DISPLAY-NAME>Degrees_Fahrenheit</DISPLAY-NAME>
  <FACTOR-SI-TO-UNIT>1.8</FACTOR-SI-TO-UNIT>
  <OFFSET-SI-TO-UNIT>-459.67</OFFSET-SI-TO-UNIT>
  <PHYSICAL-DIMENSION-REF DEST="PHYSICAL-DIMENSION">/PhysicalDimensions/Temperature</PHYSICAL-
     DIMENSION-REF>
</UNIT>
```

Listing B.21: Example for `Unit` "Fahrenheit"

In comparison to the definition of the `Unit`, the definition of the corresponding `PhysicalDimension` is outright trivial, see Listing B.22.

```
<PHYSICAL-DIMENSION>
  <SHORT-NAME>Temperature</SHORT-NAME>
  <LENGTH-EXP>0</LENGTH-EXP>
  <MASS-EXP>0</MASS-EXP>
  <TIME-EXP>0</TIME-EXP>
  <CURRENT-EXP>0</CURRENT-EXP>
  <TEMPERATURE-EXP>1</TEMPERATURE-EXP>
  <MOLAR-AMOUNT-EXP>0</MOLAR-AMOUNT-EXP>
  <LUMINOUS-INTENSITY-EXP>0</LUMINOUS-INTENSITY-EXP>
</PHYSICAL-DIMENSION>
```

Listing B.22: Definition of `PhysicalDimension` for the `Unit` "Fahrenheit"

B.2.3 Definition of Record Layout

Figure B.13, Figure B.12, Figure B.14, Figure B.15, and Figure B.16 illustrate how data types can be derived from `SwRecordLayout`s.

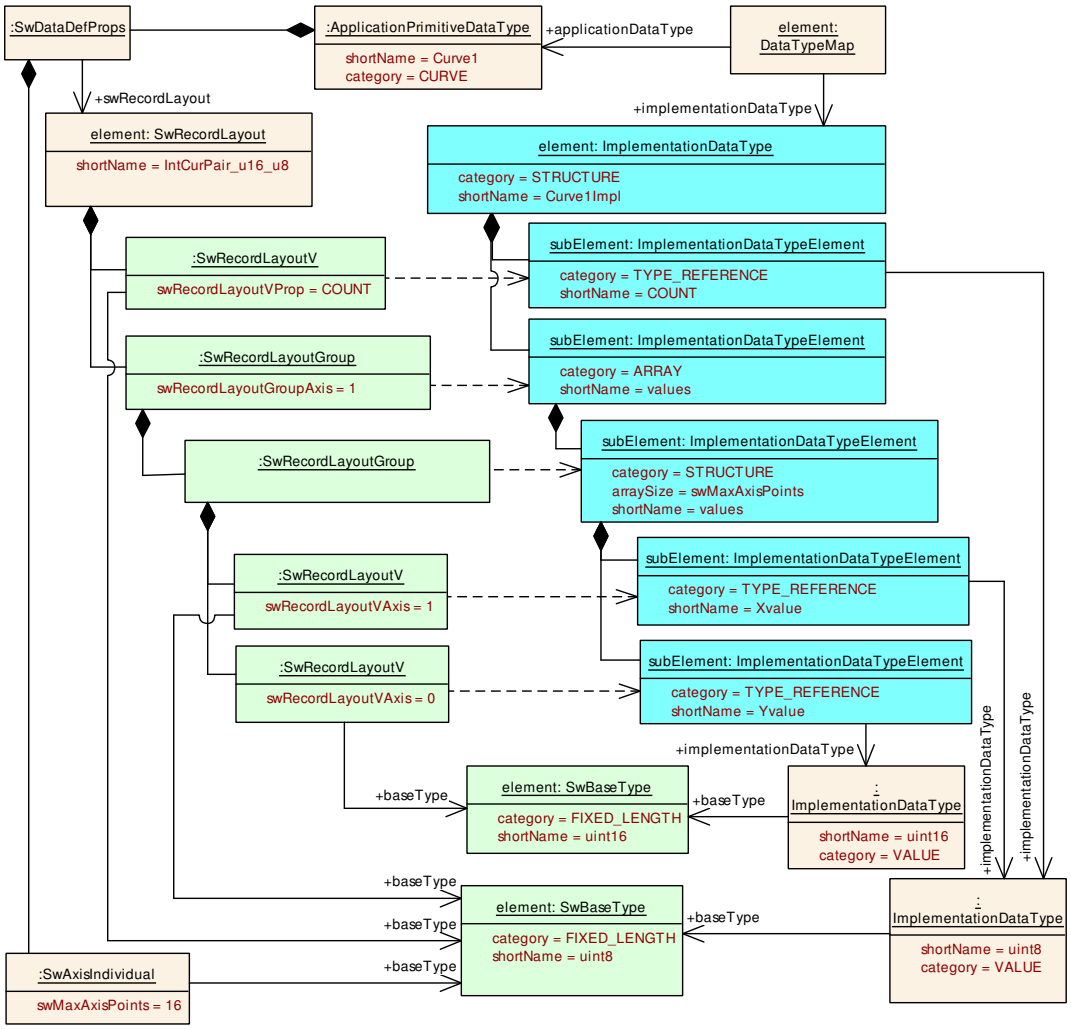

Figure B.12: Curve implemented as array of value pairs

The figures simplify some aspects of the actual modeling. In particular, aggregations of `SwDataDefProps` as well as aggregations of `SwRecordLayoutGroup` on the top-level are left out for the sake of visual clarity.

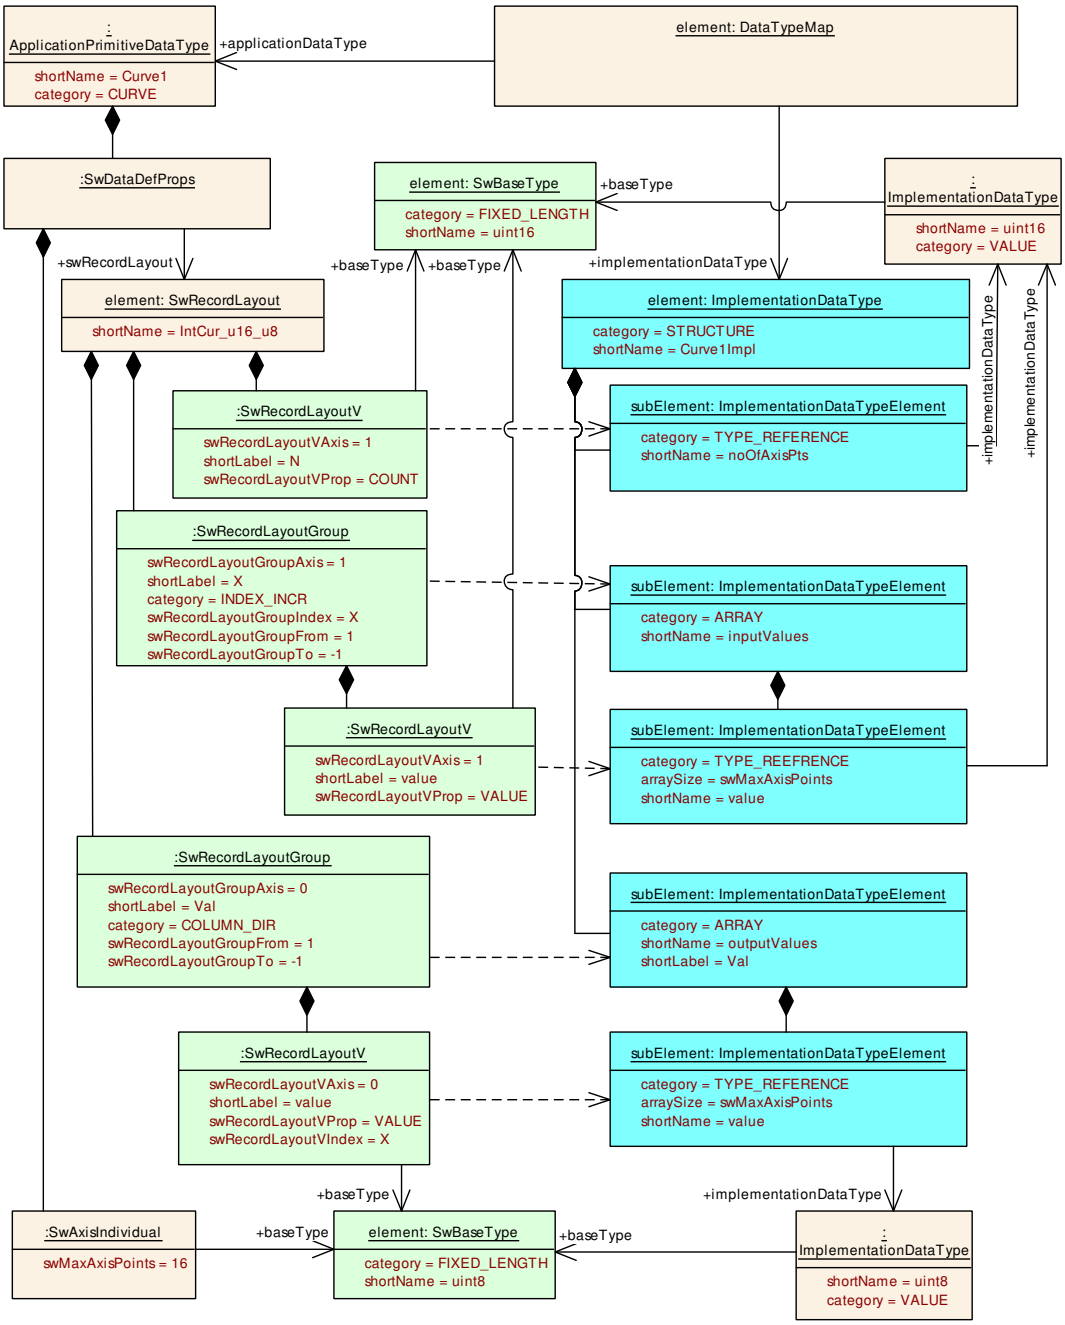

Figure B.13: Curve implemented as two consecutive arrays

Note that in each of these diagrams, the “blue” data types are derived from the record layout.

These diagrams illustrate in particular the fact that on the level of `ApplicationDataType` even complex entities such as curves and maps appear primitive data types. The inner details of such entities are handled e.g. by service libraries.

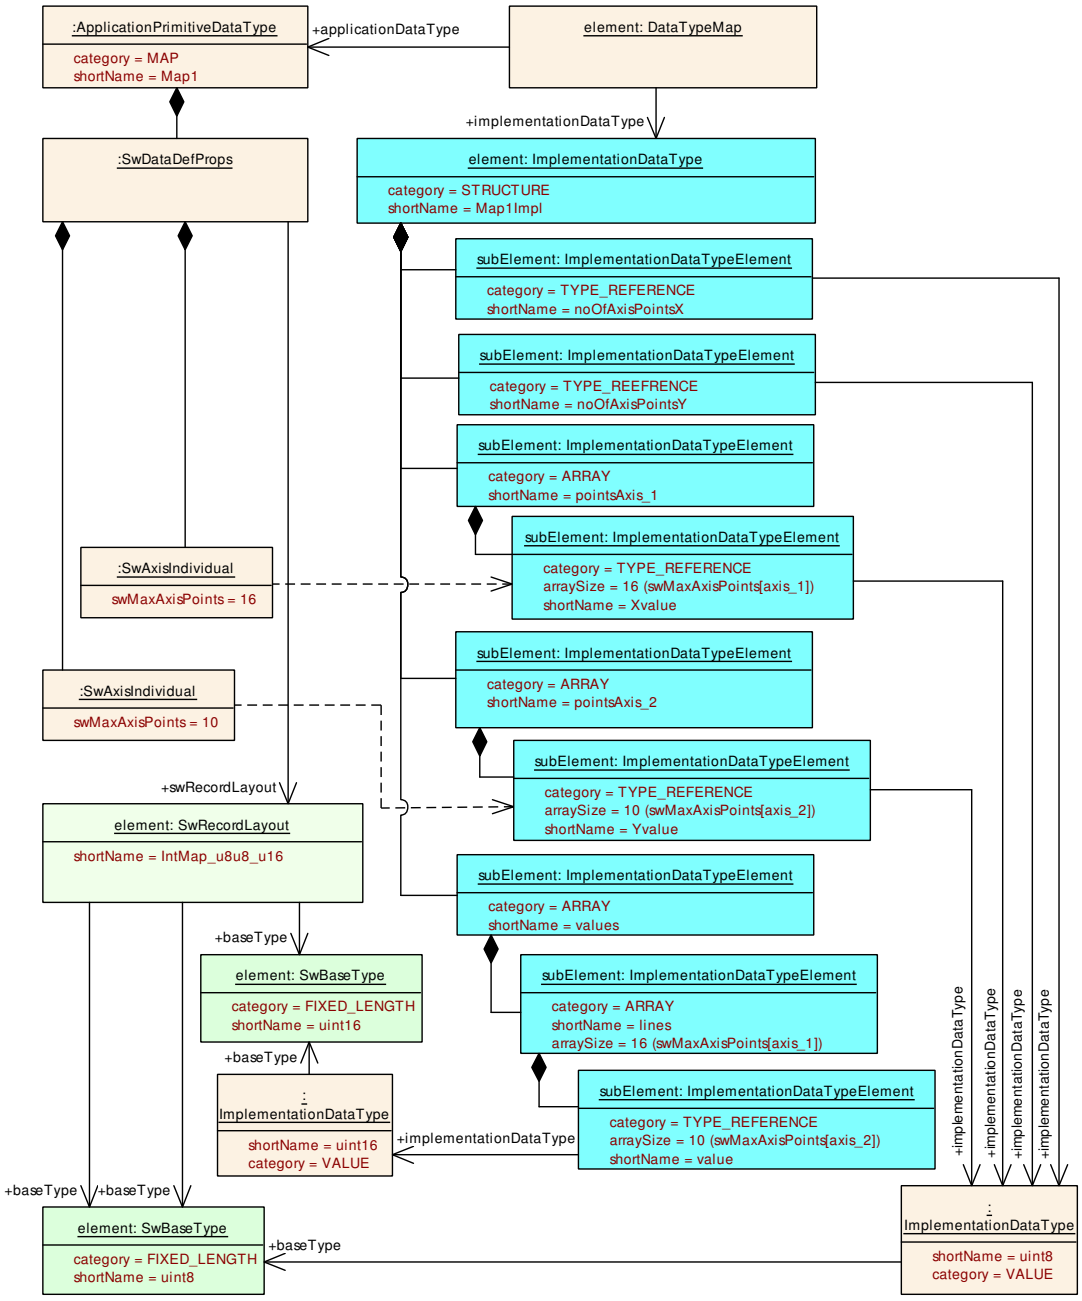

Figure B.14: Record layout and data type for a map

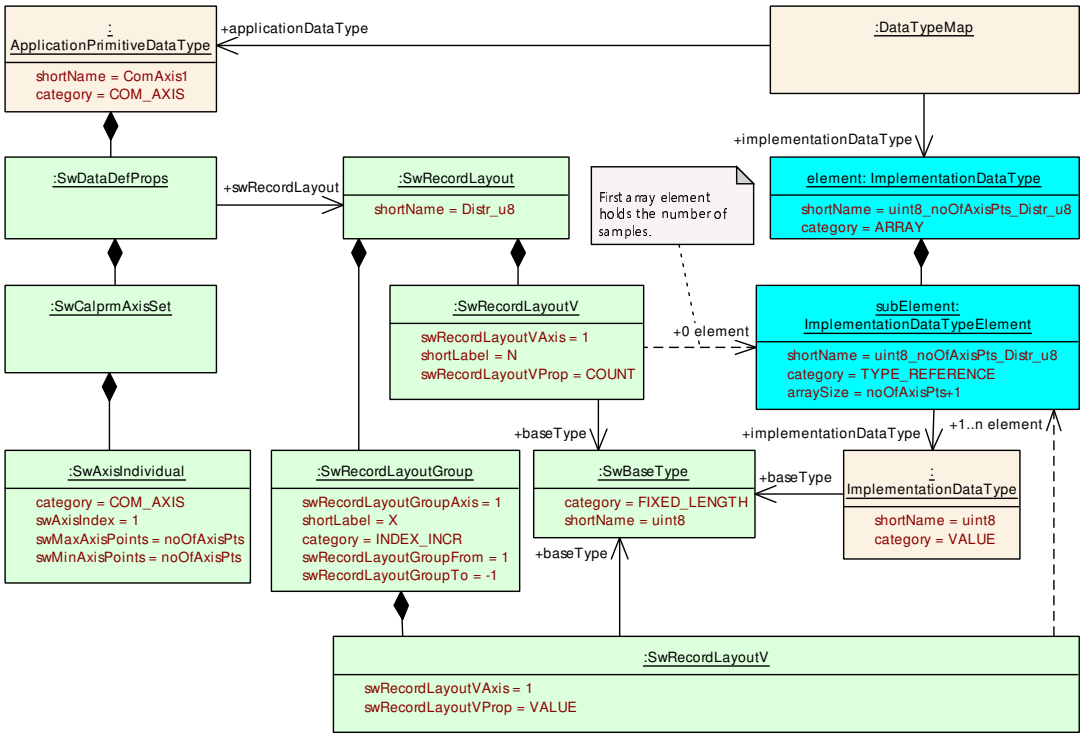

Figure B.15: Record layout for the definition of a group axis

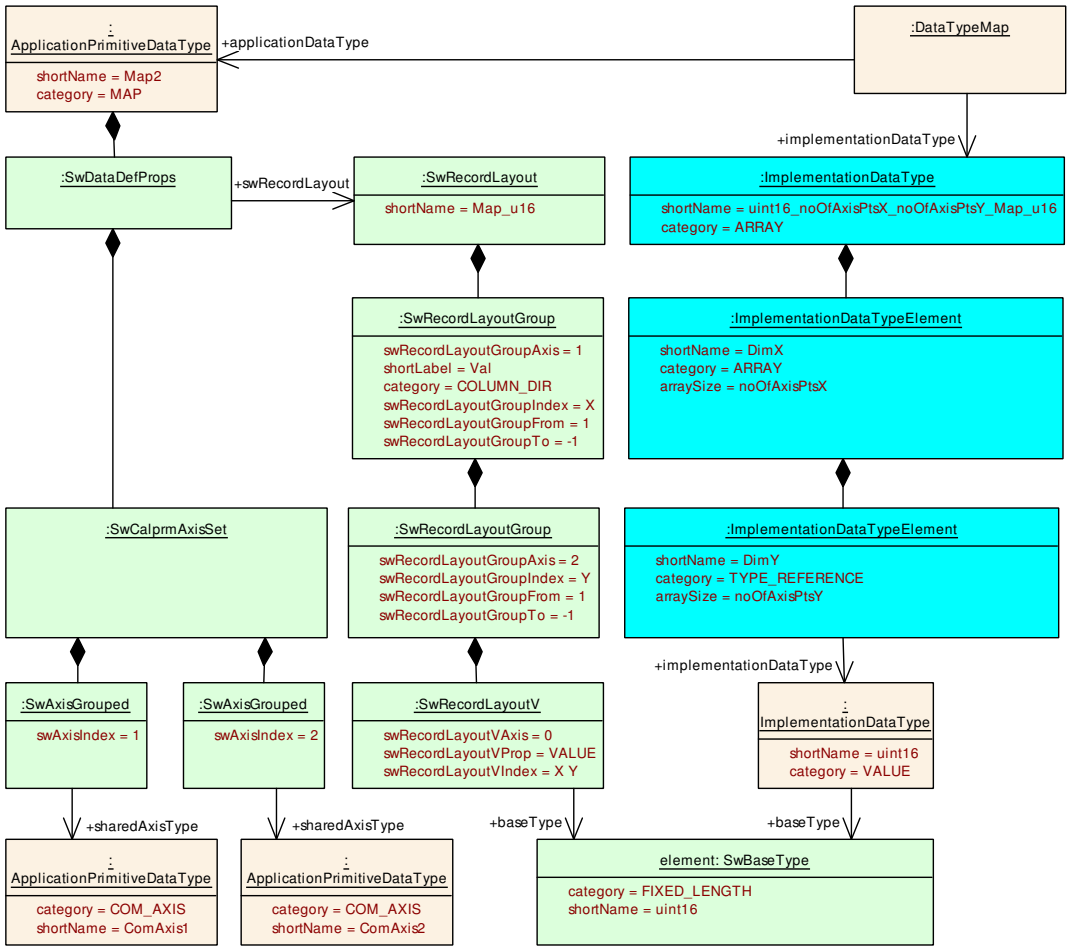

Figure B.16: Record layout for the definition of a map implemented by an array data type

More examples of the application of record layouts can be found in the document [11, TR General Blueprint Supplement].

B.2.4 Definition of Record Layout of a Curve

The following XML fragment provides an example for a `SwRecordLayout` for a curve. Note that in this case recognizing the patterns represented by the A2L-Keywords (shown in XML-Comment) is pretty straightforward, even if the keywords were not provided in the `SwRecordLayoutGroup.category`.

```
<SW-RECORD-LAYOUT>
  <SHORT-NAME>RecordLayoutCurve</SHORT-NAME>
  <SW-RECORD-LAYOUT-GROUP>
    <SW-RECORD-LAYOUT-V><!--  NO_AXIS_PTS_X -->
      <SHORT-LABEL>noOfAxisPts</SHORT-LABEL>
      <SW-RECORD-LAYOUT-V-PROP>COUNT</SW-RECORD-LAYOUT-V-PROP>
      <SW-RECORD-LAYOUT-V-INDEX>1</SW-RECORD-LAYOUT-V-INDEX>
    </SW-RECORD-LAYOUT-V>
    <SW-RECORD-LAYOUT-GROUP><!-- AXIS_PTS_X  -->
      <SHORT-LABEL>xPts</SHORT-LABEL>
      <CATEGORY>INDEX_INCR</CATEGORY>
      <SW-RECORD-LAYOUT-GROUP-AXIS>1</SW-RECORD-LAYOUT-GROUP-AXIS>
      <SW-RECORD-LAYOUT-GROUP-FROM>1</SW-RECORD-LAYOUT-GROUP-FROM>
      <SW-RECORD-LAYOUT-GROUP-TO>-1</SW-RECORD-LAYOUT-GROUP-TO>
```

```
      <SW-RECORD-LAYOUT-V>
        <SHORT-LABEL>xPt</SHORT-LABEL>
        <SW-RECORD-LAYOUT-V-AXIS>1</SW-RECORD-LAYOUT-V-AXIS> <!-- AXIS_PTS_X  -->
        <SW-RECORD-LAYOUT-V-PROP>VALUE</SW-RECORD-LAYOUT-V-PROP>
      </SW-RECORD-LAYOUT-V>
    </SW-RECORD-LAYOUT-GROUP>
    <SW-RECORD-LAYOUT-GROUP>
      <SHORT-LABEL>values</SHORT-LABEL><!-- FNC_VALUES -->
      <CATEGORY>COLUMN_DIR</CATEGORY>
      <SW-RECORD-LAYOUT-GROUP-AXIS>0</SW-RECORD-LAYOUT-GROUP-AXIS>
      <SW-RECORD-LAYOUT-GROUP-FROM>1</SW-RECORD-LAYOUT-GROUP-FROM>
      <SW-RECORD-LAYOUT-GROUP-TO>-1</SW-RECORD-LAYOUT-GROUP-TO>
      <SW-RECORD-LAYOUT-V>
        <SHORT-LABEL>value</SHORT-LABEL>
        <SW-RECORD-LAYOUT-V-AXIS>0</SW-RECORD-LAYOUT-V-AXIS><!-- FNC_VALUES -->
        <SW-RECORD-LAYOUT-V-PROP>VALUE</SW-RECORD-LAYOUT-V-PROP>
      </SW-RECORD-LAYOUT-V>
    </SW-RECORD-LAYOUT-GROUP>
  </SW-RECORD-LAYOUT-GROUP>
</SW-RECORD-LAYOUT>
```

Listing B.23: Example for RecordLayout of a curve

B.2.5 Usage of Group Axis in the context of a Parameter Access

The following bare-bones model listing exemplifies the usage of `SwAxisGrouped` in the context of a `ParameterAccess` where a specific local parameter is identified to take the role of the shared axis in the specific access to the curve.

```
<APPLICATION-SW-COMPONENT-TYPE>
  <SHORT-NAME>A</SHORT-NAME>
  <INTERNAL-BEHAVIORS>
    <SWC-INTERNAL-BEHAVIOR>
      <SHORT-NAME>B</SHORT-NAME>
      <PER-INSTANCE-PARAMETERS>
        <PARAMETER-DATA-PROTOTYPE>
          <SHORT-NAME>Axis</SHORT-NAME>
        </PARAMETER-DATA-PROTOTYPE>
        <PARAMETER-DATA-PROTOTYPE>
          <SHORT-NAME>Curve</SHORT-NAME>
        </PARAMETER-DATA-PROTOTYPE>
      </PER-INSTANCE-PARAMETERS>
      <RUNNABLES>
        <RUNNABLE-ENTITY>
          <SHORT-NAME>MyRunnable</SHORT-NAME>
          <PARAMETER-ACCESSS>
            <PARAMETER-ACCESS>
              <SHORT-NAME>MyParamAccess</SHORT-NAME>
              <ACCESSED-PARAMETER>
                <LOCAL-PARAMETER-REF DEST="AUTOSAR-DATA-PROTOTYPE">/P/A/B/Curve</LOCAL-
                    PARAMETER-REF>
              </ACCESSED-PARAMETER>
              <SW-DATA-DEF-PROPS>
                <SW-DATA-DEF-PROPS-VARIANTS>
                  <SW-DATA-DEF-PROPS-CONDITIONAL>
                    <SW-CALPRM-AXIS-SET>
                      <SW-CALPRM-AXIS>
                        <SW-AXIS-GROUPED>
                          <AR-PARAMETER>
                            <LOCAL-PARAMETER-REF DEST="AUTOSAR-DATA-PROTOTYPE">/P/A/B/Axis</
                                LOCAL-PARAMETER-REF>
                          </AR-PARAMETER>
                        </SW-AXIS-GROUPED>
                      </SW-CALPRM-AXIS>
                    </SW-CALPRM-AXIS-SET>
                  </SW-DATA-DEF-PROPS-CONDITIONAL>
```

```
            </SW-DATA-DEF-PROPS-VARIANTS>
          </SW-DATA-DEF-PROPS>
        </PARAMETER-ACCESS>
      </PARAMETER-ACCESSS>
    </RUNNABLE-ENTITY>
  </RUNNABLES>
 </SWC-INTERNAL-BEHAVIOR>
</INTERNAL-BEHAVIORS>
</APPLICATION-SW-COMPONENT-TYPE>
```

Listing B.24: Usage of `SwAxisGrouped` in the context of a `ParameterAccess`

B.2.6 Definition of Fix Axis

The modeling of an axis of category `FIX_AXIS_PAR` is sketched in the following example model (Figure B.17).

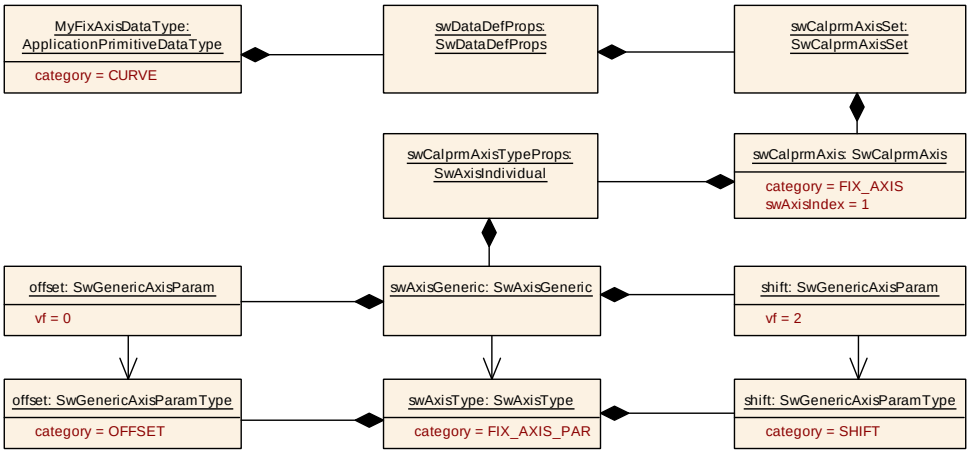

Figure B.17: Modeling of a fix axis of `category` `FIX_AXIS_PAR`

The modeling of an axis of category `FIX_AXIS_PAR_DIST` is sketched in the following example model (Figure B.18).

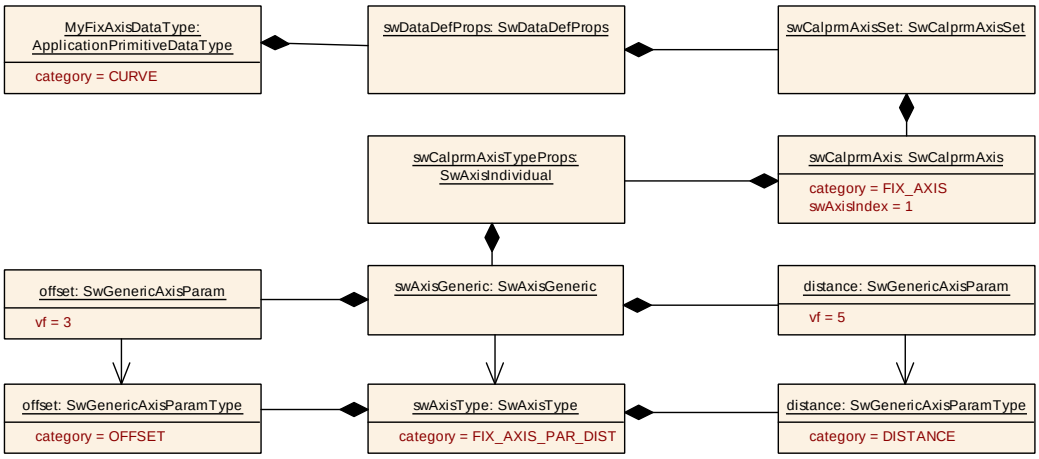

Figure B.18: Modeling of a fix axis of `category` `FIX_AXIS_PAR_DIST`

The modeling of an axis of category FIX_AXIS_PAR_LIST is sketched in the following example model (Figure B.19).

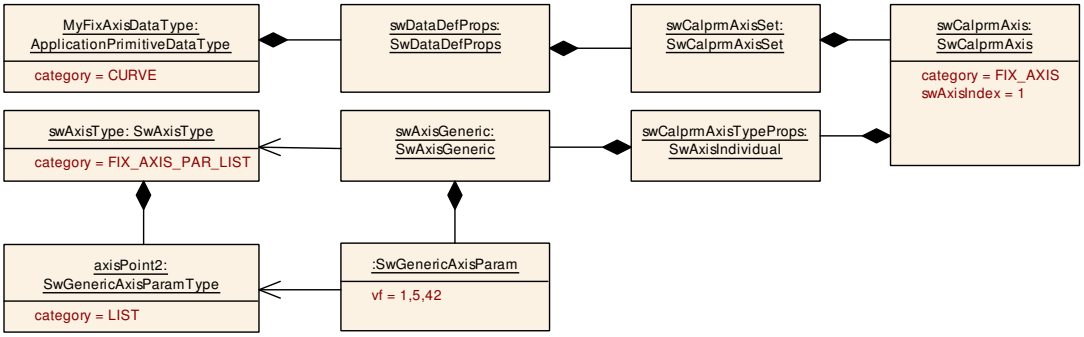

Figure B.19: Modeling of a fix axis of category FIX_AXIS_PAR_LIST

B.3 Examples for the specification of constant Values

This section contains selected examples for the modeling of constant values.

B.3.1 Constant Specification for category CURVE

The following example illustrates how a ConstantSpecification is specified for a CURVE. In this example, the vf attribute is used for the swArraysize as well as for the swValuesPhys.

The basic intention of vf is the usage for variant rich models but it is valid as well if vf contains invariant values.

Class	**CompuConstFormulaContent**			
Note	This meta-class represents the fact that the constant value of the computation method is represented by a variation point. This difference is due to compatibility with ASAM HDO.			
Base	*ARObject*, *CompuConstContent*			
Aggregated by	CompuConst.compuConstContentType			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
vf	Numerical	0..1	attr	Value calculated via a system constant. This element is included in every case where parameters should be generated from numerical values during compile time (not runtime!). Thus for example, the influence of the cylinder number on conversion formulae can be introduced in a repeatable manner. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=codeGenerationTime xml.sequenceOffset=30

Table B.1: CompuConstFormulaContent

Applicable constraints, such as [constr_2050], [constr_1519], and [constr_2052] can be found in Chapter 5.6.5.

```
<CONSTANT-SPECIFICATION>
  <SHORT-NAME>PhysInitValuesOfCurve</SHORT-NAME>
  <DESC>
  <L-2 L="EN">This example shows a ConstantSpecification for a CURVE where the axis is a
      STD_AXIS</L-2>
  </DESC>
  <VALUE-SPEC>
  <APPLICATION-VALUE-SPECIFICATION>
    <CATEGORY>CURVE</CATEGORY>
    <SW-AXIS-CONTS>
      <SW-AXIS-CONT>
        <CATEGORY>STD_AXIS</CATEGORY>
        <SW-AXIS-INDEX>1</SW-AXIS-INDEX>
        <SW-ARRAYSIZE>
          <VF>4</VF>
        </SW-ARRAYSIZE>
        <SW-VALUES-PHYS>
          <VF>0</VF>
          <VF>1</VF>
          <VF>2</VF>
          <VF>3</VF>
        </SW-VALUES-PHYS>
      </SW-AXIS-CONT>
    </SW-AXIS-CONTS>
    <SW-VALUE-CONT>
      <UNIT-REF DEST="UNIT">/Units/NwtMtr</UNIT-REF>
      <SW-ARRAYSIZE>
        <VF>4</VF>
      </SW-ARRAYSIZE>
      <SW-VALUES-PHYS>
        <VF>00.000</VF>
        <VF>10.000</VF>
        <VF>20.000</VF>
        <VF>30.000</VF>
      </SW-VALUES-PHYS>
    </SW-VALUE-CONT>
  </APPLICATION-VALUE-SPECIFICATION>
  </VALUE-SPEC>
</CONSTANT-SPECIFICATION>
```

Listing B.25: Example for Constant Specification for CURVE

B.3.2 Constant Specification for category MAP

The following example illustrates how an ConstantSpecification is specified for a MAP. In this case, one axis of the MAP is a STD_AXIS and the second one is a COM_AXIS.

In this example, the v attribute is used for the swArraysize as well as for the swValuesPhys.

This is possible because the example contains only invariant values.

```
<CONSTANT-SPECIFICATION>
  <SHORT-NAME>PhysInitValuesOfMap</SHORT-NAME>
  <DESC>
  <L-2 L="EN">This example shows a ConstantSpecification for a MAP where the first axis is a
      STD_AXIS and the second axis is a COM_AXIS</L-2>
  </DESC>
  <VALUE-SPEC>
    <APPLICATION-VALUE-SPECIFICATION>
      <CATEGORY>MAP</CATEGORY>
      <SW-AXIS-CONTS>
        <SW-AXIS-CONT>
```

```
          <CATEGORY>STD_AXIS</CATEGORY>
          <SW-AXIS-INDEX>1</SW-AXIS-INDEX>
          <SW-ARRAYSIZE>
            <V>4</V>
          </SW-ARRAYSIZE>
          <SW-VALUES-PHYS>
            <V>0</V>
            <V>1</V>
            <V>2</V>
            <V>3</V>
          </SW-VALUES-PHYS>
        </SW-AXIS-CONT>
      </SW-AXIS-CONTS>
      <SW-VALUE-CONT>
        <UNIT-REF DEST="UNIT">/Units/NwtMtr</UNIT-REF>
        <SW-ARRAYSIZE>
          <V>4</V>
          <V>2</V>
        </SW-ARRAYSIZE>
        <SW-VALUES-PHYS>
          <VG>
          <LABEL>
            <L-4 L="EN">Values for axis index 2 equals 0</L-4>
          </LABEL>
            <V>00</V>
            <V>10</V>
            <V>20</V>
            <V>30</V>
          </VG>
          <VG>
          <LABEL>
            <L-4 L="EN">Values for axis index 2 equals 1</L-4>
          </LABEL>
            <V>01</V>
            <V>11</V>
            <V>21</V>
            <V>31</V>
          </VG>
        </SW-VALUES-PHYS>
      </SW-VALUE-CONT>
    </APPLICATION-VALUE-SPECIFICATION>
  </VALUE-SPEC>
</CONSTANT-SPECIFICATION>
```

Listing B.26: Example for Constant Specification for MAP

B.3.3 Constant Specification for category MAP with two STD_AXIS

The example contained in this sub-chapter illustrates the creation of the `Constant-Specification` for a `MAP` that (in contrast to the previous example sketched in Listing Listing B.26) consists of two `STD_AXIS`.

Like in the previous example, the `v` attribute is used for the `swArraysize` as well as for the `swValuesPhys`.

```
<CONSTANT-SPECIFICATION>
  <SHORT-NAME>MapExample</SHORT-NAME>
  <VALUE-SPEC>
    <APPLICATION-VALUE-SPECIFICATION>
      <CATEGORY>MAP</CATEGORY>
      <SW-AXIS-CONTS>
        <SW-AXIS-CONT>
          <SW-AXIS-INDEX>1</SW-AXIS-INDEX>
          <SW-ARRAYSIZE>
            <V>4</V>
```

```
          </SW-ARRAYSIZE>
          <SW-VALUES-PHYS>
            <V>1</V>
            <V>2</V>
            <V>3</V>
            <V>4</V>
          </SW-VALUES-PHYS>
        </SW-AXIS-CONT>
        <SW-AXIS-CONT>
          <SW-AXIS-INDEX>2</SW-AXIS-INDEX>
          <SW-ARRAYSIZE>
            <V>2</V>
          </SW-ARRAYSIZE>
          <SW-VALUES-PHYS>
            <V>10</V>
            <V>11</V>
          </SW-VALUES-PHYS>
        </SW-AXIS-CONT>
      </SW-AXIS-CONTS>
      <SW-VALUE-CONT>
        <SW-ARRAYSIZE>
          <V>4</V>
          <V>2</V>
        </SW-ARRAYSIZE>
        <SW-VALUES-PHYS>
          <VG>
            <LABEL>
              <L-4 L="EN">Values for 10</L-4>
            </LABEL>
            <V>110</V>
            <V>210</V>
            <V>310</V>
            <V>410</V>
          </VG>
          <VG>
            <LABEL>
              <L-4 L="EN">Values for 11</L-4>
            </LABEL>
            <V>111</V>
            <V>211</V>
            <V>311</V>
            <V>411</V>
          </VG>
        </SW-VALUES-PHYS>
      </SW-VALUE-CONT>
    </APPLICATION-VALUE-SPECIFICATION>
  </VALUE-SPEC>
</CONSTANT-SPECIFICATION>
```

Listing B.27: Example for Constant Specification for STD_AXIS

B.3.4 Constant Specification for category COM_AXIS

The following example illustrates how an ConstantSpecification is specified for a COM_AXIS.

```
<CONSTANT-SPECIFICATION>
  <SHORT-NAME>PhysInitValuesOfComAxis</SHORT-NAME>
  <DESC>
  <L-2 L="EN">This example shows a ConstantSpecification for a COM_AXIS</L-2>
  </DESC>
  <VALUE-SPEC>
    <APPLICATION-VALUE-SPECIFICATION>
      <CATEGORY>COM_AXIS</CATEGORY>
      <SW-VALUE-CONT>
        <UNIT-REF DEST="UNIT">/Units/Rpm</UNIT-REF>
```

```
        <SW-ARRAYSIZE>
          <V>6</V>
        </SW-ARRAYSIZE>
        <SW-VALUES-PHYS>
          <V>0</V>
          <V>500</V>
          <V>1000</V>
          <V>1500</V>
          <V>3000</V>
          <V>5000</V>
        </SW-VALUES-PHYS>
      </SW-VALUE-CONT>
    </APPLICATION-VALUE-SPECIFICATION>
  </VALUE-SPEC>
</CONSTANT-SPECIFICATION>
```

Listing B.28: Example for Constant Specification for COM_AXIS

B.3.5 Value specification for BITFIELD_TEXTTABLE

Listing B.29 shows the definition of an `ApplicationValueSpecification` that can be taken e.g. for the initialization of a `DataPrototype` typed by an `ApplicationDataType` that refers to a `CompuMethod` of `category` `BITFIELD_TEXTTABLE`.

More background information for this example can be found in Chapter 5.6.7.

```
<APPLICATION-VALUE-SPECIFICATION>
  <SHORT-LABEL>tirePressureInit</SHORT-LABEL>
  <CATEGORY>VALUE</CATEGORY>
  <SW-VALUE-CONT>
    <SW-VALUES-PHYS>
      <VT>problem_low_Pressure|rearRight_yes|rearLeft_yes|frontRight_no|frontLeft_no</VT>
    </SW-VALUES-PHYS>
  </SW-VALUE-CONT>
</APPLICATION-VALUE-SPECIFICATION>
```

Listing B.29: Example for the definition of an `ApplicationValueSpecification` for `BITFIELD_TEXTTABLE`

Listing B.30 shows the definition of an `TextValueSpecification` that can be taken e.g. for the initialization of a `DataPrototype` typed by an `ImplementationDataType` that refers to a `CompuMethod` of `category` `BITFIELD_TEXTTABLE`.

```
<TEXT-VALUE-SPECIFICATION>
  <SHORT-LABEL>tirePressureInit</SHORT-LABEL>
  <VALUE>problem_low_Pressure|rearRight_yes|rearLeft_yes|frontRight_no|frontLeft_no</VALUE>
</TEXT-VALUE-SPECIFICATION>
```

Listing B.30: Example for the definition of a `TextValueSpecification` for `BITFIELD_TEXTTABLE`

B.3.6 Value specification for MAP depending on Record Layout

The observation made by [constr_10503] and [constr_10504] shall be rationalized by the example discussed in section titled “Record Layout: IntMap 3 x 4” in the [11, TR General Blueprint Supplement].

The underlying principles of indexing are described in the sections titled “Definition of Indexing” and “Transform Logical View in Memory Representation” of the same document.

From the perspective of the definition of a `Compound Primitive Data Type`, it can be concluded that the specification of an `ApplicationValueSpecification` may also be defined with the same mindset and this means that the consideration of the `SwRecordLayout` for the definition of the `ApplicationValueSpecification` is expected by the target audience.

[1,1]	[1,12]	[1,3]	[1,4]
[2,1]	[2,2]	[2,3]	[2,4]
[3,1]	[3,2]	[3,3]	[3,4]

Figure B.20: Visualization of the value axis of a MAP

The above picture shows how the values of a 3 by 4 map are arranged. The storage of these values in the computer memory can be done in two orthogonal ways:

- **row-first** (indicated by setting the value of the respective `SwRecordLayoutGroup.category` to the value `ROW_DIR`) and
- **column-first** (indicated by setting the value of the respective `SwRecordLayoutGroup.category` to the value `COLUMN_DIR`).

A concrete example of the two orthogonal ways is discussed in Chapter B.3.6.1 and Chapter B.3.6.2.

The difference only shows up in the definition of the `SwValueCont`. The definition of the `SwAxisCont` is only broadly sketched in the example, but it is identical for both cases.

B.3.6.1 Row-First

If the `ROW_DIR` scenario is followed, then the first value is the element [1,1], followed by [1,2], and so on.

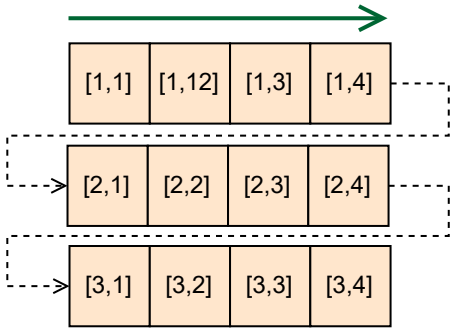

Figure B.21: Visualization of the value axis of a MAP in a `ROW_DIR` layout

In ARXML, a corresponding `ApplicationValueSpecification` would look like the following sketch:

```
<APPLICATION-VALUE-SPECIFICATION>
  <SW-AXIS-CONTS>
    <SW-AXIS-CONT>
      <SW-AXIS-INDEX>1</SW-AXIS-INDEX>
      <SW-ARRAYSIZE>
        <V>4</V>
      </SW-ARRAYSIZE>
    </SW-AXIS-CONT>
    <SW-AXIS-CONT>
      <SW-AXIS-INDEX>2</SW-AXIS-INDEX>
      <SW-ARRAYSIZE>
        <V>3</V>
      </SW-ARRAYSIZE>
    </SW-AXIS-CONT>
  </SW-AXIS-CONTS>
  <SW-VALUE-CONT>
    <SW-ARRAYSIZE>
      <V>4</V>
      <V>3</V>
    </SW-ARRAYSIZE>
    <SW-VALUES-PHYS>
      <VG>
        <LABEL>
          <L-4 L="EN">First Row</L-4>
        </LABEL>
        <V>11</V>
        <V>12</V>
        <V>13</V>
        <V>14</V>
      </VG>
      <VG>
        <LABEL>
          <L-4 L="EN">Second Row</L-4>
        </LABEL>
        <V>21</V>
        <V>22</V>
        <V>23</V>
        <V>24</V>
      </VG>
      <VG>
        <LABEL>
          <L-4 L="EN">Third Row</L-4>
        </LABEL>
        <V>31</V>
        <V>32</V>
        <V>33</V>
        <V>34</V>
      </VG>
    </SW-VALUES-PHYS>
  </SW-VALUE-CONT>
```

```
</APPLICATION-VALUE-SPECIFICATION>
```

Listing B.31: Value specification for a MAP in a ROW_DIR layout

In memory, the layout of the entire map (example layouts for the x and y-axis are only included for the sake of clarity) looks like the following sketch:

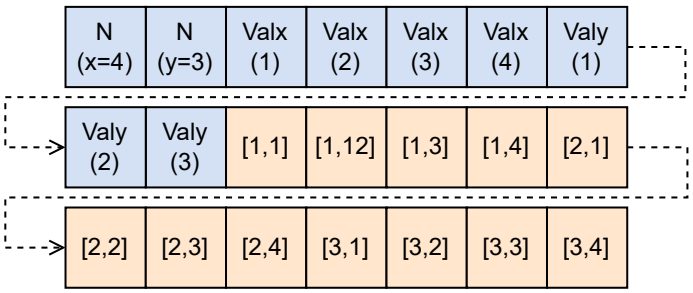

Figure B.22: Visualization of the memory layout of the MAP in a ROW_DIR layout

B.3.6.2 Column-First

If the COLUMN_DIR scenario is followed, then the first value is the element [1,1], followed by [2,1], and so on.

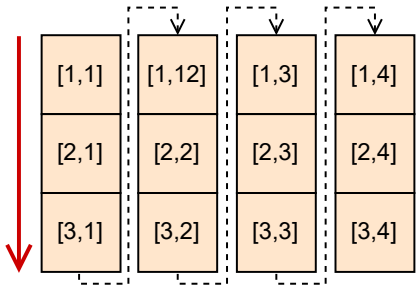

Figure B.23: Visualization of the value axis of a MAP in a COLUMN_DIR layout

In ARXML, a corresponding ApplicationValueSpecification would look like the following sketch:

```
<APPLICATION-VALUE-SPECIFICATION>
  <SW-AXIS-CONTS>
    <SW-AXIS-CONT>
      <SW-AXIS-INDEX>1</SW-AXIS-INDEX>
      <SW-ARRAYSIZE>
        <V>4</V>
      </SW-ARRAYSIZE>
    </SW-AXIS-CONT>
    <SW-AXIS-CONT>
      <SW-AXIS-INDEX>2</SW-AXIS-INDEX>
      <SW-ARRAYSIZE>
        <V>3</V>
      </SW-ARRAYSIZE>
    </SW-AXIS-CONT>
  </SW-AXIS-CONTS>
  <SW-VALUE-CONT>
    <SW-ARRAYSIZE>
      <V>3</V>
```

```
      <V>4</V>
    </SW-ARRAYSIZE>
    <SW-VALUES-PHYS>
      <VG>
        <LABEL>
          <L-4 L="EN">First Column</L-4>
        </LABEL>
        <V>11</V>
        <V>21</V>
        <V>31</V>
      </VG>
      <VG>
        <LABEL>
          <L-4 L="EN">Second Column</L-4>
        </LABEL>
        <V>12</V>
        <V>22</V>
        <V>32</V>
      </VG>
      <VG>
        <LABEL>
          <L-4 L="EN">Third Column</L-4>
        </LABEL>
        <V>13</V>
        <V>23</V>
        <V>33</V>
      </VG>
      <VG>
        <LABEL>
          <L-4 L="EN">Fourth Column</L-4>
        </LABEL>
        <V>14</V>
        <V>24</V>
        <V>34</V>
      </VG>
    </SW-VALUES-PHYS>
  </SW-VALUE-CONT>
</APPLICATION-VALUE-SPECIFICATION>
```

Listing B.32: Value specification for a MAP in a COLUMN_DIR layout

In memory, the layout of the entire map (example layouts for the x and y-axis are only included for the sake of clarity) looks like the following sketch:

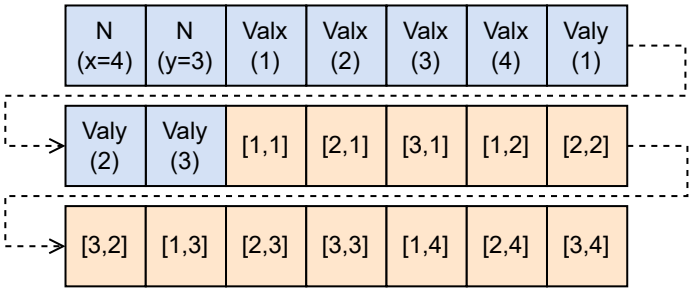

Figure B.24: Visualization of the memory layout of the MAP in a COLUMN_DIR layout

B.3.7 Rule-based Value Specification

The modeling of a RuleBasedValueSpecification depends on the data type used for modeling the elements of the array for which the RuleBasedValue-Specification is supposed to be applied.

This section contains examples for the creation of a RuleBasedValue-Specification depending on the complexity of the element data type of the array.

B.3.8 Rule-based Value Specification for Elements of primitive Data Type

As an example for the application of a RuleBasedValueSpecification for a primitive array element data type, consider the following scenario:



Figure B.25: Value specification for a simple array

The sketched array depicted in Figure B.25 corresponds to the modeling exemplified in Listing B.33.

```
<ARRAY-VALUE-SPECIFICATION>
  <ELEMENTS>
    <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
      <SW-VALUE-CONT>
        <RULE-BASED-VALUES>
          <RULE>FILL_UNTIL_END</RULE>
          <ARGUMENTSS>
            <RULE-ARGUMENTS>
              <V>1</V>
              <V>0</V>
            </RULE-ARGUMENTS>
          </ARGUMENTSS>
        </RULE-BASED-VALUES>
      </SW-VALUE-CONT>
    </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
  </ELEMENTS>
</ARRAY-VALUE-SPECIFICATION>
```

Listing B.33: Value specification for a simple array

B.3.9 Rule-based Value Specification for Elements of composite Data Type

As an example of how the rule-based initialization of composite data structures works, consider the composite structure sketched in Figure B.26.

In simple terms, it describes an array consisting of elements that themselves are typed by a structure of two primitive elements.

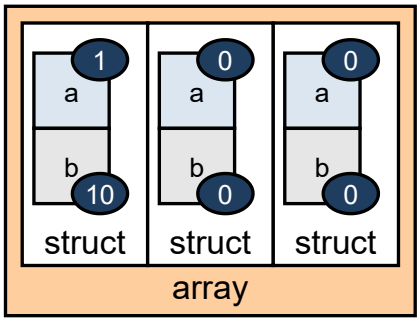

Figure B.26: Example for the explanation of rule-based composite value-specification

In this example, the element “a” of the first structure shall be initialized with the value 1, the corresponding “b” element shall be assigned a 10. All other values in all following elements shall be set to 0. This is also indicated by the numbers in ellipses in Figure B.26.

The implementation of the example in ARXML is illustrated in Listing B.34. As already explained before, the last (in the order of appearance) `ValueSpecification` in the context of an `AbstractRuleBasedValueSpecification` is taken to execute the rule (as described above).

```
<ARRAY-VALUE-SPECIFICATION>
  <ELEMENTS>
    <COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
      <RULE>FILL_UNTIL_END</RULE>
      <ARGUMENTS>
        <RECORD-VALUE-SPECIFICATION>
          <FIELDS>
            <APPLICATION-VALUE-SPECIFICATION>
              <SW-VALUE-CONT>
                <SW-VALUES-PHYS>
                  <V>1</V>
                </SW-VALUES-PHYS>
              </SW-VALUE-CONT>
            </APPLICATION-VALUE-SPECIFICATION>
            <APPLICATION-VALUE-SPECIFICATION>
              <SW-VALUE-CONT>
                <SW-VALUES-PHYS>
                  <V>10</V>
                </SW-VALUES-PHYS>
              </SW-VALUE-CONT>
            </APPLICATION-VALUE-SPECIFICATION>
          </FIELDS>
        </RECORD-VALUE-SPECIFICATION>
        <RECORD-VALUE-SPECIFICATION>
          <FIELDS>
            <APPLICATION-VALUE-SPECIFICATION>
              <SW-VALUE-CONT>
                <SW-VALUES-PHYS>
                  <V>0</V>
                </SW-VALUES-PHYS>
              </SW-VALUE-CONT>
            </APPLICATION-VALUE-SPECIFICATION>
            <APPLICATION-VALUE-SPECIFICATION>
              <SW-VALUE-CONT>
                <SW-VALUES-PHYS>
                  <V>0</V>
                </SW-VALUES-PHYS>
              </SW-VALUE-CONT>
            </APPLICATION-VALUE-SPECIFICATION>
          </FIELDS>
        </RECORD-VALUE-SPECIFICATION>
```

```
      </ARGUMENTS>
    </COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
  </ELEMENTS>
</ARRAY-VALUE-SPECIFICATION>
```

Listing B.34: Example for composite rule-based value specification

A more complicated example is sketched in Figure B.27. Here, a deeply nested composite data structure is described: an array of structures that in turn contain an array.

To keep the ARXML listing as simple as possible, the example assumes that **all** (as opposed to the initialization of the first, and then of all other elements) "struct" elements shall be initialized with the same value.

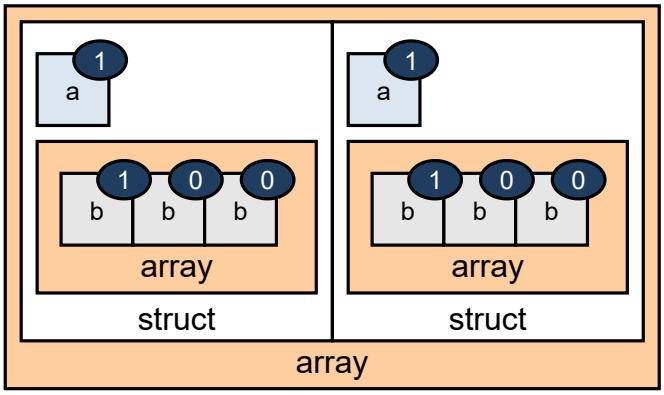

Figure B.27: Value specification for a deeply nested array

The deeply nested "array" is initialized by means of an `ApplicationRuleBasedValueSpecification`.

```
<ARRAY-VALUE-SPECIFICATION>
  <ELEMENTS>
    <COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
      <RULE>FILL_UNTIL_END</RULE>
      <ARGUMENTS>
        <RECORD-VALUE-SPECIFICATION>
          <FIELDS>
            <APPLICATION-VALUE-SPECIFICATION>
              <SW-VALUE-CONT>
                <SW-VALUES-PHYS>
                  <V>1</V>
                </SW-VALUES-PHYS>
              </SW-VALUE-CONT>
            </APPLICATION-VALUE-SPECIFICATION>
            <ARRAY-VALUE-SPECIFICATION>
              <ELEMENTS>
                <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
                  <SW-VALUE-CONT>
                    <RULE-BASED-VALUES>
                      <RULE>FILL_UNTIL_END</RULE>
                      <ARGUMENTSS>
                        <RULE-ARGUMENTS>
                          <V>1</V>
                          <V>0</V>
                        </RULE-ARGUMENTS>
                      </ARGUMENTSS>
                    </RULE-BASED-VALUES>
                  </SW-VALUE-CONT>
                </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
              </ELEMENTS>
            </ARRAY-VALUE-SPECIFICATION>
```

```
          </FIELDS>
        </RECORD-VALUE-SPECIFICATION>
      </ARGUMENTS>
    </COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
  </ELEMENTS>
</ARRAY-VALUE-SPECIFICATION>
```

Listing B.35: Value specification for a deeply nested array

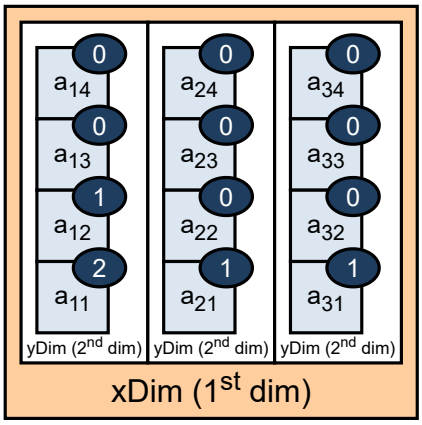

Figure B.28: Rule-based Value specification for a 2-dimensional array

As another variation of the theme, the rule-based initialization of multi-dimensional arrays shall be discussed.

Consequently, the following example extends the one-dimensional rule-based Value-Specification (see Figure B.25) to a second dimension. The general layout is sketched in the following figure:

For the sake of clarity, the picture has been drawn to align the first dimension (the *x-axis*) of the two-dimensional array with the horizontal direction and the second dimension (the *y-axis*) with the vertical direction.

The direction index values of each array element are visible as subscript on the bottom right of the element, i.e. a_{12} indicates that the element is part of the first element on the *x-axis* and represents the second element of the *y-axis*. The initial value of element a_{12} shall be 1.

As indicated by the sketch in Figure B.28, the second element (i.e. the “vertical” array, i.e. everything from a_{21} to a_{24}) and all following (i.e. everything from a_{31} to a_{34}) shall have the identical initial values. The first element deviates from the second in terms of initial values.

The creation of the `ArrayValueSpecification` for this example is based on the definition of a `CompositeRuleBasedValueSpecification` with two `argument`s:

- an `ArrayValueSpecification` that carries an `ApplicationRuleBased-ValueSpecification` for the first element (that itself is an array) on the x-dimension and

- an ArrayValueSpecification that carries an ApplicationRuleBased-ValueSpecification for each of the remaining elements (that itself are arrays) on the x-dimension.

```
<ARRAY-VALUE-SPECIFICATION>
  <ELEMENTS>
    <COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
      <RULE>FILL_UNTIL_END</RULE>
      <ARGUMENTS>
        <ARRAY-VALUE-SPECIFICATION>
          <ELEMENTS>
            <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
              <CATEGORY>ARRAY</CATEGORY>
              <SW-VALUE-CONT>
                <RULE-BASED-VALUES>
                  <RULE>FILL_UNTIL_END</RULE>
                  <ARGUMENTSS>
                    <RULE-ARGUMENTS>
                      <V>2</V>
                      <V>1</V>
                      <V>0</V>
                    </RULE-ARGUMENTS>
                  </ARGUMENTSS>
                </RULE-BASED-VALUES>
              </SW-VALUE-CONT>
            </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
          </ELEMENTS>
        </ARRAY-VALUE-SPECIFICATION>
        <ARRAY-VALUE-SPECIFICATION>
          <ELEMENTS>
            <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
              <CATEGORY>ARRAY</CATEGORY>
              <SW-VALUE-CONT>
                <RULE-BASED-VALUES>
                  <RULE>FILL_UNITL_END</RULE>
                  <ARGUMENTSS>
                    <RULE-ARGUMENTS>
                      <V>1</V>
                      <V>0</V>
                    </RULE-ARGUMENTS>
                  </ARGUMENTSS>
                </RULE-BASED-VALUES>
              </SW-VALUE-CONT>
            </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
          </ELEMENTS>
        </ARRAY-VALUE-SPECIFICATION>
      </ARGUMENTS>
    </COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
  </ELEMENTS>
</ARRAY-VALUE-SPECIFICATION>
```

Listing B.36: Value specification for a 2-dimensional array

The next example adds one dimension to the array structure, i.e. it describes a three-dimensional array, as sketched in Figure B.29.

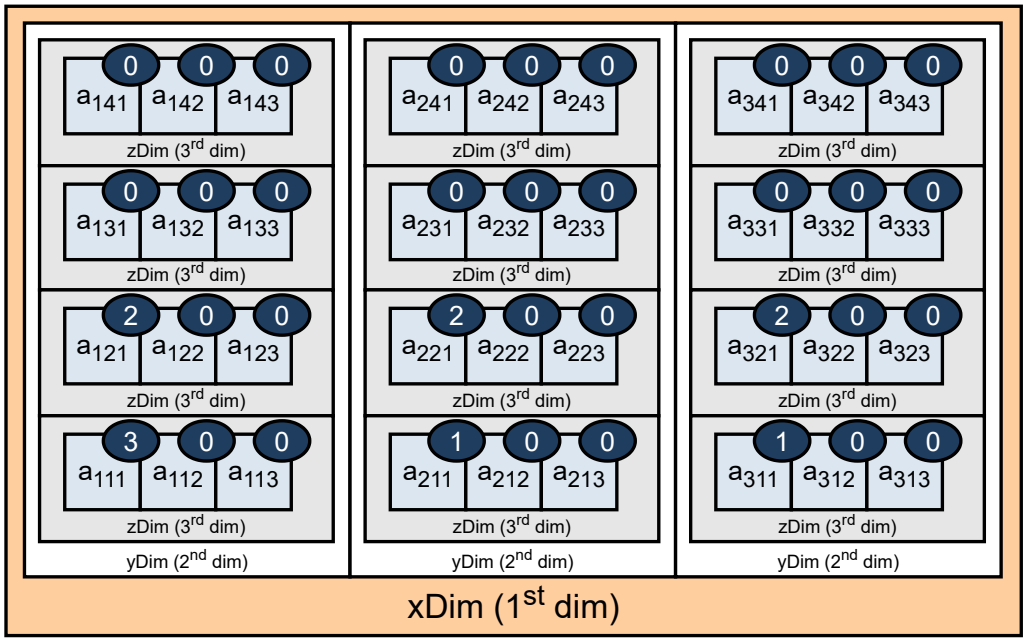

Figure B.29: Rule-based Value specification for a 3-dimensional array

In this case the *x-axis* has again been aligned in the horizontal direction, while the *y-axis* is drawn vertically. The *z-axis*, finally, goes horizontal again.

The principal structure of this example is similar to the previous example.

The first array element in the x-dimension (which includes everything from a_{111} to a_{143}) defines a different initial value than the other elements.

The initial values of the second and third element in x-direction are identical.

```
<ARRAY-VALUE-SPECIFICATION>
  <ELEMENTS>
    <COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
      <RULE>FILL_UNTIL_END</RULE>
      <ARGUMENTS>
        <ARRAY-VALUE-SPECIFICATION>
          <ELEMENTS>
            <COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
              <RULE>FILL_UNTIL_END</RULE>
              <ARGUMENTS>
                <ARRAY-VALUE-SPECIFICATION>
                  <ELEMENTS>
                    <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
                      <CATEGORY>ARRAY</CATEGORY>
                      <SW-VALUE-CONT>
                        <RULE-BASED-VALUES>
                          <RULE>FILL_UNTIL_END</RULE>
                          <ARGUMENTSS>
                            <RULE-ARGUMENTS>
                              <V>3</V>
                              <V>0</V>
                            </RULE-ARGUMENTS>
                          </ARGUMENTSS>
                        </RULE-BASED-VALUES>
                      </SW-VALUE-CONT>
                    </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
                  </ELEMENTS>
                </ARRAY-VALUE-SPECIFICATION>
                <ARRAY-VALUE-SPECIFICATION>
                  <ELEMENTS>
```

```
            <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
              <CATEGORY>ARRAY</CATEGORY>
              <SW-VALUE-CONT>
                <RULE-BASED-VALUES>
                  <RULE>FILL_UNTIL_END</RULE>
                  <ARGUMENTSS>
                    <RULE-ARGUMENTS>
                      <V>2</V>
                      <V>0</V>
                    </RULE-ARGUMENTS>
                  </ARGUMENTSS>
                </RULE-BASED-VALUES>
              </SW-VALUE-CONT>
            </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
          </ELEMENTS>
        </ARRAY-VALUE-SPECIFICATION>
        <ARRAY-VALUE-SPECIFICATION>
          <ELEMENTS>
            <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
              <CATEGORY>ARRAY</CATEGORY>
              <SW-VALUE-CONT>
                <RULE-BASED-VALUES>
                  <RULE>FILL_UNTIL_END</RULE>
                  <ARGUMENTSS>
                    <RULE-ARGUMENTS>
                      <V>0</V>
                    </RULE-ARGUMENTS>
                  </ARGUMENTSS>
                </RULE-BASED-VALUES>
              </SW-VALUE-CONT>
            </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
          </ELEMENTS>
        </ARRAY-VALUE-SPECIFICATION>
      </ARGUMENTS>
    </COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
  </ELEMENTS>
</ARRAY-VALUE-SPECIFICATION>
<ARRAY-VALUE-SPECIFICATION>
  <ELEMENTS>
    <COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
      <RULE>FILL_UNTIL_END</RULE>
      <ARGUMENTS>
        <ARRAY-VALUE-SPECIFICATION>
          <ELEMENTS>
            <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
              <CATEGORY>ARRAY</CATEGORY>
              <SW-VALUE-CONT>
                <RULE-BASED-VALUES>
                  <RULE>FILL_UNTIL_END</RULE>
                  <ARGUMENTSS>
                    <RULE-ARGUMENTS>
                      <V>1</V>
                      <V>0</V>
                    </RULE-ARGUMENTS>
                  </ARGUMENTSS>
                </RULE-BASED-VALUES>
              </SW-VALUE-CONT>
            </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
          </ELEMENTS>
        </ARRAY-VALUE-SPECIFICATION>
        <ARRAY-VALUE-SPECIFICATION>
          <ELEMENTS>
            <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
              <CATEGORY>ARRAY</CATEGORY>
              <SW-VALUE-CONT>
                <RULE-BASED-VALUES>
                  <RULE>FILL_UNTIL_END</RULE>
                  <ARGUMENTSS>
                    <RULE-ARGUMENTS>
                      <V>2</V>
```

```
                    <V>0</V>
                  </RULE-ARGUMENTS>
                </ARGUMENTSS>
              </RULE-BASED-VALUES>
            </SW-VALUE-CONT>
          </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
        </ELEMENTS>
      </ARRAY-VALUE-SPECIFICATION>
      <ARRAY-VALUE-SPECIFICATION>
        <ELEMENTS>
          <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
            <CATEGORY>ARRAY</CATEGORY>
            <SW-VALUE-CONT>
              <RULE-BASED-VALUES>
                <RULE>FILL_UNTIL_END</RULE>
                <ARGUMENTSS>
                  <RULE-ARGUMENTS>
                    <V>0</V>
                  </RULE-ARGUMENTS>
                </ARGUMENTSS>
              </RULE-BASED-VALUES>
            </SW-VALUE-CONT>
          </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
        </ELEMENTS>
      </ARRAY-VALUE-SPECIFICATION>
    </ARGUMENTS>
  </COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
</ELEMENTS>
</ARRAY-VALUE-SPECIFICATION>
```

Listing B.37: Value specification for a 3-dimensional array

B.3.10 Rule-based Value Specification for an Array of compound primitive Objects

The purpose of the following example for the definition of a `CompositeRuleBasedValueSpecification` (see also Chapter 5.6.9.2) is to show how an “array of curves” is initialized by means of a `CompositeRuleBasedValueSpecification`.

Before the definition of the `CompositeRuleBasedValueSpecification` can be started, it is necessary to define the structure of the curve.

Therefore, the example starts with the definition of the data type for the input value for the curve, see Listing B.38. This data type is used for the definition of the actual curve data type in Listing B.40.

```
<APPLICATION-PRIMITIVE-DATA-TYPE>
  <SHORT-NAME>axisInputType</SHORT-NAME>
  <CATEGORY>VALUE</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <SW-CALIBRATION-ACCESS>READ-ONLY</SW-CALIBRATION-ACCESS>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
</APPLICATION-PRIMITIVE-DATA-TYPE>
```

Listing B.38: Definition of curve input value data type

The next step is the definition of the data type for the result of the interpolation. This part is sketched in Listing B.39. This data type is used for the definition of the actual curve data type in Listing B.40.

```
<APPLICATION-PRIMITIVE-DATA-TYPE>
  <SHORT-NAME>curveType</SHORT-NAME>
  <CATEGORY>VALUE</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <SW-CALIBRATION-ACCESS>READ-ONLY</SW-CALIBRATION-ACCESS>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
</APPLICATION-PRIMITIVE-DATA-TYPE>
```

Listing B.39: Definition of data type for the result of the interpolation

Finally, the data type for the actual curve is defined, see Listing B.40.

```
<APPLICATION-PRIMITIVE-DATA-TYPE>
  <SHORT-NAME>MyTable</SHORT-NAME>
  <CATEGORY>CURVE</CATEGORY>
  <SW-DATA-DEF-PROPS>
    <SW-DATA-DEF-PROPS-VARIANTS>
      <SW-DATA-DEF-PROPS-CONDITIONAL>
        <SW-CALIBRATION-ACCESS>READ-ONLY</SW-CALIBRATION-ACCESS>
        <SW-CALPRM-AXIS-SET>
          <SW-CALPRM-AXIS>
            <SW-AXIS-INDEX>1</SW-AXIS-INDEX>
            <CATEGORY>STD_AXIS</CATEGORY>
            <SW-AXIS-INDIVIDUAL>
              <INPUT-VARIABLE-TYPE-REF DEST="APPLICATION-PRIMITIVE-DATA-TYPE">/
                 ApplicationDataTypes/axisInputType</INPUT-VARIABLE-TYPE-REF>
              <SW-MAX-AXIS-POINTS>10</SW-MAX-AXIS-POINTS>
              <SW-MIN-AXIS-POINTS>0</SW-MIN-AXIS-POINTS>
            </SW-AXIS-INDIVIDUAL>
            <SW-CALIBRATION-ACCESS>READ-ONLY</SW-CALIBRATION-ACCESS>
          </SW-CALPRM-AXIS>
        </SW-CALPRM-AXIS-SET>
        <VALUE-AXIS-DATA-TYPE-REF DEST="APPLICATION-PRIMITIVE-DATA-TYPE">/ApplicationDataTypes
           /curveType</VALUE-AXIS-DATA-TYPE-REF>
      </SW-DATA-DEF-PROPS-CONDITIONAL>
    </SW-DATA-DEF-PROPS-VARIANTS>
  </SW-DATA-DEF-PROPS>
</APPLICATION-PRIMITIVE-DATA-TYPE>
```

Listing B.40: Definition of curve data type

As already mentioned, the `ApplicationPrimitiveDataType` of `category` `CURVE` defined in the listing above may be used as the **element data type** (`ApplicationArrayElement.type`) of an `ApplicationArrayDataType`.

The definition of this array data type may look like the sketch contained in Listing B.41.

```
<APPLICATION-ARRAY-DATA-TYPE>
  <SHORT-NAME>MyCurveArrayType</SHORT-NAME>
  <CATEGORY>ARRAY</CATEGORY>
  <ELEMENT>
    <SHORT-NAME>element</SHORT-NAME>
    <CATEGORY>CURVE</CATEGORY>
    <TYPE-TREF DEST="APPLICATION-PRIMITIVE-DATA-TYPE">/ApplicationDataTypes/MyTable</TYPE-TREF
       >
    <ARRAY-SIZE-SEMANTICS>FIXED-SIZE</ARRAY-SIZE-SEMANTICS>
    <MAX-NUMBER-OF-ELEMENTS>3</MAX-NUMBER-OF-ELEMENTS>
  </ELEMENT>
```

```
</APPLICATION-ARRAY-DATA-TYPE>
```

Listing B.41: Definition of array data type

In this example, the intention is to fill the array with “dummy” elements where the axis points (defined by `swAxisCont`) are defined as a sequence from “1” to “10” and the value array (defined by `swValueCont`) is entirely set to “0”, as sketched in Figure B.30.

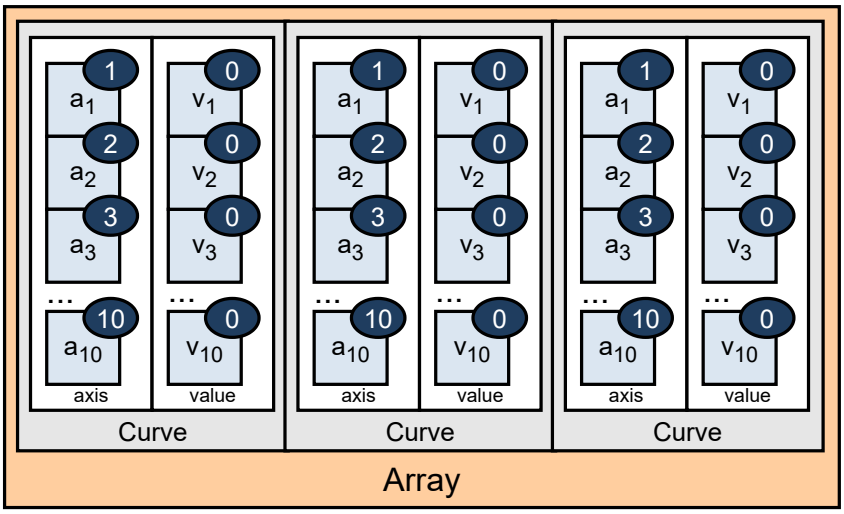

Figure B.30: Example of the initialization of an array of curve

The initialization of a `DataPrototype` typed by such an `ApplicationArrayDataType` is sketched in Listing B.42 below:

```
<CONSTANT-SPECIFICATION>
  <SHORT-NAME>MyConst</SHORT-NAME>
  <VALUE-SPEC>
    <ARRAY-VALUE-SPECIFICATION>
      <ELEMENTS>
        <COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
          <RULE>FILL_UNTIL_END</RULE>
          <COMPOUND-PRIMITIVE-ARGUMENTS>
            <APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
              <SW-AXIS-CONTS>
                <RULE-BASED-AXIS-CONT>
                  <SW-ARRAYSIZE>
                    <V>10</V>
                  </SW-ARRAYSIZE>
                  <SW-AXIS-INDEX>1</SW-AXIS-INDEX>
                  <RULE-BASED-VALUES>
                    <ARGUMENTSS>
                      <RULE-ARGUMENTS>
                        <V>1</V>
                        <V>2</V>
                        <V>3</V>
                        <V>4</V>
                        <V>5</V>
                        <V>6</V>
                        <V>7</V>
                        <V>8</V>
                        <V>9</V>
                        <V>10</V>
                      </RULE-ARGUMENTS>
                    </ARGUMENTSS>
                  </RULE-BASED-VALUES>
                </RULE-BASED-AXIS-CONT>
              </SW-AXIS-CONTS>
```

```
            <SW-VALUE-CONT>
              <SW-ARRAYSIZE>
                <V>10</V>
              </SW-ARRAYSIZE>
              <RULE-BASED-VALUES>
                <RULE>FILL_UNTIL_END</RULE>
                <ARGUMENTSS>
                  <RULE-ARGUMENTS>
                    <V>0</V>
                  </RULE-ARGUMENTS>
                </ARGUMENTSS>
              </RULE-BASED-VALUES>
            </SW-VALUE-CONT>
          </APPLICATION-RULE-BASED-VALUE-SPECIFICATION>
        </COMPOUND-PRIMITIVE-ARGUMENTS>
      </COMPOSITE-RULE-BASED-VALUE-SPECIFICATION>
    </ELEMENTS>
  </ARRAY-VALUE-SPECIFICATION>
 </VALUE-SPEC>
</CONSTANT-SPECIFICATION>
```

Listing B.42: Definition of constant to initialize an array of curve data type

B.4 Examples of Compu Methods

This section presents some selected examples for the definition of `CompuMethod`s. The explanation of the concept of a `CompuMethod` can be found in Chapter 5.5.1.

B.4.1 Compu Method representing an Enumeration

The following example illustrates how an enumeration (see Chapter 5.2.4.1.2) can be specified using the definition of a `CompuMethod`.

```
<COMPU-METHOD>
  <SHORT-NAME>boolean</SHORT-NAME>
  <CATEGORY>TEXTTABLE</CATEGORY>
  <COMPU-INTERNAL-TO-PHYS>
    <COMPU-SCALES>
      <COMPU-SCALE>
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">0</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="CLOSED">0</UPPER-LIMIT>
        <COMPU-CONST>
          <VT>false</VT>
        </COMPU-CONST>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">1</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="CLOSED">1</UPPER-LIMIT>
        <COMPU-CONST>
          <VT>true</VT>
        </COMPU-CONST>
      </COMPU-SCALE>
    </COMPU-SCALES>
  </COMPU-INTERNAL-TO-PHYS>
</COMPU-METHOD>
```

Listing B.43: example for enumeration

B.4.2 Compu Method representing a Linear Conversion

The following examples illustrate how a linear conversion is specified by means of the definition of a CompuMethod.

$$F_{[km/h]} = 30_{[km/h]} + 2_{[km/h]} * x$$

```
<COMPU-METHOD>
  <SHORT-NAME>linear</SHORT-NAME>
  <CATEGORY>LINEAR</CATEGORY>
  <UNIT-REF BASE="default" DEST="UNIT">kmph</UNIT-REF>
  <COMPU-INTERNAL-TO-PHYS>
    <COMPU-SCALES>
      <COMPU-SCALE>
        <COMPU-RATIONAL-COEFFS>
          <COMPU-NUMERATOR>
            <V>30</V>
            <V>2</V>
          </COMPU-NUMERATOR>
          <COMPU-DENOMINATOR>
            <V>1</V>
          </COMPU-DENOMINATOR>
        </COMPU-RATIONAL-COEFFS>
      </COMPU-SCALE>
    </COMPU-SCALES>
  </COMPU-INTERNAL-TO-PHYS>
</COMPU-METHOD>
```

Listing B.44: example for linear CompuMethod

B.4.3 Compu Method representing a Linear Conversion with Text-Table

The following example illustrates how a combination of linear conversion with a text-table is specified by means of the definition of a CompuMethod.

```
<COMPU-METHOD>
  <SHORT-NAME>linearAndTexttable</SHORT-NAME>
  <CATEGORY>SCALE_LINEAR_AND_TEXTTABLE</CATEGORY>
  <UNIT-REF BASE="default" DEST="UNIT">kmph</UNIT-REF>
  <COMPU-INTERNAL-TO-PHYS>
    <COMPU-SCALES>
      <COMPU-SCALE>
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">0</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="CLOSED">300</UPPER-LIMIT>
        <COMPU-RATIONAL-COEFFS>
          <COMPU-NUMERATOR>
            <V>30</V>
            <V>2</V>
          </COMPU-NUMERATOR>
          <COMPU-DENOMINATOR>
            <V>1</V>
          </COMPU-DENOMINATOR>
        </COMPU-RATIONAL-COEFFS>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">350</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="CLOSED">350</UPPER-LIMIT>
        <COMPU-CONST>
          <VT>SensorError</VT>
        </COMPU-CONST>
      </COMPU-SCALE>
      <COMPU-SCALE>
```

```
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">351</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="CLOSED">351</UPPER-LIMIT>
        <COMPU-CONST>
          <VT>SignalNotAvailable</VT>
        </COMPU-CONST>
      </COMPU-SCALE>
    </COMPU-SCALES>
  </COMPU-INTERNAL-TO-PHYS>
</COMPU-METHOD>
```

Listing B.45: example for linear and text-table `CompuMethod`

B.4.4 Conversion specified by a rational function

As indicated by [TPS_SWCT_01283], the semantics of a rational function is described as:

$$Internal = \frac{v_0 * phys^0 + v_1 * phys^1 + v_2 * phys^2 + ...}{v_0 * phys^0 + v_1^* phys^1 + v_2 * phys^2 + ...}$$

The following example illustrates the concrete reciprocal conversion rendered below:

$$I = \frac{1000}{60 + 2_{[K^{-1}]} * P_{[K]}}$$

```
<COMPU-METHOD>
  <SHORT-NAME>rational</SHORT-NAME>
  <CATEGORY>RAT_FUNC</CATEGORY>
  <UNIT-REF BASE="default" DEST="UNIT">Kelvin</UNIT-REF>
  <COMPU-PHYS-TO-INTERNAL>
    <COMPU-SCALES>
      <COMPU-SCALE>
        <LOWER-LIMIT INTERVAL-TYPE="CLOSED">-29</LOWER-LIMIT>
        <UPPER-LIMIT INTERVAL-TYPE="OPEN">INF</UPPER-LIMIT>
        <COMPU-RATIONAL-COEFFS>
          <COMPU-NUMERATOR>
            <V>1000</V>
          </COMPU-NUMERATOR>
          <COMPU-DENOMINATOR>
            <V>60</V>
            <V>2</V>
          </COMPU-DENOMINATOR>
        </COMPU-RATIONAL-COEFFS>
      </COMPU-SCALE>
    </COMPU-SCALES>
  </COMPU-PHYS-TO-INTERNAL>
</COMPU-METHOD>
```

Listing B.46: example for rational `CompuMethod`

B.4.5 Compu Method representing a BITFIELD_TEXTTABLE

The following scenario exemplifies the definition of a `CompuMethod` where attribute `category` is set to `BITFIELD_TEXTTABLE`. The example demonstrates how it is possible to encode independent, yet semantically related information into the individual bits of an AutosarDataType where attribute `category` is set to VALUE.

The encoding and semantics of information in parts of available bit range are summarized in Table B.2.

Bit	Semantics	Values	ShortLabel	Mask
Bit 0	front left	0(0) = no 1(1) = yes	frontLeft	0b00000001
Bit 1	front right	0(0) = no 1(2) = yes	frontRight	0b00000010
Bit 2	rear left	0(0) = no 1(4) = yes	rearLeft	0b00000100
Bit 3	rear right	0(0) = no 1(8) = yes	rearRight	0b00001000
Bit 4-5	problem	00(00) = flat tire 01(16) = low pressure 10(32) = unbalanced 11(48) = unknown	problem	0b00110000
Bit 6	validity	0(0)=valid 1(64)=invalid	validity	0b01000000

Table B.2: Example Bitfield

The layout of information is therefore defined as depicted in Figure B.31:

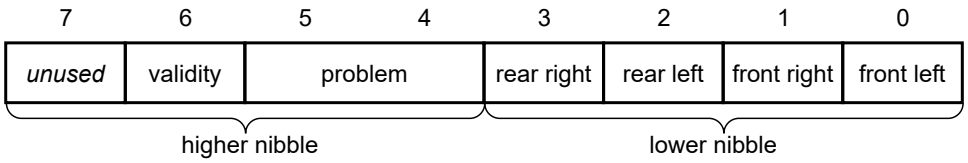

Figure B.31: Visualization of the layout of the example bitfield

As exemplified by the bit layout documentation, it is not required that all available bits are used.

This means that in one object the information about the tire selection, problem, and validity is independently encoded and therefore has to be retrieved independently.

```
1     if (validity_valid == (tire_status & validity_BflMask)) && (
          problem_flat_tire == (tire_status & problem_BflMask)) && (
          rearRight_yes == (tire_status & rearRight_BflMask)) {
2             /* handle the situation that the rear right tire is flat */
3          }
```

Listing B.47: Access to element of a bitfield

The model of this `CompuMethod` is sketched in Listing B.48. Although technically speaking (see [TPS_SWCT_01431]), only one of

- `symbol`

- vt
- shortLabel

is required to derive the C symbol of a CompuScale, the example defines both symbol and shortLabel because the provision of these model elements facilitates (see [SWS_Rte_07410], [SWS_Rte_07411], [SWS_Rte_07412]) the generation of macros for accessing the information.

Since the example CompuMethod defines continuous and non-overlapping bit masks, it is perfectly possible to convert this CompuMethod to A2L.

```
<COMPU-METHOD>
  <SHORT-NAME>Texttable</SHORT-NAME>
  <CATEGORY>BITFIELD_TEXTTABLE</CATEGORY>
  <COMPU-INTERNAL-TO-PHYS>
    <COMPU-SCALES>
      <!-- FRONT LEFT -->
      <COMPU-SCALE>
        <SHORT-LABEL>frontLeft</SHORT-LABEL>
        <SYMBOL>frontLeft_no</SYMBOL>
        <MASK>0b00000001</MASK>
        <LOWER-LIMIT>0b00000000</LOWER-LIMIT>
        <UPPER-LIMIT>0b00000000</UPPER-LIMIT>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <SHORT-LABEL>frontLeft</SHORT-LABEL>
        <SYMBOL>frontLeft_yes</SYMBOL>
        <MASK>0b00000001</MASK>
        <LOWER-LIMIT>0b00000001</LOWER-LIMIT>
        <UPPER-LIMIT>0b00000001</UPPER-LIMIT>
      </COMPU-SCALE>
      <!-- FRONT RIGHT -->
      <COMPU-SCALE>
        <SHORT-LABEL>frontRight</SHORT-LABEL>
        <SYMBOL>frontRight_no</SYMBOL>
        <MASK>0b00000010</MASK>
        <LOWER-LIMIT>0b00000000</LOWER-LIMIT>
        <UPPER-LIMIT>0b00000000</UPPER-LIMIT>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <SHORT-LABEL>frontRight</SHORT-LABEL>
        <SYMBOL>frontRight_yes</SYMBOL>
        <MASK>0b00000010</MASK>
        <LOWER-LIMIT>0b00000010</LOWER-LIMIT>
        <UPPER-LIMIT>0b00000010</UPPER-LIMIT>
      </COMPU-SCALE>
      <!-- REAR LEFT -->
      <COMPU-SCALE>
        <SHORT-LABEL>rearLeft</SHORT-LABEL>
        <SYMBOL>rearLeft_no</SYMBOL>
        <MASK>0b00000100</MASK>
        <LOWER-LIMIT>0b00000000</LOWER-LIMIT>
        <UPPER-LIMIT>0b00000000</UPPER-LIMIT>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <SHORT-LABEL>rearLeft</SHORT-LABEL>
        <SYMBOL>rearLeft_yes</SYMBOL>
        <MASK>0b00000100</MASK>
        <LOWER-LIMIT>0b00000100</LOWER-LIMIT>
        <UPPER-LIMIT>0b00000100</UPPER-LIMIT>
      </COMPU-SCALE>
      <!-- REAR RIGHT -->
      <COMPU-SCALE>
        <SHORT-LABEL>rearRight</SHORT-LABEL>
        <SYMBOL>rearRight_no</SYMBOL>
        <MASK>0b00001000</MASK>
        <LOWER-LIMIT>0b00000000</LOWER-LIMIT>
```

```
        <UPPER-LIMIT>0b00000000</UPPER-LIMIT>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <SHORT-LABEL>rearRight</SHORT-LABEL>
        <SYMBOL>rearRight_yes</SYMBOL>
        <MASK>0b0001000</MASK>
        <LOWER-LIMIT>0b00001000</LOWER-LIMIT>
        <UPPER-LIMIT>0b00001000</UPPER-LIMIT>
      </COMPU-SCALE>
      <!-- PROBLEM -->
      <COMPU-SCALE>
        <SHORT-LABEL>problem</SHORT-LABEL>
        <SYMBOL>problem_flat_tire</SYMBOL>
        <MASK>0b00110000</MASK>
        <LOWER-LIMIT>0b00000000</LOWER-LIMIT>
        <UPPER-LIMIT>0b00000000</UPPER-LIMIT>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <SHORT-LABEL>problem</SHORT-LABEL>
        <SYMBOL>problem_low_pressure</SYMBOL>
        <MASK>0b00110000</MASK>
        <LOWER-LIMIT>0b00010000</LOWER-LIMIT>
        <UPPER-LIMIT>0b00010000</UPPER-LIMIT>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <SHORT-LABEL>problem</SHORT-LABEL>
        <SYMBOL>problem_unbalanced</SYMBOL>
        <MASK>0b00110000</MASK>
        <LOWER-LIMIT>0b00100000</LOWER-LIMIT>
        <UPPER-LIMIT>0b00100000</UPPER-LIMIT>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <SHORT-LABEL>problem</SHORT-LABEL>
        <SYMBOL>problem_unknown</SYMBOL>
        <MASK>0b00110000</MASK>
        <LOWER-LIMIT>0b00110000</LOWER-LIMIT>
        <UPPER-LIMIT>0b00110000</UPPER-LIMIT>
      </COMPU-SCALE>
      <!-- VALIDITY -->
      <COMPU-SCALE>
        <SHORT-LABEL>validity</SHORT-LABEL>
        <SYMBOL>validity_valid</SYMBOL>
        <MASK>0b01000000</MASK>
        <LOWER-LIMIT>0b00000000</LOWER-LIMIT>
        <UPPER-LIMIT>0b00000000</UPPER-LIMIT>
      </COMPU-SCALE>
      <COMPU-SCALE>
        <SHORT-LABEL>validity</SHORT-LABEL>
        <SYMBOL>validity_invalid</SYMBOL>
        <MASK>0b01000000</MASK>
        <LOWER-LIMIT>0b01000000</LOWER-LIMIT>
        <UPPER-LIMIT>0b01000000</UPPER-LIMIT>
      </COMPU-SCALE>
    </COMPU-SCALES>
  </COMPU-INTERNAL-TO-PHYS>
</COMPU-METHOD>
```

Listing B.48: Example of a `CompuMethod` of `category` `BITFIELD_TEXTTABLE`

B.5 Compatibility Examples

This section provides some examples that may explain the compatibility of `Port-Prototype`s, as defined in Chapter 6.

B.5.1 Compatibility on Assembly Level

The rules for compatibility with respect to the connection of dataElements by means of AssemblySwConnectors are perhaps easier to digest than the delegation case but nonetheless, it seems appropriate to provide a set of examples that illustrate the compatibility issue.

B.5.1.1 Valid Use

One of the less trivial examples of this kind is the case of sender/receiver n:1 communication. Figure B.32 sketches a case where both sender software-components provide the full set of dataElements that are required by the RPortPrototype of the receiving software-component.

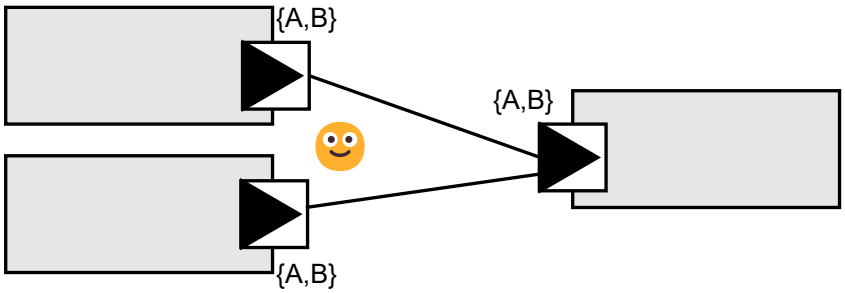

Figure B.32: Valid n:1 communication

The next case (exemplified by Figure B.33) implements a situation where one sender provides two dataElements {A, B} while the other sender provides only a subset of these, i.e. {B}.

As the RPortPrototype of the receiving software-component requires only the dataElement {B}, compatibility issues will not occur because for every required dataElement a compatible dataElement is provided.

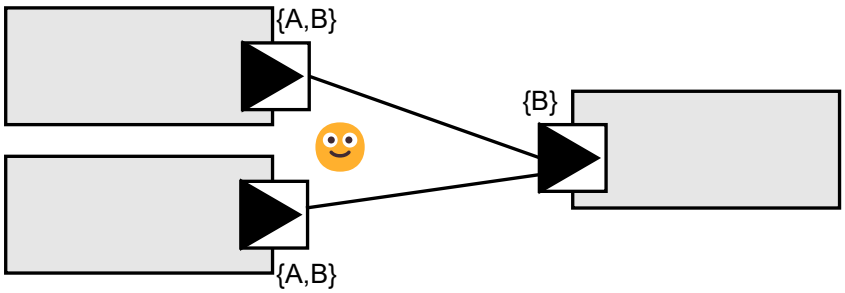

Figure B.33: Valid n:1 communication

B.5.1.2 Invalid Use

One possible example for an invalid configuration of a sender/receiver communication is the scenario sketched in Figure B.34. Although the sender software-components in total provide the set of required dataElements, the *individual* AssemblySwConnectors create incompatible connections between sender and receiver.

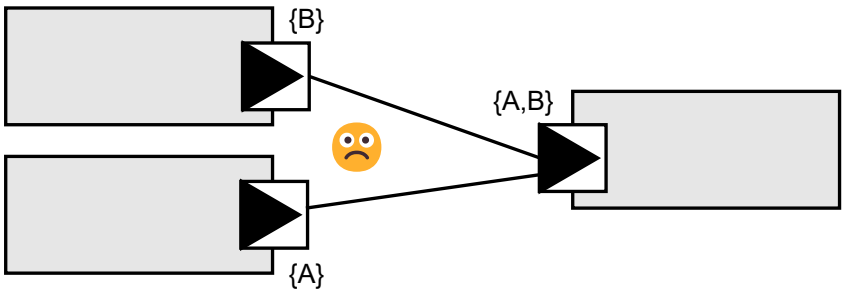

Figure B.34: Invalid n:1 communication

B.5.2 Compatibility on Delegation Level

The rules for compatibility with respect to the delegation of dataElements perhaps require some explanation in terms of examples. The first example in Figure B.35 describes a valid situation where two DelegationSwConnectors split the dataElements contained in the RPortPrototype owned by a CompositionSwComponentType.

B.5.2.1 Valid Use

The examples explain the usage of DelegationSwConnectors in different configurations and different values of DelegatedPortAnnotation. The DelegatedPortAnnotation is usually defined before the internal structure of a CompositionSwComponentType is fully clarified.

At a later point in time it has to be consistent or can be removed. Decorating the example with applicable values of DelegatedPortAnnotation should facilitate the understanding of the meaning of the DelegatedPortAnnotation.

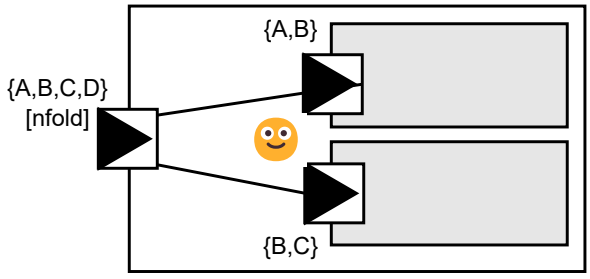

Figure B.35: Valid split of delegation connector

All required dataElements are provided by the DelegationSwConnectors attached to the delegation RPortPrototype. The fact that dataElement D is not conveyed to any of the RPortPrototypes owned by the SwComponentPrototypes does not have any impact on the compatibility.

In other words: the RPortPrototype at the CompositionSwComponentType actually contains the superset of dataElements {A, B, C, D}. The two required inner PortPrototypes of the SwComponentPrototypes contain the subsets of VariableDataPrototypes {A, B} and {B, C}. In this case the resulting communication pattern on the VFB for B would be 1:n.

This requires the value of the attribute signalFan of DelegatedPortAnnotation to be set to the value nfold.

In the next example, the RPortPrototype of the CompositionSwComponentType contains the superset of dataElements {A, B}. The two RPortPrototypes of the SwComponentPrototypes contain *different* subsets, i.e. {A} and {B}.

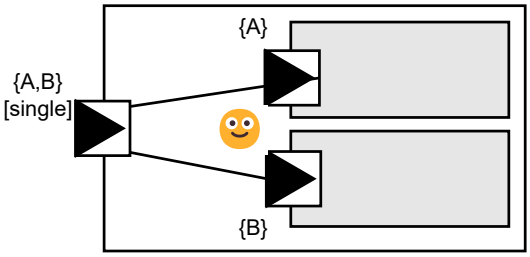

Figure B.36: Valid split of delegation connector

In this case, the resulting communication pattern on the VFB would be n:1. In this case the value of the attribute signalFan of DelegatedPortAnnotation should be set to single.

The next example is about the merge of DelegationSwConnectors. The PPortPrototype owned by the CompositionSwComponentType contains a superset of dataElements {A, B}. The two PPortPrototypes of the SwComponentPrototypes contain a *disjoint* subset each, i.e. {A} and {B}.

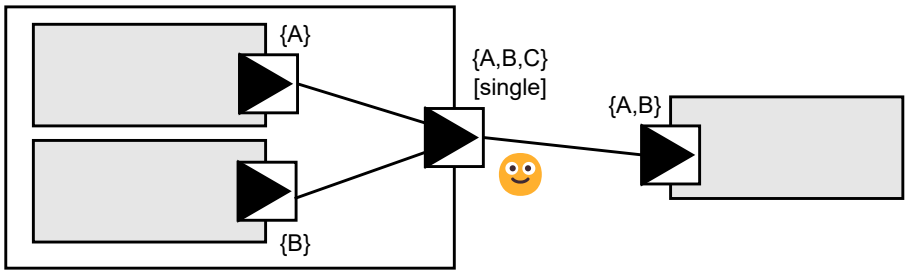

Figure B.37: Valid merge of delegation connector

In this case, the resulting communication pattern on the VFB would be 1:x, with x taking values between 0 and n. In this case the value of the attribute signalFan

of DelegatedPortAnnotation should be set to single. All VariableDataPrototypes of the provided outer PortPrototypes are provided by exactly one provided inner PortPrototype.

As a variation of this theme, the next example features a PPortPrototype owned by a CompositionSwComponentType that contains the superset of dataElements {A, B, C}.

The PPortPrototypes of the SwComponentPrototypes in turn contain subsets of dataElements, i.e. {A, B} and {B, C}. In this case the resulting communication pattern on the VFB for {B} would be n:1.

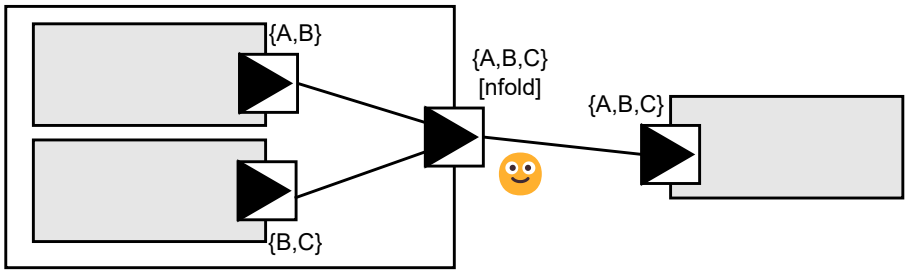

Figure B.38: Valid merge of delegation connector

This would require the value of the attribute signalFan of DelegatedPortAnnotation to be set to nfold.

All dataElements of the delegation PPortPrototype are provided by at least one PPortPrototype of the SwComponentPrototypes. Therefore, the criteria of entire delegation defined in Chapter 6.14 are fulfilled.

The next example looks very similar. However, the subtle difference is that the second SwComponentPrototype provides dataElements {C, D} rather than {B, C}.

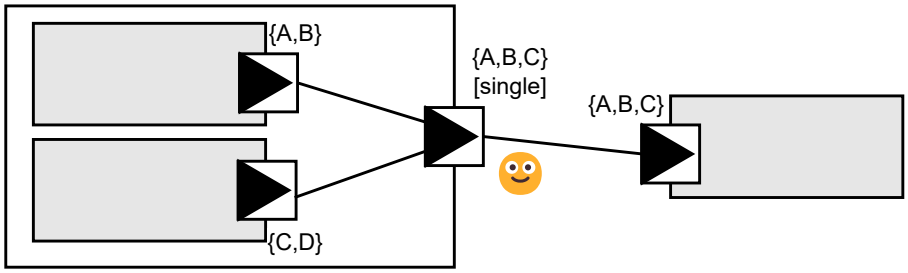

Figure B.39: Valid merge of delegation connector

Although dataElement {D} does not appear in the delegation PPortPrototype, the compatibility rules are fully satisfied with this scenario.

The next example shows a valid delegation of SwConnectors that goes end-to-end via CompositionSwComponentTypes to included SwComponentPrototypes.

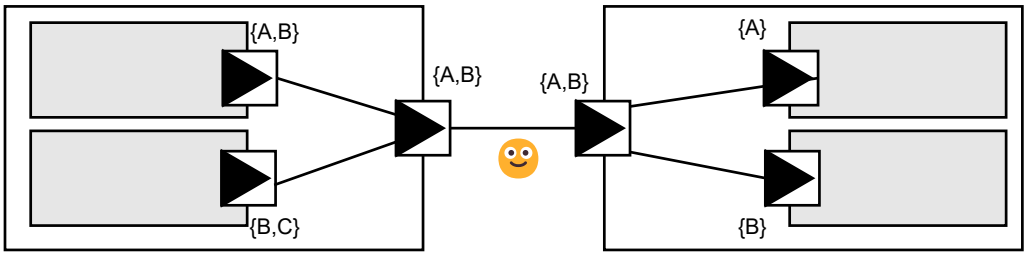

Figure B.40: Valid delegation of SwConnectors that goes end-to-end

B.5.2.2 Invalid Use

The first example for an invalid use of splitting of dataElements suffers from the fact that not all dataElements owned by the RPortPrototypes of the SwComponentPrototypes are available from the connected RPortPrototypes owned by the CompositionSwComponentType.

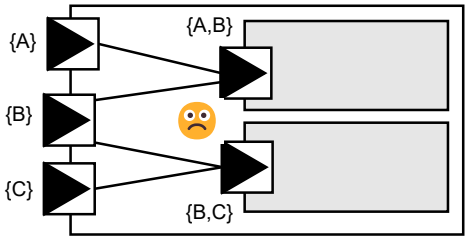

Figure B.41: Invalid split of delegation connector

Although dataElements, the connections in total match ({A} and {B} are connected to a PortPrototype requiring {A, B}) the compatibility rules are not fulfilled because they apply separately for *each* SwConnector.

In the next example compatibility is also not fulfilled because the required dataElement {E} is not provided by the delegation RPortPrototype.

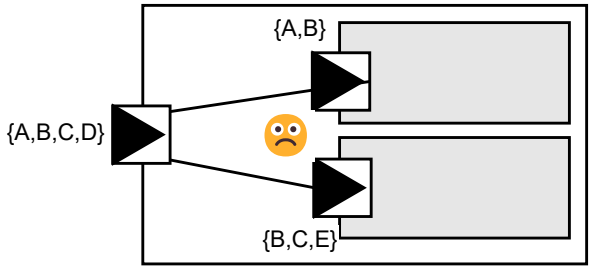

Figure B.42: Invalid split of delegation connector

An incompatible merge of DelegationSwConnectors is sketched in Figure B.43. In this case the dataElement {E} is *not* provided by one of the PPortPrototypes owned by the SwComponentPrototypes inside the CompositionSwComponentType.

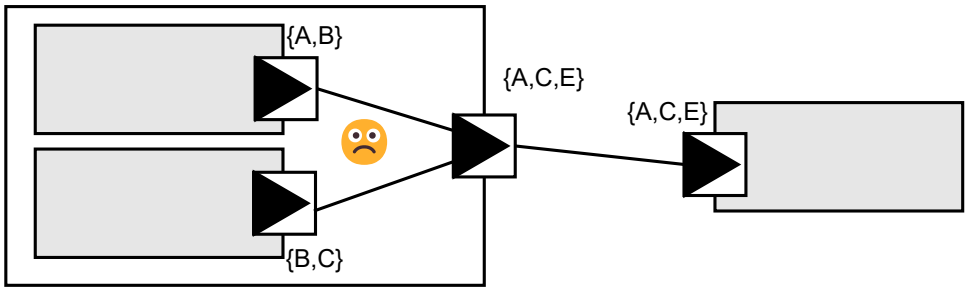

Figure B.43: Invalid merge of delegation connector

The next example shows an invalid delegation of `SwConnector`s that goes end-to-end via `CompositionSwComponentType`s to included `SwComponentPrototype`s.

Similar to the example sketched in Figure B.43, the `dataElement` {E} is *not* provided by one of the `PPortPrototype`s owned by the `SwComponentPrototype`s inside the `CompositionSwComponentType`.

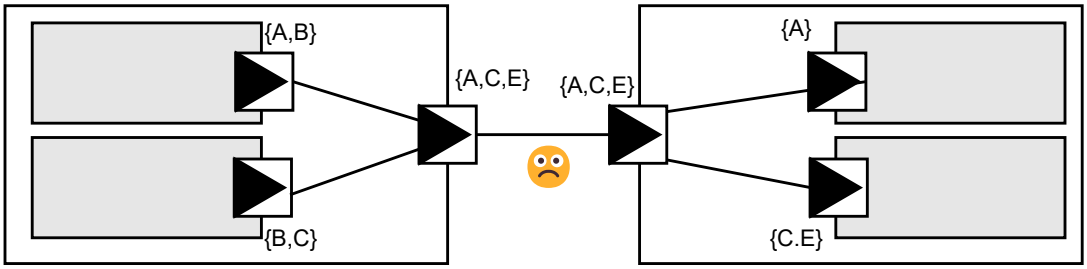

Figure B.44: Invalid delegation of `SwConnector`s that goes end-to-end

B.5.3 Software-Components connected to NvBlockComponents

B.5.3.1 Invalid Connection according to constr_1417

The following examples depict scenarios that are considered invalid according to [constr_1417].

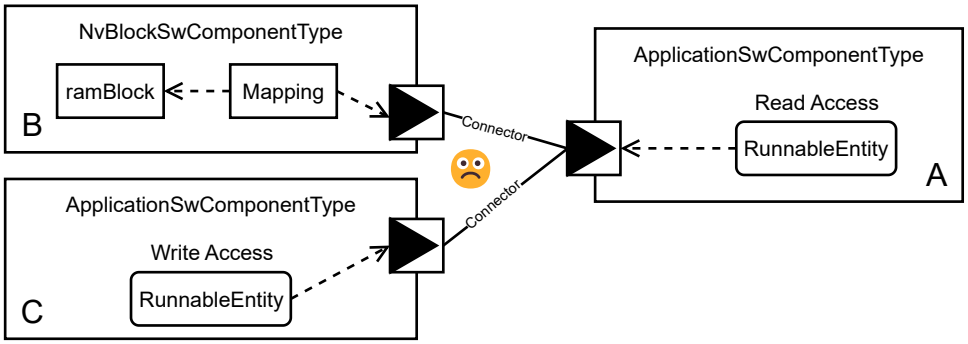

Figure B.45: Example of invalid connection between software-components (a)

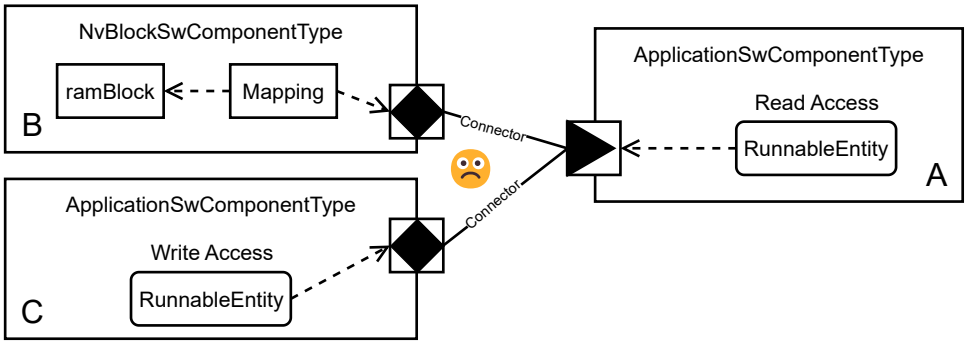

Figure B.46: Example of invalid connection between software-components (b)

B.5.3.2 Invalid Connection according to constr_1418

The following example depicts a scenario that is considered invalid according to [constr_1418].

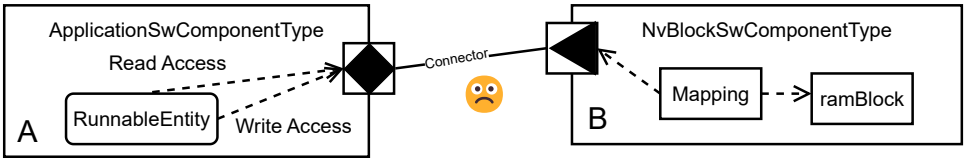

Figure B.47: Example of invalid connection between software-components (c)

B.6 Rapid Prototyping Examples

B.6.1 Definition of Rapid Prototyping Scenario

This section contains an example for the modeling of rapid prototyping scenarios, as documented in Chapter 14.

The following (simplified) Listing B.49 sketches the usage of the meta-class `IdentCaption` for the purpose of effectively allowing references to a `ModeAccessPoint`.

```
<AR-PACKAGE>
  <SHORT-NAME>IC_Example</SHORT-NAME>
  <ELEMENTS>
    <APPLICATION-SW-COMPONENT-TYPE>
      <SHORT-NAME>ASCT</SHORT-NAME>
      <INTERNAL-BEHAVIORS>
        <SWC-INTERNAL-BEHAVIOR>
          <SHORT-NAME>IB</SHORT-NAME>
          <RUNNABLES>
            <RUNNABLE-ENTITY>
              <SHORT-NAME>RE</SHORT-NAME>
              <MODE-ACCESS-POINTS>
                <MODE-ACCESS-POINT>
                  <IDENT>
                    <SHORT-NAME>ident</SHORT-NAME>
                  </IDENT>
                </MODE-ACCESS-POINT>
              </MODE-ACCESS-POINTS>
```

```
            </RUNNABLE-ENTITY>
          </RUNNABLES>
        </SWC-INTERNAL-BEHAVIOR>
      </INTERNAL-BEHAVIORS>
    </APPLICATION-SW-COMPONENT-TYPE>
    <COMPOSITION-SW-COMPONENT-TYPE>
      <SHORT-NAME>CSCT</SHORT-NAME>
      <COMPONENTS>
          <SW-COMPONENT-PROTOTYPE>
            <SHORT-NAME>SCP</SHORT-NAME>
            <TYPE-TREF DEST="APPLICATION-SW-COMPONENT-TYPE">/IC_Example/ASCT</TYPE-TREF>
          </SW-COMPONENT-PROTOTYPE>
      </COMPONENTS>
    </COMPOSITION-SW-COMPONENT-TYPE>
    <RAPID-PROTOTYPING-SCENARIO>
      <SHORT-NAME>rptScenario</SHORT-NAME>
      <RPT-CONTAINERS>
        <RPT-CONTAINER>
          <SHORT-NAME>rptContainer</SHORT-NAME>
            <BY-PASS-POINT-IREFS>
              <BY-PASS-POINT-IREF>
                <CONTEXT-ELEMENT-REF DEST="SW-COMPONENT-PROTOTYPE">/IC_Example/CSCT/SCP</
                    CONTEXT-ELEMENT-REF>
                <TARGET-REF DEST="MODE-ACCESS-POINT-IDENT">/IC_Example/ASCT/IB/RE/ident</
                    TARGET-REF>
              </BY-PASS-POINT-IREF>
            </BY-PASS-POINT-IREFS>
        </RPT-CONTAINER>
      </RPT-CONTAINERS>
    </RAPID-PROTOTYPING-SCENARIO>
  </ELEMENTS>
</AR-PACKAGE>
```

Listing B.49: Example for the definition of an RPT scenario

C Supported Special Use Cases

The content of this appendix chapter is *informative* in nature and shall **not** be considered as *normative* content.

C.1 Asymmetric Data Transformation between a Software-Component and a Complex Driver

C.1.1 Overview

In this scenario, a SwComponentPrototype typed by an ApplicationSwComponentType needs to communicate with a SwComponentPrototype typed by a ComplexDeviceDriverSwComponentType.

The communication itself is special insofar as it ends in an arbitrary structured data type on the side of the ApplicationSwComponentType and in a flat byte array on the side of the ComplexDeviceDriverSwComponentType.

The communication itself has a client-server nature, where the ApplicationSwComponentType mostly acts as the client and the ComplexDeviceDriverSwComponentType acts as the server.

As a consequence of this setup, the structured data type somehow has to be serialized into a flat byte array for the call and from a flat byte array to a structured data type for the return of the *out* and *inout* arguments as well as the return value.

For a justification of the use case, assume that the ComplexDeviceDriverSwComponentType implements an endpoint of a custom communication protocol that needs to interact with the “AUTOSAR world”.

This is also the reason why the server implements ClientServerOperations with a flat byte array as the argument. The server (in this case, the ComplexDeviceDriverSwComponentType) itself is completely agnostic of the data, it just represents the endpoint that has to be able to deal with any given data structure.

This means that the ComplexDeviceDriverSwComponentType does not have to be updated and redeployed if the data structures on the side of the ApplicationSwComponentType undergo any changes.

For the ApplicationSwComponentType, on the other hand, there is little motivation to also model the respective data structures as a flat byte array. Usually, the respective data comes from a mixture of internal processing and communication with other software-components.

In other words, using a flat byte array on the side of the ApplicationSwComponentType would mean that the serialization has to be done anyway, potentially inside the implementation of the ApplicationSwComponentType itself.

Specifically, the conversion from the (structured) data type to a flat byte array and back needs to be implemented by a piece of software that is typically generated according to the structure of the data type. This software, however, is **very specific** and only fits the corresponding data types.

One approach for data serialization in AUTOSAR is the generic concept of data transformation, in the specific case of this scenario a data transformer is needed that does a depth-first serialization over a complex data structure.

This approach is already supported in AUTOSAR by means of the [50, SWS SOMEIP Transformer].

This existing concept can be taken over for the implementation of the scenario described in this chapter, albeit with some customizations. For example, the SOME/IP-specific protocol header generated by the SOME/IP Transformer is obviously not relevant for the scenario.

C.1.2 Modeling Aspects

The modeling of this use case shall be explained along a simple example sketched in Figure C.1:

- It is necessary to define two individual `ClientServerOperationMapping`s.
  - One of these (in this example: `CSOM1`) shall reference a `DataTransformation` where attribute `dataTransformationKind` is set to the value `DataTransformationKindEnum.asymmetricToByteArray`.
  - The other (in this example: `CSOM2`) shall reference a `DataTransformation` where attribute `dataTransformationKind` is set to the value `DataTransformationKindEnum.asymmetricFromByteArray`.
- `CSOM1` shall reference the `ClientServerOperation` `Op1` (on the end of the `ApplicationSwComponentType`) in the role `firstOperation`.
- `CSOM1` shall reference the `ClientServerOperation` `Op2` (on the end of the `ComplexDeviceDriverSwComponentType`) in the role `secondOperation`.
- `CSOM2` shall reference the `ClientServerOperation` `Op1` (on the end of the `ApplicationSwComponentType`) in the role `secondOperation`.
- `CSOM2` shall reference the `ClientServerOperation` `Op2` (on the end of the `ComplexDeviceDriverSwComponentType`) in the role `firstOperation`.
- `CSOM1` shall aggregate two `DataPrototypeMapping`s in the role `argumentMapping`
  - The first `DataPrototypeMapping` shall reference (in the role `firstDataPrototype`) the `ArgumentDataPrototype` named `In1` of `ClientServerOperation` `OP1` and (in the role `secondDataPrototype`) the

ArgumentDataPrototype named In of ClientServerOperation OP2.

  - The second DataPrototypeMapping shall reference (in the role firstDataPrototype) the ArgumentDataPrototype named In2 of ClientServerOperation OP1 and (in the role secondDataPrototype) the ArgumentDataPrototype named In of ClientServerOperation OP2.

- CSOM2 shall aggregate two DataPrototypeMappings in the role argumentMapping
  - The first DataPrototypeMapping shall reference (in the role firstDataPrototype) the ArgumentDataPrototype named Out1 of ClientServerOperation OP1 and (in the role secondDataPrototype) the ArgumentDataPrototype named Out of ClientServerOperation OP2.
  - The second DataPrototypeMapping shall reference (in the role firstDataPrototype) the ArgumentDataPrototype named Out2 of ClientServerOperation OP1 and (in the role secondDataPrototype) the ArgumentDataPrototype named Out of ClientServerOperation OP2.

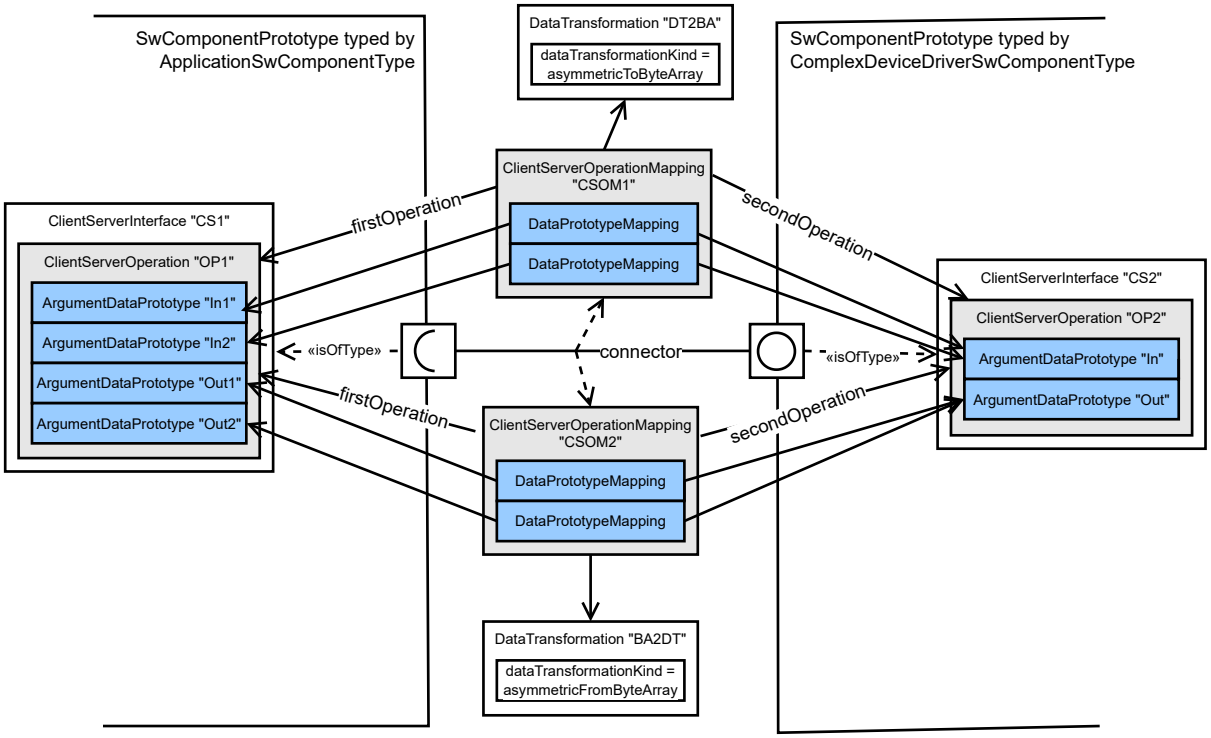

Figure C.1: Modeling of the data transformation use case

In Figure C.1, the role names of references from DataPrototypeMapping have been left out of the picture for the sake of simplicity.

D Modeling of InstanceRef

D.1 Introduction

The existence of so-called InstanceRefs is a direct consequence of the usage of the type-prototype pattern for modeling within AUTOSAR. When referencing a prototype, it is also necessary to include a reference to the prototypes typed by their corresponding types that in turn aggregate further prototypes to set up the context.

In other words, InstanceRefs are representing **structured references** that, on the one hand, consist of references to context prototypes (indicated by a subsetting or redefinition of atpContextElement) and finally a reference to the applicable target prototype (indicated by a redefinition of atpTarget).

Note that it is not uncommon to have more than one context in the modeling of particular InstanceRefs.

For the reader of specifications, the modeling of InstanceRefs manifests as a UML dependency stereotyped ≪instanceRef≫ drawn from one meta-class to another. This is a simplified indication that the source of the dependency implements an InstanceRef to the meta-class at the target of the dependency.

Again, in most cases this is everything a reader needs to understand in order to figure out the modeling. The formal modeling of InstanceRefs is done by creating subclasses of the abstract meta-class AtpInstanceRef.

Wherever a more detailed understanding of the modeling is advised in the context of the specific chapter of this document, the modeling of a specific subclass of AtpInstanceRef is explained directly in the context of the corresponding chapter.

In all other cases, a deeper understanding of the modeling of particular subclasses of AtpInstanceRefs can be obtained from reading this chapter.

Class tables included in this chapter are not fully filled out in the sense that most of the notes inside the class tables are missing. The **primary** purpose of these class tables is to **provide information about the intended order in which InstanceRefs are serialized in M1 AUTOSAR models**.

In particular, the serialization order in M1 models can be obtained from the value of the tag xml.sequenceOffset of each attribute of an InstanceRef meta-class.

For more information about the general concept of modeling AtpInstanceRef (e.g. the conceptual background of redefining or subsetting an association from a subclass of AtpInstanceRef to other meta-classes), refer to the [10, TPS Generic Structure Template].

D.2 Modeling

D.2.1 Components and Compositions

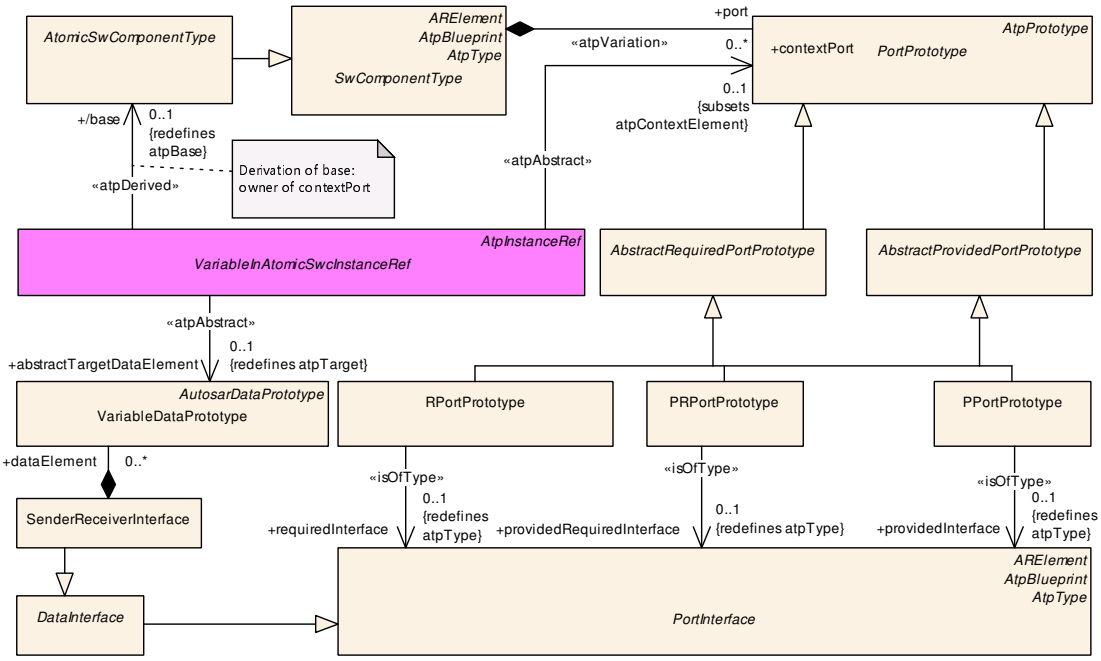

Figure D.1: Abstract modeling of references to `VariableDataPrototype` in the context of a `AtomicSwComponentType`

Class	***VariableInAtomicSwcInstanceRef*** (abstract)			
Note				
Base	*ARObject*, *AtpInstanceRef*			
Subclasses	RVariableInAtomicSwcInstanceRef			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
abstractTarget DataElement	VariableDataPrototype	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=30
base	AtomicSwComponent Type	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextPort	PortPrototype	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=20

Table D.1: VariableInAtomicSwcInstanceRef

The example below shows how the redefinition of the context association works, i.e. the association from `VariableInAtomicSwcInstanceRef` to `PortPrototype` in the role `contextPort` is **redefined** by the subclass `RVariableInAtomicSwc-InstanceRef` by means of an association to `RPortPrototype` in the role `context-RPort`.

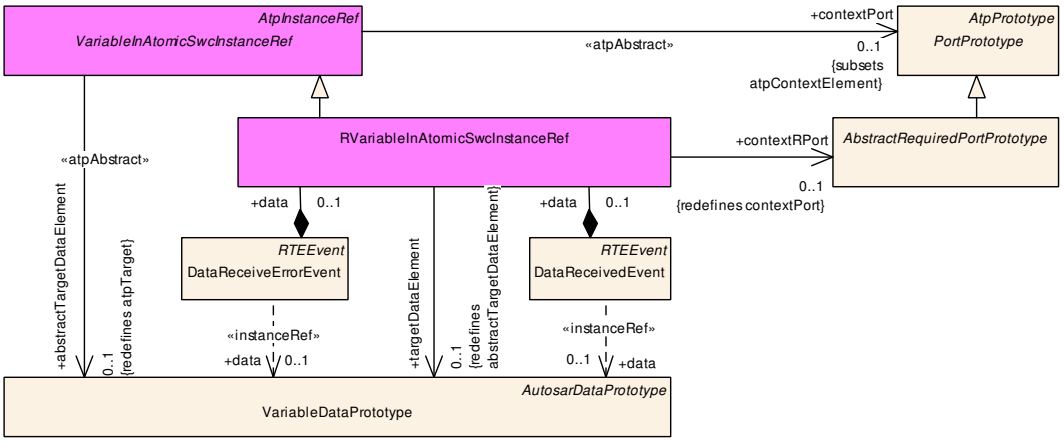

Figure D.2: Concrete modeling of references to `VariableDataPrototype` in the context of an `RPortPrototype`

The effect of this modeling is that the general relationship to `PortPrototype` is already established by `VariableInAtomicSwcInstanceRef` on an abstract level, but it never makes it into the generated XML Schema because it is **redefined** by a subclass. In other words, the redefinition replaces the original association as far as the generation algorithm for the XML Schema is concerned.

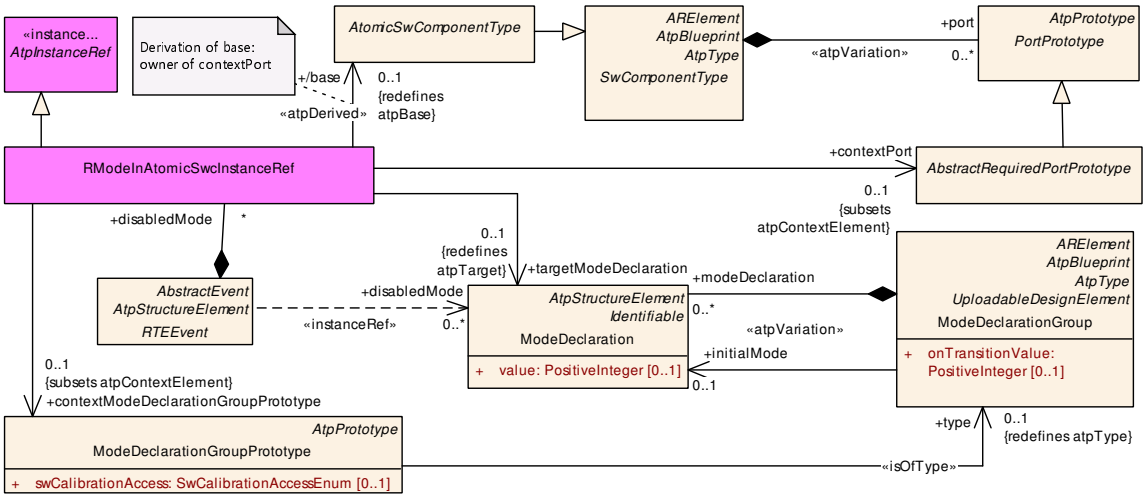

Figure D.3: Modeling of references to `ModeDeclarationGroupPrototype` in the context of an `RPortPrototype`

For clarification, the interpretation of the values of `xml.sequenceOffset` in this particular case is that in the generated XML Schema the `contextRPort` comes first, followed by `targetDataElement` which concludes the definition of the `InstanceRef` in the XML Schema.

Class	**RVariableInAtomicSwcInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*, *VariableInAtomicSwcInstanceRef*			
Aggregated by	DataReceivedEvent.data, DataReceiveErrorEvent.data			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
contextRPort	AbstractRequiredPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetData Element	VariableDataPrototype	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.2: RVariableInAtomicSwcInstanceRef

Class	**RModeInAtomicSwcInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*			
Aggregated by	*RTEEvent*.disabledMode, SwcModeSwitchEvent.mode			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
base	AtomicSwComponent Type	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextMode Declaration GroupPrototype	ModeDeclarationGroup Prototype	0..1	ref	**Tags:** xml.sequenceOffset=30
contextPort	AbstractRequiredPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetMode Declaration	ModeDeclaration	0..1	ref	**Tags:** xml.sequenceOffset=40

Table D.3: RModeInAtomicSwcInstanceRef

Class	**InnerPortGroupInCompositionInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*			
Aggregated by	PortGroup.innerGroup			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
base	CompositionSw ComponentType	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
context (ordered)	SwComponent Prototype	*	ref	**Tags:** xml.sequenceOffset=20
target	PortGroup	0..1	ref	Links a PortGroup in a composition to another PortGroup, that is defined in a component which is part of this CompositionSwComponentType. There shall be at most one innerGroup per contained SwComponentPrototype. **Tags:** xml.sequenceOffset=30

Table D.4: InnerPortGroupInCompositionInstanceRef

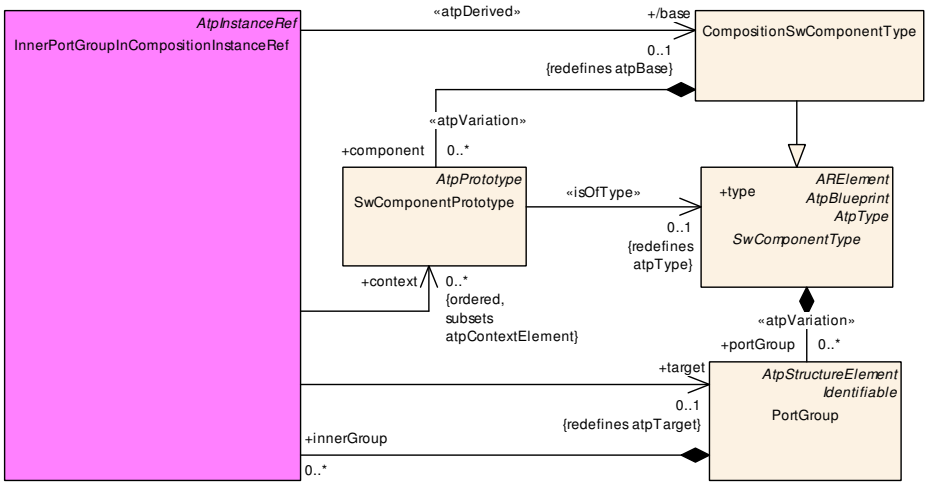

Figure D.4: Modeling of references to `PortGroup` in the context of a `CompositionSwComponentType`

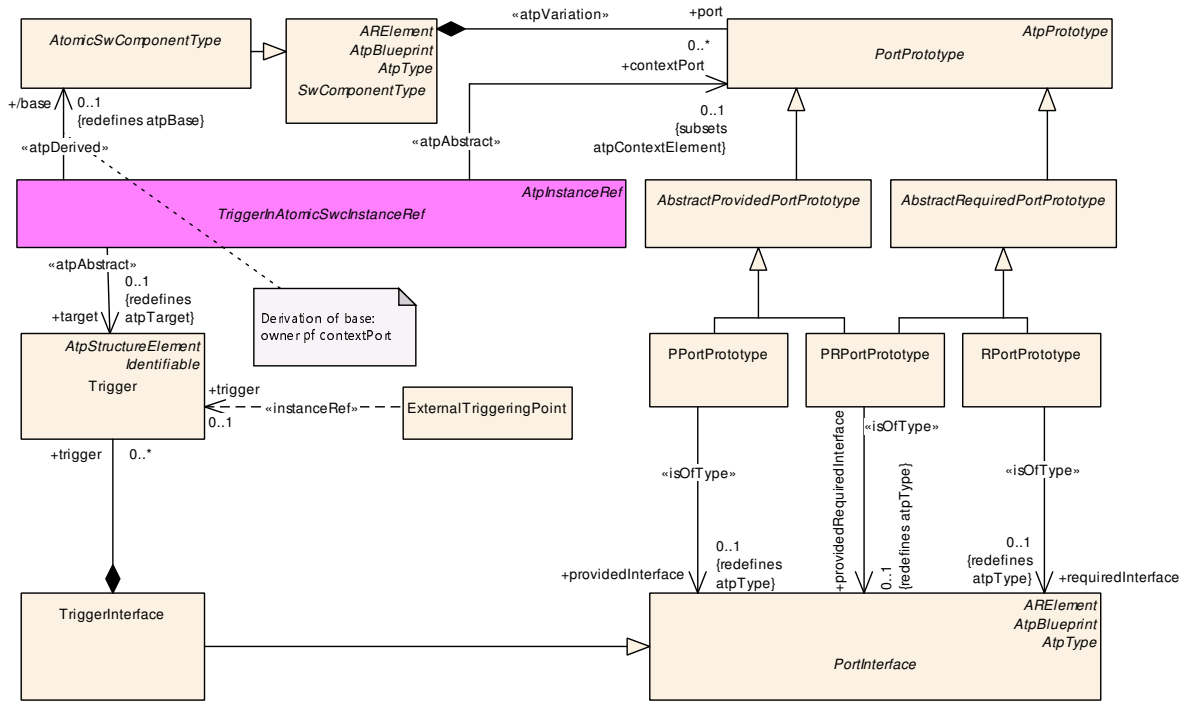

Figure D.5: Abstract modeling of references to `Trigger` in the context of a `AtomicSwComponentType`

Class	***TriggerInAtomicSwcInstanceRef*** (abstract)			
Note				
Base	*ARObject*, *AtpInstanceRef*			
Subclasses	PTriggerInAtomicSwcTypeInstanceRef, RTriggerInAtomicSwcInstanceRef			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

△

Class	***TriggerInAtomicSwcInstanceRef*** (abstract)			
base	AtomicSwComponent Type	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextPort	PortPrototype	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=20
target	Trigger	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=30

Table D.5: TriggerInAtomicSwcInstanceRef

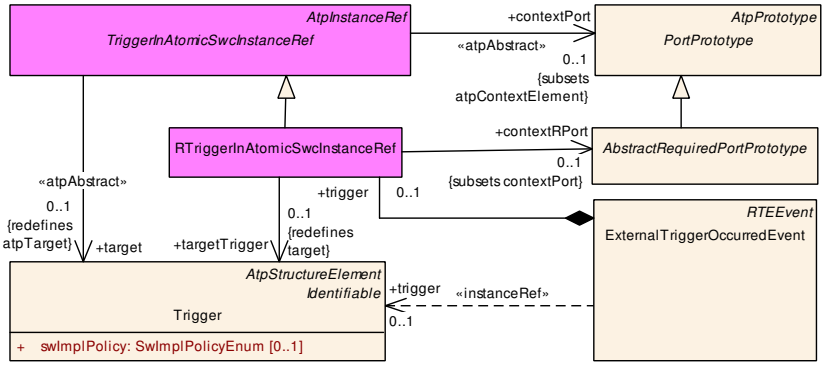

Figure D.6: Concrete modeling of references to `Trigger` in the context of an `RPort-Prototype`

Class	**RTriggerInAtomicSwcInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*, *TriggerInAtomicSwcInstanceRef*			
Aggregated by	ExternalTriggerOccurredEvent.trigger, TransformerHardErrorEvent.requiredTrigger			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
contextRPort	AbstractRequiredPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetTrigger	Trigger	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.6: RTriggerInAtomicSwcInstanceRef

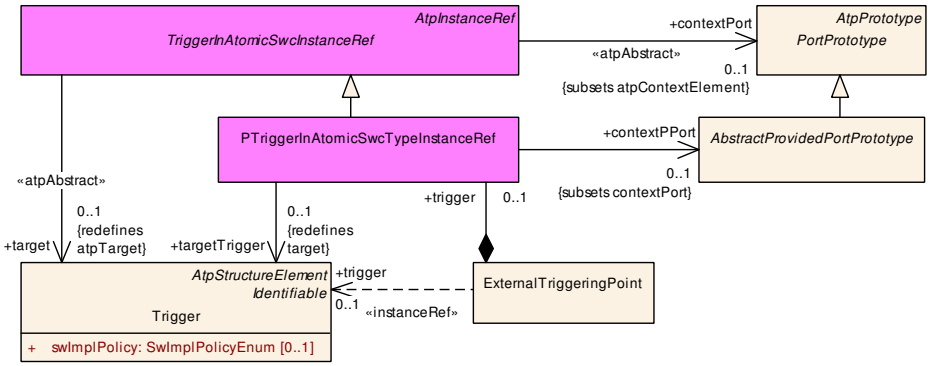

Figure D.7: Concrete modeling of references to `Trigger` in the context of a `PPort-Prototype`

Class	**PTriggerInAtomicSwcTypeInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*, *TriggerInAtomicSwcInstanceRef*			
Aggregated by	ExternalTriggeringPoint.trigger, SwcBswSynchronizedTrigger.swcTrigger			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
contextPPort	AbstractProvidedPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetTrigger	Trigger	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.7: PTriggerInAtomicSwcTypeInstanceRef

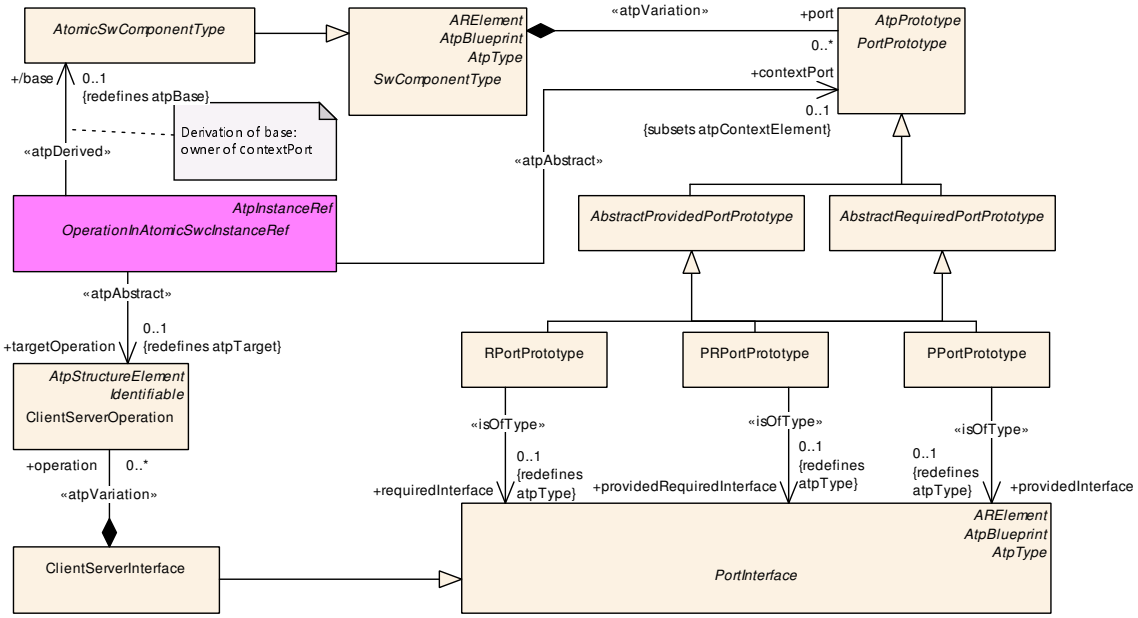

Figure D.8: Abstract modeling of references to `ClientServerOperation` in the context of a `AtomicSwComponentType`

Class	***OperationInAtomicSwcInstanceRef*** (abstract)			
Note				
Base	*ARObject*, *AtpInstanceRef*			
Subclasses	POperationInAtomicSwcInstanceRef, ROperationInAtomicSwcInstanceRef			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
base	AtomicSwComponent Type	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextPort	PortPrototype	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=20
targetOperation	ClientServerOperation	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=30

Table D.8: OperationInAtomicSwcInstanceRef

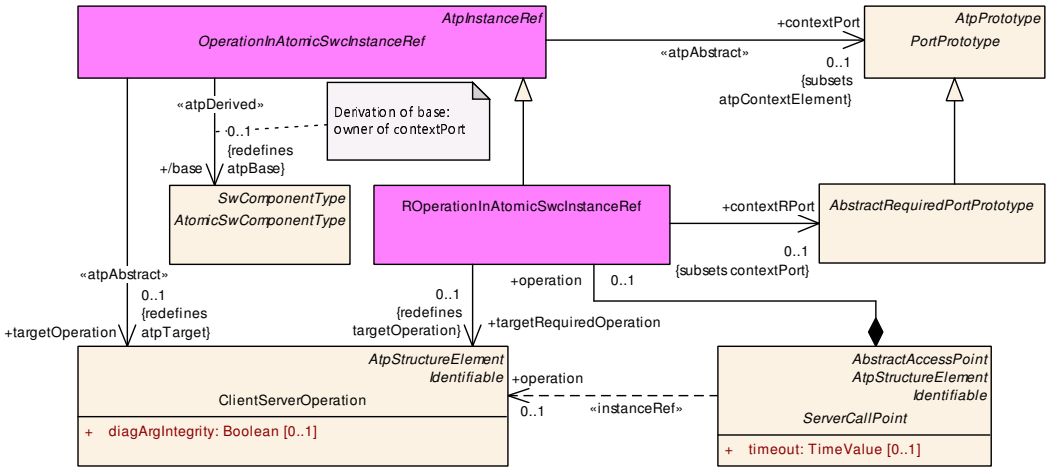

Figure D.9: Concrete modeling of references to `ClientServerOperation` in the context of an `RPortPrototype`

Class	**ROperationInAtomicSwcInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*, *OperationInAtomicSwcInstanceRef*			
Aggregated by	*ServerCallPoint*.operation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
contextRPort	AbstractRequiredPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetRequired Operation	ClientServerOperation	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.9: ROperationInAtomicSwcInstanceRef

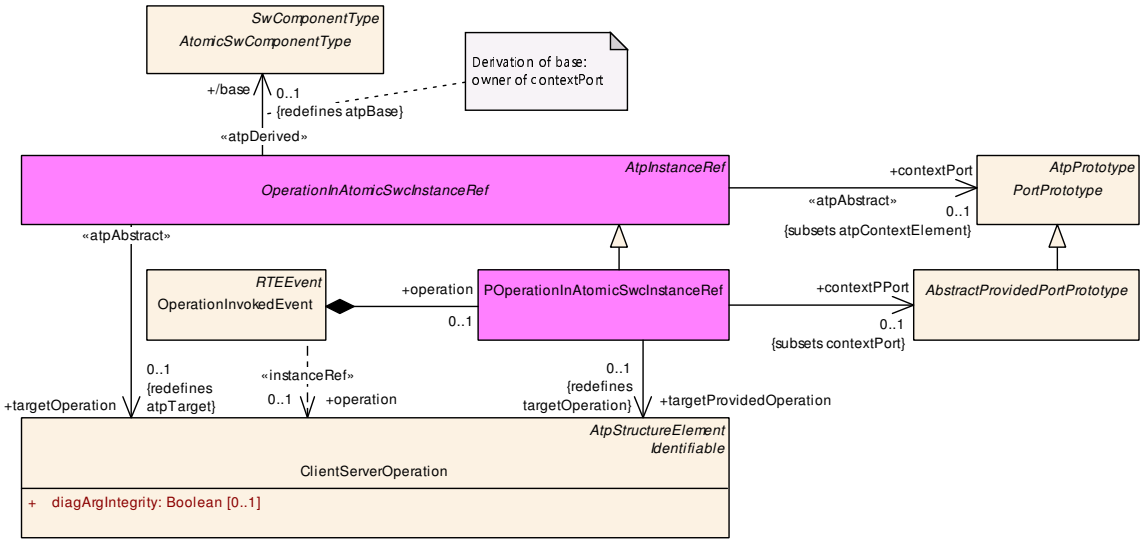

Figure D.10: Concrete modeling of references to `ClientServerOperation` in the context of a `PPortPrototype`

Class	**ModeGroupInAtomicSwcInstanceRef** (abstract)			
Note				
Base	*ARObject*, *AtpInstanceRef*			
Subclasses	PModeGroupInAtomicSwcInstanceRef, RModeGroupInAtomicSWCInstanceRef			
Aggregated by	ModeAccessPoint.modeGroup			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	AtomicSwComponent Type	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextPort	PortPrototype	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=20
target	ModeDeclarationGroup Prototype	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=30

Table D.10: ModeGroupInAtomicSwcInstanceRef

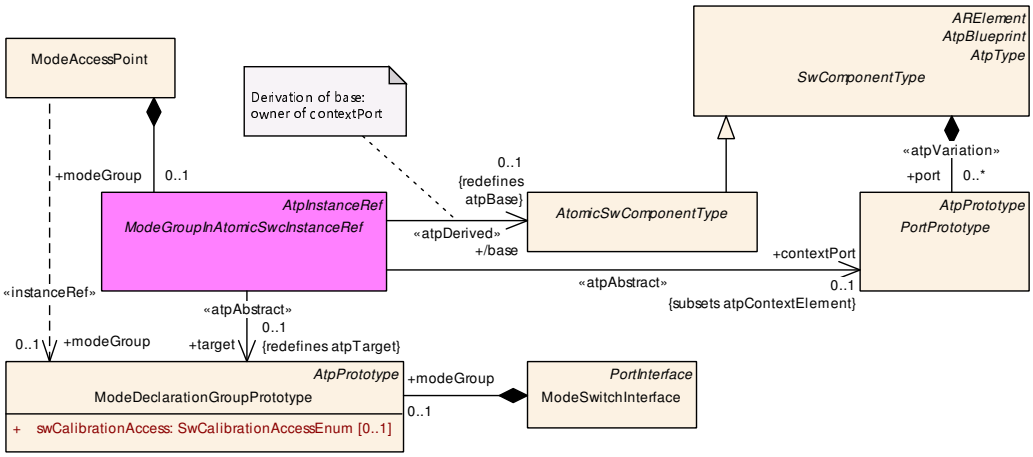

Figure D.11: Abstract modeling of references to `ModeDeclarationGroupPrototype` in the context of an `PortPrototype`

Class	**RModeGroupInAtomicSWCInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*, *ModeGroupInAtomicSwcInstanceRef*			
Aggregated by	ModeAccessPoint.modeGroup			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
contextRPort	AbstractRequiredPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetMode Group	ModeDeclarationGroup Prototype	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.11: RModeGroupInAtomicSWCInstanceRef

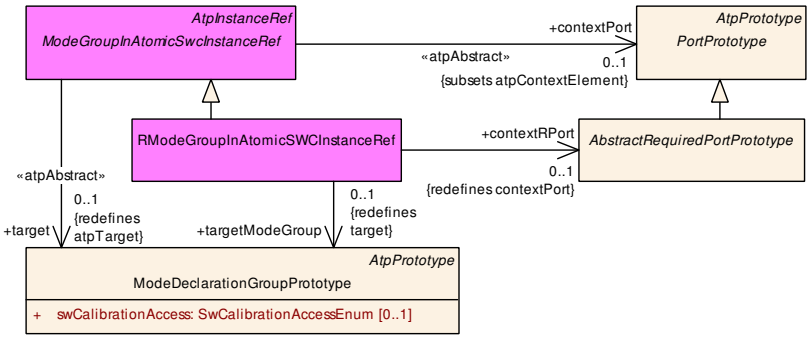

Figure D.12: Concrete modeling of references to `ModeDeclarationGroupPrototype` in the context of an `RPortPrototype`

Class	**POperationInAtomicSwcInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*, *OperationInAtomicSwcInstanceRef*			
Aggregated by	OperationInvokedEvent.operation, TransformerHardErrorEvent.operation			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
contextPPort	AbstractProvidedPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetProvided Operation	ClientServerOperation	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.12: POperationInAtomicSwcInstanceRef

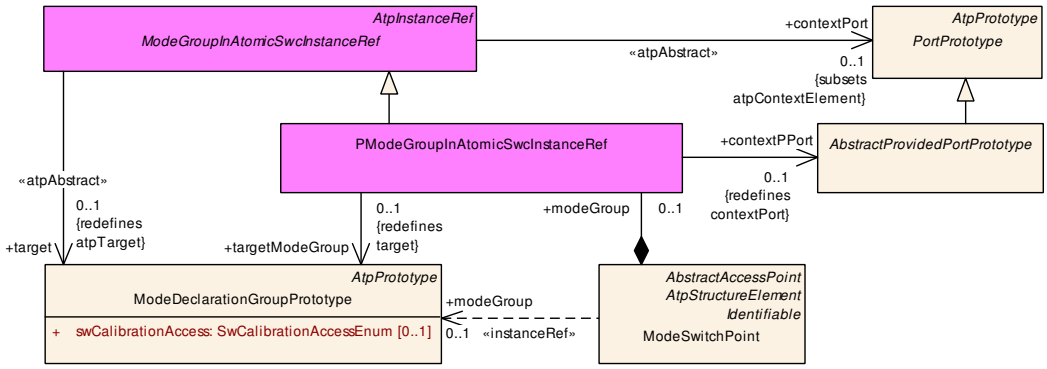

Figure D.13: Concrete modeling of references to `ModeDeclarationGroupPrototype` in the context of a `PPortPrototype`

Class	**PModeGroupInAtomicSwcInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*, *ModeGroupInAtomicSwcInstanceRef*			
Aggregated by	ModeAccessPoint.modeGroup, ModeSwitchPoint.modeGroup, SwcBswSynchronizedModeGroup Prototype.swcModeGroup, SwcModeManagerErrorEvent.modeGroup			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
contextPPort	AbstractProvidedPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetMode Group	ModeDeclarationGroup Prototype	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.13: PModeGroupInAtomicSwcInstanceRef

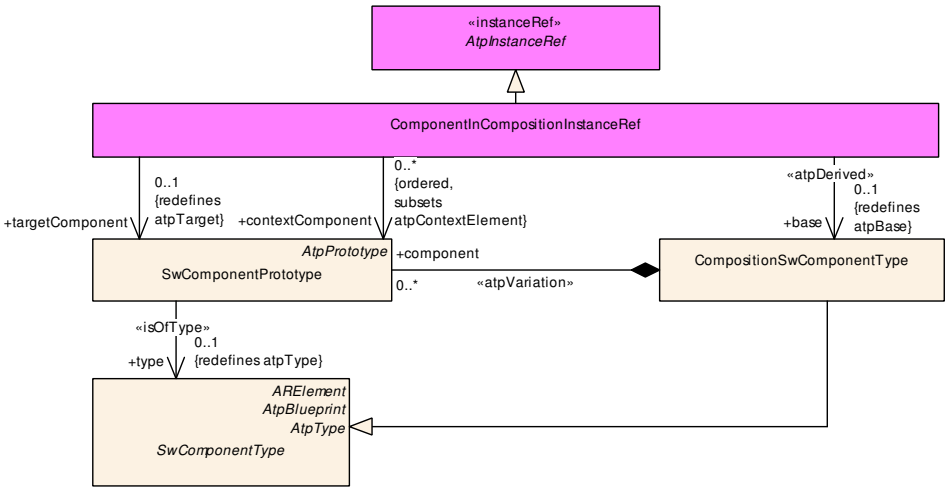

Figure D.14: Concrete modeling of references to `SwComponentPrototype` in the context of a `CompositionSwComponentType`

Class	**ComponentInCompositionInstanceRef**			
Note	The ComponentInCompositionInstanceRef points to a concrete SwComponentPrototype within a CompositionSwComponentType.			
Base	*ARObject*, *AtpInstanceRef*			
Aggregated by	DiagnosticJ1939SwMapping.swComponentPrototype, EOCEventRef.component, EOCExecutableEntity Ref.component, ExecutionTimeConstraint.component, *TDEventSwc*.component			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	CompositionSw ComponentType	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
context Component (ordered)	SwComponent Prototype	*	ref	The context for the scope of this timing event. **Tags:** xml.sequenceOffset=20
target Component	SwComponent Prototype	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.14: ComponentInCompositionInstanceRef

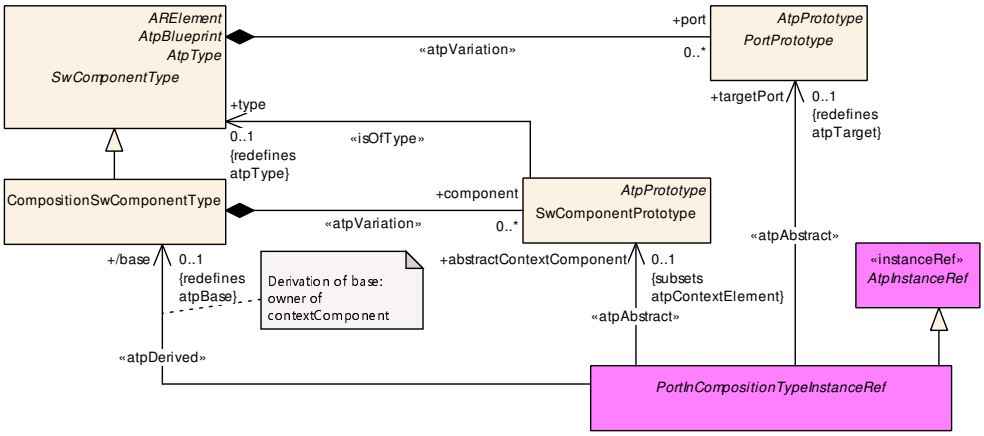

Figure D.15: Abstract modeling of references to `PortPrototype` in the context of a `CompositionSwComponentType`

Class	***PortInCompositionTypeInstanceRef*** (abstract)			
Note				
Base	*ARObject*, *AtpInstanceRef*			
Subclasses	PPortInCompositionInstanceRef, RPortInCompositionInstanceRef			
Aggregated by	DelegationSwConnector.innerPort, *TDEventVfbPort*.portPrototype			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
abstractContext Component	SwComponent Prototype	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=20
base	CompositionSw ComponentType	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
targetPort	PortPrototype	0..1	ref	**Stereotypes:** atpAbstract **Tags:** xml.sequenceOffset=30

Table D.15: PortInCompositionTypeInstanceRef

Class	**PPortInCompositionInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*, *PortInCompositionTypeInstanceRef*			
Aggregated by	AssemblySwConnector.provider, DelegationSwConnector.innerPort, *TDEventVfbPort*.portPrototype			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
context Component	SwComponent Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetPPort	AbstractProvidedPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.16: PPortInCompositionInstanceRef

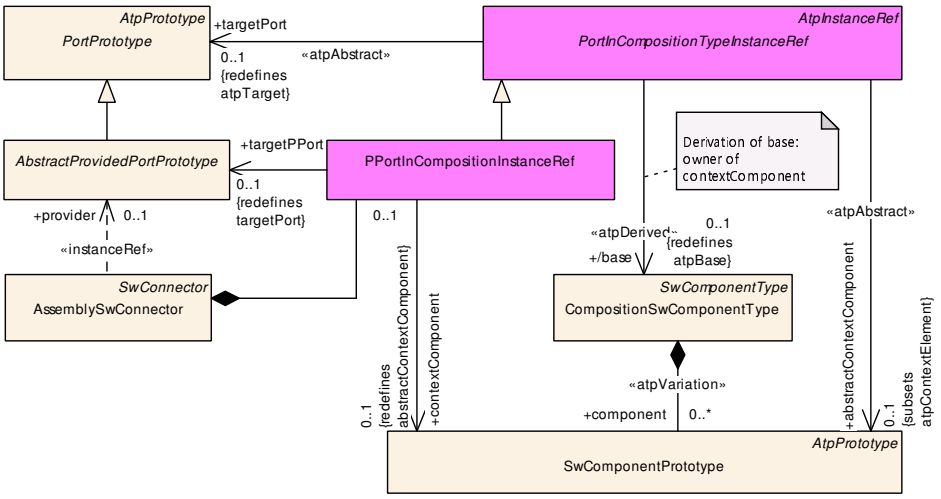

Figure D.16: Concrete modeling of references to `PPortPrototype` in the context of a `CompositionSwComponentType`

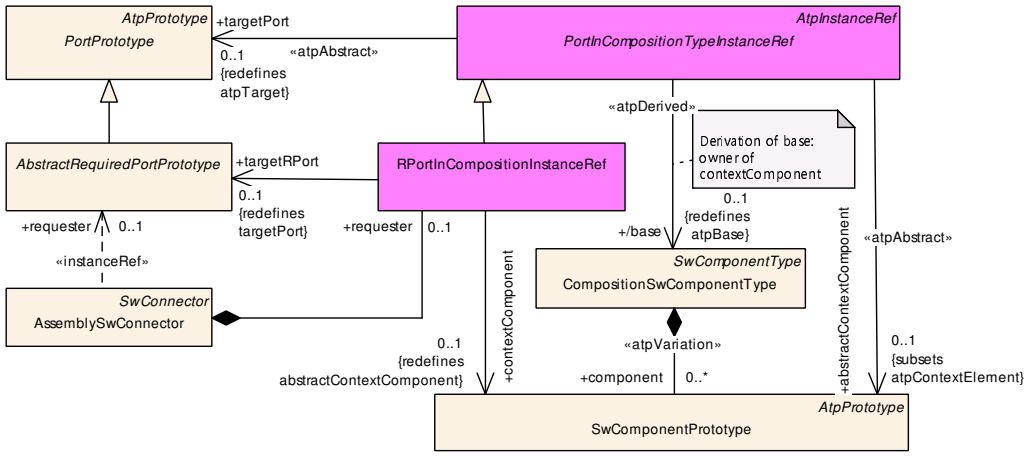

Figure D.17: Concrete modeling of references to `RPortPrototype` in the context of a `CompositionSwComponentType`

Class	**RPortInCompositionInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*, *PortInCompositionTypeInstanceRef*			
Aggregated by	AssemblySwConnector.requester, DelegationSwConnector.innerPort, SecurityEventReportToSecurityEventDefinitionMapping.reportedSecurityEvent, *TDEventVfbPort*.portPrototype			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
context Component	SwComponent Prototype	0..1	ref	**Tags:** xml.sequenceOffset=20
targetRPort	AbstractRequiredPort Prototype	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.17: RPortInCompositionInstanceRef

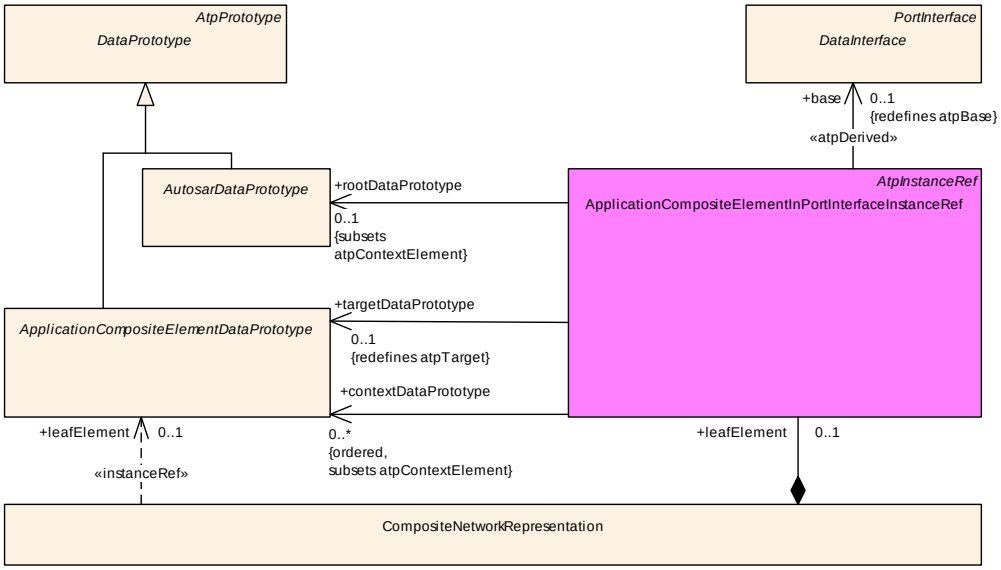

Figure D.18: Modeling of references to `ApplicationCompositeElementDataPrototype` for the purpose of defining a network representation

Class	ApplicationCompositeElementInPortInterfaceInstanceRef			
Note				
Base	ARObject, AtpInstanceRef			
Aggregated by	ApplicationCompositeDataTypeSubElementRef.applicationCompositeElement, CompositeNetwork Representation.leafElement			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
base	DataInterface	0..1	ref	This represents the SenderReceiverInterface that acts as the base in this InstanceRef definition **Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextData Prototype (ordered)	ApplicationComposite ElementDataPrototype	*	ref	This represents a context ApplicationCompositeData Prototype **Tags:** xml.sequenceOffset=20
rootData Prototype	AutosarDataPrototype	0..1	ref	This refers to the dataPrototype which is typed by the ApplicationDatatype in which which the target can be found. **Tags:** xml.sequenceOffset=15
targetData Prototype	ApplicationComposite ElementDataPrototype	0..1	ref	This represents the referenced ApplicationComposite DataPrototype. **Tags:** xml.sequenceOffset=30

Table D.18: ApplicationCompositeElementInPortInterfaceInstanceRef

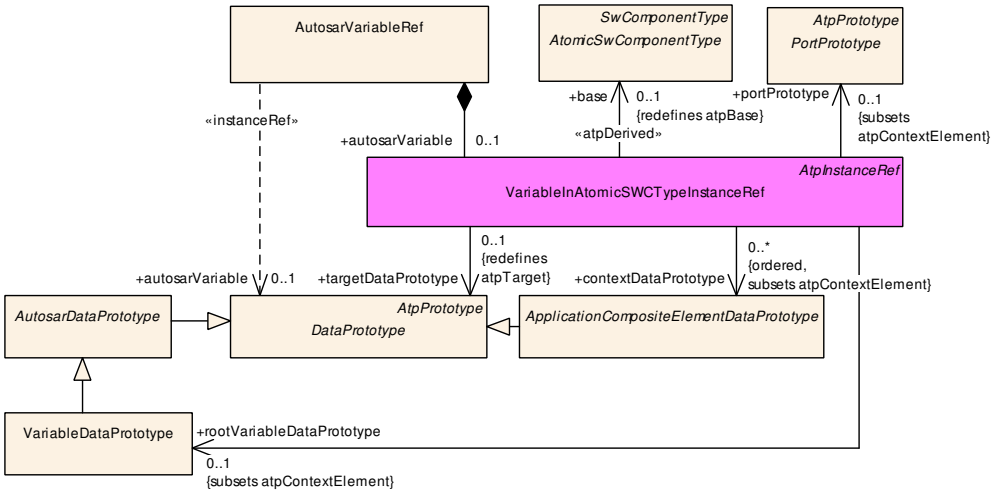

Figure D.19: Modeling of references to `DataPrototype` in the context of an `AtomicSwComponentType`

Class	VariableInAtomicSWCTypeInstanceRef			
Note				
Base	ARObject, AtpInstanceRef			
Aggregated by	AutosarVariableRef.autosarVariable			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
base	AtomicSwComponent Type	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10

△

Class	**VariableInAtomicSWCTypeInstanceRef**			
contextData Prototype (ordered)	ApplicationComposite ElementDataPrototype	*	ref	This is the context in a compositeDataType. **Tags:** xml.sequenceOffset=40
portPrototype	PortPrototype	0..1	ref	This is the port providing the parameter or the entry point to the parameter structure. **Tags:** xml.sequenceOffset=20
rootVariable DataPrototype	VariableDataPrototype	0..1	ref	**Tags:** xml.sequenceOffset=30
targetData Prototype	DataPrototype	0..1	ref	This is the target of the instance ref. Note that it shall be one of ApplicationCompositeElementDataPrototype of VariableDataPrototype. **Tags:** xml.sequenceOffset=50

Table D.19: VariableInAtomicSWCTypeInstanceRef

D.2.2 Definition of implicit Communication Behavior

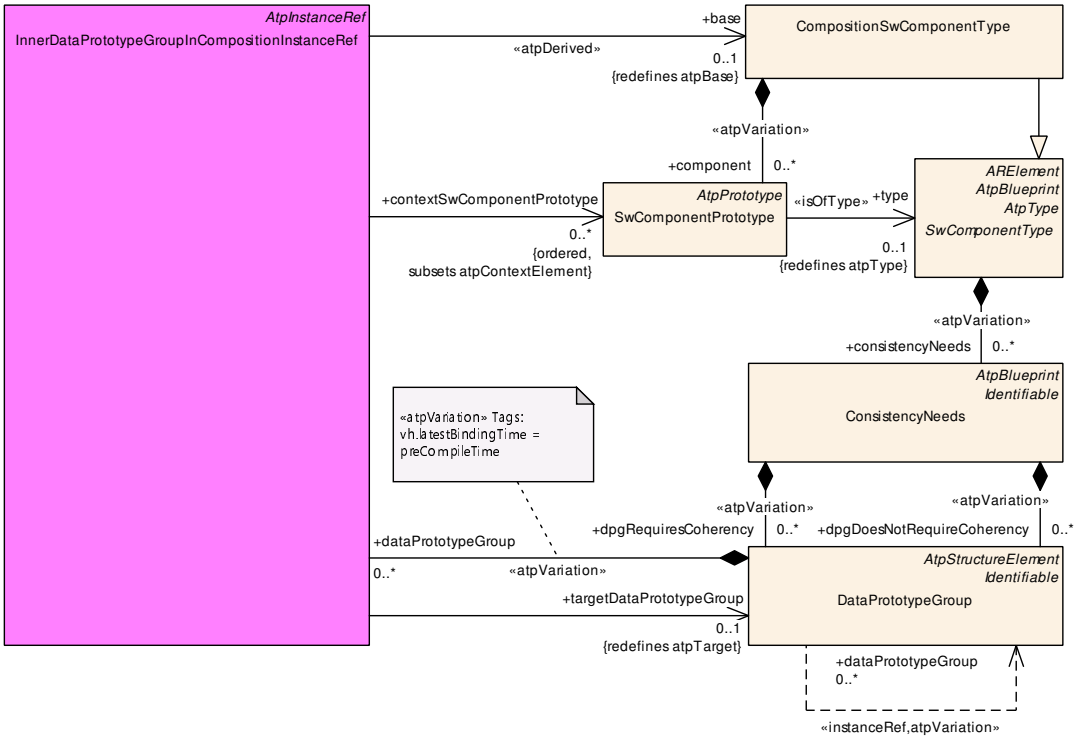

Figure D.20: Modeling of references to `DataPrototypeGroup` in the context of a `CompositionSwComponentType`

Class	**InnerDataPrototypeGroupInCompositionInstanceRef**
Note	This meta-class represents the ability to define an InstanceRef to a nested DataPrototypeGroup
Base	*ARObject*, *AtpInstanceRef*
Aggregated by	DataPrototypeGroup.dataPrototypeGroup

▽

△

Class	**InnerDataPrototypeGroupInCompositionInstanceRef**			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	CompositionSw ComponentType	0..1	ref	This represents the base of the instanceRef. **Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextSw Component Prototype (ordered)	SwComponent Prototype	*	ref	This represents the nested structure of SwComponent Prototypes. **Tags:** xml.sequenceOffset=20
targetData PrototypeGroup	DataPrototypeGroup	0..1	ref	This represents the target of the InstanceRef **Tags:** xml.sequenceOffset=30

Table D.20: InnerDataPrototypeGroupInCompositionInstanceRef

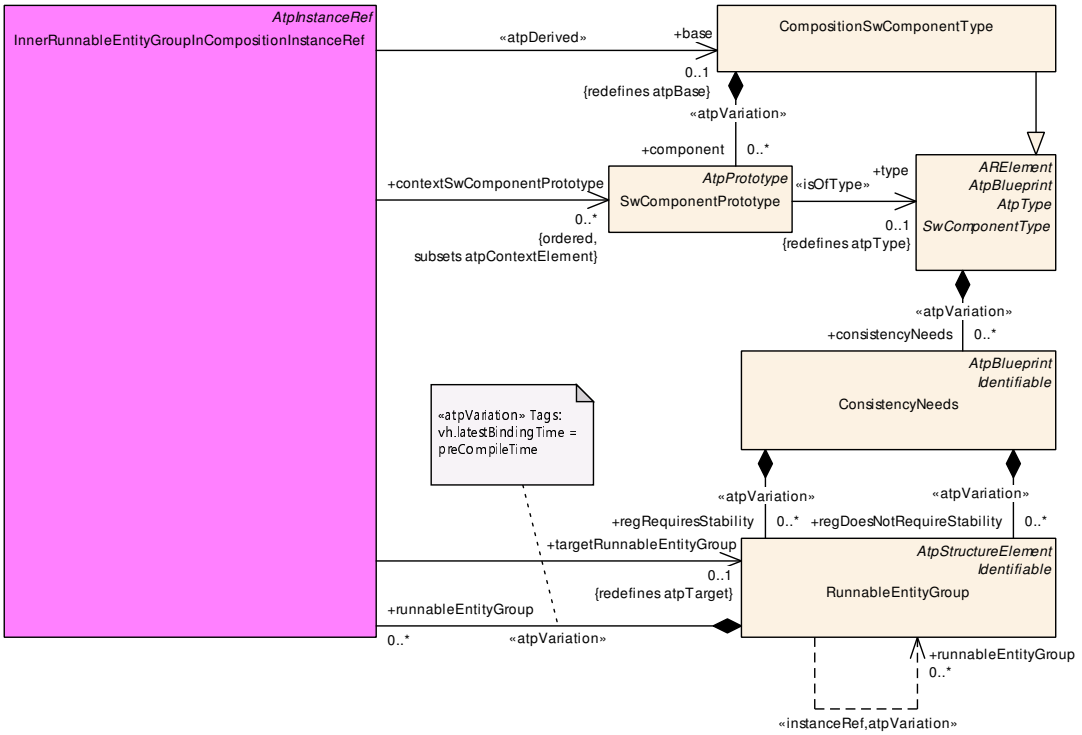

Figure D.21: Modeling of references to `RunnableEntityGroup` in the context of a `CompositionSwComponentType`

Class	**InnerRunnableEntityGroupInCompositionInstanceRef**			
Note	This meta-class represents the ability to define an InstanceRef to a nested RunnableEntityGroup.			
Base	*ARObject*, *AtpInstanceRef*			
Aggregated by	RunnableEntityGroup.runnableEntityGroup			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	CompositionSw ComponentType	0..1	ref	This represents the base of the InstanceRef. **Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10

▽

△

Class	**InnerRunnableEntityGroupInCompositionInstanceRef**			
contextSw Component Prototype (ordered)	SwComponent Prototype	*	ref	This represents the nested structure of SwComponent Prototypes. **Tags:** xml.sequenceOffset=20
targetRunnable EntityGroup	RunnableEntityGroup	0..1	ref	This represents the target association of the InstanceRef. **Tags:** xml.sequenceOffset=30

Table D.21: InnerRunnableEntityGroupInCompositionInstanceRef

Class	**RunnableEntityInCompositionInstanceRef**			
Note	This meta-class represents the ability to define an InstanceRef to a RunnableEntity in the context of a CompositionSwComponentType.			
Base	*ARObject*, *AtpInstanceRef*			
Aggregated by	RunnableEntityGroup.runnableEntity			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	CompositionSw ComponentType	0..1	ref	This represents the base of the InstanceRef. **Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextSw Component Prototype (ordered)	SwComponent Prototype	*	ref	This represents the nested structure of SwComponent Prototypes. **Tags:** xml.sequenceOffset=20
targetRunnable Entity	RunnableEntity	0..1	ref	This represents the target RunnableEntity. **Tags:** xml.sequenceOffset=30

Table D.22: RunnableEntityInCompositionInstanceRef

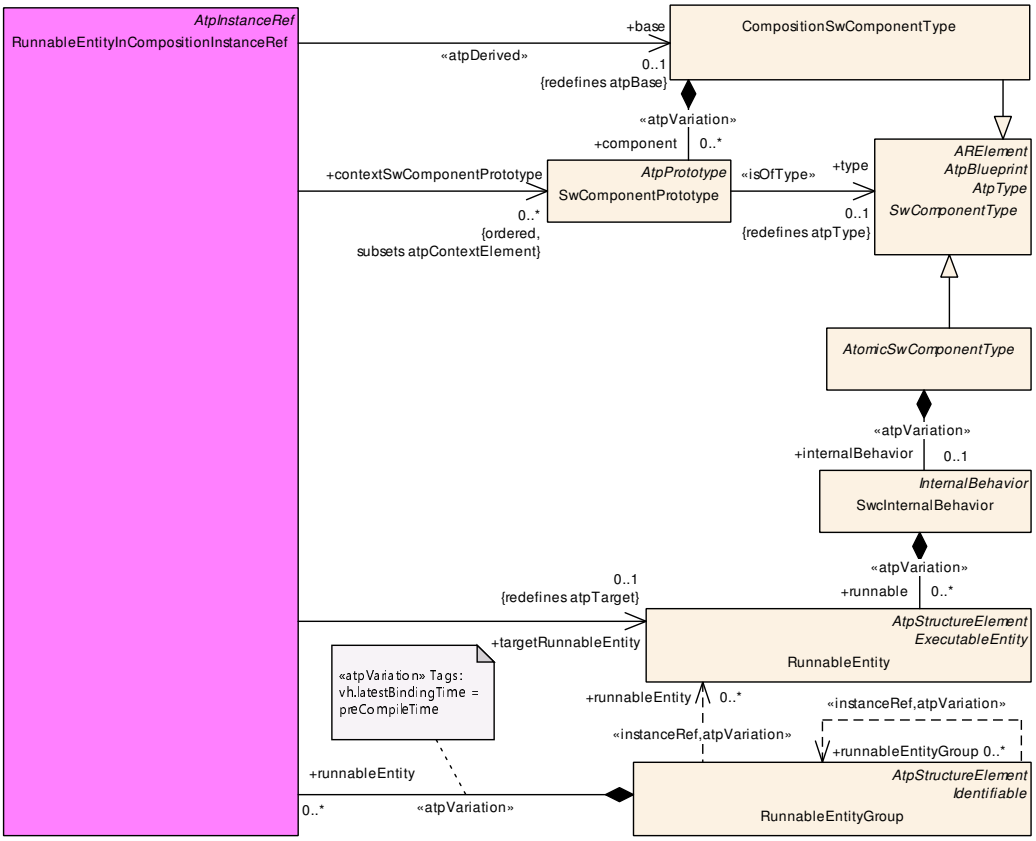

Figure D.22: Modeling of references to `RunnableEntity` in the context of a `CompositionSwComponentType` from the point of view of a `RunnableEntityGroup`

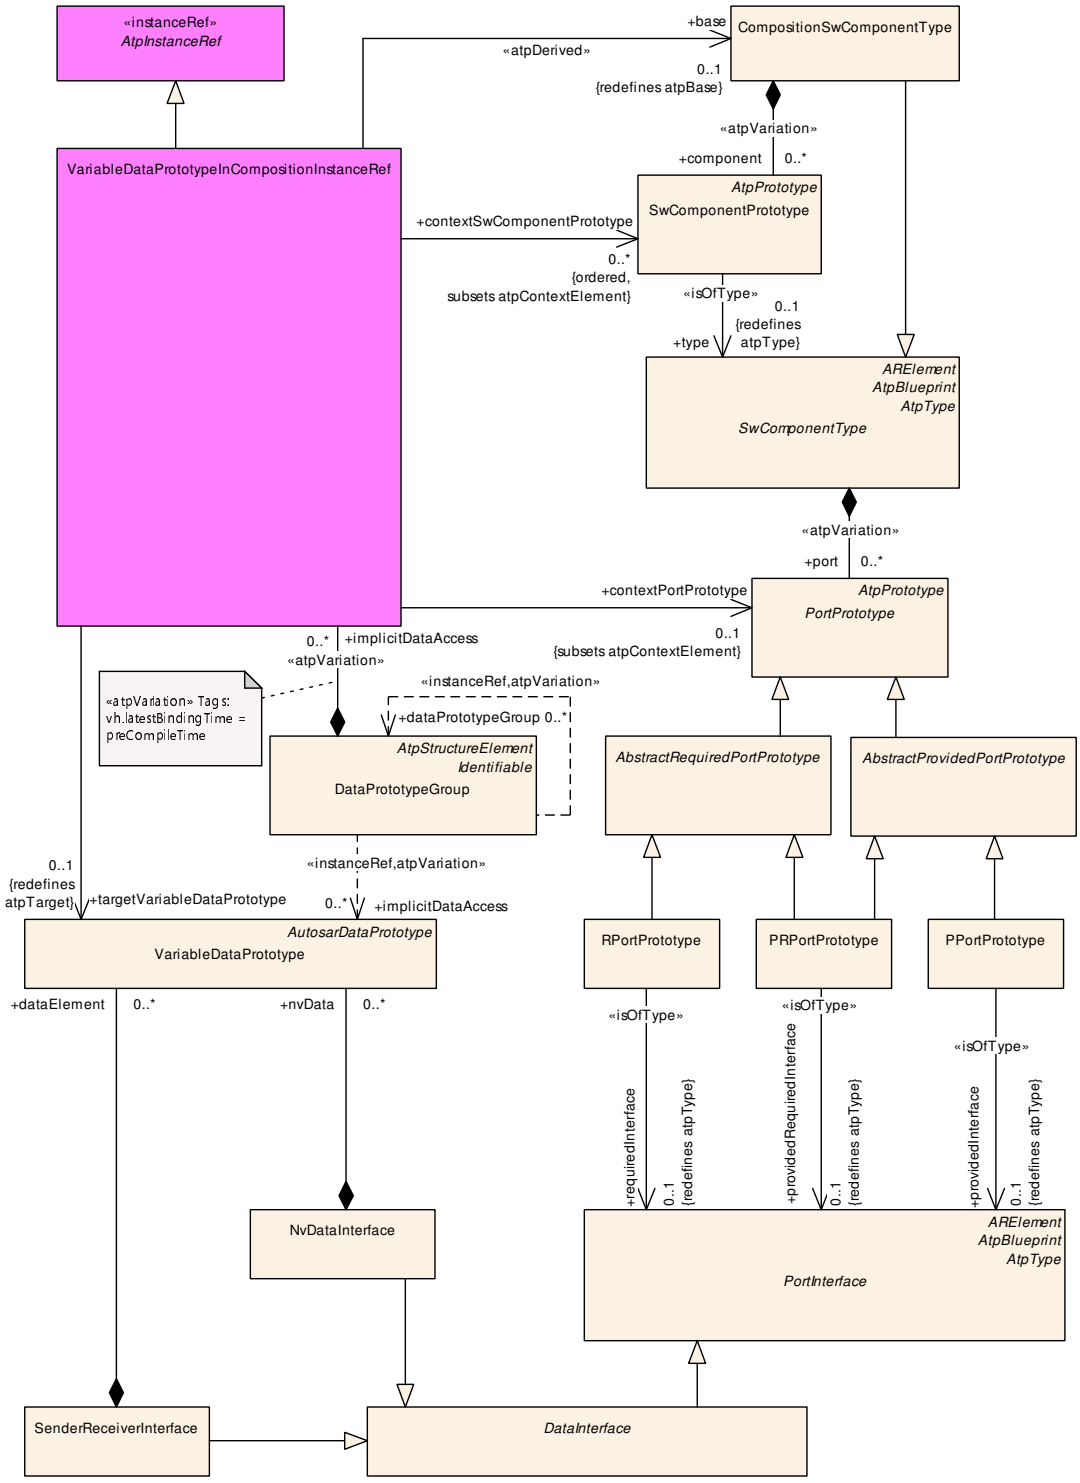

Figure D.23: Modeling of references to `VariableDataPrototype` in the context of a `CompositionSwComponentType` from the point of view of a `RunnableEntityGroup`

Class	**VariableDataPrototypeInCompositionInstanceRef**			
Note	This meta-class represents the ability to define an InstanceRef to a VariableDataPrototype in the context of a CompositionSwComponentType.			
Base	*ARObject*, *AtpInstanceRef*			
Aggregated by	DataPrototypeGroup.implicitDataAccess			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	CompositionSw ComponentType	0..1	ref	This represents the base of the InstanceRef. **Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
contextPort Prototype	PortPrototype	0..1	ref	This represents a reference to a context PortPrototype. **Tags:** xml.sequenceOffset=30
contextSw Component Prototype (ordered)	SwComponent Prototype	*	ref	This represents the nested structure of SwComponent Prototypes. **Tags:** xml.sequenceOffset=20
targetVariable DataPrototype	VariableDataPrototype	0..1	ref	This represents the target VariableDataPrototype. **Tags:** xml.sequenceOffset=40

Table D.23: VariableDataPrototypeInCompositionInstanceRef

Class	**InstanceEventInCompositionInstanceRef**			
Note				
Base	*ARObject*, *AtpInstanceRef*			
Aggregated by	*InstantiationRTEEventProps*.refinedEvent			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	CompositionSw ComponentType	0..1	ref	**Stereotypes:** atpDerived **Tags:** xml.sequenceOffset=10
context Component Prototype (ordered)	SwComponent Prototype	*	ref	**Tags:** xml.sequenceOffset=20
targetEvent	RTEEvent	0..1	ref	**Tags:** xml.sequenceOffset=30

Table D.24: InstanceEventInCompositionInstanceRef

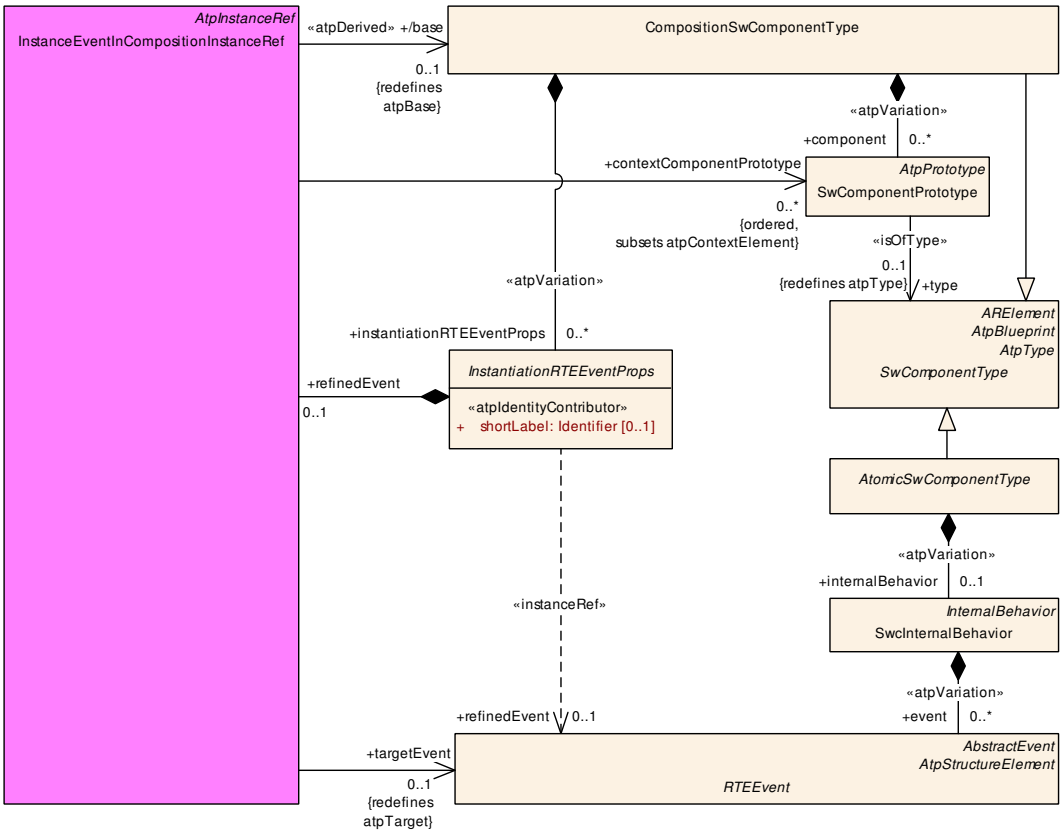

Figure D.24: Modeling of references to `RTEEvent` in the context of a `InstantiationRTEEventProps` from the point of view of a `CompositionSwComponentType`

D.2.3 Internal Behavior

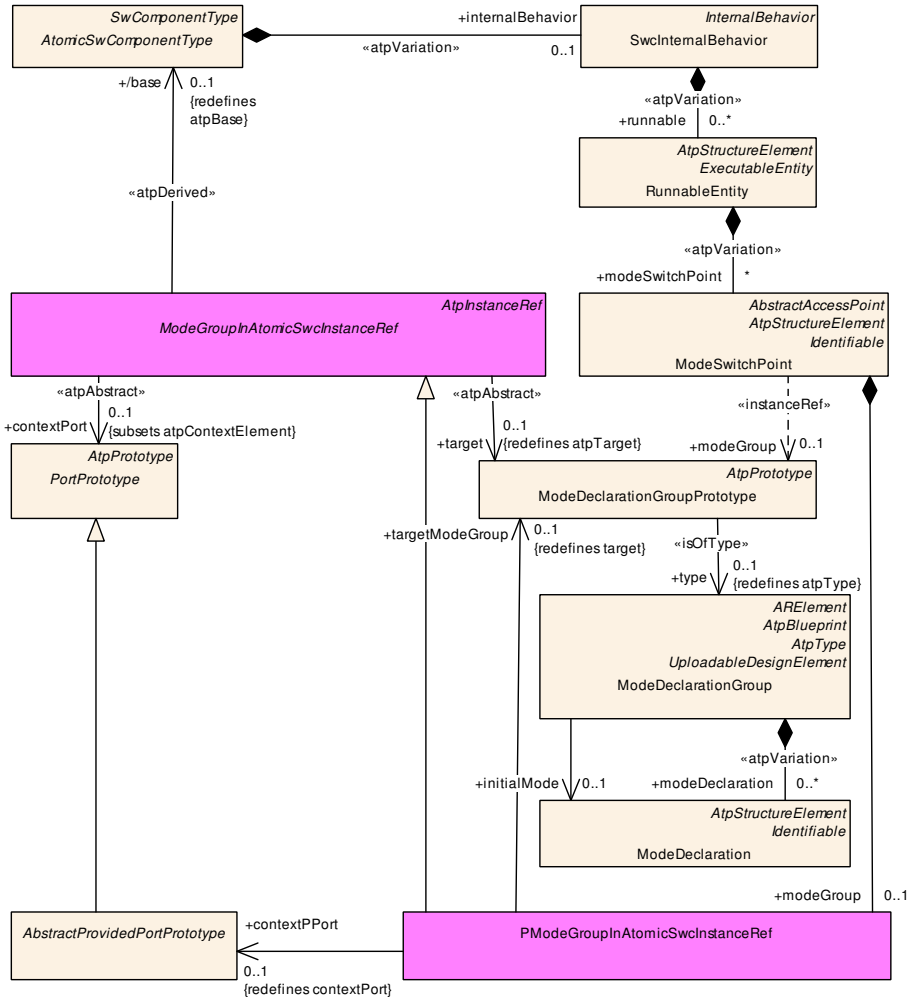

Figure D.25: Modeling of references to provided `ModeDeclarationGroupPrototype` in the context of an `AtomicSwComponentType`

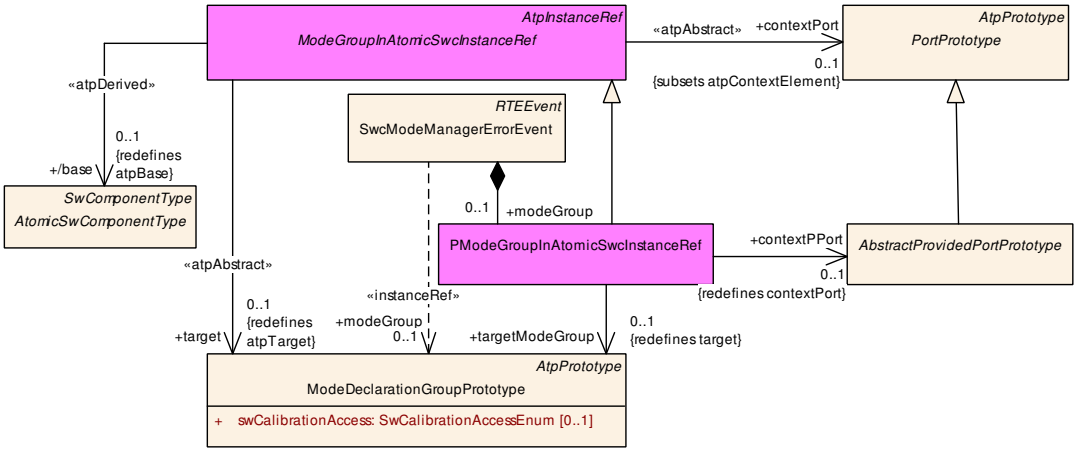

Figure D.26: Modeling of references to provided `ModeDeclarationGroupPrototype` to be used by `SwcModeManagerErrorEvent`

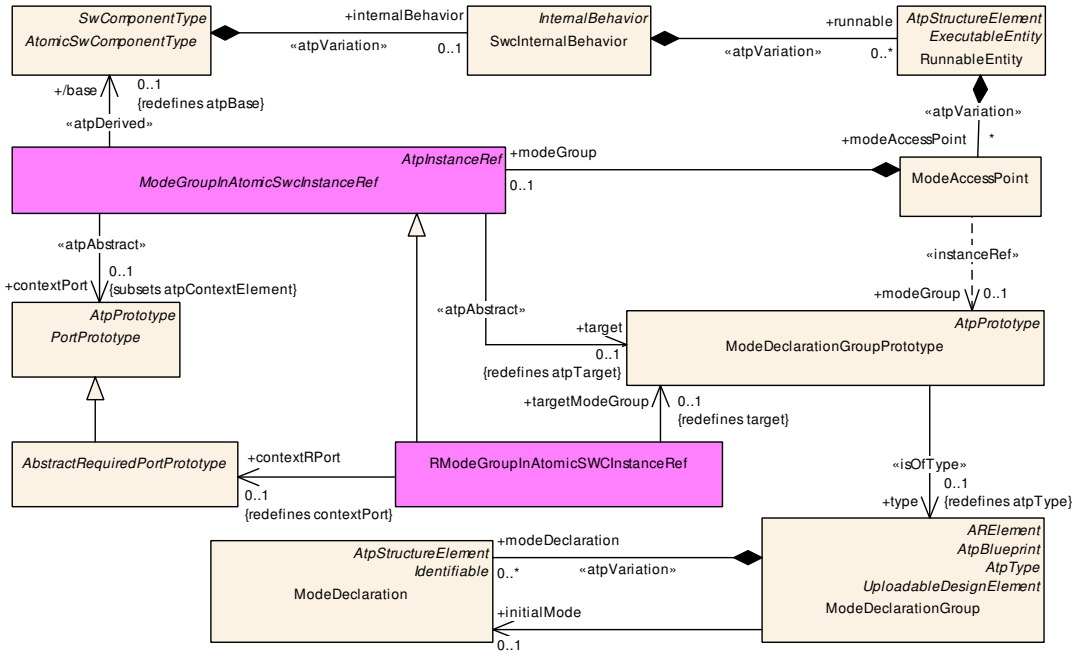

Figure D.27: Modeling of references to required `ModeDeclarationGroupPrototype` in the context of an `AtomicSwComponentType`

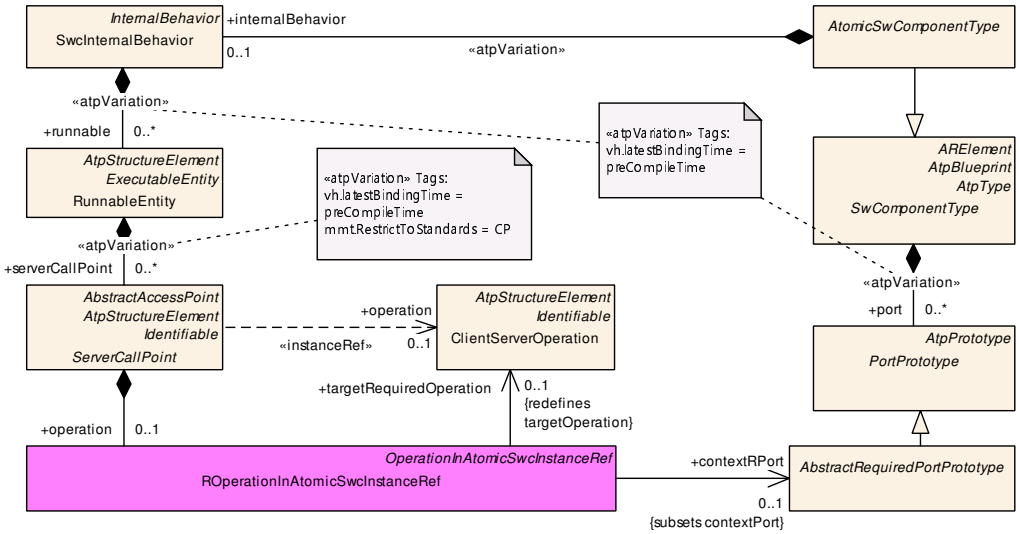

Figure D.28: Modeling of references to required `ClientServerOperation` in the context of a `SwComponentType`

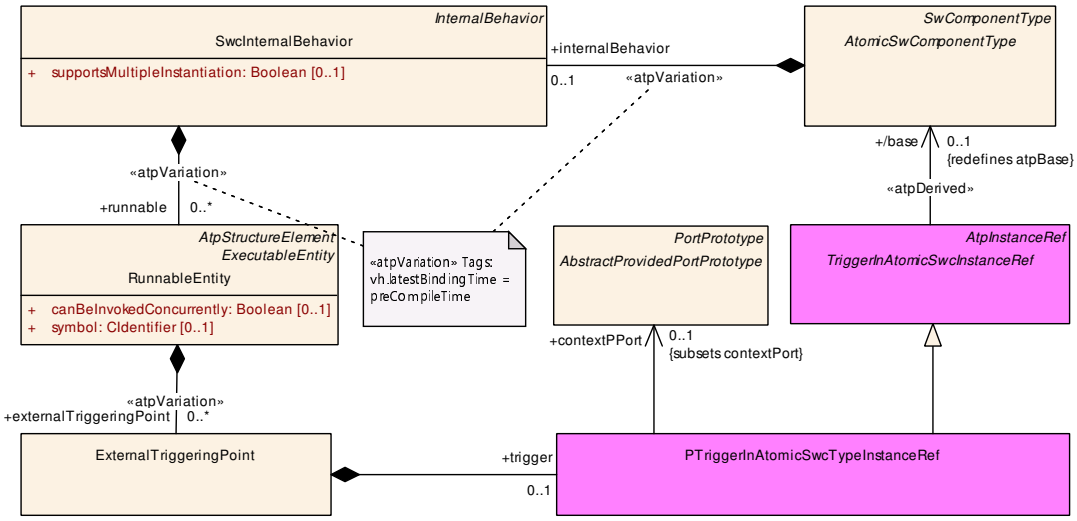

Figure D.29: Modeling of references to a `Trigger` in the context of a `SwComponentType`

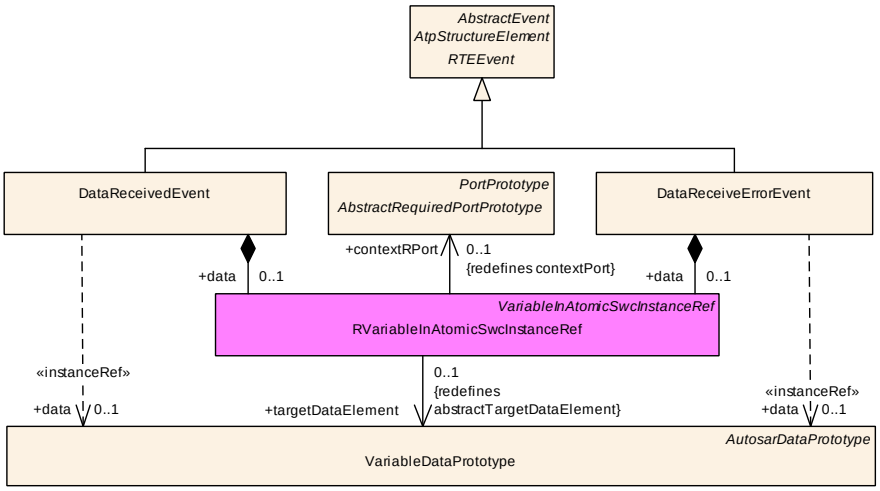

Figure D.30: Modeling of references to a `VariableDataPrototype` used in the context of an `RTEEvent`

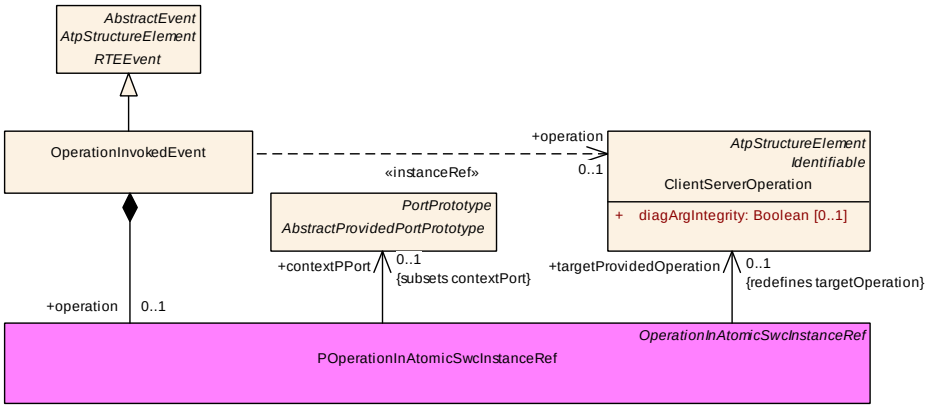

Figure D.31: Modeling of references to a `ClientServerOperation` used in the context of an `RTEEvent`

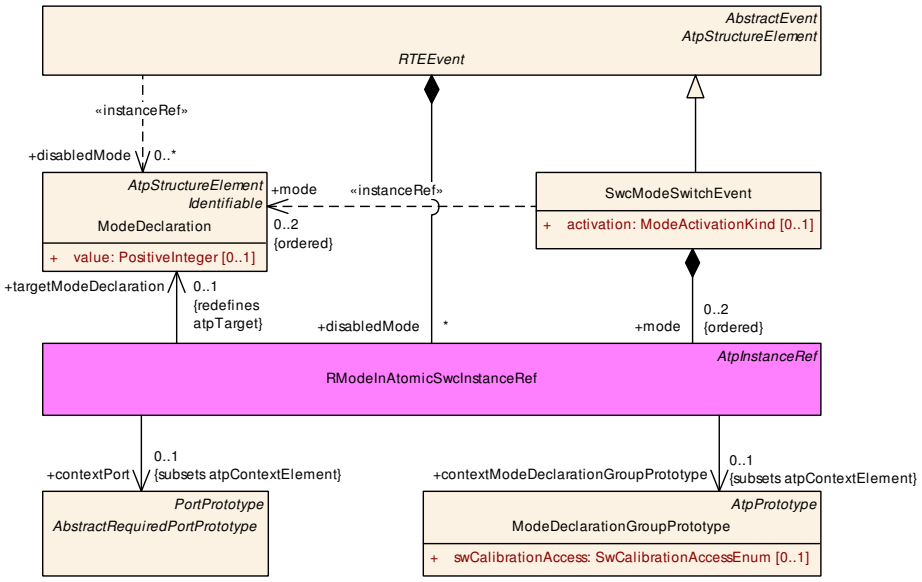

Figure D.32: Modeling of references to a `ModeDeclaration` used in the context of an `RTEEvent`

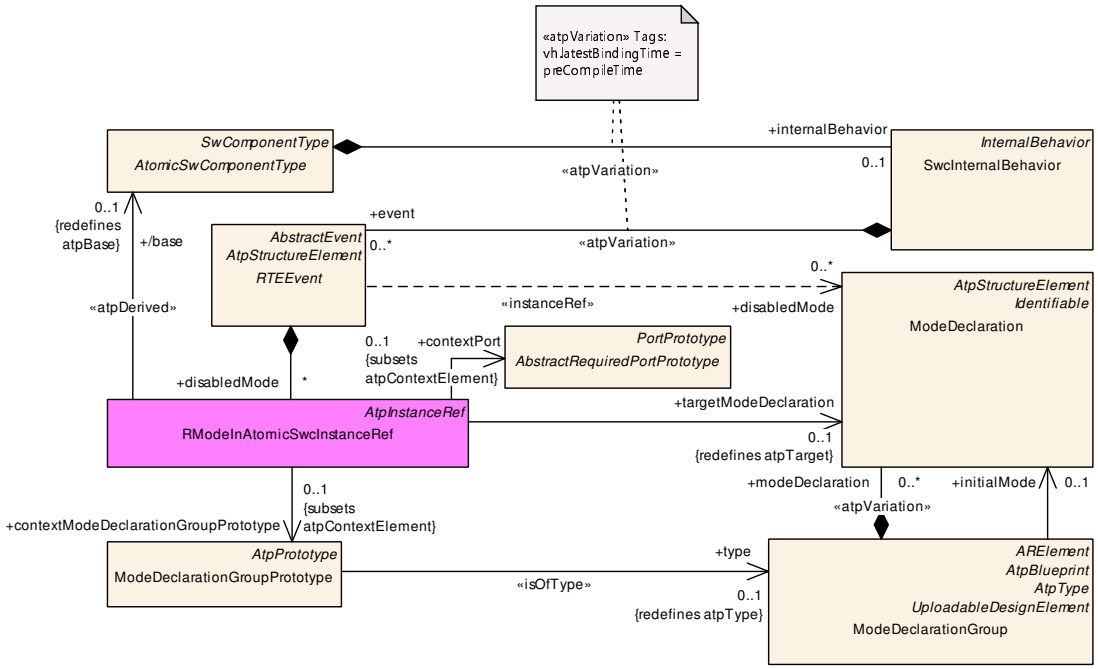

Figure D.33: Modeling of mode disabling

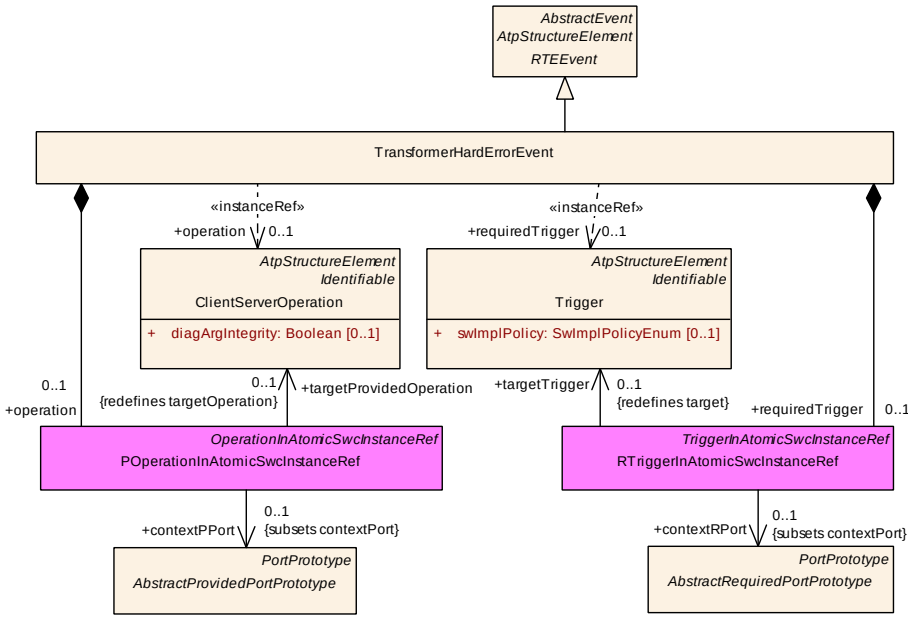

Figure D.34: Modeling of transformer error response

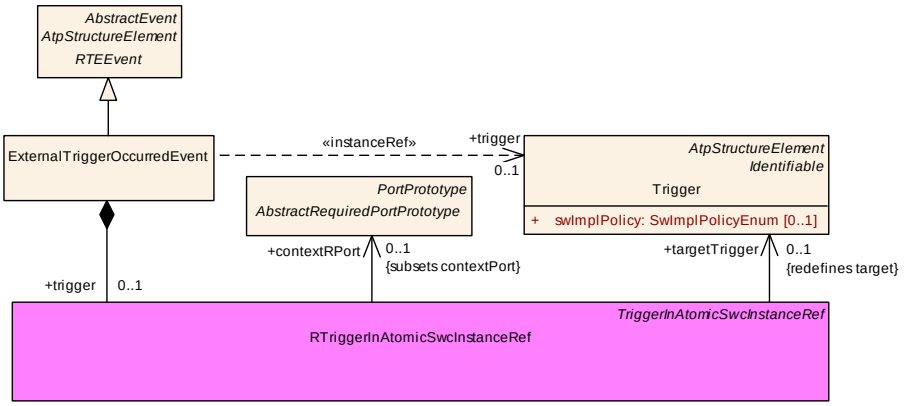

Figure D.35: Modeling of `RTriggerInAtomicSwcInstanceRef`

E Mentioned Class Tables

For the sake of completeness, this chapter contains a set of class tables representing meta-classes mentioned in the context of this document but which are not contained directly in the scope of describing specific meta-model semantics.

Class	***ARElement*** (abstract)			
Note	An element that can be defined stand-alone, i.e. without being part of another element (except for packages of course).			
Base	*ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Subclasses	*AbstractMessageToSecureChannelMapping*, AclObjectSet, AclOperation, AclPermission, AclRole, AliasNameSet, ApplicabilityInfoSet, ApplicationPartition, *AutosarDataType*, *BaseType*, BlueprintMappingSet, BswEntryRelationshipSet, BswModuleDescription, BswModuleEntry, BuildActionManifest, CalibrationParameterValueSet, ClientIdDefinitionSet, Collection, CompuMethod, ConsistencyNeedsBlueprintSet, ConstantSpecification, ConstantSpecificationMappingSet, CpSoftwareCluster, CpSoftwareClusterBinaryManifestDescriptor, CpSoftwareClusterMappingSet, CpSoftwareClusterResourcePool, CryptoEllipticCurveProps, CryptoServiceCertificate, CryptoServiceKey, CryptoServicePrimitive, CryptoServiceQueue, CryptoSignatureScheme, DataConstr, DataTransformationSet, DataTypeMappingSet, DdsCpConfig, *DiagnosticCommonElement*, DiagnosticConnection, DiagnosticContributionSet, DltArgumentPropsSet, DltContext, DltEcu, Documentation, E2EProfileCompatibilityProps, EcucDefinitionCollection, EcucDestinationUriDefSet, EcucModuleConfigurationValues, EcucModuleDef, EcucValueCollection, EthIpProps, EthTcpIpIcmpProps, EthTcpIpProps, EvaluatedVariantSet, FMFeature, FMFeatureMap, FMFeatureModel, FMFeatureSelectionSet, FirewallRule, FlatMap, GeneralPurposeConnection, HwCategory, HwElement, HwType, *IEEE1722TpConnection*, IPSecConfigProps, IPv6ExtHeaderFilterSet, *IdsCommonElement*, IdsDesign, *Implementation*, ImpositionTimeDefinitionGroup, InterpolationRoutineMappingSet, J1939ControllerApplication, KeywordSet, LifeCycleInfoSet, LifeCycleStateDefinitionGroup, LogAndTraceMessageCollectionSet, MacSecGlobalKayProps, MacSecParticipantSet, McFunction, McGroup, ModeDeclarationGroup, ModeDeclarationMappingSet, OsTaskProxy, PhysicalDimension, PhysicalDimensionMappingSet, *PortInterface*, PortInterfaceMappingSet, PortPrototypeBlueprint, PostBuildVariantCriterion, PostBuildVariantCriterionValueSet, PredefinedVariant, RapidPrototypingScenario, SdgDef, *SecureComProps*, *SecurityConnectivityAssociation*, SignalServiceTranslationPropsSet, SomeipSdClientEventGroupTimingConfig, SomeipSdClientServiceInstanceConfig, SomeipSdServerEventGroupTimingConfig, SomeipSdServerServiceInstanceConfig, SwAddrMethod, SwAxisType, SwComponentMappingConstraints, *SwComponentType*, SwRecordLayout, SwSystemconst, SwSystemconstantValueSet, SwcBswMapping, System, SystemComSpecDefinitionSet, SystemSignal, SystemSignalGroup, TDCpSoftwareClusterMappingSet, TcpOptionFilterSet, *TimingExtension*, TlsConnectionGroup, TlvDataIdDefinitionSet, TransformationPropsSet, Unit, UnitGroup, *UploadablePackageElement*, ViewMapSet			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table E.1: ARElement

Class	**ARPackage**			
Note	AUTOSAR package, allowing to create top level packages to structure the contained ARElements. ARPackages are open sets. This means that in a file based description system multiple files can be used to partially describe the contents of a package. This is an extended version of MSR's SW-SYSTEM.			
Base	*ARObject*, *AtpBlueprint*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ARPackage.arPackage, AUTOSAR.arPackage			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	**ARPackage**			
arPackage	ARPackage	*	aggr	This represents a sub package within an ARPackage, thus allowing for an unlimited package hierarchy. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=arPackage, arPackage.shortName, ar Package.variationPoint.shortLabel vh.latestBindingTime=blueprintDerivationTime xml.sequenceOffset=30
element	PackageableElement	*	aggr	Elements that are part of this package **Stereotypes:** atpVariation **Tags:** atp.Splitkey=element, element.shortName, element.variationPoint.shortLabel vh.latestBindingTime=systemDesignTime xml.sequenceOffset=20
referenceBase	ReferenceBase	*	aggr	This denotes the reference bases for the package. This is the basis for all relative references within the package. The base needs to be selected according to the base attribute within the references. **Tags:** atp.Splitkey=referenceBase, referenceBase.shortLabel xml.sequenceOffset=10

Table E.2: ARPackage

Class	**AUTOSAR**			
Note	Root element of an AUTOSAR description, also the root element in corresponding XML documents. **Tags:** xml.globalElement=true			
Base	*ARObject*			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
adminData	AdminData	0..1	aggr	This represents the administrative data of an Autosar file. **Tags:** atp.Splitkey=adminData xml.sequenceOffset=10
arPackage	ARPackage	*	aggr	This is the top level package in an AUTOSAR model. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=arPackage, arPackage.shortName, ar Package.variationPoint.shortLabel vh.latestBindingTime=blueprintDerivationTime xml.sequenceOffset=30
fileInfo Comment	FileInfoComment	0..1	aggr	This represents a possibility to provide a structured comment in an AUTOSAR file. **Stereotypes:** atpStructuredComment **Tags:** atp.Splitkey=fileInfoComment xml.roleElement=true xml.sequenceOffset=-10 xml.typeElement=false

▽

△

Class	AUTOSAR			
introduction	DocumentationBlock	0..1	aggr	This represents an introduction on the Autosar file. It is intended for example to represent disclaimers and legal notes. **Tags:** atp.Splitkey=introduction xml.sequenceOffset=20

Table E.3: AUTOSAR

Class	«atpMixedString» ***AbstractNumericalVariationPoint*** (abstract)			
Note	This is an abstract NumericalValueVariationPoint. It is introduced to support the case that additional attributes are required for particular purposes.			
Base	*ARObject*, *AttributeValueVariationPoint*, *FormulaExpression*, *SwSystemconstDependentFormula*			
Subclasses	LimitValueVariationPoint, NumericalValueVariationPoint			
Aggregated by	VariationPointProxy.valueAccess			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table E.4: AbstractNumericalVariationPoint

Class	AdminData			
Note	AdminData represents the ability to express administrative information and custom extensions for an element. This administration information is to be treated as meta-data such as revision id or state of the file. There are basically the following kinds of meta-data • The language and/or used languages. • Revision information covering e.g. revision number, state, release date, changes. Note that this information can be given in general as well as related to a particular company. • Document meta-data specific for a company Beside that a custom extension of model-data is possible by • Special data			
Base	*ARObject*			
Aggregated by	AUTOSAR.adminData, *Describable*.adminData, *Identifiable*.adminData			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
docRevision (ordered)	DocRevision	*	aggr	This allows to denote information about the current revision of the object. Note that information about previous revisions can also be logged here. The entries shall be sorted descendant by date in order to reflect the history. Therefore the most recent entry representing the current version is denoted first. **Tags:** xml.roleElement=true xml.roleWrapperElement=true xml.sequenceOffset=50 xml.typeElement=false xml.typeWrapperElement=false

▽

△

Class	**AdminData**			
language	LEnum	0..1	attr	This attribute specifies the master language of the document or the document fragment. The master language is the one in which the document is maintained and from which the other languages are derived from. In particular in case of inconsistencies, the information in the master language is priority. **Tags:** xml.sequenceOffset=20
sdg	Sdg	*	aggr	This property allows to keep special data which is not represented by the standard model. It can be utilized to keep e.g. tool specific data. **Tags:** atp.Splitkey=sdg, sdg.sdgCaption.shortName xml.roleElement=true xml.roleWrapperElement=true xml.sequenceOffset=60 xml.typeElement=false xml.typeWrapperElement=false
usedLanguages	MultiLanguagePlainText	0..1	aggr	This property specifies the languages which are provided in the document. Therefore it should only be specified in the top level admin data. For each language provided in the document there is one entry in MultilanguagePlain Text. The content of each entry can be used for illustration of the language. The used language itself depends on the language attribute in the entry. **Tags:** atp.Splitkey=usedLanguages xml.sequenceOffset=30

Table E.5: AdminData

Class	**AnyInstanceRef**			
Note	Describes a reference to any instance in an AUTOSAR model. This is the most generic form of an instance ref. Refer to the superclass notes for more details.			
Base	*ARObject*, *AtpInstanceRef*			
Aggregated by	ApmcInstanceReferenceValue.value, ApmcUpstreamDocInstanceReferenceValue.value, ApmcUri InstanceReferenceValue.value, Collection.collectedInstance, Collection.sourceInstance, Documentation Context.feature, EcucInstanceReferenceValue.value, FlatInstanceDescriptor.ecuExtractReference, Flat InstanceDescriptor.upstreamReference, RptContainer.byPassPoint, RptHook.rptArHook, SecurityEvent ReportInstanceValue.object, ViewMap.firstElementInstance, ViewMap.secondElementInstance			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
base	AtpClassifier	0..1	ref	This is the base from which navigation path begins. **Stereotypes:** atpDerived
contextElement (ordered)	AtpPrototype	*	ref	This is one step in the navigation path specified by the instance ref.
target	AtpFeature	0..1	ref	This is the target of the instance ref.

Table E.6: AnyInstanceRef

Class	***AtpInstanceRef*** (abstract)
Note	An M0 instance of a classifier may be represented as a tree rooted at that instance, where under each node come the sub-trees representing the instances which act as features under that node. An instance ref specifies a navigation path from any M0 tree-instance of the base (which is a classifier) to a leaf (which is an instance of the target).

▽

△

Class	***AtpInstanceRef*** (abstract)			
Base	*ARObject*			
Subclasses	AnyInstanceRef, ApplicationCompositeElementInPortInterfaceInstanceRef, ComponentInComposition InstanceRef, ComponentInSystemInstanceRef, *DataPrototypeInPortInterfaceInstanceRef*, Data PrototypeInSystemInstanceRef, InnerDataPrototypeGroupInCompositionInstanceRef, InnerPortGroupIn CompositionInstanceRef, InnerRunnableEntityGroupInCompositionInstanceRef, InstanceEventIn CompositionInstanceRef, ModeDeclarationGroupPrototypeInSystemInstanceRef, *ModeGroupInAtomic SwcInstanceRef*, ModeInBswInstanceRef, ModeInBswModuleDescriptionInstanceRef, ModeInSwc InstanceRef, OperationArgumentInComponentInstanceRef, *OperationInAtomicSwcInstanceRef*, OperationInSystemInstanceRef, PModeInSystemInstanceRef, ParameterDataPrototypeInSystem InstanceRef, ParameterInAtomicSWCTypeInstanceRef, PortGroupInSystemInstanceRef, *PortIn CompositionTypeInstanceRef*, RModeInAtomicSwcInstanceRef, RteEventInCompositionInstanceRef, RteEventInEcuInstanceRef, RteEventInSystemInstanceRef, RunnableEntityInCompositionInstanceRef, SwcServiceDependencyInSystemInstanceRef, *TriggerInAtomicSwcInstanceRef*, TriggerInSystem InstanceRef, VariableAccessInEcuInstanceRef, VariableDataPrototypeInCompositionInstanceRef, VariableDataPrototypeInSystemInstanceRef, VariableInAtomicSWCTypeInstanceRef, *VariableInAtomic SwcInstanceRef*, VariableInComponentInstanceRef			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
atpBase	AtpClassifier	0..1	ref	This is the base from which the navigaion path starts. **Stereotypes:** atpAbstract; atpDerived
atpContext Element (ordered)	AtpPrototype	*	ref	This is one particular step in the navigation path. **Stereotypes:** atpAbstract
atpTarget	AtpFeature	0..1	ref	This is the target of the instance ref. In other words it is the terminal of the navigation path. **Stereotypes:** atpAbstract

Table E.7: AtpInstanceRef

Class	***AtpPrototype*** (abstract)			
Note	A prototype is a typed feature. A prototype in a classifier indicates that instances of that classifier will have a feature, and the structure of that feature is given by the its type. An instance of that type will play the role indicated by the feature in the owning classifier. A feature is not an instance but an indication of an instance-to-be.			
Base	*ARObject*, *AtpFeature*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	*DataPrototype*, ModeDeclarationGroupPrototype, *PortPrototype*, RootSwCompositionPrototype, Sw ComponentPrototype			
Aggregated by	*AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
atpType	AtpType	0..1	ref	This is the type of the feature. **Stereotypes:** atpAbstract

Table E.8: AtpPrototype

Class	***AtpType*** (abstract)			
Note	A type is a classifier that may serve to type prototypes. It is a reusable classifier.			
Base	*ARObject*, *AtpClassifier*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Subclasses	*AutosarDataType*, ModeDeclarationGroup, ModeDeclarationMappingSet, *PortInterface*, *SwComponent Type*			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table E.9: AtpType

Enumeration	**BindingTimeEnum**
Note	This enumerator specifies the applicable binding times for the pre build variation points.
Aggregated by	ConditionByFormula.bindingTime, FMFeature.maximumIntendedBindingTime, FMFeature.minimum IntendedBindingTime, FMFeatureSelection.maximumSelectedBindingTime, FMFeature Selection.minimumSelectedBindingTime
Literal	***Description***
codeGeneration Time	• Coding by hand, based on requirements document. • Tool based code generation, e.g. from a model. • The model may contain variants. • Only code for the selected variant(s) is actually generated. **Tags:** atp.EnumerationLiteralIndex=0
linkTime	Configure what is included in object code, and what is omitted Based on which variant(s) are selected E.g. for modules that are delivered as object code (as opposed to those that are delivered as source code) **Tags:** atp.EnumerationLiteralIndex=1
preCompileTime	This is typically the C-Preprocessor. Exclude parts of the code from the compilation process, e.g., because they are not required for the selected variant, because they are incompatible with the selected variant, because they require resources that are not present in the selected variant. Object code is only generated for the selected variant(s). The code that is excluded at this stage code will not be available at later stages. **Tags:** atp.EnumerationLiteralIndex=2
systemDesignTime	• Designing the VFB. • Software Component types (PortInterfaces). • SWC Prototypes and the Connections between SWCprototypes. • Designing the Topology • ECUs and interconnecting Networks • Designing the Communication Matrix and Data Mapping **Tags:** atp.EnumerationLiteralIndex=3

Table E.10: BindingTimeEnum

Class	**BswCalledEntity**			
Note	BSW module entity which is designed to be called from another BSW module or cluster.			
Base	*ARObject*, *BswModuleEntity*, *ExecutableEntity*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	BswInternalBehavior.entity			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
–	–	–	–	–

Table E.11: BswCalledEntity

Class	**BswImplementation**			
Note	Contains the implementation specific information in addition to the generic specification (BswModule Description and BswBehavior). It is possible to have several different BswImplementations referring to the same BswBehavior. **Tags:** atp.recommendedPackage=BswImplementations This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *Implementation*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	**BswImplementation**			
arRelease Version	RevisionLabelString	0..1	attr	Version of the AUTOSAR Release on which this implementation is based. The numbering contains three levels (major, minor, revision) which are defined by AUTOSAR.
behavior	BswInternalBehavior	0..1	ref	The behavior of this implementation. This relation is made as an association because • it follows the pattern of the SWCT • since ARElement cannot be split, but we want supply the implementation later, the BswImplementation is not aggregated in BswBehavior **Tags:** atp.Splitkey=behavior
preconfigured Configuration	EcucModule ConfigurationValues	*	ref	Reference to the set of preconfigured (i.e. fixed) configuration values for this BswImplementation. If the BswImplementation represents a cluster of several modules, more than one EcucModuleConfigurationValues element can be referred (at most one per module), otherwise at most one such element can be referred. **Tags:** atp.Splitkey=preconfiguredConfiguration xml.roleWrapperElement=true
recommended Configuration	EcucModule ConfigurationValues	*	ref	Reference to one or more sets of recommended configuration values for this module or module cluster. **Tags:** atp.Splitkey=recommendedConfiguration
vendorApiInfix	Identifier	0..1	attr	In driver modules which can be instantiated several times on a single ECU, SRS_BSW_00347 requires that the names of files, APIs, published parameters and memory allocation keywords are extended by the vendorId and a vendor specific name. This parameter is used to specify the vendor specific name. In total, the implementation specific API name is generated as follows: <Module Name>_<vendorId>_ <vendorApiInfix>_<API name from SWS>. E.g. assuming that the vendorId of the implementer is 123 and the implementer chose a vendorApiInfix of "v11r456" an API name Can_Write defined in the SWS will translate to Can_123_v11r456_Write. This attribute is mandatory for all modules with upper multiplicity > 1. It shall not be used for modules with upper multiplicity =1. See also SWS_BSW_00102.
vendorSpecific ModuleDef	EcucModuleDef	*	ref	Reference to • the vendor specific EcucModuleDef used in this Bsw Implementation if it represents a single module • several EcucModuleDefs used in this Bsw Implementation if it represents a cluster of modules • one or no EcucModuleDefs used in this Bsw Implementation if it represents a library **Tags:** atp.Splitkey=vendorSpecificModuleDef xml.roleWrapperElement=true

Table E.12: BswImplementation

Class	**BswModuleDescription**			
Note	Root element for the description of a single BSW module or BSW cluster. In case it describes a BSW module, the short name of this element equals the name of the BSW module. **Tags:** atp.recommendedPackage=BswModuleDescriptions This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element, *AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
bswModule Dependency	BswModuleDependency	*	aggr	Describes the dependency to another BSW module. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=bswModuleDependency, bswModule Dependency.shortName, bswModule Dependency.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=20
bswModule Documentation	SwComponent Documentation	0..1	aggr	This adds a documentation to the BSW module. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=bswModuleDocumentation, bswModule Documentation.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=6
expectedEntry	BswModuleEntry	*	ref	Indicates an entry which is required by this module. Replacement of outgoingCallback / requiredEntry. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=expectedEntry, expectedEntry.bswModule Entry, expectedEntry.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
implemented Entry	BswModuleEntry	*	ref	Specifies an entry provided by this module which can be called by other modules. This includes "main" functions, interrupt routines, and callbacks. Replacement of providedEntry / expectedCallback. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=implementedEntry, implementedEntry.bsw ModuleEntry, implementedEntry.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
internalBehavior	BswInternalBehavior	*	aggr	The various BswInternalBehaviors associated with a Bsw ModuleDescription can be distributed over several physical files. Therefore the aggregation is <<atp Splitable>>. **Tags:** atp.Splitkey=internalBehavior, internalBehavior.short Name xml.sequenceOffset=65
moduleId	PositiveInteger	0..1	attr	Refers to the BSW Module Identifier defined by the AUTOSAR standard. For non-standardized modules, a proprietary identifier can be optionally chosen. **Tags:** xml.sequenceOffset=5

▽

△

Class	**BswModuleDescription**			
providedClient ServerEntry	BswModuleClientServer Entry	*	aggr	Specifies that this module provides a client server entry which can be called from another partition or core.This entry is declared locally to this context and will be connected to the requiredClientServerEntry of another or the same module via the configuration of the BSW Scheduler. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=providedClientServerEntry, providedClient ServerEntry.shortName, providedClientServer Entry.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=45
providedData	VariableDataPrototype	*	aggr	Specifies a data prototype provided by this module in order to be read from another partition or core.The providedData is declared locally to this context and will be connected to the requiredData of another or the same module via the configuration of the BSW Scheduler. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=providedData, providedData.shortName, providedData.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=55
providedMode Group	ModeDeclarationGroup Prototype	*	aggr	A set of modes which is owned and provided by this module or cluster. It can be connected to the required ModeGroups of other modules or clusters via the configuration of the BswScheduler. It can also be synchronized with modes provided via ports by an associated ServiceSwComponentType, EcuAbstraction SwComponentType or ComplexDeviceDriverSw ComponentType. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=providedModeGroup, providedMode Group.shortName, providedModeGroup.variation Point.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=25
releasedTrigger	Trigger	*	aggr	A Trigger released by this module or cluster. It can be connected to the requiredTriggers of other modules or clusters via the configuration of the BswScheduler. It can also be synchronized with Triggers provided via ports by an associated ServiceSwComponentType, Ecu AbstractionSwComponentType or ComplexDeviceDriver SwComponentType. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=releasedTrigger, releasedTrigger.shortName, releasedTrigger.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=35

▽

△

Class	**BswModuleDescription**			
requiredClient ServerEntry	BswModuleClientServer Entry	*	aggr	Specifies that this module requires a client server entry which can be implemented on another partition or core.This entry is declared locally to this context and will be connected to the providedClientServerEntry of another or the same module via the configuration of the BSW Scheduler. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=requiredClientServerEntry, requiredClient ServerEntry.shortName, requiredClientServer Entry.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=50
requiredData	VariableDataPrototype	*	aggr	Specifies a data prototype required by this module in oder to be provided from another partition or core.The required Data is declared locally to this context and will be connected to the providedData of another or the same module via the configuration of the BswScheduler. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=requiredData, requiredData.shortName, requiredData.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=60
requiredMode Group	ModeDeclarationGroup Prototype	*	aggr	Specifies that this module or cluster depends on a certain mode group. The requiredModeGroup is local to this context and will be connected to the providedModeGroup of another module or cluster via the configuration of the BswScheduler. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=requiredModeGroup, requiredMode Group.shortName, requiredModeGroup.variation Point.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=30
requiredTrigger	Trigger	*	aggr	Specifies that this module or cluster reacts upon an external trigger.This requiredTrigger is declared locally to this context and will be connected to the providedTrigger of another module or cluster via the configuration of the BswScheduler. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=requiredTrigger, requiredTrigger.shortName, requiredTrigger.variationPoint.shortLabel vh.latestBindingTime=preCompileTime xml.sequenceOffset=40

Table E.13: BswModuleDescription

Class	**BswModuleEntry**
Note	This class represents a single API entry (C-function prototype) into the BSW module or cluster. The name of the C-function is equal to the short name of this element with one exception: In case of multiple instances of a module on the same CPU, special rules for "infixes" apply, see description of class BswImplementation. **Tags:** atp.recommendedPackage=BswModuleEntrys This Class is only used by the AUTOSAR Classic Platform.

▽

△

Class	BswModuleEntry			
Base	*ARElement*, *ARObject*, *AtpBlueprint*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
argument (ordered)	SwServiceArg	*	aggr	An argument belonging to this BswModuleEntry. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=blueprintDerivationTime xml.sequenceOffset=45
bswEntryKind	BswEntryKindEnum	0..1	attr	This describes whether the entry is concrete or abstract. If the attribute is missing the entry is considered as concrete. **Tags:** xml.sequenceOffset=40
callType	BswCallType	0..1	attr	The type of call associated with this service. **Tags:** xml.sequenceOffset=25
execution Context	BswExecutionContext	0..1	attr	Specifies the execution context which is required (in case of entries into this module) or guaranteed (in case of entries called from this module) for this service. **Tags:** xml.sequenceOffset=30
function Prototype Emitter	NameToken	0..1	attr	This attribute is used to control the generation of function prototypes. If set to "RTE", the RTE generates the function prototypes in the Module Interlink Header File.
isReentrant	Boolean	0..1	attr	Reentrancy from the viewpoint of function callers: • true: Enables the service to be invoked again, before the service has finished. • false: It is prohibited to invoke the service again before is has finished. **Tags:** xml.sequenceOffset=15
isSynchronous	Boolean	0..1	attr	Synchronicity from the viewpoint of function callers: • true: This calls a synchronous service, i.e. the service is completed when the call returns. • false: The service (on semantical level) may not be complete when the call returns. **Tags:** xml.sequenceOffset=20
returnType	SwServiceArg	0..1	aggr	The return type belonging to this bswModuleEntry. **Tags:** atp.Splitkey=returnType, returnType.shortName xml.sequenceOffset=40
role	Identifier	0..1	attr	Specifies the role of the entry in the given context. It shall be equal to the standardized name of the service call, especially in cases where no ServiceIdentifier is specified, e.g. for callbacks. Note that the ShortName is not always sufficient because it maybe vendor specific (e.g. for callbacks which can have more than one instance). **Tags:** xml.sequenceOffset=10
serviceId	PositiveInteger	0..1	attr	Refers to the service identifier of the Standardized Interfaces of AUTOSAR basic software. For non-standardized interfaces, it can optionally be used for proprietary identification. **Tags:** xml.sequenceOffset=5

▽

△

Class	BswModuleEntry			
swServiceImpl Policy	SwServiceImplPolicy Enum	0..1	attr	Denotes the implementation policy as a standard function call, inline function or macro. This has to be specified on interface level because it determines the signature of the call. **Tags:** xml.sequenceOffset=35

Table E.14: BswModuleEntry

Class	BswSchedulableEntity			
Note	BSW module entity, which is designed for control by the BSW Scheduler. It may for example implement a so-called "main" function.			
Base	*ARObject*, *BswModuleEntity*, *ExecutableEntity*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	BswInternalBehavior.entity			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
–	–	–	–	–

Table E.15: BswSchedulableEntity

Class	BswServiceDependency			
Note	Specialization of ServiceDependency in the context of an BswInternalBehavior. It allows to associate BswModuleEntries and data defined for a BSW module or cluster to a given ServiceNeeds element.			
Base	*ARObject*, *ServiceDependency*			
Aggregated by	BswInternalBehavior.serviceDependency			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
assignedData	RoleBasedData Assignment	*	aggr	Defines the role of an associated data object (owned by this module or cluster) in the context of the ServiceNeeds element. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=assignedData, assignedData.variation Point.shortLabel vh.latestBindingTime=preCompileTime
assignedEntry Role	RoleBasedBswModule EntryAssignment	*	aggr	Defines the role of an associated BswModuleEntry in the context of the ServiceNeeds element. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=assignedEntryRole, assignedEntry Role.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
ident	BswService DependencyIdent	0..1	aggr	This adds the ability to become referrable to BswService Dependency. **Stereotypes:** atpIdentityContributor **Tags:** xml.sequenceOffset=-100
serviceNeeds	ServiceNeeds	0..1	aggr	The associated ServiceNeeds. **Tags:** atp.Splitkey=serviceNeeds, serviceNeeds.short Name

Table E.16: BswServiceDependency

Class	**ConsumedEventGroup**			
Note	This element represents an event-group to which the service consumer wants to subscribe.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ConsumedServiceInstance.consumedEventGroup			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
autoRequire	Boolean	0..1	attr	Defines that this ConsumedEventGroup shall be requested (subscribed) as soon as the corresponding ConsumedServiceInstance is requested. This could be at ECU start, if ConsumedServiceInstance.autoRequire is set to TRUE or as soon as the ConsumedServiceInstance is requested by the application, if ConsumedService Instance.autoRequire is set to FALSE.
eventGroup Identifier	PositiveInteger	0..1	attr	EventGroup ID. Shall be unique within one system to allow service discovery.
eventMulticast Address	ApplicationEndpoint	*	ref	This reference defines the multicast address or a multicast address resource where the events of the event group are received. If the multicast address is determined via configuration and not at runtime via service discovery this reference points to the multicast address over which the events will be received. If the multicast address is determined at runtime via service discovery this reference shall be used to define the necessary local multicast address resources, i.e. RAM space in the TcpIp module in which the multicast address is stored at runtime. Please note that in this case the referenced address may be defined as ANY UDP port and ANY IP address since the multicast address will be received at runtime. If several multicast addresses are considered to be used the ConsumedEventGroup shall point to different ApplicationEndpoint objects to reserve the necessary resources in the configuration. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=eventMulticastAddress, eventMulticast Address.applicationEndpoint, eventMulticast Address.variationPoint.shortLabel vh.latestBindingTime=postBuild
pduActivation RoutingGroup	PduActivationRouting Group	*	aggr	The ServiceDiscovery module is able to activate and deactivate the PDU routing for receiving events. **Tags:** atp.Splitkey=pduActivationRoutingGroup, pdu ActivationRoutingGroup.shortName
priority	PositiveInteger	0..1	attr	Defines the frame priority where values from 0 (best effort) to 7 (highest) are allowed.
sdClientTimer Config	SomeipSdClientEvent GroupTimingConfig	0..1	ref	Client Timing configuration settings that are EventGroup specific. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=sdClientTimerConfig, sdClientTimer Config.someipSdClientEventGroupTimingConfig, sdClient TimerConfig.variationPoint.shortLabel vh.latestBindingTime=postBuild

Table E.17: ConsumedEventGroup

Class	**ConsumedServiceInstance**			
Note	Service instances that are consumed by the ECU that is connected via the ApplicationEndpoint to a CommunicationConnector.			
Base	*ARObject*, *AbstractServiceInstance*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ServiceInstanceCollectionSet.serviceInstance			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
allowedService Provider	NetworkEndpoint	*	ref	NetworkEndpoint on which the ProvidedServiceInstance that is communicating with this ConsumedService Instance is allowed to be located so that the ACL check in the ServiceDiscovery is successful and the connection is allowed to be established. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=allowedServiceProvider, allowedService Provider.networkEndpoint, allowedService Provider.variationPoint.shortLabel atp.Status=draft vh.latestBindingTime=postBuild
autoRequire	Boolean	0..1	attr	Defines that this ConsumedServiceInstance shall be required (searched for) by the service discovery at ECU start.
blocklisted Version	SomeipServiceVersion	*	aggr	Collection of blocklisted versions **Tags:** atp.Splitkey=blocklistedVersion atp.Status=draft
consumedEvent Group	ConsumedEventGroup	*	aggr	Selection of event-groups the consumer wants to subscribe for. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=consumedEventGroup, consumedEvent Group.shortName, consumedEventGroup.variation Point.shortLabel vh.latestBindingTime=postBuild
eventMulticast Subscription Address	ApplicationEndpoint	0..1	ref	Multicast Address that is used by the client to subscribe to the server: This enables the multicast subscription feature. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=eventMulticastSubscriptionAddress, event MulticastSubscriptionAddress.applicationEndpoint, event MulticastSubscriptionAddress.variationPoint.shortLabel vh.latestBindingTime=postBuild
instance Identifier	AnyServiceInstanceId	0..1	attr	This attribute represents the ability to describe the required service instance ID.
localUnicast Address	ApplicationEndpoint	0..2	ref	The local address over which the CSI is consumed (udp, tcp or both). **Stereotypes:** atpVariation **Tags:** atp.Splitkey=localUnicastAddress, localUnicast Address.applicationEndpoint, localUnicast Address.variationPoint.shortLabel vh.latestBindingTime=postBuild
minorVersion	AnyVersionString	0..1	attr	Minor Version of the ServiceInterface. Value can be set to a number that represents the Minor Version of the searched service or to ANY.



△

Class	**ConsumedServiceInstance**			
remoteUnicast Address	ApplicationEndpoint	0..2	ref	This reference defines the remote address where the service provider is located. This reference shall ONLY be used if the remote address is determined from the configuration and not at runtime from the Service Discovery. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=remoteUnicastAddress, remoteUnicast Address.applicationEndpoint, remoteUnicast Address.variationPoint.shortLabel vh.latestBindingTime=postBuild
sdClientTimer Config	SomeipSdClientService InstanceConfig	0..1	ref	Client specific configuration settings relevant for the SOME/IP service discovery. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=sdClientTimerConfig, sdClientTimer Config.someipSdClientServiceInstanceConfig, sdClient TimerConfig.variationPoint.shortLabel vh.latestBindingTime=postBuild
serviceIdentifier	PositiveInteger	0..1	attr	This attribute represents the ability to describe the SOME/IP service ID that is searched.
versionDriven FindBehavior	ServiceVersion AcceptanceKindEnum	0..1	attr	Defines the service discovery find behavior. **Tags:** atp.Status=draft

Table E.18: ConsumedServiceInstance

Class	***DataMapping*** (abstract)			
Note	Mapping of port elements (data elements and parameters) to frames and signals.			
Base	*ARObject*			
Subclasses	ClientServerToSignalMapping, SenderReceiverToSignalGroupMapping, SenderReceiverToSignal Mapping, TriggerToSignalMapping			
Aggregated by	SystemMapping.dataMapping			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
introduction	DocumentationBlock	0..1	aggr	This represents introductory documentation about the data mapping. **Tags:** atp.Splitkey=introduction

Table E.19: DataMapping

Class	***Describable*** (abstract)			
Note	This meta-class represents the ability to add a descriptive documentation to non identifiable elements.			
Base	*ARObject*			
Subclasses	CyclicTiming, EventControlledTiming, FunctionGroupErrorMapping, HwElementConnector, HwPin Connector, HwPinGroupConnector, IPduTiming, Ipv4DhcpServerConfiguration, Ipv6DhcpServer Configuration, PncMapping, *TransformationComSpecProps*, *TransformationDescription*, *Transformation ISignalProps*			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	***Describable*** (abstract)			
adminData	AdminData	0..1	aggr	This represents the administrative data for the describable object. **Tags:** atp.Splitkey=adminData xml.sequenceOffset=-20
category	CategoryString	0..1	attr	The category is a keyword that specializes the semantics of the Describable. It affects the expected existence of attributes and the applicability of constraints. **Tags:** xml.sequenceOffset=-50
desc	MultiLanguageOverview Paragraph	0..1	aggr	This represents a general but brief (one paragraph) description what the object in question is about. It is only one paragraph! Desc is intended to be collected into overview tables. This property helps a human reader to identify the object in question. More elaborate documentation, (in particular how the object is built or used) should go to "introduction". **Tags:** atp.Splitkey=desc xml.sequenceOffset=-60
introduction	DocumentationBlock	0..1	aggr	This represents more information about how the object in question is built or is used. Therefore it is a DocumentationBlock. **Tags:** atp.Splitkey=introduction xml.sequenceOffset=-30

Table E.20: Describable

Class	**DiagnosticDataElement**			
Note	This meta-class represents the ability to describe a concrete piece of data to be taken into account for diagnostic purposes.			
Base	*ARObject*, *DiagnosticServiceMappingDiagTarget*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*DiagnosticAbstractParameter*.dataElement			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
arraySize Semantics	ArraySizeSemantics Enum	0..1	attr	This attribute controls the meaning of the value of the array size.
maxNumberOf Elements	PositiveInteger	0..1	attr	The existence of this attribute turns the data instance into an array of data. The attribute determines the size of the array in terms of how many elements the array can take.
scalingInfoSize	PositiveInteger	0..1	attr	Size in bytes of scaling information for the DiagnosticData Element if used with DiagnosticReadScalingDataBy Identifier
swDataDef Props	SwDataDefProps	0..1	aggr	This property allows to specify data definition properties in order to support the definition of e.g. computation formulae and data constraints. **Tags:** atp.Splitkey=swDataDefProps

Table E.21: DiagnosticDataElement

Class	**DltArgument**			
Note	This element defines an Argument in a DltMessage.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	DltMessage.dltArgument			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
dltArgument Props	DltArgumentProps	0..1	ref	Additional properties of DltArguments **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dltArgumentProps, dltArgumentProps.dltArgumentProps, dltArgumentProps.variationPoint.shortLabel vh.latestBindingTime=systemDesignTime
optional	Boolean	0..1	attr	This attribute defines whether the argument is optional or not. If set to true, the argument can be omitted from the payload of a DLT message.
predefinedText	Boolean	0..1	attr	This attribute defines whether the DltArgument is a predefinedText (Static Data).

Table E.22: DltArgument

Class	«atpMixed» **DocumentationBlock**			
Note	This class represents a documentation block. It is made of basic text structure elements which can be displayed in a table cell.			
Base	*ARObject*			
Aggregated by	ApplicabilityInfo.remark, AUTOSAR.introduction, BlueprintGenerator.introduction, *BlueprintPolicy Modifiable*.blueprintDerivationGuide, *DataMapping*.introduction, DefItem.def, *Describable*.introduction, EcucAddInfoParamValue.value, EcuResourceEstimation.introduction, Entry.entryContents, Frame Mapping.introduction, *GeneralAnnotation*.annotationText, *Identifiable*.introduction, IPdu Mapping.introduction, ISignalMapping.introduction, Item.itemContents, LabeledItem.itemContents, Life CycleInfo.remark, *MappingConstraint*.introduction, MsrQueryP2.msrQueryResultP2, Note.noteText, *ScheduleTableEntry*.introduction, *SignalPathConstraint*.introduction, StructuredReq.conflicts, Structured Req.dependencies, StructuredReq.description, StructuredReq.rationale, StructuredReq.remark, StructuredReq.supportingMaterial, StructuredReq.useCase, SwAxisType.swGenericAxisDesc, Topic Content.blockLevelContent, TraceableText.text, VariationPoint.blueprintCondition			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
defList	DefList	0..1	aggr	This represents a definition list in the documentation block. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=40
figure	MlFigure	0..1	aggr	This represents a figure in the documentation block. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=70
formula	MlFormula	0..1	aggr	This is a formula in the definition block. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=60
labeledList	LabeledList	0..1	aggr	This represents a labeled list. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=50

△

Class	«atpMixed» **DocumentationBlock**			
list	List	0..1	aggr	This represents numbered or unnumbered list. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=30
msrQueryP2	MsrQueryP2	0..1	aggr	This represents automatically contributed contents provided by an msrquery in the context of Documentation Block.
note	Note	0..1	aggr	This represents a note in the text flow. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=80
p	MultiLanguage Paragraph	0..1	aggr	This is one particular paragraph. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=10
structuredReq	StructuredReq	0..1	aggr	This aggregation supports structured requirements embedded in a documentation block. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=100
trace	TraceableText	0..1	aggr	This represents traceable text in the documentation block. This allows to specify requirements/constraints in any documentation block. The kind of the trace is specified in the category. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=90
verbatim	MultiLanguageVerbatim	0..1	aggr	This represents one particular verbatim text. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=postBuild xml.sequenceOffset=20

Table E.23: DocumentationBlock

Class	**EcuInstance**			
Note	ECUInstances are used to define the ECUs used in the topology. The type of the ECU is defined by a reference to an ECU specified with the ECU resource description. **Tags:** atp.recommendedPackage=EcuInstances			
Base	*ARObject*, *CollectableElement*, *FibexElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	EcuInstance			
associatedComIPduGroup	ISignalIPduGroup	*	ref	With this reference it is possible to identify which ISignalIPduGroups are applicable for which Communication Connector/ ECU. Only top level ISignalIPduGroups shall be referenced by an EcuInstance. If an ISignalIPduGroup contains other ISignalIPduGroups than these contained ISignalIPdu Groups shall not be referenced by the EcuInstance. Contained ISignalIPduGroups are associated to an Ecu Instance via the top level ISignalIPduGroup. **Tags:** atp.Splitkey=associatedComIPduGroup This Attribute is only used by the AUTOSAR Classic Platform.
associated ConsumedProvided ServiceInstance Group	ConsumedProvided ServiceInstanceGroup	*	ref	With this reference it is possible to identify which ConsumedProvidedServiceInstanceGroups are applicable for which ECUInstance. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=associatedConsumedProvidedService InstanceGroup, associatedConsumedProvidedService InstanceGroup.consumedProvidedServiceInstanceGroup, associatedConsumedProvidedServiceInstance Group.variationPoint.shortLabel vh.latestBindingTime=postBuild
associatedPdurIPduGroup	PdurIPduGroup	*	ref	With this reference it is possible to identify which PduR IPdu Groups are applicable for which Communication Connector/ ECU. **Tags:** atp.Splitkey=associatedPdurIPduGroup
channel Synchronous Wakeup	Boolean	0..1	attr	If this parameter is available and set to true, then all available channels will be woken up as soon as at least one channel wakeup occurs. If PNCs are configured, then all PNCs will be requested upon a channel wakeup.
clientIdRange	ClientIdRange	0..1	aggr	Restriction of the Client Identifier for this Ecu to an allowed range of numerical values. The Client Identifier of the transaction handle is generated by the client RTE for inter-Ecu Client/Server communication. **Tags:** atp.Splitkey=clientIdRange
com Configuration GwTimeBase	TimeValue	0..1	attr	The period between successive calls to Com_Main FunctionRouteSignals of the AUTOSAR COM module in seconds. This Attribute is only used by the AUTOSAR Classic Platform.
com ConfigurationRx TimeBase	TimeValue	0..1	attr	The period between successive calls to Com_Main FunctionRx of the AUTOSAR COM module in seconds. This Attribute is only used by the AUTOSAR Classic Platform.
com ConfigurationTx TimeBase	TimeValue	0..1	attr	The period between successive calls to Com_Main FunctionTx of the AUTOSAR COM module in seconds. This Attribute is only used by the AUTOSAR Classic Platform.
comEnable MDTForCyclic Transmission	Boolean	0..1	attr	Enables for the Com module of this EcuInstance the minimum delay time monitoring for cyclic and repeated transmissions (TransmissionModeTiming has cyclic Timing assigned or eventControlledTiming with numberOf Repetitions > 0). This Attribute is only used by the AUTOSAR Classic Platform.

▽

△

Class	EcuInstance			
commController	Communication Controller	*	aggr	CommunicationControllers of the ECU. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=commController, commController.shortName, commController.variationPoint.shortLabel vh.latestBindingTime=postBuild
connector	Communication Connector	*	aggr	All channels controlled by a single controller. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=connector, connector.shortName, connector.variationPoint.shortLabel vh.latestBindingTime=postBuild
dltConfig	DltConfig	0..1	aggr	Describes the Dlt configuration on this EcuInstance. **Tags:** atp.Splitkey=dltConfig This Attribute is only used by the AUTOSAR Classic Platform.
doIpConfig	DoIpConfig	0..1	aggr	DoIp configuration on this EcuInstance. **Tags:** atp.Splitkey=doIpConfig atp.Status=draft This Attribute is only used by the AUTOSAR Classic Platform.
ecuTaskProxy	OsTaskProxy	*	ref	Reference to OsTaskProxies assigned to the Ecu Instance. **Tags:** atp.Splitkey=ecuTaskProxy This Attribute is only used by the AUTOSAR Classic Platform.
ethSwitchPort Group Derivation	Boolean	0..1	attr	Defines whether the derivation of SwitchPortGroups based on VLAN and/or CouplingPort.pncMapping shall be performed for this EcuInstance. If not defined the derivation shall not be done. This Attribute is only used by the AUTOSAR Classic Platform.
firewallRule	StateDependentFirewall	*	ref	Firewall rules defined in the context of an EcuInstance. **Tags:** atp.Splitkey=firewallRule
j1939Node	J1939Node	*	aggr	Optional collection of J1939Nodes defined on this Ecu Instance. **Tags:** atp.Splitkey=j1939Node, j1939Node.shortName This Attribute is only used by the AUTOSAR Classic Platform.
partition	EcuPartition	*	aggr	Optional definition of Partitions within an Ecu. **Tags:** atp.Splitkey=partition, partition.shortName This Attribute is only used by the AUTOSAR Classic Platform.
pncNmRequest	Boolean	0..1	attr	Defines if this EcuInstance shall request Nm on all its PhysicalChannels which have Nm variant set to FULL each time a PNC is requested.
pncPrepare SleepTimer	TimeValue	0..1	attr	Time in seconds the PNC state machine shall wait in PNC_PREPARE_SLEEP.
pnc Synchronous Wakeup	Boolean	0..1	attr	If this parameter is available and set to true then all available PNCs will be woken up as soon as a channel wakeup occurs. This is ensured by adding all PNCs to all channel wakeup sources during upstream mapping.

▽

△

Class	EcuInstance			
pnResetTime	TimeValue	0..1	attr	Specifies the runtime of the reset timer in seconds. This reset time is valid for the reset of PN requests in the EIRA and in the ERA.
sleepMode Supported	Boolean	0..1	attr	Specifies whether the ECU instance may be put to a "low power mode" • true: sleep mode is supported • false: sleep mode is not supported Note: This flag may only be set to "true" if the feature is supported by both hardware and basic software. This Attribute is only used by the AUTOSAR Classic Platform.
tcpIpIcmpProps	EthTcpIpIcmpProps	0..1	ref	EcuInstance specific ICMP (Internet Control Message Protocol) attributes **Tags:** atp.Splitkey=tcpIpIcmpProps This Attribute is only used by the AUTOSAR Classic Platform.
tcpIpProps	EthTcpIpProps	0..1	ref	EcuInstance specific TcpIp Stack attributes. **Tags:** atp.Splitkey=tcpIpProps This Attribute is only used by the AUTOSAR Classic Platform.
wakeUpOver BusSupported	Boolean	0..1	attr	Driver support for wakeup over Bus. This Attribute is only used by the AUTOSAR Classic Platform.

Table E.24: EcuInstance

Class	EndToEndTransformationDescription			
Note	EndToEndTransformationDescription holds these attributes which are profile specific and have the same value for all E2E transformers.			
Base	*ARObject*, *Describable*, *TransformationDescription*			
Aggregated by	TransformationTechnology.transformationDescription			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
clearFromValid ToInvalid	Boolean	0..1	attr	Clear monitoring window on transition from state Valid to state Invalid.
counterOffset	PositiveInteger	0..1	attr	Offset of the counter in the Data[] array in bits.
crcOffset	PositiveInteger	0..1	attr	Offset of the CRC in the Data[] array in bits.
dataIdMode	DataIdModeEnum	0..1	attr	This attribute describes the inclusion mode that is used to include the implicit two-byte Data ID in the one-byte CRC.
dataIdNibble Offset	PositiveInteger	0..1	attr	Offset of the Data ID nibble in the Data[] array in bits.
e2eProfile Compatibility Props	E2EProfileCompatibility Props	0..1	ref	Reference to additional settings for the E2E state machine. **Tags:** atp.Splitkey=e2eProfileCompatibilityProps
maxDelta Counter	PositiveInteger	0..1	attr	Maximum allowed difference between two counter values of two consecutively received valid messages. For example, if the receiver gets data with counter 1 and Max DeltaCounter is 3, then at the next reception the receiver can accept Counters with values 2, 3 or 4.
maxErrorState Init	PositiveInteger	0..1	attr	Maximal number of checks in which ProfileStatus equal to E2E_P_ERROR was determined, within the last Window Size checks, for the state E2E_SM_INIT.

▽

△

Class	**EndToEndTransformationDescription**			
maxErrorState Invalid	PositiveInteger	0..1	attr	Maximal number of checks in which ProfileStatus equal to E2E_P_ERROR was determined, within the last Window Size checks, for the state E2E_SM_INVALID.
maxErrorState Valid	PositiveInteger	0..1	attr	Maximal number of checks in which ProfileStatus equal to E2E_P_ERROR was determined, within the last Window Size checks, for the state E2E_SM_VALID.
maxNoNewOr RepeatedData	PositiveInteger	0..1	attr	The maximum allowed amount of consecutive failed counter checks.
minOkStateInit	PositiveInteger	0..1	attr	Minimal number of checks in which ProfileStatus equal to E2E_P_OK was determined, within the last WindowSize checks, for the state E2E_SM_INIT.
minOkState Invalid	PositiveInteger	0..1	attr	Minimal number of checks in which ProfileStatus equal to E2E_P_OK was determined, within the last WindowSize checks, for the state E2E_SM_INVALID.
minOkState Valid	PositiveInteger	0..1	attr	Minimal number of checks in which ProfileStatus equal to E2E_P_OK was determined, within the last WindowSize checks, for the state E2E_SM_VALID.
offset	PositiveInteger	0..1	attr	Offset of the E2E header in the Data[] array in bits.
profileBehavior	EndToEndProfile BehaviorEnum	0..1	attr	Behavior of the check functionality
profileName	NameToken	0..1	attr	Definition of the E2E profile.
syncCounterInit	PositiveInteger	0..1	attr	Number of checks required for validating the consistency of the counter that shall be received with a valid counter (i.e. counter within the allowed lock-in range) after the detection of an unexpected behavior of a received counter.
upperHeader BitsToShift	PositiveInteger	0..1	attr	This attribute describes the number of upper-header bits to be shifted. value = 0 or not present: shift of upper header is NOT performed. value > 0: the E2E Transformer on the protect-side, takes the first upperHeaderBitsToShift bits from the upper buffer (e.g. SOME/IP header part generated by SOME/IP transformer) and shifts them towards the lower bytes and bits within the Data[] for the length of the E2E header (e.g. 12 bytes in case of E2E Profile 4). This means the shift distance is fixed - it depends on the E2E header size - what is configured here is the number of bits that are to be shifted. This option is defined because the Some/IP header generated by SOME/IP transformer shall be, due to compatibility between non-protected and E2 E-protected communication, at the same position, which is before E2E header.
windowSizeInit	PositiveInteger	0..1	attr	Size of the monitoring window of state Init for the E2E state machine.
windowSize Invalid	PositiveInteger	0..1	attr	Size of the monitoring window of state Invalid for the E2E state machine.
windowSize Valid	PositiveInteger	0..1	attr	Size of the monitoring window of state Valid for the E2E state machine.

Table E.25: EndToEndTransformationDescription

Class	EvaluatedVariantSet			
Note	This meta class represents the ability to express if a set of ARElements is able to support one or more particular variants. In other words, for a given set of evaluatedElements this meta class represents a table of evaluated variants, where each PredefinedVariant represents one column. In this column each descendant sw SystemconstantValue resp. postbuildVariantCriterionValue represents one entry. In a graphical representation each swSystemconstantValueSet / postBuildVariantCriterionValueSet could be used as an intermediate headline in the table column. If the approvalStatus is "APPROVED" it expresses that the collection of CollectableElements is known be valid for the given evaluatedVariants. Note that the EvaluatedVariantSet is a CollectableElement. This allows to establish a hierarchy of EvaluatedVariantSets. **Tags:** atp.recommendedPackage=EvaluatedVariantSets			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
approvalStatus	NameToken	0..1	attr	Defines the approval status of a predefined variant. Two values are predefined: "APPROVED" and "REJECTED": • Approved variants are known to work. • Rejected variants are known NOT to work. Further values can be approved on a per-company basis; within AUTOSAR only "APPROVED" and "REJECTED" should be recognized.
evaluated Element	CollectableElement	*	ref	This represents a particular element which is evaluated in context of the EvaluatedVariants. The approvalStatus applies to this element (and all of its descendants). In other words, the referenced elements are those that were considered when the predefined variant was evaluated. **Tags:** atp.Splitkey=evaluatedElement
evaluated Variant	PredefinedVariant	*	ref	This metaclass represents one particular variant which was evaluated. LowerMultiplicity is set to 0 to support a stepwise approach. **Tags:** atp.Splitkey=evaluatedVariant

Table E.26: EvaluatedVariantSet

Class	FlatInstanceDescriptor			
Note	Represents exactly one node (e.g. a component instance or data element) of the instance tree of a software system. The purpose of this element is to map the various nested representations of this instance to a flat representation and assign a unique name (shortName) to it. Use cases: • Specify unique names of measurable data to be used by MCD tools • Specify unique names of calibration data to be used by MCD tool • Specify a unique name for an instance of a component prototype in the ECU extract of the system description Note that in addition it is possible to assign alias names via AliasNameAssignment. This Class is only used by the AUTOSAR Classic Platform.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	FlatMap.instance			
Attribute	**Type**	**Mult.**	**Kind**	**Note**

▽

△

Class	**FlatInstanceDescriptor**			
bsw Implementation	BswImplementation	0..1	ref	Reference to BswImplementation that defines the context for the AutosarDataPrototype that is referenced by Flat InstanceDescriptor.dataPrototype. **Tags:** atp.Splitkey=bswImplementation
dataPrototype	AutosarDataPrototype	0..1	ref	Reference to a DataPrototype that is defined in the Bsw InternalBehavior in the context of a BswImplementation that is defined by the FlatInstanceDescriptor.bsw Implementation reference. **Tags:** atp.Splitkey=dataPrototype
ecuExtract Reference	AtpFeature	0..1	iref	Refers to the instance in the ECU extract. This is valid only, if the FlatMap is used in the context of an ECU extract. The reference shall be such that it uniquely defines the object instance. For example, if a data prototype is declared as a role within an SwcInternalBehavior, it is not enough to state the SwcInternalBehavior as context and the aggregated data prototype as target. In addition, the reference shall also include the complete path identifying instance of the component prototype and the Atomic SoftwareComponentType, which is refered by the particular SwcInternalBehavior. **Tags:** atp.Splitkey=ecuExtractReference, ecuExtract Reference.contextElement, ecuExtractReference.target xml.sequenceOffset=40 **InstanceRef implemented by:** AnyInstanceRef
role	Identifier	0..1	attr	The role denotes the particular role of the downstream memory location described by this FlatInstanceDescriptor. It applies to use case where one upstream object results in multiple downstream objects, e.g. ModeDeclaration GroupPrototypes which are measurable. In this case the RTE will provide locations for current mode, previous mode and next mode.
rtePluginProps	RtePluginProps	0..1	aggr	The properties of a communication graph with respect to the utilization of RTE Implementation Plug-in. **Tags:** atp.Splitkey=rtePluginProps
swDataDef Props	SwDataDefProps	0..1	aggr	The properties of this FlatInstanceDescriptor. **Tags:** atp.Splitkey=swDataDefProps
upstream Reference	AtpFeature	0..1	iref	Refers to the instance in the context of an "upstream" description, which could be: the SYSTEM_ DESCRIPTION, or SYSTEM_EXTRACT, or ECU_ SYSTEM_DESCRIPTION, or SW_CLUSTER_SYSTEM_ DESCRIPTION, or the basic software module description (in this case only the target reference of the AnyInstance Ref is needed), or (if a flat map is used in preliminary context) a description of an atomic component or composition. This reference is optional in case the flat map is used in ECU context. The reference shall be such that it uniquely defines the object instance in the given context. For example, if a data prototype is declared as a role within an SwcInternal Behavior, it is not enough to state the Swc Internal Behavior as context and the aggregated data prototype as target. In addition, the reference shall also include the complete path identifying the instance of the component prototype that contains the particular instance of Swc InternalBehavior. ▽

▽

△

Class	FlatInstanceDescriptor			
				△ **Tags:** atp.Splitkey=upstreamReference, upstream Reference.contextElement, upstreamReference.target xml.sequenceOffset=20 **InstanceRef implemented by:** AnyInstanceRef

Table E.27: FlatInstanceDescriptor

Class	*HwDescriptionEntity* (abstract)			
Note	This meta-class represents the ability to describe a hardware entity.			
Base	*ARObject*, *Referrable*			
Subclasses	HwElement, HwPin, HwPinGroup, HwType			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
hwAttribute Value	HwAttributeValue	*	aggr	This aggregation represents a particular hardware attribute value. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=hwAttributeValue, hwAttributeValue.variation Point.shortLabel vh.latestBindingTime=systemDesignTime xml.sequenceOffset=50
hwCategory	HwCategory	*	ref	One of the associations representing one particular category of the hardware entity. **Tags:** atp.Splitkey=hwCategory xml.sequenceOffset=30
hwType	HwType	0..1	ref	This association is used to assign an optional HwType which contains the common attribute values for all occurences of this HwDescriptionEntity. Note that Hw Types can not be redefined and therefore shall not have a hwType reference. **Tags:** atp.Splitkey=hwType

Table E.28: HwDescriptionEntity

Class	HwElement			
Note	This represents the ability to describe Hardware Elements on an instance level. The particular types of hardware are distinguished by the category. This category determines the applicable attributes. The possible categories and attributes are defined in HwCategory. **Tags:** atp.recommendedPackage=HwElements			
Base	*ARElement*, *ARObject*, *CollectableElement*, *HwDescriptionEntity*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
hwElement Connection	HwElementConnector	*	aggr	This represents one particular connection between two hardware elements. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=hwElementConnection, hwElement Connection.variationPoint.shortLabel vh.latestBindingTime=systemDesignTime xml.sequenceOffset=110

▽

△

Class	HwElement			
hwPinGroup	HwPinGroup	*	aggr	This aggregation is used to describe the connection facilities of a hardware element. Note that hardware element has no pins but only pingroups. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=hwPinGroup, hwPinGroup.shortName, hwPinGroup.variationPoint.shortLabel vh.latestBindingTime=systemDesignTime xml.sequenceOffset=90
nestedElement	HwElement	*	ref	This association is used to establish hierarchies of hw elements. Note that one particular HwElement can be target of this association only once. I.e. multiple instantiation of the same HwElement is not supported (at any hierarchy level). **Stereotypes:** atpVariation **Tags:** atp.Splitkey=nestedElement, nestedElement.hwElement, nestedElement.variationPoint.shortLabel vh.latestBindingTime=systemDesignTime xml.sequenceOffset=70

Table E.29: HwElement

Class	HwType			
Note	This represents the ability to describe Hardware types on an abstract level. The particular types of hardware are distinguished by the category. This category determines the applicable attributes. The possible categories and attributes are defined in HwCategory. **Tags:** atp.recommendedPackage=HwTypes			
Base	*ARElement*, *ARObject*, *CollectableElement*, *HwDescriptionEntity*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	Type	Mult.	Kind	Note
–	–	–	–	–

Table E.30: HwType

Class	*IPdu* (abstract)			
Note	The IPdu (Interaction Layer Protocol Data Unit) element is used to sum up all Pdus that are routed by the PduR.			
Base	*ARElement*, *ARObject*, *CollectableElement*, *FibexElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Pdu*, *Referrable*, *UploadableDesignElement*, *UploadablePackageElement*			
Subclasses	ContainerIPdu, DcmIPdu, GeneralPurposeIPdu, ISignalIPdu, J1939DcmIPdu, J1939ProtectedIPdu, MultiplexedIPdu, NPdu, SecuredIPdu, UserDefinedIPdu			
Aggregated by	ARPackage.element			
Attribute	Type	Mult.	Kind	Note
–	–	–	–	–

Table E.31: IPdu

Class	ISignal			
Note	Signal of the Interaction Layer. The RTE supports a "signal fan-out" where the same System Signal is sent in different SignalIPdus to multiple receivers. To support the RTE "signal fan-out" each SignalIPdu contains ISignals. If the same System Signal is to be mapped into several SignalIPdus there is one ISignal needed for each ISignalToIPduMapping. ISignals describe the Interface between the Precompile configured RTE and the potentially Postbuild configured Com Stack (see ECUC Parameter Mapping). In case of the SystemSignalGroup an ISignal shall be created for each SystemSignal contained in the SystemSignalGroup. **Tags:** atp.recommendedPackage=ISignals			
Base	*ARElement*, *ARObject*, *CollectableElement*, *FibexElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *UploadableDesignElement*, *UploadablePackageElement*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
data Transformation	DataTransformation	0..1	ref	Optional reference to a DataTransformation which represents the transformer chain that is used to transform the data that shall be placed inside this ISignal. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=dataTransformation, data Transformation.dataTransformation, data Transformation.variationPoint.shortLabel vh.latestBindingTime=codeGenerationTime
dataTypePolicy	DataTypePolicyEnum	0..1	attr	With the aggregation of SwDataDefProps an ISignal specifies how it is represented on the network. This representation follows a particular policy. Note that this causes some redundancy which is intended and can be used to support flexible development methodology as well as subsequent integrity checks. If the policy "networkRepresentationFromComSpec" is chosen the network representation from the ComSpec that is aggregated by the PortPrototype shall be used. If the "override" policy is chosen the requirements specified in the PortInterface and in the ComSpec are not fulfilled by the networkRepresentationProps. In case the System Description doesn't use a complete Software Component Description (VFB View) the "legacy" policy can be chosen.
initValue	ValueSpecification	0..1	aggr	Optional definition of a ISignal's initValue in case the System Description doesn't use a complete Software Component Description (VFB View). This supports the inclusion of legacy system signals. This value can be used to configure the Signal's "Init Value". If a full DataMapping exist for the SystemSignal this information may be available from a configured Sender ComSpec and ReceiverComSpec. In this case the initvalues in SenderComSpec and/or ReceiverComSpec override this optional value specification. Further restrictions apply from the RTE specification. **Tags:** atp.Splitkey=initValue
iSignalProps	ISignalProps	0..1	aggr	Additional optional ISignal properties that may be stored in different files. **Tags:** atp.Splitkey=iSignalProps
iSignalType	ISignalTypeEnum	0..1	attr	This attribute defines whether this iSignal is an array that results in a UINT8_N / UINT8_DYN ComSignalType in the COM configuration or a primitive type.

△

Class	**ISignal**			
length	UnlimitedInteger	0..1	attr	Size of the signal in bits. The size needs to be derived from the mapped VariableDataPrototype according to the mapping of primitive DataTypes to BaseTypes as used in the RTE. Indicates maximum size for dynamic length signals. The ISignal length of zero bits is allowed.
network Representation Props	SwDataDefProps	0..1	aggr	Specification of the actual network representation. The usage of SwDataDefProps for this purpose is restricted to the attributes compuMethod and baseType. The optional baseType attributes "memAllignment" and "byteOrder" shall not be used. The attribute "dataTypePolicy" in the SystemTemplate element defines whether this network representation shall be ignored and the information shall be taken over from the network representation of the ComSpec. If "override" is chosen by the system integrator the network representation can violate against the requirements defined in the PortInterface and in the network representation of the ComSpec. In case that the System Description doesn't use a complete Software Component Description (VFB View) this element is used to configure "ComSignalDataInvalid Value" and the Data Semantics. **Tags:** atp.Splitkey=networkRepresentationProps
systemSignal	SystemSignal	0..1	ref	Reference to the System Signal that is supposed to be transmitted in the ISignal. **Tags:** atp.Splitkey=systemSignal
timeout Substitution Value	ValueSpecification	0..1	aggr	Defines and enables the ComTimeoutSubstituition for this ISignal. **Tags:** atp.Splitkey=timeoutSubstitutionValue
transformation ISignalProps	TransformationISignal Props	*	aggr	A transformer chain consists of an ordered list of transformers. The ISignal specific configuration properties for each transformer are defined in the TransformationISignalProps class. The transformer configuration properties that are common for all ISignals are described in the TransformationTechnology class. **Tags:** atp.Splitkey=transformationISignalProps

Table E.32: ISignal

Class	**ISignalGroup**			
Note	SignalGroup of the Interaction Layer. The RTE supports a "signal fan-out" where the same System Signal Group is sent in different SignalIPdus to multiple receivers. An ISignalGroup refers to a set of ISignals that shall always be kept together. A ISignalGroup represents a COM Signal Group. Therefore it is recommended to put the ISignalGroup in the same Package as ISignals (see atp.recommendedPackage) **Tags:** atp.recommendedPackage=ISignalGroups			
Base	*ARElement*, *ARObject*, *CollectableElement*, *FibexElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *UploadableDesignElement*, *UploadablePackageElement*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	**ISignalGroup**			
comBased SignalGroup Transformation	DataTransformation	0..1	ref	Optional reference to a DataTransformation which represents the transformer chain that is used to transform the data that shall be placed inside this ISignalGroup based on the COMBasedTransformer approach. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=comBasedSignalGroupTransformation, comBasedSignalGroupTransformation.dataTransformation, comBasedSignalGroupTransformation.variationPoint.shortLabel vh.latestBindingTime=codeGenerationTime
iSignal	ISignal	*	ref	Reference to a set of ISignals that shall always be kept together. **Tags:** atp.Splitkey=iSignal
systemSignal Group	SystemSignalGroup	0..1	ref	Reference to the SystemSignalGroup that is defined on VFB level and that is supposed to be transmitted in the ISignalGroup. **Tags:** atp.Splitkey=systemSignalGroup
transformation ISignalProps	TransformationISignal Props	*	aggr	A transformer chain consists of an ordered list of transformers. The ISignalGroup specific configuration properties for each transformer are defined in the TransformationISignalProps class. The transformer configuration properties that are common for all ISignal Groups are described in the TransformationTechnology class. **Tags:** atp.Splitkey=transformationISignalProps

Table E.33: ISignalGroup

Class	***Identifiable*** (abstract)
Note	Instances of this class can be referred to by their identifier (within the namespace borders). In addition to this, Identifiables are objects which contribute significantly to the overall structure of an AUTOSAR description. In particular, Identifiables might contain Identifiables.
Base	*ARObject*, *MultilanguageReferrable*, *Referrable*
Subclasses	ARPackage, *AbstractDoIpLogicAddressProps*, *AbstractEvent*, *AbstractImplementationDataTypeElement*, *AbstractSecurityEventFilter*, *AbstractSecurityIdsmInstanceFilter*, *AbstractServiceInstance*, AppOsTask ProxyToEcuTaskProxyMapping, ApplicationEndpoint, ApplicationError, ApplicationPartitionToEcuPartition Mapping, AppliedStandard, AsynchronousServerCallResultPoint, *AtpBlueprint*, *AtpClassifier*, *Atp Feature*, AutosarOperationArgumentInstance, AutosarVariableInstance, *BinaryManifestAddressable Object*, BinaryManifestItemDefinition, *BinaryManifestResource*, BinaryManifestResourceDefinition, Block State, BswInternalTriggeringPoint, BswModuleDependency, *BuildActionEntity*, BuildActionEnvironment, CanSecSecureChannel, CanTpAddress, CanTpChannel, CanTpNode, Chapter, ClientIdDefinition, Client ServerOperation, Code, *CollectableElement*, ComManagementMapping, *CommConnectorPort*, *CommunicationConnector*, *CommunicationController*, Compiler, ConsistencyNeeds, ConsumedEvent Group, *CouplingElementAbstractDetails*, CouplingPort, *CouplingPortAbstractShaper*, *CouplingPort StructuralElement*, *CpSoftwareClusterResource*, CpSoftwareClusterResourceToApplicationPartition Mapping, CpSoftwareClusterToApplicationPartitionMapping, CpSoftwareClusterToEcuInstanceMapping, CpSoftwareClusterToResourceMapping, *CryptoServiceMapping*, CyclicHandlingComDataToOsTask ProxyMapping, DataPrototypeGroup, DataPrototypeTransformationPropsIdent, DataTransformation, *Dds AbstractServiceInstanceElementCp*, DdsCpDomain, DdsCpPartition, DdsCpQosProfile, DdsCpTopic, DependencyOnArtifact, *DiagEventDebounceAlgorithm*, DiagnosticAuthTransmitCertificateEvaluation, DiagnosticConnectedIndicator, DiagnosticDataElement, DiagnosticDebounceAlgorithmProps, Diagnostic ExtendedDataRecordElement, DiagnosticFunctionInhibitSource, DiagnosticParameterElement, *DiagnosticRoutineSubfunction*, DltApplication, DltArgument, DltArgumentProps, DltLogChannel, Dlt Message, DoIpInterface, DoIpLogicAddress, DoIpRoutingActivation, ECUMapping, *EOCExecutableEntity RefAbstract*, EcuPartition, EcuPartitionToCoreMapping, EcucContainerValue, *EcucDefinitionElement*, EcucDestinationUriDef, EcucEnumerationLiteralDef, EcucQuery, EcucValidationCondition, Ethernet ▽

▽

△

Class	***Identifiable*** (abstract)			
	△ WakeupSleepOnDatalineConfig, EventHandler, ExclusiveArea, *ExecutableEntity*, *ExecutionTime*, FMAttributeDef, FMFeatureMapAssertion, FMFeatureMapCondition, FMFeatureMapElement, FMFeature Relation, FMFeatureRestriction, FMFeatureSelection, FlatInstanceDescriptor, FlexrayTpConnection Control, FlexrayTpNode, FlexrayTpPduPool, *FrameTriggering*, GlobalTimeGateway, *GlobalTimeMaster*, *GlobalTimeSlave*, *HeapUsage*, HwAttributeDef, HwAttributeLiteralDef, HwPin, HwPinGroup, *IEEE1722 TpAcfBus*, *IEEE1722TpAcfBusPart*, IPSecRule, IPv6ExtHeaderFilterList, ISignalToIPduMapping, ISignal Triggering, *IdentCaption*, ImpositionTime, InternalTriggeringPoint, J1939Node, J1939SharedAddress Cluster, J1939TpNode, Keyword, LifeCycleState, LinScheduleTable, LinTpNode, Linker, MacAddress VlanMembership, MacMulticastGroup, MacSecKayParticipant, McDataInstance, MemorySection, Mode Declaration, ModeDeclarationMapping, ModeSwitchPoint, ModeSwitchSenderComSpecProps, Network Endpoint, *NmCluster*, NmEcu, *NmNode*, NvBlockDescriptor, *PackageableElement*, ParameterAccess, PduActivationRoutingGroup, PduToFrameMapping, PduTriggering, PerInstanceMemory, *Physical Channel*, PortElementToCommunicationResourceMapping, PortGroup, *PortInterfaceMapping*, Queued ReceiverComSpecProps, ResourceConsumption, RootSwCompositionPrototype, RptComponent, Rpt Container, RptExecutableEntity, RptExecutableEntityEvent, RptExecutionContext, RptProfile, RptService Point, RteEventInCompositionSeparation, RteEventInCompositionToOsTaskProxyMapping, RteEventIn SystemSeparation, RteEventInSystemToOsTaskProxyMapping, RunnableEntityGroup, *SdgAttribute*, Sdg Class, SecOcJobRequirement, SecureCommunicationAuthenticationProps, SecureCommunication FreshnessProps, SecurityEventContextDataElement, SecurityEventContextProps, *ServerCallPoint*, ServerComSpecProps, *ServiceNeeds*, SignalServiceTranslationElementProps, SignalServiceTranslation EventProps, SignalServiceTranslationProps, SocketAddress, SomeipTpChannel, *StackUsage*, Static SocketConnection, StructuredReq, SwGenericAxisParamType, SwServiceArg, SwcServiceDependency, SwcToApplicationPartitionMapping, SwcToEcuMapping, SwcToImplMapping, SwitchAsynchronousTraffic ShaperGroupEntry, SwitchAtsInstanceEntry, SwitchFlowMeteringEntry, SwitchStreamFilterActionDest PortModification, SwitchStreamFilterEntry, SwitchStreamFilterRule, SwitchStreamGateEntry, Switch StreamIdentification, SystemMapping, SystemSignalGroupToCommunicationResourceMapping, System SignalToCommunicationResourceMapping, TDCpSoftwareClusterMapping, TDCpSoftwareCluster ResourceMapping, TcpOptionFilterList, *TimingClock*, TimingClockSyncAccuracy, TimingCondition, *TimingConstraint*, *TimingDescription*, TimingExtensionResource, TimingModeInstance, TlsCryptoCipher Suite, TlsCryptoCipherSuiteProps, Topic1, TpAddress, TraceableTable, TraceableText, *TracedFailure*, TransformationISignalPropsIdent, *TransformationProps*, TransformationTechnology, Trigger, Variable Access, VariationPointProxy, ViewMap, VlanConfig, WaitPoint			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
adminData	AdminData	0..1	aggr	This represents the administrative data for the identifiable object. **Tags:** atp.Splitkey=adminData xml.sequenceOffset=-40
annotation	Annotation	*	aggr	Possibility to provide additional notes while defining a model element (e.g. the ECU Configuration Parameter Values). These are not intended as documentation but are mere design notes. **Tags:** atp.Splitkey=annotation xml.sequenceOffset=-25
category	CategoryString	0..1	attr	The category is a keyword that specializes the semantics of the Identifiable. It affects the expected existence of attributes and the applicability of constraints. **Tags:** xml.sequenceOffset=-50
desc	MultiLanguageOverview Paragraph	0..1	aggr	This represents a general but brief (one paragraph) description what the object in question is about. It is only one paragraph! Desc is intended to be collected into overview tables. This property helps a human reader to identify the object in question. More elaborate documentation, (in particular how the object is built or used) should go to "introduction". **Tags:** atp.Splitkey=desc xml.sequenceOffset=-60

▽

△

Class	***Identifiable*** (abstract)			
introduction	DocumentationBlock	0..1	aggr	This represents more information about how the object in question is built or is used. Therefore it is a DocumentationBlock. **Tags:** atp.Splitkey=introduction xml.sequenceOffset=-30
uuid	String	0..1	attr	The purpose of this attribute is to provide a globally unique identifier for an instance of a meta-class. The values of this attribute should be globally unique strings prefixed by the type of identifier. For example, to include a DCE UUID as defined by The Open Group, the UUID would be preceded by "DCE:". The values of this attribute may be used to support merging of different AUTOSAR models. The form of the UUID (Universally Unique Identifier) is taken from a standard defined by the Open Group (was Open Software Foundation). This standard is widely used, including by Microsoft for COM (GUIDs) and by many companies for DCE, which is based on CORBA. The method for generating these 128-bit IDs is published in the standard and the effectiveness and uniqueness of the IDs is not in practice disputed. If the id namespace is omitted, DCE is assumed. An example is "DCE:2fac1234-31f8-11b4-a222-08002b34c003". The uuid attribute has no semantic meaning for an AUTOSAR model and there is no requirement for AUTOSAR tools to manage the timestamp. **Tags:** xml.attribute=true

Table E.34: Identifiable

Class	**McDataInstance**			
Note	Describes the specific properties of one data instance in order to support measurement and/or calibration of this data instance. The most important attributes are: • Its shortName is copied from the ECU Flat map (if applicable) and will be used as identifier and for display by the MC system. • The category is copied from the corresponding data type (ApplicationDataType if defined, otherwise ImplementationDataType) as far as applicable. • The symbol is the one used in the programming language. It will be used to find out the actual memory address by the final generation tool with the help of linker generated information. It is assumed that in the M1 model this part and all the aggregated and referred elements (with the exception of the Flat Map and the references from ImplementationElementInParameterInstanceRef and McAccessDetails) are completely generated from "upstream" information. This means, that even if an element like e.g. a CompuMethod is only used via reference here, it will be copied into the M1 artifact which holds the complete McSupportData for a given Implementation.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	McDataInstance.subElement, McSupportData.mcParameterInstance, McSupportData.mcVariable Instance			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
arraySize	PositiveInteger	0..1	attr	The existence of this attribute turns the data instance into an array of data. The attribute determines the size of the array in terms of number of elements.
displayIdentifier	McdIdentifier	0..1	attr	An optional attribute to be used to set the ASAM ASAP2 DISPLAY_IDENTIFIER attribute.

▽

△

Class	**McDataInstance**			
flatMapEntry	FlatInstanceDescriptor	0..1	ref	Reference to the corresponding entry in the ECU Flat Map. This allows to trace back to the original specification of the generated data instance. This link shall be added by the RTE generator mainly for documentation purposes. The reference is optional because • The McDataInstance may represent an array or struct in which only the subElements correspond to FlatMap entries. • The McDataInstance may represent a task local buffer for rapid prototyping access which is different from the "main instance" used for measurement access. **Tags:** atp.Splitkey=flatMapEntry This Attribute is only used by the AUTOSAR Classic Platform.
instanceIn Memory	ImplementationElement InParameterInstance Ref	0..1	aggr	Reference to the corresponding data instance in the description of calibration data structures published by the RTE generator. This is used to support emulation methods inside the ECU, it is not required for A2L generation. **Tags:** atp.Splitkey=instanceInMemory, instanceIn Memory.context, instanceInMemory.target
mcDataAccess Details	McDataAccessDetails	0..1	aggr	Refers to "upstream" information on how the RTE uses this data instance. Use Case: Rapid Prototyping **Tags:** atp.Splitkey=mcDataAccessDetails
mcData Assignment	RoleBasedMcData Assignment	*	aggr	An assignment between McDataInstances. This supports the indication of related McDataElement implementing the of "RP global buffer", "RP global measurement buffer", "RP enabler flag". **Tags:** atp.Splitkey=mcDataAssignment
resulting Properties	SwDataDefProps	0..1	aggr	These are the generated properties resulting from decisions taken by the RTE generator for the actually implemented data instance. Only those properties are relevant here, which are needed for the measurement and calibration system. **Tags:** atp.Splitkey=resultingProperties
resultingRptSw Prototyping Access	RptSwPrototyping Access	0..1	aggr	Describes the implemented accessibility of data and modes by the rapid prototyping tooling. **Tags:** atp.Splitkey=resultingRptSwPrototypingAccess atp.Status=obsolete
role	Identifier	0..1	attr	An optional attribute to be used for additional information on the role of this data instance, for example in the context of rapid prototyping.
rptImplPolicy	RptImplPolicy	0..1	aggr	Describes the implemented code preparation for rapid prototyping at data accesses for a hook based bypassing. **Tags:** atp.Splitkey=rptImplPolicy atp.Status=obsolete
subElement (ordered)	McDataInstance	*	aggr	This relation indicates, that the target element is part of a "struct" which is given by the source element. This information will be used by the final generator to set up the correct addressing scheme. **Stereotypes:** atpVariation **Tags:** vh.latestBindingTime=preCompileTime

▽

△

Class	McDataInstance			
symbol	SymbolString	0..1	attr	This String is used to determine the memory address during final generation of the MC configuration data (e.g. "A2L" file) . It shall be the name of the element in the programming language such that it can be identified in linker generated information. In case the McDataInstance is part of composite data in the programming language, the symbol String may include parts denoting the element context, unless the context is given by the symbol attribute of an enclosing McDataInstance. This means in particular for the C language that the "." character shall be used as a separator between the name of a "struct" variable the name of one of its elements. The symbol can differ from the shortName in case of generated C data declarations. It is an optional attribute since it may be missing in case the instance represents an element (e.g. a single array element) which has no name in the linker map.

Table E.35: McDataInstance

Class	McSupportData			
Note	Root element for all measurement and calibration support data related to one Implementation artifact on an ECU. There shall be one such element related to the RTE implementation (if it owns MC data) and a separate one for each module or component, which owns private MC data.			
Base	*ARObject*			
Aggregated by	*Implementation*.mcSupport			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
emulation Support	McSwEmulationMethod Support	*	aggr	Describes the calibration method used by the RTE. This information is not needed for A2L generation, but to setup software emulation in the ECU. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=emulationSupport, emulation Support.variationPoint.shortLabel vh.latestBindingTime=preCompileTime
mcParameter Instance	McDataInstance	*	aggr	A data instance to be used for calibration. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=mcParameterInstance, mcParameter Instance.shortName, mcParameterInstance.variation Point.shortLabel vh.latestBindingTime=postBuild
mcVariable Instance	McDataInstance	*	aggr	A data instance to be used for measurement. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=mcVariableInstance, mcVariable Instance.shortName, mcVariableInstance.variation Point.shortLabel vh.latestBindingTime=postBuild
measurable System ConstantValues	SwSystemconstant ValueSet	*	ref	Sets of system constant values to be transferred to the MCD system, because the system constants have been specified with "swCalibrationAccess" = readonly. **Tags:** atp.Splitkey=measurableSystemConstantValues

▽

△

Class	**McSupportData**			
rptSupportData	RptSupportData	0..1	aggr	The rapid prototyping support data belonging to this implementation. The aggregtion is <<atpSplitable>> because in case of an already exisiting BSW Implementation model, this description will be added later in the process, namely at code generation time. **Tags:** atp.Splitkey=rptSupportData

Table E.36: McSupportData

Class	***MultilanguageReferrable*** (abstract)			
Note	Instances of this class can be referred to by their identifier (while adhering to namespace borders). They also may have a longName. But they are not considered to contribute substantially to the overall structure of an AUTOSAR description. In particular it does not contain other Referrables.			
Base	*ARObject*, *Referrable*			
Subclasses	Caption, DefItem, DocumentationContext, *Identifiable*, SdgCaption, *TraceReferrable*, *Traceable*			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
longName	MultilanguageLong Name	0..1	aggr	This specifies the long name of the object. Long name is targeted to human readers and acts like a headline. **Tags:** atp.Splitkey=longName

Table E.37: MultilanguageReferrable

Class	**PostBuildVariantCriterionValueSet**			
Note	This meta-class represents the ability to denote one set of postBuildVariantCriterionValues. **Tags:** atp.recommendedPackage=PostBuildVariantCriterionValueSets			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
postBuildVariant CriterionValue	PostBuildVariant CriterionValue	*	aggr	This is one particular postbuild variant criterion/value pair being part of the PostBuildVariantSet. **Tags:** atp.Splitkey=postBuildVariantCriterionValue

Table E.38: PostBuildVariantCriterionValueSet

Class	**ProvidedServiceInstance**			
Note	Service instances that are provided by the ECU that is connected via the ApplicationEndpoint to a CommunicationConnector.			
Base	*ARObject*, *AbstractServiceInstance*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	ServiceInstanceCollectionSet.serviceInstance			
Attribute	***Type***	***Mult.***	***Kind***	***Note***

▽

△

Class	**ProvidedServiceInstance**			
allowedService Consumer	NetworkEndpoint	*	ref	NetworkEndpoints on which the ConsumedService Instances that are communicating with this Provided ServiceInstance are allowed to be located so that the ACL check in the ServiceDiscovery is successful and the connection is allowed to be established. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=allowedServiceConsumer, allowedService Consumer.networkEndpoint, allowedService Consumer.variationPoint.shortLabel atp.Status=draft vh.latestBindingTime=postBuild
autoAvailable	Boolean	0..1	attr	Defines that this ProvidedServiceInstance shall be offered by the service discovery at ECU start.
eventHandler	EventHandler	*	aggr	Collection of event groups provided by the Provided ServiceInstance **Stereotypes:** atpVariation **Tags:** atp.Splitkey=eventHandler, eventHandler.shortName, eventHandler.variationPoint.shortLabel vh.latestBindingTime=postBuild
instance Identifier	PositiveInteger	0..1	attr	Instance identifier. Can be used for e.g. service discovery to identify the instance of the service.
loadBalancing Priority	PositiveInteger	0..1	attr	Defines the value to be used for load balancing priority in the service offer. Lower value means higher priority.
loadBalancing Weight	PositiveInteger	0..1	attr	Defines the value to be used for load balancing weight in the service offer. Higher value means higher probability to be chosen.
localUnicast Address	ApplicationEndpoint	0..2	ref	The local address over which the PSI is provided (udp, tcp or both). **Stereotypes:** atpVariation **Tags:** atp.Splitkey=localUnicastAddress, localUnicast Address.applicationEndpoint, localUnicast Address.variationPoint.shortLabel vh.latestBindingTime=postBuild
minorVersion	PositiveInteger	0..1	attr	Minor Version of the Service that is provided by this ProvidedServiceInstance.
priority	PositiveInteger	0..1	attr	Defines the frame priority where values from 0 (best effort) to 7 (highest) are allowed.
remoteMulticast Subscription Address	ApplicationEndpoint	*	ref	This reference defines the remote multicast subscribed addresses of service consumers. This reference shall ONLY be used if the remote address of the clients is determined from the configuration and not at runtime. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=remoteMulticastSubscriptionAddress, remoteMulticastSubscriptionAddress.applicationEndpoint, remoteMulticastSubscriptionAddress.variationPoint.short Label vh.latestBindingTime=postBuild

▽

△

Class	**ProvidedServiceInstance**			
remoteUnicast Address	ApplicationEndpoint	*	ref	This reference defines the remote addresses of service consumers. This reference shall ONLY be used if the remote address of the clients is determined from the configuration and not at runtime. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=remoteUnicastAddress, remoteUnicast Address.applicationEndpoint, remoteUnicast Address.variationPoint.shortLabel vh.latestBindingTime=postBuild
sdServerTimer Config	SomeipSdServer ServiceInstanceConfig	0..1	ref	Server specific configuration settings relevant for the SOME/IP service discovery. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=sdServerTimerConfig, sdServerTimer Config.someipSdServerServiceInstanceConfig, sdServer TimerConfig.variationPoint.shortLabel vh.latestBindingTime=postBuild
serviceIdentifier	PositiveInteger	0..1	attr	This attribute represents the ability to describe the SOME/IP service ID that is offered.

Table E.39: ProvidedServiceInstance

Class	***Referrable*** (abstract)			
Note	Instances of this class can be referred to by their identifier (while adhering to namespace borders).			
Base	*ARObject*			
Subclasses	*AtpDefinition*, BswDistinguishedPartition, *BswModuleCallPoint*, BswModuleClientServerEntry, Bsw VariableAccess, CouplingPortTrafficClassAssignment, *DiagnosticEnvModeElement*, EthernetPriority Regeneration, ExclusiveAreaNestingOrder, *HwDescriptionEntity*, *ImplementationProps*, LinSlaveConfig Ident, ModeTransition, *MultilanguageReferrable*, PncMappingIdent, *SingleLanguageReferrable*, SoCon IPduIdentifier, TpConnectionIdent			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
shortName	Identifier	1	attr	This specifies an identifying shortName for the object. It needs to be unique within its context and is intended for humans but even more for technical reference. **Stereotypes:** atpIdentityContributor **Tags:** xml.enforceMinMultiplicity=true xml.sequenceOffset=-100
shortName Fragment	ShortNameFragment	*	aggr	This specifies how the Referrable.shortName is composed of several shortNameFragments. **Tags:** atp.Splitkey=shortNameFragment xml.sequenceOffset=-90

Table E.40: Referrable

Class	**RootSwCompositionPrototype**			
Note	The RootSwCompositionPrototype represents the top-level-composition of software components within a given System. According to the use case of the System, this may for example be a more or less complete VFB description, the software of a System Extract or the software of a flat ECU Extract with only atomic SWCs. Therefore the RootSwComposition will only occasionally contain all atomic software components that are used in a complete VFB System. The OEM is primarily interested in the required functionality and the interfaces defining the integration of the Software Component into the System. The internal structure of such a component contains often substantial intellectual property of a supplier. Therefore a top-level software composition will often contain empty compositions which represent subsystems. The contained SwComponentPrototypes are fully specified by their SwComponentTypes (including Port Prototypes, PortInterfaces, VariableDataPrototypes, SwcInternalBehavior etc.), and their ports are interconnected using SwConnectorPrototypes.			
Base	*ARObject*, *AtpFeature*, *AtpPrototype*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	*AtpClassifier*.atpFeature, System.rootSoftwareComposition			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
calibration ParameterValue Set	CalibrationParameter ValueSet	*	ref	Used CalibrationParameterValueSet for instance specific initialization of calibration parameters. **Tags:** atp.Splitkey=calibrationParameterValueSet This Attribute is only used by the AUTOSAR Classic Platform.
flatMap	FlatMap	0..1	ref	The FlatMap used in the scope of this RootSw CompositionPrototype. **Tags:** atp.Splitkey=flatMap This Attribute is only used by the AUTOSAR Classic Platform.
software Composition	CompositionSw ComponentType	0..1	tref	We assume that there is exactly one top-level composition that includes all Component instances of the system. **Stereotypes:** isOfType **Tags:** atp.Splitkey=softwareComposition

Table E.41: RootSwCompositionPrototype

Class	**RptExecutableEntityProperties**			
Note	Describes the code preparation for rapid prototyping at ExecutableEntity invocation. **Tags:** atp.Status=obsolete			
Base	*ARObject*			
Aggregated by	RptContainer.rptExecutableEntityProperties, RptExecutableEntityEvent.rptExecutableEntityProperties			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
maxRptEventId	PositiveInteger	0..1	attr	Highest RPT event id usable for RTE generated service points. This attribute is relevant, if dedicated id range shall be applied to the ExecutableEntitys of a software component or specific ExecutableEntitys. **Tags:** atp.Status=obsolete
minRptEventId	PositiveInteger	0..1	attr	Lowest RPT event id usable for RTE generated service points. This attribute is relevant, if dedicated id range shall be applied to the ExecutableEntitys of a software component or specific ExecutableEntitys. **Tags:** atp.Status=obsolete
rptExecution Control	RptExecutionControl Enum	0..1	attr	This attribute specifies the rapid prototyping control of the executable **Tags:** atp.Status=obsolete

△

Class	**RptExecutableEntityProperties**			
rptServicePoint	RptServicePointEnum	0..1	attr	Enables generation of service points by the RTE generator. **Tags:** atp.Status=obsolete

Table E.42: RptExecutableEntityProperties

Class	**RptImplPolicy**			
Note	Describes the code preparation for rapid prototyping at data accesses. **Tags:** atp.Status=obsolete			
Base	*ARObject*			
Aggregated by	McDataInstance.rptImplPolicy, RptComponent.rpImplPolicy, RptContainer.rptImplPolicy, RptExecutable EntityEvent.rptImplPolicy			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
rptEnablerImpl Type	RptEnablerImplType Enum	0..1	attr	For Level 2 or Level3 this property determines how the RTE implements the additional "RP enabler" flag. **Tags:** atp.Status=obsolete
rptPreparation Level	RptPreparationEnum	0..1	attr	Mandates RP preparation level for access to VariableData Prototype within generated RTE implementation. **Tags:** atp.Status=obsolete

Table E.43: RptImplPolicy

Class	**RptProfile**			
Note	The RptProfile describes the common properties of a Rapid Prototyping method. **Tags:** atp.Status=obsolete			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	RapidPrototypingScenario.rptProfile			
Attribute	*Type*	*Mult.*	*Kind*	*Note*
maxService PointId	PositiveInteger	0..1	attr	Highest service point id useable for RTE generated service points. **Tags:** atp.Status=obsolete
minServicePoint Id	PositiveInteger	0..1	attr	Lowest service point id useable for RTE generated service points. **Tags:** atp.Status=obsolete
servicePoint SymbolPost	CIdentifier	0..1	attr	Complete symbol of the function implementing the post service point. This symbol is used for post-build hooking purposes. **Tags:** atp.Status=obsolete
servicePoint SymbolPre	CIdentifier	0..1	attr	Complete symbol of the function implementing the pre service point. This symbol is used for post-build hooking purposes. **Tags:** atp.Status=obsolete
stimEnabler	RptEnablerImplType Enum	0..1	attr	Defines if the service points support the stimulation enabler. If RptProfile.stimEnabler is “none” then no stimulation enabler is passed to the service function. Otherwise the stimulation enabler will be passed as a parameter. **Tags:** atp.Status=obsolete

Table E.44: RptProfile

Class	**RptSwPrototypingAccess**			
Note	Describes the accessibility of data and modes by the rapid prototyping tooling. **Tags:** atp.Status=obsolete			
Base	*ARObject*			
Aggregated by	McDataInstance.resultingRptSwPrototypingAccess, RptContainer.rptSwPrototypingAccess			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
rptHookAccess	RptAccessEnum	0..1	attr	The related data element can be modified using a post-build hooking tool. An ENABLED VariableData Prototype is implicitly READABLE/WRITABLE. **Tags:** atp.Status=obsolete
rptReadAccess	RptAccessEnum	0..1	attr	The related data element can be used as input for bypass functionality by RP tool. If rptImplPolicy is not specified then RTE generation shall ensure at least suitable MC read points are created. **Tags:** atp.Status=obsolete
rptWriteAccess	RptAccessEnum	0..1	attr	The related data element can be used as output for bypass functionality by RP tool. The data element shall be prepared to rptLevel2 and related write service points are present. **Tags:** atp.Status=obsolete

Table E.45: RptSwPrototypingAccess

Class	**Sdg**			
Note	Sdg (SpecialDataGroup) is a generic model which can be used to keep arbitrary information which is not explicitly modeled in the meta-model. Sdg can have various contents as defined by sdgContentsType. Special Data should only be used moderately since all elements should be defined in the meta-model. Thereby SDG should be considered as a temporary solution when no explicit model is available. If an sdg Caption is available, it is possible to establish a reference to the sdg structure.			
Base	*ARObject*			
Aggregated by	AdminData.sdg, BuildActionEnvironment.sdg, BuildActionInvocator.sdg, BuildActionIoElement.sdg, File InfoComment.sdg, RptHook.sdg, SdgContents.sdg, VariationPoint.sdg			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
gid	NameToken	0..1	attr	This attributes specifies an identifier. Gid comes from the SGML/XML-Term "Generic Identifier" which is the element name in XML. The role of this attribute is the same as the name of an XML - element. **Tags:** xml.attribute=true
sdgCaption	SdgCaption	0..1	aggr	This aggregation allows to assign the properties of Identifiable to the sdg. By this, a shortName etc. can be assigned to the Sdg. **Stereotypes:** atpIdentityContributor **Tags:** xml.sequenceOffset=20
sdgContents Type	SdgContents	0..1	aggr	This is the content of the Sdg. **Tags:** xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=30 xml.typeElement=false xml.typeWrapperElement=false

Table E.46: Sdg

Class	**SecurityEventContextDataElement**			
Note	This meta-class represents one ContextDataElement in the context of the aggregating SecurityEvent ContextDataDefintion.			
Base	*ARObject*, *AtpBlueprint*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	SecurityEventContextDataDefinition.contextDataElement, SecurityEventContextDataElement.nestedContextData			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
maxLength	PositiveInteger	0..1	attr	Describes the maximal length of the context data in case of Arrays and Strings.
nestedContextData (ordered)	SecurityEventContextDataElement	*	aggr	This self-aggregation supports the desription of nested context data.
networkRepresentation	SwDataDefProps	0..1	aggr	Definition of the networkRepresentation of the context data element. **Tags:** atp.Splitkey=networkRepresentation
securityEventReportInstanceDefinition	SecurityEventReportInstanceDefinition	0..1	ref	This reference identifies the definition of the report instance. **Tags:** atp.Splitkey=securityEventReportInstanceDefinition

Table E.47: SecurityEventContextDataElement

Class	**SenderReceiverToSignalMapping**			
Note	Mapping of a sender receiver communication data element to a signal.			
Base	*ARObject*, *DataMapping*			
Aggregated by	SystemMapping.dataMapping			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
dataElement	VariableDataPrototype	0..1	iref	Reference to the data element. **Tags:** atp.Splitkey=dataElement, dataElement.contextComponent, dataElement.contextComposition, dataElement.contextPort, dataElement.targetDataPrototype **InstanceRef implemented by:** VariableDataPrototypeInSystemInstanceRef
senderToSignalTextTableMapping	TextTableMapping	0..1	aggr	This mapping allows for the text-table translation between the sending DataPrototype that is defined in the Port Prototype and the physicalProps defined for the System Signal. **Tags:** atp.Splitkey=senderToSignalTextTableMapping
signalToReceiverTextTableMapping	TextTableMapping	0..1	aggr	This mapping allows for the text-table translation between the physicalProps defined for the SystemSignal and a receiving DataPrototype that is defined in the Port Prototype. **Tags:** atp.Splitkey=signalToReceiverTextTableMapping
systemSignal	SystemSignal	0..1	ref	Reference to the system signal used to carry the data element. **Tags:** atp.Splitkey=systemSignal

Table E.48: SenderReceiverToSignalMapping

Primitive	**String**
Note	This represents a String in which white-space shall be normalized before processing. For example: in order to compare two Strings: • leading and trailing white-space needs to be removed • consecutive white-space (blank, cr, lf, tab) needs to be replaced by one blank. **Tags:** xml.xsd.customType=STRING xml.xsd.type=string

Table E.49: String

Class	**SwServiceArg**			
Note	Specifies the properties of a data object exchanged during the call of an SwService, e.g. an argument or a return value. The SwServiceArg can also be used in the argument list of a C-macro. For this purpose the category shall be set to "MACRO". A reference to implementationDataType can optional be added if the actual argument has an implementationDataType.			
Base	*ARObject*, *Identifiable*, *MultilanguageReferrable*, *Referrable*			
Aggregated by	BswModuleEntry.argument, BswModuleEntry.returnType			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
direction	ArgumentDirectionEnum	0..1	attr	Specifies the direction of the data transfer. The direction shall indicate the direction of the actual information that is being consumed by the caller and/or the callee, not the direction of formal arguments in C. The attribute is optional for backwards compatibility reasons. For example, if a pointer is used to pass a memory address for the expected result, the direction shall be "out". If a pointer is used to pass a memory address with content to be read by the callee, its direction shall be "in". **Tags:** xml.sequenceOffset=10
swArraysize	ValueList	0..1	aggr	This turns the argument of the service to an array. **Tags:** atp.Splitkey=swArraysize xml.sequenceOffset=20
swDataDefProps	SwDataDefProps	0..1	aggr	Data properties of this SwServiceArg. **Tags:** atp.Splitkey=swDataDefProps xml.sequenceOffset=30

Table E.50: SwServiceArg

Class	«atpMixedString» ***SwSystemconstDependentFormula*** (abstract)			
Note	This class represents an expression depending on system constants.			
Base	*ARObject*, *FormulaExpression*			
Subclasses	*AttributeValueVariationPoint*, BlueprintFormula, ConditionByFormula, *FMFormulaByFeaturesAndSwSystemconsts*			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
sysc	SwSystemconst	0..1	ref	This refers to a system constant. The internal (coded) value of the system constant shall be used. **Tags:** xml.sequenceOffset=50

▽

△

Class	«atpMixedString» ***SwSystemconstDependentFormula*** (abstract)			
syscString	SwSystemconst	0..1	ref	syscString indicates that the referenced system constant shall be evaluated as a string according to [TPS_SWCT_01431].

Table E.51: SwSystemconstDependentFormula

Class	**SwSystemconstantValueSet**			
Note	This meta-class represents the ability to specify a set of system constant values. **Tags:** atp.recommendedPackage=SwSystemconstantValueSets			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
sw Systemconstant Value	SwSystemconstValue	*	aggr	This is one particular value of a system constant. **Tags:** atp.Splitkey=swSystemconstantValue

Table E.52: SwSystemconstantValueSet

Class	**System**			
Note	The top level element of the System Description. The System description defines five major elements: Topology, Software, Communication, Mapping and Mapping Constraints. The System element directly aggregates the elements describing the Software, Mapping and Mapping Constraints; it contains a reference to an ASAM FIBEX description specifying Communication and Topology. **Tags:** atp.recommendedPackage=Systems			
Base	*ARElement*, *ARObject*, *AtpClassifier*, *AtpFeature*, *AtpStructureElement*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *PackageableElement*, *Referrable*, *UploadableDesignElement*, *UploadablePackageElement*			
Aggregated by	ARPackage.element, *AtpClassifier*.atpFeature			
Attribute	***Type***	***Mult.***	***Kind***	***Note***
clientId DefinitionSet	ClientIdDefinitionSet	*	ref	Set of Client Identifiers that are used for inter-ECU client-server communication in the System. **Tags:** atp.Splitkey=clientIdDefinitionSet This Attribute is only used by the AUTOSAR Classic Platform.
containerIPdu HeaderByte Order	ByteOrderEnum	0..1	attr	Defines the byteOrder of the header in ContainerIPdus. This Attribute is only used by the AUTOSAR Classic Platform.
ecuExtract Version	RevisionLabelString	0..1	attr	Version number of the Ecu Extract. This Attribute is only used by the AUTOSAR Classic Platform.

▽

△

Class	System			
fibexElement	FibexElement	*	ref	Reference to ASAM FIBEX elements specifying Communication and Topology. All Fibex Elements used within a System Description shall be referenced from the System Element. atpVariation: In order to describe a product-line, all Fibex Elements can be optional. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=fibexElement, fibexElement.fibexElement, fibexElement.variationPoint.shortLabel vh.latestBindingTime=postBuild
interpolation Routine MappingSet	InterpolationRoutine MappingSet	*	ref	This reference identifies the InterpolationRoutineMapping Sets that are relevant in the context of the enclosing System. **Tags:** atp.Splitkey=interpolationRoutineMappingSet This Attribute is only used by the AUTOSAR Classic Platform.
j1939Shared AddressCluster	J1939SharedAddress Cluster	*	aggr	Collection of J1939Clusters that share a common address space for the routing of messages. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=j1939SharedAddressCluster, j1939Shared AddressCluster.shortName, j1939SharedAddress Cluster.variationPoint.shortLabel vh.latestBindingTime=postBuild This Attribute is only used by the AUTOSAR Classic Platform.
mapping	SystemMapping	*	aggr	Aggregation of all mapping aspects (mapping of SW components to ECUs, mapping of data elements to signals, and mapping constraints). In order to support OEM / Tier 1 interaction and shared development for one common System this aggregation is atpSplitable and atpVariation. The content of System Mapping can be provided by several parties using different names for the SystemMapping. This element is not required when the System description is used for a network-only use-case. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=mapping, mapping.shortName, mapping.variationPoint.shortLabel vh.latestBindingTime=postBuild
pncVector Length	PositiveInteger	0..1	attr	Length of the partial networking request release information vector (in bytes).
pncVectorOffset	PositiveInteger	0..1	attr	Absolute offset (with respect to the NM-PDU) of the partial networking request release information vector that is defined in bytes as an index starting with 0.

▽

△

Class	System			
rootSoftware Composition	RootSwComposition Prototype	0..1	aggr	Aggregation of the root software composition, containing all software components in the System in a hierarchical structure. This element is not required when the System description is used for a network-only use-case. atpVariation: The RootSwCompositionPrototype can vary. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=rootSoftwareComposition, rootSoftware Composition.shortName, rootSoftware Composition.variationPoint.shortLabel vh.latestBindingTime=systemDesignTime This Attribute is only used by the AUTOSAR Classic Platform.
swCluster	CpSoftwareCluster	*	ref	CP Software Clusters of this System **Stereotypes:** atpVariation **Tags:** atp.Splitkey=swCluster, swCluster.cpSoftwareCluster, sw Cluster.variationPoint.shortLabel vh.latestBindingTime=systemDesignTime This Attribute is only used by the AUTOSAR Classic Platform.
systemCom SpecDefinition	SystemComSpec DefinitionSet	*	ref	Reference to the set of ComSpec definitions that are used for inter-ECU communication in the System. **Tags:** atp.Splitkey=systemComSpecDefinition
system Documentation	Chapter	*	aggr	Possibility to provide additional documentation while defining the System. The System documentation can be composed of several chapters. **Stereotypes:** atpVariation **Tags:** atp.Splitkey=systemDocumentation, system Documentation.shortName, system Documentation.variationPoint.shortLabel vh.latestBindingTime=systemDesignTime xml.sequenceOffset=-10 This Attribute is only used by the AUTOSAR Classic Platform.
systemVersion	RevisionLabelString	0..1	attr	Version number of the System Description.

Table E.53: System

Class	SystemSignal			
Note	The system signal represents the communication system's view of data exchanged between SW components which reside on different ECUs. The system signals allow to represent this communication in a flattened structure, with exactly one system signal defined for each data element prototype sent and received by connected SW component instances. **Tags:** atp.recommendedPackage=SystemSignals			
Base	*ARElement*, *ARObject*, *CollectableElement*, *Identifiable*, *MultilanguageReferrable*, *Packageable Element*, *Referrable*			
Aggregated by	ARPackage.element			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
dynamicLength	Boolean	0..1	attr	The length of dynamic length signals is variable in run-time. Only a maximum length of such a signal is specified in the configuration (attribute length in ISignal element).
physicalProps	SwDataDefProps	0..1	aggr	Specification of the physical representation. **Tags:** atp.Splitkey=physicalProps

Table E.54: SystemSignal

Class	VariationPoint			
Note	This meta-class represents the ability to express a "structural variation point". The container of the variation point is part of the selected variant if swSyscond evaluates to true and each postBuildVariant Criterion is fulfilled.			
Base	*ARObject*			
Attribute	**Type**	**Mult.**	**Kind**	**Note**
blueprint Condition	DocumentationBlock	0..1	aggr	This represents a description that documents how the variation point shall be resolved when deriving objects from the blueprint. Note that variationPoints are not allowed within a blueprintCondition. **Tags:** xml.sequenceOffset=28
desc	MultiLanguageOverview Paragraph	0..1	aggr	This allows to describe shortly the purpose of the variation point. **Tags:** xml.sequenceOffset=20
formalBlueprint Generator	BlueprintGenerator	0..1	aggr	This represents a description that documents how the variation point shall be resolved when deriving objects from the blueprint by using ARMQL. Note that variationPoints are not allowed within a formal BlueprintGenerator. **Tags:** atp.Status=draft xml.sequenceOffset=30
postBuildVariant Condition	PostBuildVariant Condition	*	aggr	This is the set of post build variant conditions which all shall be fulfilled in order to (postbuild) bind the variation point. **Tags:** xml.sequenceOffset=40
sdg	Sdg	0..1	aggr	An optional special data group is attached to every variation point. These data can be used by external software systems to attach application specific data. For example, a variant management system might add an identifier, an URL or a specific classifier. **Tags:** xml.sequenceOffset=50

▽

△

Class	**VariationPoint**			
shortLabel	Identifier	0..1	attr	This provides a name to the particular variation point to support the RTE generator. It is necessary for supporting splitable aggregations and if binding time is later than codeGenerationTime, as well as some RTE conditions. It needs to be unique with in the enclosing Identifiables with the same ShortName. **Stereotypes:** atpIdentityContributor **Tags:** xml.sequenceOffset=10
swSyscond	ConditionByFormula	0..1	aggr	This condition acts as Binding Function for the Variation Point. Note that the multiplicity is 0..1 in order to support pure postBuild variants. **Tags:** xml.sequenceOffset=30

Table E.55: VariationPoint

F Glossary

The content of this appendix chapter is *informative* in nature and shall **not** be considered as *normative* content.

Artifact This is a Work Product Definition that provides a description and definition for tangible work product types. Artifacts may be composed of other artifacts ([51]).

At a high level, an artifact is represented as a single conceptual file.

AUTOSAR Tool This is a software tool which supports one or more tasks defined as AUTOSAR tasks in the methodology. Depending on the supported tasks, an AUTOSAR tool can act as an authoring tool, a converter tool, a processor tool or as a combination of those (see separate definitions).

AUTOSAR Authoring Tool An AUTOSAR Tool used to create and modify AUTOSAR XML Descriptions. Example: System Description Editor.

AUTOSAR Converter Tool An AUTOSAR Tool used to create AUTOSAR XML files by converting information from other AUTOSAR XML files. Example: ECU Flattener

AUTOSAR Definition This is the definition of parameters which can have values. One could say that the parameter values are Instances of the definitions. But in the meta model hierarchy of AUTOSAR, definitions are also instances of the meta model and therefore considered as a description. Examples for AUTOSAR definitions are: `PortPrototype`, `PostBuildVariantCriterion`, `SwSystemconst`.

AUTOSAR XML Description In AUTOSAR this means “filled Template”. In fact an AUTOSAR XML description is the XML representation of an AUTOSAR model.

The AUTOSAR XML description can consist of several files. Each individual file represents an AUTOSAR partial model and shall validate successfully against the AUTOSAR XML schema.

AUTOSAR Meta-Model This is an UML2.0 model that defines the language for describing AUTOSAR systems. The AUTOSAR meta-model is an UML representation of the AUTOSAR templates. UML2.0 class diagrams are used to describe the attributes and their interrelationships. Stereotypes, UML tags and OCL expressions (object constraint language) are used for defining specific semantics and constraints.

AUTOSAR Meta-Model Tool The AUTOSAR Meta-Model Tool is the tool that generates different views (class tables, list of constraints, diagrams, XML Schema etc.) on the AUTOSAR meta-model.

AUTOSAR Model This is a representation of an AUTOSAR product. The AUTOSAR model represents aspects suitable to the intended use according to the AUTOSAR methodology.

Strictly speaking, this is an instance of the AUTOSAR meta-model. The information contained in the AUTOSAR model can be anything that is representable according to the AUTOSAR meta-model.

AUTOSAR Partial Model In AUTOSAR, the possible partitioning of models is marked in the meta-model by ≪atpSplitable≫. One partial model is represented in an AUTOSAR XML description by one file. The partial model does not need to fulfill all semantic constraints applicable to an AUTOSAR model.

AUTOSAR Processor Tool An AUTOSAR Tool used to create non-AUTOSAR files by processing information from AUTOSAR XML files. Example: RTE Generator

AUTOSAR Specification Element An AUTOSAR Specification Element is a named element that is part of an AUTOSAR specification. Examples: requirement, constraint, specification item, class or attribute in the meta model, methodology, deliverable, methodology activity, model element, bsw module etc.

AUTOSAR Template The term “Template” is used in AUTOSAR to describe the format different kinds of descriptions. The term template comes from the idea, that AUTOSAR defines a kind of form which shall be filled out in order to describe a model. The filled form is then called the description.

In fact the AUTOSAR templates are now defined as a meta-model.

AUTOSAR Validation Tool A specialized AUTOSAR Tool which is able to check an AUTOSAR model against the rules defined by a profile.

AUTOSAR XML Schema This is a W3C XML schema that defines the language for exchanging AUTOSAR models. This Schema is derived from the AUTOSAR meta-model. The AUTOSAR XML Schema defines the AUTOSAR data exchange format.

Blueprint This is a model from which other models can be derived by copy and refinement. Note that in contrast to meta model resp. types, this process is *not* an instantiation.

Instance Generally this is a particular exemplar of a model or of a type.

Life Cycle Life Cycle is the course of development/evolutionary stages of a model element during its life time.

Meta-Model This defines the building blocks of a model. In that sense, a Meta-Model represents the language for building models.

Meta-Data This includes pertinent information about data, including information about the authorship, versioning, access-rights, timestamps etc.

Model A Model is an simplified representation of reality. The model represents the aspects suitable for an intended purpose.

Partial Model This is a part of a model which is intended to be persisted in one particular artifact.

Pattern in GST This is an approach to simplify the definition of the meta model by applying a model transformation. This transformation creates an enhanced model out of an annotated model.

Property A property is a structural feature of an object. As an example a “connector” has the properties “receive port” and “send port”.

Properties are made variant by the ≪atpVariation≫.

Prototype This is the implementation of a role of a type within the definition of another type. In other words a type may contain Prototypes that in turn are typed by “Types”. Each one of these prototypes becomes an instance when this type is instantiated.

Type A type provides features that can appear in various roles of this type.

Value This is a particular value assigned to a “Definition”.

Variability Variability of a system is its quality to describe a set of variants. These variants are characterized by variant specific property settings and / or selections. As an example, such a system property selection manifests itself in a particular “receive port” for a connection.

This is implemented using the ≪atpVariation≫.

Variant A system variant is a concrete realization of a system, so that all its properties have been set respectively selected. The software system has no variability anymore with respect to the binding time.

This is implemented using EvaluatedVariantSet.

Variation Binding A variant is the result of a variation binding process that resolves the variability of the system by assigning particular values/selections to all the system’s properties.

This is implemented by VariationPoint.

Variation Binding Time The variation binding time determines the step in the methodology at which the variability given by a set of variable properties is resolved.

This is implemented by vh.latestBindingTime at the related properties.

Variation Definition Time The variation definition time determines the step in the methodology at which the variation points are defined.

Variation Point A variation point indicates that a property is subject to variation. Furthermore, it is associated with a condition and a binding time which define the system context for the selection / setting of a concrete variant.

This is implemented by VariationPoint.

G Change History of AUTOSAR Traceable Items

The content of this appendix chapter is *informative* in nature and shall **not** be considered as *normative* content.

Please note that the lists in this chapter also include constraints and specification items that have been removed from the specification in a later version. These constraints and specification items do not appear as hyperlinks in the document.

G.1 Traceable item history of this document according to AUTOSAR Release R4.0.1

G.1.1 Changed Constraints in R4.0.1

N/A

G.1.2 Added Constraints in R4.0.1

Number	Heading
[constr_1000]	End-to-end protection is limited to sender/receive communication
[constr_1001]	Value of `dataId` shall be unique
[constr_1002]	End-to-end protection does not support n:1 communication
[constr_1004]	Mapping of `ApplicationDataType`s
[constr_1005]	Compatibility of `ImplementationDataType`s mapped to the same `ApplicationDataType`
[constr_1006]	applicable data `category`s
[constr_1007]	Allowed attributes of `SwDataDefProps` for `ApplicationDataType`s
[constr_1008]	Applicability of `category`s STRUCTURE and ARRAY
[constr_1009]	`SwDataDefProps` applicable to `ImplementationDataType`s
[constr_1010]	If `nativeDeclaration` does not exist
[constr_1011]	`category` of `SwBaseType`
[constr_1012]	Value of `category` is `FIXED_LENGTH`
[constr_1013]	Value of `category` is `VARIABLE_LENGTH`
[constr_1014]	Supported value encodings for `SwBaseType`
[constr_1015]	Prioritization of `SwDataDefProps`
[constr_1016]	`invalidValue` is restricted
[constr_1017]	Supported combinations of `swImplPolicy` and `swCalibrationAccess`
[constr_1018]	`measurementPoint` shall not be referenced by a `VariableAccess` aggregated by `RunnableEntity` in the role `dataReadAccess`
[constr_1019]	Compatibility of input value and axis

▽

△

Number	Heading
[constr_1020]	ParameterDataPrototype needs to be of compatible data type as referenced in sharedAxisType
[constr_1021]	A CompuMethod shall specify instructions for both directions
[constr_1022]	Limits shall be defined for each direction of CompuMethod
[constr_1023]	Specification of Units in CompuMethods
[constr_1024]	Stepwise definition of CompuMethods
[constr_1025]	Avoid division by zero in rational formula
[constr_1026]	Compatibility of Units
[constr_1027]	Types for record layouts
[constr_1029]	ConstantSpecificationMapping and ConstantSpecification
[constr_1030]	ParameterSwComponentType references ConstantSpecificationMappingSet
[constr_1031]	NvBlockSwComponentType references ConstantSpecificationMappingSet
[constr_1032]	DelegationSwConnector can only connect PortPrototypes of the same kind
[constr_1033]	Communication scenarios for sender/receiver communication
[constr_1035]	Recursive definition of CompositionSwComponentType
[constr_1036]	Connect kinds of PortInterfaces
[constr_1037]	Client may not connect to multiple servers
[constr_1038]	Reference to ApplicationError
[constr_1039]	Relevance of swImplPolicy
[constr_1040]	Conversion of SenderReceiverInterfaces
[constr_1041]	Conversion of ClientServerInterfaces
[constr_1042]	Definition of a linear data scaling
[constr_1043]	PortInterface vs. ComSpec
[constr_1044]	Applicability of DataFilter
[constr_1045]	Supported value encodings for SwBaseType in the context of PortInterfaces
[constr_1046]	Applicability of [constr_1045]
[constr_1047]	Compatibility of ApplicationPrimitiveDataTypes
[constr_1048]	Compatibility of ApplicationRecordDataTypes
[constr_1049]	Compatibility of ApplicationArrayDataTypes
[constr_1050]	Compatibility of ImplementationDataTypes
[constr_1051]	Compatibility of SwDataDefProps
[constr_1052]	Compatibility of Units
[constr_1053]	Compatibility of PhysicalDimensions
[constr_1054]	No DataConstr available at the provider
[constr_1055]	ImplementationDataType has category VALUE
[constr_1056]	ImplementationDataType has category TYPE_REFERENCE
[constr_1057]	ImplementationDataType has category DATA_REFERENCE

▽

△

Number	Heading
[constr_1058]	ImplementationDataType has category FUNCTION_REFERENCE
[constr_1059]	Compatibility of data types with category VALUE
[constr_1060]	Compatibility of data types with category ARRAY, VAL_BLK, or STRING
[constr_1061]	Compatibility of data types with category STRUCTURE
[constr_1062]	Compatibility of data types with category BIT
[constr_1063]	Compatibility of data types with category BOOLEAN
[constr_1064]	Compatibility of data types with category COM_AXIS, RES_AXIS, CURVE or MAP
[constr_1066]	ApplicationDataType is or is not compatible to specific ImplementationDataType
[constr_1067]	ApplicationDataType is or is not compatible to specific ImplementationDataType
[constr_1068]	Compatibility of VariableDataPrototypes or ParameterDataPrototypes typed by primitive data types
[constr_1069]	Compatibility of PortPrototypes of different DataInterfaces in the context of AssemblySwConnectors
[constr_1070]	Compatibility of PortPrototypes of different DataInterfaces in the context of DelegationSwConnectors
[constr_1071]	compatibility of compatibility of ParameterDataPrototype and VariableDataPrototype
[constr_1072]	Compatibility of ModeSwitchInterfaces in the context of an AssemblySwConnector
[constr_1073]	Compatibility of ModeSwitchInterfaces in the context of an DelegationSwConnector
[constr_1074]	Compatibility of ModeDeclarationGroupPrototypes
[constr_1075]	Compatibility of ModeDeclarationGroups
[constr_1076]	Compatibility of ArgumentDataPrototypes
[constr_1077]	Compatibility of ApplicationErrors
[constr_1078]	Compatibility of ClientServerOperations
[constr_1079]	Compatibility of ClientServerInterfaces in the context of an AssemblySwConnector
[constr_1080]	Compatibility of ClientServerInterfaces in the context of an DelegationSwConnector
[constr_1081]	Compatibility of TriggerInterfaces in the context of an AssemblySwConnector
[constr_1082]	Compatibility of TriggerInterfaces in the context of an DelegationSwConnector
[constr_1083]	Compatibility of Triggers
[constr_1084]	delegation of an provided outer PortPrototype
[constr_1085]	Compatibility in the case of a flat ECU extract
[constr_1086]	SwConnector between two specific PortPrototypes
[constr_1087]	AssemblySwConnector inside CompositionSwComponentType
[constr_1088]	DelegationSwConnector inside CompositionSwComponentType

▽

△

Number	Heading
[constr_1090]	WaitPoint and RunnableEntity
[constr_1091]	RTEEvents that can unblock a WaitPoint
[constr_1092]	ParameterSwComponentType
[constr_1093]	Definition of textual strings
[constr_1094]	Usage of symbol of RunnableEntity
[constr_1095]	Values of nDataSets vs. reliability
[constr_1096]	SwcModeSwitchEvent and WaitPoint
[constr_1097]	RunnableEntity that has a WaitPoint
[constr_1098]	Mode switch and mode disabling
[constr_1099]	Data type of inter-runnable variables
[constr_1100]	Unconnected RPortPrototype typed by a DataInterface
[constr_1101]	Mode-related communication
[constr_1102]	ApplicationError in the scope of one SwComponentType
[constr_1103]	NonqueuedReceiverComSpec and enableUpdate
[constr_1104]	Trigger sink and trigger source
[constr_1105]	Value of arraySize
[constr_1106]	Structure shall have at least one element
[constr_1107]	Union shall have at least one element
[constr_1108]	Value of ApplicationError.errorCode
[constr_1109]	Mapping of SwComponentPrototypes typed by a SensorActuatorSwComponentType
[constr_1110]	Value of category in EndToEndDescription
[constr_1111]	Constraints of dataId in PROFILE_01
[constr_1112]	Constraints of dataIdMode in PROFILE_01
[constr_1113]	Existence of attributes in PROFILE_01
[constr_1114]	Constraints of crcOffsetin PROFILE_01
[constr_1115]	Constraints of counterOffset in PROFILE_01
[constr_1116]	Constraints of dataLength in PROFILE_01
[constr_1117]	Constraints of maxDeltaCounterInit in PROFILE_01
[constr_1118]	Existence of attributes in PROFILE_02
[constr_1119]	Constraints of dataLength in PROFILE_02
[constr_1120]	Constraints of dataId in PROFILE_02
[constr_1121]	Constraints of maxDeltaCounterInit in PROFILE_02
[constr_1122]	Existence of attributes in PROFILE_03
[constr_1123]	Constraints of dataLength in PROFILE_03
[constr_1124]	Constraints of dataId in PROFILE_03
[constr_1125]	Constraints of maxDeltaCounterInit in PROFILE_03
[constr_1126]	Compatibility of DataConstrs

▽

△

Number	Heading
[constr_2000]	Compatibility of ClientServerOperations triggering the same RunnableEntity
[constr_2001]	Initial value for a specific implicitInterRunnableVariable or explicitInterRunnableVariable
[constr_2002]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataReadAccess
[constr_2003]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataWriteAccess
[constr_2004]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataSendPoint
[constr_2005]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataReceivePointByValue or dataReceivePointByArgument
[constr_2006]	Number of AsynchronousServerCallResultPoint referencing to one AsynchronousServerCallPoint
[constr_2007]	Consistency of typeDefinition attribute
[constr_2009]	Supported kinds of ports of a NvBlockSwComponentType
[constr_2010]	Connections between SwComponentPrototypes of type NvBlockSwComponentType
[constr_2011]	Connections between SwComponentPrototypes typed by NvBlockSwComponentType and SwComponentPrototypes typed by other AtomicSwComponentTypes
[constr_2012]	Compatibility of ImplementationDataTypes used for ramBlock and romBlock
[constr_2013]	Compatibility of ImplementationDataTypes for NvBlockDataMapping
[constr_2014]	Limitation of RoleBasedPortAssignment.role in NvBlockDescriptors
[constr_2015]	Limitation of SwcInternalBehavior of a NvBlockSwComponentType
[constr_2016]	Connections between SwComponentPrototypes of type ServiceProxySwComponentType
[constr_2017]	Ports of ServiceProxySwComponentTypes
[constr_2018]	Supported remote communication of a ServiceProxySwComponentType
[constr_2019]	ServiceSwComponentType shall have service ports only
[constr_2020]	dataReadAccess can not be used for queued communication
[constr_2021]	WaitPoint referencing a DataReceivedEvent can not be used for non-queued communication
[constr_2022]	Mutually exclusive use of SynchronousServerCallPoints and AsynchronousServerCallPoints
[constr_2023]	Consistency of timeout values
[constr_2024]	enableTakeAddress is restricted to single instantiation
[constr_2025]	Uniqueness of symbol attributes
[constr_2026]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role writtenLocalVariable and readLocalVariable
[constr_2027]	SwcServiceDependency shall be defined for service ports only
[constr_2028]	staticMemory is restricted to single instantiation

▽

△

Number	Heading
[constr_2029]	shortName of constantMemory and staticMemory
[constr_2030]	AsynchronousServerCallResultPoint combined with WaitPoint shall belong to the same RunnableEntity
[constr_2031]	Period of TimingEvent shall be greater than 0
[constr_2032]	transmissionAcknowledge requires a DataSendCompletedEvent
[constr_2033]	Timeout of DataSendCompletedEvent
[constr_2500]	PortInterfaces shall be of same kind
[constr_2526]	PortInterfaces need to be compatible to the blueprints
[constr_2527]	Blueprints shall live in package of a proper category
[constr_2528]	PortPrototypes shall not refer to blueprints of PortInterfaces
[constr_2529]	Blueprints of ports and interfaces shall be compatible
[constr_2533]	Iteration along output axis is only supported for VALUE and VAL_BLK
[constr_4000]	Local communication of mode switches
[constr_4001]	Content of ModeRequestTypeMap
[constr_4002]	Unambiguous mapping of modes to data types
[constr_4003]	Semantics of SwcModeSwitchEvent
[constr_4004]	Context of SenderReceiverAnnotation
[constr_4005]	Context of ClientServerAnnotation
[constr_4006]	Context of ParameterPortAnnotation
[constr_4007]	Context of ModePortAnnotation
[constr_4008]	Context of TriggerPortAnnotation
[constr_4009]	Context of NvDataPortAnnotation
[constr_4010]	Context of DelegatedPortAnnotation
[constr_4011]	ComSpec and ModeSwitchedAckEvent
[constr_4012]	Timeout of ModeSwitchedAckEvent
[constr_4035]	ValueSpecification shall fit into data type

Table G.1: Added Constraints in R4.0.1

G.1.3 Deleted Constraints in R4.0.1

N/A

G.2 Traceable item history of this document according to AUTOSAR Release R4.0.2

G.2.1 Changed Constraints in R4.0.2

Number	Heading
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1061]	Compatibility of data types with category STRUCTURE
[constr_2001]	Initial value for a specific implicitInterRunnableVariable or explicitInterRunnableVariable

Table G.2: Changed Constraints in R4.0.2

G.2.2 Added Constraints in R4.0.2

Number	Heading
[constr_1127]	ServiceSwComponentType shall not have ServiceNeeds
[constr_1128]	Queue length of ClientServerOperations associated with the same RunnableEntity
[constr_1129]	swImplPolicy and NonqueuedReceiverComSpec
[constr_1130]	swImplPolicy and NonqueuedReceiverComSpec
[constr_1131]	swImplPolicy and NonqueuedSenderComSpec
[constr_1132]	swImplPolicy and NonqueuedSenderComSpec
[constr_1133]	Identical CompuScale Symbolic Names shall have the same range
[constr_1134]	Allowed structure of TEXTTABLE
[constr_1135]	Limit of vt in BITFIELD_TEXTTABLE
[constr_1136]	Compatibility of introduction of blueprint and blueprinted element
[constr_1137]	Applicability of ParameterInterface
[constr_1138]	assignedPort and DiagEventDebounceMonitorInternal
[constr_1139]	assignedPort of DiagEventDebounceMonitorInternal shall refer to an RPortPrototype
[constr_2034]	SwAddrMethod referenced by RunnableEntitys or BswSchedulableEntitys
[constr_2035]	swImplPolicy for VariableDataPrototype in SenderReceiverInterface
[constr_2036]	swImplPolicy for VariableDataPrototype in NvDataInterface
[constr_2037]	swImplPolicy for VariableDataPrototype in the role ramBlock
[constr_2038]	swImplPolicy for VariableDataPrototype in the role implicitInterRunnableVariable
[constr_2039]	swImplPolicy for VariableDataPrototype in the role explicitInterRunnableVariable
[constr_2040]	swImplPolicy for VariableDataPrototype in the role arTypedPerInstanceMemory
[constr_2041]	swImplPolicy for VariableDataPrototype in the role staticMemory

▽

△

Number	Heading
[constr_2042]	swImplPolicy for ParameterDataPrototype in ParameterInterface
[constr_2043]	swImplPolicy for ParameterDataPrototype in the role staticMemory
[constr_2044]	swImplPolicy for ParameterDataPrototype in the role sharedParameter
[constr_2045]	swImplPolicy for ParameterDataPrototype in the role perInstance-Parameter
[constr_2046]	swImplPolicy for ParameterDataPrototype in the role constantMemory
[constr_2047]	swImplPolicy for ArgumentDataPrototype
[constr_2048]	swImplPolicy for SwServiceArg
[constr_2535]	Target of an autosarParameter in AutosarParameterRef shall refer to a parameter
[constr_2536]	Target of an autosarVariable in AutosarVariableRef shall refer to a variable

Table G.3: Added Constraints in R4.0.2

G.2.3 Deleted Constraints in R4.0.2

Number	Heading
[constr_1099]	Data type of inter-runnable variables

Table G.4: Deleted Constraints in R4.0.2

G.3 Traceable item history of this document according to AUTOSAR Release R4.0.3

G.3.1 Changed Constraints in R4.0.3

Number	Heading
[constr_1006]	applicable data categorys
[constr_1009]	SwDataDefProps applicable to ImplementationDataTypes
[constr_1014]	Supported value encodings for SwBaseType
[constr_1015]	Prioritization of SwDataDefProps
[constr_1043]	PortInterface vs. ComSpec
[constr_1051]	Compatibility of SwDataDefProps
[constr_1053]	Compatibility of PhysicalDimensions
[constr_1063]	Compatibility of data types with category BOOLEAN
[constr_1110]	Value of category in EndToEndDescription
[constr_1113]	Existence of attributes in PROFILE_01

▽

△

Number	Heading
[constr_1118]	Existence of attributes in PROFILE_02
[constr_1134]	Allowed structure of TEXTTABLE
[constr_2000]	Compatibility of ClientServerOperations triggering the same RunnableEntity
[constr_2027]	SwcServiceDependency shall be defined for service ports only

Table G.5: Changed Constraints in R4.0.3

G.3.2 Added Constraints in R4.0.3

Number	Heading
[constr_1140]	Combination of invalidValue with the attribute handleInvalid
[constr_1141]	Applicability of the scope attribute
[constr_1142]	category of CompuMethod shall not be extended
[constr_1143]	category of AutosarDataType shall not be extended
[constr_1144]	SensorActuatorSwComponentType, EcuAbstractionSwComponentType, and ComplexDeviceDriverSwComponentType may only reference a HwType
[constr_1145]	Finding the symbol for the representation of a CompuScale in C code
[constr_1146]	Applicability of a symbol for a CompuScale in C code
[constr_1147]	Standardized values for the attribute category of meta-class PortGroup
[constr_1148]	PortInterfaces of PortPrototypes used to connect to NvBlockSwComponentTypes
[constr_1149]	PortPrototypes used for NV data management
[constr_1150]	Usage of valueType for PortDefinedArgumentValue
[constr_1151]	Applicability of PortInterfaceMapping
[constr_1151]	category of ApplicationArrayElement and AutosarDataType referenced in the role type shall be kept in sync
[constr_1153]	Applicability of compatibility requirements for CompuScales
[constr_1154]	Compatibility of CompuScales for sender-receiver communication and similar use cases
[constr_1155]	Compatibility of CompuScales for client-server communication
[constr_1156]	Relevance of “names” of CompuScales
[constr_1157]	Applicability of constraints of CompuScales
[constr_1158]	Applicable categorys for attribute compuMethod
[constr_1159]	Consistency of VariableAndParameterInterfaceMapping with respect to the referenced DataInterfaces
[constr_1160]	Size of Compound Primitive Data Type is variant
[constr_1161]	Applicability of the index attribute of Ref
[constr_1162]	Compatibility of SwRecordLayouts
[constr_1163]	Compatibility of CompuMethods

▽

△

Number	Heading
[constr_1164]	Number of argument s owned by a RunnableEntity
[constr_1165]	Applicability of RunnableEntityArgument
[constr_1166]	Restrictions of ModeRequestTypeMap
[constr_1167]	ImplementationDataType s used as ModeRequestTypeMap.implementation-DataType
[constr_1168]	Compatibility of ImplementationDataType s used used in the ModeRequest-TypeMap
[constr_1169]	Allowed values for Trigger.swImplPolicy
[constr_1170]	Interpretation of attribute maxDeltaCounterInit owned by EndToEndDescrip-tion
[constr_1171]	Interpretation of attribute maxDeltaCounterInit of EndToEndDescription
[constr_1172]	Allowed values of SwCalibrationAccessEnum for ModeDeclarationGroup-Prototype
[constr_1173]	Applicability of AutosarParameterRef referencing a VariableDataPrototype
[constr_1174]	PortInterface s used in the context of CompositionSwComponentType s cannot refer to AUTOSAR services
[constr_1175]	Depending on its category, CompuMethod shall refer to a unit
[constr_1176]	Compatibility of CompuScale s of category LINEAR and RAT_FUNC
[constr_1177]	Allowed category for SwPointerTargetProps
[constr_1178]	Existence of attributes of SwDataDefProps in the context of Implementation-DataType
[constr_1179]	Existence of ModeDeclaration.value within a ModeDeclarationGroup
[constr_1180]	Existence of ModeDeclarationGroup.onTransitionValue
[constr_1181]	Numerical values used in ModeDeclaration.value and ModeDeclaration-Group.onTransitionValue
[constr_1182]	Allowed values for InternalTriggeringPoint.swImplPolicy
[constr_1183]	EndToEndProtectionVariablePrototype s aggregated by EndToEndProtec-tion
[constr_1184]	Consistency of rootDataPrototype and base in the context of Application-CompositeElementInPortInterfaceInstanceRef
[constr_1185]	Consistency of data types in the context of ApplicationCompositeElementIn-PortInterfaceInstanceRef
[constr_1186]	Consistency of data types in the context of ArVariableInImplementationData-InstanceRef
[constr_1187]	Compatibility of VariableDataPrototype s or ParameterDataPrototype s typed by composite data types
[constr_1188]	Existence of ReceiverComSpec.replaceWith
[constr_1189]	Allowed targets of externalReplacement
[constr_1190]	Only one mapping for composite to primitive use case
[constr_2049]	Different ModeDeclarationGroup s shall have different shortName s.
[constr_2050]	Mandatory information of a SwAxisCont
[constr_2051]	Mandatory information of a SwValueCont

▽

△

Number	Heading
[constr_2052]	Values of swArraysize and the number of values provided by swValuesPhys shall be consistent.
[constr_2053]	Consistency between role IUMPRNumerator and ObdRatioService-Needs.connectionType
[constr_2544]	Limits need to be consistent
[constr_2545]	invalidValue shall fit in the specified ranges
[constr_2548]	Data constraint of value axis shall match
[constr_2549]	Units of input axis shall be consistent
[constr_2550]	Units of value axis shall be consistent
[constr_2551]	SwCalprmAxis.baseType shall be ignored
[constr_2561]	Application of DataConstrRule.constrLevel

Table G.6: Added Constraints in R4.0.3

G.3.3 Added Specification Items in R4.0.3

Number	Heading
[TPS_SWCT_01000]	Usage of attribute symbol of the symbolProps
[TPS_SWCT_01001]	Prefix symbols generated for the RunnableEntity
[TPS_SWCT_01002]	SwComponentTypes may only interact by means of their PortPrototypes
[TPS_SWCT_01003]	Inconsistencies regarding the value of serviceKind and the actual implementation of the PortInterface
[TPS_SWCT_01004]	Default value if serviceKind is not defined
[TPS_SWCT_01005]	Usage of SwcServiceDependencys for vendor-specific services
[TPS_SWCT_01006]	arraySize of ImplementationDataType shall be used to define the size of the array
[TPS_SWCT_01007]	Semantics of array index
[TPS_SWCT_01008]	Definition of positive integer values that are directly taken over by the RTE generator for creating the programmatic representations of the ModeDeclaration
[TPS_SWCT_01009]	The numerical values used to define the values of ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue can be arbitrarily defined
[TPS_SWCT_01010]	categorys for the definition of a ModeDeclarationGroup
[TPS_SWCT_01011]	Default category of a ModeDeclarationGroup
[TPS_SWCT_01012]	AtomicSwComponentType reads the current ECU mode (fixed variant)
[TPS_SWCT_01013]	AtomicSwComponentType shall keep the ECU alive (fixed variant)
[TPS_SWCT_01014]	AtomicSwComponentType wants to select a shutdown target (fixed variant)
[TPS_SWCT_01015]	AtomicSwComponentType wants to select a boot target (fixed variant)

▽

△

Number	Heading
[TPS_SWCT_01016]	AtomicSwComponentType wants to select a shutdown target (flexible variant)
[TPS_SWCT_01017]	AtomicSwComponentType wants to select a boot target (flexible variant)
[TPS_SWCT_01018]	AtomicSwComponentType wants to use an alarm clock (flexible variant)
[TPS_SWCT_01019]	AtomicSwComponentType reads the current ComM mode
[TPS_SWCT_01020]	AtomicSwComponentType requests a ComM mode. It may also check later whether the requested ComM mode has become effective
[TPS_SWCT_01021]	AtomicSwComponentType acts as a mode manager that influences the ECU state
[TPS_SWCT_01022]	Queued processing of internal trigger
[TPS_SWCT_01023]	Mapping of elements of composite data types
[TPS_SWCT_01024]	Combination of ApplicationCompositeDataType and nested ImplementationDataType
[TPS_SWCT_01025]	The role of PortPrototypes in the AUTOSAR architecture
[TPS_SWCT_01026]	The role of PortInterfaces in the AUTOSAR architecture
[TPS_SWCT_01027]	Different flavors of PortInterfaces
[TPS_SWCT_01028]	AtomicSwComponentType implements a Diagnostic Monitor
[TPS_SWCT_01029]	AtomicSwComponentType implements a Diagnostic Monitor
[TPS_SWCT_01030]	RunnableEntity
[TPS_SWCT_01031]	ExclusiveArea
[TPS_SWCT_01032]	CompositionSwComponentType
[TPS_SWCT_01033]	Nested definition of CompositionSwComponentTypes
[TPS_SWCT_01034]	CompositionSwComponentTypes do not have any binary footprint
[TPS_SWCT_01035]	CompositionSwComponentType aggregates SwComponentPrototypes
[TPS_SWCT_01036]	SwComponentPrototype implements a specific role
[TPS_SWCT_01037]	arbitrary numbers of SwComponentPrototypes can be created
[TPS_SWCT_01038]	Support for Variant Handling in the in Software Component Template
[TPS_SWCT_01039]	Purpose of variant handling
[TPS_SWCT_01040]	SwConnector exists depending on a *PostBuild* condition
[TPS_SWCT_01041]	API functions of not existing SwConnector are still part of the software-component's implementation
[TPS_SWCT_01042]	Four types of locations in the meta-model which may exhibit variability
[TPS_SWCT_01043]	ApplicationSwComponentTypes are independent from actual ECU Hardware
[TPS_SWCT_01044]	ServiceNeeds
[TPS_SWCT_01045]	Actual values of ECU configuration parameters fulfill the requirements given by the ServiceNeeds
[TPS_SWCT_01046]	ServiceNeeds are defined in the scope of the SwcInternalBehavior
[TPS_SWCT_01047]	Reference from the software representation of a sensor/actuator to the actual hardware element

▽

△

Number	Heading
[TPS_SWCT_01048]	SensorActuatorSwComponentType may use the I/O hardware abstraction directly
[TPS_SWCT_01049]	Two ways to use the ExclusiveAreas
[TPS_SWCT_01050]	RunnableEntity always runs inside an ExclusiveArea
[TPS_SWCT_01051]	RunnableEntity explicitly enters and leaves a specific ExclusiveArea
[TPS_SWCT_01052]	Inter-runnable variable
[TPS_SWCT_01053]	Relationship of interchanged data with RunnableEntitys
[TPS_SWCT_01054]	Semantics of the explicitInterRunnableVariable
[TPS_SWCT_01055]	Semantics of implicitInterRunnableVariable
[TPS_SWCT_01056]	Physical dimension
[TPS_SWCT_01057]	Unit references one physical dimension
[TPS_SWCT_01058]	UnitGroup
[TPS_SWCT_01059]	Exponent for each of the seven fundamental dimensions
[TPS_SWCT_01060]	Negative exponents
[TPS_SWCT_01061]	Conversion of units
[TPS_SWCT_01062]	Documentation of software-components
[TPS_SWCT_01063]	PortGroup
[TPS_SWCT_01064]	PortGroups have to be defined on the VFB level
[TPS_SWCT_01065]	PortPrototype may belong to more than one PortGroups
[TPS_SWCT_01066]	PortGroups can be associated with certain ServiceNeeds
[TPS_SWCT_01067]	Initial mode
[TPS_SWCT_01068]	Units can be grouped with the help of UnitGroup
[TPS_SWCT_01069]	DataInterface is defined as abstract base class
[TPS_SWCT_01070]	PortInterface acts as a *type* for a PortPrototype
[TPS_SWCT_01071]	ModeDeclaration
[TPS_SWCT_01072]	ApplicationDataType and ImplementationDataType
[TPS_SWCT_01073]	Composite ApplicationDataType
[TPS_SWCT_01074]	Composite ImplementationDataType
[TPS_SWCT_01075]	SwcInternalBehavior
[TPS_SWCT_01076]	Number of elements of a specific ApplicationArrayDataType might vary at run-time
[TPS_SWCT_01077]	Configure the response to mode changes
[TPS_SWCT_01078]	Configurable array size
[TPS_SWCT_01079]	SwConnector
[TPS_SWCT_01080]	Delegation ports
[TPS_SWCT_01081]	Implications of being a delegation port
[TPS_SWCT_01082]	AssemblySwConnector
[TPS_SWCT_01083]	DelegationSwConnector

▽

△

Number	Heading
[TPS_SWCT_01084]	Outer PortPrototype is referenced by multiple DelegationSw-Connectors
[TPS_SWCT_01085]	Variation on the behavior level
[TPS_SWCT_01086]	Request mode change
[TPS_SWCT_01087]	Propagation of mode information
[TPS_SWCT_01088]	ComSpecs defined by CompositionSwComponentTypes
[TPS_SWCT_01089]	end-to-end communication protection
[TPS_SWCT_01090]	EndToEndProtection
[TPS_SWCT_01091]	Two cases for end-to-end protection
[TPS_SWCT_01092]	EndToEndProtectionSet
[TPS_SWCT_01093]	Definition of end-to-end protection is splitable
[TPS_SWCT_01094]	category of EndToEndDescription
[TPS_SWCT_01095]	category set to NONE
[TPS_SWCT_01096]	PortGroup
[TPS_SWCT_01097]	CompositionSwComponentType cannot have RunnableEntitys
[TPS_SWCT_01098]	Only AtomicSwComponentType can have RunnableEntitys
[TPS_SWCT_01099]	PortInterfaceMapping
[TPS_SWCT_01100]	Precedence of PortInterfaceMapping
[TPS_SWCT_01101]	Unmapped elements of PortInterfaces
[TPS_SWCT_01102]	VariableAndParameterInterfaceMapping
[TPS_SWCT_01103]	Mapping between different kinds of PortInterfaces
[TPS_SWCT_01104]	Possible mappings are restricted by the swImplPolicy
[TPS_SWCT_01105]	ClientServerInterfaceMapping
[TPS_SWCT_01106]	ClientServerOperation
[TPS_SWCT_01107]	swMinAxisPoints and swMaxAxisPoints represent variation points
[TPS_SWCT_01108]	Added value of an AtomicSwComponentType
[TPS_SWCT_01109]	Adding the SwcInternalBehavior in a later process step
[TPS_SWCT_01110]	Symbolic name of a software-component
[TPS_SWCT_01111]	PortPrototypes need an additional model artifact, the PortInterface
[TPS_SWCT_01112]	PortPrototypes are either *require*- or *provide*-ports.
[TPS_SWCT_01113]	Connecting two PortPrototypes
[TPS_SWCT_01114]	SenderReceiverInterface
[TPS_SWCT_01115]	invalidationPolicy
[TPS_SWCT_01116]	swImplPolicy
[TPS_SWCT_01117]	Communication patterns for sender-receiver communication
[TPS_SWCT_01118]	ClientServerInterface
[TPS_SWCT_01119]	Direction of ArgumentDataPrototypes
[TPS_SWCT_01120]	Client needs to provide ArgumentDataPrototypes
[TPS_SWCT_01121]	Pass correct data type

▽

△

Number	Heading
[TPS_SWCT_01122]	Synchronous call of ClientServerOperation
[TPS_SWCT_01123]	No default values for ArgumentDataPrototypes
[TPS_SWCT_01124]	Definition of ArgumentDataPrototypes within the context of a ClientServerOperation is ordered
[TPS_SWCT_01125]	serverArgumentImplPolicy
[TPS_SWCT_01126]	Access to partial networking via BswM
[TPS_SWCT_01127]	Byte arrary with variable size
[TPS_SWCT_01128]	SwRecordLayout needed
[TPS_SWCT_01129]	Express diagnostic capabilities
[TPS_SWCT_01130]	Measurement and calibration access to model elements is defined by swCalibrationAccess
[TPS_SWCT_01131]	AtomicSwComponentType accepts a request to restart an entire function
[TPS_SWCT_01132]	AtomicSwComponentType provides information about operating cycles
[TPS_SWCT_01133]	AtomicSwComponentType provides information about aging cycles
[TPS_SWCT_01134]	AtomicSwComponentType enables storage of DTCs in general
[TPS_SWCT_01135]	AtomicSwComponentType enables storage of subsequent DTCs
[TPS_SWCT_01136]	AtomicSwComponentType retrieves information from the fault storage
[TPS_SWCT_01137]	Dem provides information that the fault storage overflows
[TPS_SWCT_01138]	AtomicSwComponentType suppresses the storage of DTCs within the Dem
[TPS_SWCT_01139]	AtomicSwComponentType informs the Dem that the PTO is active
[TPS_SWCT_01140]	AtomicSwComponentType needs information about specific DTC without being a diagnostic monitor
[TPS_SWCT_01141]	AtomicSwComponentType may have RPortPrototypes typed by an NvDataInterface
[TPS_SWCT_01142]	non-volatile data are provided by a specialized AtomicSwComponentType
[TPS_SWCT_01143]	Non-volatile data represented by an *NvBlockComponent* can be read and written
[TPS_SWCT_01144]	NvBlockDescriptor specifies the properties of exactly one *NvBlock*
[TPS_SWCT_01145]	ramBlock and the romBlock are described by a VariableDataPrototype and a ParameterDataPrototype
[TPS_SWCT_01146]	romBlock is optional
[TPS_SWCT_01147]	No romBlock is configured
[TPS_SWCT_01148]	NvBlockDataMapping
[TPS_SWCT_01149]	RoleBasedPortAssignment of NvBlockDescriptor
[TPS_SWCT_01150]	InternalBehavior of a NvBlockSwComponentType
[TPS_SWCT_01151]	RunnableEntitys do not have further attributes
[TPS_SWCT_01152]	InternalBehavior does not have further attributes
[TPS_SWCT_01153]	IncludedModeDeclarationGroupSet
[TPS_SWCT_01154]	Attribute prefix of IncludedModeDeclarationGroupSet
[TPS_SWCT_01155]	IncludedDataTypeSet

▽

△

Number	Heading
[TPS_SWCT_01156]	Required if the AutosarDataType is not used for any DataPrototype
[TPS_SWCT_01157]	Attribute literalPrefix of IncludedDataTypeSet
[TPS_SWCT_01158]	Three cases for PortInterfaceMapping
[TPS_SWCT_01159]	Mapping is described separately from the SwConnector as reusable ARElement
[TPS_SWCT_01160]	ModeInterfaceMapping
[TPS_SWCT_01161]	TriggerInterfaceMapping
[TPS_SWCT_01162]	Conditional existence of TextTableMapping
[TPS_SWCT_01163]	Conversion from firstValue to secondValue
[TPS_SWCT_01164]	Conversion from secondValue to firstValue
[TPS_SWCT_01165]	Invertible mapping
[TPS_SWCT_01166]	Non-invertible mapping
[TPS_SWCT_01167]	Validity of ModeInterfaceMapping
[TPS_SWCT_01168]	Linear conversion factor can be calculated
[TPS_SWCT_01169]	Support for partial networking
[TPS_SWCT_01170]	Purpose of Virtual Function Cluster
[TPS_SWCT_01171]	Purpose of a control port
[TPS_SWCT_01172]	Requesting and releasing partial networks
[TPS_SWCT_01173]	Control port shall **not** become a part of the PortGroup
[TPS_SWCT_01174]	Status port shall **not** become a member of the PortGroup
[TPS_SWCT_01175]	Actively query the status of a partial network
[TPS_SWCT_01176]	last-is-best semantics for sender-receiver communication
[TPS_SWCT_01177]	Assignment of constant values
[TPS_SWCT_01178]	Specialized subclasses of ValueSpecification
[TPS_SWCT_01179]	Compound Primitive Data Type
[TPS_SWCT_01180]	Maximum possible size of Compound Primitive Data Type
[TPS_SWCT_01181]	Bound model specifies a primitive which is smaller than the maximum defined by the range of the involved SwSystemconst
[TPS_SWCT_01182]	Conceptual levels for the definition of initial values
[TPS_SWCT_01183]	Actual value of an initValue shall be interpreted according to the AutosarDataType
[TPS_SWCT_01184]	ApplicationPrimitiveDataTypes with category VALUE
[TPS_SWCT_01185]	initValues for Compound Primitive Data Types
[TPS_SWCT_01186]	ConstantSpecificationMapping
[TPS_SWCT_01187]	ConstantSpecificationMappingSet referenced by the InternalBehavior
[TPS_SWCT_01188]	Definition of calibration data sets through RTE-generator and compiler
[TPS_SWCT_01189]	DataTypeMap
[TPS_SWCT_01190]	ModeRequestTypeMap

▽

△

Number	Heading
[TPS_SWCT_01191]	mapped ApplicationDataType and ImplementationDataType shall be compatible
[TPS_SWCT_01192]	Meta-classes that have an association to a DataTypeMappingSet
[TPS_SWCT_01193]	Mappings between application and implementation types do not necessarily have to form a 1:1 relation
[TPS_SWCT_01194]	Symbolic name of an ImplementationDataType
[TPS_SWCT_01195]	Mapping of composite element to primitive DataPrototype
[TPS_SWCT_01196]	Semantics of an external trigger event communication
[TPS_SWCT_01197]	TriggerInterface
[TPS_SWCT_01198]	Period for periodic triggering
[TPS_SWCT_01199]	Queued processing of Triggers
[TPS_SWCT_01200]	ModeDeclarationGroupPrototype per ModeSwitchInterface
[TPS_SWCT_01201]	CompositionSwComponentType requires and provides the modes that are required or provided by its contained SwComponentPrototypes
[TPS_SWCT_01202]	ApplicationDataType defines a subset of the values used in the ModeDeclarationGroup
[TPS_SWCT_01203]	PortPrototype may own port annotations
[TPS_SWCT_01204]	GeneralAnnotation
[TPS_SWCT_01205]	Typical annotations for sender/receiver communication
[TPS_SWCT_01206]	Min and Max annotations are valid for a certain amount of time
[TPS_SWCT_01207]	VariableDataPrototypes use the same application-level SenderReceiverAnnotation
[TPS_SWCT_01208]	Grouping for SenderReceiverAnnotation
[TPS_SWCT_01209]	ClientServerAnnotation
[TPS_SWCT_01210]	IoHwAbstractionServerAnnotation
[TPS_SWCT_01211]	Assign several annotations to ArgumentDataPrototype
[TPS_SWCT_01212]	ParameterPortAnnotation
[TPS_SWCT_01213]	ModePortAnnotation
[TPS_SWCT_01214]	TriggerPortAnnotation
[TPS_SWCT_01215]	NvDataPortAnnotation
[TPS_SWCT_01216]	DelegatedPortAnnotation
[TPS_SWCT_01217]	Semantics of DelegatedPortAnnotation.signalFan
[TPS_SWCT_01218]	Big picture of ComSpec
[TPS_SWCT_01219]	ComSpec for queued and non-queued sender-receiver communication
[TPS_SWCT_01220]	initValue defines an initial value that shall be taken if the corresponding dataElement has not yet been received
[TPS_SWCT_01221]	DataFilter
[TPS_SWCT_01222]	Applicability of DataFilter
[TPS_SWCT_01223]	networkRepresentation defines how a specific dataElement is represented on a communication bus

▽

△

Number	Heading
[TPS_SWCT_01224]	CompuMethods of dataElement and the networkRepresentation are used for conversion purposes
[TPS_SWCT_01225]	RunnableEntity implements the functionality of two or more ClientServerOperations
[TPS_SWCT_01226]	initValue on the level of a ComSpec is relevant for connections to the corresponding PortPrototype
[TPS_SWCT_01227]	Unconnected RPortPrototype typed by NvDataInterface
[TPS_SWCT_01228]	NvProvideComSpec
[TPS_SWCT_01229]	Three different levels of abstraction regarding the definition of data types
[TPS_SWCT_01230]	Application Data Level
[TPS_SWCT_01231]	Application level may impose strong requirements on the design of the corresponding implementation level
[TPS_SWCT_01232]	Implementation Data Level
[TPS_SWCT_01233]	Use case for the Implementation Data Level
[TPS_SWCT_01234]	Base Level
[TPS_SWCT_01235]	Mapping of data defined on the *Application* level to the *Implementation* and *Base Type* level
[TPS_SWCT_01236]	Big picture of data types
[TPS_SWCT_01237]	SwDataDefProps
[TPS_SWCT_01238]	Attribute category used in the context of AutosarDataType
[TPS_SWCT_01239]	default value for attribute category used in the context of AutosarDataType
[TPS_SWCT_01240]	Subclasses of ApplicationDataType
[TPS_SWCT_01241]	Applicable categorys for subclasses ApplicationDataType
[TPS_SWCT_01242]	category characterizes the nature of a data type on application level
[TPS_SWCT_01243]	Definition of enumeration types
[TPS_SWCT_01244]	Data types for calibration parameters are also described as primitive types
[TPS_SWCT_01245]	SwDataDefProps control the structure of calibration parameters
[TPS_SWCT_01246]	SwRecordLayout may be required for A2L generation
[TPS_SWCT_01247]	ApplicationArrayDataType and ApplicationRecordDataType
[TPS_SWCT_01248]	Nested definition of ImplementationDataType
[TPS_SWCT_01249]	ApplicationRecordDataType
[TPS_SWCT_01250]	ImplementationDataType has been introduced to optimize the formal support for data type handling on the implementation level
[TPS_SWCT_01251]	Limited set of values for category are applicable for ImplementationDataType
[TPS_SWCT_01252]	ImplementationDataType can express concepts not available on application level
[TPS_SWCT_01253]	Rules apply for the usage of the attribute ImplementationDataType.typeEmitter
[TPS_SWCT_01254]	ImplementationDataType with array semantics

▽

△

Number	Heading
[TPS_SWCT_01255]	Indicate whether the array is supposed to have a fixed size or whether the actual size might change during run-time
[TPS_SWCT_01256]	Definition of multi-dimensional array data types
[TPS_SWCT_01257]	ImplementationDataType or the aggregated ImplementationDataTypeElements do not form closed sets
[TPS_SWCT_01258]	Definition of a pointer to data
[TPS_SWCT_01259]	Definition of a pointer to a function
[TPS_SWCT_01260]	SwBaseType
[TPS_SWCT_01261]	Use case for SwBaseType
[TPS_SWCT_01262]	memAlignment and byteOrder are platform specific
[TPS_SWCT_01263]	Further use cases for SwBaseType
[TPS_SWCT_01264]	Data prototypes implement a role of a data type
[TPS_SWCT_01265]	DataPrototype aggregates an own set of SwDataDefProps
[TPS_SWCT_01266]	Three non-abstract classes derived from AutosarDataPrototype
[TPS_SWCT_01267]	DataPrototype can be aggregated in different roles
[TPS_SWCT_01268]	Definition of initValue for a VariableDataPrototype or a ParameterDataPrototype
[TPS_SWCT_01269]	In PortInterfaces, initial values defined for DataPrototypes are ignored
[TPS_SWCT_01270]	AutosarVariableRef
[TPS_SWCT_01271]	AutosarParameterRef
[TPS_SWCT_01272]	Semantics of swComparisonVariable
[TPS_SWCT_01273]	Precedence rules for the application of SwDataDefProps
[TPS_SWCT_01274]	SwDataDefProps used to support calibration and measurement
[TPS_SWCT_01275]	values of the attribute swImplPolicy are restricted depending on the context
[TPS_SWCT_01276]	Computation methods
[TPS_SWCT_01277]	Computation methods are used for the conversion of *internal* values into their *physical* representation and vice versa
[TPS_SWCT_01278]	CompuMethods can also be used to assign symbolic names to internal values
[TPS_SWCT_01279]	Preferred conversion direction depends on the use case
[TPS_SWCT_01280]	CompuMethod applied to values outside of its limits
[TPS_SWCT_01281]	Unit associated with a PhysicalDimension
[TPS_SWCT_01283]	Rational function
[TPS_SWCT_01284]	CompuScale might require a representation in the generated RTE C code
[TPS_SWCT_01285]	Physical dimension
[TPS_SWCT_01286]	DataConstr
[TPS_SWCT_01287]	Standard limits and extended limits in the ASAM-MCD2 (ASAP2) specification
[TPS_SWCT_01288]	Interpretation of PhysConstrs and InternalConstrs by tools
[TPS_SWCT_01289]	Semantics of Limit
[TPS_SWCT_01290]	SwAddrMethod

▽

△

Number	Heading
[TPS_SWCT_01291]	Association of MemorySection with SwAddrMethod
[TPS_SWCT_01292]	Usage of SwAddrMethod in the context of a DataPrototype
[TPS_SWCT_01293]	RTE Generator has to derive the Memory Allocation Keyword
[TPS_SWCT_01294]	Missing SwDataDefProps.swAddrMethod
[TPS_SWCT_01295]	SwRecordLayout
[TPS_SWCT_01296]	Different approaches of ASAM MCD-2MC and AUTOSAR with respect to SwRecordLayout
[TPS_SWCT_01297]	Compliance of ApplicationDataTypes or ImplementationDataTypes to swDataDefProps
[TPS_SWCT_01298]	Computing SwRecordLayout from ImplementationDataTypes is not possible
[TPS_SWCT_01299]	Relation of swRecordLayoutGroup to subElement
[TPS_SWCT_01300]	Relationship between record layouts and interpolation routines
[TPS_SWCT_01301]	Importance of initial values
[TPS_SWCT_01302]	Semantics of minimumStartInterval
[TPS_SWCT_01303]	symbol attribute describes the RunnableEntity's entry point
[TPS_SWCT_01304]	Cat. 1A and 1B RunnableEntitys will eventually terminate
[TPS_SWCT_01305]	RunnableEntity as one that cannot be invoked concurrently
[TPS_SWCT_01306]	Software-component description itself does not put any bounds on the number of concurrent invocations of a RunnableEntity
[TPS_SWCT_01307]	supportsMultipleInstantiation vs. canBeInvokedConcurrently
[TPS_SWCT_01308]	Combination of supportsMultipleInstantiation=false and canBeInvokedConcurrently=false
[TPS_SWCT_01309]	signature of a RunnableEntity depends on the connected RTEEvent
[TPS_SWCT_01310]	Categories of RunnableEntitys
[TPS_SWCT_01311]	Name of an operation argument
[TPS_SWCT_01312]	RunnableEntity has a mapping to BswModuleEntry
[TPS_SWCT_01313]	Conditions for a transition from suspended to to be started
[TPS_SWCT_01314]	RTEEvent
[TPS_SWCT_01315]	Interaction of RunnableEntity with RTEEvent
[TPS_SWCT_01316]	Abstract base class RTEEvent
[TPS_SWCT_01317]	RTE triggers RunnableEntity in response to occurring RTEEvent
[TPS_SWCT_01318]	RunnableEntity and WaitPoint
[TPS_SWCT_01319]	RTEEvent can be used to trigger WaitPoints in different RunnableEntitys
[TPS_SWCT_01320]	RunnableEntitys of category 2
[TPS_SWCT_01321]	Communication among RunnableEntitys
[TPS_SWCT_01322]	Interaction patterns for the application of the sender-receiver paradigm
[TPS_SWCT_01323]	Read and write access to a dataElement
[TPS_SWCT_01324]	Mode switches need to be completed in finite time

▽

△

Number	Heading
[TPS_SWCT_01325]	Read and write access is only applicable for RunnableEntitys of category 1
[TPS_SWCT_01326]	Constrain the scope of a specific communication
[TPS_SWCT_01327]	RTE generator can omit the creation of checks at run-time
[TPS_SWCT_01328]	Default value of attribute scope
[TPS_SWCT_01329]	Access to specific data is implemented by means of aggregating the meta-class VariableAccess in specific roles
[TPS_SWCT_01330]	RunnableEntity can also have dataSendPoints
[TPS_SWCT_01331]	dataWriteAccess vs. dataSendPoint
[TPS_SWCT_01332]	dataReceivePointByValue vs. dataReceivePointByArgument
[TPS_SWCT_01333]	dataReceivePointByValue/dataReceivePointByArgument vs. dataReadAccess
[TPS_SWCT_01334]	RunnableEntitys of category 1 may have dataReceivePointByValues/dataReceivePointByArguments
[TPS_SWCT_01335]	Combine dataReceivePointByValue or dataReceivePointByArgument with a WaitPoint
[TPS_SWCT_01336]	dataSendPoint also allows for the definition of a DataSendCompletedEvent
[TPS_SWCT_01337]	DataReceivedEvent
[TPS_SWCT_01338]	DataReceiveErrorEvent
[TPS_SWCT_01339]	RTE activates RunnableEntity in response to DataReceiveErrorEvent
[TPS_SWCT_01340]	DataReceiveErrorEvent cannot be combined with a WaitPoint
[TPS_SWCT_01341]	DataReceiveErrorEvent is directly associated with the corresponding VariableDataPrototype
[TPS_SWCT_01342]	Invocation of a server operation
[TPS_SWCT_01343]	Synchronous vs. asynchronous invocation
[TPS_SWCT_01344]	Consistency of values of timeout
[TPS_SWCT_01345]	Synchronous operation invocation
[TPS_SWCT_01346]	Asynchronous operation invocation
[TPS_SWCT_01347]	Blocking access to operation result in an asynchronous operation invocation
[TPS_SWCT_01348]	Trigger source
[TPS_SWCT_01349]	Trigger sink
[TPS_SWCT_01350]	Calibration Parameters shared among several SwComponentTypes
[TPS_SWCT_01351]	Access to a ParameterDataPrototype
[TPS_SWCT_01352]	Requested mode is just sent and received as an ordinary data value
[TPS_SWCT_01353]	RunnableEntitys react on a mode request via a corresponding RTEEvent
[TPS_SWCT_01354]	PortAPIOption
[TPS_SWCT_01355]	enableTakeAddress = true
[TPS_SWCT_01356]	indirectAPI option switches the generation of the RTE's indirect API functionality

▽

△

Number	Heading
[TPS_SWCT_01357]	Definition of implicit values that are passed by the RTE to the server's entry point
[TPS_SWCT_01358]	Values are hidden from the client components
[TPS_SWCT_01359]	Private memory per instance
[TPS_SWCT_01360]	Arbitrary number of per-instance memory blocks
[TPS_SWCT_01361]	attribute `supportsMultipleInstantiation` == `false`
[TPS_SWCT_01362]	Initialization of `PerInstanceMemory`
[TPS_SWCT_01363]	`PerInstanceMemory` typed by 'C' Data Types
[TPS_SWCT_01364]	Initial value of a `PerInstanceMemory` typed by 'C' Data Types
[TPS_SWCT_01365]	`PerInstanceMemory` typed by AUTOSAR Data Types
[TPS_SWCT_01366]	Initial value of a `PerInstanceMemory` typed by AUTOSAR Data Types
[TPS_SWCT_01367]	Typed by AUTOSAR data type vs. typed by C data type
[TPS_SWCT_01368]	Describe static and constant memory
[TPS_SWCT_01369]	Static and constant memory is not instantiated by the RTE
[TPS_SWCT_01370]	`VariationPointProxy`
[TPS_SWCT_01371]	`VariationPointProxy` vs. `VariationPoint`
[TPS_SWCT_01372]	`bindingTime` = `preCompileTime`
[TPS_SWCT_01373]	RTE generator shall evaluate the `SwSystemconstDependentFormula`
[TPS_SWCT_01374]	Implementation of `AutosarParameterRef`
[TPS_SWCT_01375]	Implementation of `AutosarVariableRef`
[TPS_SWCT_01376]	Software-components need to be capable of reacting to state changes
[TPS_SWCT_01377]	Two mechanisms to define how `SwcInternalBehavior` should interact with the mode management
[TPS_SWCT_01378]	`AtomicSwComponentType` can define an `SwcModeSwitchEvent` to execute `RunnableEntity`
[TPS_SWCT_01379]	`AtomicSwComponentType` can indicate whether an `RTEEvent` that starts an associated `RunnableEntity` is disabled in a certain mode
[TPS_SWCT_01380]	Mode management behavior on the sender side
[TPS_SWCT_01381]	Read the currently active mode
[TPS_SWCT_01382]	Mode switch requests are handled asynchronously by the RTE
[TPS_SWCT_01383]	`ModeSwitchPoint`
[TPS_SWCT_01384]	Execution of initialization code for software-components
[TPS_SWCT_01385]	Execution of initialization code for software-components
[TPS_SWCT_01386]	Initialization by mode management
[TPS_SWCT_01387]	Finalization by mode management
[TPS_SWCT_01388]	Initial modes of `AtomicSwComponentType`s are defined by the `initialMode`
[TPS_SWCT_01389]	`I/O Hardware Abstraction` interfaces MCAL drivers
[TPS_SWCT_01390]	`I/O Hardware Abstraction` might have sub-structures

▽

△

Number	Heading
[TPS_SWCT_01391]	I/O Hardware Abstraction abstracts from the location of peripheral I/O devices
[TPS_SWCT_01392]	Mapping between the EcuAbstractionSwComponentType and the corresponding BswModuleDescription
[TPS_SWCT_01393]	Complex Driver
[TPS_SWCT_01394]	Complex Driver is represented by the ComplexDeviceDriverSwComponentType
[TPS_SWCT_01395]	ComplexDeviceDriverSwComponentType has dependencies to ECU Hardware
[TPS_SWCT_01396]	Mapping between the ComplexDeviceDriverSwComponentType and the corresponding BswModuleDescription
[TPS_SWCT_01397]	Hybrid concept between Basic Software Modules and a SwComponentType
[TPS_SWCT_01398]	Communication patterns for AUTOSAR services
[TPS_SWCT_01399]	Dependency is modeled by aggregating required and provided PortPrototypes
[TPS_SWCT_01400]	PortInterface selected from the set of standardized Service Interfaces
[TPS_SWCT_01401]	Form a top-level RootSwCompositionPrototype
[TPS_SWCT_01402]	Mapping of all AtomicSwComponentType instances to EcuInstances
[TPS_SWCT_01403]	Impact of AUTOSAR services on the methodology
[TPS_SWCT_01404]	Creation of the EcuExtract
[TPS_SWCT_01405]	Creation of the ServiceSwComponentTypes
[TPS_SWCT_01406]	Creation of SwComponentPrototype typed by a ServiceSwComponentType
[TPS_SWCT_01407]	Creation of InternalBehavior typed by a ServiceSwComponentType
[TPS_SWCT_01408]	Creation of SwcBswMapping
[TPS_SWCT_01409]	Update of PortDefinedArgumentValues
[TPS_SWCT_01410]	Dcm and Dem can directly access dataElements in PPortPrototypes typed by a SenderReceiverInterface
[TPS_SWCT_01411]	Use cases for a ServiceSwComponentType to express ServiceNeeds
[TPS_SWCT_01412]	ServiceSwComponentType shall be added in ECU Configuration phase
[TPS_SWCT_01413]	Local communication with services
[TPS_SWCT_01414]	Mode manager needs to communicate with application software components located on other ECUs
[TPS_SWCT_01415]	Interfaces of ServiceProxySwComponentType
[TPS_SWCT_01416]	Difference between a ServiceProxySwComponentType and an ApplicationSwComponentType
[TPS_SWCT_01417]	Define calibration parameters common to all SwComponentPrototypes of the same SwComponentType
[TPS_SWCT_01418]	Ways to define a calibration parameter
[TPS_SWCT_01419]	ParameterSwComponentType shall never aggregate a SwcInternalBehavior

▽

△

Number	Heading
[TPS_SWCT_01420]	SwComponentType requiring access to shared calibration parameters needs RPortPrototype typed by a ParameterInterface
[TPS_SWCT_01421]	ParameterInterface is not restricted to parameters which can actually can be calibrated
[TPS_SWCT_01422]	Delegation of PortPrototypes typed by a ParameterInterface
[TPS_SWCT_01423]	ParameterDataPrototype aggregated in the role constantMemory
[TPS_SWCT_01424]	ParameterDataPrototype aggregated in the role perInstance-Parameter
[TPS_SWCT_01425]	AtomicSwComponentType provides one callback per event if diagnostic event data change
[TPS_SWCT_01426]	AtomicSwComponentType provides callback if any diagnostic event data and/or status changed
[TPS_SWCT_01427]	AtomicSwComponentType provides data for diagnostic purposes via ClientServerInterface
[TPS_SWCT_01428]	ServiceSwComponentType representing the Dem provides a PPort-Prototype for the Dcm
[TPS_SWCT_01429]	[constr_1135] only applies for BITFIELD_TEXTTABLE
[TPS_SWCT_01430]	Conversion specification from internal to physical values as well as the reverse conversion
[TPS_SWCT_01431]	Finding the symbol for the representation of a CompuScale in C code
[TPS_SWCT_01432]	Keep the invalidValue transparent to the sending and receiving software components
[TPS_SWCT_01433]	Invalid values outside the range limits
[TPS_SWCT_01434]	Sender and receiver have knowledge of invalid value
[TPS_SWCT_01435]	Invalid values outside the range limits
[TPS_SWCT_01436]	Different receivers require different handling of data invalidation
[TPS_SWCT_01437]	invalidValue can also be specified without setting a compuMethod
[TPS_SWCT_01438]	Handling of invalidation in the sending RTE
[TPS_SWCT_01439]	Handling of invalidation in the receiving RTE
[TPS_SWCT_01440]	Measurement is not limited to primitive objects
[TPS_SWCT_01441]	Nature of a TYPE_REFERENCE
[TPS_SWCT_01442]	ImplementationDataType of category TYPE_REFERENCE does not define own properties
[TPS_SWCT_01443]	ImplementationDataType of category TYPE_REFERENCE overwrites properties of refined ImplementationDataType
[TPS_SWCT_01444]	Size of SwBaseType is specified in bits
[TPS_SWCT_01445]	Applicability of SwDataDefProps for DataPrototypes
[TPS_SWCT_01446]	References to a DataPrototype may or may not imply the necessity for using an instanceRef
[TPS_SWCT_01447]	Applicable binding times for model elements in the scope of the Software Component Template
[TPS_SWCT_01448]	Pre-defined values for the category of VariationPointProxy

▽

△

Number	Heading
[TPS_SWCT_02000]	Default value for attribute swImplPolicy
[TPS_SWCT_02001]	Values of SwAxisCont with the category COM_AXIS, RES_AXIS are for display only
[TPS_SWCT_02002]	AtomicSwComponentType offers a PPortPrototypes typed by ClientServerInterface to read/write current value via diagnostic services
[TPS_SWCT_02003]	AtomicSwComponentType offers PortPrototypes typed by SenderReceiverInterfaces to read/write current values via diagnostic services
[TPS_SWCT_02004]	AtomicSwComponentType offers a PortPrototype typed by a ClientServerInterface to start/stop or request routine results of diagnostic routines
[TPS_SWCT_02005]	AtomicSwComponentType offers PortPrototypes typed by ClientServerInterfaces to adjust the IO signal via diagnostic services
[TPS_SWCT_02006]	AtomicSwComponentType offers sender receiver ports to adjust the IO signal via diagnostic services
[TPS_SWCT_02007]	AtomicSwComponentType implements a OBD system monitor with In-Use-Monitor Performance Ratio
[TPS_SWCT_02008]	AtomicSwComponentType offers a server port to read/write current value via OBD services
[TPS_SWCT_02009]	AtomicSwComponentType offers sender receiver ports to read/write current values via OBD services
[TPS_SWCT_02010]	AtomicSwComponentType offers a server port to read vehicle information values via OBD services
[TPS_SWCT_02011]	AtomicSwComponentType offers a server port to read DTR value via OBD services
[TPS_SWCT_02012]	AtomicSwComponentType offers a server port for request control of on-board system, test or component via OBD services
[TPS_SWCT_02013]	AtomicSwComponentType offers a server port to get protocol, session and security information or to request a Reset to Default Session
[TPS_SWCT_02014]	AtomicSwComponentType supports Response On Event (ROE) via diagnostic services
[TPS_SWCT_02015]	AtomicSwComponentType verifies the access to security level via diagnostic services
[TPS_SWCT_02016]	AtomicSwComponentType requires information on the status of the protocol communication and may disallow a protocol
[TPS_SWCT_02017]	AtomicSwComponentType requires the notification about a Service Request via diagnostic services
[TPS_SWCT_02018]	Setup for AtomicSwComponentType which contains a Supervised Entity
[TPS_SWCT_02019]	Setup for AtomicSwComponentType which requires *Global Supervision Status* notification
[TPS_SWCT_02020]	AtomicSwComponentType uses the hash calculation of the Crypto Service
[TPS_SWCT_02021]	AtomicSwComponentType uses the message authentication code (MAC) calculation of the Crypto Service
[TPS_SWCT_02022]	AtomicSwComponentType uses the message authentication code (MAC) verification of the Crypto Service

▽

△

Number	Heading
[TPS_SWCT_02023]	AtomicSwComponentType uses the generation of random seed of the Crypto Service
[TPS_SWCT_02024]	AtomicSwComponentType uses the generation of random numbers of the Crypto Service
[TPS_SWCT_02025]	AtomicSwComponentType uses the symmetrical block encryption of the Crypto Service
[TPS_SWCT_02026]	AtomicSwComponentType uses the symmetrical block decryption of the Crypto Service
[TPS_SWCT_02027]	AtomicSwComponentType uses the symmetrical encryption of the Crypto Service
[TPS_SWCT_02028]	AtomicSwComponentType uses the symmetrical decryption of the Crypto Service
[TPS_SWCT_02029]	AtomicSwComponentType uses the asymmetrical encryption of the Crypto Service
[TPS_SWCT_02030]	AtomicSwComponentType uses the asymmetrical decryption of the Crypto Service
[TPS_SWCT_02031]	AtomicSwComponentType uses the signature generation of the Crypto Service
[TPS_SWCT_02032]	AtomicSwComponentType uses the signature verification of the Crypto Service
[TPS_SWCT_02033]	AtomicSwComponentType uses the checksum calculation of the Crypto Service
[TPS_SWCT_02034]	AtomicSwComponentType uses the key derivation of the Crypto Service
[TPS_SWCT_02035]	AtomicSwComponentType uses the symmetric key derivation of the Crypto Service
[TPS_SWCT_02036]	AtomicSwComponentType uses the key exchange interface for public value calculation of the Crypto Service
[TPS_SWCT_02037]	AtomicSwComponentType uses the key exchange interface for secret value calculation of the Crypto Service
[TPS_SWCT_02038]	AtomicSwComponentType uses the key exchange interface to calculate symmetric key with the Crypto Service
[TPS_SWCT_02039]	AtomicSwComponentType uses the symmetrical key extraction of the Crypto Service
[TPS_SWCT_02040]	AtomicSwComponentType uses the symmetrical key wrapping of the Crypto Service to export a symmetrical key structure with a symmetric key
[TPS_SWCT_02041]	AtomicSwComponentType uses the asymmetrical key wrapping of the Crypto Service to export a symmetrical key structure with a asymmetric key
[TPS_SWCT_02042]	AtomicSwComponentType uses the asymmetrical public key extraction of the Crypto Service
[TPS_SWCT_02043]	AtomicSwComponentType uses the asymmetrical private key extraction of the Crypto Service
[TPS_SWCT_02044]	AtomicSwComponentType uses the asymmetrical key wrapping of the Crypto Service to export a (asymmetric) private key structure with a symmetrical wrapping key

▽

△

Number	Heading
[TPS_SWCT_02045]	AtomicSwComponentType uses the asymmetrical key wrapping of the Crypto Service to export a (asymmetric) private key structure with a asymmetrical wrapping key

Table G.7: Added Specification Items in 4.0.3

G.3.4 Deleted Constraints in R4.0.3

Number	Heading
[constr_1023]	Specification of Units in CompuMethods (the text is still there but it does no longer represent a constraint)
[constr_1062]	Compatibility of data types with category BIT
[constr_1122]	Existence of attributes in PROFILE_03
[constr_1123]	Constraints of dataLength in PROFILE_03
[constr_1124]	Constraints of dataId in PROFILE_03
[constr_1125]	Constraints of maxDeltaCounterInit in PROFILE_03
[constr_1127]	ServiceSwComponentType shall not have ServiceNeeds
[constr_1136]	Compatibility of introduction of blueprint and blueprinted element
	The following constraints are moved to [1]
[constr_2500]	PortInterfaces shall be of same kind
[constr_2526]	PortInterfaces need to be compatible to the blueprints
[constr_2527]	Blueprints shall live in package of a proper category
[constr_2528]	PortPrototypes shall not refer to blueprints of PortInterfaces
[constr_2529]	Blueprints of ports and interfaces shall be compatible
[constr_4001]	Content of ModeRequestTypeMap

Table G.8: Deleted Constraints in R4.0.3

G.3.5 Deleted Specification Items in R4.0.3

N/A

G.4 Traceable item history of this document according to AUTOSAR Release R4.1.1

G.4.1 Changed Constraints in R4.1.1

Number	Heading
[constr_1012]	Value of category is FIXED_LENGTH
[constr_1013]	Value of category is VARIABLE_LENGTH
[constr_1016]	Restriction of invalidValue for ImplementationDataType and ImplementationDataTypeElement
[constr_1026]	Compatibility of Units
[constr_1047]	Compatibility of ApplicationPrimitiveDataTypes
[constr_1048]	Compatibility of ApplicationRecordDataTypes
[constr_1049]	Compatibility of ApplicationArrayDataTypes
[constr_1050]	Compatibility of ImplementationDataTypes
[constr_1060]	Compatibility of data types with category ARRAY, VAL_BLK
[constr_1072]	Compatibility of ModeSwitchInterfaces in the context of an AssemblySw-Connector
[constr_1073]	Compatibility of ModeSwitchInterfaces in the context of an DelegationSw-Connector
[constr_1074]	Compatibility of ModeDeclarationGroupPrototypes
[constr_1075]	Compatibility of ModeDeclarationGroups
[constr_1079]	Compatibility of ClientServerInterfaces in the context of an AssemblySw-Connector
[constr_1080]	Compatibility of ClientServerInterfaces in the context of an DelegationSw-Connector
[constr_1081]	Compatibility of TriggerInterfaces in the context of an AssemblySwConnector
[constr_1082]	Compatibility of TriggerInterfaces in the context of an DelegationSw-Connector
[constr_1068]	Compatibility of VariableDataPrototypes or ParameterDataPrototypes typed by primitive data types
[constr_1069]	Compatibility of PortPrototypes of different DataInterfaces in the context of AssemblySwConnectors
[constr_1070]	Compatibility of PortPrototypes of different DataInterfaces in the context of DelegationSwConnectors
[constr_1072]	Compatibility of ModeSwitchInterfaces in the context of an AssemblySw-Connector
[constr_1073]	Compatibility of ModeSwitchInterfaces in the context of an DelegationSw-Connector
[constr_1074]	Compatibility of ModeDeclarationGroupPrototypes
[constr_1079]	Compatibility of ClientServerInterfaces in the context of an AssemblySw-Connector

▽

△

Number	Heading
[constr_1080]	Compatibility of ClientServerInterfaces in the context of an DelegationSwConnector
[constr_1081]	Compatibility of TriggerInterfaces in the context of an AssemblySwConnector
[constr_1082]	Compatibility of TriggerInterfaces in the context of an DelegationSwConnector
[constr_1108]	Value of ApplicationError.errorCode
[constr_1177]	Allowed targetCategory for SwPointerTargetProps
[constr_1187]	Compatibility of VariableDataPrototypes or ParameterDataPrototypes typed by composite data types

Table G.9: Changed Constraints in R4.1.1

G.4.2 Added Constraints in R4.1.1

Number	Heading
[constr_1191]	Value of Limit shall yield a numerical value
[constr_1192]	Compatibility of "IDENTICAL" to "RAT_FUNC" or "LINEAR"
[constr_1193]	ModeDeclaration shall be referenced by at least one ModeTransition in the role enteredMode
[constr_1194]	Identical ModeTransitions
[constr_1195]	SwcModeSwitchEvent and the definition of ModeTransition
[constr_1196]	Existence of networkRepresentation vs. compositeNetworkRepresentation
[constr_1197]	Existence of compositeNetworkRepresentation shall be comprehensive
[constr_1200]	Queued communication is not applicable for dataElements owned by PRPortPrototype
[constr_1201]	initValue shall exist in an RPortPrototype
[constr_1202]	Supported connections by AssemblySwConnector for PortPrototypes typed by a SenderReceiverInterface or NvDataInterface
[constr_1203]	Supported connections by DelegationSwConnector for PortPrototypes typed by a SenderReceiverInterface or NvDataInterface
[constr_1204]	Supported connections by AssemblySwConnector for PortPrototypes typed by a ClientServerInterface, ModeSwitchInterface, or TriggerInterface
[constr_1205]	Supported connections by DelegationSwConnector for PortPrototypes typed by a ClientServerInterface, ModeSwitchInterface, or TriggerInterface
[constr_1209]	Mapping of ModeDeclarations of mode user to ModeDeclaration of mode manager
[constr_1210]	Mapping of ModeDeclarations of mode user to **all** ModeDeclarations of mode manager
[constr_1211]	Constraints of maxNoNewOrRepeatedData in PROFILE_01

▽

△

Number	Heading
[constr_1212]	Constraints of syncCounterInit in PROFILE_01
[constr_1213]	Constraints of maxNoNewOrRepeatedDatain PROFILE_02
[constr_1214]	Constraints of syncCounterInit in PROFILE_02
[constr_1215]	Interpretation of attribute maxNoNewOrRepeatedData owned by EndToEndDescription in PROFILE_01
[constr_1216]	Interpretation of attribute syncCounterInit owned by EndToEndDescription in PROFILE_01
[constr_1217]	Interpretation of attribute maxNoNewOrRepeatedData owned by EndToEndDescription in PROFILE_02
[constr_1218]	Interpretation of attribute syncCounterInit owned by EndToEndDescription in PROFILE_02
[constr_1219]	Invalidation depends on the value of swImplPolicy
[constr_1220]	Compatibility of SwBaseType
[constr_1221]	DataPrototype is typed by an ApplicationPrimitiveDataType
[constr_1222]	category of an AutosarDataType used to type a DataPrototype is set to STRING
[constr_1223]	DataPrototype is typed by an ApplicationRecordDataType
[constr_1224]	DataPrototype is typed by an ApplicationArrayDataType
[constr_1225]	DataPrototype is typed by an ImplementationDataType that references a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE
[constr_1226]	Applicable range for ExecutableEntityActivationReason.bitPosition
[constr_1227]	Value of attribute ExecutableEntityActivationReason.bitPosition shall be unique
[constr_1228]	RTEEvent that is referenced by a WaitPoint in the role trigger shall not reference ExecutableEntityActivationReason
[constr_1229]	category of ImplementationDataType boils down to VALUE
[constr_1230]	ApplicationDataType that qualifies for Integral Primitive Type
[constr_1231]	ConsistencyNeeds aggregated by CompositionSwComponentType
[constr_1232]	ConsistencyNeeds aggregated by AtomicSwComponentType
[constr_1233]	InstantiationTimingEventProps shall only reference TimingEvent
[constr_1234]	Value of RunnableEntity.symbol
[constr_1237]	Scope of mapped ClientServerOperations in the context of a ClientServerOperationMapping
[constr_1238]	Scope of mapped ApplicationErrors in the context of a ClientServerOperationMapping
[constr_1239]	RuleBasedValueSpecification shall not exceed the number of values required
[constr_1240]	Consistency of ArgumentDataPrototypes within the context of a ClientServerOperationMapping
[constr_1241]	Compound Primitive Data Types and invalidValue
[constr_1242]	Restriction of invalidValue for ApplicationPrimitiveDataType
[constr_1243]	NumericalOrText shall either define vf or vt

▽

△

Number	Heading
[constr_1244]	DataPrototypes used in application software shall not be typed by C enums
[constr_1245]	Consideration of ModeTransitions for the compatibility of ModeDeclarationGroups
[constr_1246]	Consistency of firstMode and secondMode in the scope of one ModeDeclarationMappingSet
[constr_1247]	Consistency of ModeDeclarationMappingSet with respect to the referenced firstModeGroup and secondModeGroup
[constr_1248]	Compatibility of PortPrototypes of different DataInterfaces in the context of a PassThroughSwConnector
[constr_1249]	Compatibility of ModeSwitchInterfaces in the context of a PassThroughSwConnector
[constr_1250]	Compatibility of ClientServerInterfaces in the context of a PassThroughSwConnector
[constr_1251]	Compatibility of PortPrototypes of TriggerInterfaces in the context of a PassThroughSwConnector
[constr_1252]	Creation of a loop involving a PassThroughSwConnector is not allowed
[constr_1253]	Supported usage of VariationPointProxy
[constr_1254]	Definition of a pointer to a pointer
[constr_1255]	ApplicationPrimitiveDataTypes of category BOOLEAN and STRING
[constr_1256]	Acknowledgement feedback in n:1 writer case
[constr_1257]	No WaitPoints allowed
[constr_1258]	Value of minimumStartInterval for RunnableEntitys triggered by an InitEvent
[constr_1259]	Aggregation of AsynchronousServerCallPoint **and** AsynchronousServerCallResultPoint
[constr_1260]	No mode disabling for InitEvents
[constr_1261]	Applicability for EndToEndDescription.dataIdNibbleOffset
[constr_1263]	Existence of ModeErrorBehavior.defaultMode
[constr_1264]	Iteration along output axis is only supported for VALUE and VAL_BLK
[constr_1268]	ArgumentDataPrototype.direction shall be preserved in a ClientServerOperationMapping
[constr_1269]	Number of arguments shall be preserved in a ClientServerOperationMapping
[constr_1270]	ArgumentDataPrototype shall be mapped only once in a ClientServerOperationMapping
[constr_1271]	ArrayValueSpecification.elements shall be identical to the number of ApplicationRecordDataType.element
[constr_1272]	ArrayValueSpecification.elements shall be identical to the number of subElements of ImplementationDataType of category STRUCTURE
[constr_1273]	ArrayValueSpecification.elements shall be identical to the value of ApplicationArrayDataType.element.maxNumberOfElements
[constr_1274]	ArrayValueSpecification.elements shall be identical to the value of ImplementationDataType.subElement.arraySize of category ARRAY
[constr_2054]	Valid targets of rptSystem

▽

△

Number	Heading
[constr_2055]	Valid targets of byPassPoint and rptHook reference
[constr_2056]	Consistency of RapidPrototypingScenario with respect to rptSystem and rptArHook references
[constr_2057]	Mandatory information of a RuleBasedAxisCont
[constr_2058]	Mandatory information of a RuleBasedValueCont
[constr_4082]	RunnableEntity.reentrancyLevel shall not be set.

Table G.10: Added Constraints in R4.1.1

G.4.3 Changed Specification Items in R4.1.1

Number	Heading
[TPS_SWCT_01000]	Usage of attribute symbol of the symbolProps
[TPS_SWCT_01001]	Prefix symbols generated for the RunnableEntity
[TPS_SWCT_01085]	Variation on the behavior level
[TPS_SWCT_01112]	Semantics of PortPrototypes
[TPS_SWCT_01113]	Connecting two PortPrototypes
[TPS_SWCT_01128]	SwRecordLayout needed for ApplicationPrimitiveDataType of category STRING
[TPS_SWCT_01179]	Compound Primitive Data Type
[TPS_SWCT_01368]	Describe static and constant memory

Table G.11: Changed Specification Items in R4.1.1

G.4.4 Added Specification Items in R4.1.1

Number	Heading
[TPS_SWCT_01448]	Pre-defined values for the category of VariationPointProxy
[TPS_SWCT_01449]	Semantics of a ModeDeclarationGroupPrototypeMapping
[TPS_SWCT_01450]	Semantics of a ModeTransition
[TPS_SWCT_01451]	Relations between ModeTransition and ModeDeclaration
[TPS_SWCT_01452]	Applicability of networkRepresentation for ApplicationCompositeDataType
[TPS_SWCT_01454]	PRPortPrototype can own both RPortComSpecs and PPortComSpecs
[TPS_SWCT_01455]	Duplicate existence of initValue in the context of a PRPortPrototype
[TPS_SWCT_01456]	Predefined values for MemorySection.option and SwAddrMethod.option
[TPS_SWCT_01457]	ExclusiveAreaNestingOrder

▽

△

Number	Heading
[TPS_SWCT_01458]	Indicate that the locking behavior is fully described for RunnableEntity
[TPS_SWCT_01459]	Locking behavior is not described for this RunnableEntity
[TPS_SWCT_01460]	Relation of SynchronousServerCallPoint to ExclusiveAreaNesting-Order
[TPS_SWCT_01461]	Existence of ImplementationDataType
[TPS_SWCT_01462]	ModeDeclarationMapping defines the explicit correlation of Mode-Declarations
[TPS_SWCT_01463]	ModeDeclarationGroupPrototypeMapping.modeDeclaration-MappingSet defines the applicable set of ModeDeclarationMappings
[TPS_SWCT_01464]	ModeDeclaration of a mode user is mapped to exactly one Mode-Declaration of a mode manager
[TPS_SWCT_01465]	ModeDeclaration of a mode user is mapped to several Mode-Declarations of a mode manager
[TPS_SWCT_01466]	ConsistencyNeeds applied on RunnableEntitys that do not use implicit communication
[TPS_SWCT_01467]	ImplementationDataType references an SwBaseType with a string encoding
[TPS_SWCT_01469]	RTE API for retrieving the current activation reason
[TPS_SWCT_01470]	RunnableEntityGroup
[TPS_SWCT_01471]	DataPrototypeGroup
[TPS_SWCT_01472]	Receiving SwComponentType owns a DataPrototypeGroup in the role regRequiresStability
[TPS_SWCT_01473]	Receiving SwComponentType owns a RunnableEntityGroup in the role regRequiresStability
[TPS_SWCT_01474]	Receiving SwComponentType owns a RunnableEntityGroup in the role regRequiresStability and also owns one or several DataPrototype-Groups in the role regRequiresStability
[TPS_SWCT_01475]	Sending SwComponentType owns a DataPrototypeGroup in the role reg-RequiresStability
[TPS_SWCT_01476]	Sender and receiver of the same implicitly communicated VariableData-Prototypes are associated with the same RunnableEntityGroup
[TPS_SWCT_01477]	Integral Primitive Types
[TPS_SWCT_01478]	Array size is defined as an attribute of the ImplementationDataType-Element
[TPS_SWCT_01479]	Applicability of ConsistencyNeeds
[TPS_SWCT_01480]	*Stability* and/or *coherence* is not required
[TPS_SWCT_01481]	The meaning of the term *stability* with respect to ConsistencyNeeds
[TPS_SWCT_01482]	The meaning of the term *coherence* with respect to ConsistencyNeeds
[TPS_SWCT_01483]	Use static and constant memory to support Measurement and Calibration
[TPS_SWCT_01484]	Meaning of ApplicationRuleBasedValueSpecification
[TPS_SWCT_01485]	RuleBasedValueSpecification shall initialize first elements in an array
[TPS_SWCT_01486]	ApplicationPrimitiveDataType of category STRING may have invalidValue

▽

△

Number	Heading
[TPS_SWCT_01487]	Correspondence of invalidValue for ApplicationPrimitiveDataType and ImplementationDataType
[TPS_SWCT_01488]	ApplicationPrimitiveDataType shall be interpreted as a string of a particular encoding
[TPS_SWCT_01489]	Standardized values of SwRecordLayoutV.swRecordLayoutVProp
[TPS_SWCT_01490]	AUTOSAR supports ApplicationErrors only for ClientServerInterfaces
[TPS_SWCT_01491]	AUTOSAR system does not need to explicitly describe infrastructure errors
[TPS_SWCT_01492]	Default values for factorSiToUnit and offsetSiToUnit
[TPS_SWCT_01493]	The number of RuleArguments.arguments shall not exceed the array size
[TPS_SWCT_01494]	A RuleBasedValueSpecification of rule FILL_UNITIL_END shall fill the value of the last RuleArguments.argument until the last element of the array
[TPS_SWCT_01495]	Standardized value of RuleBasedValueSpecification.category
[TPS_SWCT_01496]	General precedence rule for attributes of SwDataDefProps
[TPS_SWCT_01497]	Precedence of the unit of value axis
[TPS_SWCT_01498]	Precedence of the DataConstr of value axis
[TPS_SWCT_01499]	Precedence of the CompuMethod of value axis
[TPS_SWCT_01500]	Precedence of the display format of value axis
[TPS_SWCT_01501]	Precedence of the calibration access of value axis
[TPS_SWCT_01502]	Precedence of the Unit of the input axis
[TPS_SWCT_01503]	Precedence of the DataConstr of the input axis
[TPS_SWCT_01504]	Precedence of the display format of the input axis
[TPS_SWCT_01505]	Precedence of calibration access along structure hierarchies in complex types
[TPS_SWCT_01506]	Precedence of the calibration access of input axis
[TPS_SWCT_01507]	The role of PassThroughSwConnector
[TPS_SWCT_01508]	Scope of end-to-end protection
[TPS_SWCT_01509]	Implicit communication behavior
[TPS_SWCT_01510]	The role of pretended networking
[TPS_SWCT_01511]	Configuration option is encoded into ModeDeclaration
[TPS_SWCT_01512]	Request change of Pretended Networking mode
[TPS_SWCT_01513]	React on the change of Pretended Networking mode
[TPS_SWCT_01514]	Duplicate existence of initValue in the context of a PRPortPrototype
[TPS_SWCT_01515]	PPortInCompositionInstanceRef shall be used for attaching DelegationSwConnector to an inner PRPortPrototype
[TPS_SWCT_01516]	PortInterface describes the static structure of information interchange
[TPS_SWCT_01517]	ClientServerOperation cannot be passed as a reference
[TPS_SWCT_01518]	Priority of initial value definition with respect to conceptual levels
[TPS_SWCT_01519]	RTE executes certain RunnableEntity periodically

▽

△

Number	Heading
[TPS_SWCT_01520]	Implication of the existence of possibleError on compatibility of ClientServerOperations
[TPS_SWCT_01521]	Use AutosarVariableRef.localVariable for referencing inter-runnable variables
[TPS_SWCT_01522]	No initial value is specified for implicitInterRunnableVariable or explicitInterRunnableVariable
[TPS_SWCT_01523]	Internal trigger event
[TPS_SWCT_01524]	Usage of IoHwAbstractionServerAnnotation
[TPS_SWCT_01525]	InitEvent references a RunnableEntity in the role startOnEvent
[TPS_SWCT_01528]	Meaning of NumericalRuleBasedValueSpecification
[TPS_SWCT_01529]	Default value for EndToEndDescription.dataIdNibbleOffset
[TPS_SWCT_01530]	Error behavior of mode manager and mode user
[TPS_SWCT_01531]	The semantics of ModeErrorReactionPolicyEnum
[TPS_SWCT_01532]	The role of ModeErrorBehavior.defaultMode
[TPS_SWCT_01533]	ModeDeclarationGroup.initialMode shall be assumed in the absence of ModeDeclarationGroup.modeManagerErrorBehavior
[TPS_SWCT_01534]	ModeDeclarationGroup.initialMode shall be assumed in the absence of ModeDeclarationGroup.modeUserErrorBehavior
[TPS_SWCT_01535]	Mode manager reacts on mode error
[TPS_SWCT_01536]	Coherent behavior of all mode users in the case of errors in the mode switch communication
[TPS_SWCT_01541]	Preferential selection of modeUserErrorBehavior
[TPS_SWCT_01542]	Preferential selection of modeManagerErrorBehavior
[TPS_SWCT_01543]	PortInterfaceMapping overrides all other compatibility rules
[TPS_SWCT_01544]	*prefix* used for the actual name of the used PortInterface for the routing activation
[TPS_SWCT_01545]	ModeDeclaration of a *mode user* that is not mapped to a ModeDeclaration of a *mode manager*
[TPS_SWCT_01546]	Notification when an external tester is attached or activated
[TPS_SWCT_01547]	Ability to set and reset the Warning Indicator Status bit
[TPS_SWCT_02046]	byPassPoint specifies the rapid prototyping capability
[TPS_SWCT_02047]	RptHook specifies the link to rapid prototyping algorithm
[TPS_SWCT_02048]	Implicit SwComponentPrototype selection for Rapid Prototyping Scenario
[TPS_SWCT_02049]	Implicit RunnableEntity selection for Rapid Prototyping Scenario
[TPS_SWCT_02050]	Explicit access point selection for Rapid Prototyping Scenario
[TPS_SWCT_02051]	Explicit DataPrototype selection for Rapid Prototyping Scenario
[TPS_SWCT_02052]	Definition of Rapid Prototyping Scenario is splittable
[TPS_SWCT_02053]	Values of RuleBasedAxisCont with the category COM_AXIS, RES_AXIS are for display only

▽

△

Number	Heading
[TPS_SWCT_02507]	Instantiation-specific RTEEvents

Table G.12: Added Specification Items in 4.1.1

G.4.5 Deleted Constraints in R4.1.1

Number	Heading
[constr_1239]	RuleBasedValueSpecification shall not exceed the number of values required
[constr_1145]	Finding the symbol for the representation of a CompuScale in C code
[constr_2533]	Iteration along output axis is only supported for VALUE and VAL_BLK

Table G.13: Deleted Constraints in R4.1.1

Please note that [constr_2533] has been retagged to [constr_1264] to fix a duplicate constraint ID.

G.4.6 Deleted Specification Items in R4.1.1

Number	Heading
[TPS_SWCT_01210]	IoHwAbstractionServerAnnotation

Table G.14: Deleted Specification Items in R4.1.1

G.5 Traceable item history of this document according to AUTOSAR Release R4.1.2

G.5.1 Changed Constraints in R4.1.2

Number	Heading
[constr_1006]	applicable data categories
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1009]	SwDataDefProps applicable to ImplementationDataTypes
[constr_1015]	Prioritization of SwDataDefProps
[constr_1043]	PortInterface vs. ComSpec
[constr_1058]	ImplementationDataType has category FUNCTION_REFERENCE
[constr_1102]	ApplicationError in the scope of one SwComponentType

▽

△

Number	Heading
[constr_1146]	Applicability of a symbol for a CompuScale in C code
[constr_1163]	Compatibility of CompuMethods
[constr_1133]	Identical CompuScale Symbolic Names shall have the same range
[constr_1158]	Applicable categorys for attribute ImplementationDataType.swDataDefProps.compuMethod
[constr_1225]	DataPrototype is typed by an ImplementationDataType that references a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE
[constr_2013]	Compatibility of ImplementationDataTypes for NvBlockDataMapping
[constr_2051]	Mandatory information of a SwValueCont

Table G.15: Changed Constraints in R4.1.2

G.5.2 Added Constraints in R4.1.2

Number	Heading
[constr_1277]	SwDataDefProps.swImplPolicy of a VariableDataPrototype referenced by a VariableAccess aggregated in the role dataReceivePointByValue
[constr_1278]	PhysConstrs references a Unit
[constr_1279]	Unmapped elements of ApplicationCompositeDataTypes or ImplementationDataTypes and the attribute swImplPolicy
[constr_1280]	Unmapped dataElement on the receiver side shall have an initValue
[constr_1281]	invalidValue shall be inside the scope of the compuMethod
[constr_1282]	Restriction concerning the usage of RuleBasedValueSpecification or a ReferenceValueSpecification for the specification of an invalidValue
[constr_1283]	invalidValue is outside the scope of the compuMethod
[constr_1284]	Limitation of the use of TextValueSpecification
[constr_1285]	Applicability of roles vs. PortPrototypes
[constr_1286]	serverArgumentImplPolicy and ArgumentDataPrototype typed by primitive data types
[constr_1287]	Compatibility of SenderReceiverInterfaces with respect to invalidationPolicy
[constr_1288]	Allowed Attributes vs. category for DataPrototypes typed by ImplementationDataTypes
[constr_1289]	Allowed Attributes vs. category for DataPrototypes typed by ApplicationDataTypes
[constr_1290]	Limitation on the number of PPortComSpecs in the context of one PPortPrototype
[constr_1291]	Limitation on the number of RPortComSpecs in the context of one PPortPrototype
[constr_1292]	Limitation on the number of RPortComSpecs/PPortComSpecs in the context of one PRPortPrototype
[constr_1293]	Existence of DiagnosticEventNeeds.dtcNumber

▽

△

Number	Heading
[constr_1294]	Existence of DiagnosticEventInfoNeeds.dtcNumber
[constr_1295]	PortInterfaces and category DATA_REFERENCE
[constr_1296]	DataPrototypes used as explicitInterRunnableVariable or implicitInterRunnableVariable and category DATA_REFERENCE

Table G.16: Added Constraints in R4.1.2

G.5.3 Changed Specification Items in R4.1.2

Number	Heading
[TPS_SWCT_01006]	ImplementationDataType.subElement.arraySize shall be used to define the size of the array
[TPS_SWCT_01175]	Actively query the status of a partial network
[TPS_SWCT_01219]	ComSpec for queued and non-queued sender-receiver communication
[TPS_SWCT_01154]	Attribute prefix of IncludedModeDeclarationGroupSet
[TPS_SWCT_02011]	AtomicSwComponentType offers a server port to read DTR value via OBD services

Table G.17: Changed Specification Items in R4.1.2

G.5.4 Added Specification Items in R4.1.2

Number	Heading
[TPS_SWCT_01549]	Definition of linear data scaling
[TPS_SWCT_01550]	Definition of reciprocal linear data scaling
[TPS_SWCT_01551]	Mapping of elements on the sender side to elements on the receiver side
[TPS_SWCT_01552]	Software-component acts as a mode manager
[TPS_SWCT_01553]	Software-component acts as a mode user
[TPS_SWCT_01554]	Software-component acts as a mode requester
[TPS_SWCT_01555]	ModeSwitchedAckEvent is triggered by the RTE regardless
[TPS_SWCT_01556]	Rule for setting RoleBasedPortAssignment.role
[TPS_SWCT_01557]	dataWriteAccess also allows for the definition of a DataWriteCompletedEvent
[TPS_SWCT_01558]	DataWriteCompletedEvent cannot be combined with a WaitPoint
[TPS_SWCT_01559]	Default value for attribute SwDataDefProps.swCalibrationAccess
[TPS_SWCT_01560]	Supported categorys of CompuMethods for data conversion
[TPS_SWCT_01561]	Application of data conversion to composite AutosarDataTypes
[TPS_SWCT_01562]	Specification of values of an enumeration

▽

△

Number	Heading
[TPS_SWCT_01563]	Applicable values for nativeDeclaration
[TPS_SWCT_01564]	Non-recursive definition of a primitive data type
[TPS_SWCT_01565]	Recursive definition of a primitive data type
[TPS_SWCT_01566]	Define literals for an MCD system in the context of a FlatInstanceDescriptor
[TPS_SWCT_01567]	Default behavior for invalidationPolicy
[TPS_SWCT_01568]	Consideration of RPortComSpec or PPortComSpec depending on the ownership
[TPS_SWCT_01569]	Definition of CompuScale Symbolic Name
[TPS_SWCT_01570]	DataTypeMap is mandatory in the presence of ApplicationPrimitiveDataType.swDataDefProps.swRecordLayout

Table G.18: Added Specification Items in 4.1.2

G.5.5 Deleted Constraints in R4.1.2

Number	Heading
[constr_1042]	Definition of a linear data scaling
[constr_1094]	Usage of symbol of RunnableEntity
[constr_2025]	Uniqueness of symbol attributes (This constraint has been relocated to [9])
[constr_2032]	transmissionAcknowledge requires a DataSendCompletedEvent
[constr_4011]	ComSpec and ModeSwitchedAckEvent

Table G.19: Deleted Constraints in R4.1.2

G.5.6 Deleted Specification Items in R4.1.2

Number	Heading
[TPS_SWCT_01327]	RTE generator can omit the creation of checks at run-time

Table G.20: Deleted Specification Items in R4.1.2

G.6 Traceable item history of this document according to AUTOSAR Release R4.1.3

G.6.1 Added Traceables in R4.1.3

Number	Heading
[TPS_SWCT_01573]	A PRPortPrototype is never considered unconnected
[TPS_SWCT_01574]	PerInstanceMemory.typeDefinition shall not contain a function pointer

Table G.21: Added Traceabless in 4.1.3

G.6.2 Changed Traceables in R4.1.3

Number	Heading
[TPS_SWCT_01009]	The numerical values used to define the values of ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue can be arbitrarily defined
[TPS_SWCT_01049]	Two ways to use the ExclusiveAreas

Table G.22: Changed Traceables in R4.1.3

G.6.3 Deleted Traceables in R4.1.3

Number	Heading
[TPS_SWCT_01417]	Define calibration parameters common to all SwComponentPrototypes of the same SwComponentType
[TPS_SWCT_01419]	ParameterSwComponentType shall never aggregate a SwcInternalBehavior
[TPS_SWCT_02006]	AtomicSwComponentType offers sender receiver ports to adjust the IO signal via diagnostic services

Table G.23: Deleted Traceables in R4.1.3

G.6.4 Added Constraints in R4.1.3

Number	Heading
[constr_1297]	Applicability of serverArgumentImplPolicy set to useArrayBaseType
[constr_1298]	Existence of attributes if category of a ModeDeclarationGroup is set to EXPLICIT_ORDER

▽

△

Number	Heading
[constr_1299]	Existence of attributes if `category` of a `ModeDeclarationGroup` is set to other than `EXPLICIT_ORDER`

Table G.24: Added Constraints in R4.1.3

G.6.5 Changed Constraints in R4.1.3

Number	Heading
[constr_1006]	applicable data categories
[constr_1007]	Allowed attributes of `SwDataDefProps` for `ApplicationDataType`s
[constr_1230]	`ApplicationDataType` that qualifies for `Integral Primitive Type`

Table G.25: Changed Constraints in R4.1.3

G.6.6 Deleted Constraints in R4.1.3

Number	Heading
[constr_1179]	Existence of `ModeDeclaration.value` within a `ModeDeclarationGroup`
[constr_1180]	Existence of `ModeDeclarationGroup.onTransitionValue`

Table G.26: Deleted Constraints in R4.1.3

G.7 Traceable item history of this document according to AUTOSAR Release R4.2.1

G.7.1 Added Traceables in R4.2.1

Number	Heading
[TPS_SWCT_01572]	Application Mode Manager interacts with both `BswM` and other `Application-SwComponentType`s
[TPS_SWCT_01577]	`AtomicSwComponentType` requires the notification about a Service Request via diagnostic services with *manufacturer* characteristics
[TPS_SWCT_01578]	`AtomicSwComponentType` requires the notification about a Service Request via diagnostic services with *supplier* characteristics
[TPS_SWCT_01579]	`Dcm` can directly access `dataElement`s in `PPortPrototype`s typed by a `SenderReceiverInterface`

▽

△

Number	Heading
[TPS_SWCT_01580]	Dem can directly access dataElements in PPortPrototypes typed by a SenderReceiverInterface
[TPS_SWCT_01581]	Communication patterns for mode-related communication
[TPS_SWCT_01582]	Semantics of DiagnosticEventNeeds.deferringFid
[TPS_SWCT_01583]	Completeness of TextTableMapping is not a requirement
[TPS_SWCT_01584]	InternalBehavior of a NvBlockSwComponentType for implementing a writing strategy
[TPS_SWCT_01585]	Relevance of NvBlockDescriptor.timingEvent.period
[TPS_SWCT_01586]	Writing strategies for *nv data*
[TPS_SWCT_01587]	The cyclic writing of *nv data* requires the existence of a TimingEvent
[TPS_SWCT_01588]	DataReceivedEvent for storing *nv data* immediately
[TPS_SWCT_01589]	Implementation of emergency storing of *nv data*
[TPS_SWCT_01590]	Combination of writing strategies for *nv data* is possible
[TPS_SWCT_01591]	Existence of attribute DiagnosticEventNeeds.reportBehavior
[TPS_SWCT_01592]	Communication among RunnableEntitys of different instances of the same AtomicSwComponentType
[TPS_SWCT_01593]	Semantics of attribute ReceiverComSpec.transformationComSpecProps
[TPS_SWCT_01594]	Semantics of TransformationComSpecProps
[TPS_SWCT_01595]	Semantics of attribute ClientComSpec.transformationComSpecProps
[TPS_SWCT_01596]	Semantics of attribute ServerComSpec.transformationComSpecProps
[TPS_SWCT_01597]	PortPrototype-specific data transformation configuration
[TPS_SWCT_01598]	More than one user-defined transformer is used within one transformer chain
[TPS_SWCT_01599]	PortPrototype-specific configuration for custom transformers
[TPS_SWCT_01600]	PortPrototype-specific configuration for data transformers related to end-to-end protection
[TPS_SWCT_01601]	Size Indicator shall be updated by software-component
[TPS_SWCT_01602]	Size Indicator shall be read by the software-component
[TPS_SWCT_01603]	Variable size array with Size Indicator
[TPS_SWCT_01604]	Enable Size Indicator
[TPS_SWCT_01605]	Semantics of ApplicationArrayElement.arraySizeHandling
[TPS_SWCT_01606]	Internal structure of mapped ImplementationDataType
[TPS_SWCT_01607]	Profiles for internal structure of mapped ImplementationDataType
[TPS_SWCT_01608]	Custom profiles for internal structure of mapped ImplementationDataType
[TPS_SWCT_01609]	A RuleBasedValueSpecification of rule FILL_UNTIL_MAX_SIZE shall fill the value of the last RuleArguments.argument until the number of elements specified in maxSizeToFill
[TPS_SWCT_01610]	Modeling of a Variable-Size Array Data Type with Size Indicator enabled
[TPS_SWCT_01611]	Enable Size Indicator

▽

△

Number	Heading
[TPS_SWCT_01612]	arraySizeHandling specifies how the size is determined
[TPS_SWCT_01613]	Internal structure of mapped ImplementationDataType
[TPS_SWCT_01614]	Profiles for internal structure of mapped ImplementationDataType
[TPS_SWCT_01615]	Custom profiles for internal structure of mapped ImplementationDataType
[TPS_SWCT_01616]	Semantics of TransformerHardErrorEvent
[TPS_SWCT_01617]	Structure of an ImplementationDataType that represents a variable-sized array data type
[TPS_SWCT_01618]	Size Indicator for dynamicArraySizeProfile set to VSA_LINEAR, VSA_SQUARE, or VSA_FULLY_FLEXIBLE
[TPS_SWCT_01619]	Size Indicator for dynamicArraySizeProfile set to VSA_RECTANGULAR
[TPS_SWCT_01620]	Size Indicator for dynamicArraySizeProfile set to VSA_RECTANGULAR
[TPS_SWCT_01621]	Payload for dynamicArraySizeProfile
[TPS_SWCT_01622]	Modeling of a Variable-Size Array Data Type only with ImplementationDataType
[TPS_SWCT_01623]	Justification for the existence of attributes ApplicationArrayDataType.dynamicArraySizeProfile and ApplicationArrayElement.arraySizeHandling
[TPS_SWCT_01624]	Hard error occurs during the execution of a transformer chain
[TPS_SWCT_01625]	Sending SwComponentType owns a DataPrototypeGroup in the role dpgRequiresCoherency and also RunnableEntityGroups
[TPS_SWCT_01626]	Error notification of data transformer errors
[TPS_SWCT_01627]	Suffix used for the resulting name of the PortInterface for the Security Access
[TPS_SWCT_01628]	Suffix used for the resulting name of the PortInterface for the Data Services
[TPS_SWCT_01629]	Suffix used for the resulting name of the PortInterface for the Data Services
[TPS_SWCT_01630]	Suffix used for the resulting name of the PortInterface for the Data Services
[TPS_SWCT_01631]	Suffix used for the resulting name of the PortInterface for the Infotype Services
[TPS_SWCT_01632]	Suffix used for the resulting name of the PortInterface for the Routine Services
[TPS_SWCT_01633]	Suffix used for the resulting name of the PortInterface for the Request Control Services
[TPS_SWCT_01634]	Suffix used for the resulting name of the PortInterface for the Data Services
[TPS_SWCT_01635]	Naming conventions may support the effectiveness of SymbolProps
[TPS_SWCT_01636]	Definition of profiles for the definition of Variable-Size Array Data Types

Table G.27: Added Traceabless in 4.2.1

G.7.2 Changed Traceables in R4.2.1

Number	Heading
[TPS_SWCT_01044]	ServiceNeeds
[TPS_SWCT_01053]	Relationship of interchanged data with RunnableEntitys
[TPS_SWCT_01141]	AtomicSwComponentType may have AbstractRequiredPort-Prototypes typed by an NvDataInterface
[TPS_SWCT_01150]	InternalBehavior of a NvBlockSwComponentType to enable access to the NVRAM Block management API
[TPS_SWCT_01162]	Existence of TextTableMapping
[TPS_SWCT_01180]	Maximum possible size of Compound Primitive Data Type
[TPS_SWCT_01227]	Unconnected AbstractRequiredPortPrototype typed by NvData-Interface
[TPS_SWCT_01228]	NvProvideComSpec
[TPS_SWCT_01239]	default value for attribute category used in the context of SwSystemconst
[TPS_SWCT_01274]	SwDataDefProps used to support calibration and measurement
[TPS_SWCT_01321]	Communication among RunnableEntitys
[TPS_SWCT_01330]	RunnableEntity can also have dataSendPoints
[TPS_SWCT_01335]	Combine dataReceivePointByValue or dataReceivePointBy-Argument with a WaitPoint
[TPS_SWCT_01348]	Trigger source
[TPS_SWCT_01385]	Execution of finalization code for software-components
[TPS_SWCT_01456]	Predefined values for MemorySection.option and SwAddrMethod.option
[TPS_SWCT_01475]	Sending SwComponentType owns a DataPrototypeGroup in the role dpg-RequiresCoherency
[TPS_SWCT_01494]	A RuleBasedValueSpecification of rule FILL_UNTIL_END shall fill the value of the last RuleArguments.argument until the last element of the array
[TPS_SWCT_01495]	Standardized value of RuleBasedValueSpecification.rule
[TPS_SWCT_01549]	Definition of linear data scaling
[TPS_SWCT_01560]	Supported categorys of CompuMethods for data conversion
[TPS_SWCT_02501]	Setup for Nvm Use Case: Permanent RAM Block
[TPS_SWCT_02502]	Setup for Nvm Use Case: Temporary RAM Block
[TPS_SWCT_02503]	Setup for NVM Use Case: Software-Components using Nv Data provided by NvBlockSwComponentType
[TPS_SWCT_02504]	Setup for Nvm Use Case: RAM Block with explicit synchronization using Mirror Interfaces

Table G.28: Changed Traceables in R4.2.1

G.7.3 Deleted Traceables in R4.2.1

Number	Heading
Id	**Heading**
[TPS_SWCT_01131]	AtomicSwComponentType accepts a request to restart an entire function
[TPS_SWCT_01386]	Initialization by mode management
[TPS_SWCT_01387]	Finalization by mode management
[TPS_SWCT_01410]	Dcm and Dem can directly access dataElements in PPortPrototypes typed by a SenderReceiverInterface
[TPS_SWCT_01438]	Handling of invalidation in the sending RTE
[TPS_SWCT_01439]	Handling of invalidation in the receiving RTE
[TPS_SWCT_02017]	AtomicSwComponentType requires the notification about a Service Request via diagnostic services

Table G.29: Deleted Traceables in R4.2.1

G.7.4 Added Constraints in R4.2.1

Number	Heading
[constr_1300]	Primitive DataPrototype on the provider side shall not be mapped to element of a composite data type on the requester side
[constr_1301]	Existence of RoleBasedDataTypeAssignment.role vs. RoleBasedDataAssignment.role
[constr_1302]	Restriction of data invalidation
[constr_1303]	Applicability of TextTableMapping depending on the value of CompuMethod.category
[constr_1304]	Existence of attribute bitfieldTextTableMaskFirst
[constr_1305]	Existence of attribute bitfieldTextTableMaskSecond
[constr_1306]	Limitation of TextTableMapping for CompuMethods that have the value of category set to BITFIELD_TEXTTABLE
[constr_1307]	Consistency of values and masks in TextTableMapping
[constr_1308]	Existence of NvBlockNeeds.cyclicWritingPeriod
[constr_1309]	Existence of NvBlockDescriptor.timingEvent
[constr_1310]	Existence of attributes of meta-class NvBlockNeeds
[constr_1311]	Appearance of safety-related possible values of MemorySection.option or SwAddrMethod.option according to [TPS_SWCT_01456]
[constr_1312]	PortPrototypes typed by a ParameterInterface
[constr_1313]	Completeness of TextTableMapping for the values of a given bit mask on the sender side
[constr_1314]	Profile VSA_LINEAR for ApplicationArrayDataType
[constr_1315]	Profile VSA_SQUARE for ApplicationArrayDataType
[constr_1316]	Profile VSA_RECTANGULAR for ApplicationArrayDataType

▽

△

Number	Heading
[constr_1317]	Profile VSA_FULLY_FLEXIBLE for ApplicationArrayDataType
[constr_1318]	Profile VSA_LINEAR for ImplementationDataType
[constr_1319]	Profile VSA_SQUARE for ImplementationDataType
[constr_1320]	Profile VSA_RECTANGULAR for ImplementationDataType
[constr_1321]	Profile VSA_FULLY_FLEXIBLE for ImplementationDataType
[constr_1322]	Size Indicator for undefined dynamicArraySizeProfile
[constr_1323]	Applicability of attribute ReceiverComSpec.usesEndToEndProtection
[constr_1363]	Existence of attributes of DiagnosticValueNeeds
[constr_1364]	Existence of attributes of DiagnosticIoControlNeeds
[constr_1375]	Existence of attributes of CompuMethod and related meta-classes

Table G.30: Added Constraints in R4.2.1

G.7.5 Changed Constraints in R4.2.1

Number	Heading
[constr_1006]	applicable data categories
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1009]	SwDataDefProps applicable to ImplementationDataTypes
[constr_1014]	Supported value encodings for SwBaseType
[constr_1015]	Prioritization of SwDataDefProps
[constr_1037]	Client shall not be connected to multiple servers
[constr_1072]	Compatibility of ModeSwitchInterfaces in the context of an AssemblySwConnector
[constr_1073]	Compatibility of ModeSwitchInterfaces in the context of an DelegationSwConnector
[constr_1074]	Compatibility of ModeDeclarationGroupPrototypes
[constr_1101]	Mode-related communication
[constr_1112]	Constraints of dataIdMode in PROFILE_01
[constr_1149]	PortPrototypes used for NV data management
[constr_1188]	Existence of ReceiverComSpec.replaceWith
[constr_1288]	Allowed Attributes vs. category for DataPrototypes typed by ImplementationDataTypes
[constr_1289]	Allowed Attributes vs. category for DataPrototypes typed by ApplicationDataTypes
[constr_2009]	Supported kinds of PortPrototypes of a NvBlockSwComponentType
[constr_2015]	Limitation of SwcInternalBehavior of a NvBlockSwComponentType
[constr_2019]	ServiceSwComponentType shall have service ports only

▽

△

Number	Heading
[constr_2022]	Mutually exclusive use of SynchronousServerCallPoints and AsynchronousServerCallPoints
[constr_2051]	Mandatory information of a SwValueCont

Table G.31: Changed Constraints in R4.2.1

G.7.6 Deleted Constraints in R4.2.1

Number	Heading
[constr_1189]	Allowed targets of externalReplacement
[constr_1293]	Existence of DiagnosticEventNeeds.dtcNumber
[constr_1294]	Existence of DiagnosticEventInfoNeeds.dtcNumber
[constr_2551]	SwCalprmAxis.baseType shall be ignored

Table G.32: Deleted Constraints in R4.2.1

G.8 Traceable item history of this document according to AUTOSAR Release R4.2.2

G.8.1 Added Traceables in R4.2.2

Number	Heading
[TPS_SWCT_01637]	Initial value for a specific implicitInterRunnableVariable or explicitInterRunnableVariable
[TPS_SWCT_01638]	Existence of SwConnector between two PRPortPrototypes
[TPS_SWCT_01639]	AtomicSwComponentType offers a PPortPrototype typed by ClientServerInterface to read/write current value via diagnostic services where the applicable DID is passed as an argument to the access functions
[TPS_SWCT_01640]	Suffix used for the resulting name of the PortInterface for the Data Services
[TPS_SWCT_01641]	Definition of an “old-world” dynamic-size array data type by means of an ApplicationArrayDataType
[TPS_SWCT_01642]	Definition of an “old-world” dynamic-size array data type by means of an ImplementationDataType
[TPS_SWCT_01644]	Definition of a “new-world” variable-size array data type by means of an ApplicationArrayDataType
[TPS_SWCT_01645]	Definition of a “new-world” variable-size array data type by means of an ImplementationDataType
[TPS_SWCT_01646]	Sending invalidValue without invalidation applied by RTE/Com

▽

△

Number	Heading
[TPS_SWCT_01647]	Size Indicator for dynamicArraySizeProfile set to VSA_LINEAR, VSA_SQUARE, or VSA_FULLY_FLEXIBLE if only ImplementationDataType is present
[TPS_SWCT_01648]	Size Indicator for dynamicArraySizeProfile set to VSA_RECTANGULAR if only ImplementationDataType is present
[TPS_SWCT_01649]	Payload for dynamicArraySizeProfile if only ImplementationDataType is present
[TPS_SWCT_01650]	Structure of the VSA ImplementationDataType
[TPS_SWCT_01651]	UTF-16BE
[TPS_SWCT_01652]	UTF-16LE
[TPS_SWCT_01653]	UTF-16-encoded strings are not allowed to start with a BOM
[TPS_SWCT_01654]	AtomicSwComponentType offers PortPrototypes typed by SenderReceiverInterfaces to adjust the IO signal via diagnostic services
[TPS_SWCT_01655]	Reference from DiagnosticIoControlNeeds to DiagnosticValueNeeds
[TPS_SWCT_01656]	Suffix used for the resulting name of the PortInterface for IOControlRequest and IOControlResponse
[TPS_SWCT_01657]	NamingRule for RPortPrototype referenced by a RoleBasedPortAssignment with attribute role set to “IOControlRequest”
[TPS_SWCT_01658]	NamingRule for PPortPrototype referenced by a RoleBasedPortAssignment with attribute role set to “IOControlResponse”
[TPS_SWCT_01659]	Mapping of VariableDataPrototype to a NvBlockDescriptor

Table G.33: Added Traceabless in 4.2.2

G.8.2 Changed Traceables in R4.2.2

Number	Heading
[TPS_SWCT_01133]	AtomicSwComponentType provides information about aging cycles
[TPS_SWCT_01158]	Three cases for PortInterfaceMapping
[TPS_SWCT_01179]	Compound Primitive Data Type
[TPS_SWCT_01244]	Data types for calibration parameters are also described as primitive types
[TPS_SWCT_01370]	VariationPointProxy
[TPS_SWCT_01431]	Finding the symbol for the representation of a CompuScale with a point-range in C code
[TPS_SWCT_01432]	Keep the invalidValue transparent to the sending and receiving software components
[TPS_SWCT_01434]	Sender and receiver have knowledge of invalid value
[TPS_SWCT_01610]	Modeling of a Variable-Size Array Data Type with Size Indicator enabled
[TPS_SWCT_01616]	Semantics of TransformerHardErrorEvent

▽

△

Number	Heading
[TPS_SWCT_01617]	Structure of an ImplementationDataType that represents a variable-sized array data type
[TPS_SWCT_01624]	Hard error occurs during the execution of a transformer chain
[TPS_SWCT_02001]	Values of SwAxisCont with the category, COM_AXIS, RES_AXIS are for display only
[TPS_SWCT_02053]	Values of RuleBasedAxisCont with the category COM_AXIS, RES_AXIS are for display only

Table G.34: Changed Traceables in R4.2.2

G.8.3 Deleted Traceables in R4.2.2

Number	Heading
[TPS_SWCT_01308]	Combination of supportsMultipleInstantiation=false and canBeInvokedConcurrently=false
[TPS_SWCT_01433]	Invalid values outside the range limits
[TPS_SWCT_01435]	Invalid values outside the range limits
[TPS_SWCT_01603]	Variable size array with Size Indicator
[TPS_SWCT_01611]	Enable Size Indicator

Table G.35: Deleted Traceables in R4.2.2

G.8.4 Added Constraints in R4.2.2

Number	Heading
[constr_1381]	Appearance of core-related possible values of MemorySection.option or SwAddrMethod.option according to [TPS_SWCT_01456]
[constr_1382]	Mutually exclusive existence of attributes SwVariableRefProxy.autosarVariable vs. SwVariableRefProxy.mcDataInstanceVar
[constr_1383]	Existence of CompuMethod and DataConstr for ImplementationDataTypes of category TYPE_REFERENCE
[constr_1384]	Definition of invalidValue for DataPrototype typed by ApplicationPrimitiveDataType of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, RES_AXIS, and VAL_BLK
[constr_1385]	DataPrototype is typed by an ImplementationDataType
[constr_1386]	PortDefinedArgumentValue shall only be defined for AbstractProvidedPortPrototype
[constr_1388]	VariationPointProxy of category VALUE shall not mix “pre-build” and “post-build” use-cases

▽

△

Number	Heading
[constr_1389]	Restriction regarding the value of category of VariationPoint-Proxy.implementationDataType
[constr_1390]	Restriction to the value of SenderReceiverInterface.invalidation-Policy.handleInvalid
[constr_1391]	Compatibility of Units in the context of assignment using an ApplicationValue-Specification
[constr_1392]	Compatibility of Units in the context of assignment using an ApplicationRule-BasedValueSpecification
[constr_1393]	Existence of RuleBasedValueCont.unit
[constr_1395]	NvBlockDataMapping shall be complete
[constr_1396]	Restriction for the value of attribute category for non-terminating ImplementationDataTypeElements taken to model a Variable-Size Array Data Type
[constr_1397]	Existence of attributes of TransformerHardErrorEvent
[constr_1398]	Existence of attributes of BaseTypeDirectDefinition
[constr_1399]	Standardized values of ModeDeclarationGroup.category
[constr_1400]	Reference to a specific DataTransformation
[constr_1401]	Restrictions on the relation between DataPrototypeMapping and Data-Transformation
[constr_1402]	Applicability of core-related possible values of MemorySection.option or SwAddr-Method.option related to SwAddrMethod.sectionInitializationPolicy
[constr_1403]	NvBlockDataMappings to a given nvData shall be unambiguous
[constr_1404]	All NvDataInterface.nvData of PortPrototypes in the context of a specific SwcServiceDependency shall be mapped to the same NvBlockDescriptor

Table G.36: Added Constraints in R4.2.2

G.8.5 Changed Constraints in R4.2.2

Number	Heading
[constr_1006]	applicable data categories
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1040]	Conversion of SenderReceiverInterfaces
[constr_1045]	Supported value encodings for SwBaseType in the context of PortInterfaces
[constr_1060]	Compatibility of data types with category ARRAY, VAL_BLK
[constr_1064]	Compatibility of data types with category COM_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, or CUBE_5
[constr_1066]	Forbidden mappings to ImplementationDataType
[constr_1075]	Compatibility of ModeDeclarationGroups
[constr_1164]	Number of arguments owned by a RunnableEntity

▽

△

Number	Heading
[constr_1234]	Value of RunnableEntity.symbol
[constr_1318]	Profile VSA_LINEAR for ImplementationDataType
[constr_1319]	Profile VSA_SQUARE for ImplementationDataType
[constr_1320]	Profile VSA_RECTANGULAR for ImplementationDataType
[constr_1321]	Profile VSA_FULLY_FLEXIBLE for ImplementationDataType
[constr_1322]	Size Indicator for undefined dynamicArraySizeProfile
[constr_2051]	Mandatory information of a SwValueCont
[constr_2058]	Mandatory information of a RuleBasedValueCont

Table G.37: Changed Constraints in R4.2.2

G.8.6 Deleted Constraints in R4.2.2

Number	Heading
[constr_1002]	End-to-end protection does not support n:1 communication
[constr_1067]	ApplicationDataType is or is not compatible to specific ImplementationDataType
[constr_2001]	Initial value for a specific implicitInterRunnableVariable or explicitInterRunnableVariable

Table G.38: Deleted Constraints in R4.2.2

G.9 Traceable item history of this document according to AUTOSAR Release R4.3.0

G.9.1 Added Traceables in R4.3.0

Number	Heading
[TPS_SWCT_01660]	Values of SwcServiceDependency.category reserved by the standard
[TPS_SWCT_01661]	Default value of SwcServiceDependency.category
[TPS_SWCT_01662]	Applicability of DataTypeMappingSets inside an NvBlockSwComponentType
[TPS_SWCT_01663]	dataReadAccess vs. dataReceivePointByValue or dataReceivePointByArgument
[TPS_SWCT_01664]	BswM acts as a mode requester towards an application mode manager
[TPS_SWCT_01665]	Usage of SwcModeSwitchEvent for triggering a write procedure of *nv data*
[TPS_SWCT_01666]	Semantics of ModeSwitchEventTriggeredActivity.role
[TPS_SWCT_01667]	Avoidance of overlapping of directly adjacent intervals within CompuMethods

▽

△

Number	Heading
[TPS_SWCT_01668]	SecOc Use Case: obtain the verification status of secure communication
[TPS_SWCT_01672]	SecOc Use Case: software component retires from secure communication for a given period
[TPS_SWCT_01673]	Application Software Component sends requests using the J1939Rm
[TPS_SWCT_01674]	Application Software Component accepts requests using the J1939Rm
[TPS_SWCT_01675]	Recommendations for attributes of NvBlockNeeds or for NvBlock-Descriptor
[TPS_SWCT_01676]	Preferred approach to checking the compatibility of input value and axis
[TPS_SWCT_01677]	Fall-back approach to checking the compatibility of input value and axis
[TPS_SWCT_01678]	StbM use Case: Application software component accesses the Synchronized Time-Base Manager
[TPS_SWCT_01679]	StbM use Case: Synchronized Time-Base Manager notifies application software component
[TPS_SWCT_01680]	Dem Use Case: Atomic Software-Component implements a Hardware Shutdown
[TPS_SWCT_01681]	Context path in ArVariableInImplementationDataInstanceRef
[TPS_SWCT_01682]	The meaning of E2E-related attributes in a ReceiverComSpec if a TransformationComSpecProps of type EndToEndTransformation-ComSpecProps is defined.
[TPS_SWCT_01683]	Specification of an array of input variable for an array of axes
[TPS_SWCT_01684]	Specification of a single input variable for an array of axes
[TPS_SWCT_01685]	Specification of an array of group axes for an array of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5
[TPS_SWCT_01686]	Specification of a single group axis for an array of elements of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5
[TPS_SWCT_01687]	Support of locked communication buffers
[TPS_SWCT_01688]	initValue should exist in an RPortPrototype
[TPS_SWCT_01689]	Relation between SwcServiceDependencys and PortPrototypes
[TPS_SWCT_01690]	AtomicSwComponentType offers a PPortPrototype typed by Client-ServerInterface to read/write and IOCtrl current value via diagnostic services
[TPS_SWCT_01691]	Suffix used for the resulting name of the PortInterface for the Data Services
[TPS_SWCT_01692]	Meaning of CompositeRuleBasedValueSpecification
[TPS_SWCT_01693]	Usage of VendorSpecificServiceNeeds
[TPS_SWCT_01694]	Setup for Default Error Tracer Service use Case: development errors or runtime error
[TPS_SWCT_01695]	Relation between ValueSpecification and the definition of CompuScales
[TPS_SWCT_01696]	CompuScale Value Symbolic Name
[TPS_SWCT_01697]	Supported development approach for software-components that interact with AUTOSAR services
[TPS_SWCT_01698]	Attributes that are subject to development approach

▽

△

Number	Heading
[TPS_SWCT_01699]	Usage of ApplicationArrayElement.indexDataType
[TPS_SWCT_01700]	Definition of unions that can be transmitted over a communication network
[TPS_SWCT_01701]	Wrapped Union Data Type
[TPS_SWCT_01702]	Initialization of the “payload” of a Wrapped Union Data Type
[TPS_SWCT_01703]	Setup for AtomicSwComponentType which sets or gets the Global Supervision Status
[TPS_SWCT_01704]	Definition of supervised entity
[TPS_SWCT_01705]	Definition of Checkpoints
[TPS_SWCT_01706]	AtomicSwComponentType supports *DiagnosticSessionControl* to get informed about the diagnostic session
[TPS_SWCT_01707]	AtomicSwComponentType supports *EcuReset* service via diagnostic services
[TPS_SWCT_01708]	AtomicSwComponentType supports *EcuReset ModeRapidPowerShutDown* service via diagnostic services
[TPS_SWCT_01709]	AtomicSwComponentType supports *CommunicationControl* service via diagnostic services
[TPS_SWCT_01710]	Suffix used for the resulting name of the PortInterface for the Communication Control
[TPS_SWCT_01711]	AtomicSwComponentType supports *ControlDTCSetting* service via diagnostic services
[TPS_SWCT_01712]	AtomicSwComponentType supports SecurityAccess to get informed about the security level
[TPS_SWCT_01713]	ExclusiveArea is entered and exited by a common set of APIs
[TPS_SWCT_01714]	ExclusiveArea is entered and exited by an individual set of APIs
[TPS_SWCT_01715]	Software-Component wants to be triggered on Monitor Status Changes
[TPS_SWCT_01716]	SecOc Use Case: deliver freshness to SecOC I
[TPS_SWCT_01717]	SecOc Use Case: deliver freshness to SecOC II
[TPS_SWCT_01718]	SecOc Use Case: deliver freshness to SecOC III
[TPS_SWCT_01719]	Selection of applicable RptProfiles
[TPS_SWCT_01720]	Preparation Levels
[TPS_SWCT_01721]	References from RptContainer
[TPS_SWCT_01722]	Semantics of RP Service Point
[TPS_SWCT_01723]	Semantics of RP Service Function
[TPS_SWCT_01724]	Semantics of RapidPrototypingScenario
[TPS_SWCT_01725]	AtomicSwComponentType uses the secure counter of the Crypto Service
[TPS_SWCT_01726]	AtomicSwComponentType uses the key management of the Crypto Service
[TPS_SWCT_01727]	Suffix used for the resulting name of the PortInterface for crypto PortInterfaces
[TPS_SWCT_01728]	V2xFac Use Case: Application software component provides Vehicle specific data to the V2X-Stack for CAM transmission
[TPS_SWCT_01729]	V2xFac Use Case: V2xFac notifies application software component about received messages

▽

△

Number	Heading
[TPS_SWCT_01730]	V2xFac Use Case: Application software component triggers transmission of DENM message
[TPS_SWCT_01731]	V2xM Use Case: Application software component provides Vehicle specific data to the V2X-Stack for Position and Time information
[TPS_SWCT_01732]	V2xM Use Case: Application software component needs V2X specific data from the V2X Manager
[TPS_SWCT_01733]	V2xM Use Case: Application software component has soft-control over Pseudonym-Change within V2X Manager
[TPS_SWCT_01734]	V2xM Use Case: Application software component has the ability to do Verification-on-Demand
[TPS_SWCT_01735]	V2xM Use Case: Application software component do location based calculations

Table G.39: Added Traceabless in 4.3.0

G.9.2 Changed Traceables in R4.3.0

Number	Heading
[TPS_SWCT_01005]	Usage of `SwcServiceDependency`s for vendor-specific services
[TPS_SWCT_01054]	Semantics of the `explicitInterRunnableVariable`
[TPS_SWCT_01134]	`AtomicSwComponentType` enables reporting of DTCs in general
[TPS_SWCT_01158]	Cases for `PortInterfaceMapping`
[TPS_SWCT_01173]	Control port shall **not** become a part of the `PortGroup`
[TPS_SWCT_01174]	Status port shall **not** become a member of the `PortGroup`
[TPS_SWCT_01182]	Conceptual levels for the definition of initial values
[TPS_SWCT_01275]	values of the attribute `swImplPolicy` are restricted depending on the context
[TPS_SWCT_01331]	`dataWriteAccess` vs. `dataSendPoint`
[TPS_SWCT_01355]	`enableTakeAddress` = `true`
[TPS_SWCT_01463]	`ModeDeclarationGroupPrototypeMapping.modeDeclaration-MappingSet` defines the applicable set of `ModeDeclarationMapping`s
[TPS_SWCT_01493]	The number of `RuleBasedValueSpecification.arguments` shall not exceed the array size
[TPS_SWCT_01494]	A `RuleBasedValueSpecification` of `rule` `FILL_UNTIL_END` shall fill the value of the last `RuleBasedValueSpecification.arguments` until the last element of the array
[TPS_SWCT_01552]	Software-component acts as a mode manager
[TPS_SWCT_01553]	Software-component acts as a mode user
[TPS_SWCT_01554]	Software-component acts as a mode requester
[TPS_SWCT_01569]	Definition of `CompuScale Code Symbolic Name`
[TPS_SWCT_01586]	Writing strategies for *nv data*

▽

△

Number	Heading
[TPS_SWCT_01609]	A RuleBasedValueSpecification of rule FILL_UNTIL_MAX_SIZE shall fill the value of the last RuleBasedValueSpecification.arguments until the number of elements specified in maxSizeToFill
[TPS_SWCT_01635]	Naming conventions may support the effectiveness of SymbolProps
[TPS_SWCT_02001]	Values of SwAxisCont with the category COM_AXIS, RES_AXIS are for display only
[TPS_SWCT_02014]	AtomicSwComponentType supports Response On Event (ROE) via diagnostic services
[TPS_SWCT_02020]	AtomicSwComponentType uses the hash calculation of the Crypto Service
[TPS_SWCT_02021]	AtomicSwComponentType uses the message authentication code (MAC) calculation of the Crypto Service
[TPS_SWCT_02022]	AtomicSwComponentType uses the message authentication code (MAC) verification of the Crypto Service
[TPS_SWCT_02024]	AtomicSwComponentType uses the generation of random numbers of the Crypto Service
[TPS_SWCT_02025]	AtomicSwComponentType uses the Authenticated Encryption with Associated Data (AEAD) of the Crypto Service
[TPS_SWCT_02026]	AtomicSwComponentType uses the Authenticated Encryption with Associated Data (AEAD) of the Crypto Service
[TPS_SWCT_02027]	AtomicSwComponentType uses the encryption of the Crypto Service
[TPS_SWCT_02028]	AtomicSwComponentType uses the decryption of the Crypto Service
[TPS_SWCT_02031]	AtomicSwComponentType uses the signature generation of the Crypto Service
[TPS_SWCT_02032]	AtomicSwComponentType uses the signature verification of the Crypto Service
[TPS_SWCT_02053]	Values of RuleBasedAxisCont with the category COM_AXIS, RES_AXIS are for display only
[TPS_SWCT_02503]	Setup for NVM Use Case: Software-Components using Nv Data provided by NvBlockSwComponentType
[TPS_SWCT_02506]	Setup for Dlt use Case: Application software component accesses the Dlt module

Table G.40: Changed Traceables in R4.3.0

G.9.3 Deleted Traceables in R4.3.0

Number	Heading
[TPS_SWCT_01279]	Preferred conversion direction depends on the use case
[TPS_SWCT_01428]	ServiceSwComponentType representing the Dem provides a PPortPrototype for the Dcm
[TPS_SWCT_02018]	Setup for AtomicSwComponentType which contains a Supervised Entity

▽

△

Number	Heading
[TPS_SWCT_02023]	AtomicSwComponentType uses the generation of random seed of the Crypto Service
[TPS_SWCT_02029]	AtomicSwComponentType uses the asymmetrical encryption of the Crypto Service
[TPS_SWCT_02030]	AtomicSwComponentType uses the asymmetrical decryption of the Crypto Service
[TPS_SWCT_02033]	AtomicSwComponentType uses the checksum calculation of the Crypto Service
[TPS_SWCT_02034]	AtomicSwComponentType uses the key derivation of the Crypto Service
[TPS_SWCT_02035]	AtomicSwComponentType uses the symmetric key derivation of the Crypto Service
[TPS_SWCT_02036]	AtomicSwComponentType uses the key exchange interface for public value calculation of the Crypto Service
[TPS_SWCT_02037]	AtomicSwComponentType uses the key exchange interface for secret value calculation of the Crypto Service
[TPS_SWCT_02038]	AtomicSwComponentType uses the key exchange interface to calculate symmetric key with the Crypto Service
[TPS_SWCT_02039]	AtomicSwComponentType uses the symmetrical key extraction of the Crypto Service
[TPS_SWCT_02040]	AtomicSwComponentType uses the symmetrical key wrapping of the Crypto Service to export a symmetrical key structure with a symmetric key
[TPS_SWCT_02041]	AtomicSwComponentType uses the asymmetrical key wrapping of the Crypto Service to export a symmetrical key structure with a asymmetric key
[TPS_SWCT_02042]	AtomicSwComponentType uses the asymmetrical public key extraction of the Crypto Service
[TPS_SWCT_02043]	AtomicSwComponentType uses the asymmetrical private key extraction of the Crypto Service
[TPS_SWCT_02044]	AtomicSwComponentType uses the asymmetrical key wrapping of the Crypto Service to export a (asymmetric) private key structure with a symmetrical wrapping key
[TPS_SWCT_02045]	AtomicSwComponentType uses the asymmetrical key wrapping of the Crypto Service to export a (asymmetric) private key structure with a asymmetrical wrapping key

Table G.41: Deleted Traceables in R4.3.0

G.9.4 Added Constraints in R4.3.0

Number	Heading
[constr_1407]	Definition of SwDataDefProps.dataConstr depending on the capabilities of the data type
[constr_1408]	Definition of SwDataDefProps.displayFormat depending on the capabilities of the data type

▽

△

Number	Heading
[constr_1409]	Definition of SwDataDefProps.dataConstr depending on the capabilities of the element data type
[constr_1410]	Definition of SwDataDefProps.displayFormat depending on the capabilities of the element data type
[constr_1413]	Definition of SwDataDefProps.stepSize depending on the capabilities of the data type
[constr_1414]	Definition of SwDataDefProps.stepSize depending on the capabilities of the element data type
[constr_1415]	Supported values of ModeSwitchEventTriggeredActivity.role
[constr_1416]	Existence of ApplicationArrayElement.maxNumberOfElements
[constr_1417]	Invalid connection between NvBlockSwComponentType and other AtomicSwComponentType (I)
[constr_1418]	Invalid connection between NvBlockSwComponentType and other AtomicSwComponentType (II)
[constr_1420]	Existence of SwAxisIndividual.inputVariableType
[constr_1422]	Value of category is VOID
[constr_1423]	Completeness of references ArVariableInImplementationDataInstanceRef.contextDataPrototype
[constr_1424]	Existence of ArVariableInImplementationDataInstanceRef.contextDataPrototype
[constr_1425]	Definition of swCalprmAxisSet.swCalprmAxis/ SwAxisIndividual.swVariableRef depending on the capabilities of the data type
[constr_1426]	Consistency of array sizes for axes and input variable array
[constr_1427]	Definition of swCalprmAxisSet.swCalprmAxis/ SwAxisGrouped.swCalprmRef depending on the capabilities of the data type
[constr_1428]	Consistency of array sizes for arrays of elements of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 arrays and used group axes arrays
[constr_1429]	Access to data within PortPrototypes from within RunnableEntitys
[constr_1430]	Access to local data from within RunnableEntitys
[constr_1431]	Access to parameters from within RunnableEntitys
[constr_1432]	Multiplicity of CommunicationBufferLocking
[constr_1433]	Transient faults are not applicable to software-components
[constr_1434]	CompuScales shall not have identical CompuScale Value Symbolic Names
[constr_1436]	DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType is set to requestCallbackTypeSupplier
[constr_1437]	DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType is set to requestCallbackTypeManufacturer
[constr_1438]	ApplicationArrayElement.indexDataType needs to refer to a CompuMethod of category TEXTTABLE
[constr_1439]	Requirements on ApplicationArrayElement if attribute indexDataType exists
[constr_1440]	Size of the CompuMethod of category TEXTTABLE referenced by ApplicationArrayElement.indexDataType

▽

△

Number	Heading
[constr_1442]	category TYPE_REFERENCE shall not be used for modeling the "payload" of a Wrapped Union Data Type
[constr_1443]	category UNION shall not be used for ImplementationDataType
[constr_1444]	Limited applicability of Wrapped Union Data Type
[constr_1445]	Initialization of the Member Selector of a Wrapped Union Data Type
[constr_1446]	No definition of invalidValue for a Wrapped Union Data Type
[constr_1468]	Limitation on the number of SwcExclusiveAreaPolicys
[constr_1469]	Applicability of constraints depending on the existence of a data transformation

Table G.42: Added Constraints in R4.3.0

G.9.5 Changed Constraints in R4.3.0

Number	Heading
[constr_1006]	applicable data categories
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1009]	SwDataDefProps applicable to ImplementationDataTypes
[constr_1011]	category of SwBaseType
[constr_1014]	Supported value encodings for SwBaseType
[constr_1015]	Prioritization of SwDataDefProps
[constr_1024]	Stepwise definition of CompuMethods
[constr_1045]	Supported value encodings for SwBaseType in the context of PortInterfaces
[constr_1105]	Value of arraySize
[constr_1240]	Consistency of ArgumentDataPrototypes within the context of a ClientServer-OperationMapping
[constr_1271]	RecordValueSpecification.fields shall be identical to the number of ApplicationRecordDataType.elements
[constr_1272]	RecordValueSpecification.fields shall be identical to the number of sub-Elements of ImplementationDataType of category STRUCTURE
[constr_1284]	Limitation of the use of TextValueSpecification
[constr_1288]	Allowed Attributes vs. category for DataPrototypes typed by Implementation-DataTypes
[constr_1289]	Allowed Attributes vs. category for DataPrototypes typed by Application-DataTypes
[constr_1302]	Restriction of data invalidation
[constr_1375]	Existence of attributes of CompuMethod and related meta-classes
[constr_1400]	Reference to a specific DataTransformation
[constr_2006]	Number of AsynchronousServerCallResultPoint referencing to one AsynchronousServerCallPoint

▽

△

Number	Heading
[constr_2015]	Limitation of SwcInternalBehavior of a NvBlockSwComponentType
[constr_2041]	swImplPolicy for VariableDataPrototype in the role staticMemory
[constr_2051]	Mandatory information of a SwValueCont
[constr_2058]	Mandatory information of a RuleBasedValueCont

Table G.43: Changed Constraints in R4.3.0

G.9.6 Deleted Constraints in R4.3.0

Number	Heading
[constr_1019]	Compatibility of input value and axis
[constr_1021]	A CompuMethod shall specify instructions for both directions
[constr_1133]	Identical CompuScale Symbolic Names shall have the same range
[constr_1201]	initValue shall exist in an RPortPrototype
[constr_1323]	Applicability of attribute ReceiverComSpec.usesEndToEndProtection

Table G.44: Deleted Constraints in R4.3.0

G.10 Traceable item history of this document according to AUTOSAR Release R4.3.1

G.10.1 Added Specification Items in R4.3.1

Number	Heading
[TPS_SWCT_01736]	Default values for Unit.physicalDimension
[TPS_SWCT_01737]	Default values for physical exponents
[TPS_SWCT_01738]	Context path in ArParameterInImplementationDataInstanceRef
[TPS_SWCT_01739]	Function Inhibition Manager Use Case: react on suppressed or unavailable events
[TPS_SWCT_01740]	StbM use Case: Process time snapshot obtained from global time slave for diagnostics purposes
[TPS_SWCT_01741]	Suffix used for the resulting name of the PortInterface for measurement notification
[TPS_SWCT_01742]	StbM use Case: Software-component represents a global time master
[TPS_SWCT_01743]	Suffix used for the resulting name of the PortInterface for the global time master role
[TPS_SWCT_01744]	StbM use Case: Software-component represents a global time slave

▽

△

Number	Heading
[TPS_SWCT_01745]	Suffix used for the resulting name of the PortInterface for the global time slave role
[TPS_SWCT_01746]	Atomic Software-Component provides the further action byte to the DoIP Service Component
[TPS_SWCT_01747]	Value of category for fix axis
[TPS_SWCT_01748]	Sub-categories of fix axes
[TPS_SWCT_01749]	Semantics of SwAxisGeneric.swAxisType in the definition of a fix axis
[TPS_SWCT_01750]	Semantics of SwAxisGeneric.swGenericAxisParam in the definition of a fix axis

Table G.45: Added Specification Items in R4.3.1

G.10.2 Changed Specification Items in R4.3.1

Number	Heading
[TPS_SWCT_01193]	Mappings between application and implementation types do not necessarily have to form a 1:1 relation
[TPS_SWCT_01222]	Applicability of DataFilter
[TPS_SWCT_01225]	RunnableEntity implements the functionality of more than one ClientServerOperations
[TPS_SWCT_01288]	Interpretation of PhysConstrs and InternalConstrs by tools
[TPS_SWCT_01444]	Size of SwBaseType is specified in bits
[TPS_SWCT_01560]	Supported categorys of CompuMethods for data conversion
[TPS_SWCT_01675]	Recommendations for attributes of NvBlockNeeds or for NvBlockDescriptor
[TPS_SWCT_01678]	StbM use Case: start timer and potentially get notified about its expiration
[TPS_SWCT_01679]	StbM use Case: Software-Components wants to get notifications of status changes
[TPS_SWCT_01714]	ExclusiveArea is entered and exited by an individual set of APIs
[TPS_SWCT_02506]	Setup for Dlt use Case: Application software component accesses the Dlt module

Table G.46: Changed Specification Items in R4.3.1

G.10.3 Deleted Specification Items in R4.3.1

Number	Heading
[TPS_SWCT_01490]	AUTOSAR supports ApplicationErrors only for ClientServerInterfaces

Table G.47: Deleted Specification Items in R4.3.1

G.10.4 Added Constraints in R4.3.1

Number	Heading
[constr_1515]	Existence of ImplementationDataTypeSubElementRef.implementationDataTypeElement as opposed to ImplementationDataTypeSubElementRef.parameterImplementationDataTypeElement
[constr_1516]	Completeness of references ArParameterInImplementationDataInstanceRef.contextDataPrototype
[constr_1517]	Existence of ArParameterInImplementationDataInstanceRef.contextDataPrototype
[constr_1518]	Consistency of data types in the context of ArParameterInImplementationDataInstanceRef
[constr_1519]	Existence of attributes vs. category of ApplicationValueSpecification
[constr_1520]	Semantics of ObdRatioServiceNeeds.rateBasedMonitoredEvent
[constr_1521]	Reference from AsynchronousServerCallReturnsEvent to AsynchronousServerCallResultPoint
[constr_1523]	No mode disabling for OperationInvokedEvents
[constr_1538]	Restriction for ReceiverComSpec.dataElement
[constr_1539]	Restriction for SenderComSpec.dataElement
[constr_1540]	Existence of ClientComSpec.operation
[constr_1541]	Existence of ServerComSpec.operation
[constr_1544]	Modeling of SwAxisGeneric for the definition of a fix axis
[constr_1545]	No initialization for fix axis

Table G.48: Added Constraints in R4.3.1

G.10.5 Changed Constraints in R4.3.1

Number	Heading
[constr_1004]	Mapping of ApplicationDataTypes in the scope of single AtomicSwComponentTypes
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1009]	SwDataDefProps applicable to ImplementationDataTypes
[constr_1011]	category of SwBaseType
[constr_1012]	Value of category is FIXED_LENGTH
[constr_1015]	Prioritization of SwDataDefProps
[constr_1038]	Reference to ApplicationError
[constr_1044]	Applicability of DataFilter
[constr_1090]	WaitPoint and RunnableEntity
[constr_1102]	ApplicationError in the scope of one SwComponentType
[constr_1126]	Compatibility of DataConstrs
[constr_1220]	Compatibility of SwBaseType

▽

△

Number	Heading
[constr_1229]	`category` of `ImplementationDataType` boils down to `VALUE`
[constr_1288]	Allowed Attributes vs. `category` for `DataPrototype`s typed by `ImplementationDataType`s
[constr_1289]	Allowed Attributes vs. `category` for `DataPrototype`s typed by `ApplicationDataType`s
[constr_1422]	Value of `category` is `VOID`
[constr_2027]	`SwcServiceDependency` shall be defined for service ports only
[constr_2043]	`swImplPolicy` for `ParameterDataPrototype` in the role `romBlock`
[constr_2044]	`swImplPolicy` for `ParameterDataPrototype` in the role `sharedParameter`
[constr_2045]	`swImplPolicy` for `ParameterDataPrototype` in the role `perInstanceParameter`
[constr_2046]	`swImplPolicy` for `ParameterDataPrototype` in the role `constantMemory`

Table G.49: Changed Constraints in R4.3.1

G.10.6 Deleted Constraints in R4.3.1

Number	Heading
[constr_1013]	Value of `category` is `VARIABLE_LENGTH`
[constr_1436]	`DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType` is set to `requestCallbackTypeSupplier`
[constr_1437]	`DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType` is set to `requestCallbackTypeManufacturer`

Table G.50: Deleted Constraints in R4.3.1

G.11 Traceable item history of this document according to AUTOSAR Release R4.4.0

G.11.1 Added Specification Items in R4.4.0

Number	Heading
[TPS_SWCT_01751]	The meaning of E2E-related attributes in a `SenderComSpec` if a `TransformationComSpecProps` of type `EndToEndTransformationComSpecProps` is defined
[TPS_SWCT_01752]	Initialization of a variable-size array
[TPS_SWCT_01753]	Application of compatibility rules for `ReceiverComSpec.replaceWith`
[TPS_SWCT_01754]	`initValue` defined in the context of a `ComSpec`

▽

△

Number	Heading
[TPS_SWCT_01755]	Duplicate existence of initValue in the context of a PRPortPrototype typed by an NvDataInterface
[TPS_SWCT_01756]	Semantics of SwDataDefProps.displayPresentation
[TPS_SWCT_01757]	Not-applicable scenario for presentationContinuous
[TPS_SWCT_01758]	Applicable value range of SwDataDefProps.displayPresentation
[TPS_SWCT_01759]	Use cases for unions
[TPS_SWCT_01760]	Defining the dimension of an ApplicationPrimitiveDataType of category VAL_BLK
[TPS_SWCT_01761]	Physical limits of pure textual conversions
[TPS_SWCT_01762]	Physical limits of mixed textual conversions
[TPS_SWCT_01763]	HtssM Service Use Case: Query results of hardware tests
[TPS_SWCT_01764]	V2xFac Use Case: Application software component shall be able to process the *MAP (topology) Extended Message*
[TPS_SWCT_01765]	Dem Service Use Case: In-Use-Monitoring Performance Ratio Denominator interface
[TPS_SWCT_01766]	Software-component computes the PIDs, and pushes them to Dem for storage and reporting to Dcm
[TPS_SWCT_01767]	Software-component located on an OBD master ECU reads the PID 21, and and sends the value around via “regular” sender-receiver communication
[TPS_SWCT_01768]	Semantics of DataPrototypeMapping.secondToFirstDataTransformation
[TPS_SWCT_01769]	Dcm Use Case: Upload and download of data
[TPS_SWCT_01770]	V2xFac Use Case: Application software component processes Infrastructure to Vehicle Information Message
[TPS_SWCT_01771]	Definition of optional elements on the level of ApplicationDataType
[TPS_SWCT_01772]	Semantics of attribute ImplementationDataType.isStructWithOptionalElement
[TPS_SWCT_01773]	Definition of Optional Element Structure on the level of ImplementationDataType
[TPS_SWCT_01774]	Modeling of ImplementationDataType with optional elements
[TPS_SWCT_01775]	Structured data types with optional elements
[TPS_SWCT_01776]	AtomicSwComponentType uses the API of the Crypto Service to set a key valid
[TPS_SWCT_01777]	AtomicSwComponentType uses the API of the Crypto Service to create a random seed
[TPS_SWCT_01778]	AtomicSwComponentType uses the API of the Crypto Service to generate a key
[TPS_SWCT_01779]	AtomicSwComponentType uses the API of the Crypto Service to derive a key
[TPS_SWCT_01780]	AtomicSwComponentType uses the API of the Crypto Service to execute calculation of the public value for key exchange
[TPS_SWCT_01781]	AtomicSwComponentType uses the API of the Crypto Service to execute calculation of shared secret for key exchange

▽

△

Number	Heading
[TPS_SWCT_01782]	AtomicSwComponentType uses the API of the Crypto Service to execute certificate parsing
[TPS_SWCT_01783]	AtomicSwComponentType uses the API of the Crypto Service to execute certificate verification
[TPS_SWCT_01784]	SecOc Use Case: enable the sending of Pdus even if computation of the MAC is not possible
[TPS_SWCT_01785]	Initial value for ImplementationDataType of category STRUCTURE where attribute isStructWithOptionalElement set to the value True
[TPS_SWCT_01786]	Initial value for the ImplementationDataTypeElement where the shortName is set to the value availabilityBitfield
[TPS_SWCT_01787]	Initialization of not-available ImplementationDataTypeElement
[TPS_SWCT_01788]	V2xFac Use Case: Application software component processes Signal Phase And Timing Extended Message
[TPS_SWCT_01789]	AtomicSwComponentType implements a Diagnostic Monitor that provides monitor data, debouncing by Dem
[TPS_SWCT_01790]	AtomicSwComponentType implements a Diagnostic Monitor that provides monitor data, debouncing by software-component
[TPS_SWCT_01791]	AtomicSwComponentType acts as a “file server” to a diagnostic tester

Table G.51: Added Specification Items in R4.4.0

G.11.2 Changed Specification Items in R4.4.0

Number	Heading
[TPS_SWCT_01016]	AtomicSwComponentType wants to select a shutdown target
[TPS_SWCT_01017]	AtomicSwComponentType wants to select a boot target
[TPS_SWCT_01018]	AtomicSwComponentType wants to use an alarm clock
[TPS_SWCT_01028]	AtomicSwComponentType implements a Diagnostic Monitor
[TPS_SWCT_01029]	AtomicSwComponentType implements a Diagnostic Monitor
[TPS_SWCT_01132]	AtomicSwComponentType provides information about operating cycles
[TPS_SWCT_01136]	AtomicSwComponentType retrieves information of the lamp status
[TPS_SWCT_01180]	Maximum possible size of Compound Primitive Data Type
[TPS_SWCT_01275]	values of the attribute swImplPolicy are restricted depending on the context
[TPS_SWCT_01374]	Implementation of AutosarParameterRef
[TPS_SWCT_01375]	Implementation of AutosarVariableRef
[TPS_SWCT_01398]	Communication patterns for AUTOSAR services
[TPS_SWCT_01405]	Creation of the ServiceSwComponentTypes
[TPS_SWCT_01426]	AtomicSwComponentType provides callback if any diagnostic event data and/or status changed

▽

△

Number	Heading
[TPS_SWCT_01456]	Predefined values for `MemorySection.option` and `SwAddrMethod.option`
[TPS_SWCT_01678]	StbM use Case: start timer and potentially get notified about its expiration
[TPS_SWCT_01698]	Attributes that are subject to development approach
[TPS_SWCT_01706]	`AtomicSwComponentType` supports *DiagnosticSessionControl* to get informed about the diagnostic session
[TPS_SWCT_01707]	`AtomicSwComponentType` supports *EcuReset* service via diagnostic services
[TPS_SWCT_01708]	`AtomicSwComponentType` supports *EcuReset ModeRapidPowerShutDown* service via diagnostic services
[TPS_SWCT_01709]	`AtomicSwComponentType` supports *CommunicationControl* service via diagnostic services
[TPS_SWCT_01711]	`AtomicSwComponentType` supports *ControlDTCSetting* service via diagnostic services
[TPS_SWCT_01712]	`AtomicSwComponentType` supports SecurityAccess to get informed about the security level
[TPS_SWCT_01715]	Software-Component wants to be triggered on Monitor Status Changes
[TPS_SWCT_01727]	Suffix used for the resulting name of the `PortInterface` for crypto `PortInterface`s
[TPS_SWCT_01728]	V2xFac Use Case: Application software component provides Vehicle specific data to the V2X-Stack for CAM transmission
[TPS_SWCT_01729]	V2xFac Use Case: V2xFac notifies application software component about received messages
[TPS_SWCT_01730]	V2xFac Use Case: Application software component triggers transmission of DENM message
[TPS_SWCT_02000]	Default value for attribute `swImplPolicy`
[TPS_SWCT_02014]	`AtomicSwComponentType` supports Response On Event (ROE) via diagnostic services
[TPS_SWCT_02020]	`AtomicSwComponentType` uses the hash calculation of the Crypto Service
[TPS_SWCT_02021]	`AtomicSwComponentType` uses the message authentication code (MAC) calculation of the Crypto Service
[TPS_SWCT_02022]	`AtomicSwComponentType` uses the message authentication code (MAC) verification of the Crypto Service
[TPS_SWCT_02024]	`AtomicSwComponentType` uses the generation of random numbers of the Crypto Service
[TPS_SWCT_02025]	`AtomicSwComponentType` uses the Authenticated Encryption with Associated Data (AEAD) of the Crypto Service
[TPS_SWCT_02026]	`AtomicSwComponentType` uses the Authenticated Encryption with Associated Data (AEAD) of the Crypto Service
[TPS_SWCT_02027]	`AtomicSwComponentType` uses the encryption of the Crypto Service
[TPS_SWCT_02028]	`AtomicSwComponentType` uses the decryption of the Crypto Service
[TPS_SWCT_02031]	`AtomicSwComponentType` uses the signature generation of the Crypto Service

▽

△

Number	Heading
[TPS_SWCT_02032]	AtomicSwComponentType uses the signature verification of the Crypto Service
[TPS_SWCT_02506]	Setup for Dlt use Case: Application software component accesses the Dlt module

Table G.52: Changed Specification Items in R4.4.0

G.11.3 Deleted Specification Items in R4.4.0

Number	Heading
[TPS_SWCT_01012]	AtomicSwComponentType reads the current ECU mode (fixed variant)
[TPS_SWCT_01013]	AtomicSwComponentType shall keep the ECU alive (fixed variant)
[TPS_SWCT_01014]	AtomicSwComponentType wants to select a shutdown target (fixed variant)
[TPS_SWCT_01015]	AtomicSwComponentType wants to select a boot target (fixed variant)
[TPS_SWCT_01125]	serverArgumentImplPolicy
[TPS_SWCT_01133]	AtomicSwComponentType provides information about aging cycles
[TPS_SWCT_01658]	NamingRule for PPortPrototype referenced by a RoleBasedPortAssignment with attribute role set to “IOControlResponse”
[TPS_SWCT_01710]	Suffix used for the resulting name of the PortInterface for the Communication Control
[TPS_SWCT_01725]	AtomicSwComponentType uses the secure counter of the Crypto Service

Table G.53: Deleted Specification Items in R4.4.0

G.11.4 Added Constraints in R4.4.0

Number	Heading
[constr_1583]	PortInterfaceMapping for DataPrototype typed by Compound Primitive Data Type
[constr_1592]	Definition of SwDataDefProps.displayPresentation depending on the capabilities of the data type
[constr_1602]	Definition of SwDataDefProps.displayPresentation depending on the capabilities of the element
[constr_1607]	Only Wrapped Union Data Types in PortInterface
[constr_1608]	Existence of rootParameterDataPrototype
[constr_1609]	Existence of rootVariableDataPrototype
[constr_1610]	Existence of SwDataDefProps.swValueBlockSize and SwDataDefProps.swValueBlockSizeMult

▽

△

Number	Heading
[constr_1611]	Existence of ImplementationDataTypeSubElementRef.implementationDataTypeElement as opposed to ImplementationDataTypeSubElementRef.parameterImplementationDataTypeElement
[constr_1622]	Value of TimingEvent.offset vs. TimingEvent.period
[constr_1631]	Applicability of DataPrototypeMapping.secondToFirstDataTransformation
[constr_1632]	Restriction for firstToSecondDataTransformation and secondToFirstDataTransformation
[constr_1634]	Allowed combinations of ApplicationDataType.category vs. CompuMethod.category
[constr_1635]	Relevance of attribute isOptional
[constr_1636]	Mapping of data types that represent an Optional Element Structure
[constr_1637]	Existence of ImplementationDataTypeElement.isOptional vs. ImplementationDataType.isStructWithOptionalElement
[constr_1638]	First ImplementationDataTypeElement of ImplementationDataType that represents an Optional Element Structure
[constr_1639]	ImplementationDataTypeElement with attribute isOptional set to True
[constr_1640]	No use of Optional Element Structure for interaction with the diagnostic stack
[constr_1662]	Compatibility of ApplicationRecordDataType and ImplementationDataType that both represent an Optional Element Structure

Table G.54: Added Constraints in R4.4.0

G.11.5 Changed Constraints in R4.4.0

Number	Heading
[constr_1006]	applicable data categories
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1009]	SwDataDefProps applicable to ImplementationDataTypes
[constr_1015]	Prioritization of SwDataDefProps
[constr_1024]	Stepwise definition of CompuMethods
[constr_1048]	Compatibility of ApplicationRecordDataTypes
[constr_1050]	Compatibility of ImplementationDataTypes
[constr_1273]	Rules for the initialization of ApplicationArrayDataType by means of ArrayValueSpecification
[constr_1274]	Rules for the initialization of array-shaped ImplementationDataType by means of ArrayValueSpecification
[constr_1288]	Allowed Attributes vs. category for DataPrototypes typed by ImplementationDataTypes
[constr_1289]	Allowed Attributes vs. category for DataPrototypes typed by ApplicationDataTypes

▽

△

Number	Heading
[constr_1400]	Reference to a specific DataTransformation
[constr_1444]	Limited applicability of Wrapped Union Data Type
[constr_1519]	Existence of attributes vs. category of ApplicationValueSpecification
[constr_2000]	Compatibility of ClientServerOperations triggering the same RunnableEntity

Table G.55: Changed Constraints in R4.4.0

G.11.6 Deleted Constraints in R4.4.0

Number	Heading
[constr_1032]	DelegationSwConnector can only connect PortPrototypes of the same kind
[constr_1297]	Applicability of serverArgumentImplPolicy set to useArrayBaseType
[constr_1443]	category UNION shall not be used for ImplementationDataType
[constr_1515]	Existence of ImplementationDataTypeSubElementRef.implementationDataTypeElement as opposed to ImplementationDataTypeSubElementRef.parameterImplementationDataTypeElement

Table G.56: Deleted Constraints in R4.4.0

G.12 Traceable item history of this document according to AUTOSAR Release R19-11

G.12.1 Added Specification Items in R19-11

Number	Heading
[TPS_SWCT_01792]	Initialization of a DataPrototype associated with a CompuMethod of category BITFIELD_TEXTTABLE
[TPS_SWCT_01793]	Initialization of a *variable-size array* typed by an ImplementationDataType
[TPS_SWCT_01794]	Initialization of a *variable-size array* typed by an ApplicationArrayDataType
[TPS_SWCT_01795]	Further specification to facilitate the association of writing strategies to the corresponding RunnableEntity
[TPS_SWCT_01796]	Prioritization of SwDataDefProps.dataConstr for a DataPrototype of category ARRAY
[TPS_SWCT_01797]	Prioritization of SwDataDefProps.displayFormat for a DataPrototype of category ARRAY

▽

△

Number	Heading
[TPS_SWCT_01798]	Prioritization of SwDataDefProps.stepSize for a DataPrototype of category ARRAY
[TPS_SWCT_01799]	Mapping of bitfields between NvBlockDescriptor and PortPrototype
[TPS_SWCT_01801]	Support for Meta-Data
[TPS_SWCT_01802]	Definition of meta-data in the context of a SenderReceiverInterface
[TPS_SWCT_01803]	MetaDataItems define the same value of attribute length
[TPS_SWCT_01804]	Standardized values of attribute MetaDataItem.metaDataItem-Type.value
[TPS_SWCT_01805]	Semantics of the aggregation NvBlockSwComponentType.bulkNvData-Descriptor
[TPS_SWCT_01806]	Simultaneous aggregation of NvBlockSwComponentType.bulkNvData-Descriptor and NvBlockSwComponentType.nvBlockDescriptor
[TPS_SWCT_01807]	Application of NvBlockDataMapping on BulkNvDataDescriptor
[TPS_SWCT_03500]	Status forwarding to data transformer
[TPS_SWCT_03501]	Applicability of status forwarding to data transformer

Table G.57: Added Specification Items in R19-11

G.12.2 Changed Specification Items in R19-11

Number	Heading
[TPS_SWCT_01029]	AtomicSwComponentType implements a Diagnostic Monitor
[TPS_SWCT_01030]	RunnableEntity
[TPS_SWCT_01132]	AtomicSwComponentType provides information about operating cycles
[TPS_SWCT_01148]	NvBlockDataMapping
[TPS_SWCT_01182]	Conceptual levels for the definition of initial values
[TPS_SWCT_01220]	initValue defines an initial value that shall be taken if the corresponding dataElement has not yet been received
[TPS_SWCT_01243]	Definition of enumeration types
[TPS_SWCT_01309]	signature of a RunnableEntity depends on the connected RTEEvent
[TPS_SWCT_01310]	Categories of RunnableEntitys
[TPS_SWCT_01654]	AtomicSwComponentType offers PortPrototypes typed by Sender-ReceiverInterfaces to adjust the IO signal via diagnostic services
[TPS_SWCT_01656]	Suffix used for the resulting name of the PortInterface for DataServices, IOControlRequest, and IOControlResponse
[TPS_SWCT_01789]	AtomicSwComponentType implements a Diagnostic Monitor that provides monitor data, debouncing by Dem

▽

△

Number	Heading
[TPS_SWCT_01790]	AtomicSwComponentType implements a Diagnostic Monitor that provides monitor data, debouncing by software-component

Table G.58: Changed Specification Items in R19-11

G.12.3 Deleted Specification Items in R19-11

Number	Heading
[TPS_SWCT_01344]	Consistency of values of timeout
[TPS_SWCT_01429]	[constr_1135] only applies for BITFIELD_TEXTTABLE
[TPS_SWCT_01752]	Initialization of a variable-size array

Table G.59: Deleted Specification Items in R19-11

G.12.4 Added Constraints in R19-11

Number	Heading
[constr_1679]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = signalBasedDiagnostics
[constr_1680]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = AppModeRequestInterface
[constr_1681]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = VerificationStatus
[constr_1682]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xFacVdp
[constr_1683]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationCam
[constr_1684]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationMapem
[constr_1685]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationIvim
[constr_1686]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationSpatem
[constr_1694]	Allowed target of SwDataDefProps.implementationDataType
[constr_1706]	Definition of initial value for data transmission

▽

△

Number	Heading
[constr_1712]	Existence of attribute ArrayValueSpecification.intendedPartial-InitializationCount
[constr_1713]	NvBlockDescriptor.writingStrategyRole.usedDataElement shall refer to AutosarDataPrototype
[constr_1714]	AutosarDataPrototype shall only be referenced by a single NvBlock-Descriptor.writingStrategyRole
[constr_1715]	Possible values of attribute NvBlockDescriptor.writingStrategyRole.role
[constr_1716]	Consistency of attribute NvBlockDescriptor.writingStrategyRole.role set to storeAtShutdown
[constr_1717]	Consistency of attribute NvBlockDescriptor.writingStrategyRole.role set to storeImmediate
[constr_1718]	Inheritance of SwDataDefProps.dataConstr from an array data type to the array elements
[constr_1719]	Inheritance of SwDataDefProps.displayFormat from an array data type to the array elements
[constr_1720]	Inheritance of SwDataDefProps.stepSize from an array data type to the array elements
[constr_1724]	Usage of attribute ClientServerOperation.diagArgIntegrity
[constr_1726]	Ordering of MetaDataItemSet.metaDataItem
[constr_1735]	Limitation of the aggregation of AutosarVariableRef in the context of an NvBlockDataMapping owned by a BulkNvDataDescriptor
[constr_1741]	Restriction to explicit sending semantics for the usage of DataServices in the context of a SwcServiceDependency that aggregates DiagnosticValueNeeds that in turn is referenced by a DiagnosticIoControlNeeds

Table G.60: Added Constraints in R19-11

G.12.5 Changed Constraints in R19-11

Number	Heading
[constr_1051]	Compatibility of SwDataDefProps
[constr_1059]	Compatibility of data types with category VALUE
[constr_1060]	Compatibility of data types with category ARRAY, VAL_BLK
[constr_1061]	Compatibility of data types with category STRUCTURE
[constr_1063]	Compatibility of data types with category BOOLEAN
[constr_1064]	Compatibility of data types with category COM_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, or CUBE_5
[constr_1078]	Compatibility of ClientServerOperations
[constr_1137]	Applicability of ParameterInterface
[constr_1273]	Rules for the initialization of ApplicationArrayDataType by means of Array-ValueSpecification

▽

△

Number	Heading
[constr_1274]	Rules for the initialization of array-shaped ImplementationDataType by means of ArrayValueSpecification
[constr_1607]	Only Wrapped Union Data Types in PortInterface
[constr_1662]	Compatibility of ApplicationRecordDataType and ImplementationDataType that both represent an Optional Element Structure
[constr_2000]	Compatibility of ClientServerOperations triggering the same RunnableEntity
[constr_2013]	Compatibility of ImplementationDataTypes for NvBlockDataMapping

Table G.61: Changed Constraints in R19-11

G.12.6 Deleted Constraints in R19-11

none

G.13 Traceable item history of this document according to AUTOSAR Release R20-11

G.13.1 Added Specification Items in R20-11

Number	Heading
[TPS_SWCT_01808]	Dem Service Use Case: software-component checks whether an event is suppressed
[TPS_SWCT_01809]	J1939Dcm wants to retrieve calibration verification numbers from an application software-component
[TPS_SWCT_01810]	Software-component analyzes predictions about the time synchronization process
[TPS_SWCT_01811]	AtomicSwComponentType reads the current PNC ComM mode
[TPS_SWCT_01812]	Conditional relevance of attribute EndToEndTransformationComSpecProps.disableEndToEndStateMachine
[TPS_SWCT_01813]	Software-Component wants check a certificate on KeyM
[TPS_SWCT_01814]	AtomicSwComponentType wants to retrieve a certificate from KeyM
[TPS_SWCT_01815]	AtomicSwComponentType wants to retrieve elements of a certificate from KeyM
[TPS_SWCT_01816]	AtomicSwComponentType wants to check the existence of a certificate from KeyM
[TPS_SWCT_01817]	AtomicSwComponentType wants to store a (derived) key in KeyM
[TPS_SWCT_01818]	AtomicSwComponentType wants to store a container with encrypted keys (e.g. She-keys) in KeyM

▽

△

Number	Heading
[TPS_SWCT_01819]	AtomicSwComponentType wants to verify if cryptographic operation was executed using a specific key
[TPS_SWCT_01820]	Existence of attribute SenderComSpec.handleOutOfRange
[TPS_SWCT_01821]	Semantics of attribute NotAvailableValueSpecification.defaultPattern
[TPS_SWCT_01822]	Application of attribute NotAvailableValueSpecification.defaultPattern happens only during initialization
[TPS_SWCT_01823]	Definition of ValueSpecification for an ApplicationRecordDataType with unavailable optional elements
[TPS_SWCT_01826]	Application Software Component reports security event
[TPS_SWCT_01827]	Suffix used for the resulting name of the PortInterface for the IdsM Services
[TPS_SWCT_01828]	Application Software Component reports security event using Smart Sensor API
[TPS_SWCT_01829]	Suffix used for the resulting name of the PortInterface for the IdsM Services
[TPS_SWCT_01830]	Application Software Component provides time stamp to IdsM

Table G.62: Added Specification Items in R20-11

G.13.2 Changed Specification Items in R20-11

Number	Heading
[TPS_SWCT_01004]	Specific default value if serviceKind is not defined
[TPS_SWCT_01078]	Configurable array size
[TPS_SWCT_01178]	Specialized subclasses of ValueSpecification
[TPS_SWCT_01221]	DataFilter
[TPS_SWCT_01495]	Standardized value of RuleBasedValueSpecification.rule
[TPS_SWCT_01642]	Definition of an “old-world” dynamic-size array data type by means of an ImplementationDataType
[TPS_SWCT_01673]	Application Software Component sends requests using the J1939Rm
[TPS_SWCT_01674]	Application Software Component accepts requests using the J1939Rm
[TPS_SWCT_02003]	AtomicSwComponentType offers PortPrototypes typed by SenderReceiverInterfaces or NvDataInterfaces to read/write current values via diagnostic services
[TPS_SWCT_02052]	Definition of Rapid Prototyping Scenario is splittable

Table G.63: Changed Specification Items in R20-11

G.13.3 Deleted Specification Items in R20-11

Number	Heading
[TPS_SWCT_01039]	Purpose of variant handling
[TPS_SWCT_01510]	The role of pretended networking
[TPS_SWCT_01511]	Configuration option is encoded into ModeDeclaration
[TPS_SWCT_01512]	Request change of Pretended Networking mode
[TPS_SWCT_01513]	React on the change of Pretended Networking mode

Table G.64: Deleted Specification Items in R20-11

G.13.4 Added Constraints in R20-11

Number	Heading
[constr_1754]	Aggregation of NumericalRuleBasedValueSpecification
[constr_1755]	Aggregation of CompositeRuleBasedValueSpecification
[constr_1771]	Existence of SwValueCont.unit
[constr_1773]	Value of attribute dataSendPoint.returnValueProvision
[constr_1774]	Value of attribute dataReceivePointByArgument.returnValueProvision
[constr_1775]	Value of attribute serverCallPoint.returnValueProvision
[constr_1776]	Value of attribute asynchronousServerCallResultPoint.returnValue-Provision
[constr_1777]	Value of attribute externalTriggeringPoint.returnValueProvision
[constr_1778]	Value of attribute modeSwitchPoint.returnValueProvision
[constr_1779]	Scope of the definition of an AbstractRuleBasedValueSpecification
[constr_1783]	Existence of attribute ImplementationDataTypeElement.arrayImplPolicy
[constr_1860]	Multiplicity of DelegationSwConnector.innerPort
[constr_1861]	Multiplicity of DelegationSwConnector.outerPort
[constr_1862]	Multiplicity of PassThroughSwConnector.requiredOuterPort
[constr_1863]	Multiplicity of PassThroughSwConnector.providedOuterPort
[constr_1864]	Multiplicity of InstantiationRTEEventProps.refinedEvent
[constr_1865]	Existence of InvalidationPolicy.dataElement
[constr_1866]	Existence of MetaDataItem.length
[constr_1867]	Existence of MetaDataItem.metaDataItemType
[constr_1868]	Existence of MetaDataItemSet.dataElement
[constr_1869]	Existence of attribute ArgumentDataPrototype.direction
[constr_1870]	Existence of attribute ApplicationError.errorCode
[constr_1871]	Existence of attribute ModeRequestTypeMap.implementationDataType
[constr_1872]	Existence of attribute ModeRequestTypeMap.modeGroup
[constr_1873]	Existence of DataPrototypeMapping.firstDataPrototype



△

Number	Heading
[constr_1874]	Existence of DataPrototypeMapping.secondDataPrototype
[constr_1875]	Existence of reference ClientServerOperationMapping.firstOperation
[constr_1876]	Existence of reference ClientServerOperationMapping.secondOperation
[constr_1877]	Existence of reference ModeDeclarationGroupPrototypeMapping.first-ModeGroup
[constr_1878]	Existence of reference ModeDeclarationGroupPrototypeMapping.second-ModeGroup
[constr_1879]	Existence of reference ModeDeclarationMapping.firstMode
[constr_1880]	Existence of reference ModeDeclarationMapping.secondMode
[constr_1881]	Existence of reference TriggerMapping.firstTrigger
[constr_1882]	Existence of reference TriggerMapping.secondTrigger
[constr_1883]	Existence of ApplicationCompositeDataTypeSubElement-Ref.applicationCompositeElement
[constr_1884]	Existence of attribute TextTableMapping.identicalMapping
[constr_1885]	Existence of attribute TextTableMapping.mappingDirection
[constr_1886]	Existence of attribute TextTableValuePair.firstValue
[constr_1887]	Existence of attribute TextTableValuePair.secondValue
[constr_1888]	Existence of attribute DataTransformation.executeDespiteData-Unavailability
[constr_1889]	Existence of attribute QueuedReceiverComSpec.queueLength
[constr_1890]	Existence of attribute DataFilter.dataFilterType
[constr_1891]	Existence of attribute NonqueuedReceiverComSpec.initValue
[constr_1892]	Existence of attribute TransmissionAcknowledgementRequest.timeout
[constr_1893]	Existence of attribute ServerComSpec.queueLength
[constr_1894]	Existence of attribute ModeSwitchSenderComSpec.queueLength
[constr_1895]	Existence of attribute ModeSwitchSenderComSpec.modeGroup
[constr_1896]	Existence of attribute ModeSwitchReceiverComSpec.modeGroup
[constr_1897]	Existence of reference ParameterProvideComSpec.parameter
[constr_1898]	Existence of reference ParameterRequireComSpec.parameter
[constr_1899]	Existence of reference NvRequireComSpec.variable
[constr_1900]	Existence of reference NvProvideComSpec.variable
[constr_1901]	Existence of attribute EndToEndDescription.category
[constr_1902]	Existence of attribute EndToEndProtection.endToEndProfile
[constr_1903]	Existence of reference DataTypeMap.applicationDataType
[constr_1904]	Existence of reference DataTypeMap.implementationDataType
[constr_1905]	Existence of attribute SwTextProps.arraySizeSemantics
[constr_1906]	Existence of attribute SwTextProps.swMaxTextSize
[constr_1907]	Existence of attribute ApplicationArrayDataType.element
[constr_1908]	Existence of attribute ApplicationRecordDataType.element
[constr_1909]	Existence of attribute ImplementationProps.symbol

▽

△

Number	Heading
[constr_1910]	Existence of attribute BaseType.baseTypeDefinition
[constr_1911]	Existence of ArVariableInImplementationDataInstanceRef.target-DataPrototype
[constr_1912]	Existence of reference ArParameterInImplementationDataInstance-Ref.targetDataPrototype
[constr_1913]	Existence of attribute CompuRationalCoeffs.compuDenominator
[constr_1914]	Existence of attribute CompuRationalCoeffs.compuNumerator
[constr_1915]	Existence of attribute PhysicalDimensionMapping.firstPhysical-Dimension
[constr_1916]	Existence of attribute PhysicalDimensionMapping.secondPhysical-Dimension
[constr_1917]	Existence of ConstantSpecification.valueSpec
[constr_1918]	Existence of RecordValueSpecification.field
[constr_1919]	Existence of TextValueSpecification.value
[constr_1920]	Existence of NumericalValueSpecification.value
[constr_1921]	Existence of ReferenceValueSpecification.referenceValue
[constr_1922]	Existence of ApplicationRuleBasedValueSpecification.category
[constr_1923]	Existence of RuleBasedAxisCont.ruleBasedValues
[constr_1924]	Existence of RuleBasedValueCont.ruleBasedValues
[constr_1925]	Existence of NumericalRuleBasedValueSpecification.ruleBasedValues
[constr_1926]	Existence of RuleBasedValueSpecification.rule
[constr_1927]	Existence of RuleBasedValueSpecification.arguments
[constr_1928]	Existence of CompositeRuleBasedValueSpecification.rule
[constr_1929]	Existence of CompositeRuleBasedValueSpecification.argument
[constr_1930]	Existence of ConstantReference.constant
[constr_1931]	Existence of ConstantSpecificationMapping.applConstant
[constr_1932]	Existence of ConstantSpecificationMapping.implConstant
[constr_1933]	Existence of CalibrationParameterValue.initializedParameter
[constr_1934]	Existence of attribute SwcInternalBehavior.handleTerminationAn-dRestart
[constr_1935]	Existence of attribute SwcInternalBehavior.supportsMultiple-Instantiation
[constr_1936]	Existence of attribute RunnableEntity.symbol
[constr_1937]	Existence of attribute TimingEvent.period
[constr_1938]	Existence of attribute RunnableEntityArgument.symbol
[constr_1939]	Existence of attribute ExecutableEntityActivationReason.bitPosition
[constr_1940]	Existence of attribute AsynchronousServerCallReturnsEvent.eventSource
[constr_1941]	Existence of attribute DataSendCompletedEvent.eventSource
[constr_1942]	Existence of attribute DataWriteCompletedEvent.eventSource
[constr_1943]	Existence of attribute DataReceivedEvent.data
[constr_1944]	Existence of attribute DataReceiveErrorEvent.data

▽

△

Number	Heading
[constr_1945]	Existence of attribute OperationInvokedEvent.operation
[constr_1946]	Existence of attribute SwcModeSwitchEvent.activation
[constr_1947]	Existence of reference SwcModeSwitchEvent.mode
[constr_1948]	Existence of attribute ModeSwitchedAckEvent.eventSource
[constr_1949]	Existence of attribute ExternalTriggerOccurredEvent.trigger
[constr_1950]	Existence of attribute InternalTriggerOccurredEvent.eventSource
[constr_1951]	Existence of attribute WaitPoint.timeout
[constr_1952]	Existence of reference WaitPoint.trigger
[constr_1953]	Existence of attribute SwcExclusiveAreaPolicy.apiPrinciple
[constr_1954]	Existence of attribute VariableAccess.accessedVariable
[constr_1955]	Existence of attribute ServerCallPoint.operation
[constr_1956]	Existence of attribute ServerCallPoint.timeout
[constr_1957]	Existence of attribute AsynchronousServerCallResultPoint.asynchronous-ServerCallPoint
[constr_1958]	Existence of attribute ParameterAccess.accessedParameter
[constr_1959]	Existence of attribute InstantiationDataDefProps.swDataDefProps
[constr_1960]	Existence of attribute PortAPIOption.port
[constr_1961]	Existence of attribute PortDefinedArgumentValue.value
[constr_1962]	Existence of attribute PortDefinedArgumentValue.valueType
[constr_1963]	Existence of attribute CommunicationBufferLocking.supportBuffer-Locking
[constr_1964]	Existence of attribute PerInstanceMemory.type
[constr_1965]	Existence of attribute PerInstanceMemory.typeDefinition
[constr_1966]	Existence of attribute Implementation.swVersion
[constr_1967]	Existence of attribute Implementation.vendorId
[constr_1968]	Existence of attribute Implementation.codeDescriptor
[constr_1969]	Existence of attribute SwcImplementation.behavior
[constr_1970]	Existence of attribute PerInstanceMemorySize.alignment
[constr_1971]	Existence of attribute PerInstanceMemorySize.perInstanceMemory
[constr_1972]	Existence of attribute PerInstanceMemorySize.size
[constr_1973]	Existence of attribute ModeDeclarationGroup.initialMode
[constr_1974]	Existence of attribute ModeDeclarationGroup.modeDeclaration
[constr_1975]	Existence of attribute ModeTransition.enteredMode
[constr_1976]	Existence of attribute ModeTransition.exitedMode
[constr_1977]	Existence of attribute ModeErrorBehavior.errorReactionPolicy
[constr_1978]	Existence of attribute SwcModeManagerErrorEvent.modeGroup
[constr_1979]	Existence of the reference SwcBswMapping.bswBehavior
[constr_1980]	Existence of the reference SwcBswMapping.swcBehavior
[constr_1981]	Existence of attribute NvBlockDescriptor.nvBlockNeeds
[constr_1982]	Existence of attribute ModeSwitchEventTriggeredActivity.role

▽

△

Number	Heading
[constr_1983]	Existence of attribute ModeSwitchEventTriggeredActivity.swcModeSwitchEvent
[constr_1984]	Existence of instance reference NvBlockDataMapping.nvRamBlockElement
[constr_1985]	Existence of the reference SupervisedEntityNeeds.toleratedFailedCycles
[constr_1986]	Existence of the reference DiagnosticRoutineNeeds.diagRoutineType
[constr_1987]	Existence of instance reference RapidPrototypingScenario.hostSystem
[constr_1988]	Existence of attribute RptProfile.maxServicePointId
[constr_1989]	Existence of attribute RptProfile.minServicePointId
[constr_1990]	Existence of attribute RptProfile.servicePointSymbolPost
[constr_1991]	Existence of attribute RptProfile.servicePointSymbolPre
[constr_1992]	Existence of attribute RptProfile.stimEnabler
[constr_1993]	Existence of attribute RptImplPolicy.rptEnablerImplType
[constr_1994]	Existence of attribute RptImplPolicy.rptPreparationLevel
[constr_1995]	Existence of attribute RptSwPrototypingAccess.rptHookAccess
[constr_1996]	Existence of attribute RptSwPrototypingAccess.rptReadAccess
[constr_1997]	Existence of attribute RptSwPrototypingAccess.rptWriteAccess
[constr_1998]	Existence of attribute RptExecutableEntityProperties.maxRptEventId
[constr_1999]	Existence of attribute RptExecutableEntityProperties.minRptEventId
[constr_5234]	Existence of attribute E2EProfileCompatibilityProps.transitToInvalidExtended is mandatory for each EndToEndTransformationComSpecProps
[constr_10000]	Existence of attribute RptExecutableEntityProperties.rptExecutionControl
[constr_10001]	Existence of attribute RptExecutableEntityProperties.rptServicePoint
[constr_10005]	Existence of attribute NotAvailableValueSpecification.defaultPattern
[constr_10006]	Valid interval of attribute NotAvailableValueSpecification.defaultPattern
[constr_10009]	Aggregation of ApplicationRuleBasedValueSpecification
[constr_10016]	Applicability of OsTaskExecutionEvent
[constr_10017]	Existence of attribute SwAxisCont.category
[constr_10018]	Existence of attribute SwAxisCont.swAxisIndex
[constr_10019]	Existence of attribute SwAxisCont.swValuesPhys
[constr_10020]	Existence of attribute RoleBasedDataTypeAssignment.usedImplementationDataType
[constr_10028]	Existence of reference stereotyped ≪isOfType≫

Table G.65: Added Constraints in R20-11

G.13.5 Changed Constraints in R20-11

Number	Heading
[constr_1051]	Compatibility of SwDataDefProps
[constr_1060]	Compatibility of data types with category ARRAY, VAL_BLK
[constr_1066]	Forbidden mappings to ImplementationDataType
[constr_1197]	Existence of compositeNetworkRepresentation shall be comprehensive
[constr_1224]	DataPrototype is typed by an ApplicationArrayDataType
[constr_1289]	Allowed Attributes vs. category for DataPrototypes typed by ApplicationDataTypes
[constr_1296]	DataPrototypes used as explicitInterRunnableVariable or implicitInterRunnableVariable and category DATA_REFERENCE
[constr_1393]	Existence of RuleBasedValueCont.unit
[constr_1397]	Existence of attributes of TransformerHardErrorEvent
[constr_1422]	Value of category is VOID
[constr_1741]	Restriction to explicit sending semantics for the usage of DataServices in the context of a SwcServiceDependency that aggregates DiagnosticValueNeeds that in turn is referenced by a DiagnosticIoControlNeeds
[constr_2000]	Compatibility of ClientServerOperations triggering the same RunnableEntity
[constr_2034]	SwAddrMethod referenced by RunnableEntitys, BswCalledEntitys, or BswSchedulableEntitys
[constr_2052]	Values of swArraysize and the number of values provided by swValuesPhys shall be consistent.
[constr_2058]	Mandatory information of a RuleBasedValueCont

Table G.66: Changed Constraints in R20-11

G.13.6 Deleted Constraints in R20-11

none

G.14 Traceable item history of this document according to AUTOSAR Release R21-11

G.14.1 Added Specification Items in R21-11

Number	Heading
[TPS_SWCT_01831]	Dcm can directly access SenderReceiverInterface.dataElements or NvDataInterface.nvDatas in AbstractRequiredPortPrototypes
[TPS_SWCT_01832]	SecOc Use Case: Receive notification about an authentication attempt



△

Number	Heading
[TPS_SWCT_01833]	Semantics of ServiceDependency.diagnosticRelevance
[TPS_SWCT_01834]	invalidValue is inside the scope of the compuMethod
[TPS_SWCT_01835]	invalidValue is outside the scope of the compuMethod
[TPS_SWCT_01836]	Attributes of CompositeRuleBasedValueSpecification
[TPS_SWCT_01837]	Types for record layouts
[TPS_SWCT_01838]	ValueSpecification shall fit into data type
[TPS_SWCT_01839]	Size of Compound Primitive Data Type is variant
[TPS_SWCT_01840]	A ParameterSwComponentType references a ConstantSpecificationMappingSet
[TPS_SWCT_01841]	A NvBlockSwComponentType references a ConstantSpecificationMappingSet
[TPS_SWCT_01842]	Applicability of constraints of CompuScales
[TPS_SWCT_01843]	Value of PassThroughSwConnector.category
[TPS_SWCT_01844]	Optional method arguments

Table G.67: Added Specification Items in R21-11

G.14.2 Changed Specification Items in R21-11

Number	Heading
[TPS_SWCT_01049]	Two ways to use the ExclusiveAreas
[TPS_SWCT_01195]	Mapping of composite element to primitive DataPrototype
[TPS_SWCT_01253]	Rules apply for the usage of the attribute ImplementationDataType.typeEmitter
[TPS_SWCT_01314]	RTEEvent
[TPS_SWCT_01551]	Mapping of elements on the “source” end to elements on the “target” end
[TPS_SWCT_01579]	Dcm can directly access SenderReceiverInterface.dataElements, NvDataInterface.nvDatas, or ParameterInterface.parameters in AbstractProvidedPortPrototype
[TPS_SWCT_01580]	Dem can directly access SenderReceiverInterface.dataElements, NvDataInterface.nvDatas, or ParameterInterface.parameters in PPortPrototypes
[TPS_SWCT_01586]	Writing strategies for *nv data*
[TPS_SWCT_01795]	Further specification to facilitate the association of writing strategies to the corresponding RunnableEntity
[TPS_SWCT_02011]	AtomicSwComponentType offers a client port to read DTR value

Table G.68: Changed Specification Items in R21-11

G.14.3 Deleted Specification Items in R21-11

Number	Heading
[TPS_SWCT_01591]	Existence of attribute DiagnosticEventNeeds.reportBehavior
[TPS_SWCT_01697]	Supported development approach for software-components that interact with AUTOSAR services
[TPS_SWCT_01698]	Attributes that are subject to development approach

Table G.69: Deleted Specification Items in R21-11

G.14.4 Added Constraints in R21-11

Number	Heading
[constr_10032]	Restrictions for the usage of ServiceDependency.diagnosticRelevance
[constr_10033]	Existence of MemorySection.swAddrmethod
[constr_10034]	Existence of MemorySection.alignment
[constr_10040]	Value of ApplicationValueSpecification.swAxisCont.category
[constr_10041]	Value of ApplicationRuleBasedValueSpecification.swAxisCont.category
[constr_10067]	Creation of AssemblySwConnector for service communication
[constr_10068]	Standardized values for SectionInitializationPolicyType
[constr_10071]	Allowed multiplicities of SenderComSpec attributes for communication between ApplicationSwComponentType and NvBlockSwComponentType
[constr_10072]	Allowed multiplicities of SenderComSpec attributes for communication between NvBlockSwComponentType and ApplicationSwComponentType
[constr_10073]	Existence of DataReceiveErrorEvent
[constr_10074]	Consistency of attribute NvBlockDescriptor.writingStrategy.role set to storeOnChange
[constr_10075]	Existence of CompositeRuleBasedValueSpecification.argument vs. compoundPrimitiveArgument
[constr_10087]	Restriction for the existence of a SubElementMapping

Table G.70: Added Constraints in R21-11

G.14.5 Changed Constraints in R21-11

Number	Heading
[constr_1004]	Mapping of ApplicationDataTypes in the scope of single AtomicSwComponentTypes
[constr_1005]	Compatibility of ImplementationDataTypes mapped to the same ApplicationDataType

▽

△

Number	Heading
[constr_1006]	applicable data categories
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1009]	SwDataDefProps applicable to ImplementationDataTypes
[constr_1010]	If nativeDeclaration does not exist
[constr_1011]	category of SwBaseType
[constr_1012]	Value of category is FIXED_LENGTH
[constr_1014]	Supported value encodings for SwBaseType
[constr_1015]	Prioritization of SwDataDefProps
[constr_1016]	Restriction of invalidValue for ImplementationDataType and ImplementationDataTypeElement
[constr_1017]	Supported combinations of swImplPolicy and swCalibrationAccess
[constr_1018]	measurementPoint shall not be referenced by a VariableAccess aggregated by RunnableEntity in the role dataReadAccess
[constr_1020]	ParameterDataPrototype needs to be of compatible data type as referenced in sharedAxisType
[constr_1022]	Limits shall be defined for each direction of CompuMethod
[constr_1024]	Stepwise definition of CompuMethods
[constr_1025]	Avoid division by zero in rational formula
[constr_1026]	Compatibility of Units
[constr_1029]	ConstantSpecificationMapping and ConstantSpecification
[constr_1033]	Communication scenarios for sender/receiver communication
[constr_1035]	Recursive definition of CompositionSwComponentType
[constr_1036]	Connect kinds of PortInterfaces
[constr_1037]	Client shall not be connected to multiple servers
[constr_1038]	Reference to ApplicationError
[constr_1039]	Relevance of swImplPolicy
[constr_1040]	Conversion of SenderReceiverInterfaces
[constr_1041]	Conversion of ClientServerInterfaces
[constr_1043]	PortInterface vs. ComSpec
[constr_1044]	Applicability of DataFilter
[constr_1045]	Supported value encodings for SwBaseType in the context of PortInterfaces
[constr_1046]	Applicability of [constr_1045]
[constr_1047]	Compatibility of ApplicationPrimitiveDataTypes
[constr_1048]	Compatibility of ApplicationRecordDataTypes
[constr_1049]	Compatibility of ApplicationArrayDataTypes
[constr_1050]	Compatibility of ImplementationDataTypes
[constr_1051]	Compatibility of SwDataDefProps
[constr_1052]	Compatibility of Units
[constr_1053]	Compatibility of PhysicalDimensions

▽

△

Number	Heading
[constr_1054]	No DataConstr available at the provider
[constr_1055]	ImplementationDataType has category VALUE
[constr_1056]	ImplementationDataType has category TYPE_REFERENCE
[constr_1057]	ImplementationDataType has category DATA_REFERENCE
[constr_1058]	ImplementationDataType has category FUNCTION_REFERENCE
[constr_1059]	Compatibility of data types with category VALUE
[constr_1060]	Compatibility of data types with category ARRAY, VAL_BLK
[constr_1061]	Compatibility of data types with category STRUCTURE
[constr_1063]	Compatibility of data types with category BOOLEAN
[constr_1064]	Compatibility of data types with category COM_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, or CUBE_5
[constr_1066]	Forbidden mappings to ImplementationDataType
[constr_1068]	Compatibility of VariableDataPrototypes or ParameterDataPrototypes typed by primitive data types
[constr_1069]	Compatibility of PortPrototypes of different DataInterfaces in the context of AssemblySwConnectors
[constr_1070]	Compatibility of PortPrototypes of different DataInterfaces in the context of DelegationSwConnectors
[constr_1071]	compatibility of ParameterDataPrototype and VariableDataPrototype
[constr_1072]	Compatibility of ModeSwitchInterfaces in the context of an AssemblySwConnector
[constr_1073]	Compatibility of ModeSwitchInterfaces in the context of an DelegationSwConnector
[constr_1074]	Compatibility of ModeDeclarationGroupPrototypes
[constr_1075]	Compatibility of ModeDeclarationGroups
[constr_1076]	Compatibility of ArgumentDataPrototypes
[constr_1077]	Compatibility of ApplicationErrors
[constr_1078]	Compatibility of ClientServerOperations
[constr_1079]	Compatibility of ClientServerInterfaces in the context of an AssemblySwConnector
[constr_1080]	Compatibility of ClientServerInterfaces in the context of an DelegationSwConnector
[constr_1081]	Compatibility of TriggerInterfaces in the context of an AssemblySwConnector
[constr_1082]	Compatibility of TriggerInterfaces in the context of an DelegationSwConnector
[constr_1083]	Compatibility of Triggers
[constr_1084]	delegation of a provided outer PortPrototype
[constr_1086]	SwConnector between two specific PortPrototypes
[constr_1087]	AssemblySwConnector inside CompositionSwComponentType
[constr_1088]	DelegationSwConnector inside CompositionSwComponentType

▽

△

Number	Heading
[constr_1092]	ParameterSwComponentType
[constr_1093]	Definition of textual strings
[constr_1095]	Values of nDataSets vs. reliability
[constr_1096]	SwcModeSwitchEvent and WaitPoint
[constr_1097]	RunnableEntity that has a WaitPoint
[constr_1098]	Mode switch and mode disabling
[constr_1100]	Unconnected RPortPrototype typed by a DataInterface
[constr_1101]	Mode-related communication
[constr_1102]	ApplicationError in the scope of one SwComponentType
[constr_1103]	NonqueuedReceiverComSpec and enableUpdate
[constr_1104]	Trigger sink and trigger source
[constr_1105]	Value of arraySize
[constr_1106]	Structure shall have at least one element
[constr_1107]	Union shall have at least one element
[constr_1108]	Value of ApplicationError.errorCode
[constr_1109]	Mapping of SwComponentPrototypes typed by a SensorActuatorSwComponentType
[constr_1111]	Constraints of dataId in PROFILE_01
[constr_1112]	Constraints of dataIdMode in PROFILE_01
[constr_1113]	Existence of attributes in PROFILE_01
[constr_1114]	Constraints of crcOffset in PROFILE_01
[constr_1115]	Constraints of counterOffset in PROFILE_01
[constr_1116]	Constraints of dataLength in PROFILE_01
[constr_1117]	Constraints of maxDeltaCounterInit in PROFILE_01
[constr_1118]	Existence of attributes in PROFILE_02
[constr_1119]	Constraints of dataLength in PROFILE_02
[constr_1120]	Constraints of dataId in PROFILE_02
[constr_1121]	Constraints of maxDeltaCounterInit in PROFILE_02
[constr_1126]	Compatibility of DataConstrs
[constr_1128]	Queue length of ClientServerOperations associated with the same RunnableEntity
[constr_1129]	swImplPolicy and NonqueuedReceiverComSpec
[constr_1130]	swImplPolicy and QueuedReceiverComSpec
[constr_1131]	swImplPolicy and NonqueuedSenderComSpec
[constr_1132]	swImplPolicy and QueuedSenderComSpec
[constr_1134]	Allowed structure of TEXTTABLE
[constr_1135]	Limit of vt in BITFIELD_TEXTTABLE
[constr_1137]	Applicability of ParameterInterface
[constr_1138]	assignedPort and DiagEventDebounceMonitorInternal

▽

△

Number	Heading
[constr_1139]	assignedPort of DiagEventDebounceMonitorInternal shall refer to an RPortPrototype
[constr_1140]	Combination of invalidValue with the attribute handleInvalid
[constr_1141]	Applicability of the scope attribute
[constr_1142]	category of CompuMethod shall not be extended
[constr_1144]	SensorActuatorSwComponentType, EcuAbstractionSwComponentType, and ComplexDeviceDriverSwComponentType may only reference a HwType
[constr_1146]	Applicability of a symbol for a CompuScale in C code
[constr_1147]	Standardized values for the attribute category of meta-class PortGroup
[constr_1148]	PortInterfaces of PortPrototypes used to connect to NvBlockSwComponentTypes
[constr_1149]	PortPrototypes used for NV data management
[constr_1150]	Usage of valueType for PortDefinedArgumentValue
[constr_1151]	Applicability of PortInterfaceMapping
[constr_1153]	Applicability of compatibility requirements for CompuScales
[constr_1154]	Compatibility of CompuScales for sender-receiver communication and similar use cases
[constr_1155]	Compatibility of CompuScales for client-server communication
[constr_1156]	Relevance of “names” of CompuScales
[constr_1158]	Applicable categorys for attribute ImplementationDataType.swDataDefProps.compuMethod
[constr_1159]	Consistency of VariableAndParameterInterfaceMapping with respect to the referenced DataInterfaces
[constr_1161]	Applicability of the attribute Ref.index
[constr_1162]	Compatibility of SwRecordLayouts
[constr_1163]	Compatibility of CompuMethods
[constr_1164]	Number of arguments owned by a RunnableEntity
[constr_1165]	Applicability of RunnableEntityArgument
[constr_1166]	Restrictions of ModeRequestTypeMap
[constr_1167]	ImplementationDataTypes used as ModeRequestTypeMap.implementationDataType
[constr_1168]	Compatibility of ImplementationDataTypes used in the ModeRequestTypeMap
[constr_1169]	Allowed values for Trigger.swImplPolicy
[constr_1172]	Allowed values of SwCalibrationAccessEnum for ModeDeclarationGroupPrototype
[constr_1173]	Applicability of AutosarParameterRef referencing a VariableDataPrototype
[constr_1174]	PortInterfaces used in the context of CompositionSwComponentTypes cannot refer to AUTOSAR services
[constr_1175]	Depending on its category, CompuMethod shall refer to a unit
[constr_1176]	Compatibility of CompuScales of category LINEAR and RAT_FUNC
[constr_1177]	Allowed targetCategory for SwPointerTargetProps

▽

△

Number	Heading
[constr_1178]	Existence of attributes of SwDataDefProps in the context of ImplementationDataType
[constr_1181]	Numerical values used in ModeDeclaration.value and ModeDeclarationGroup.onTransitionValue
[constr_1182]	Allowed values for InternalTriggeringPoint.swImplPolicy
[constr_1183]	EndToEndProtectionVariablePrototypes aggregated by EndToEndProtection
[constr_1184]	Consistency of rootDataPrototype and base in the context of ApplicationCompositeElementInPortInterfaceInstanceRef
[constr_1185]	Consistency of data types in the context of ApplicationCompositeElementInPortInterfaceInstanceRef
[constr_1186]	Consistency of data types in the context of ArVariableInImplementationDataInstanceRef
[constr_1187]	Compatibility of VariableDataPrototypes or ParameterDataPrototypes typed by composite data types
[constr_1188]	Existence of ReceiverComSpec.replaceWith
[constr_1191]	Value of Limit shall yield a numerical value
[constr_1192]	Compatibility of "IDENTICAL" to "RAT_FUNC" or "LINEAR"
[constr_1193]	ModeDeclaration shall be referenced by at least one ModeTransition in the role enteredMode
[constr_1194]	Identical ModeTransitions
[constr_1195]	SwcModeSwitchEvent and the definition of ModeTransition
[constr_1196]	Existence of networkRepresentation vs. compositeNetworkRepresentation
[constr_1197]	Existence of compositeNetworkRepresentation shall be comprehensive
[constr_1200]	Queued communication is not applicable for dataElements owned by PRPortPrototype
[constr_1202]	Supported connections by AssemblySwConnector for PortPrototypes typed by a SenderReceiverInterface or NvDataInterface
[constr_1203]	Supported connections by DelegationSwConnector for PortPrototypes typed by a SenderReceiverInterface or NvDataInterface
[constr_1204]	Supported connections by AssemblySwConnector for PortPrototypes typed by a ClientServerInterface, ModeSwitchInterface, or TriggerInterface
[constr_1205]	Supported connections by DelegationSwConnector for PortPrototypes typed by a ClientServerInterface, ModeSwitchInterface, or TriggerInterface
[constr_1209]	Mapping of ModeDeclarations of mode user to ModeDeclaration of mode manager
[constr_1210]	Mapping of ModeDeclarations of mode user to **all** ModeDeclarations of mode manager
[constr_1211]	Constraints of maxNoNewOrRepeatedData in PROFILE_01
[constr_1212]	Constraints of syncCounterInit in PROFILE_01

▽

△

Number	Heading
[constr_1213]	Constraints of maxNoNewOrRepeatedData in PROFILE_02
[constr_1214]	Constraints of syncCounterInit in PROFILE_02
[constr_1219]	Invalidation depends on the value of swImplPolicy
[constr_1220]	Compatibility of SwBaseType
[constr_1221]	DataPrototype is typed by an ApplicationPrimitiveDataType
[constr_1222]	category of an AutosarDataType used to type a DataPrototype is set to STRING
[constr_1223]	DataPrototype is typed by an ApplicationRecordDataType
[constr_1224]	DataPrototype is typed by an ApplicationArrayDataType
[constr_1225]	DataPrototype is typed by an ImplementationDataType that references a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE
[constr_1226]	Applicable range for ExecutableEntityActivationReason.bitPosition
[constr_1227]	Value of attribute ExecutableEntityActivationReason.bitPosition shall be unique
[constr_1228]	RTEEvent that is referenced by a WaitPoint in the role trigger shall not reference ExecutableEntityActivationReason
[constr_1229]	category of ImplementationDataType boils down to VALUE
[constr_1230]	ApplicationDataType that qualifies for Integral Primitive Type
[constr_1231]	ConsistencyNeeds aggregated by CompositionSwComponentType
[constr_1232]	ConsistencyNeeds aggregated by AtomicSwComponentType
[constr_1233]	InstantiationTimingEventProps shall only reference TimingEvent
[constr_1234]	Value of RunnableEntity.symbol
[constr_1237]	Scope of mapped ClientServerOperations in the context of a ClientServerOperationMapping
[constr_1238]	Scope of mapped ApplicationErrors in the context of a ClientServerOperationMapping
[constr_1240]	Consistency of ArgumentDataPrototypes within the context of a ClientServerOperationMapping
[constr_1241]	Compound Primitive Data Types and invalidValue
[constr_1242]	Restriction of invalidValue for ApplicationPrimitiveDataType of category STRING
[constr_1243]	NumericalOrText shall either define vf or vt
[constr_1244]	DataPrototypes used in application software shall not be typed by C enums
[constr_1245]	Consideration of ModeTransitions for the compatibility of ModeDeclarationGroups
[constr_1246]	Consistency of firstMode and secondMode in the scope of one ModeDeclarationMappingSet
[constr_1247]	Consistency of ModeDeclarationMappingSet with respect to the referenced firstModeGroup and secondModeGroup
[constr_1248]	Compatibility of PortPrototypes of different DataInterfaces in the context of a PassThroughSwConnector

▽

△

Number	Heading
[constr_1249]	Compatibility of ModeSwitchInterfaces in the context of a PassThroughSwConnector
[constr_1250]	Compatibility of ClientServerInterfaces in the context of a PassThroughSwConnector
[constr_1251]	Compatibility of PortPrototypes of TriggerInterfaces in the context of a PassThroughSwConnector
[constr_1252]	Creation of a loop involving a PassThroughSwConnector is not allowed
[constr_1253]	Supported usage of VariationPointProxy
[constr_1254]	Definition of a pointer to a pointer
[constr_1255]	ApplicationPrimitiveDataTypes of category BOOLEAN and STRING
[constr_1256]	Acknowledgement feedback in n:1 writer case
[constr_1257]	No WaitPoints allowed
[constr_1258]	Value of minimumStartInterval for RunnableEntitys triggered by an InitEvent
[constr_1259]	Aggregation of AsynchronousServerCallPoint **and** AsynchronousServerCallResultPoint
[constr_1260]	No mode disabling for InitEvents
[constr_1261]	Applicability for EndToEndDescription.dataIdNibbleOffset
[constr_1263]	Existence of ModeErrorBehavior.defaultMode
[constr_1264]	Iteration along output axis is only supported for VALUE and VAL_BLK
[constr_1268]	ArgumentDataPrototype.direction shall be preserved in a ClientServerOperationMapping
[constr_1269]	Number of arguments shall be preserved in a ClientServerOperationMapping
[constr_1270]	ArgumentDataPrototype shall be mapped only once in a ClientServerOperationMapping
[constr_1271]	RecordValueSpecification.fields shall be identical to the number of ApplicationRecordDataType.elements
[constr_1272]	RecordValueSpecification.fields shall be identical to the number of subElements of ImplementationDataType of category STRUCTURE
[constr_1273]	Rules for the initialization of ApplicationArrayDataType by means of ArrayValueSpecification
[constr_1274]	Rules for the initialization of array-shaped ImplementationDataType with a fixed size by means of ArrayValueSpecification
[constr_1277]	SwDataDefProps.swImplPolicy of a VariableDataPrototype referenced by a VariableAccess aggregated in the role dataReceivePointByValue
[constr_1278]	PhysConstrs references a Unit
[constr_1279]	Unmapped elements of ApplicationCompositeDataTypes or ImplementationDataTypes and the attribute swImplPolicy
[constr_1280]	Unmapped dataElement on the “target” end shall have an initValue
[constr_1282]	Restriction concerning the usage of RuleBasedValueSpecification or a ReferenceValueSpecification for the specification of an invalidValue

▽

△

Number	Heading
[constr_1284]	Limitation of the use of TextValueSpecification
[constr_1285]	Applicability of roles vs. PortPrototypes
[constr_1286]	serverArgumentImplPolicy and ArgumentDataPrototype typed by primitive data types
[constr_1287]	Compatibility of SenderReceiverInterfaces with respect to invalidationPolicy
[constr_1288]	Allowed Attributes vs. category for DataPrototypes typed by ImplementationDataTypes
[constr_1289]	Allowed Attributes vs. category for DataPrototypes typed by ApplicationDataTypes
[constr_1290]	Limitation on the number of PPortComSpecs in the context of one PPortPrototype
[constr_1291]	Limitation on the number of RPortComSpecs in the context of one PPortPrototype
[constr_1292]	Limitation on the number of RPortComSpecs/PPortComSpecs in the context of one PRPortPrototype
[constr_1295]	PortInterfaces and category DATA_REFERENCE
[constr_1296]	DataPrototypes used as explicitInterRunnableVariable or implicitInterRunnableVariable and category DATA_REFERENCE
[constr_1298]	Existence of attributes if category of a ModeDeclarationGroup is set to EXPLICIT_ORDER
[constr_1299]	Existence of attributes if category of a ModeDeclarationGroup is set to other than EXPLICIT_ORDER
[constr_1300]	Primitive DataPrototype on the “source” end shall not be mapped to element of a composite data type on the “target” end of the SwConnector
[constr_1301]	Existence of RoleBasedDataTypeAssignment.role vs. RoleBasedDataAssignment.role
[constr_1302]	Restriction of data invalidation
[constr_1303]	Applicability of TextTableMapping depending on the value of CompuMethod.category
[constr_1304]	Existence of attribute bitfieldTextTableMaskFirst
[constr_1305]	Existence of attribute bitfieldTextTableMaskSecond
[constr_1306]	Limitation of TextTableMapping for CompuMethods that have the value of category set to BITFIELD_TEXTTABLE
[constr_1307]	Consistency of values and masks in TextTableMapping
[constr_1308]	Existence of NvBlockNeeds.cyclicWritingPeriod
[constr_1309]	Existence of NvBlockDescriptor.timingEvent
[constr_1310]	Existence of attributes of meta-class NvBlockNeeds
[constr_1311]	Appearance of safety-related possible values of MemorySection.option or SwAddrMethod.option
[constr_1312]	PortPrototypes typed by a ParameterInterface
[constr_1313]	Completeness of TextTableMapping for the values of a given bit mask on the sender side

▽

△

Number	Heading
[constr_1314]	Profile VSA_LINEAR for ApplicationArrayDataType
[constr_1315]	Profile VSA_SQUARE for ApplicationArrayDataType
[constr_1316]	Profile VSA_RECTANGULAR for ApplicationArrayDataType
[constr_1317]	Profile VSA_FULLY_FLEXIBLE for ApplicationArrayDataType
[constr_1318]	Profile VSA_LINEAR for ImplementationDataType
[constr_1319]	Profile VSA_SQUARE for ImplementationDataType
[constr_1320]	Profile VSA_RECTANGULAR for ImplementationDataType
[constr_1321]	Profile VSA_FULLY_FLEXIBLE for ImplementationDataType
[constr_1322]	Size Indicator for undefined dynamicArraySizeProfile
[constr_1363]	Existence of attributes of DiagnosticValueNeeds
[constr_1364]	Existence of attributes of DiagnosticIoControlNeeds
[constr_1375]	Existence of attributes of CompuMethod and related meta-classes
[constr_1381]	Appearance of core-related possible values of MemorySection.option or SwAddrMethod.option
[constr_1382]	Mutually exclusive existence of attributes SwVariableRefProxy.autosarVariable vs. SwVariableRefProxy.mcDataInstanceVar
[constr_1383]	Existence of CompuMethod and DataConstr for ImplementationDataTypes of category TYPE_REFERENCE
[constr_1384]	Definition of invalidValue for DataPrototype typed by ApplicationPrimitiveDataType of category CURVE, MAP, CUBOID, CUBE_4, CUBE_5, COM_AXIS, RES_AXIS, and VAL_BLK
[constr_1385]	DataPrototype is typed by an ImplementationDataType
[constr_1386]	PortDefinedArgumentValue shall only be defined for AbstractProvidedPortPrototype
[constr_1388]	VariationPointProxy of category VALUE shall not mix “pre-build” and “post-build” use-cases
[constr_1389]	Restriction regarding the value of category of VariationPointProxy.implementationDataType
[constr_1390]	Restriction to the value of SenderReceiverInterface.invalidationPolicy.handleInvalid
[constr_1391]	Compatibility of Units in the context of assignment using an ApplicationValueSpecification
[constr_1392]	Compatibility of Units in the context of assignment using an ApplicationRuleBasedValueSpecification
[constr_1393]	Existence of RuleBasedValueCont.unit
[constr_1395]	NvBlockDataMapping shall be complete
[constr_1396]	Restriction for the value of attribute category for non-terminating ImplementationDataTypeElements taken to model a Variable-Size Array Data Type
[constr_1397]	Existence of attributes of TransformerHardErrorEvent
[constr_1398]	Existence of attributes of BaseTypeDirectDefinition

▽

△

Number	Heading
[constr_1399]	Standardized values of ModeDeclarationGroup.category
[constr_1400]	Reference to a specific DataTransformation
[constr_1401]	Restrictions on the relation between DataPrototypeMapping and DataTransformation
[constr_1402]	Applicability of core-related possible values of MemorySection.option or SwAddrMethod.option related to SwAddrMethod.sectionInitializationPolicy
[constr_1403]	NvBlockDataMappings to a given nvData shall be unambiguous
[constr_1404]	All NvDataInterface.nvData of PortPrototypes in the context of a specific SwcServiceDependency shall be mapped to the same NvBlockDescriptor
[constr_1407]	Definition of SwDataDefProps.dataConstr depending on the capabilities of the data type
[constr_1408]	Definition of SwDataDefProps.displayFormat depending on the capabilities of the data type
[constr_1409]	Definition of SwDataDefProps.dataConstr depending on the capabilities of the element data type
[constr_1410]	Definition of SwDataDefProps.displayFormat depending on the capabilities of the element data type
[constr_1413]	Definition of SwDataDefProps.stepSize depending on the capabilities of the data type
[constr_1414]	Definition of SwDataDefProps.stepSize depending on the capabilities of the element data type
[constr_1415]	Supported values of ModeSwitchEventTriggeredActivity.role
[constr_1416]	Existence of ApplicationArrayElement.maxNumberOfElements
[constr_1417]	Invalid connection between NvBlockSwComponentType and other AtomicSwComponentType (I)
[constr_1418]	Invalid connection between NvBlockSwComponentType and other AtomicSwComponentType (II)
[constr_1420]	Existence of SwAxisIndividual.inputVariableType
[constr_1422]	Value of category is VOID
[constr_1423]	Completeness of references ArVariableInImplementationDataInstanceRef.contextDataPrototype
[constr_1424]	Existence of ArVariableInImplementationDataInstanceRef.contextDataPrototype
[constr_1425]	Definition of swCalprmAxisSet.swCalprmAxis / SwAxisIndividual.swVariableRef depending on the capabilities of the data type
[constr_1426]	Consistency of array sizes for axes and input variable array
[constr_1427]	Definition of swCalprmAxisSet.swCalprmAxis / SwAxisGrouped.swCalprmRef depending on the capabilities of the data type
[constr_1428]	Consistency of array sizes for arrays of elements of category CURVE, MAP, CUBOID, CUBE_4, or CUBE_5 arrays and used group axes arrays
[constr_1429]	Access to data within PortPrototypes from within RunnableEntitys

▽

△

Number	Heading
[constr_1430]	Access to local data from within RunnableEntitys
[constr_1431]	Access to parameters from within RunnableEntitys
[constr_1432]	Multiplicity of CommunicationBufferLocking
[constr_1433]	Transient faults are not applicable to software-components
[constr_1434]	CompuScales shall not have identical CompuScale Value Symbolic Names
[constr_1438]	ApplicationArrayElement.indexDataType needs to refer to a CompuMethod of category TEXTTABLE
[constr_1439]	Requirements on ApplicationArrayElement if attribute indexDataType exists
[constr_1440]	Size of the CompuMethod of category TEXTTABLE referenced by ApplicationArrayElement.indexDataType
[constr_1442]	category TYPE_REFERENCE shall not be used for modeling the “payload” of a Wrapped Union Data Type
[constr_1444]	Limited applicability of Wrapped Union Data Type
[constr_1445]	Initialization of the Member Selector of a Wrapped Union Data Type
[constr_1446]	No definition of invalidValue for a Wrapped Union Data Type
[constr_1468]	Limitation on the number of SwcExclusiveAreaPolicys
[constr_1469]	Applicability of constraints depending on the existence of a data transformation
[constr_1516]	Completeness of references ArParameterInImplementationDataInstance-Ref.contextDataPrototype
[constr_1517]	Existence of ArParameterInImplementationDataInstanceRef.context-DataPrototype
[constr_1518]	Consistency of data types in the context of ArParameterInImplementationDataInstanceRef
[constr_1519]	Existence of attributes vs. category of ApplicationValueSpecification
[constr_1520]	Semantics of ObdRatioServiceNeeds.rateBasedMonitoredEvent
[constr_1521]	Reference from AsynchronousServerCallReturnsEvent to AsynchronousServerCallResultPoint
[constr_1523]	No mode disabling for OperationInvokedEvents
[constr_1538]	Restriction for ReceiverComSpec.dataElement
[constr_1539]	Restriction for SenderComSpec.dataElement
[constr_1540]	Existence of ClientComSpec.operation
[constr_1541]	Existence of ServerComSpec.operation
[constr_1544]	Modeling of SwAxisGeneric for the definition of a fix axis
[constr_1545]	No initialization for fix axis
[constr_1583]	PortInterfaceMapping for DataPrototype typed by Compound Primitive Data Type
[constr_1592]	Definition of SwDataDefProps.displayPresentation depending on the capabilities of the data type
[constr_1602]	Definition of SwDataDefProps.displayPresentation depending on the capabilities of the element

▽

△

Number	Heading
[constr_1607]	Only Wrapped Union Data Types in PortInterface
[constr_1608]	Existence of rootParameterDataPrototype
[constr_1609]	Existence of rootVariableDataPrototype
[constr_1610]	Existence of SwDataDefProps.swValueBlockSize and SwDataDefProps.swValueBlockSizeMult
[constr_1622]	Value of TimingEvent.offset vs. TimingEvent.period
[constr_1631]	Applicability of DataPrototypeMapping.secondToFirstDataTransformation
[constr_1632]	Restriction for firstToSecondDataTransformation and secondToFirstDataTransformation
[constr_1634]	Allowed combinations of ApplicationDataType.category vs. CompuMethod.category
[constr_1635]	Relevance of attribute isOptional
[constr_1636]	Mapping of data types that represent an Optional Element Structure
[constr_1637]	Existence of ImplementationDataTypeElement.isOptional vs. ImplementationDataType.isStructWithOptionalElement
[constr_1638]	First ImplementationDataTypeElement of ImplementationDataType that represents an Optional Element Structure
[constr_1639]	ImplementationDataTypeElement with attribute isOptional set to True
[constr_1640]	No use of Optional Element Structure for interaction with the diagnostic stack
[constr_1662]	Compatibility of ApplicationRecordDataType and ImplementationDataType that both represent an Optional Element Structure
[constr_1679]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = signalBasedDiagnostics
[constr_1680]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = AppModeRequestInterface
[constr_1681]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = VerificationStatus
[constr_1682]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xFacVdp
[constr_1683]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationCam
[constr_1684]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationMapem

▽

△

Number	Heading
[constr_1685]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationIvim
[constr_1686]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationSpatem
[constr_1694]	Allowed target of SwDataDefProps.implementationDataType
[constr_1706]	Definition of initial value for data transmission
[constr_1712]	Existence of attribute ArrayValueSpecification.intendedPartialInitializationCount
[constr_1713]	NvBlockDescriptor.writingStrategy.usedDataElement shall refer to AutosarDataPrototype
[constr_1714]	AutosarDataPrototype shall only be referenced by a single NvBlockDescriptor.writingStrategy
[constr_1715]	Possible values of attribute NvBlockDescriptor.writingStrategy.role
[constr_1716]	Consistency of attribute NvBlockDescriptor.writingStrategy.role set to storeAtShutdown
[constr_1717]	Consistency of attribute NvBlockDescriptor.writingStrategy.role set to storeImmediate
[constr_1718]	Inheritance of SwDataDefProps.dataConstr from an array data type to the array elements
[constr_1719]	Inheritance of SwDataDefProps.displayFormat from an array data type to the array elements
[constr_1720]	Inheritance of SwDataDefProps.stepSize from an array data type to the array elements
[constr_1724]	Usage of attribute ClientServerOperation.diagArgIntegrity
[constr_1726]	Ordering of MetaDataItemSet.metaDataItem
[constr_1735]	Limitation of the aggregation of AutosarVariableRef in the context of an NvBlockDataMapping owned by a BulkNvDataDescriptor
[constr_1741]	Restriction to explicit sending semantics for the usage of DataServices in the context of a SwcServiceDependency that aggregates DiagnosticValueNeeds that in turn is referenced by a DiagnosticIoControlNeeds
[constr_1754]	Aggregation of NumericalRuleBasedValueSpecification
[constr_1755]	Aggregation of CompositeRuleBasedValueSpecification
[constr_1771]	Existence of SwValueCont.unit
[constr_1773]	Value of attribute dataSendPoint.returnValueProvision
[constr_1774]	Value of attribute dataReceivePointByArgument.returnValueProvision
[constr_1775]	Value of attribute serverCallPoint.returnValueProvision
[constr_1776]	Value of attribute asynchronousServerCallResultPoint.returnValueProvision
[constr_1777]	Value of attribute externalTriggeringPoint.returnValueProvision
[constr_1778]	Value of attribute modeSwitchPoint.returnValueProvision
[constr_1779]	Scope of the definition of an AbstractRuleBasedValueSpecification

▽

△

Number	Heading
[constr_1783]	Existence of attribute ImplementationDataTypeElement.arrayImplPolicy
[constr_1860]	Multiplicity of DelegationSwConnector.innerPort
[constr_1861]	Multiplicity of DelegationSwConnector.outerPort
[constr_1862]	Multiplicity of PassThroughSwConnector.requiredOuterPort
[constr_1863]	Multiplicity of PassThroughSwConnector.providedOuterPort
[constr_1864]	Multiplicity of InstantiationRTEEventProps.refinedEvent
[constr_1865]	Existence of InvalidationPolicy.dataElement
[constr_1866]	Existence of MetaDataItem.length
[constr_1867]	Existence of MetaDataItem.metaDataItemType
[constr_1868]	Existence of MetaDataItemSet.dataElement
[constr_1869]	Existence of attribute ArgumentDataPrototype.direction
[constr_1870]	Existence of attribute ApplicationError.errorCode
[constr_1871]	Existence of attribute ModeRequestTypeMap.implementationDataType
[constr_1872]	Existence of attribute ModeRequestTypeMap.modeGroup
[constr_1888]	Existence of attribute DataTransformation.executeDespiteDataUnavailability
[constr_1889]	Existence of attribute QueuedReceiverComSpec.queueLength
[constr_1891]	Existence of attribute NonqueuedReceiverComSpec.initValue
[constr_1892]	Existence of attribute TransmissionAcknowledgementRequest.timeout
[constr_1895]	Existence of attribute ModeSwitchSenderComSpec.modeGroup
[constr_1896]	Existence of attribute ModeSwitchReceiverComSpec.modeGroup
[constr_1897]	Existence of reference ParameterProvideComSpec.parameter
[constr_1898]	Existence of reference ParameterRequireComSpec.parameter
[constr_1899]	Existence of reference NvRequireComSpec.variable
[constr_1900]	Existence of reference NvProvideComSpec.variable
[constr_1901]	Existence of attribute EndToEndDescription.category
[constr_1902]	Existence of attribute EndToEndProtection.endToEndProfile
[constr_1903]	Existence of reference DataTypeMap.applicationDataType
[constr_1904]	Existence of reference DataTypeMap.implementationDataType
[constr_1905]	Existence of attribute SwTextProps.arraySizeSemantics
[constr_1906]	Existence of attribute SwTextProps.swMaxTextSize
[constr_1909]	Existence of attribute ImplementationProps.symbol
[constr_1910]	Existence of attribute BaseType.baseTypeDefinition
[constr_1911]	Existence of ArVariableInImplementationDataInstanceRef.targetDataPrototype
[constr_1912]	Existence of reference ArParameterInImplementationDataInstanceRef.targetDataPrototype
[constr_1913]	Existence of attribute CompuRationalCoeffs.compuDenominator
[constr_1914]	Existence of attribute CompuRationalCoeffs.compuNumerator

▽

△

Number	Heading
[constr_1915]	Existence of attribute PhysicalDimensionMapping.firstPhysicalDimension
[constr_1916]	Existence of attribute PhysicalDimensionMapping.secondPhysicalDimension
[constr_1917]	Existence of ConstantSpecification.valueSpec
[constr_1918]	Existence of RecordValueSpecification.field
[constr_1919]	Existence of TextValueSpecification.value
[constr_1920]	Existence of NumericalValueSpecification.value
[constr_1921]	Existence of ReferenceValueSpecification.referenceValue
[constr_1923]	Existence of RuleBasedAxisCont.ruleBasedValues
[constr_1924]	Existence of RuleBasedValueCont.ruleBasedValues
[constr_1925]	Existence of NumericalRuleBasedValueSpecification.ruleBasedValues
[constr_1926]	Existence of RuleBasedValueSpecification.rule
[constr_1927]	Existence of RuleBasedValueSpecification.arguments
[constr_1928]	Existence of CompositeRuleBasedValueSpecification.rule
[constr_1929]	Existence of CompositeRuleBasedValueSpecification.argument
[constr_1930]	Existence of ConstantReference.constant
[constr_1931]	Existence of ConstantSpecificationMapping.applConstant
[constr_1932]	Existence of ConstantSpecificationMapping.implConstant
[constr_1933]	Existence of CalibrationParameterValue.initializedParameter
[constr_1935]	Existence of attribute SwcInternalBehavior.supportsMultipleInstantiation
[constr_1936]	Existence of attribute RunnableEntity.symbol
[constr_1938]	Existence of attribute RunnableEntityArgument.symbol
[constr_1939]	Existence of attribute ExecutableEntityActivationReason.bitPosition
[constr_1940]	Existence of attribute AsynchronousServerCallReturnsEvent.eventSource
[constr_1941]	Existence of attribute DataSendCompletedEvent.eventSource
[constr_1942]	Existence of attribute DataWriteCompletedEvent.eventSource
[constr_1943]	Existence of attribute DataReceivedEvent.data
[constr_1944]	Existence of attribute DataReceiveErrorEvent.data
[constr_1945]	Existence of attribute OperationInvokedEvent.operation
[constr_1952]	Existence of reference WaitPoint.trigger
[constr_1954]	Existence of attribute VariableAccess.accessedVariable
[constr_1955]	Existence of attribute ServerCallPoint.operation
[constr_1956]	Existence of attribute ServerCallPoint.timeout
[constr_1957]	Existence of attribute AsynchronousServerCallResultPoint.asynchronousServerCallPoint
[constr_1958]	Existence of attribute ParameterAccess.accessedParameter
[constr_1959]	Existence of attribute InstantiationDataDefProps.swDataDefProps
[constr_1960]	Existence of attribute PortAPIOption.port

▽

△

Number	Heading
[constr_1964]	Existence of attribute PerInstanceMemory.type
[constr_1965]	Existence of attribute PerInstanceMemory.typeDefinition
[constr_1973]	Existence of attribute ModeDeclarationGroup.initialMode
[constr_1974]	Existence of attribute ModeDeclarationGroup.modeDeclaration
[constr_2000]	Compatibility of ClientServerOperations triggering the same RunnableEntity
[constr_2002]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataReadAccess
[constr_2003]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataWriteAccess
[constr_2004]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataSendPoint
[constr_2005]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role dataReceivePointByValue or dataReceivePointByArgument
[constr_2006]	Number of AsynchronousServerCallResultPoint referencing to one AsynchronousServerCallPoint
[constr_2007]	Consistency of typeDefinition attribute
[constr_2009]	Supported kinds of PortPrototypes of a NvBlockSwComponentType
[constr_2010]	Connections between SwComponentPrototypes of type NvBlockSwComponentType
[constr_2012]	Compatibility of ImplementationDataTypes used for ramBlock and romBlock
[constr_2013]	Compatibility of ImplementationDataTypes for NvBlockDataMapping
[constr_2015]	Limitation of SwcInternalBehavior of a NvBlockSwComponentType
[constr_2016]	Connections between SwComponentPrototypes of type ServiceProxySwComponentType
[constr_2017]	Ports of ServiceProxySwComponentTypes
[constr_2018]	Supported remote communication of a ServiceProxySwComponentType
[constr_2019]	ServiceSwComponentType shall have service ports only
[constr_2020]	dataReadAccess can not be used for queued communication
[constr_2021]	WaitPoint referencing a DataReceivedEvent can not be used for non-queued communication
[constr_2022]	Mutually exclusive use of SynchronousServerCallPoints and AsynchronousServerCallPoints
[constr_2023]	Consistency of timeout values
[constr_2024]	enableTakeAddress is restricted to single instantiation
[constr_2026]	Referenced VariableDataPrototype from AutosarVariableRef of VariableAccess in role writtenLocalVariable and readLocalVariable
[constr_2027]	SwcServiceDependency shall be defined for service ports only
[constr_2028]	staticMemory is restricted to single instantiation
[constr_2030]	AsynchronousServerCallResultPoint combined with WaitPoint shall belong to the same RunnableEntity

▽

△

Number	Heading
[constr_2031]	Period of `TimingEvent` shall be greater than 0
[constr_2033]	Timeout of `DataSendCompletedEvent`
[constr_2034]	`SwAddrMethod` referenced by `RunnableEntity`s, `BswCalledEntity`s, or `BswSchedulableEntity`s
[constr_2035]	`swImplPolicy` for `VariableDataPrototype` in `SenderReceiverInterface`
[constr_2036]	`swImplPolicy` for `VariableDataPrototype` in `NvDataInterface`
[constr_2037]	`swImplPolicy` for `VariableDataPrototype` in the role `ramBlock`
[constr_2038]	`swImplPolicy` for `VariableDataPrototype` in the role `implicitInterRunnableVariable`
[constr_2039]	`swImplPolicy` for `VariableDataPrototype` in the role `explicitInterRunnableVariable`
[constr_2040]	`swImplPolicy` for `VariableDataPrototype` in the role `arTypedPerInstanceMemory`
[constr_2041]	`swImplPolicy` for `VariableDataPrototype` in the role `staticMemory`
[constr_2042]	`swImplPolicy` for `ParameterDataPrototype` in `ParameterInterface`
[constr_2043]	`swImplPolicy` for `ParameterDataPrototype` in the role `romBlock`
[constr_2044]	`swImplPolicy` for `ParameterDataPrototype` in the role `sharedParameter`
[constr_2045]	`swImplPolicy` for `ParameterDataPrototype` in the role `perInstanceParameter`
[constr_2046]	`swImplPolicy` for `ParameterDataPrototype` in the role `constantMemory`
[constr_2047]	`swImplPolicy` for `ArgumentDataPrototype`
[constr_2048]	`swImplPolicy` for `SwServiceArg`
[constr_2049]	Different `ModeDeclarationGroup`s shall have different `shortName`s.
[constr_2050]	Mandatory information of a `SwAxisCont`
[constr_2051]	Mandatory information of a `SwValueCont`
[constr_2052]	Values of `swArraysize` and the number of values provided by `swValuesPhys` shall be consistent.
[constr_2053]	Consistency between `role` `IUMPRNumerator` and `ObdRatioServiceNeeds.connectionType`
[constr_2054]	Valid targets of `rptSystem`
[constr_2055]	Valid targets of `byPassPoint` and `rptHook` reference
[constr_2056]	Consistency of `RapidPrototypingScenario` with respect to `rptSystem` and `rptArHook` references
[constr_2057]	Mandatory information of a `RuleBasedAxisCont`
[constr_2058]	Mandatory information of a `RuleBasedValueCont`
[constr_2535]	Target of an `autosarParameter` in `AutosarParameterRef` shall refer to a parameter
[constr_2536]	Target of an `autosarVariable` in `AutosarVariableRef` shall refer to a variable
[constr_2544]	Limits need to be consistent
[constr_2545]	`invalidValue` shall fit in the specified ranges
[constr_2548]	Data constraint of value axis shall match

▽

△

Number	Heading
[constr_2549]	Units of input axis shall be consistent
[constr_2550]	Units of value axis shall be consistent
[constr_2561]	Application of DataConstrRule.constrLevel
[constr_4002]	Unambiguous mapping of modes to data types
[constr_4003]	Semantics of SwcModeSwitchEvent
[constr_4004]	Context of SenderReceiverAnnotation
[constr_4005]	Context of ClientServerAnnotation
[constr_4006]	Context of ParameterPortAnnotation
[constr_4007]	Context of ModePortAnnotation
[constr_4008]	Context of TriggerPortAnnotation
[constr_4009]	Context of NvDataPortAnnotation
[constr_4012]	Timeout of ModeSwitchedAckEvent
[constr_4082]	RunnableEntity.reentrancyLevel shall not be set.
[constr_10005]	Existence of attribute NotAvailableValueSpecification.defaultPattern
[constr_10006]	Valid interval of attribute NotAvailableValueSpecification.defaultPattern
[constr_10009]	Aggregation of ApplicationRuleBasedValueSpecification
[constr_10016]	Applicability of OsTaskExecutionEvent
[constr_10017]	Existence of attribute SwAxisCont.category
[constr_10018]	Existence of attribute SwAxisCont.swAxisIndex
[constr_10019]	Existence of attribute SwAxisCont.swValuesPhys
[constr_10028]	Existence of reference stereotyped ≪isOfType≫

Table G.71: Changed Constraints in R21-11

G.14.6 Deleted Constraints in R21-11

Number	Heading
[constr_1001]	Value of dataId shall be unique
[constr_1008]	Applicability of categorys STRUCTURE and ARRAY
[constr_1027]	Types for record layouts
[constr_1030]	ParameterSwComponentType references ConstantSpecificationMappingSet
[constr_1031]	NvBlockSwComponentType references ConstantSpecificationMappingSet
[constr_1143]	category of AutosarDataType shall not be extended
[constr_1157]	Applicability of constraints of CompuScales
[constr_1160]	Size of Compound Primitive Data Type is variant

▽

△

Number	Heading
[constr_1281]	`invalidValue` is inside the scope of the `compuMethod`
[constr_1283]	`invalidValue` is outside the scope of the `compuMethod`
[constr_4000]	Local communication of mode switches
[constr_4035]	`ValueSpecification` shall fit into data type

Table G.72: Deleted Constraints in R21-11

G.15 Traceable item history of this document according to AUTOSAR Release R22-11

G.15.1 Added Specification Items in R22-11

Number	Heading
[TPS_SWCT_01845]	Supported value encodings for `SwBaseType`
[TPS_SWCT_01846]	Use `InstantiationDataDefProps` to facilitate the definition of access to calibration parameters
[TPS_SWCT_01847]	Define role-specific data properties of elements of composite data types used for the definition of calibration parameters
[TPS_SWCT_01848]	Semantics of `NvBlockDescriptor.instantiationDataDefProps`
[TPS_SWCT_01849]	`shortName` of `constantMemory` and `staticMemory`
[TPS_SWCT_01850]	Usage of attribute `RPortPrototype.requiredComSpec.maxDeltaCounterInit` vs. `EndToEndProtection.endToEndProfile.maxDeltaCounterInit`
[TPS_SWCT_01851]	Usage of attribute `RPortPrototype.requiredComSpec.maxNoNewOrRepeatedData` vs. `EndToEndProtection.endToEndProfile`ARTechTerm`.maxNoNewOrRepeatedData`
[TPS_SWCT_01852]	Usage of attribute `RPortPrototype.requiredComSpec.syncCounterInit` vs. attribute `EndToEndProtection.endToEndProfile.syncCounterInit`
[TPS_SWCT_01853]	`AtomicSwComponentType` offers `PortPrototype` typed by `SenderReceiverInterface` or `NvDataInterface`s to read/write the content of an entire DID via diagnostic services
[TPS_SWCT_01854]	Software-Components wants to initiate the cloning of a time base
[TPS_SWCT_01855]	Definition of initial value for data transmission
[TPS_SWCT_01856]	`AtomicSwComponentType` reads the current ECU mode
[TPS_SWCT_01857]	`AtomicSwComponentType` shall keep the ECU alive
[TPS_SWCT_01858]	Optional existence of reference `VariationPointProxy.implementationDataType` if the `bindingTime` is set to `preCompileTime`
[TPS_SWCT_01859]	Specification of constant value for a String modeled by `ApplicationDataType`

▽

△

Number	Heading
[TPS_SWCT_01860]	Specification of constant value for a String modeled by ImplementationDataType
[TPS_SWCT_01861]	Specification of baseTypeSize in the context of an ImplementationDataType where attribute category is set to ARRAY
[TPS_SWCT_01862]	AtomicSwComponentType wants information about DTC clearance
[TPS_SWCT_01863]	Existence of VariableInAtomicSWCTypeInstanceRef.root-VariableDataPrototype in the context of NvBlockDataMapping.nvRamBlockElement
[TPS_SWCT_01864]	Semantics of DiagnosticEventNeeds.inhibitingFid and DiagnosticEventNeeds.inhibitingSecondaryFid
[TPS_SWCT_01865]	Definition of attributes for an “embedded” axis if reference inputVariableType exists
[TPS_SWCT_01866]	Definition of attributes for an “embedded” axis if reference inputVariableType does not exist
[TPS_SWCT_01867]	Communication Use case of the V2X Data Manager where isService = true
[TPS_SWCT_01868]	Communication Use case of the V2X Data Manager where isService = false
[TPS_SWCT_01869]	V2x DM Use Case: Application software component receives portions of an ASN.1 message
[TPS_SWCT_01870]	AtomicSwComponentType wants to reset a degradation state
[TPS_SWCT_03502]	Software-component acts as a server and offers the service
[TPS_SWCT_03503]	Software-component receives notification on server event subscription status changes
[TPS_SWCT_03504]	Software-component acts as a client and subscribe to events and methods
[TPS_SWCT_03505]	Software-component receives notification on client event and method subscription status changes

Table G.73: Added Specification Items in R22-11

G.15.2 Changed Specification Items in R22-11

Number	Heading
[TPS_SWCT_01038]	Support for Variant Handling in the in Software Component Template
[TPS_SWCT_01094]	Standardized values of attribute EndToEndDescriptioncategory
[TPS_SWCT_01234]	Base Type Level
[TPS_SWCT_01236]	Big picture of data types
[TPS_SWCT_01260]	Applicability of SwBaseType for the definition of data types
[TPS_SWCT_01296]	Different approaches of ASAM MCD-2MC and AUTOSAR with respect to SwRecordLayout

▽

△

Number	Heading
[TPS_SWCT_01444]	Size of SwBaseType is specified in bits
[TPS_SWCT_01487]	Correspondence of invalidValue for ApplicationPrimitiveDataType and ImplementationDataType
[TPS_SWCT_01489]	Standardized values of SwRecordLayoutV.swRecordLayoutVProp
[TPS_SWCT_01549]	Definition of linear data scaling
[TPS_SWCT_01560]	Supported categorys of CompuMethods for data conversion
[TPS_SWCT_01654]	AtomicSwComponentType offers PortPrototypes typed by SenderReceiverInterfaces to adjust the IO signal via diagnostic services
[TPS_SWCT_01656]	Suffix used for the resulting name of the PortInterface for IOControlRequest and IOControlResponse
[TPS_SWCT_03500]	Status forwarding to data transformer

Table G.74: Changed Specification Items in R22-11

G.15.3 Deleted Specification Items in R22-11

Number	Heading
[TPS_SWCT_01261]	Use case for SwBaseType
[TPS_SWCT_01263]	Further use cases for SwBaseType
[TPS_SWCT_01275]	values of the attribute swImplPolicy are restricted depending on the context
[TPS_SWCT_01467]	ImplementationDataType references an SwBaseType with a string encoding
[TPS_SWCT_01517]	ClientServerOperation cannot be passed as a reference
[TPS_SWCT_01729]	V2xFac Use Case: V2xFac notifies application software component about received messages
[TPS_SWCT_01764]	V2xFac Use Case: Application software component shall be able to process the *MAP (topology) Extended Message*
[TPS_SWCT_01770]	V2xFac Use Case: Application software component processes Infrastructure to Vehicle Information Message
[TPS_SWCT_01788]	V2xFac Use Case: Application software component processes Signal Phase And Timing Extended Message
[TPS_SWCT_01803]	MetaDataItems define the same value of attribute length
[TPS_SWCT_02014]	AtomicSwComponentType supports Response On Event (ROE) via diagnostic services

Table G.75: Deleted Specification Items in R22-11

G.15.4 Added Constraints in R22-11

Number	Heading
[constr_3688]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = ServerServiceOffer
[constr_3689]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = ClientEventSubscription
[constr_10096]	Shared axis shall not be a fixed axis
[constr_10097]	Buffer locking is only supported if returnValueProvision is set to returnValueProvided
[constr_10099]	Allowed values of the attribute SwDataDefProps.swImplPolicy vs. DataPrototypes and their roles
[constr_10104]	RoleBasedPortAssignment where attribute role is set to CallbackGetFaultDetectCounter shall refer to a PPortPrototype in the role portPrototype
[constr_10118]	Structural consistency of the modeling of InvalidationPolicy
[constr_10119]	SenderReceiverInterface.dataElement shall be referenced by at most one InvalidationPolicy
[constr_10120]	Structural consistency of the modeling of MetaDataItemSet
[constr_10121]	SenderReceiverInterface.dataElement shall be referenced by at most one MetaDataItemSet
[constr_10123]	Existence of attribute DtcStatusChangeNotificationNeeds.notificationTime
[constr_10196]	Definition of invalidValue for DataPrototype is typed by an ImplementationDataType that references a CompuMethod of category TEXTTABLE or BITFIELD_TEXTTABLE
[constr_10372]	Relation between *Type of PortPrototype*, *Type of ComSpec*, and *Type of PortInterface*
[constr_10373]	ImplementationDataType of category VALUE shall not refer to SwBaseType of category VOID
[constr_10383]	Supported value encodings for SwBaseType in the context of PortInterfaces where attribute isService is set to false

Table G.76: Added Constraints in R22-11

G.15.5 Changed Constraints in R22-11

Number	Heading
[constr_1000]	End-to-end protection is limited to sender/receiver communication
[constr_1006]	Applicable data categories, depending on specific model elements related to data definition properties
[constr_1015]	Prioritization of SwDataDefProps

▽

△

Number	Heading
[constr_1026]	Compatibility of Units
[constr_1038]	Reference to ApplicationError
[constr_1043]	Allowed combinations of a specific *Type of* PortInterface, a specific *Type of* PortPrototype, and a specific *Type of* ComSpec
[constr_1046]	Applicability of [TPS_SWCT_01845]
[constr_1047]	Compatibility of ApplicationPrimitiveDataTypes
[constr_1050]	Compatibility of ImplementationDataTypes
[constr_1052]	Compatibility of Units
[constr_1083]	Compatibility of Triggers
[constr_1091]	RTEEvents that may reference a WaitPoint
[constr_1092]	Restrictions for the ParameterSwComponentType
[constr_1104]	Trigger communication shall not implement an n:1 pattern
[constr_1108]	Existence and value of attribute ApplicationError.errorCode
[constr_1138]	SwcServiceDependency.assignedPort and DiagEventDebounceMonitorInternal
[constr_1170]	Existence of attribute EndToEndDescription.maxDeltaCounterInit for PROFILE_01
[constr_1171]	Existence of attribute EndToEndDescription.maxDeltaCounterInitfor PROFILE_02
[constr_1177]	Allowed targetCategory for SwPointerTargetProps
[constr_1215]	Existence of attribute EndToEndDescription.maxNoNewOrRepeatedData for PROFILE_01
[constr_1216]	Existence of attribute EndToEndDescription.syncCounterInit for PROFILE_01
[constr_1217]	Existence of attribute EndToEndDescription.maxNoNewOrRepeatedData for PROFILE_02
[constr_1218]	Existence of attribute EndToEndDescription.syncCounterInit for PROFILE_02
[constr_1219]	Invalidation depends on the value of swImplPolicy
[constr_1290]	Limitation on the number of PPortComSpecs in the context of one PPortPrototype
[constr_1291]	Limitation on the number of RPortComSpecs in the context of one PPortPrototype
[constr_1292]	Limitation on the number of RPortComSpecs/PPortComSpecs in the context of one PRPortPrototype
[constr_1726]	Ordering of MetaDataItemSet.metaDataItem
[constr_2011]	Connections between SwComponentPrototypes typed by NvBlockSwComponentType and SwComponentPrototypes typed by other AtomicSwComponentTypes
[constr_2014]	Limitation of NvBlockDescriptor.clientServerPort.role
[constr_2031]	Value of TimingEvent.period shall be greater than 0

Table G.77: Changed Constraints in R22-11

G.15.6 Deleted Constraints in R22-11

Number	Heading
[constr_1014]	Supported value encodings for SwBaseType
[constr_1045]	Supported value encodings for SwBaseType in the context of PortInterfaces
[constr_1090]	WaitPoint and RunnableEntity
[constr_1110]	Value of category in EndToEndDescription
[constr_1139]	assignedPort of DiagEventDebounceMonitorInternal shall refer to an RPortPrototype
[constr_1162]	Compatibility of SwRecordLayouts
[constr_1264]	Iteration along output axis is only supported for VALUE and VAL_BLK
[constr_1683]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationCam
[constr_1684]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationMapem
[constr_1685]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationIvim
[constr_1686]	Existence of attribute RoleBasedDataAssignment.usedDataElement.localVariable for RoleBasedDataAssignment.role = V2xApplRxIndicationSpatem
[constr_1706]	Definition of initial value for data transmission
[constr_1870]	Existence of attribute ApplicationError.errorCode
[constr_1937]	Existence of attribute TimingEvent.period
[constr_2029]	shortName of constantMemory and staticMemory
[constr_2048]	swImplPolicy for SwServiceArg
[constr_10028]	Existence of reference stereotyped ≪isOfType≫

Table G.78: Deleted Constraints in R22-11

G.16 Traceable item history of this document according to AUTOSAR Release R23-11

G.16.1 Added Specification Items in R23-11

Number	Heading
[TPS_SWCT_01871]	Definition of a ConstantSpecification in the *application domain*
[TPS_SWCT_01872]	Definition of a ValueSpecification in the *implementation domain*
[TPS_SWCT_01873]	Definition of “source” and “target” of an SwConnector for a sender/receiver-style interaction

▽

△

Number	Heading
[TPS_SWCT_01874]	Definition of “source” and “target” of an SwConnector for a client/server-style interaction
[TPS_SWCT_01875]	Usage of attributes of BaseTypeDirectDefinition depending on the area of applicability
[TPS_SWCT_01876]	Minimum value of baseTypeSize for a given baseTypeEncoding
[TPS_SWCT_01877]	Description of supported categorys of CompuMethods
[TPS_SWCT_01878]	Applicability of attribute CompuScale.a2lDisplayText
[TPS_SWCT_01879]	AtomicSwComponentType offers a client port to set DTR value
[TPS_SWCT_01880]	AtomicSwComponentType wants to clear a DTC
[TPS_SWCT_01881]	Scope of the availabilityBitfield
[TPS_SWCT_01882]	Ordering of elements within ApplicationValueSpecification.swValueCont.swValuesPhys

Table G.79: Added Specification Items in R23-11

G.16.2 Changed Specification Items in R23-11

Number	Heading
[TPS_SWCT_01138]	AtomicSwComponentType suppresses the storage of DTCs within the Dem
[TPS_SWCT_01178]	Specialized subclasses of ValueSpecification
[TPS_SWCT_01186]	ConstantSpecificationMapping
[TPS_SWCT_01229]	Three different levels of abstraction regarding the definition of data types
[TPS_SWCT_01307]	Semantics of combining supportsMultipleInstantiation and canBeInvokedConcurrently
[TPS_SWCT_01398]	Communication patterns for AUTOSAR services
[TPS_SWCT_01432]	invalidValue outside limits of compuMethod requires processing by RTE
[TPS_SWCT_01434]	invalidValue is inside the limits of the compuMethod, handled by software-components
[TPS_SWCT_01489]	Description of standardized values of SwRecordLayoutV.swRecordLayoutVProp
[TPS_SWCT_01505]	Precedence of calibration access along structural hierarchies in complex types
[TPS_SWCT_01675]	Recommendations for attributes of NvBlockNeeds or for NvBlockDescriptor

Table G.80: Changed Specification Items in R23-11

G.16.3 Deleted Specification Items in R23-11

Number	Heading
[TPS_SWCT_01734]	V2xM Use Case: Application software component has the ability to do Verification-on-Demand

Table G.81: Deleted Specification Items in R23-11

G.16.4 Added Constraints in R23-11

Number	Heading
[constr_10415]	Initial value on the level of an `ImplementationDataTypeElement` where attribute `isOptional` is set to the value `True`
[constr_10424]	Reference from `MemorySection` to `ExecutableEntity`
[constr_10433]	Existence of attributes of `ApplicationDataType` depending on the `category`
[constr_10434]	Existence of attributes of `ImplementationDataType` depending on the `category`
[constr_10435]	Existence of attributes of `ImplementationDataTypeElement` depending on the `category`
[constr_10439]	Initialization of a `DataPrototype` typed by a `Compound Primitive Data Type`
[constr_10502]	Number of elements of `ApplicationValueSpecification.swValueCont.swArraysize` vs. `ApplicationValueSpecification.category`
[constr_10503]	`ApplicationValueSpecification` where attribute `category` is set to `MAP`, `CUBOID`, `CUBE_4`, or `CUBE_5` and `ROW_DIR SwRecordLayout`
[constr_10504]	`ApplicationValueSpecification` where attribute category is set to `VAL_BLK` and `ApplicationPrimitiveDataType.swDataDefProps.swValueBlock-SizeMult` exists for `ROW_DIR SwRecordLayout`
[constr_10505]	`ApplicationValueSpecification` where attribute `category` is set to `MAP`, `CUBOID`, `CUBE_4`, or `CUBE_5` and `COLUMN_DIR SwRecordLayout`
[constr_10506]	`ApplicationValueSpecification` where attribute `category` is set to `VAL_BLK` and `ApplicationPrimitiveDataType.swDataDefProps.swValue-BlockSizeMult` exists for `COLUMN_DIR SwRecordLayout`
[constr_10507]	`ApplicationValueSpecification` where attribute `category` is set to `VAL_BLK` and `ApplicationPrimitiveDataType.swDataDefProps.swValueBlockSize` exists

Table G.82: Added Constraints in R23-11

G.16.5 Changed Constraints in R23-11

Number	Heading
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1009]	SwDataDefProps applicable to ImplementationDataTypes
[constr_1015]	Prioritization of SwDataDefProps
[constr_1029]	ConstantSpecificationMapping and ConstantSpecification
[constr_1375]	Existence of attributes of CompuMethod and related meta-classes depending on the value of the category
[constr_1639]	ImplementationDataTypeElement with attribute isOptional set to True
[constr_10068]	Standardized values for SectionInitializationPolicyType

Table G.83: Changed Constraints in R23-11

G.16.6 Deleted Constraints in R23-11

Number	Heading
[constr_1893]	Existence of attribute ServerComSpec.queueLength
[constr_1934]	Existence of attribute SwcInternalBehavior. handleTerminationAndRestart

Table G.84: Deleted Constraints in R23-11

G.16.7 Added Advisories in R23-11

none

G.16.8 Changed Advisories in R23-11

none

G.16.9 Deleted Advisories in R23-11

none

G.17 Traceable item history of this document according to AUTOSAR Release R24-11

G.17.1 Added Specification Items in R24-11

Number	Heading
[TPS_SWCT_01883]	Purpose of defining an SwcServiceDependency
[TPS_SWCT_01884]	Setup for NvM Use Case: Software-Components using individually configured Nv Data provided by NvBlockSwComponentType
[TPS_SWCT_01885]	ChrgM requests message data from the AtomicSwComponentType using Request messages
[TPS_SWCT_01886]	ChrgM sends message response to the AtomicSwComponentType, which the ChrgM has received from the EVSE
[TPS_SWCT_01887]	ChrgM sends error notification to the AtomicSwComponentType
[TPS_SWCT_01888]	ChrgM provides connection setup parameters to the AtomicSwComponent Type
[TPS_SWCT_01889]	General Purpose Timer Use Case: Application software-component needs a timer instance from the Time Service module
[TPS_SWCT_01890]	CalibrationParameterValue overrides ConstantSpecificationMapping
[TPS_SWCT_01891]	Function Inhibition Manager Use Case: Software-component wants to get notified when FID state changes

Table G.85: Added Specification Items in R24-11

G.17.2 Changed Specification Items in R24-11

Number	Heading
[TPS_SWCT_01019]	AtomicSwComponentType reads the current ComM mode
[TPS_SWCT_01089]	end-to-end communication protection
[TPS_SWCT_01090]	EndToEndProtection
[TPS_SWCT_01091]	Two cases for end-to-end protection
[TPS_SWCT_01092]	EndToEndProtectionSet
[TPS_SWCT_01093]	Aggregation EndToEndProtection.endToEndProfile is splitable
[TPS_SWCT_01094]	Standardized values of attribute EndToEndDescriptioncategory
[TPS_SWCT_01095]	category set to NONE
[TPS_SWCT_01195]	Mapping of composite element to primitive DataPrototype
[TPS_SWCT_01200]	ModeDeclarationGroupPrototype per ModeSwitchInterface
[TPS_SWCT_01365]	PerInstanceMemory typed by AUTOSAR Data Types
[TPS_SWCT_01366]	Initial value of a SwcInternalBehavior.arTypedPerInstanceMemory (typed by AUTOSAR Data Types)
[TPS_SWCT_01367]	Typed by AUTOSAR data type vs. typed by C data type



△

Number	Heading
[TPS_SWCT_01382]	Mode switch requests may be handled asynchronously by the RTE
[TPS_SWCT_01451]	Relations between ModeTransition and ModeDeclaration
[TPS_SWCT_01455]	Duplicate existence of initValue in the context of a PRPortPrototype
[TPS_SWCT_01487]	Correspondence of invalidValue for ApplicationPrimitiveDataType and ImplementationDataType
[TPS_SWCT_01508]	Scope of end-to-end protection
[TPS_SWCT_01529]	Default value for EndToEndDescription.dataIdNibbleOffset
[TPS_SWCT_01850]	Usage of attribute RPortPrototype.requiredComSpec.maxDeltaCounterInit vs. EndToEndProtection.endToEndProfile.maxDeltaCounterInit
[TPS_SWCT_01851]	Usage of attribute RPortPrototype.requiredComSpec.maxNoNewOrRepeatedData vs. EndToEndProtection.endToEndProfile.maxNoNewOrRepeatedData
[TPS_SWCT_01852]	Usage of attribute RPortPrototype.requiredComSpec.syncCounterInit vs. attribute EndToEndProtection.endToEndProfile.syncCounterInit
[TPS_SWCT_01878]	Applicability of attribute CompuScale.a2lDisplayText
[TPS_SWCT_02013]	AtomicSwComponentType defines a client port to get protocol, session and security information or to request a Reset to Default Session
[TPS_SWCT_02501]	Setup for NvM Use Case: Permanent RAM Block
[TPS_SWCT_02502]	Setup for NvM Use Case: Temporary RAM Block
[TPS_SWCT_02504]	Setup for NvM Use Case: RAM Block with explicit synchronization using Mirror Interfaces

Table G.86: Changed Specification Items in R24-11

G.17.3 Deleted Specification Items in R24-11

Number	Heading
[TPS_SWCT_01038]	Support for Variant Handling in the in Software Component Template
[TPS_SWCT_01042]	Four types of locations in the meta-model which may exhibit variability
[TPS_SWCT_01085]	Variation on the behavior level
[TPS_SWCT_01447]	Applicable binding times for model elements in the scope of the Software Component Template
[TPS_SWCT_01688]	initValue should exist in an RPortPrototype
[TPS_SWCT_01751]	The meaning of E2E-related attributes in a SenderComSpec if a TransformationComSpecProps of type EndToEndTransformationComSpecProps is defined

▽

△

Number	Heading
[TPS_SWCT_02016]	AtomicSwComponentType requires information on the status of the protocol communication and may disallow a protocol

Table G.87: Deleted Specification Items in R24-11

G.17.4 Added Constraints in R24-11

Number	Heading
[constr_10520]	Multiplicity of AssemblySwConnector.provider
[constr_10521]	Multiplicity of AssemblySwConnector.requester
[constr_10525]	Existence of attribute ApplicationValueSpecification.category
[constr_10527]	Existence of RoleBasedDataAssignment.usedDataElement.autosarVariable for RoleBasedDataAssignment.role = ramBlock
[constr_10529]	Existence of AsynchronousServerCallResultPoint for AsynchronousServerCallPoint where attribute timeout is defined
[constr_10532]	Restriction for SenderComSpec. transmissionProps.onChangeDataPrototype
[constr_10533]	Existence of TransmissionComSpecProps.onChangeDataPrototype.data-PrototypeInSenderReceiverInterface.rootDataPrototypeInSr
[constr_10534]	Existence of TransmissionComSpecProps. onChangeDataPrototype.rootDataPrototype
[constr_10538]	Existence of attribute ReceiverComSpec.dataElement
[constr_10539]	Existence of attribute SenderComSpec.dataElement
[constr_10542]	RunnableEntity is referenced by an OperationInvokedEvent
[constr_10543]	Uniqueness of reference PortAPIOption.port
[constr_10544]	Ownership of reference PortAPIOption.port
[constr_10548]	Uniqueness of ReceiverComSpec.dataElement
[constr_10549]	Uniqueness of SenderComSpec.dataElement
[constr_10550]	Uniqueness of ClientComSpec.operation
[constr_10551]	Uniqueness of ServerComSpec.operation
[constr_10552]	Uniqueness of ModeSwitchSenderComSpec.modeGroup
[constr_10553]	Uniqueness of ModeSwitchReceiverComSpec.modeGroup
[constr_10554]	Uniqueness of ParameterProvideComSpec.parameter
[constr_10555]	Uniqueness of ParameterRequireComSpec.parameter
[constr_10556]	Uniqueness of NvRequireComSpec.variable
[constr_10557]	Uniqueness of NvProvideComSpec.variable
[constr_10558]	SwBaseType associated with corresponding ApplicationRecordElement and ImplementationDataTypeElement

▽

△

Number	Heading
[constr_10559]	Uniqueness of DataPrototypeMapping.firstDataPrototype and secondDataPrototype
[constr_10560]	Uniqueness of ClientServerOperationMapping.firstOperation and secondOperation
[constr_10561]	Uniqueness of ClientServerApplicationErrorMapping.firstApplicationError and secondApplicationError
[constr_10562]	Uniqueness of ModeDeclarationGroupPrototypeMapping.firstModeGroup and secondModeGroup
[constr_10563]	Uniqueness of ModeDeclarationMapping.firstMode and secondMode
[constr_10564]	Uniqueness of TriggerMapping.firstTrigger and secondTrigger
[constr_10565]	Uniqueness of SubElementMapping.firstElement and secondElement
[constr_10575]	No multiple instantiation of NvBlockSwComponentType
[constr_10606]	Existence of ConstantSpecificationMapping or CalibrationParameterValue for ApplicationValueSpecification or ApplicationRuleBasedValueSpecification of category CURVE, MAP, CUBOID, CUBE_4, and CUBE_5
[constr_10607]	Number of ConstantSpecificationMappings that are allowed to reference a ApplicationValueSpecification or ApplicationRuleBasedValueSpecification in the context of an InternalBehavior
[constr_10608]	Number of ConstantSpecificationMappings that are allowed to reference a ApplicationValueSpecification or ApplicationRuleBasedValueSpecification in the context of a ParameterSwComponentType
[constr_10610]	Compatibility of PhysicalDimensions in the context is the creation of an ApplicationValueSpecification

Table G.88: Added Constraints in R24-11

G.17.5 Changed Constraints in R24-11

Number	Heading
[constr_1000]	End-to-end protection is limited to sender/receiver communication
[constr_1007]	Allowed attributes of SwDataDefProps for ApplicationDataTypes
[constr_1012]	Value of category is FIXED_LENGTH
[constr_1053]	Compatibility of PhysicalDimensions in the context of the creation of a SwConnector
[constr_1070]	Compatibility of PortPrototypes of different DataInterfaces in the context of DelegationSwConnectors
[constr_1087]	AssemblySwConnector inside CompositionSwComponentType
[constr_1088]	DelegationSwConnector inside CompositionSwComponentType

▽

△

Number	Heading
[constr_1111]	Constraints of dataId in PROFILE_01
[constr_1112]	Constraints of dataIdMode in PROFILE_01
[constr_1113]	Existence of attributes of meta-class EndToEndDescription in PROFILE_01
[constr_1114]	Constraints of crcOffset in PROFILE_01
[constr_1115]	Constraints of counterOffset in PROFILE_01
[constr_1116]	Constraints of dataLength in PROFILE_01
[constr_1117]	Constraints of maxDeltaCounterInit in PROFILE_01
[constr_1118]	Existence of attributes of meta-class EndToEndDescription in PROFILE_02
[constr_1119]	Constraints of dataLength in PROFILE_02
[constr_1120]	Constraints of dataId in PROFILE_02
[constr_1121]	Constraints of maxDeltaCounterInit in PROFILE_02
[constr_1170]	Existence of attribute EndToEndDescription.maxDeltaCounterInit for PROFILE_01
[constr_1171]	Existence of attribute EndToEndDescription.maxDeltaCounterInit for PROFILE_02
[constr_1183]	EndToEndProtectionVariablePrototypes aggregated by EndToEndProtection
[constr_1211]	Constraints of maxNoNewOrRepeatedData in PROFILE_01
[constr_1212]	Constraints of syncCounterInit in PROFILE_01
[constr_1213]	Constraints of maxNoNewOrRepeatedData in PROFILE_02
[constr_1214]	Constraints of syncCounterInitin PROFILE_02
[constr_1215]	Existence of attribute EndToEndDescription.maxNoNewOrRepeatedDatafor PROFILE_01
[constr_1216]	Existence of attribute EndToEndDescription.syncCounterInit for PROFILE_01
[constr_1217]	Existence of attribute EndToEndDescription.maxNoNewOrRepeatedData for PROFILE_02
[constr_1218]	Existence of attribute EndToEndDescription.syncCounterInit for PROFILE_02
[constr_1261]	Applicability for EndToEndDescription.dataIdNibbleOffset
[constr_1363]	Existence of attributes of DiagnosticValueNeeds
[constr_1519]	Existence of attributes vs. category of ApplicationValueSpecification
[constr_1901]	Existence of attribute EndToEndDescription.category
[constr_1902]	Existence of attribute EndToEndProtection.endToEndProfile
[constr_1986]	Existence of the reference DiagnosticRoutineNeeds.diagRoutineType

Table G.89: Changed Constraints in R24-11

G.17.6 Deleted Constraints in R24-11

Number	Heading
[constr_10017]	Existence of attribute SwAxisCont.category
[constr_1364]	Existence of attributes of DiagnosticIoControlNeeds
[constr_1433]	Transient faults are not applicable to software-components
[constr_1891]	Existence of attribute NonqueuedReceiverComSpec.initValue
[constr_2051]	Mandatory information of a SwValueCont

Table G.90: Deleted Constraints in R24-11

G.17.7 Added Advisories in R24-11

Number	Heading
[advisory_01010]	Existence of attribute NonqueuedReceiverComSpec.initValue

Table G.91: Added Advisories in R24-11

G.17.8 Changed Advisories in R24-11

none

G.17.9 Deleted Advisories in R24-11

none

G.18 Traceable item history of this document according to AUTOSAR Release R25-11

G.18.1 Added Specification Items in R25-11

Number	Heading
[TPS_SWCT_01892]	Csm Use Case: Wrap plain-text key using AES algorithms
[TPS_SWCT_01893]	Csm Use Case: Unwrap cipher-text key using AES algorithms
[TPS_SWCT_01894]	Deliver Authentication Notification
[TPS_SWCT_01895]	Conversion of SenderReceiverInterfaces
[TPS_SWCT_01896]	Conversion of ClientServerInterfaces

▽

△

Number	Heading
[TPS_SWCT_01897]	Data constraint of value axis shall match
[TPS_SWCT_01898]	Avoid division by zero in rational formula
[TPS_SWCT_01899]	SwDataDefProps.displayFormat vs. CompuMethod.displayFormat
[TPS_SWCT_01900]	Application Software Component sets or retrieves security event reporting mode
[TPS_SWCT_01901]	Activation of cyclic handling of communication data
[TPS_SWCT_01902]	Ability to return transport errors count information from RTE API calls
[TPS_SWCT_01903]	Ability to return the value errors count errors information from RTE API calls
[TPS_SWCT_01904]	Ability to return an error from RTE API calls if no new data is received from COM
[TPS_SWCT_01905]	Ability to return more detailed out-of-range information about received structured dataElement
[TPS_SWCT_01906]	Ability to return more detailed invalid value information about received structured dataElement
[TPS_SWCT_01907]	AtomicSwComponentType wants to contribute data to an extended data record of a DTC
[TPS_SWCT_01908]	Suffix used for the resulting name of the PortInterface for the Data Services

Table G.92: Added Specification Items in R25-11

G.18.2 Changed Specification Items in R25-11

Number	Heading
[TPS_SWCT_01016]	AtomicSwComponentType wants to select a shutdown target
[TPS_SWCT_01017]	AtomicSwComponentType wants to select a boot target
[TPS_SWCT_01018]	AtomicSwComponentType wants to use an alarm clock
[TPS_SWCT_01019]	AtomicSwComponentType reads the current ComM mode
[TPS_SWCT_01020]	AtomicSwComponentType requests a ComM mode. It may also check later whether the requested ComM mode has become effective
[TPS_SWCT_01021]	AtomicSwComponentType acts as a mode manager that influences the ECU state
[TPS_SWCT_01126]	Access to partial networking via BswM
[TPS_SWCT_01137]	Dem provides information that the fault storage overflows
[TPS_SWCT_01286]	DataConstr
[TPS_SWCT_01309]	signature of a RunnableEntity depends on the connected RTEEvent and the existence of RunnableEntity.argument
[TPS_SWCT_01311]	Symbol of an operation argument in the RunnableEntity's signature
[TPS_SWCT_01427]	AtomicSwComponentType provides data for diagnostic purposes via ClientServerInterface

▽

△

Number	Heading
[TPS_SWCT_01456]	Predefined values for `SwAddrMethod.option`
[TPS_SWCT_01668]	`SecOc` Use Case: obtain the verification status of secure communication
[TPS_SWCT_01672]	`SecOc` Use Case: software component retires from secure communication for a given period
[TPS_SWCT_01728]	V2xFac Use Case: Application software component provides Vehicle specific data to the V2X-Stack for CAM transmission
[TPS_SWCT_01730]	V2xFac Use Case: Application software component triggers transmission of DENM message
[TPS_SWCT_01731]	V2xM Use Case: Application software component provides Vehicle specific data to the V2X-Stack for Position and Time information
[TPS_SWCT_01732]	V2xM Use Case: Application software component needs V2X specific data from the V2X Manager
[TPS_SWCT_01733]	V2xM Use Case: Application software component has soft-control over Pseudonym-Change within V2X Manager
[TPS_SWCT_01735]	V2xM Use Case: Application software component do location based calculations
[TPS_SWCT_01856]	`AtomicSwComponentType` reads the current ECU mode
[TPS_SWCT_01857]	`AtomicSwComponentType` shall keep the ECU alive
[TPS_SWCT_01875]	Usage of attributes of `BaseTypeDirectDefinition` depending on the area of applicability
[TPS_SWCT_01884]	Setup for NvM Use Case: Software-Components using individually configured Nv Data provided by NvBlockSwComponentType
[TPS_SWCT_02019]	Setup for `AtomicSwComponentType` which requires *Global Supervision Status* notification
[TPS_SWCT_02501]	Setup for NvM Use Case: `Permanent RAM Block`
[TPS_SWCT_02502]	Setup for NvM Use Case: `Temporary RAM Block`
[TPS_SWCT_02503]	Setup for NvM Use Case: Software-Components using Nv Data provided by NvBlockSwComponentType
[TPS_SWCT_02504]	Setup for NvM Use Case: `RAM Block` with explicit synchronization using Mirror Interfaces

Table G.93: Changed Specification Items in R25-11

G.18.3 Deleted Specification Items in R25-11

Number	Heading
[TPS_SWCT_01089]	end-to-end communication protection
[TPS_SWCT_01090]	`EndToEndProtection`
[TPS_SWCT_01091]	Two cases for end-to-end protection
[TPS_SWCT_01092]	`EndToEndProtectionSet`
[TPS_SWCT_01093]	Aggregation `EndToEndProtection.endToEndProfile` is splitable

▽

△

Number	Heading
[TPS_SWCT_01094]	Standardized values of attribute EndToEndDescriptioncategory
[TPS_SWCT_01095]	category set to NONE
[TPS_SWCT_01508]	Scope of end-to-end protection
[TPS_SWCT_01529]	Default value for EndToEndDescription.dataIdNibbleOffset
[TPS_SWCT_01682]	Relevance of E2E-related attributes in a ReceiverComSpec if a TransformationComSpecProps of type EndToEndTransformationComSpecProps is defined.
[TPS_SWCT_01763]	HtssM Service Use Case: Query results of hardware tests
[TPS_SWCT_01828]	Application Software Component reports security event using Smart Sensor API
[TPS_SWCT_01829]	Suffix used for the resulting name of the PortInterface for the IdsM Services
[TPS_SWCT_01830]	Application Software Component provides time stamp to IdsM
[TPS_SWCT_01850]	Usage of attribute RPortPrototype.requiredComSpec. maxDeltaCounterInit vs. EndToEndProtection. endToEndProfile.maxDeltaCounterInit
[TPS_SWCT_01851]	Usage of attribute RPortPrototype.requiredComSpec. maxNoNewOrRepeatedData vs. EndToEndProtection. endToEndProfile.maxNoNewOrRepeatedData
[TPS_SWCT_01852]	Usage of attribute RPortPrototype.requiredComSpec. syncCounterInit vs. attribute EndToEndProtection. endToEndProfile.syncCounterInit

Table G.94: Deleted Specification Items in R25-11

G.18.4 Added Constraints in R25-11

Number	Heading
[constr_10632]	Compatibility of SwTextProps
[constr_10667]	Simple compatibility of ImplementationDataTypes
[constr_10668]	Restriction for the existence of attributes of RunnableEntityArgument for port-defined argument values
[constr_10669]	Existence of reference RunnableEntityArgument. implementationDataType
[constr_10670]	Compatibility between the corresponding ClientServerOperation.argument and RunnableEntity.argument
[constr_10671]	ReceptionComSpecProps.comHandlerTaskMappingEnabled vs. implicit data read access
[constr_10672]	Applicability of transportErrorCountEnabled, valueErrorCountEnabled, returnNoNewDataEnabled
[constr_10673]	Existence of ReceptionComSpecProps.comHandlerTaskMappingEnabled vs. ReceptionComSpecProps.timeout

▽

△

Number	Heading
[constr_10674]	Existence of attribute ReceptionComSpecProps.outOfRangeBitfieldErrorsEnabled
[constr_10675]	Existence of attribute ReceptionComSpecProps.invalidValueBitfieldErrorsEnabled

Table G.95: Added Constraints in R25-11

G.18.5 Changed Constraints in R25-11

Number	Heading
[constr_10072]	Allowed multiplicities of SenderComSpec attributes for communication between NvBlockSwComponentType and ApplicationSwComponentType
[constr_1022]	Limits shall be defined for each direction of CompuMethod
[constr_1050]	Extended compatibility of ImplementationDataTypes
[constr_1051]	Compatibility of SwDataDefProps
[constr_1311]	Appearance of safety-related possible values of SwAddrMethod.option
[constr_1375]	Existence of attributes of CompuMethod and related meta-classes depending on the value of the category
[constr_1381]	Appearance of core-related possible values of SwAddrMethod.option
[constr_1402]	Applicability of core-related possible values of SwAddrMethod.option related to SwAddrMethod.sectionInitializationPolicy
[constr_2549]	Units of input axis shall be consistent
[constr_2550]	Units of value axis shall be consistent

Table G.96: Changed Constraints in R25-11

G.18.6 Deleted Constraints in R25-11

Number	Heading
[constr_1000]	End-to-end protection is limited to sender/receiver communication
[constr_1025]	Avoid division by zero in rational formula
[constr_1040]	Conversion of SenderReceiverInterfaces
[constr_1041]	Conversion of ClientServerInterfaces
[constr_10548]	Uniqueness of ReceiverComSpec.dataElement
[constr_10549]	Uniqueness of SenderComSpec.dataElement
[constr_10550]	Uniqueness of ClientComSpec.operation
[constr_10551]	Uniqueness of ServerComSpec.operation
[constr_10552]	Uniqueness of ModeSwitchSenderComSpec.modeGroup

▽

△

Number	Heading
[constr_10553]	Uniqueness of ModeSwitchReceiverComSpec.modeGroup
[constr_10554]	Uniqueness of ParameterProvideComSpec.parameter
[constr_10555]	Uniqueness of ParameterRequireComSpec.parameter
[constr_10556]	Uniqueness of NvRequireComSpec.variable
[constr_10557]	Uniqueness of NvProvideComSpec.variable
[constr_1111]	Constraints of dataId in PROFILE_01
[constr_1112]	Constraints of dataIdMode in PROFILE_01
[constr_1113]	Existence of attributes of meta-class EndToEndDescription in PROFILE_01
[constr_1114]	Constraints of crcOffset in PROFILE_01
[constr_1115]	Constraints of counterOffset in PROFILE_01
[constr_1116]	Constraints of dataLength in PROFILE_01
[constr_1117]	Constraints of maxDeltaCounterInit in PROFILE_01
[constr_1118]	Existence of attributes of meta-class EndToEndDescription in PROFILE_02
[constr_1119]	Constraints of dataLength in PROFILE_02
[constr_1120]	Constraints of dataId in PROFILE_02
[constr_1121]	Constraints of maxDeltaCounterInit in PROFILE_02
[constr_1170]	Existence of attribute EndToEndDescription.maxDeltaCounterInit for PROFILE_01
[constr_1171]	Existence of attribute EndToEndDescription.maxDeltaCounterInit for PROFILE_02
[constr_1183]	EndToEndProtectionVariablePrototypes aggregated by EndToEndProtection
[constr_1211]	Constraints of maxNoNewOrRepeatedData in PROFILE_01
[constr_1212]	Constraints of syncCounterInit in PROFILE_01
[constr_1213]	Constraints of maxNoNewOrRepeatedData in PROFILE_02
[constr_1214]	Constraints of syncCounterInit in PROFILE_02
[constr_1215]	Existence of attribute EndToEndDescription.maxNoNewOrRepeatedData for PROFILE_01
[constr_1216]	Existence of attribute EndToEndDescription.syncCounterInit for PROFILE_01
[constr_1217]	Existence of attribute EndToEndDescription.maxNoNewOrRepeatedData for PROFILE_02
[constr_1218]	Existence of attribute EndToEndDescription.syncCounterInit for PROFILE_02
[constr_1261]	Applicability for EndToEndDescription.dataIdNibbleOffset
[constr_1901]	Existence of attribute EndToEndDescription.category
[constr_1902]	Existence of attribute EndToEndProtection.endToEndProfile
[constr_2548]	Data constraint of value axis shall match

Table G.97: Deleted Constraints in R25-11

G.18.7 Added Advisories in R25-11

none

G.18.8 Changed Advisories in R25-11

none

G.18.9 Deleted Advisories in R25-11

none

G.19 Traceable item history of this document according to AUTOSAR Release R26-11

G.19.1 Added Specification Items in R26-11

Number	Heading
[TPS_SWCT_01909]	Application Software Component provides custom time stamp to IdsM
[TPS_SWCT_01910]	Function Inhibition Manager Use Case: Atomic Software-Component wants to query the list of diagnostic events that are inhibiting a FID
[TPS_SWCT_01911]	SecOc Use Case: deliver Freshness to SecOc IV

Table G.98: Added Specification Items in R26-11

G.19.2 Changed Specification Items in R26-11

Number	Heading
[TPS_SWCT_01062]	Documentation of software-components
[TPS_SWCT_01412]	ServiceSwComponentType shall be added in ECU Configuration phase
[TPS_SWCT_01813]	Software-Component wants check a certificate on KeyM
[TPS_SWCT_01814]	AtomicSwComponentType wants to retrieve a certificate from KeyM
[TPS_SWCT_01816]	AtomicSwComponentType wants to check the existence of a certificate from KeyM
[TPS_SWCT_01845]	Supported value encodings for SwBaseType
[TPS_SWCT_01876]	Minimum value of baseTypeSize for a given baseTypeEncoding

Table G.99: Changed Specification Items in R26-11

G.19.3 Deleted Specification Items in R26-11

Number	Heading
[TPS_SWCT_01018]	AtomicSwComponentType wants to use an alarm clock
[TPS_SWCT_01719]	Selection of applicable RptProfiles
[TPS_SWCT_01720]	Preparation Levels
[TPS_SWCT_01721]	References from RptContainer
[TPS_SWCT_01722]	Semantics of RP Service Point
[TPS_SWCT_01723]	Semantics of RP Service Function
[TPS_SWCT_01724]	Semantics of RapidPrototypingScenario
[TPS_SWCT_01728]	V2xFac Use Case: Application software component provides Vehicle specific data to the V2X-Stack for CAM transmission
[TPS_SWCT_01730]	V2xFac Use Case: Application software component triggers transmission of DENM message
[TPS_SWCT_01731]	V2xM Use Case: Application software component provides Vehicle specific data to the V2X-Stack for Position and Time information
[TPS_SWCT_01732]	V2xM Use Case: Application software component needs V2X specific data from the V2X Manager
[TPS_SWCT_01733]	V2xM Use Case: Application software component has soft-control over Pseudonym-Change within V2X Manager
[TPS_SWCT_01735]	V2xM Use Case: Application software component do location based calculations
[TPS_SWCT_01867]	Communication Use case of the V2X Data Manager where isService = true
[TPS_SWCT_01868]	Communication Use case of the V2X Data Manager where isService = false
[TPS_SWCT_01869]	V2x DM Use Case: Application software component receives portions of an ASN.1 message

Table G.100: Deleted Specification Items in R26-11

G.19.4 Added Constraints in R26-11

Number	Heading
[constr_10744]	Multiplicity of the reference in the role DataPrototypeMapping.textTableMapping
[constr_10745]	Multiplicity of the reference in the role SubElementMapping.textTableMapping
[constr_10792]	Relation between baseTypeSize, baseTypeEncoding and InternalConstrs
[constr_10793]	Restriction for the definition of internalConstrs in the context of an ImplementationDataType of category TYPE_REFERENCE

Table G.101: Added Constraints in R26-11

G.19.5 Changed Constraints in R26-11

Number	Heading
[constr_1004]	Mapping of ApplicationDataTypes in the scope of single AtomicSwComponentTypes and ParameterSwComponentTypes
[constr_10606]	Existence of ConstantSpecificationMapping or CalibrationParameterValue for ApplicationValueSpecification or ApplicationRuleBasedValueSpecification of category COM_AXIS, STD_AXIS, RES_AXIS, CURVE, MAP, CUBOID, CUBE_4, and CUBE_5
[constr_1289]	Allowed Attributes vs. category for DataPrototypes typed by ApplicationDataTypes

Table G.102: Changed Constraints in R26-11

G.19.6 Deleted Constraints in R26-11

Number	Heading
[constr_10000]	Existence of attribute RptExecutableEntityProperties.rptExecutionControl
[constr_10001]	Existence of attribute RptExecutableEntityProperties.rptServicePoint
[constr_1682]	Existence of the attribute RoleBasedDataAssignment.usedDataElement.localVariable for the value RoleBasedDataAssignment.role = V2xFacVdp
[constr_1988]	Existence of attribute RptProfile.maxServicePointId
[constr_1989]	Existence of attribute RptProfile.minServicePointId
[constr_1990]	Existence of attribute RptProfile.servicePointSymbolPost
[constr_1991]	Existence of attribute RptProfile.servicePointSymbolPre
[constr_1992]	Existence of attribute RptProfile.stimEnabler
[constr_1993]	Existence of attribute RptImplPolicy.rptEnablerImplType
[constr_1994]	Existence of attribute RptImplPolicy.rptPreparationLevel
[constr_1995]	Existence of attribute RptSwPrototypingAccess.rptHookAccess
[constr_1996]	Existence of attribute RptSwPrototypingAccess.rptReadAccess
[constr_1997]	Existence of attribute RptSwPrototypingAccess.rptWriteAccess
[constr_1998]	Existence of attribute RptExecutableEntityProperties.maxRptEventId
[constr_1999]	Existence of attribute RptExecutableEntityProperties.minRptEventId

Table G.103: Deleted Constraints in R26-11

G.19.7 Added Advisories in R26-11

none

G.19.8 Changed Advisories in R26-11

none

G.19.9 Deleted Advisories in R26-11

none

H Upstream Mapping

The content of this appendix chapter is *informative* in nature and shall **not** be considered as *normative* content.

H.1 Introduction

This chapter describes the mapping of the ECU Configuration parameters (M1 model) onto the meta-classes and attributes of the AUTOSAR upstream templates (in this case: Software Component Template).

The relationships between upstream templates and ECU Configuration are described in order to answer typical questions like:

- How shall a supplier use the information in a System Description in order to fulfill the needs defined by the systems engineer?
- How is a tool vendor supposed to generate an ECU Configuration Description out of ECU Extract of System Description?

Please note that the upstream mapping tables contain the following columns:

Column Name	Column Meaning
BSW Module	Name of BSW module
BSW Context	Reference to parameter container
BSW Parameter	Name of the BSW parameter
BSW Type	Type of parameter
BSW Description	Description from the configuration document
Template Description	Class note or attribute note of the M2 model element
M2 Parameter	Name of the upstream template model element
Mapping Rule	Textual description on how to transform between M2 and BSW domains
Mapping Type	One of: **local** no mapping needed since parameter local to BSW **partial** some data can be automatically mapped but not all **full** all data can be automatically mapped
Mapping Status	Indication of life-cycle status of the mapping
ECUC Parameter ID	ID of the parameter in the respective SWS document (may be empty if the mapping is owned by an enumeration literal)

Table H.1: Upstream mapping table columns

H.2 BswM

BSW Module	BSW Context
BswM	BswM/BswMConfig/BswMArbitration/BswMModeCondition/BswMConditionValue/BswMCompuScaleModeValue
BSW Parameter	**BSW Type**
BswMCompuMethodRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
This is a foreign reference to the CompuMethod used for mode requests.	
Template Description	
This meta-class represents the ability to express the relationship between a physical value and the mathematical representation. Note that this is still independent of the technical implementation in data types. It only specifies the formula how the internal value corresponds to its physical pendant.	
M2 Parameter	
CompuMethod	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_01040]

BSW Module	BSW Context
BswM	BswM/BswMConfig/BswMArbitration/BswMModeCondition/BswMConditionValue/BswMModeDeclaration
BSW Parameter	**BSW Type**
BswMModeValueRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
This is a foreign reference to the Mode Declaration used for the mode requests corresponding to this condition.	
Template Description	
Declaration of one Mode. The name and semantics of a specific mode is not defined in the meta-model.	
M2 Parameter	
ModeDeclaration	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_00864]

BSW Module	BSW Context
BswM	BswM/BswMConfig/BswMArbitration/BswMModeRequestPort/BswMModeInitValue/BswMCompuScaleModeValue
BSW Parameter	**BSW Type**
BswMCompuMethodRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
This is a foreign reference to the CompuMethod used for mode requests.	
Template Description	

▽

△

This meta-class represents the ability to express the relationship between a physical value and the mathematical representation. Note that this is still independent of the technical implementation in data types. It only specifies the formula how the internal value corresponds to its physical pendant.	
M2 Parameter	
CompuMethod	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_01040]

BSW Module	**BSW Context**
BswM	BswM/BswMConfig/BswMArbitration/BswMModeRequestPort/BswMModeRequestSource/BswMBswModeNotification
BSW Parameter	**BSW Type**
BswMBswModeDeclarationGroupPrototypeRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
This is a foreign reference to the Mode Declaration Group Prototype.	
Template Description	
The ModeDeclarationGroupPrototype specifies a set of Modes (ModeDeclarationGroup) which is provided or required in the given context.	
M2 Parameter	
ModeDeclarationGroupPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_00927]

BSW Module	**BSW Context**
BswM	BswM/BswMConfig/BswMArbitration/BswMModeRequestPort/BswMModeRequestSource/BswMSwcModeNotification
BSW Parameter	**BSW Type**
BswMSwcModeNotificationModeDeclarationGroupPrototypeRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
This is a foreign reference to the ModeDeclarationGroupPrototype.	
Template Description	
The ModeDeclarationGroupPrototype specifies a set of Modes (ModeDeclarationGroup) which is provided or required in the given context.	
M2 Parameter	
ModeDeclarationGroupPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_00893]

BSW Module	BSW Context
BswM	BswM/BswMConfig/BswMArbitration/BswMModeRequestPort/BswMModeRequestSource/BswMSwcModeRequest

BSW Parameter	BSW Type
BswMSwcModeRequestVariableDataPrototypeRef	ECUC-FOREIGN-REFERENCE-DEF

BSW Description
This is a reference to the VariableDataPrototype.

Template Description
A VariableDataPrototype represents a formalized generic piece of information that is typically mutable by the application software layer. VariableDataPrototype is used in various contexts and the specific context gives the otherwise generic VariableDataPrototype a dedicated semantics.

M2 Parameter
VariableDataPrototype

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_01046]

BSW Module	BSW Context
BswM	BswM/BswMConfig/BswMDataTypeMappingSets

BSW Parameter	BSW Type
BswMDataTypeMappingSetRef	ECUC-FOREIGN-REFERENCE-DEF

BSW Description
Reference to DataTypeMappingSet.

Template Description
This class represents a list of mappings between ApplicationDataTypes and ImplementationDataTypes. In addition, it can contain mappings between ImplementationDataTypes and ModeDeclarationGroups.

M2 Parameter
DataTypeMappingSet

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_00937]

BSW Module	BSW Context
BswM	BswM/BswMConfig/BswMModeControl/BswMAction/BswMAvailableActions/BswMRteModeRequest

BSW Parameter	BSW Type
BswMRequestedModeRef	ECUC-FOREIGN-REFERENCE-DEF

BSW Description
This is a foreign reference to the Mode Declaration used for the mode request

Template Description
Declaration of one Mode. The name and semantics of a specific mode is not defined in the meta-model.

M2 Parameter
ModeDeclaration

Mapping Rule	Mapping Type



△

1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_01024]

BSW Module	**BSW Context**
BswM	BswM/BswMConfig/BswMModeControl/BswMAction/BswMAvailableActions/BswMRteSwitch
BSW Parameter	**BSW Type**
BswMSwitchedMode	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
This parameter contains the integer value that corresponds to a certain mode in a Mode Declaration Group.	
Template Description	
Declaration of one Mode. The name and semantics of a specific mode is not defined in the meta-model.	
M2 Parameter	
ModeDeclaration	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_00896]

BSW Module	**BSW Context**
BswM	BswM/BswMConfig/BswMModeControl/BswMAction/BswMAvailableActions/BswMSchMSwitch
BSW Parameter	**BSW Type**
BswMSchMSwitchedMode	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
This parameter contains the integer value that corresponds to a certain mode in a Mode Declaration Group.	
Template Description	
Declaration of one Mode. The name and semantics of a specific mode is not defined in the meta-model.	
M2 Parameter	
ModeDeclaration	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_00901]

BSW Module	**BSW Context**
BswM	BswM/BswMConfig/BswMModeControl/BswMRteModeRequestPort
BSW Parameter	**BSW Type**
BswMRteModeRequestPortInterfaceRef	ECUC-INSTANCE-REFERENCE-DEF
BSW Description	
This is an instance reference to the variable data prototype used for the mode request.	
Template Description	
A VariableDataPrototype represents a formalized generic piece of information that is typically mutable by the application software layer. VariableDataPrototype is used in various contexts and the specific context gives the otherwise generic VariableDataPrototype a dedicated semantics.	

▽

△

M2 Parameter	
VariableDataPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_01025]

BSW Module	BSW Context
BswM	BswM/BswMConfig/BswMModeControl/BswMRteModeRequestPort
BSW Parameter	**BSW Type**
BswMRteModeRequestVariableDataPrototypeSRRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
This is a foreign reference to a VariableDataPrototype used for the mode request.	
Template Description	
A VariableDataPrototype represents a formalized generic piece of information that is typically mutable by the application software layer. VariableDataPrototype is used in various contexts and the specific context gives the otherwise generic VariableDataPrototype a dedicated semantics.	
M2 Parameter	
VariableDataPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_01057]

BSW Module	BSW Context
BswM	BswM/BswMConfig/BswMModeControl/BswMSwitchPort
BSW Parameter	**BSW Type**
BswMModeSwitchInterfaceRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the ModeSwitchInterface from which the BswM will generate a PPortPrototype.	
Template Description	
A mode switch interface declares a ModeDeclarationGroupPrototype to be sent and received.	
M2 Parameter	
ModeSwitchInterface	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_00951]

BSW Module	BSW Context
BswM	BswM/BswMConfig/BswMModeControl/BswMSwitchPort
BSW Parameter	**BSW Type**
BswMSchMModeDeclarationGroupRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	

▽

△

Reference to the ModeDeclarationGroup from which the BswM will generate a ModeDeclarationGroupPrototype.	
Template Description	
A collection of Mode Declarations. Also, the initial mode is explicitly identified.	
M2 Parameter	
ModeDeclarationGroup	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_BswM_01031]

H.3 Com

BSW Module	**BSW Context**
Com	Com/ComConfig/ComGwMapping/ComGwDestination/ComGwDestinationDescription
BSW Parameter	**BSW Type**
ComFilter	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
This container contains the configuration parameters of the AUTOSAR COM module's Filters. Note: On sender side the container is used to specify the transmission mode conditions.	
Template Description	
Base class for data filters. The type of the filter is specified in attribute dataFilterType. Some of the filter types require additional arguments which are specified as attributes of this class.	
M2 Parameter	
DataFilter	
Mapping Rule	**Mapping Type**
Create container on the receiver side if the NonqueuedReceiverComSpec contains a DataFilter. Create Container on the sender side if the TransmissionModeCondition element contains a reference to this signal.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00339]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComGwMapping/ComGwDestination/ComGwDestinationDescription/ComFilter
BSW Parameter	**BSW Type**
ComFilterAlgorithm	ECUC-ENUMERATION-PARAM-DEF
BSW Description	
The range of values is specified in the Clause 3.2.3 (Reception Filtering) of [3].	
Template Description	
This attribute specifies the type of the filter.	
M2 Parameter	
DataFilter.dataFilterType	
Mapping Rule	**Mapping Type**
Mapping between DataFilterTypeEnum and ComFilterAlgorithm Enum is necessary.	full

▽

△

Mapping Status	ECUC Parameter ID
valid	[ECUC_Com_00146]

BSW Module	BSW Context
Com	Com/ComConfig/ComGwMapping/ComGwDestination/ComGwDestinationDescription/ComFilter
BSW Parameter	**BSW Type**
ComFilterMask	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Mask for old and new value.	
M2 Parameter	
DataFilter.mask	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00235]

BSW Module	BSW Context
Com	Com/ComConfig/ComGwMapping/ComGwDestination/ComGwDestinationDescription/ComFilter
BSW Parameter	**BSW Type**
ComFilterMax	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Value to specify the upper boundary	
M2 Parameter	
DataFilter.max	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00317]

BSW Module	BSW Context
Com	Com/ComConfig/ComGwMapping/ComGwDestination/ComGwDestinationDescription/ComFilter
BSW Parameter	**BSW Type**
ComFilterMin	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Value to specify the lower boundary	
M2 Parameter	
DataFilter.min	
Mapping Rule	**Mapping Type**

▽

△

1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00318]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComGwMapping/ComGwDestination/ComGwDestinationDescription/ComFilter
BSW Parameter	**BSW Type**
ComFilterOffset	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3]. Range = 0..(ComFilterPeriod-1)	
Template Description	
Specifies the initial number of messages to occur before the first message is passed	
M2 Parameter	
DataFilter.offset	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00313]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComGwMapping/ComGwDestination/ComGwDestinationDescription/ComFilter
BSW Parameter	**BSW Type**
ComFilterPeriod	ECUC-INTEGER-PARAM-DEF
BSW Description	
This parameter defines the period of the ComFilterAlgorithm ONE_EVERY_N.	
Template Description	
Specifies number of messages to occur before the message is passed again	
M2 Parameter	
DataFilter.period	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00312]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComGwMapping/ComGwDestination/ComGwDestinationDescription/ComFilter
BSW Parameter	**BSW Type**
ComFilterX	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Value to compare with	
M2 Parameter	

▽

△

DataFilter.x	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00147]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComGwMapping/ComGwDestination/ComGwDestinationDescription
BSW Parameter	**BSW Type**
ComSignalInitValue	ECUC-STRING-PARAM-DEF
BSW Description	
Initial value for this signal. In case of UINT8_N the default value is a string of length ComSignalLength with all bytes set to 0x00. In case of UINT8_DYN the initial size shall be 0. In case the ComSignalType is UINT8, UINT16, UINT32, UINT64, SINT8, SINT16, SINT32, SINT64 the string shall be interpreted as defined in the chapter Integer Type in the AUTOSAR EcuC specification. In case the ComSignalType is FLOAT32, FLOAT64 the string shall be interpreted as defined in the chapter Float Type in the AUTOSAR EcuC specification. In case the ComSignalType is BOOLEAN the string shall be interpreted as defined in the chapter Boolean Type in the AUTOSAR EcuC specification. In case the ComSignal is a UINT8_N, UINT8_DYN the string shall be interpreted as a decimal representation of the characters separated by blanks, e.g. "97 98 100" means a string "abd", where the char "a" is in byte 0(lowest address), "b" is in byte 1, and "d" is in byte 2 and (highest address). For the ComSignalType UINT8_DYN the dynamic length shall be set to the number of configured characters. An empty string "" shall be interpreted as 0-sized dynamic signal.	
Template Description	
Initial value to be sent if sender component is not yet fully initialized, but receiver needs data already.	
M2 Parameter	
ISignal.initValue, NonqueuedSenderComSpec.initValue	
Mapping Rule	**Mapping Type**
It is possible to aggregate an initValue at the level of a ComSpec in the SWC Template. in case the System Description doesn't use a complete Software Component Description (VFB View) the init Value is defined in the System Template.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00170]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignal
BSW Parameter	**BSW Type**
ComDataInvalidAction	ECUC-ENUMERATION-PARAM-DEF
BSW Description	
This parameter defines the action performed upon reception of an invalid signal. Relating to signal groups the action in case if one of the included signals is an invalid signal. If Replace is used the ComSignalInitValue will be used for the replacement.	
Template Description	
InvalidationPolicy: Specifies whether the component can actively invalidate a particular dataElement. If no invalidationPolicy points to a dataElement this is considered to yield the identical result as if the handleInvalid attribute was set to dontInvalidate. **ISignalPort.handleInvalid:** This attribute defines how invalidation is applied to the ISignals received in the context of this ISignalPort.	
M2 Parameter	
InvalidationPolicy, ISignalPort.handleInvalid	

▽

△

Mapping Rule	Mapping Type
If strategy HandleInvalidEnum.keep is defined then set ComDataInvalidAction to NOTIFY. If strategy HandleInvalidEnum.replace is defined then set ComDataInvalidAction to REPLACE. In all other cases the ComDataInvalidAction shall not be configured.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00314]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignal
BSW Parameter	**BSW Type**
ComFilter	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
This container contains the configuration parameters of the AUTOSAR COM module's Filters. Note: On sender side the container is used to specify the transmission mode conditions.	
Template Description	
Base class for data filters. The type of the filter is specified in attribute dataFilterType. Some of the filter types require additional arguments which are specified as attributes of this class.	
M2 Parameter	
DataFilter	
Mapping Rule	**Mapping Type**
Create container on the receiver side if the NonqueuedReceiverComSpec contains a DataFilter. Create Container on the sender side if the TransmissionModeCondition element contains a reference to this signal.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00339]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterAlgorithm	ECUC-ENUMERATION-PARAM-DEF
BSW Description	
The range of values is specified in the Clause 3.2.3 (Reception Filtering) of [3].	
Template Description	
This attribute specifies the type of the filter.	
M2 Parameter	
DataFilter.dataFilterType	
Mapping Rule	**Mapping Type**
Mapping between DataFilterTypeEnum and ComFilterAlgorithm Enum is necessary.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00146]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterMask	ECUC-INTEGER-PARAM-DEF

▽

△

BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Mask for old and new value.	
M2 Parameter	
DataFilter.mask	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00235]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterMax	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Value to specify the upper boundary	
M2 Parameter	
DataFilter.max	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00317]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterMin	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Value to specify the lower boundary	
M2 Parameter	
DataFilter.min	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00318]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignal/ComFilter
BSW Parameter	**BSW Type**

▽

△

ComFilterOffset	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3]. Range = 0..(ComFilterPeriod-1)	
Template Description	
Specifies the initial number of messages to occur before the first message is passed	
M2 Parameter	
DataFilter.offset	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00313]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterPeriod	ECUC-INTEGER-PARAM-DEF
BSW Description	
This parameter defines the period of the ComFilterAlgorithm ONE_EVERY_N.	
Template Description	
Specifies number of messages to occur before the message is passed again	
M2 Parameter	
DataFilter.period	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00312]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterX	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Value to compare with	
M2 Parameter	
DataFilter.x	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00147]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignal

BSW Parameter	BSW Type
ComSignalDataInvalidValue	ECUC-STRING-PARAM-DEF

BSW Description

Defines the data invalid value of the signal.

In case the ComSignalType is UINT8, UINT16, UINT32, UINT64, SINT8, SINT16, SINT32, SINT64 the string shall be interpreted as defined in the chapter Integer Type in the AUTOSAR EcuC specification. In case the ComSignalType is FLOAT32, FLOAT64 the string shall be interpreted as defined in the chapter Float Type in the AUTOSAR EcuC specification. In case the ComSignalType is BOOLEAN the string shall be interpreted as defined in the chapter Boolean Type in the AUTOSAR EcuC specification. In case the ComSignal is a UINT8_N, UINT8_DYN the string shall be interpreted as a decimal representation of the characters separated by blanks, e.g. "97 98 100" means a string "abd", where the char "a" is in byte 0(lowest address), "b" is in byte 1, and "d" is in byte 2 and (highest address). For the ComSignalType UINT8_DYN the dynamic length shall be set to the number of configured characters. An empty string "" shall be interpreted as 0-sized dynamic signal.

Template Description

InvalidationPolicy:
Specifies whether the component can actively invalidate a particular `dataElement`.

If no `invalidationPolicy` points to a `dataElement` this is considered to yield the identical result as if the `handleInvalid` attribute was set to `dontInvalidate`.

SwDataDefProps.invalidValue:
Optional value to express invalidity of the actual data element.

M2 Parameter

`InvalidationPolicy`, `SwDataDefProps.invalidValue`

Mapping Rule	Mapping Type
ComSignalDataInvalidValue is only derived 1:1 from the SwDataDefProps.invalidValue if the InvalidationPolicy equals keep or replace. In all other cases of InvalidationPolicy the ComSignal DataInvalidValue shall not be configured.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00391]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignal

BSW Parameter	BSW Type
ComSignalInitValue	ECUC-STRING-PARAM-DEF

BSW Description

Initial value for this signal. In case of UINT8_N the default value is a string of length ComSignalLength with all bytes set to 0x00. In case of UINT8_DYN the initial size shall be 0.

In case the ComSignalType is UINT8, UINT16, UINT32, UINT64, SINT8, SINT16, SINT32, SINT64 the string shall be interpreted as defined in the chapter Integer Type in the AUTOSAR EcuC specification. In case the ComSignalType is FLOAT32, FLOAT64 the string shall be interpreted as defined in the chapter Float Type in the AUTOSAR EcuC specification. In case the ComSignalType is BOOLEAN the string shall be interpreted as defined in the chapter Boolean Type in the AUTOSAR EcuC specification. In case the ComSignal is a UINT8_N, UINT8_DYN the string shall be interpreted as a decimal representation of the characters separated by blanks, e.g. "97 98 100" means a string "abd", where the char "a" is in byte 0(lowest address), "b" is in byte 1, and "d" is in byte 2 and (highest address). For the ComSignalType UINT8_DYN the dynamic length shall be set to the number of configured characters. An empty string "" shall be interpreted as 0-sized dynamic signal.

Template Description

Initial value to be sent if sender component is not yet fully initialized, but receiver needs data already.

M2 Parameter

`ISignal.initValue`, `NonqueuedSenderComSpec.initValue`

Mapping Rule	Mapping Type

△

It is possible to aggregate an initValue at the level of a ComSpec in the SWC Template. in case the System Description doesn't use a complete Software Component Description (VFB View) the init Value is defined in the System Template.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00170]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignal
BSW Parameter	**BSW Type**
ComTimeout	ECUC-FLOAT-PARAM-DEF

BSW Description

Defines the length of the deadline monitoring timeout period in seconds. The period for the first timeout period can be configured separately by ECUC_Com_00183.

Template Description

ISignalPort.timeout:

- ISignalPort with communicationDirection = in:

Optional timeout value in seconds for the reception of the ISignal. The attribute value is used to configure the ComTimeout in the COM module. The RTE ignores this attribute. The timeout can also be specified with the NonqueuedReceiverCom Spec.aliveTimeout attribute. If a full DataMapping exists for the SystemSignal and the value is available in the configured ReceiverComSpec, then the timeout value in the ReceiverComSpec overrides this optional timeout specification during the creation of the Base Ecu Configuration of the COM module.

- ISignalPort with communicationDirection = out:

Optional timeout value in seconds for the transmission of the ISignal. The attribute value is used to configure the Com Timeout in the COM module. The RTE ignores this attribute. The timeout can also be specified with the SenderCom Spec.transmissionAcknowledge.timeout attribute. If a full DataMapping exists for the SystemSignal and the value is available in the configured SenderComSpec, then the timeout value in the SenderComSpec overrides this optional timeout specification during the creation of the Base Ecu Configuration of the COM module.

This attribute can be used in the following cases:

- legacy signal where the System Description doesn't use a complete Software Component Description (VFB View) and where the DataMapping is missing.
- bus monitoring use cases in which the DataMapping is ignored.

TransmissionAcknowledgementRequest.timeout:
Number of seconds before an error is reported or in case of allowed redundancy, the value is sent again.

NonqueuedReceiverComSpec.aliveTimeout:
Specify the amount of time (in seconds) after which the software component (via the RTE) needs to be notified if the corresponding data item have not been received according to the specified timing description.

If the aliveTimeout attribute is 0 no timeout monitoring shall be performed.

M2 Parameter

`ISignalPort.timeout`, `TransmissionAcknowledgementRequest.timeout`, `NonqueuedReceiverComSpec.aliveTimeout`

Mapping Rule	**Mapping Type**
TX Signals: If a full DataMapping exist for the SystemSignal this information may be available from a configured SenderComSpec.transmissionAcknowledge.timeout that specifies the amount of time (in seconds) after which the software component (via the RTE) needs to be notified if the corresponding data item have not been transmitted according to the specified timing description. In this case the timeout value in SenderComSpec overrides the optional timeout specification in the System Template defined on the ISignalPort. RX Signals: If a full DataMapping exist for the SystemSignal this information may be available from a configured NonqueuedReceiverComSpec.aliveTimeout. In this case the timeout value in ReceiverComSpec overrides the optional timeout specification in the System Template defined on the ISignalPort. Please note that the SWS_RTE defines an algorithm to finally set the applicable timeout value.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00263]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignal

BSW Parameter	BSW Type
ComTimeoutSubstitutionValue	ECUC-STRING-PARAM-DEF

BSW Description

The signal substitution value will be used in case of a timeout and ComRxDataTimeoutAction is set to SUBSTITUTE.

- In case of UINT8_N, the default value is a string of length ComSignalLength with all bytes set to 0x00.
- In case of UINT8_DYN, the initial size shall be 0.
- In case the ComSignalType is UINT8, UINT16, UINT32, UINT64, SINT8, SINT16, SINT32, SINT64, the string shall be interpreted as defined in the chapter Integer Type in the AUTOSAR EcuC specification.
- In case the ComSignalType is FLOAT32, FLOAT64, the string shall be interpreted as defined in the chapter Float Type in the AUTOSAR EcuC specification.
- In case the ComSignalType is BOOLEAN, the string shall be interpreted as defined in the chapter Boolean Type in the AUTOSAR EcuC specification.
- In case the ComSignal is a UINT8_N, UINT8_DYN, the string shall be interpreted as a decimal representation of the characters separated by blanks, e.g. "97 98 100" means a string "abd", where the char "a" is in byte 0(lowest address), "b" is in byte 1, and "d" is in byte 2 and (highest address). For the ComSignalType UINT8_DYN, the dynamic length shall be set to the number of configured characters. An empty string "" shall be interpreted as 0-sized dynamic signal.

Template Description

Defines and enables the ComTimeoutSubstituition for this ISignal.

M2 Parameter

`ISignal.timeoutSubstitutionValue`

Mapping Rule	Mapping Type
The mapping of ComTimeoutSubstitutionValue depends on the setting in the ISignal.dataType Policy: - ISignal.dataTypePolicy = override or legacy: SystemTemplate::Fibex::FibexCore::Core Communication::ISignal.timeoutSubstitutionValue - ISignal.dataTypePolicy = networkRepresentationFromComSpec: SWComponent Template::Communication::NonequeuedReceiverComSpec.timeoutSubstitutionValue - ISignal.dataTypePolicy = transformingISignal this is not supported.	full

Mapping Status	ECUC Parameter ID
valid	[ECUC_Com_10006]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignalGroup

BSW Parameter	BSW Type
ComDataInvalidAction	ECUC-ENUMERATION-PARAM-DEF

BSW Description

This parameter defines the action performed upon reception of an invalid signal. Relating to signal groups the action in case if one of the included signals is an invalid signal. If Replace is used the ComSignalInitValue will be used for the replacement.

Template Description

InvalidationPolicy:
Specifies whether the component can actively invalidate a particular `dataElement`.

If no `invalidationPolicy` points to a `dataElement` this is considered to yield the identical result as if the `handleInvalid` attribute was set to `dontInvalidate`.

ISignalPort.handleInvalid:
This attribute defines how invalidation is applied to the ISignals received in the context of this ISignalPort.

M2 Parameter

`InvalidationPolicy`, `ISignalPort.handleInvalid`

Mapping Rule	Mapping Type

△

If strategy HandleInvalidEnum.keep is defined then set ComDataInvalidAction to NOTIFY. If strategy HandleInvalidEnum.replace is defined then set ComDataInvalidAction to REPLACE. In all other cases the ComDataInvalidAction shall not be configured.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00314]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal
BSW Parameter	**BSW Type**
ComFilter	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
This container contains the configuration parameters of the AUTOSAR COM module's Filters. Note: On sender side the container is used to specify the transmission mode conditions.	
Template Description	
Base class for data filters. The type of the filter is specified in attribute dataFilterType. Some of the filter types require additional arguments which are specified as attributes of this class.	
M2 Parameter	
DataFilter	
Mapping Rule	**Mapping Type**
Create container on the receiver side if the NonqueuedReceiverComSpec contains a DataFilter. Create Container on the sender side if the TransmissionModeCondition element contains a reference to this signal.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00339]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterAlgorithm	ECUC-ENUMERATION-PARAM-DEF
BSW Description	
The range of values is specified in the Clause 3.2.3 (Reception Filtering) of [3].	
Template Description	
This attribute specifies the type of the filter.	
M2 Parameter	
DataFilter.dataFilterType	
Mapping Rule	**Mapping Type**
Mapping between DataFilterTypeEnum and ComFilterAlgorithm Enum is necessary.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00146]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterMask	ECUC-INTEGER-PARAM-DEF
BSW Description	

▽

△

The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Mask for old and new value.	
M2 Parameter	
DataFilter.mask	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00235]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterMax	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Value to specify the upper boundary	
M2 Parameter	
DataFilter.max	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00317]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterMin	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Value to specify the lower boundary	
M2 Parameter	
DataFilter.min	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00318]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterOffset	ECUC-INTEGER-PARAM-DEF

▽

△

BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3]. Range = 0..(ComFilterPeriod-1)	
Template Description	
Specifies the initial number of messages to occur before the first message is passed	
M2 Parameter	
DataFilter.offset	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00313]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterPeriod	ECUC-INTEGER-PARAM-DEF
BSW Description	
This parameter defines the period of the ComFilterAlgorithm ONE_EVERY_N.	
Template Description	
Specifies number of messages to occur before the message is passed again	
M2 Parameter	
DataFilter.period	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00312]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal/ComFilter
BSW Parameter	**BSW Type**
ComFilterX	ECUC-INTEGER-PARAM-DEF
BSW Description	
The name of this attribute corresponds to the parameter name in the Clause 3.2.3 (Reception filtering) of [3].	
Template Description	
Value to compare with	
M2 Parameter	
DataFilter.x	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00147]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal

BSW Parameter	BSW Type
ComSignalDataInvalidValue	ECUC-STRING-PARAM-DEF

BSW Description

Defines the data invalid value of the signal.

In case the ComSignalType is UINT8, UINT16, UINT32, UINT64, SINT8, SINT16, SINT32, SINT64 the string shall be interpreted as defined in the chapter Integer Type in the AUTOSAR EcuC specification. In case the ComSignalType is FLOAT32, FLOAT64 the string shall be interpreted as defined in the chapter Float Type in the AUTOSAR EcuC specification. In case the ComSignalType is BOOLEAN the string shall be interpreted as defined in the chapter Boolean Type in the AUTOSAR EcuC specification. In case the ComSignal is a UINT8_N, UINT8_DYN the string shall be interpreted as a decimal representation of the characters separated by blanks, e.g. "97 98 100" means a string "abd", where the char "a" is in byte 0(lowest address), "b" is in byte 1, and "d" is in byte 2 and (highest address). For the ComSignalType UINT8_DYN the dynamic length shall be set to the number of configured characters. An empty string "" shall be interpreted as 0-sized dynamic signal.

Template Description

InvalidationPolicy:
Specifies whether the component can actively invalidate a particular `dataElement`.

If no `invalidationPolicy` points to a `dataElement` this is considered to yield the identical result as if the `handleInvalid` attribute was set to `dontInvalidate`.

SwDataDefProps.invalidValue:
Optional value to express invalidity of the actual data element.

M2 Parameter

`InvalidationPolicy`, `SwDataDefProps.invalidValue`

Mapping Rule	Mapping Type
ComSignalDataInvalidValue is only derived 1:1 from the SwDataDefProps.invalidValue if the InvalidationPolicy equals keep or replace. In all other cases of InvalidationPolicy the ComSignal DataInvalidValue shall not be configured.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00391]

BSW Module	BSW Context
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal

BSW Parameter	BSW Type
ComSignalInitValue	ECUC-STRING-PARAM-DEF

BSW Description

Initial value for this signal. In case of UINT8_N the default value is a string of length ComSignalLength with all bytes set to 0x00. In case of UINT8_DYN the initial size shall be 0.

In case the ComSignalType is UINT8, UINT16, UINT32, UINT64, SINT8, SINT16, SINT32, SINT64 the string shall be interpreted as defined in the chapter Integer Type in the AUTOSAR EcuC specification. In case the ComSignalType is FLOAT32, FLOAT64 the string shall be interpreted as defined in the chapter Float Type in the AUTOSAR EcuC specification. In case the ComSignalType is BOOLEAN the string shall be interpreted as defined in the chapter Boolean Type in the AUTOSAR EcuC specification. In case the ComSignal is a UINT8_N, UINT8_DYN the string shall be interpreted as a decimal representation of the characters separated by blanks, e.g. "97 98 100" means a string "abd", where the char "a" is in byte 0(lowest address), "b" is in byte 1, and "d" is in byte 2 and (highest address). For the ComSignalType UINT8_DYN the dynamic length shall be set to the number of configured characters. An empty string "" shall be interpreted as 0-sized dynamic signal.

Template Description

Initial value to be sent if sender component is not yet fully initialized, but receiver needs data already.

M2 Parameter

`ISignal.initValue`, `NonqueuedSenderComSpec.initValue`

Mapping Rule	Mapping Type

△

It is possible to aggregate an initValue at the level of a ComSpec in the SWC Template. in case the System Description doesn't use a complete Software Component Description (VFB View) the init Value is defined in the System Template.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00170]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignalGroup/ComGroupSignal
BSW Parameter	**BSW Type**
ComTimeoutSubstitutionValue	ECUC-STRING-PARAM-DEF
BSW Description	
The signal substitution value will be used in case of a timeout and ComRxDataTimeoutAction is set to SUBSTITUTE. • In case of UINT8_N, the default value is a string of length ComSignalLength with all bytes set to 0x00. • In case of UINT8_DYN, the initial size shall be 0. • In case the ComSignalType is UINT8, UINT16, UINT32, UINT64, SINT8, SINT16, SINT32, SINT64, the string shall be interpreted as defined in the chapter Integer Type in the AUTOSAR EcuC specification. • In case the ComSignalType is FLOAT32, FLOAT64, the string shall be interpreted as defined in the chapter Float Type in the AUTOSAR EcuC specification. • In case the ComSignalType is BOOLEAN, the string shall be interpreted as defined in the chapter Boolean Type in the AUTOSAR EcuC specification. • In case the ComSignal is a UINT8_N, UINT8_DYN, the string shall be interpreted as a decimal representation of the characters separated by blanks, e.g. "97 98 100" means a string "abd", where the char "a" is in byte 0(lowest address), "b" is in byte 1, and "d" is in byte 2 and (highest address). For the ComSignalType UINT8_DYN, the dynamic length shall be set to the number of configured characters. An empty string "" shall be interpreted as 0-sized dynamic signal.	
Template Description	
Defines and enables the ComTimeoutSubstituition for this ISignal.	
M2 Parameter	
`ISignal.timeoutSubstitutionValue`	
Mapping Rule	**Mapping Type**
The mapping of ComTimeoutSubstitutionValue depends on the setting in the ISignal.dataType Policy: - ISignal.dataTypePolicy = override or legacy: SystemTemplate::Fibex::FibexCore::Core Communication::ISignal.timeoutSubstitutionValue - ISignal.dataTypePolicy = networkRepresentationFromComSpec: SWComponent Template::Communication::NonequeuedReceiverComSpec.timeoutSubstitutionValue - ISignal.dataTypePolicy = transformingISignal this is not supported.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_10006]

BSW Module	**BSW Context**
Com	Com/ComConfig/ComSignalGroup
BSW Parameter	**BSW Type**
ComTimeout	ECUC-FLOAT-PARAM-DEF
BSW Description	
Defines the length of the deadline monitoring timeout period in seconds. The period for the first timeout period can be configured separately by ECUC_Com_00183.	
Template Description	

▽

△

ISignalPort.timeout:

- ISignalPort with communicationDirection = in:

Optional timeout value in seconds for the reception of the ISignal. The attribute value is used to configure the ComTimeout in the COM module. The RTE ignores this attribute. The timeout can also be specified with the NonqueuedReceiverCom Spec.aliveTimeout attribute. If a full DataMapping exists for the SystemSignal and the value is available in the configured ReceiverComSpec, then the timeout value in the ReceiverComSpec overrides this optional timeout specification during the creation of the Base Ecu Configuration of the COM module.

- ISignalPort with communicationDirection = out:

Optional timeout value in seconds for the transmission of the ISignal. The attribute value is used to configure the Com Timeout in the COM module. The RTE ignores this attribute. The timeout can also be specified with the SenderCom Spec.transmissionAcknowledge.timeout attribute. If a full DataMapping exists for the SystemSignal and the value is available in the configured SenderComSpec, then the timeout value in the SenderComSpec overrides this optional timeout specification during the creation of the Base Ecu Configuration of the COM module.

This attribute can be used in the following cases:

- legacy signal where the System Description doesn't use a complete Software Component Description (VFB View) and where the DataMapping is missing.
- bus monitoring use cases in which the DataMapping is ignored.

TransmissionAcknowledgementRequest.timeout:
Number of seconds before an error is reported or in case of allowed redundancy, the value is sent again.

NonqueuedReceiverComSpec.aliveTimeout:
Specify the amount of time (in seconds) after which the software component (via the RTE) needs to be notified if the corresponding data item have not been received according to the specified timing description.

If the aliveTimeout attribute is 0 no timeout monitoring shall be performed.

M2 Parameter	
`ISignalPort.timeout`, `TransmissionAcknowledgementRequest.timeout`, `NonqueuedReceiverComSpec.aliveTimeout`	
Mapping Rule	**Mapping Type**
TX Signals: If a full DataMapping exist for the SystemSignal this information may be available from a configured SenderComSpec.transmissionAcknowledge.timeout that specifies the amount of time (in seconds) after which the software component (via the RTE) needs to be notified if the corresponding data item have not been transmitted according to the specified timing description. In this case the timeout value in SenderComSpec overrides the optional timeout specification in the System Template defined on the ISignalPort. RX Signals: If a full DataMapping exist for the SystemSignal this information may be available from a configured NonqueuedReceiverComSpec.aliveTimeout. In this case the timeout value in ReceiverComSpec overrides the optional timeout specification in the System Template defined on the ISignalPort. Please note that the SWS_RTE defines an algorithm to finally set the applicable timeout value.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Com_00263]

H.4 Dcm

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsd
BSW Parameter	**BSW Type**
DcmDsdServiceRequestManufacturerNotification	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	

▽

△

The name of this container is used to define the name of the R-Port through which the DCM accesses the interface Service RequestNotification. The R-Port is named ServiceRequestManufacturerNotification_{Name} where {Name} is the name of the container DcmDsdServiceRequestManufacturerNotification. The lowerMultiplicity is 0: If container DcmDsdServiceRequestManufacturerNotification does not exist the Indication API is not available.
Template Description
This represents the ability to define whether the usage of PortInterface ServiceRequestNotification has the characteristics of being initiated by a manufacturer or by a supplier.
M2 Parameter
DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType

Mapping Rule	**Mapping Type**
If DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType is set to DiagnosticServiceRequestCallbackTypeEnum.requestCallbackTypeManufacturer then DcmDsdServiceRequestManufacturerNotification shall exist and the value of DcmDsdServiceRequestManufacturerNotification.shortName shall be taken from the SwcServiceDependency.shortName that aggregates the DiagnosticCommunicationManagerNeeds.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00681]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsd

BSW Parameter	**BSW Type**
DcmDsdServiceRequestSupplierNotification	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
The name of this container is used to define the name of the R-Port through which the DCM accesses the interface Service RequestNotification. The R-Port is named ServiceRequestSupplierNotification_<SWC> where <SWC> is the name of the container DcmDsdServiceRequestSupplierNotification. The lowerMultiplicity is 0: If the container DcmDsdRequestSupplierNotification does not exist the Indication API is not available.	
Template Description	
This represents the ability to define whether the usage of PortInterface ServiceRequestNotification has the characteristics of being initiated by a manufacturer or by a supplier.	
M2 Parameter	
DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType	

Mapping Rule	**Mapping Type**
If DiagnosticCommunicationManagerNeeds.serviceRequestCallbackType is set to DiagnosticServiceRequestCallbackTypeEnum.requestCallbackTypeSupplier then DcmDsdServiceRequestSupplierNotification shall exist and the value of DcmDsdServiceRequestSupplierNotification.shortName shall be taken from the SwcServiceDependency.shortName that aggregates the DiagnosticCommunicationManagerNeeds.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00816]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspData

BSW Parameter	**BSW Type**
DcmDspDataUsePort	ECUC-ENUMERATION-PARAM-DEF
BSW Description	
Defines which interface shall be used to access the data.	

▽

△

Template Description	
This attribute controls whether interaction requires the software-component to react synchronously on a request or whether it processes the request in background but still the DCM has to issue the call again to eventually obtain the result of the request.	
M2 Parameter	
DiagnosticValueNeeds.processingStyle	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00713]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspData/DcmDspDataUsePort
BSW Parameter	**BSW Type**
USE_DATA_ASYNCH_CLIENT_SERVER	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
The DCM will access the Data using an R-Port requiring a asynchronous ClientServerInterface DataServices_{Data}. The R-Port is named DataServices_{Data} where {Data} is the name of the container DcmDspData.	
Template Description	
The software-component processes the request in background but still the Dcm has to issue the call again to eventually obtain the result of the request.	
M2 Parameter	
DiagnosticProcessingStyleEnum.processingStyleAsynchronous	
Mapping Rule	**Mapping Type**
DiagnosticServiceSwMapping is having a SwcServiceDependency and ServiceNeeds::Diagnostic ProcessingStyleEnum is equal to processingStyleAsynchronous	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspData/DcmDspDataUsePort
BSW Parameter	**BSW Type**
USE_DATA_ASYNCH_CLIENT_SERVER_ERROR	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
The Dcm will access the Data using an R-Port requiring a asynchronous ClientServerInterface DataServices_{Data}. The parameter ErrorCode can be returned to allow the application to trigger a negative response during the operation. The R-Port is named DataServices_{Data} where {Data} is the name of the container DcmDspData.	
Template Description	
The software-component processes the request in background but still the Dcm has to issue the call again to eventually obtain the result of the request or handle error code.	
M2 Parameter	
DiagnosticProcessingStyleEnum.processingStyleAsynchronousWithError	
Mapping Rule	**Mapping Type**
DiagnosticServiceSwMapping is having a SwcServiceDependency and ServiceNeeds::Diagnostic ProcessingStyleEnum is equal to processingStyleAsynchronousWithError	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspData/DcmDspDataUsePort
BSW Parameter	**BSW Type**
USE_DATA_SYNCH_CLIENT_SERVER	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
The DCM will access the Data using an R-Port requiring a synchronous ClientServerInterface DataServices_{Data}. The R-Port is named DataServices_{Data} where {Data} is the name of the container DcmDspData.	
Template Description	
The software-component is supposed to react synchronously on the request.	
M2 Parameter	
DiagnosticProcessingStyleEnum.processingStyleSynchronous	
Mapping Rule	**Mapping Type**
DiagnosticServiceSwMapping is having a SwcServiceDependency and ServiceNeeds::Diagnostic ProcessingStyleEnum is equal to processingStyleSynchronous	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspData/DcmDspDiagnosisScaling/DcmDspAlternativeData Interface
BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a VariableDataPrototype in a DataInterface. The CompuMethod of the data type of the referenced VariableDataPrototype will be applied to the data type of the Variable DataPrototype in the interface used by the Dcm.	
Template Description	
A VariableDataPrototype represents a formalized generic piece of information that is typically mutable by the application software layer. VariableDataPrototype is used in various contexts and the specific context gives the otherwise generic VariableDataPrototype a dedicated semantics.	
M2 Parameter	
VariableDataPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00995]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspData/DcmDspDiagnosisScaling/DcmDspAlternativeData Interface
BSW Parameter	**BSW Type**
DcmPortInterfaceMapping	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Optional reference to PortInterfaceMapping which defines the mapping rules. The PortInterfaceMapping is used to get the DataPrototypeMapping that describes a conversion between the data prototype referenced by DcmDataElement and the data prototype referenced from DcmDspExternalSRDataElementClass.	
Template Description	

▽

△

Specifies one PortInterfaceMapping to support the connection of Ports typed by two different PortInterfaces with PortInterface elements having unequal names and/or unequal semantic (resolution or range).	
M2 Parameter	
PortInterfaceMapping	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00996]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspData/DcmDspDiagnosisScaling/DcmDspAlternativeDataType
BSW Parameter	**BSW Type**
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.	
Template Description	
A primitive data type defines a set of allowed values.	
M2 Parameter	
ApplicationPrimitiveDataType	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspDidInfo/DcmDspDidControl
BSW Parameter	**BSW Type**
DcmDspDidFreezeCurrentState	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
This indicates the presence of "FreezeCurrentState".	
Template Description	
DiagnosticIOControl.freezeCurrentState: Setting this attribute to true represents the ability of the Dcm to execute a freezeCurrentState. **DiagnosticIoControlNeeds.freezeCurrentStateSupported:** This attribute determines, if the referenced port supports temporary freezing of I/O value.	
M2 Parameter	
DiagnosticIOControl.freezeCurrentState, DiagnosticIoControlNeeds.freezeCurrentStateSupported	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00624]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspDidInfo/DcmDspDidControl
BSW Parameter	**BSW Type**
DcmDspDidResetToDefault	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
This indicates the presence of "ResetToDefault".	
Template Description	
DiagnosticIOControl.resetToDefault: Setting this attribute to true represents the ability of the Dcm to execute a resetToDefault. **DiagnosticIoControlNeeds.resetToDefaultSupported:** This represents a flag for the existence of the ResetToDefault operation in the service interface.	
M2 Parameter	
`DiagnosticIOControl.resetToDefault`, `DiagnosticIoControlNeeds.resetToDefaultSupported`	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00623]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspDidInfo/DcmDspDidControl
BSW Parameter	**BSW Type**
DcmDspDidShortTermAdjustment	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
This indicates the presence of "ShortTermAdjustment".	
Template Description	
DiagnosticIOControl.shortTermAdjustment: Setting this attribute to true represents the ability of the Dcm to execute a shortTermAdjustment. **DiagnosticIoControlNeeds.shortTermAdjustmentSupported:** This attribute determines, if the referenced port supports temporarily setting of I/O value to a specific value provided by the diagnostic tester.	
M2 Parameter	
`DiagnosticIOControl.shortTermAdjustment`, `DiagnosticIoControlNeeds.shortTermAdjustmentSupported`	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00625]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspMemoryTransfer
BSW Parameter	**BSW Type**
DcmDspMemoryTransferUsePort	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
If this parameter is set to true, the Dcm uses a port requiring a PortInterface UploadDownload. If the parameter is false, the DCM uses the according C-API callouts.	
Template Description	
This meta-class represents the ability to specify needs regarding upload and download by means of diagnostic services.	



△

M2 Parameter	
DiagnosticUploadDownloadNeeds	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01133]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspPid/DcmDspPidData/DcmDspPidService01/DcmDspDiagnosisScaling/DcmDspAlternativeDataInterface
BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a VariableDataPrototype in a DataInterface. The CompuMethod of the data type of the referenced VariableDataPrototype will be applied to the data type of the Variable DataPrototype in the interface used by the Dcm.	
Template Description	
A VariableDataPrototype represents a formalized generic piece of information that is typically mutable by the application software layer. VariableDataPrototype is used in various contexts and the specific context gives the otherwise generic VariableDataPrototype a dedicated semantics.	
M2 Parameter	
VariableDataPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00995]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspPid/DcmDspPidData/DcmDspPidService01/DcmDspDiagnosisScaling/DcmDspAlternativeDataInterface
BSW Parameter	**BSW Type**
DcmPortInterfaceMapping	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Optional reference to PortInterfaceMapping which defines the mapping rules. The PortInterfaceMapping is used to get the DataPrototypeMapping that describes a conversion between the data prototype referenced by DcmDataElement and the data prototype referenced from DcmDspExternalSRDataElementClass.	
Template Description	
Specifies one PortInterfaceMapping to support the connection of Ports typed by two different PortInterfaces with PortInterface elements having unequal names and/or unequal semantic (resolution or range).	
M2 Parameter	
PortInterfaceMapping	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00996]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspPid/DcmDspPidData/DcmDspPidService01/DcmDspDiagnosisScaling/DcmDspAlternativeDataType
BSW Parameter	**BSW Type**
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.	
Template Description	
A primitive data type defines a set of allowed values.	
M2 Parameter	
ApplicationPrimitiveDataType	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine
BSW Parameter	**BSW Type**
DcmDspRequestRoutineResults	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
Provides the configuration of RequestResult subservice for RoutineControl service. Existence indicates that the Request RoutineResults in the RoutineControl is supported.	
Template Description	
DiagnosticRoutine.requestResult: This represents the ability to request the result of a running routine. **DiagnosticRoutineNeeds.diagRoutineType:** This denotes the type of diagnostic routine which is implemented by the referenced server port.	
M2 Parameter	
DiagnosticRoutine.requestResult, DiagnosticRoutineNeeds.diagRoutineType	
Mapping Rule	**Mapping Type**
1:1 mapping for DiagnosticRoutine.requestResult OR DiagnosticRoutineNeeds.diagRoutineTyoe == asynchronous	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01023]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspRequestRoutineResults/DcmDspRequestRoutineResultsIn/DcmDspRequestRoutineResultsInSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData
BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	

▽

△

Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype. The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.	
Template Description	
An argument of an operation, carries direction and implementation information.	
M2 Parameter	
ArgumentDataPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspRequestRoutineResults/DcmDspRequestRoutineResultsIn/DcmDspRequestRoutineResultsInSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType
BSW Parameter	**BSW Type**
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.	
Template Description	
A primitive data type defines a set of allowed values.	
M2 Parameter	
ApplicationPrimitiveDataType	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspRequestRoutineResults/DcmDspRequestRoutineResultsIn/DcmDspRequestRoutineResultsInSignalCompositePool/DcmDspRequestRoutineResultsInSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData
BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype. The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.	
Template Description	
An argument of an operation, carries direction and implementation information.	
M2 Parameter	
ArgumentDataPrototype	
Mapping Rule	**Mapping Type**

▽

△

1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspRequestRoutineResults/DcmDspRequestRoutineResultsIn/DcmDspRequestRoutineResultsInSignalCompositePool/DcmDspRequestRoutineResultsInSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType

BSW Parameter	**BSW Type**
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY.

The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.

Template Description

A primitive data type defines a set of allowed values.

M2 Parameter

ApplicationPrimitiveDataType

Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspRequestRoutineResults/DcmDspRequestRoutineResultsOut/DcmDspRequestRoutineResultsOutSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData

BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype.

The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.

Template Description

An argument of an operation, carries direction and implementation information.

M2 Parameter

ArgumentDataPrototype

Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspRequestRoutineResults/DcmDspRequestRoutineResultsOut/DcmDspRequestRoutineResultsOutSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType

BSW Parameter	BSW Type
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY.

The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.

Template Description

A primitive data type defines a set of allowed values.

M2 Parameter

`ApplicationPrimitiveDataType`

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspRequestRoutineResults/DcmDspRequestRoutineResultsOut/DcmDspRequestRoutineResultsOutSignalCompositePool/DcmDspRequestRoutineResultsOutSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData

BSW Parameter	BSW Type
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype.

The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.

Template Description

An argument of an operation, carries direction and implementation information.

M2 Parameter

`ArgumentDataPrototype`

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspRequestRoutineResults/DcmDspRequestRoutineResultsOut/DcmDspRequestRoutineResultsOutSignalCompositePool/DcmDspRequestRoutineResultsOutSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType

BSW Parameter	BSW Type
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

▽

△

Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.
Template Description
A primitive data type defines a set of allowed values.
M2 Parameter
ApplicationPrimitiveDataType

Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine

BSW Parameter	**BSW Type**
DcmDspStartRoutine	ECUC-PARAM-CONF-CONTAINER-DEF

BSW Description
Provides the configuration of Start subservice for RoutineControl service.
Template Description
DiagnosticRoutine.start: This represents the ability to start a routine **DiagnosticRoutineNeeds:** Specifies the general needs on the configuration of the Diagnostic Communication Manager (Dcm) which are not related to a particular item (e.g. a PID). The main use case is the mapping of service ports to the Dcm which are not related to a particular item.
M2 Parameter
DiagnosticRoutine.start, DiagnosticRoutineNeeds

Mapping Rule	**Mapping Type**
A routine always comes with a start routine, independently of whether the execution is done synchronously or asynchronously.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01021]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStartRoutine/DcmDspStartRoutineIn/DcmDspStartRoutineInSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData

BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF

BSW Description
Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype. The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.
Template Description
An argument of an operation, carries direction and implementation information.
M2 Parameter
ArgumentDataPrototype

▽

△

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStartRoutine/DcmDspStartRoutineIn/DcmDspStartRoutineInSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType
BSW Parameter	**BSW Type**
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.	
Template Description	
A primitive data type defines a set of allowed values.	
M2 Parameter	
ApplicationPrimitiveDataType	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStartRoutine/DcmDspStartRoutineIn/DcmDspStartRoutineInSignalCompositePool/DcmDspStartRoutineInSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData
BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype. The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.	
Template Description	
An argument of an operation, carries direction and implementation information.	
M2 Parameter	
ArgumentDataPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStartRoutine/DcmDspStartRoutineIn/DcmDspStartRoutineInSignalCompositePool/DcmDspStartRoutineInSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType

BSW Parameter	BSW Type
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY.

The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.

Template Description

A primitive data type defines a set of allowed values.

M2 Parameter

ApplicationPrimitiveDataType

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStartRoutine/DcmDspStartRoutineOut/DcmDspStartRoutineOutSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData

BSW Parameter	BSW Type
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype.

The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.

Template Description

An argument of an operation, carries direction and implementation information.

M2 Parameter

ArgumentDataPrototype

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStartRoutine/DcmDspStartRoutineOut/DcmDspStartRoutineOutSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType

BSW Parameter	BSW Type
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

▽

△

Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.
Template Description
A primitive data type defines a set of allowed values.
M2 Parameter
ApplicationPrimitiveDataType

Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStartRoutine/DcmDspStartRoutineOut/DcmDspStartRoutineOutSignalCompositePool/DcmDspStartRoutineOutSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData

BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype. The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.	
Template Description	
An argument of an operation, carries direction and implementation information.	
M2 Parameter	
ArgumentDataPrototype	

Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStartRoutine/DcmDspStartRoutineOut/DcmDspStartRoutineOutSignalCompositePool/DcmDspStartRoutineOutSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType

BSW Parameter	**BSW Type**
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.	
Template Description	
A primitive data type defines a set of allowed values.	
M2 Parameter	
ApplicationPrimitiveDataType	

▽

△

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine
BSW Parameter	**BSW Type**
DcmDspStopRoutine	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
Provides the configuration of Stop subservice for RoutineControl service. Existence indicates that the StopRoutine in the RoutineControl is supported.	
Template Description	
DiagnosticRoutine.stop: This represents the ability to stop a running routine. **DiagnosticRoutineNeeds.diagRoutineType:** This denotes the type of diagnostic routine which is implemented by the referenced server port.	
M2 Parameter	
`DiagnosticRoutine.stop`, `DiagnosticRoutineNeeds.diagRoutineType`	
Mapping Rule	**Mapping Type**
1:1 mapping for DiagnosticRoutine.stop OR DiagnosticRoutineNeeds.diagRoutineType == asynchronous	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01022]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStopRoutine/DcmDspStopRoutineIn/DcmDspStopRoutineInSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData
BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype. The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.	
Template Description	
An argument of an operation, carries direction and implementation information.	
M2 Parameter	
`ArgumentDataPrototype`	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStopRoutine/DcmDspStopRoutineIn/DcmDspStopRoutineInSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType

BSW Parameter	BSW Type
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY.

The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.

Template Description

A primitive data type defines a set of allowed values.

M2 Parameter

`ApplicationPrimitiveDataType`

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStopRoutine/DcmDspStopRoutineIn/DcmDspStopRoutineInSignalCompositePool/DcmDspStopRoutineInSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData

BSW Parameter	BSW Type
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype.

The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.

Template Description

An argument of an operation, carries direction and implementation information.

M2 Parameter

`ArgumentDataPrototype`

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	BSW Context
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStopRoutine/DcmDspStopRoutineIn/DcmDspStopRoutineInSignalCompositePool/DcmDspStopRoutineInSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType

BSW Parameter	BSW Type
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF

BSW Description



△

Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.	
Template Description	
A primitive data type defines a set of allowed values.	
M2 Parameter	
ApplicationPrimitiveDataType	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStopRoutine/DcmDspStopRoutineOut/DcmDspStopRoutineOutSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData
BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype. The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.	
Template Description	
An argument of an operation, carries direction and implementation information.	
M2 Parameter	
ArgumentDataPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStopRoutine/DcmDspStopRoutineOut/DcmDspStopRoutineOutSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType
BSW Parameter	**BSW Type**
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.	
Template Description	
A primitive data type defines a set of allowed values.	
M2 Parameter	
ApplicationPrimitiveDataType	
Mapping Rule	**Mapping Type**

▽

△

1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStopRoutine/DcmDspStopRoutineOut/DcmDspStopRoutineOutSignalCompositePool/DcmDspStopRoutineOutSignal/DcmDspArgumentScaling/DcmDspAlternativeArgumentData
BSW Parameter	**BSW Type**
DcmDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ArgumentDataPrototype. The CompuMethod of the data type of the referenced ArgumentDataPrototype will be applied to the data type of the ArgumentDataPrototype in the interface used by the Dcm.	
Template Description	
An argument of an operation, carries direction and implementation information.	
M2 Parameter	
ArgumentDataPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_01056]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspRoutine/DcmDspStopRoutine/DcmDspStopRoutineOut/DcmDspStopRoutineOutSignalCompositePool/DcmDspStopRoutineOutSignal/DcmDspArgumentScaling/DcmDspAlternativeDataType
BSW Parameter	**BSW Type**
DcmApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dcm.	
Template Description	
A primitive data type defines a set of allowed values.	
M2 Parameter	
ApplicationPrimitiveDataType	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00998]

BSW Module	**BSW Context**
Dcm	Dcm/DcmConfigSet/DcmDsp/DcmDspSecurity
BSW Parameter	**BSW Type**

▽

△

DcmDspSecurityRow	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
Definition of a single Row of configuration for security level configuration (per security level) The name of this container is used to define the name of the R-Port through which the DCM accesses the interface SecurityAccess_{SecurityLevel}. The R-Port is named SecurityAccess_{SecurityLevel} where {SecurityLevel} is the name of the container DcmDspSecurityRow. If there is no reference, no check of security level shall be done.	
Template Description	
This meta-class represents the needs of a software-component to verify the access to security level via diagnostic services.	
M2 Parameter	
DiagnosticsCommunicationSecurityNeeds	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dcm_00759]

H.5 Dem

BSW Module	**BSW Context**
Dem	Dem/DemConfigSet
BSW Parameter	**BSW Type**
DemDebounceCounterBasedClass	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
This container contains the configuration of Debounce Counter Based Class	
Template Description	
This meta-class represents the ability to indicate that the counter-based debounce algorithm shall be used by the DEM for this diagnostic monitor. This is related to set the ECUC choice container DemDebounceAlgorithmClass to DemDebounceCounterBased.	
M2 Parameter	
DiagEventDebounceCounterBased	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00881]

BSW Module	**BSW Context**
Dem	Dem/DemConfigSet/DemDebounceCounterBasedClass
BSW Parameter	**BSW Type**
DemDebounceCounterJumpDown	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
Switch for the activation of Jump-Down. true: Jump-Down activated false: Jump-Down deactivated	
Template Description	
This value activates or deactivates the counter jump-down behavior.	

▽

△

M2 Parameter	
DiagEventDebounceCounterBased.counterJumpDown	
Mapping Rule	**Mapping Type**
Shall be taken from DiagnosticExtract::DiagnosticCommonProps.debounceAlgorithm Props.debounceAlgorithm.counterJumpDown. Applicable if DiagnosticExtract::DiagnosticCommonProps.debounceAlgorithmProps.debounce Algorithm is modeled by means of a DiagEventDebounceCounterBased.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00685]

BSW Module	BSW Context
Dem	Dem/DemConfigSet/DemDebounceCounterBasedClass
BSW Parameter	**BSW Type**
DemDebounceCounterPassedThreshold	ECUC-INTEGER-PARAM-DEF
BSW Description	
Defines the value of the internal debounce counter, which indicates the passed status.	
Template Description	
This value defines the event-specific limit that indicates the "passed" counter status.	
M2 Parameter	
DiagEventDebounceCounterBased.counterPassedThreshold	
Mapping Rule	**Mapping Type**
Shall be taken from DiagnosticExtract::DiagnosticCommonProps.debounceAlgorithm Props.debounceAlgorithm.counterPassedThreshold. Applicable if DiagnosticExtract::DiagnosticCommonProps.debounceAlgorithmProps.debounce Algorithm is modeled by means of a DiagEventDebounceCounterBased.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00636]

BSW Module	BSW Context
Dem	Dem/DemConfigSet/DemEventParameter
BSW Parameter	**BSW Type**
DemDebounceAlgorithmClass	ECUC-CHOICE-CONTAINER-DEF
BSW Description	
Debounce algorithm class: counter based, time based, or monitor internal.	
Template Description	
This class represents the ability to specify the pre-debounce algorithm which is selected and/or required by the particular monitor. This class inherits from Identifiable in order to allow further documentation of the expected or implemented debouncing and to use the category for the identification of the expected / implemented debouncing.	
M2 Parameter	
DiagEventDebounceAlgorithm	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00604]

BSW Module	BSW Context
Dem	Dem/DemConfigSet/DemEventParameter/DemDebounceAlgorithmClass
BSW Parameter	**BSW Type**
DemDebounceCounterBased	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
This container contains the configuration (parameters) for counter based debouncing.	
Template Description	
This meta-class represents the ability to indicate that the counter-based debounce algorithm shall be used by the DEM for this diagnostic monitor. This is related to set the ECUC choice container DemDebounceAlgorithmClass to DemDebounceCounterBased.	
M2 Parameter	
DiagEventDebounceCounterBased	
Mapping Rule	**Mapping Type**
There are two ways to derive the existence of DemDebounceCounterBased: 1. DiagEventNeeds,diagEventDebounceAlgoritm exists and is modeled as a DiagEventDebounce CounterBased. 2. DiagnosticContributionSet.commonProperties.debounceAlgorithmProps.debounceAlgorithm exists and is modeled as a DiagEventDebounceCounterBased If both alternatives exist at the same time then the definition ot DiagnosticContributionSet.common Properties.debounceAlgorithmProps.debounceAlgorithm shall be handled with priority.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00711]

BSW Module	BSW Context
Dem	Dem/DemConfigSet/DemEventParameter/DemDebounceAlgorithmClass
BSW Parameter	**BSW Type**
DemDebounceMonitorInternal	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
This container contains the configuration (parameters) for monitor internal debouncing.	
Template Description	
This meta-class represents the ability to indicate that no Dem pre-debounce algorithm shall be used for this diagnostic monitor. The SWC might implement an internal debouncing algorithm and report qualified (debounced) results to the Dem/DM.	
M2 Parameter	
DiagEventDebounceMonitorInternal	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00712]

BSW Module	BSW Context
Dem	Dem/DemConfigSet/DemEventParameter/DemDebounceAlgorithmClass
BSW Parameter	**BSW Type**
DemDebounceTimeBased	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
This container contains the configuration (parameters) for time based debouncing.	
Template Description	



△

This meta-class represents the ability to indicate that the time-based pre-debounce algorithm shall be used by the Dem for this diagnostic monitor. This is related to set the EcuC choice container DemDebounceAlgorithmClass to DemDebounceTimeBase.	
M2 Parameter	
DiagEventDebounceTimeBased	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00713]

BSW Module	**BSW Context**
Dem	Dem/DemConfigSet/DemEventParameter
BSW Parameter	**BSW Type**
DemFFPrestorageInNvm	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
If the event uses a pre-stored freeze-frame this attribute indicates if the event requires the pre-stored data to be stored in non-volatile memory. TRUE = store the pre-stored data in non-volatile memory, FALSE = pre-stored data is not stored in non-volatile memory.	
Template Description	
DiagnosticEventNeeds.prestoredFreezeframeStoredInNvm: If the Event uses a prestored freeze-frame (using the operations PrestoreFreezeFrame and ClearPrestoredFreezeFrame of the service interface DiagnosticMonitor) this attribute indicates if the Event requires the data to be stored in non-volatile memory. TRUE = Dem shall store the prestored data in non-volatile memory, FALSE = Data can be lost at shutdown (not stored in Nvm). **DiagnosticEvent.prestoredFreezeframeStoredInNvm:** If the Event uses a prestored freeze-frame (using the operations PrestoreFreezeFrame and ClearPrestoredFreezeFrame of the service interface DiagnosticMonitor) this attribute indicates if the Event requires the data to be stored in non-volatile memory. TRUE = Dem shall store the prestored data in non-volatile memory, FALSE = Data can be lost at shutdown (not stored in Nvm)	
M2 Parameter	
DiagnosticEventNeeds.prestoredFreezeframeStoredInNvm, DiagnosticEvent.prestoredFreezeframeStoredInNvm	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00948]

BSW Module	**BSW Context**
Dem	Dem/DemGeneral/DemDataElementClass/DemExternalCSDataElementClass/DemDataElementDataType
BSW Parameter	**BSW Type**
SINT64	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
Type of the data is sint64.	
Template Description	

▽

△

BaseTypeDirectDefinition.baseTypeEncoding: This specifies, how an object of the current BaseType is encoded, e.g. in an ECU within a message sequence. **BaseTypeDirectDefinition.baseTypeSize:** Describes the length of the data type specified in the container in bits. **DiagnosticDataElement.arraySizeSemantics:** This attribute controls the meaning of the value of the array size. **DiagnosticDataElement.maxNumberOfElements:** The existence of this attribute turns the data instance into an array of data. The attribute determines the size of the array in terms of how many elements the array can take.
M2 Parameter
BaseTypeDirectDefinition.baseTypeEncoding, BaseTypeDirectDefinition.baseTypeSize, DiagnosticDataElement.arraySizeSemantics, DiagnosticDataElement.maxNumberOfElements

Mapping Rule	Mapping Type
• baseTypeEncoding = 2C • baseTypeSize = 64 • maxNumberOfElements shall not exist • arraySizeSemantics shall not exist	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
Dem	Dem/DemGeneral/DemDataElementClass/DemExternalCSDataElementClass/DemDataElement DataType

BSW Parameter	BSW Type
UINT64_N	ECUC-ENUMERATION-LITERAL-DEF

BSW Description
Type of the data is uint64 array.

Template Description
BaseTypeDirectDefinition.baseTypeEncoding: This specifies, how an object of the current BaseType is encoded, e.g. in an ECU within a message sequence. **BaseTypeDirectDefinition.baseTypeSize:** Describes the length of the data type specified in the container in bits. **DiagnosticDataElement.arraySizeSemantics:** This attribute controls the meaning of the value of the array size. **DiagnosticDataElement.maxNumberOfElements:** The existence of this attribute turns the data instance into an array of data. The attribute determines the size of the array in terms of how many elements the array can take.
M2 Parameter
BaseTypeDirectDefinition.baseTypeEncoding, BaseTypeDirectDefinition.baseTypeSize, DiagnosticDataElement.arraySizeSemantics, DiagnosticDataElement.maxNumberOfElements

Mapping Rule	Mapping Type
• baseTypeEncoding = NONE • baseTypeSize = 64 • maxNumberOfElements exists and value is greater than 0 (cf. TPS_DEXT_01001) • arraySizeSemantics either does not exist or exists and is set to [ARMetaClassRole{fixed Size}{ArraySizeSemanticsEnum} (cf. TPS_DEXT_01001)	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
Dem	Dem/DemGeneral/DemDataElementClass/DemExternalCSDataElementClass
BSW Parameter	**BSW Type**
DemDataElementProvideMonitorData	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
If the parameter is set to true, the generated function call to retrieve the data element has the monitorData0 as additional first parameter.	
Template Description	
This attribute defines whether additional monitor data shall be added to the reporting of events.	
M2 Parameter	
DiagnosticEventNeeds.usesMonitorData	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00951]

BSW Module	BSW Context
Dem	Dem/DemGeneral/DemDataElementClass/DemExternalSRDataElementClass/DemDataElement DataType
BSW Parameter	**BSW Type**
SINT64	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
Type of the data is sint64.	
Template Description	
BaseTypeDirectDefinition.baseTypeEncoding: This specifies, how an object of the current BaseType is encoded, e.g. in an ECU within a message sequence. **BaseTypeDirectDefinition.baseTypeSize:** Describes the length of the data type specified in the container in bits. **DiagnosticDataElement.arraySizeSemantics:** This attribute controls the meaning of the value of the array size. **DiagnosticDataElement.maxNumberOfElements:** The existence of this attribute turns the data instance into an array of data. The attribute determines the size of the array in terms of how many elements the array can take.	
M2 Parameter	
BaseTypeDirectDefinition.baseTypeEncoding, BaseTypeDirectDefinition.baseTypeSize, DiagnosticDataElement.arraySizeSemantics, DiagnosticDataElement.maxNumberOfElements	
Mapping Rule	**Mapping Type**
• baseTypeEncoding = 2C • baseTypeSize = 64 • maxNumberOfElements shall not exist • arraySizeSemantics shall not exist	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
Dem	Dem/DemGeneral/DemDataElementClass/DemExternalSRDataElementClass/DemDataElement DataType
BSW Parameter	**BSW Type**

▽

△

UINT64_N	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
Type of the data is uint64 array.	
Template Description	
BaseTypeDirectDefinition.baseTypeEncoding: This specifies, how an object of the current BaseType is encoded, e.g. in an ECU within a message sequence. **BaseTypeDirectDefinition.baseTypeSize:** Describes the length of the data type specified in the container in bits. **DiagnosticDataElement.arraySizeSemantics:** This attribute controls the meaning of the value of the array size. **DiagnosticDataElement.maxNumberOfElements:** The existence of this attribute turns the data instance into an array of data. The attribute determines the size of the array in terms of how many elements the array can take.	
M2 Parameter	
BaseTypeDirectDefinition.baseTypeEncoding, BaseTypeDirectDefinition.baseTypeSize, DiagnosticDataElement.arraySizeSemantics, DiagnosticDataElement.maxNumberOfElements	
Mapping Rule	**Mapping Type**
• baseTypeEncoding = NONE • baseTypeSize = 64 • maxNumberOfElements exists and value is greater than 0 (cf. TPS_DEXT_01001) • arraySizeSemantics either does not exist or exists and is set to [ARMetaClassRole{fixed Size}{ArraySizeSemanticsEnum} (cf. TPS_DEXT_01001)	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	**BSW Context**
Dem	Dem/DemGeneral/DemDataElementClass/DemExternalSRDataElementClass/DemDiagnosis Scaling/DemAlternativeDataInterface
BSW Parameter	**BSW Type**
DemDataElement	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a VariableDataPrototype in a DataInterface. The CompuMethod of the data type of the referenced VariableDataPrototype will be applied to the data type of the Variable DataPrototype in the interface used by the Dem.	
Template Description	
A VariableDataPrototype represents a formalized generic piece of information that is typically mutable by the application software layer. VariableDataPrototype is used in various contexts and the specific context gives the otherwise generic VariableDataPrototype a dedicated semantics.	
M2 Parameter	
VariableDataPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00845]

BSW Module	**BSW Context**
Dem	Dem/DemGeneral/DemDataElementClass/DemExternalSRDataElementClass/DemDiagnosis Scaling/DemAlternativeDataInterface

▽

△

BSW Parameter	BSW Type
DemPortInterfaceMapping	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Optional reference to PortInterfaceMapping which defines the mapping rules. The PortInterfaceMapping is used to get the DataPrototypeMapping that describes a conversion between the data prototype referenced by DemDataElement and the data prototype referenced from DcmDspExternalSRDataElementClass.	
Template Description	
Specifies one `PortInterfaceMapping` to support the connection of Ports typed by two different `PortInterface`s with PortInterface elements having unequal names and/or unequal semantic (resolution or range).	
M2 Parameter	
`PortInterfaceMapping`	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00846]

BSW Module	BSW Context
Dem	Dem/DemGeneral/DemDataElementClass/DemExternalSRDataElementClass/DemDiagnosis Scaling/DemAlternativeDataType
BSW Parameter	**BSW Type**
DemApplicationDataType	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Alternative Diagnosis Representation for the data defined by the means of a ApplicationDataType of category VALUE, BOOLEAN or ARRAY. The CompuMethod that applies to the referenced ApplicationDataType in case of category VALUE or BOOLEAN will be applied to the data type of the VariableDataPrototype in the interface used by the Dem.	
Template Description	
A primitive data type defines a set of allowed values.	
M2 Parameter	
`ApplicationPrimitiveDataType`	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00848]

BSW Module	BSW Context
Dem	Dem/DemGeneral/DemEventMemorySet
BSW Parameter	**BSW Type**
DemClearDTCNotification	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
Contains callback function definition which are called during clear DTC operations.	
Template Description	
This meta-class represents the needs of a software-component interested to get information regarding any DTC status change.	
M2 Parameter	
`DtcStatusChangeNotificationNeeds`	

▽

△

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00925]

BSW Module	BSW Context
Dem	Dem/DemGeneral/DemEventMemorySet/DemClearDTCNotification
BSW Parameter	**BSW Type**
DemClearDtcNotificationTime	ECUC-ENUMERATION-PARAM-DEF
BSW Description	
Configure, whether the callback shall be called on start of a clear or after finishing a clear DTC operation (refer to <Module>_ ClearDtcNotification)	
Template Description	
This attribute determines the time when the notification about the DTC operation shall be executed. This attribute is only relevant for the configuration of the ClearDtcNotification.	
M2 Parameter	
`DtcStatusChangeNotificationNeeds.notificationTime`	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Dem_00927]

BSW Module	BSW Context
Dem	Dem/DemGeneral/DemEventMemorySet/DemClearDTCNotification/DemClearDtcNotificationTime
BSW Parameter	**BSW Type**
FINISH	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
Call callbacks after finishing DTC clear operation	
Template Description	
The ClearDtcCallback shall be executed when the DTC operation finishes.	
M2 Parameter	
`DiagnosticClearDtcNotificationEnum.finish`	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
Dem	Dem/DemGeneral/DemEventMemorySet/DemClearDTCNotification/DemClearDtcNotificationTime
BSW Parameter	**BSW Type**
START	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
Call callbacks at start of DTC clear operation	
Template Description	

▽

△

The ClearDtcCallback shall be executed when the DTC operation starts.	
M2 Parameter	
DiagnosticClearDtcNotificationEnum.start	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	

H.6 EcuC

BSW Module	**BSW Context**	
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType	
BSW Parameter		**BSW Type**
MetaDataItem		ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description		
The content of meta data in a Pdu consists of an ordered list of meta data items. This container represents a meta data item that is contained in meta data of a Pdu.		
Template Description		
This meta-class represents a single meta-data item.		
M2 Parameter		
MetaDataItem		
Mapping Rule		**Mapping Type**
1:1 mapping		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_EcuC_00074]

BSW Module	**BSW Context**	
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType/MetaDataItem	
BSW Parameter		**BSW Type**
MetaDataItemLength		ECUC-INTEGER-PARAM-DEF
BSW Description		
This parameter defines the length of a meta data item in bytes.		
Template Description		
This attribute determines the length of the MetaDataItem at run-time. The length is given in bytes.		
M2 Parameter		
MetaDataItem.length		
Mapping Rule		**Mapping Type**
1:1 mapping		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_EcuC_00075]

BSW Module	BSW Context
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType/MetaDataItem/MetaDataItemType
BSW Parameter	**BSW Type**
ADDRESS_EXTENSION_8	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
Address extension field (N_AE) of the mixed addressing modes with 11bit and 29bit CAN ID of ISO 15765-2. Size: 8 bits.	
Template Description	
This aggregation contributes the specification of the concrete meta-data item type.	
M2 Parameter	
MetaDataItem.metaDataItemType	
Mapping Rule	**Mapping Type**
SWComponentTemplate::PortInterface::MetaDataItem.metaDataItemType == ADDRESS_EXTENSION_16	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType/MetaDataItem/MetaDataItemType
BSW Parameter	**BSW Type**
CAN_ID_32	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
CAN ID according to ISO 11898-2, either 29 bits or 11 bits. Encoding according to Can_IdType. Size: 32 bits.	
Template Description	
This aggregation contributes the specification of the concrete meta-data item type.	
M2 Parameter	
MetaDataItem.metaDataItemType	
Mapping Rule	**Mapping Type**
SWComponentTemplate::PortInterface::MetaDataItem.metaDataItemType == CAN_ID_32	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType/MetaDataItem/MetaDataItemType
BSW Parameter	**BSW Type**
ETHERNET_MAC_64	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
For 48bit MAC addresses the upper 16 bit are not used by the producer and ignored by the consumer.	
Template Description	
This aggregation contributes the specification of the concrete meta-data item type.	
M2 Parameter	
MetaDataItem.metaDataItemType	
Mapping Rule	**Mapping Type**
SWComponentTemplate::PortInterface::MetaDataItem.metaDataItemType == ETHERNET_MAC_64	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType/MetaDataItem/MetaDataItemType
BSW Parameter	**BSW Type**
LIN_NAD_8	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
LIN node address as used in the LIN transport protocol. Size: 8 bits.	
Template Description	
This aggregation contributes the specification of the concrete meta-data item type.	
M2 Parameter	
MetaDataItem.metaDataItemType	
Mapping Rule	**Mapping Type**
SWComponentTemplate::PortInterface::MetaDataItem.metaDataItemType == LIN_NAD_8	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType/MetaDataItem/MetaDataItemType
BSW Parameter	**BSW Type**
PRIORITY_8	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
Priority field of SAE J1939 IDs, or Ethernet QoS parameter. Size: 8 bits.	
Template Description	
This aggregation contributes the specification of the concrete meta-data item type.	
M2 Parameter	
MetaDataItem.metaDataItemType	
Mapping Rule	**Mapping Type**
SWComponentTemplate::PortInterface::MetaDataItem.metaDataItemType == PRIORITY_8	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType/MetaDataItem/MetaDataItemType
BSW Parameter	**BSW Type**
SOCKET_CONNECTION_ID_16	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
SoAd socket connection ID. Size: 16 bits.	
Template Description	
This aggregation contributes the specification of the concrete meta-data item type.	
M2 Parameter	
MetaDataItem.metaDataItemType	
Mapping Rule	**Mapping Type**
SWComponentTemplate::PortInterface::MetaDataItem.metaDataItemType == SOCKET_CONNECTION_ID_16	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType/MetaDataItem/MetaDataItemType
BSW Parameter	**BSW Type**
SOURCE_ADDRESS_16	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
Source address of CanTp, FrTp, or DoIP transport protocol messages, or of SAE J1939 messages. Size: 16 bits.	
Template Description	
This aggregation contributes the specification of the concrete meta-data item type.	
M2 Parameter	
MetaDataItem.metaDataItemType	
Mapping Rule	**Mapping Type**
SWComponentTemplate::PortInterface::MetaDataItem.metaDataItemType == SOURCE_ADDRESS_16	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
EcuC	EcuC/EcucConfigSet/EcucPduCollection/MetaDataType/MetaDataItem/MetaDataItemType
BSW Parameter	**BSW Type**
TARGET_ADDRESS_16	ECUC-ENUMERATION-LITERAL-DEF
BSW Description	
Target address of CanTp, FrTp, or DoIP transport protocol messages, or destination address of SAE J1939 messages. Size: 16 bits.	
Template Description	
This aggregation contributes the specification of the concrete meta-data item type.	
M2 Parameter	
MetaDataItem.metaDataItemType	
Mapping Rule	**Mapping Type**
SWComponentTemplate::PortInterface::MetaDataItem.metaDataItemType == TARGET_ADDRESS_16	full
Mapping Status	**ECUC Parameter ID**
valid	

BSW Module	BSW Context
EcuC	EcuC/EcucConfigSet/EcucPduCollection/Pdu
BSW Parameter	**BSW Type**
MetaDataTypeRef	ECUC-REFERENCE-DEF
BSW Description	
Reference to meta data that is transported in the Pdu through the AUTOSAR layers.	
Template Description	

▽

△

VariableDataPrototype:
A `VariableDataPrototype` represents a formalized generic piece of information that is typically mutable by the application software layer. `VariableDataPrototype` is used in various contexts and the specific context gives the otherwise generic `VariableDataPrototype` a dedicated semantics.

SenderReceiverToSignalMapping:
Mapping of a sender receiver communication data element to a signal.

SystemSignal:
The system signal represents the communication system's view of data exchanged between SW components which reside on different ECUs. The system signals allow to represent this communication in a flattened structure, with exactly one system signal defined for each data element prototype sent and received by connected SW component instances.

ISignal:
Signal of the Interaction Layer. The RTE supports a "signal fan-out" where the same System Signal is sent in different Signal IPdus to multiple receivers.

To support the RTE "signal fan-out" each SignalIPdu contains ISignals. If the same System Signal is to be mapped into several SignalIPdus there is one ISignal needed for each ISignalToIPduMapping.

ISignals describe the Interface between the Precompile configured RTE and the potentially Postbuild configured Com Stack (see ECUC Parameter Mapping).

In case of the SystemSignalGroup an ISignal shall be created for each SystemSignal contained in the SystemSignalGroup.

ISignalIPdu:
Represents the IPdus handled by Com. The ISignalIPdu assembled and disassembled in AUTOSAR COM consists of one or more signals. In case no multiplexing is performed this IPdu is routed to/from the Interface Layer.

A maximum of one dynamic length signal per IPdu is allowed.

M2 Parameter	
`VariableDataPrototype`, `SenderReceiverToSignalMapping`, `SystemSignal`, `ISignal`, `ISignalIPdu`	
Mapping Rule	**Mapping Type**
A MetaDataTypeRef shall be derived for a given Pdu if a MetaDataItemSet exists that refers to a VariablePrototype that is also referenced from a SenderReceiverToSignalMapping that in turn references a SystemSignal that is referenced by a ISignal that is mapped to an ISignalIPdu that is derived to the mentioned Pdu in EcuC.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_EcuC_00077]

BSW Module	**BSW Context**
EcuC	EcuC/EcucPartitionCollection/EcucPartition
BSW Parameter	**BSW Type**
EcucPartitionSoftwareComponentInstanceRef	ECUC-INSTANCE-REFERENCE-DEF
BSW Description	
References the SW Component instances from the Ecu Extract that shall be executed in this partition.	
Template Description	
SwcToApplicationPartitionMapping: Allows to map a given SwComponentPrototype to a formally defined partition at a point in time when the corresponding Ecu Instance is not yet known or defined. **ApplicationPartitionToEcuPartitionMapping:** Maps ApplicationPartitions to EcuPartitions. With this mapping an OEM has the option to predefine an allocation of Software Components to EcuPartitions in the System Design phase. The final and complete assignment is described in the OS Configuration.	
M2 Parameter	
`SwcToApplicationPartitionMapping`, `ApplicationPartitionToEcuPartitionMapping`	
Mapping Rule	**Mapping Type**
Consider ApplicationPartitions that are mapped to the EcuPartition and take all SwComponent Prototypes that are mapped to this ApplicationPartition.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_EcuC_00036]

BSW Module	BSW Context
EcuC	EcuC/EcucUnitGroupAssignment

BSW Parameter	BSW Type
EcucUnitGroupRef	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Optional reference to the UnitGroup to support the generation of ASAM MCD file. These UnitGroups are selecting a set of units for a specific country.

Template Description

This meta-class represents the ability to specify a logical grouping of units.The category denotes the unit system that the referenced units are associated to.

In this way, e.g. country-specific unit systems (CATEGORY="COUNTRY") can be defined as well as specific unit systems for certain application domains.

In the same way a group of equivalent units, can be defined which are used in different countries, by setting CATEGORY="EQUIV_UNITS". KmPerHour and MilesPerHour could such be combined to one group named "vehicle_speed". The unit MeterPerSec would not belong to this group because it is normally not used for vehicle speed. But all of the mentioned units could be combined to one group named "speed".

Note that the UnitGroup does not ensure the physical compliance of the units. This is maintained by the physical dimension.

M2 Parameter

`UnitGroup`

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_EcuC_00062]

H.7 MemMap

BSW Module	BSW Context
MemMap	MemMap/MemMapAllocation/MemMapGenericMapping

BSW Parameter	BSW Type
MemMapSwAddressMethodRef	ECUC-FOREIGN-REFERENCE-DEF

BSW Description

Reference to the SwAddrMethod which applies to the MemMapGenericMapping.

Template Description

Used to assign a common addressing method, e.g. common memory section, to data or code objects. These objects could actually live in different modules or components.

M2 Parameter

`SwAddrMethod`

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_MemMap_ 00013]

BSW Module	BSW Context
MemMap	MemMap/MemMapAllocation/MemMapSectionSpecificMapping
BSW Parameter	**BSW Type**
MemMapMemorySectionRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the MemorySection which applies to the MemMapSectionSpecificMapping.	
Template Description	
Provides a description of an abstract memory section used in the Implementation for code or data. It shall be declared by the Implementation Description of the module or component, which actually allocates the memory in its code. This means in case of data prototypes which are allocated by the RTE, that the generated Implementation Description of the RTE shall contain the corresponding MemorySections. The attribute "symbol" (if symbol is missing: "shortName") defines the module or component specific section name used in the code. For details see the document "Specification of Memory Mapping". Typically the section name is build according the pattern: <SwAddrMethod shortName>[_<further specialization nominator>][_<alignment>] where • **[<SwAddrMethod shortName>]** is the shortName of the referenced SwAddrMethod • **[_<further specialization nominator>]** is an optional infix to indicate the specialization in the case that several Memory Sections for different purpose of the same Implementation Description referring to the same or equally named SwAddr Methods. • **[_<alignment>]** is the alignment attributes value and is only applicable in the case that the memoryAllocationKeyword Policy value of the referenced SwAddrMethod is set to addrMethodShortNameAndAlignment MemorySection used to Implement the code of RunnableEntitys and BswSchedulableEntitys shall have a symbol (if missing: shortName) identical to the referred SwAddrMethod to conform to the generated RTE header files. In addition to the section name described above, a prefix is used in the corresponding macro code in order to define a name space. This prefix is by default given by the shortName of the BswModuleDescription resp. the SwComponentType. It can be superseded by the prefix attribute.	
M2 Parameter	
MemorySection	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_MemMap_00016]

H.8 NvM

BSW Module	BSW Context
NvM	NvM/NvMBlockDescriptor
BSW Parameter	**BSW Type**
NvMBlockJobPriority	ECUC-INTEGER-PARAM-DEF
BSW Description	
Defines the job priority for a NVRAM block (0 = Immediate priority).	
Template Description	

▽

△

NvBlockNeeds.writingPriority: Requires the priority of writing this block in case of concurrent requests to write other blocks. **NvBlockNeeds.storeEmergency:** Defines whether or not the associated RAM Block shall be implicitly stored in case of ECU failure (e.g. loss of power) by the basic software. If the attribute storeEmergency is set to true the associated RAM Block shall be configured to have immediate priority.
M2 Parameter
NvBlockNeeds.writingPriority, NvBlockNeeds.storeEmergency

Mapping Rule	Mapping Type
It is the integrators job to secure the value-monotonic assignment of writingPriority to NvMBlock JobPriority. This means that the lowest assigned value of writingPriority=MEDIUM shall be greater than highest assigned value of writingPriority=HIGH etc.If NvBlockNeeds.storeEmergency is set to true, then NvMBlockJobPriority shall be 0 (Immediate priority). If NvBlockNeeds.storeEmergency is set to false, then the value of NvMBlockJobPriority depends on the value of NvBlock Needs.writingPriority.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00477]

BSW Module	BSW Context
NvM	NvM/NvMBlockDescriptor

BSW Parameter	BSW Type
NvMBlockManagementType	ECUC-ENUMERATION-PARAM-DEF
BSW Description	
Defines the block management type for the NVRAM block.[SWS_NvM_00137]	
Template Description	
Reliability against data loss on the non-volatile medium.	
M2 Parameter	
NvBlockNeeds.reliability	

Mapping Rule	Mapping Type
if (reliability == errorDetection | noProtection) && nDataSets==0 then NvmBlockManagementType = NVM_BLOCK_NATIVE. if reliability == errorCorrection then NvmBlockManagementType = NVM_BLOCK_REDUNDANT. [constr_1095] applies.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00062]

BSW Module	BSW Context
NvM	NvM/NvMBlockDescriptor

BSW Parameter	BSW Type
NvMBlockUseAutoValidation	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
Defines whether the RAM Block shall be auto validated during shutdown phase. true: if auto validation mechanism is used, false: otherwise	
Template Description	
If set to true the RAM Block shall be auto validated during shutdown phase.	
M2 Parameter	
NvBlockNeeds.useAutoValidationAtShutDown	

Mapping Rule	Mapping Type
1:1 mapping	full

▽

△

Mapping Status	ECUC Parameter ID
valid	[ECUC_NvM_00557]

BSW Module	BSW Context	
NvM	NvM/NvMBlockDescriptor	
BSW Parameter		**BSW Type**
NvMBlockUseCRCCompMechanism		ECUC-BOOLEAN-PARAM-DEF
BSW Description		
Defines whether the CRC of the RAM Block shall be compared during a write job with the CRC which was calculated during the last successful read or write job. true: if compare mechanism is used, false: otherwise		
Template Description		
If set to true the CRC of the RAM Block shall be compared during a write job with the CRC which was calculated during the last successful read or write job in order to skip unnecessary NVRAM writings.		
M2 Parameter		
NvBlockNeeds.useCRCCompMechanism		
Mapping Rule		**Mapping Type**
1:1 mapping		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_NvM_00556]

BSW Module	BSW Context	
NvM	NvM/NvMBlockDescriptor	
BSW Parameter		**BSW Type**
NvMBlockUseCrc		ECUC-BOOLEAN-PARAM-DEF
BSW Description		
Defines CRC usage for the NVRAM block, i.e. memory space for CRC is reserved in RAM and NV memory. true: CRC will be used for this NVRAM block. false: CRC will not be used for this NVRAM block. Note: Configuring CRC for a block with immediate priority is not recommended, since the CRC calculation may extend over more than one NvM main function and this could increase the time of writing the immediate data significantly, thus defeating the purpose of immediate priority.		
Template Description		
Reliability against data loss on the non-volatile medium.		
M2 Parameter		
NvBlockNeeds.reliability		
Mapping Rule		**Mapping Type**
reliability == errorCorrection | errorDetection means that NvmBlockUseCrc shall bet set to true, else NvmBlockUseCrc = false		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_NvM_00036]

BSW Module	BSW Context	
NvM	NvM/NvMBlockDescriptor	
BSW Parameter		**BSW Type**
NvMBlockUseSetRamBlockStatus		ECUC-BOOLEAN-PARAM-DEF

▽

△

BSW Description	
Defines if NvMSetRamBlockStatusApi shall be used for this block or not. Note: If NvMSetRamBlockStatusApi is disabled this configuration parameter shall be ignored. true: calling of NvMSetRamBlockStatus for this RAM block shall set the status of the RAM block. false: calling of NvMSetRamBlockStatus for this RAM block shall be ignored.	
Template Description	
This attribute defines how the management of the RAM Block status is controlled.	
M2 Parameter	
NvBlockNeeds.ramBlockStatusControl	
Mapping Rule	**Mapping Type**
If the value of NvBlockNeeds.ramBlockStatusControl is set to RamBlockStatusControlEnum.api the parameter shall be set to true. If the value of NvBlockNeeds.ramBlockStatusControl is set to RamBlockStatusControlEnum.nvRamManager it shall be set to false.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00552]

BSW Module	BSW Context
NvM	NvM/NvMBlockDescriptor
BSW Parameter	**BSW Type**
NvMBlockWriteProt	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
Defines an initial write protection of the NV block true: Initial block write protection is enabled. false: Initial block write protection is disabled.	
Template Description	
true: data of this NVRAM Block are write protected for normal operation (but protection can be disabled) false: no restriction	
M2 Parameter	
NvBlockNeeds.readonly	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00033]

BSW Module	BSW Context
NvM	NvM/NvMBlockDescriptor
BSW Parameter	**BSW Type**
NvMCalcRamBlockCrc	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
Defines CRC (re)calculation for the permanent RAM block or NVRAM blocks which are configured to use explicit synchronization mechanism. true: CRC will be (re)calculated for this permanent RAM block. false: CRC will not be (re)calculated for this permanent RAM block.	
Template Description	
Defines if CRC (re)calculation for the permanent RAM Block is required.	
M2 Parameter	
NvBlockNeeds.calcRamBlockCrc	

▽

△

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00119]

BSW Module	BSW Context
NvM	NvM/NvMBlockDescriptor
BSW Parameter	**BSW Type**
NvMNvBlockNum	ECUC-INTEGER-PARAM-DEF
BSW Description	
Defines the number of multiple NV blocks in a contiguous area according to the given block management type. 1-255 For NVRAM blocks to be configured of block management type NVM_BLOCK_DATASET. The actual range is limited according to SWS_NvM_00444. 1 For NVRAM blocks to be configured of block management type NVM_BLOCK_NATIVE 2 For NVRAM blocks to be configured of block management type NVM_BLOCK_REDUNDANT	
Template Description	
NvBlockNeeds.nDataSets: Number of data sets to be provided by the NVRAM manager for this block. This is the total number of ROM Blocks and RAM Blocks. **NvBlockNeeds.reliability:** Reliability against data loss on the non-volatile medium.	
M2 Parameter	
NvBlockNeeds.nDataSets, NvBlockNeeds.reliability	
Mapping Rule	**Mapping Type**
if (nDataSets == 0 && reliability ==noProtection | errorDetection) then NvMNvBlockNum = 1. if (n DataSets >0 && reliability ==noProtection | errorDetection) then NvMNvBlockNum = nDataSets.	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00480]

BSW Module	BSW Context
NvM	NvM/NvMBlockDescriptor
BSW Parameter	**BSW Type**
NvMResistantToChangedSw	ECUC-BOOLEAN-PARAM-DEF
BSW Description	
Defines whether a NVRAM block shall be treated resistant to configuration changes or not. If there is no default data available at configuration time then the application shall be responsible for providing the default initialization data. In this case the application has to use NvM_GetErrorStatus()to be able to distinguish between first initialization and corrupted data. true: NVRAM block is resistant to changed software. false: NVRAM block is not resistant to changed software.	
Template Description	
Defines whether an NVRAM Block shall be treated resistant to configuration changes (true) or not (false). For details how to handle initialization in the latter case, please refer to the NVRAM specification.	
M2 Parameter	
NvBlockNeeds.resistantToChangedSw	
Mapping Rule	**Mapping Type**
1:1 Mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00483]

BSW Module	BSW Context	
NvM	NvM/NvMBlockDescriptor	
BSW Parameter		**BSW Type**
NvMRomBlockNum		ECUC-INTEGER-PARAM-DEF
BSW Description		
Defines the number of multiple ROM blocks in a contiguous area according to the given block management type. 0-254 For NVRAM blocks to be configured of block management type NVM_BLOCK_DATASET. The actual range is limited according to SWS_NvM_00444. 0-1 For NVRAM blocks to be configured of block management type NVM_BLOCK_NATIVE 0-1 For NVRAM blocks to be configured of block management type NVM_BLOCK_REDUNDANT		
Template Description		
Number of ROM Blocks to be provided by the NVRAM manager for this block. Please note that these multiple ROM Blocks are given in a contiguous area.		
M2 Parameter		
NvBlockNeeds.nRomBlocks		
Mapping Rule		**Mapping Type**
1:1 mapping		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_NvM_00485]

BSW Module	BSW Context	
NvM	NvM/NvMBlockDescriptor	
BSW Parameter		**BSW Type**
NvMSelectBlockForFirstInitAll		ECUC-BOOLEAN-PARAM-DEF
BSW Description		
Defines whether a block will be processed or not by NvM_FirstInitAll. A block can be configured to be processed even if it doesn't have permanent RAM and/or explicit synchronization. TRUE: block will be processed by NvM_FirstInitAll FALSE: block will not be processed by NvM_FirstInitAll		
Template Description		
If this attribute is set to true the NvM shall process this block in the NvM_FirstInitAll() function.		
M2 Parameter		
NvBlockNeeds.selectBlockForFirstInitAll		
Mapping Rule		**Mapping Type**
1:1 mapping		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_NvM_00558]

BSW Module	BSW Context	
NvM	NvM/NvMBlockDescriptor	
BSW Parameter		**BSW Type**
NvMSelectBlockForReadAll		ECUC-BOOLEAN-PARAM-DEF
BSW Description		

▽

△

Defines whether a NVRAM block shall be processed during NvM_ReadAll or not. This configuration parameter has only influence on those NVRAM blocks which are configured to have a permanent RAM block or which are configured to use explicit synchronization mechanism. true: NVRAM block shall be processed by NvM_ReadAll false: NVRAM block shall not be processed by NvM_ReadAll
Template Description
Defines whether the associated RAM Block shall be implicitly restored during startup by the basic software.
M2 Parameter
NvBlockNeeds.restoreAtStart

Mapping Rule	**Mapping Type**
1:1 Mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00117]

BSW Module	**BSW Context**
NvM	NvM/NvMBlockDescriptor

BSW Parameter	**BSW Type**
NvMSelectBlockForWriteAll	ECUC-BOOLEAN-PARAM-DEF

BSW Description
Defines whether a NVRAM block shall be processed during NvM_WriteAll or not. This configuration parameter has only influence on those NVRAM blocks which are configured to have a permanent RAM block or which are configured to use explicit synchronization mechanism. true: NVRAM block shall be processed by NvM_WriteAll false: NVRAM block shall not be processed by NvM_WriteAll
Template Description
Defines whether or not the associated RAM Block shall be implicitly stored during shutdown by the basic software.
M2 Parameter
NvBlockNeeds.storeAtShutdown

Mapping Rule	**Mapping Type**
1:1 Mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00549]

BSW Module	**BSW Context**
NvM	NvM/NvMBlockDescriptor

BSW Parameter	**BSW Type**
NvMStaticBlockIDCheck	ECUC-BOOLEAN-PARAM-DEF

BSW Description
Defines if the Static Block ID check is enabled. false: Static Block ID check is disabled. true: Static Block ID check is enabled.
Template Description
Defines if the Static Block Id check shall be enabled.
M2 Parameter
NvBlockNeeds.checkStaticBlockId

Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_NvM_00532]

BSW Module	BSW Context	
NvM	NvM/NvMBlockDescriptor	
BSW Parameter		**BSW Type**
NvMWriteBlockOnce		ECUC-BOOLEAN-PARAM-DEF
BSW Description		
Defines write protection after first write. The NVRAM manager sets the write protection bit either after the NV block was written the first time or if the block was already written and it is detected as valid and consistent during a read for it. true: Defines write protection after first write is enabled. false: Defines write protection after first write is disabled.		
Template Description		
Defines write protection after first write: true: This block is prevented from being changed/erased or being replaced with the default ROM data after first initialization by the software-component. false: No such restriction.		
M2 Parameter		
NvBlockNeeds.writeOnlyOnce		
Mapping Rule		**Mapping Type**
1:1 mapping		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_NvM_00072]

BSW Module	BSW Context	
NvM	NvM/NvMBlockDescriptor	
BSW Parameter		**BSW Type**
NvMWriteVerification		ECUC-BOOLEAN-PARAM-DEF
BSW Description		
Defines if Write Verification is enabled. false: Write verification is disabled. true: Write Verification is enabled.		
Template Description		
Defines if Write Verification shall be enabled for this NVRAM Block.		
M2 Parameter		
NvBlockNeeds.writeVerification		
Mapping Rule		**Mapping Type**
1:1 mapping		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_NvM_00534]

H.9 Os

BSW Module	BSW Context	
Os	Os/Osloc/OslocCommunication/OslocDataProperties	
BSW Parameter		**BSW Type**
OslocDataTypeRef		ECUC-FOREIGN-REFERENCE-DEF

▽

△

BSW Description	
This is the type of the data to be transferred on the IOC communication channel. This attribute is necessary to generate the parameter type of the Ioc functions. Additionally this information should be used to compute the data size for necessary data copy operations within the Ioc module. If more than one attribute is defined, the IOC generator should generate an IocXxxGroup function (Xxx= CHOICE [Send, Receive, Write, Read]). N:1 or N:M communication (Multiplicity of OsIocSenderProperties > 1) is only allowed for multiplicity of OsIocDataTypeRef = 1	
Template Description	
Describes a reusable data type on the implementation level. This will typically correspond to a typedef in C-code.	
M2 Parameter	
ImplementationDataType	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Os_01005]

BSW Module	BSW Context
Os	Os/OsIoc/OsIocCommunication/OsIocDataProperties
BSW Parameter	**BSW Type**
OsMemoryMappingCodeLocationRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the memory mapping containing details about the section where the IOC buffer is placed.	
Template Description	
Describes a reusable data type on the implementation level. This will typically correspond to a typedef in C-code.	
M2 Parameter	
ImplementationDataType	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Os_00405]

H.10 Rte

BSW Module	BSW Context
Rte	Rte
BSW Parameter	**BSW Type**
RteComDataMapping	ECUC-PARAM-CONF-CONTAINER-DEF
BSW Description	
Maps a set of VariableDataPrototypes (which are mapped to ComSignals or ComSignalGroups using DataMappings) onto one OsTask.	
Template Description	
This attribute defines whether the ComHandler Task Mapping is activated or deactivated.	
M2 Parameter	

▽

△

ReceptionComSpecProps.comHandlerTaskMappingEnabled	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09229]

BSW Module	**BSW Context**
Rte	Rte/RteImplicitCommunication
BSW Parameter	**BSW Type**
RteVariableReadAccessRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the VariableAccess in the dataReadAccess role.	
Template Description	
The presence of a VariableAccess implies that a RunnableEntity needs access to a VariableDataPrototype. The kind of access is specified by the role in which the class is used.	
M2 Parameter	
VariableAccess	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09035]

BSW Module	**BSW Context**
Rte	Rte/RteImplicitCommunication
BSW Parameter	**BSW Type**
RteVariableWriteAccessRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the VariableAccess in the dataWriteAccess role.	
Template Description	
The presence of a VariableAccess implies that a RunnableEntity needs access to a VariableDataPrototype. The kind of access is specified by the role in which the class is used.	
M2 Parameter	
VariableAccess	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09036]

BSW Module	**BSW Context**
Rte	Rte/RteOsInteraction/RteModeToScheduleTableMapping/RteModeSchtblMapBsw
BSW Parameter	**BSW Type**
RteModeSchtblMapBswProvidedModeGroupRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to an instance of a ModeDeclarationGroupPrototype of a Bsw-Module.	

▽

△

Template Description	
The ModeDeclarationGroupPrototype specifies a set of Modes (ModeDeclarationGroup) which is provided or required in the given context.	
M2 Parameter	
ModeDeclarationGroupPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09053]

BSW Module	BSW Context
Rte	Rte/RteOsInteraction/RteModeToScheduleTableMapping
BSW Parameter	**BSW Type**
RteModeSchtblMapModeDeclarationRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the ModeDeclarations.	
Template Description	
Declaration of one Mode. The name and semantics of a specific mode is not defined in the meta-model.	
M2 Parameter	
ModeDeclaration	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09054]

BSW Module	BSW Context
Rte	Rte/RteOsInteraction/RteModeToScheduleTableMapping/RteModeSchtblMapSwc
BSW Parameter	**BSW Type**
RteModeSchtblMapSwcPortRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the PPortPrototype of a SwComponentPrototype.	
Template Description	
Component port providing a certain port interface.	
M2 Parameter	
PPortPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09057]

BSW Module	BSW Context
Rte	Rte/RteSwComponentInstance/RteEventToIsrMapping
BSW Parameter	**BSW Type**
RteIsrEventRef	ECUC-FOREIGN-REFERENCE-DEF

▽

△

BSW Description	
Reference to the description of the ExternalTriggerOccurredEvent or TimingEvent which is pointing to the RunnableEntity being mapped. This allows a fine grained mapping of RunnableEntites based on the activating RTEEvent.	
Template Description	
Abstract base class for all RTE-related events	
M2 Parameter	
RTEEvent	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09153]

BSW Module	BSW Context
Rte	Rte/RteSwComponentInstance/RteEventToTaskMapping
BSW Parameter	**BSW Type**
RteActivationOffset	ECUC-FLOAT-PARAM-DEF
BSW Description	
Activation offset in seconds.	
Template Description	
The value makes an assumption about the time offset of the first activation of the RunnableEntity triggered by the mapped TimingEvent relative to the periodic activation of the time base of this TimingEvent. Unit: second.	
M2 Parameter	
TimingEvent.offset	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09018]

BSW Module	BSW Context
Rte	Rte/RteSwComponentInstance/RteEventToTaskMapping
BSW Parameter	**BSW Type**
RteEventRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the description of the RTEEvent which is pointing to the RunnableEntity being mapped. This allows a fine grained mapping of RunnableEntites based on the activating RTEEvent.	
Template Description	
Abstract base class for all RTE-related events	
M2 Parameter	
RTEEvent	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09019]

BSW Module	BSW Context
Rte	Rte/RteSwComponentInstance/RteEventToTaskMapping
BSW Parameter	**BSW Type**
RteServerQueueLength	ECUC-INTEGER-PARAM-DEF
BSW Description	
Specifies the length of the queue for the server call serialization. This value overwrites the queueLength specified at the ServerComSpec.	
Template Description	
Length of call queue on the server side. The queue is implemented by the RTE. The value shall be greater or equal to 1. Setting the value of queueLength to 1 implies that incoming requests are rejected while another request that arrived earlier is being processed.	
M2 Parameter	
ServerComSpec.queueLength	
Mapping Rule	**Mapping Type**
• If System ServerComSpecProps.remoteClientQueueLengthContribution is defined, then use remoteClientQueueLengthContribution and add potential local clients to derive the actual Rte ServerQueueLength • If System ServerComSpecProps.remoteClientQueueLengthContribution is not defined, then use ServerComSpec.queueLength without any modifications to derive RteServerQueueLength	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09133]

BSW Module	BSW Context
Rte	Rte/RteSwComponentInstance/RteExclusiveAreaImplementation
BSW Parameter	**BSW Type**
RteExclusiveAreaRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the ExclusiveArea.	
Template Description	
Prevents an executable entity running in the area from being preempted.	
M2 Parameter	
ExclusiveArea	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09032]

BSW Module	BSW Context
Rte	Rte/RteSwComponentInstance/RteInternalTriggerConfig
BSW Parameter	**BSW Type**
RteSwcInternalTriggerSourceRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to an InternalTriggeringPoint of the related component instance. The referenced InternalTriggeringPoint has to belong to the same software component instance as the RteSwComponent Instance owning this parameter configures.	
Template Description	

▽

△

If a RunnableEntity owns an InternalTriggeringPoint it is entitled to trigger the execution of RunnableEntitys of the corresponding software-component.	
M2 Parameter	
InternalTriggeringPoint	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09097]

BSW Module	**BSW Context**
Rte	Rte/RteSwComponentInstance/RteNvRamAllocation
BSW Parameter	**BSW Type**
RteSwNvBlockDescriptorRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the NvBlockDescriptor in case the RTE needs to call the NvM directly (e.g. for the supportDirtyFlag feature, storeCyclic feature, server invocation for NV data management or mode switch based invocation NvM services).	
Template Description	
Specifies the properties of exactly one NVRAM Block.	
M2 Parameter	
NvBlockDescriptor	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09132]

BSW Module	**BSW Context**
Rte	Rte/RteSwComponentInstance/RteNvRamAllocation
BSW Parameter	**BSW Type**
RteSwNvRamMappingRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the SwSeriveDependency which is used to specify the NvBlockNeeds.	
Template Description	
Specialization of ServiceDependency in the context of an SwcInternalBehavior. It allows to associate ports, port groups and (in special cases) data defined for an atomic software component to a given ServiceNeeds element.	
M2 Parameter	
SwcServiceDependency	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09044]

BSW Module	**BSW Context**
Rte	Rte/RteSwComponentInstance
BSW Parameter	**BSW Type**

▽

△

RteSoftwareComponentInstanceRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to a SwComponentPrototype.	
Template Description	
Role of a software component within a composition.	
M2 Parameter	
SwComponentPrototype	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09004]

BSW Module	**BSW Context**
Rte	Rte/RteSwComponentType/RteComponentTypeCalibration
BSW Parameter	**BSW Type**
RteCalibrationSwAddrMethodRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the SwAddrMethod for which software calibration support shall be enabled.	
Template Description	
Used to assign a common addressing method, e.g. common memory section, to data or code objects. These objects could actually live in different modules or components.	
M2 Parameter	
SwAddrMethod	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09038]

BSW Module	**BSW Context**
Rte	Rte/RteSwComponentType
BSW Parameter	**BSW Type**
RteComponentTypeRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to either AtomicSwComponentType or ParameterSwComponentType.	
Template Description	
Base class for AUTOSAR software components.	
M2 Parameter	
SwComponentType	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_Rte_09003]

BSW Module	BSW Context	
Rte	Rte/RteSwComponentType	
BSW Parameter		**BSW Type**
RteImplementationRef		ECUC-FOREIGN-REFERENCE-DEF
BSW Description		
The Implementation which shall be assigned to the SwComponentType.		
Template Description		
This meta-class represents a specialization of the general Implementation meta-class with respect to the usage in application software.		
M2 Parameter		
SwcImplementation		
Mapping Rule		**Mapping Type**
1:1 mapping		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_Rte_09028]

H.11 SecOC

BSW Module	BSW Context	
SecOC	SecOC/SecOCRxPduProcessing/SecOCClientServerVerificationStatusPropagationMode	
BSW Parameter		**BSW Type**
BOTH		ECUC-ENUMERATION-LITERAL-DEF
BSW Description		
Both “TRUE” and “FALSE” AuthenticationStatus is propagated to SW-C		
Template Description		
Verification attempts that came out "false" or "true" shall be forwarded to the application software.		
M2 Parameter		
VerificationStatusIndicationModeEnum.failureAndSuccess		
Mapping Rule		**Mapping Type**
1:1 mapping		full
Mapping Status		**ECUC Parameter ID**
valid		

BSW Module	BSW Context	
SecOC	SecOC/SecOCRxPduProcessing/SecOCClientServerVerificationStatusPropagationMode	
BSW Parameter		**BSW Type**
FAILURE_ONLY		ECUC-ENUMERATION-LITERAL-DEF
BSW Description		
Only “FALSE” Authentication Status is propagated to SW-C		
Template Description		
Only verification attempts that came out "false" shall be forwarded to the application software.		
M2 Parameter		
VerificationStatusIndicationModeEnum.failureOnly		

▽

△

Mapping Rule	Mapping Type
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	

H.12 SwCluC

BSW Module	BSW Context
SwCluC	SwCluC/SwCluCBManif/SwCluCBManifResourceType/SwCluCBManifNotifierHandle
BSW Parameter	**BSW Type**
SwCluCBManifHandleImpleTypeRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the ImplementationDataType of the handle. This type can be additionally configured to get a correct casting of the native handle type to the returned handel type.	
Template Description	
Abstract base class for all RTE-related events	
M2 Parameter	
RTEEvent	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_SwCluC_00015]

BSW Module	BSW Context
SwCluC	SwCluC/SwCluCBManif/SwCluCBManifResourceType/SwCluCBManifProvideHandle
BSW Parameter	**BSW Type**
SwCluCBManifHandleImpleTypeRef	ECUC-FOREIGN-REFERENCE-DEF
BSW Description	
Reference to the ImplementationDataType of the handle. This type can be additionally configured to get a correct casting of the native handle type to the returned handel type.	
Template Description	
Abstract base class for all RTE-related events	
M2 Parameter	
RTEEvent	
Mapping Rule	**Mapping Type**
1:1 mapping	full
Mapping Status	**ECUC Parameter ID**
valid	[ECUC_SwCluC_00015]

H.13 WdgM

BSW Module	BSW Context	
WdgM	WdgM/WdgMConfigSet/WdgMMode/WdgMLocalStatusParams	
BSW Parameter		**BSW Type**
WdgMFailedAliveSupervisionRefCycleTol		ECUC-INTEGER-PARAM-DEF
BSW Description		
This parameter shall contain the acceptable amount of reference cycles with incorrect/failed alive supervisions for this Supervised Entity.		
Template Description		
Number of consecutive failed alive cycles for this SupervisedEntity which shall be tolerated until the supervision status of the SupervisedEntity is set to WDGM_ALIVE_EXPIRED (see SWS WdgM for more details). Note that this value has to be recalculated with respect to the WdgM's own cycle time for ECU configuration.		
M2 Parameter		
SupervisedEntityNeeds.toleratedFailedCycles		
Mapping Rule		**Mapping Type**
1:1		full
Mapping Status		**ECUC Parameter ID**
valid		[ECUC_WdgM_00327]

I Non-Splitable Elements in the Scope of this Document

This chapter contains a table of all non-splitable model elements in the scope of this document.

For more information about the concept of splitable model elements and how these shall be treated please refer to the [10, TPS Generic Structure Template].

Name of non splitable element
AdminData.docRevision
AnyInstanceRef.base
AnyInstanceRef.contextElement
AnyInstanceRef.target
ApplicationCompositeElementInPortInterfaceInstanceRef.base
ApplicationCompositeElementInPortInterfaceInstanceRef.contextDataPrototype
ApplicationCompositeElementInPortInterfaceInstanceRef.rootDataPrototype
ApplicationCompositeElementInPortInterfaceInstanceRef.targetDataPrototype
ApplicationRecordDataType.element
ApplicationRuleBasedValueSpecification.swAxisCont
ApplicationValueSpecification.swAxisCont
ArParameterInImplementationDataInstanceRef.contextDataPrototype
ArParameterInImplementationDataInstanceRef.portPrototype
ArParameterInImplementationDataInstanceRef.rootParameterDataPrototype
ArParameterInImplementationDataInstanceRef.targetDataPrototype
ArrayValueSpecification.element
ArVariableInImplementationDataInstanceRef.contextDataPrototype
ArVariableInImplementationDataInstanceRef.portPrototype
ArVariableInImplementationDataInstanceRef.rootVariableDataPrototype
ArVariableInImplementationDataInstanceRef.targetDataPrototype
AtpClassifier.atpFeature
AtpInstanceRef.atpBase
AtpInstanceRef.atpContextElement
AtpInstanceRef.atpTarget
AtpPrototype.atpType
BaseType.baseTypeDefinition
ClientComSpec.operation
ClientServerOperation.argument
ComponentInCompositionInstanceRef.base
ComponentInCompositionInstanceRef.contextComponent
ComponentInCompositionInstanceRef.targetComponent
CompositeRuleBasedValueSpecification.argument
CompositeRuleBasedValueSpecification.compoundPrimitiveArgument
Compu.compuContent
CompuConst.compuConstContentType

▽

△

Name of non splitable element
CompuRationalCoeffs.compuDenominator
CompuRationalCoeffs.compuNumerator
CompuScale.compuScaleContents
CompuScaleConstantContents.compuConst
CompuScaleRationalFormula.compuRationalCoeffs
CompuScales.compuScale
DocRevision.modification
ExclusiveAreaNestingOrder.exclusiveArea
ExternalTriggeringPoint.ident
FormulaExpression.atpReference
FormulaExpression.atpStringReference
ImplementationDataType.subElement
ImplementationDataTypeElement.subElement
InnerDataPrototypeGroupInCompositionInstanceRef.base
InnerDataPrototypeGroupInCompositionInstanceRef.contextSwComponentPrototype
InnerDataPrototypeGroupInCompositionInstanceRef.targetDataPrototypeGroup
InnerPortGroupInCompositionInstanceRef.base
InnerPortGroupInCompositionInstanceRef.context
InnerPortGroupInCompositionInstanceRef.target
InnerRunnableEntityGroupInCompositionInstanceRef.base
InnerRunnableEntityGroupInCompositionInstanceRef.contextSwComponentPrototype
InnerRunnableEntityGroupInCompositionInstanceRef.targetRunnableEntityGroup
InstanceEventInCompositionInstanceRef.base
InstanceEventInCompositionInstanceRef.contextComponentPrototype
InstanceEventInCompositionInstanceRef.targetEvent
MetaDataItem.metaDataItemType
MetaDataItemSet.metaDataItem
ModeAccessPoint.ident
ModeGroupInAtomicSwcInstanceRef.base
ModeGroupInAtomicSwcInstanceRef.contextPort
ModeGroupInAtomicSwcInstanceRef.target
ModeSwitchReceiverComSpec.modeGroup
ModeSwitchSenderComSpec.modeGroup
Modification.change
Modification.reason
NvProvideComSpec.variable
NvRequireComSpec.variable
OperationInAtomicSwcInstanceRef.base
OperationInAtomicSwcInstanceRef.contextPort
OperationInAtomicSwcInstanceRef.targetOperation
ParameterInAtomicSWCTypeInstanceRef.base
ParameterInAtomicSWCTypeInstanceRef.contextDataPrototype
ParameterInAtomicSWCTypeInstanceRef.portPrototype

▽

△

Name of non splitable element
ParameterInAtomicSWCTypeInstanceRef.rootParameterDataPrototype
ParameterInAtomicSWCTypeInstanceRef.targetDataPrototype
ParameterProvideComSpec.parameter
ParameterRequireComSpec.parameter
PModeGroupInAtomicSwcInstanceRef.contextPPort
PModeGroupInAtomicSwcInstanceRef.targetModeGroup
POperationInAtomicSwcInstanceRef.contextPPort
POperationInAtomicSwcInstanceRef.targetProvidedOperation
PortAPIOption.port
PortAPIOption.portArgValue
PortDefinedArgumentValue.value
PortDefinedArgumentValue.valueType
PortInCompositionTypeInstanceRef.abstractContextComponent
PortInCompositionTypeInstanceRef.base
PortInCompositionTypeInstanceRef.targetPort
PPortInCompositionInstanceRef.contextComponent
PPortInCompositionInstanceRef.targetPPort
PTriggerInAtomicSwcTypeInstanceRef.contextPPort
PTriggerInAtomicSwcTypeInstanceRef.targetTrigger
ReceiverComSpec.dataElement
RecordValueSpecification.field
RModeGroupInAtomicSWCInstanceRef.contextRPort
RModeGroupInAtomicSWCInstanceRef.targetModeGroup
RModeInAtomicSwcInstanceRef.base
RModeInAtomicSwcInstanceRef.contextModeDeclarationGroupPrototype
RModeInAtomicSwcInstanceRef.contextPort
RModeInAtomicSwcInstanceRef.targetModeDeclaration
ROperationInAtomicSwcInstanceRef.contextRPort
ROperationInAtomicSwcInstanceRef.targetRequiredOperation
RPortInCompositionInstanceRef.contextComponent
RPortInCompositionInstanceRef.targetRPort
RTriggerInAtomicSwcInstanceRef.contextRPort
RTriggerInAtomicSwcInstanceRef.targetTrigger
RuleArguments.vtf
RuleBasedAxisCont.ruleBasedValues
RuleBasedAxisCont.swArraysize
RuleBasedAxisCont.unit
RunnableEntity.argument
RunnableEntityArgument.implementationDataType
RunnableEntityInCompositionInstanceRef.base
RunnableEntityInCompositionInstanceRef.contextSwComponentPrototype
RunnableEntityInCompositionInstanceRef.targetRunnableEntity
RVariableInAtomicSwcInstanceRef.contextRPort

▽

△

Name of non splitable element
RVariableInAtomicSwcInstanceRef.targetDataElement
SdgClass.attribute
SenderComSpec.dataElement
ServerComSpec.operation
SwAxisCont.swArraysize
SwAxisCont.swValuesPhys
SwAxisCont.unit
SwAxisCont.unitDisplayName
SwAxisGeneric.swAxisType
SwAxisGeneric.swGenericAxisParam
SwAxisGrouped.sharedAxisType
SwAxisGrouped.swCalprmRef
SwAxisIndividual.compuMethod
SwAxisIndividual.dataConstr
SwAxisIndividual.inputVariableType
SwAxisIndividual.swAxisGeneric
SwAxisIndividual.swVariableRef
SwAxisIndividual.unit
SwCalprmAxis.swCalprmAxisTypeProps
SwCalprmRefProxy.arParameter
SwCalprmRefProxy.mcDataInstance
SwcModeSwitchEvent.mode
SwDataDependencyArgs.swCalprmRef
SwDataDependencyArgs.swVariable
SwGenericAxisParam.swGenericAxisParamType
SwRecordLayoutGroup.swRecordLayoutGroupContentType
SwRecordLayoutGroupContent.swRecordLayout
SwRecordLayoutGroupContent.swRecordLayoutGroup
SwRecordLayoutGroupContent.swRecordLayoutV
SwRecordLayoutV.baseType
SwRecordLayoutV.desc
SwRecordLayoutV.swGenericAxisParamType
SwValues.vg
SwValues.vtf
TriggerInAtomicSwcInstanceRef.base
TriggerInAtomicSwcInstanceRef.contextPort
TriggerInAtomicSwcInstanceRef.target
ValueGroup.label
ValueGroup.vgContents
VariableDataPrototypeInCompositionInstanceRef.base
VariableDataPrototypeInCompositionInstanceRef.contextPortPrototype
VariableDataPrototypeInCompositionInstanceRef.contextSwComponentPrototype
VariableDataPrototypeInCompositionInstanceRef.targetVariableDataPrototype
VariableInAtomicSwcInstanceRef.abstractTargetDataElement

▽

△

Name of non splitable element
VariableInAtomicSwcInstanceRef.base
VariableInAtomicSwcInstanceRef.contextPort
VariableInAtomicSWCTypeInstanceRef.base
VariableInAtomicSWCTypeInstanceRef.contextDataPrototype
VariableInAtomicSWCTypeInstanceRef.portPrototype
VariableInAtomicSWCTypeInstanceRef.rootVariableDataPrototype
VariableInAtomicSWCTypeInstanceRef.targetDataPrototype

Table I.1: Usage of non splitable elements

J Variation Points in the Scope of this Document

This chapter contains a table of all model elements stereotyped ≪atpVariation≫ in the scope of this document.

Each entry in the table consists of the identification of the model element itself and the applicable value of the tagged value vh.latestBindingTime.

For more information about the concept of variation points and how model elements that contain variation points shall be treated please refer to the [10, TPS Generic Structure Template].

Variation Point	*Latest Binding Time*
ApplicationArrayElement.maxNumberOfElements	preCompileTime
ApplicationRecordDataType.element	preCompileTime
ARPackage.arPackage	blueprintDerivationTime
ARPackage.element	systemDesignTime
ArrayValueSpecification.element	preCompileTime
AtomicSwComponentType.internalBehavior	preCompileTime
BulkNvDataDescriptor.nvBlockDataMapping	preCompileTime
CalibrationParameterValueSet.calibrationParameterValue	preCompileTime
ClientServerInterface.operation	blueprintDerivationTime
ClientServerOperation.argument	blueprintDerivationTime
CompositionSwComponentType.component	postBuild
CompositionSwComponentType.connector	postBuild
CompositionSwComponentType.instantiationRTEEventProps	codeGenerationTime
CompuConstFormulaContent.vf	codeGenerationTime
CompuNominatorDenominator.v	preCompileTime
CompuScale.lowerLimit	preCompileTime
CompuScale.upperLimit	preCompileTime
CompuScales.compuScale	blueprintDerivationTime
ConsistencyNeeds.dpgDoesNotRequireCoherency	preCompileTime
ConsistencyNeeds.dpgRequiresCoherency	preCompileTime
ConsistencyNeeds.regDoesNotRequireStability	preCompileTime
ConsistencyNeeds.regRequiresStability	preCompileTime
DataPrototypeGroup.dataPrototypeGroup	preCompileTime
DataPrototypeGroup.implicitDataAccess	preCompileTime
DiagEventDebounceCounterBased.counterDecrementStepSize	preCompileTime
DiagEventDebounceCounterBased.counterFailedThreshold	preCompileTime
DiagEventDebounceCounterBased.counterIncrementStepSize	preCompileTime
DiagEventDebounceCounterBased.counterJumpDown	preCompileTime
DiagEventDebounceCounterBased.counterJumpDownValue	preCompileTime
DiagEventDebounceCounterBased.counterJumpUp	preCompileTime
DiagEventDebounceCounterBased.counterJumpUpValue	preCompileTime
DiagEventDebounceCounterBased.counterPassedThreshold	preCompileTime
DiagEventDebounceTimeBased.timeBasedFdcThresholdStorageValue	preCompileTime

▽

△

Variation Point	*Latest Binding Time*
DiagEventDebounceTimeBased.timeFailedThreshold	preCompileTime
DiagEventDebounceTimeBased.timePassedThreshold	preCompileTime
ErrorTracerNeeds.tracedFailure	preCompileTime
ExecutableEntity.canEnter	preCompileTime
ExecutableEntity.runsInside	preCompileTime
Implementation.buildActionManifest	codeGenerationTime
Implementation.generatedArtifact	preCompileTime
Implementation.requiredArtifact	preCompileTime
Implementation.requiredGeneratorTool	preCompileTime
ImplementationDataType.subElement	preCompileTime
ImplementationDataTypeElement.arraySize	preCompileTime
ImplementationDataTypeElement.subElement	preCompileTime
InternalBehavior.constantMemory	preCompileTime
InternalBehavior.exclusiveArea	preCompileTime
InternalBehavior.exclusiveAreaNestingOrder	preCompileTime
InternalBehavior.staticMemory	preCompileTime
InternalConstrs.lowerLimit	preCompileTime
InternalConstrs.upperLimit	preCompileTime
ModeDeclarationGroup.modeDeclaration	blueprintDerivationTime
NumericalOrText.vf	preCompileTime
NumericalValueSpecification.value	preCompileTime
NvBlockDescriptor.clientServerPort	preCompileTime
NvBlockDescriptor.instantiationDataDefProps	preCompileTime
NvBlockDescriptor.modeSwitchEventTriggeredActivity	preCompileTime
NvBlockDescriptor.nvBlockDataMapping	preCompileTime
NvBlockSwComponentType.bulkNvDataDescriptor	preCompileTime
NvBlockSwComponentType.nvBlockDescriptor	preCompileTime
ParameterSwComponentType.instantiationDataDefProps	preCompileTime
PerInstanceMemorySize.size	preCompileTime
PhysConstrs.lowerLimit	preCompileTime
PhysConstrs.upperLimit	preCompileTime
PortGroup.outerPort	preCompileTime
PortInterface.isService	blueprintDerivationTime
PortInterfaceMappingSet.portInterfaceMapping	blueprintDerivationTime
RapidPrototypingScenario.rptContainer	preCompileTime
RecordValueSpecification.field	preCompileTime
RptContainer.byPassPoint	preCompileTime
RptContainer.rptContainer	preCompileTime
RptContainer.rptHook	preCompileTime
RuleArguments.vf	preCompileTime
RuleArguments.vtf	preCompileTime
RuleBasedValueSpecification.arguments	preCompileTime
RunnableEntity.asynchronousServerCallResultPoint	preCompileTime

▽

△

Variation Point	*Latest Binding Time*
RunnableEntity.dataReadAccess	preCompileTime
RunnableEntity.dataReceivePointByArgument	preCompileTime
RunnableEntity.dataReceivePointByValue	preCompileTime
RunnableEntity.dataSendPoint	preCompileTime
RunnableEntity.dataWriteAccess	preCompileTime
RunnableEntity.externalTriggeringPoint	preCompileTime
RunnableEntity.internalTriggeringPoint	preCompileTime
RunnableEntity.modeAccessPoint	preCompileTime
RunnableEntity.modeSwitchPoint	preCompileTime
RunnableEntity.parameterAccess	preCompileTime
RunnableEntity.readLocalVariable	preCompileTime
RunnableEntity.serverCallPoint	preCompileTime
RunnableEntity.writtenLocalVariable	preCompileTime
RunnableEntityGroup.runnableEntity	preCompileTime
RunnableEntityGroup.runnableEntityGroup	preCompileTime
SenderComSpec.usesEndToEndProtection	preCompileTime
ServiceDependency.assignedDataType	preCompileTime
SubElementMapping.firstElement	preCompileTime
SubElementMapping.secondElement	preCompileTime
SupervisedEntityNeeds.checkpoints	preCompileTime
SwAxisIndividual.swMaxAxisPoints	preCompileTime
SwAxisIndividual.swMinAxisPoints	preCompileTime
SwcBswMapping.runnableMapping	preCompileTime
SwcBswMapping.synchronizedModeGroup	preCompileTime
SwcBswMapping.synchronizedTrigger	preCompileTime
SwcImplementation.perInstanceMemorySize	preCompileTime
SwcInternalBehavior.arTypedPerInstanceMemory	preCompileTime
SwcInternalBehavior.event	preCompileTime
SwcInternalBehavior.exclusiveAreaPolicy	preCompileTime
SwcInternalBehavior.explicitInterRunnableVariable	preCompileTime
SwcInternalBehavior.implicitInterRunnableVariable	preCompileTime
SwcInternalBehavior.instantiationDataDefProps	preCompileTime
SwcInternalBehavior.perInstanceMemory	preCompileTime
SwcInternalBehavior.perInstanceParameter	preCompileTime
SwcInternalBehavior.portAPIOption	preCompileTime
SwcInternalBehavior.runnable	preCompileTime
SwcInternalBehavior.serviceDependency	preCompileTime
SwcInternalBehavior.sharedParameter	preCompileTime
SwComponentDocumentation.chapter	postBuild
SwComponentType.consistencyNeeds	preCompileTime
SwComponentType.port	preCompileTime
SwComponentType.portGroup	preCompileTime
SwComponentType.swComponentDocumentation	preCompileTime

▽

△

Variation Point	*Latest Binding Time*
SwcServiceDependency.assignedData	preCompileTime
SwcServiceDependency.assignedPort	preCompileTime
SwDataDefProps	codeGenerationTime
SwDataDefProps.swValueBlockSize	preCompileTime
SwDataDefProps.swValueBlockSizeMult	preCompileTime
SwGenericAxisParam.vf	preCompileTime
SwTextProps.swMaxTextSize	preCompileTime
SwValues.vf	preCompileTime
SwValues.vtf	preCompileTime
TextTableMapping.bitfieldTextTableMaskFirst	preCompileTime
TextTableMapping.bitfieldTextTableMaskSecond	preCompileTime
TextTableValuePair.firstValue	preCompileTime
TextTableValuePair.secondValue	preCompileTime
ValueList.vf	preCompileTime

Table J.1: Usage of variation points