

Document Title	Specification of Update and Configuration Management
Document Owner	AUTOSAR
Document Responsibility	AUTOSAR
Document Identification No	888

Document Status	published
Part of AUTOSAR Standard	Adaptive Platform
Part of Standard Release	R21-11

Document Change History			
Date	Release	Changed by	Description
2021-11-25	R21-11	AUTOSAR Release Management	<ul style="list-style-type: none"> • Renamed to SWS_UpdateAnd-ConfigurationManagement • UCM errors ordering • Vehicle State Manager API detailing
2020-11-30	R20-11	AUTOSAR Release Management	<ul style="list-style-type: none"> • Classic Platform update specification for UCM Master • Refactored UCM Master API • Simplified UCM Master State Machine • Detailed campaign history information
2019-11-28	R19-11	AUTOSAR Release Management	<ul style="list-style-type: none"> • Introduced UCM Master concept • Software Package state machine updated for processing while streaming • Reviewed UCM State Machine • Added new security analysis appendix • Changed Document Status from Final to published

2019-03-29	19-03	AUTOSAR Release Management	<ul style="list-style-type: none">• Updating Package Management state machine• New requirements for robustness against reset• Improving specification item atomicity• Fixing errors in chapter Service Interfaces
2018-10-31	18-10	AUTOSAR Release Management	<ul style="list-style-type: none">• Updated interaction other functional clusters like PER and EMO/SM• Introduction of vehicle package distribution
2018-03-29	18-03	AUTOSAR Release Management	<ul style="list-style-type: none">• Extended and updated service interface• Introduction of Software Package• Introduction to securing update process
2017-10-27	17-10	AUTOSAR Release Management	<ul style="list-style-type: none">• Initial release

Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

Table of Contents

1	Introduction and functional overview	8
2	Acronyms and abbreviations	9
3	Related documentation	11
3.1	Input documents & related standards and norms	11
3.2	Related specification	11
3.3	Further applicable specification	12
4	Constraints and assumptions	13
4.1	Known Limitations	13
4.2	Applicability to car domains	13
5	Dependencies to other functional clusters	14
5.1	Interfaces to Adaptive State Management	14
5.2	UCM service over ara::com	14
5.3	Interfaces to Adaptive Crypto Interface	14
5.4	Interfaces to Identity and Access Management	15
5.5	UCM use of Persistency library	15
6	Requirements Tracing	16
7	Functional specification	26
7.1	UCM	26
7.1.1	Software Cluster lifecycle	26
7.1.2	Technical Overview	27
7.1.2.1	Software Package Management	28
7.1.2.2	Runtime dependencies	32
7.1.2.3	Update scope and State Management	32
7.1.3	Transferring Software Packages	33
7.1.3.1	Error handling in TransferStart	36
7.1.3.2	Error handling in TransferData	36
7.1.3.3	Error handling in TransferExit	38
7.1.3.4	Error handling in DeleteTransfer	39
7.1.4	Processing of Software Packages from a stream	39
7.1.5	Processing Software Packages	40
7.1.5.1	Error handling during Processing Software Packages	41
7.1.5.2	Error handling for Cancel	43
7.1.5.3	Error handling for RevertProcessedSwPackages	44
7.1.5.4	Error handling for GetSwProcessProgress	44
7.1.6	Activation and Rollback	44
7.1.6.1	Activation	44
7.1.6.2	Rollback	46
7.1.6.3	Boot options	47
7.1.6.4	Finishing activation	47

7.1.7	Status Reporting	48
7.1.8	Robustness against reset	53
7.1.8.1	Boot monitoring	53
7.1.9	History	53
7.1.10	Version Reporting	54
7.1.11	Securing Software Updates	54
7.1.12	Functional cluster lifecycle	55
7.1.12.1	Shutdown behaviour	55
7.2	UCM Master	56
7.2.1	UCM Master Functional Cluster lifecycle	56
7.2.2	Technical Overview	56
7.2.3	UCM Master general behaviour	57
7.2.4	UCM identification	58
7.2.5	UCM Master Software Packages transfer or streaming	58
7.2.6	Adaptive Applications interacting with UCM Master	59
7.2.6.1	OTA Client	59
7.2.6.2	Vehicle Driver Interface	61
7.2.6.3	Vehicle State Manager	62
7.2.6.4	Flashing Adapter	63
7.2.7	Non Adaptive Platform update	65
7.2.7.1	D-PDU API implementation support	65
7.2.7.2	Not required D-PDU API concepts	66
7.2.7.3	Not required D-PDU API functions	66
7.2.7.4	Classic platform update with UCM Master and diagnostic tool	68
7.2.8	Status reporting	69
7.2.8.1	States	71
7.2.8.2	States Transitions	72
7.2.9	Campaign cancelling	74
7.2.10	Campaign Reporting	74
7.2.11	Content of Vehicle Package	75
7.2.12	Vehicle update security and confidentiality	77
8	API specification	78
9	Service Interfaces	79
9.1	Type definitions	79
9.1.1	UCMIdentifierType	79
9.1.2	TransferIdType	79
9.1.3	SwNameType	79
9.1.4	SwNameVectorType	80
9.1.5	StrongRevisionLabelString	80
9.1.6	SwNameVersionType	80
9.1.7	SwNameVersionVectorType	80
9.1.8	ByteVectorType	81
9.1.9	SwPackageStateType	81
9.1.10	SwPackageInfoType	81

9.1.11	SwPackageInfoVectorType	82
9.1.12	SwDescType	82
9.1.13	SwDescVectorType	83
9.1.14	SwPackageDescType	83
9.1.15	SwPackageDescVectorType	83
9.1.16	SwClusterStateType	84
9.1.17	SwClusterInfoType	84
9.1.18	SwClusterInfoVectorType	84
9.1.19	PackageManagementStatusType	85
9.1.20	ActionType	85
9.1.21	ResultType	85
9.1.22	GetHistoryType	86
9.1.23	GetHistoryVectorType	86
9.1.24	CampaignHistoryType	87
9.1.25	CampaignErrorType	87
9.1.26	CampaignFailureType	87
9.1.27	UCMStepErrorType	88
9.1.28	SoftwarePackageStepType	88
9.1.29	HistoryVectorType	88
9.1.30	CampaignStateType	89
9.1.31	TransferStateType	89
9.1.32	SafetyConditionType	90
9.1.33	SafetyConditionsVectorType	90
9.1.34	SafetyStatesType	90
9.1.35	SafetyStatesVectorType	91
9.2	Provided Service Interfaces	91
9.2.1	Package Management	91
9.2.2	Vehicle Package Management	98
9.2.3	Vehicle Driver Application Interface	104
9.2.4	Vehicle State Manager	108
9.3	Required Interface	109
9.3.1	State Management Update Request	109
9.4	Application Errors	109
9.4.1	Application Error Domain	109
9.4.1.1	UCMErrorDomain	109
10	Sequence diagrams	111
10.1	Update process	111
10.2	Data transmission	112
10.3	Package processing	113
10.4	Activation	114
10.5	Failing activation	115
10.6	UCM Master simplified vehicle update	116
A	Mentioned Manifest Elements	117
B	Interfaces to other Functional Clusters (informative)	125

B.1	Overview	125
B.2	Interfaces Tables	125
B.2.1	UCM update notification	125
C	Packages distribution within vehicle detailed sequence examples	126
C.1	Collect information of present Software Clusters in vehicle	126
C.2	Action computation	126
C.2.1	Pull package from Backend into vehicle	127
C.2.2	Push package from backend into vehicle	127
C.3	Packages transfer from backend into targeted UCM	129
C.4	Package processing	130
C.5	Package activation	131
C.6	Package rollback	132
C.7	Campaign reporting	133
D	Security Analysis of Installation and Update	134
D.1	Securing Software Package	134
D.2	Securing Calls to UCM	134
D.3	Suppressing Call to UCM	135
D.4	Resource Starvation	135
D.5	Zombie Sessions	135
E	History of Constraints and Specification Items	137
E.1	Constraint and Specification Item History of this document according to AUTOSAR Release R19-11.	137
E.1.1	Added Traceables in R19-11	137
E.1.2	Changed Traceables in R19-11	140
E.1.3	Deleted Traceables in R19-11	140
E.1.4	Added Constraints in R19-11	141
E.1.5	Changed Constraints in R19-11	141
E.1.6	Deleted Constraints in R19-11	141
E.2	Constraint and Specification Item History of this document according to AUTOSAR Release R20-11.	141
E.2.1	Added Traceables in R20-11	141
E.2.2	Changed Traceables in R20-11	144
E.2.3	Deleted Traceables in R20-11	147
E.2.4	Added Constraints in R20-11	148
E.2.5	Changed Constraints in R20-11	148
E.2.6	Deleted Constraints in R20-11	148
E.3	Constraint and Specification Item History of this document according to AUTOSAR Release R21-11.	149
E.3.1	Added Traceables in R21-11	149
E.3.2	Changed Traceables in R21-11	150
E.3.3	Deleted Traceables in R21-11	154
E.3.4	Added Constraints in R21-11	154
E.3.5	Changed Constraints in R21-11	154
E.3.6	Deleted Constraints in R21-11	155

1 Introduction and functional overview

This software specification contains the functional description and interfaces of the functional cluster Update and Configuration Management which belongs to the [AUTOSAR Adaptive Platform Services](#). Update and Configuration Management has the responsibility of installing, updating and removing software on an [AUTOSAR Adaptive Platform](#) in a safe and secure way while not sacrificing the dynamic nature of the [AUTOSAR Adaptive Platform](#).

The Update and Configuration Management functional cluster is responsible for:

- Version reporting of the software present in the [AUTOSAR Adaptive Platform](#)
- Receiving and buffering software updates
- Checking that enough resources are available to ensure a software update
- Performing software updates and providing log messages and progress information
- Validating the outcome of a software update
- Providing rollback functionality to restore a known functional state in case of failure

In addition to updating and changing software on the [AUTOSAR Adaptive Platform](#), the Update and Configuration Management is also responsible for updates and changes to the [AUTOSAR Adaptive Platform](#) itself, including all functional clusters, the underlying POSIX OS and its kernel with the responsibilities defined above.

In order to allow flexibility in how Update and Configuration Management is used, it will expose its functionality via `ara::com` service interfaces, not direct APIs. This ensures that the user of the functional cluster Update and Configuration Management does not have to be located on the same ECU.

2 Acronyms and abbreviations

The glossary below includes acronyms and abbreviations relevant to the UCM module that are not included in the [1, AUTOSAR glossary].

Abbreviation / Acronym:	Description:
DM	AUTOSAR Adaptive Diagnostic Management
UCM	Update and Configuration Management
UCM Master	UCM Master is distributing packages and coordinating an update campaign in a vehicle
Vehicle State Manager	see [1] AUTOSAR Glossary
Backend	Backend is a server hosting Software Packages
OTA Client	OTA Client is an Adaptive Application in communication with Backend Over The Air
Application Error	Errors returned by UCM
Boot options	Boot Manager Configuration
VCI	Vehicle Communication Interface
MVCI	Modular Vehicle Communication Interface
D-PDU API	Diagnostic Protocol Data Unit Application Programming Interface
RDF	Root Description File
MDF	Module Description File
integrity check	verification method proving there has not been any alteration of the artefact content

Some technical terms used in this document are already defined in the corresponding document mentioned in the table below. This is to avoid duplicate definition of the technical term. And to refer to the correct document.

Term	Description
Adaptive Application	see [1] AUTOSAR Glossary
Application	see [1] AUTOSAR Glossary
AUTOSAR Adaptive Platform	see [1] AUTOSAR Glossary
AUTOSAR Classic Platform	see [1] AUTOSAR Glossary
Electronic Control Unit	see [1] AUTOSAR Glossary
Adaptive Platform Foundation	see [1] AUTOSAR Glossary
Adaptive Platform Services	see [1] AUTOSAR Glossary
Manifest	see [1] AUTOSAR Glossary
Executable	see [1] AUTOSAR Glossary
Functional Cluster	see [1] AUTOSAR Glossary
Machine	see [1] AUTOSAR Glossary
Service	see [1] AUTOSAR Glossary
Service Interface	see [1] AUTOSAR Glossary
Service Discovery	see [1] AUTOSAR Glossary
Execution Management	see [2] AUTOSAR Execution Management
MachineFG	see [2] AUTOSAR Execution Management
State Management	see [3] AUTOSAR State Management
Function Group	see [3] AUTOSAR State Management
Communication Management	see [4] AUTOSAR Communication Management
Software Cluster	see [1] AUTOSAR Glossary
Software Package	see [1] AUTOSAR Glossary
Vehicle Package	see [1] AUTOSAR Glossary

Table 2.1: Reference to Technical Terms

3 Related documentation

3.1 Input documents & related standards and norms

- [1] Glossary
AUTOSAR_TR_Glossary
- [2] Specification of Execution Management
AUTOSAR_SWS_ExecutionManagement
- [3] Specification of State Management
AUTOSAR_SWS_StateManagement
- [4] Specification of Communication Management
AUTOSAR_SWS_CommunicationManagement
- [5] General Requirements specific to Adaptive Platform
AUTOSAR_RS_General
- [6] Specification of Cryptography
AUTOSAR_SWS_Cryptography
- [7] Specification of Identity and Access Management
AUTOSAR_SWS_IdentityAndAccessManagement
- [8] Requirements on Update and Configuration Management
AUTOSAR_RS_UpdateAndConfigurationManagement
- [9] Specification of Manifest
AUTOSAR_TPS_ManifestSpecification
- [10] Explanation of Adaptive Platform Design
AUTOSAR_EXP_PlatformDesign
- [11] Specification of Persistency
AUTOSAR_SWS_Persistency
- [12] Specification of Platform Health Management
AUTOSAR_SWS_PlatformHealthManagement

3.2 Related specification

See chapter [3.1](#).

3.3 Further applicable specification

AUTOSAR provides a general specification [5] which is also applicable for [UCM](#). The specification RS General shall be considered as additional and required specification for implementation of [UCM](#).

4 Constraints and assumptions

4.1 Known Limitations

UCM is not responsible to initiate the update process. UCM realizes a service interface to achieve this operation. The user of this service interface is responsible to verify that the vehicle is in a updatable state before executing a software update procedure on demand. It is also in the responsibility of the user to communicate with other AUTOSAR Adaptive Platforms or AUTOSAR Classic Platforms within the vehicle.

The UCM receives a locally available software package for processing. The software package is usually downloaded from the OEM backend. The download of the software packages has to be done by another application, i.e. UCM does not manage the connection to the OEM backend. Prior to triggering their processing, the software packages have to be transferred to UCM by using the provided `ara::com` interface.

The UCM update process is designed to cover updates on use case with single AUTOSAR Adaptive Platform. UCM can update Adaptive Applications, the AUTOSAR Adaptive Platform itself, including all functional clusters and the underlying OS.

The UCM is not responsible for enforcing authentication and access control to the provided interfaces. The document currently does not provide any mechanism for the confidentiality protection as well as measures against denial of service attacks. The assumption is that the platform preserves the integrity of parameters exchanged between UCM and its user.

The possibility to restart a specific application instead of a Machine reboot depends of the kind of update and application, is therefore implementation specific and is defined in the Software Package manifest.

UCM does only support updates of ARA::COM and UDS (ISO-14229) compliant ECUs. UCM is not controlling any action done by diagnostic tool directly updating a Classic platform. For instance UCM cannot protect against downgrading of a Software Cluster in a Classic platform by a diagnostic tool.

4.2 Applicability to car domains

No restrictions to applicability.

5 Dependencies to other functional clusters

The UCM functional cluster expose services to client applications via the `ara::com` middleware.

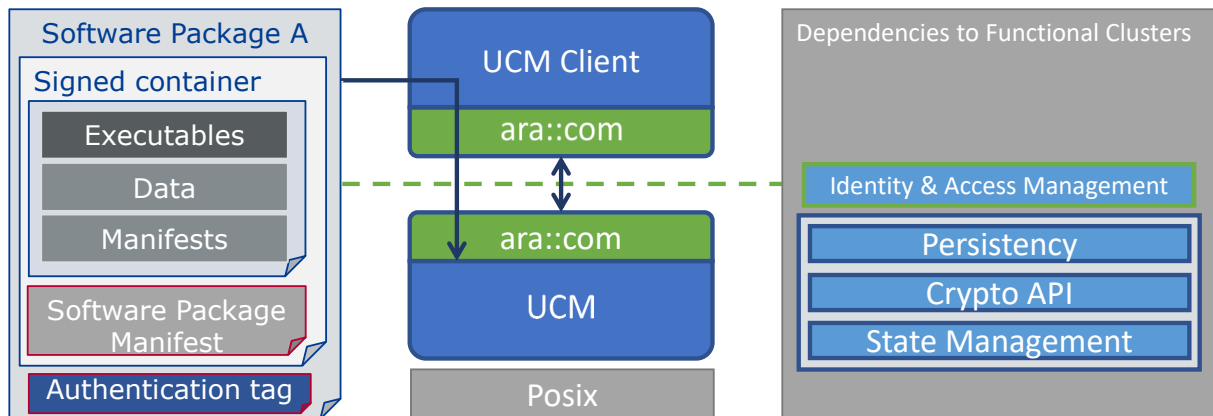


Figure 5.1: UCM dependencies to other Functional Clusters.

5.1 Interfaces to Adaptive State Management

UCM relies on [State Management](#) and its provided `UpdateRequest` Service Interface to perform the necessary `Function Group` state changes needed to activate the newly installed, updated or removed software.

Certain applications can conflict with the update process or the newly updated package, and they need to be stopped during the update process. This could be achieved by putting the machine to a safe `Machine` state, by activating a combination of suitable `Function Groups` and its states. It is the responsibility of the platform integrator to define this state or `Function Groups`. The Adaptive Application accessing the UCM, should make sure that the platform is switched to this state (using interfaces from [State Management](#)), before starting the update.

5.2 UCM service over ara::com

The UCM shall provide a service interface over `ara::com` using methods and fields.

5.3 Interfaces to Adaptive Crypto Interface

UCM uses Crypto Interface for [AUTOSAR Adaptive Platform \[6\]](#) to verify package integrity and authenticity and to decrypt confidential update data.

5.4 Interfaces to Identity and Access Management

Identity and Access Management [7] controls the UCM's Clients access to UCM's service interface `PackageManagement`.

5.5 UCM use of Persistency library

UCM may use `ara::per` to store internal status information. This can e.g. be used to recover after reboot.

6 Requirements Tracing

The following tables reference the requirements specified in [8] and links to the fulfillment of these. Please note that if column “Satisfied by” is empty for a specific requirement this means that this requirement is not fulfilled by this document.

Requirement	Description	Satisfied by
[RS_EM_00014]	Execution Management shall support a Trusted Platform.	[SWS_UCM_00202]
[RS_SM_00001]	State Management shall coordinate and control multiple sets of Applications .	[SWS_UCM_00242]
[RS_UCM_00001]	UCM shall support installing new software on AUTOSAR Adaptive Platform	[SWS_UCM_00001] [SWS_UCM_00017] [SWS_UCM_00073] [SWS_UCM_00099] [SWS_UCM_00131] [SWS_UCM_00137] [SWS_UCM_00165] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00240] [SWS_UCM_00266]
[RS_UCM_00002]	UCM shall support reporting version information for an AUTOSAR Adaptive Platform	[SWS_UCM_00004] [SWS_UCM_00038] [SWS_UCM_00039] [SWS_UCM_00040] [SWS_UCM_00071] [SWS_UCM_00077] [SWS_UCM_00078] [SWS_UCM_00079] [SWS_UCM_00112] [SWS_UCM_00130] [SWS_UCM_00131] [SWS_UCM_00174] [SWS_UCM_00175] [SWS_UCM_00176] [SWS_UCM_00177] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00185] [SWS_UCM_00186] [SWS_UCM_00187] [SWS_UCM_01114] [SWS_UCM_01136] [SWS_UCM_01137] [SWS_UCM_01138] [SWS_UCM_CONSTR_00001] [SWS_UCM_CONSTR_00002]

Requirement	Description	Satisfied by
[RS_UCM_00003]	UCM shall support updating installed software on Adaptive Platform	[SWS_UCM_00017] [SWS_UCM_00165] [SWS_UCM_00190] [SWS_UCM_00257]
[RS_UCM_00004]	UCM shall support uninstalling software on AUTOSAR Adaptive Platform	[SWS_UCM_00001] [SWS_UCM_00137] [SWS_UCM_00165] [SWS_UCM_00184] [SWS_UCM_00266] [SWS_UCM_00273]
[RS_UCM_00005]	UCM shall make sure that persistent data owned by uninstalled software is deleted	[SWS_UCM_00001] [SWS_UCM_00137] [SWS_UCM_00266]
[RS_UCM_00006]	UCM shall verify Software Package authenticity and integrity using strong cryptographic techniques	[SWS_UCM_00028] [SWS_UCM_00038] [SWS_UCM_00039] [SWS_UCM_00040] [SWS_UCM_00077] [SWS_UCM_00078] [SWS_UCM_00079] [SWS_UCM_00136] [SWS_UCM_00200] [SWS_UCM_00209]
[RS_UCM_00007]	UCM shall check that software dependencies are fulfilled	[SWS_UCM_00026] [SWS_UCM_00027] [SWS_UCM_00120] [SWS_UCM_00136] [SWS_UCM_00161] [SWS_UCM_00231] [SWS_UCM_00260]
[RS_UCM_00008]	UCM shall support a recovery mechanism in case of failed update process	[SWS_UCM_00005] [SWS_UCM_00024] [SWS_UCM_00107] [SWS_UCM_00110] [SWS_UCM_00111] [SWS_UCM_00126] [SWS_UCM_00127] [SWS_UCM_00131] [SWS_UCM_00146] [SWS_UCM_00155] [SWS_UCM_00162] [SWS_UCM_00163] [SWS_UCM_00164] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00264] [SWS_UCM_00282]

Requirement	Description	Satisfied by
[RS_UCM_00010]	UCM shall support reporting of Software Packages downloaded for AUTOSAR Adaptive Platform	[SWS_UCM_00038] [SWS_UCM_00039] [SWS_UCM_00040] [SWS_UCM_00069] [SWS_UCM_00077] [SWS_UCM_00078] [SWS_UCM_00079] [SWS_UCM_00131] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_CONSTR_00001] [SWS_UCM_CONSTR_00002]
[RS_UCM_00011]	UCM shall support reporting software versions which have been installed and will be activated when new versions are activated	[SWS_UCM_00030] [SWS_UCM_00038] [SWS_UCM_00039] [SWS_UCM_00040] [SWS_UCM_00077] [SWS_UCM_00078] [SWS_UCM_00079] [SWS_UCM_00131] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00185] [SWS_UCM_00186] [SWS_UCM_00187] [SWS_UCM_00191] [SWS_UCM_00192] [SWS_UCM_00193] [SWS_UCM_00194] [SWS_UCM_00195] [SWS_UCM_00196] [SWS_UCM_00197] [SWS_UCM_00198] [SWS_UCM_00199] [SWS_UCM_00286] [SWS_UCM_00287] [SWS_UCM_CONSTR_00001] [SWS_UCM_CONSTR_00002]
[RS_UCM_00012]	UCM shall check the consistency of transferred Software Package	[SWS_UCM_00029] [SWS_UCM_00038] [SWS_UCM_00039] [SWS_UCM_00040] [SWS_UCM_00077] [SWS_UCM_00078] [SWS_UCM_00079] [SWS_UCM_00104] [SWS_UCM_00136] [SWS_UCM_00207] [SWS_UCM_00209] [SWS_UCM_00213] [SWS_UCM_00267] [SWS_UCM_01306] [SWS_UCM_CONSTR_00012]

Requirement	Description	Satisfied by
[RS_UCM_00013]	UCM shall check that it has enough resources to receive, process and store the Software Package and associated data	[SWS_UCM_00007] [SWS_UCM_00008] [SWS_UCM_00010] [SWS_UCM_00087] [SWS_UCM_00088] [SWS_UCM_00092] [SWS_UCM_00098] [SWS_UCM_00136] [SWS_UCM_00140] [SWS_UCM_00145] [SWS_UCM_00206] [SWS_UCM_00217] [SWS_UCM_00243] [SWS_UCM_00275] [SWS_UCM_00276] [SWS_UCM_00283] [SWS_UCM_00289] [SWS_UCM_01011]
[RS_UCM_00014]	UCM shall check that correct amount of data has been transferred for the Software Package	[SWS_UCM_00136] [SWS_UCM_00204] [SWS_UCM_00205] [SWS_UCM_00243]
[RS_UCM_00015]	UCM shall remove all unneeded data after Software Package processing has finished	[SWS_UCM_00020] [SWS_UCM_00131] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00265] [SWS_UCM_00285]
[RS_UCM_00017]	UCM shall support installing and updating the persistent data storage for an Adaptive Application	[SWS_UCM_00184] [SWS_UCM_00273]
[RS_UCM_00018]	UCM shall announce when an application has been installed, updated or uninstalled	[SWS_UCM_00021] [SWS_UCM_00131] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00259]

Requirement	Description	Satisfied by
[RS_UCM_00019]	UCM shall support simultaneous transfers multiple <i>Software Packages</i>	[SWS_UCM_00007] [SWS_UCM_00008] [SWS_UCM_00010] [SWS_UCM_00031] [SWS_UCM_00075] [SWS_UCM_00087] [SWS_UCM_00088] [SWS_UCM_00092] [SWS_UCM_00098] [SWS_UCM_00140] [SWS_UCM_00145] [SWS_UCM_00148] [SWS_UCM_00203] [SWS_UCM_00204] [SWS_UCM_00205] [SWS_UCM_00206] [SWS_UCM_00208] [SWS_UCM_00212] [SWS_UCM_00214] [SWS_UCM_00215] [SWS_UCM_00216] [SWS_UCM_00275] [SWS_UCM_00276] [SWS_UCM_00283]
[RS_UCM_00020]	UCM shall support cancellation of an update or install operation	[SWS_UCM_00003] [SWS_UCM_00167] [SWS_UCM_00234] [SWS_UCM_00235] [SWS_UCM_00236] [SWS_UCM_00237] [SWS_UCM_00238] [SWS_UCM_00239] [SWS_UCM_00278] [SWS_UCM_00279] [SWS_UCM_01273] [SWS_UCM_01274]
[RS_UCM_00021]	UCM shall support atomic activation of installed or updated <i>Software Clusters</i>	[SWS_UCM_00022] [SWS_UCM_00025] [SWS_UCM_00094] [SWS_UCM_00131] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00241] [SWS_UCM_00259] [SWS_UCM_00260] [SWS_UCM_00280]
[RS_UCM_00023]	UCM shall provide an interface to read progress of the update	[SWS_UCM_00018] [SWS_UCM_00131] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00220]

Requirement	Description	Satisfied by
[RS_UCM_00024]	UCM shall provide an interface to read the state of UCM	[SWS_UCM_00019] [SWS_UCM_00044] [SWS_UCM_00080] [SWS_UCM_00081] [SWS_UCM_00083] [SWS_UCM_00084] [SWS_UCM_00085] [SWS_UCM_00086] [SWS_UCM_00131] [SWS_UCM_00147] [SWS_UCM_00149] [SWS_UCM_00150] [SWS_UCM_00151] [SWS_UCM_00152] [SWS_UCM_00153] [SWS_UCM_00154] [SWS_UCM_00166] [SWS_UCM_00168] [SWS_UCM_00169] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00258]
[RS_UCM_00025]	UCM shall support receiving of Software Package data	[SWS_UCM_00007] [SWS_UCM_00008] [SWS_UCM_00010] [SWS_UCM_00031] [SWS_UCM_00032] [SWS_UCM_00087] [SWS_UCM_00088] [SWS_UCM_00092] [SWS_UCM_00098] [SWS_UCM_00131] [SWS_UCM_00140] [SWS_UCM_00145] [SWS_UCM_00165] [SWS_UCM_00166] [SWS_UCM_00167] [SWS_UCM_00168] [SWS_UCM_00169] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00217] [SWS_UCM_00219] [SWS_UCM_00243] [SWS_UCM_00272] [SWS_UCM_00275] [SWS_UCM_00276] [SWS_UCM_00283]

Requirement	Description	Satisfied by
[RS_UCM_00026]	UCM shall process installation of new Software Packages , updates and removal of existing Software Packages sequentially	[SWS_UCM_00017] [SWS_UCM_00044] [SWS_UCM_00122] [SWS_UCM_00184] [SWS_UCM_00218] [SWS_UCM_00219] [SWS_UCM_00240] [SWS_UCM_00257] [SWS_UCM_00258] [SWS_UCM_00261] [SWS_UCM_00262] [SWS_UCM_00263] [SWS_UCM_00265] [SWS_UCM_00273] [SWS_UCM_00277] [SWS_UCM_00281]
[RS_UCM_00027]	UCM shall be able to safely recover from unexpected interruption.	[SWS_UCM_00157] [SWS_UCM_00158] [SWS_UCM_00270]
[RS_UCM_00028]	UCM shall support updating Functional Clusters	[SWS_UCM_00100] [SWS_UCM_00245]
[RS_UCM_00029]	UCM shall support updating the underlying Operating System	[SWS_UCM_00101] [SWS_UCM_00245]
[RS_UCM_00030]	UCM shall be able to verify the updated software during activation	[SWS_UCM_00107] [SWS_UCM_00111] [SWS_UCM_00126] [SWS_UCM_00127] [SWS_UCM_00146] [SWS_UCM_00155] [SWS_UCM_00162] [SWS_UCM_00163] [SWS_UCM_00164] [SWS_UCM_00260] [SWS_UCM_00264]
[RS_UCM_00031]	UCM shall prevent installation of arbitrary previous version of an Adaptive Application or the Adaptive Platform	[SWS_UCM_00103] [SWS_UCM_00190]
[RS_UCM_00032]	UCM shall provide an interface to return UCM's action history	[SWS_UCM_00115] [SWS_UCM_00131] [SWS_UCM_00132] [SWS_UCM_00133] [SWS_UCM_00134] [SWS_UCM_00135] [SWS_UCM_00160] [SWS_UCM_00181] [SWS_UCM_00182] [SWS_UCM_00183] [SWS_UCM_00271] [SWS_UCM_01177] [SWS_UCM_01178]

Requirement	Description	Satisfied by
[RS_UCM_00033]	UCM Master shall support reporting version information of a complete vehicle	[SWS_UCM_00268] [SWS_UCM_00269] [SWS_UCM_01101] [SWS_UCM_01103] [SWS_UCM_01120] [SWS_UCM_01135] [SWS_UCM_01218] [SWS_UCM_CONSTR_00013] [SWS_UCM_CONSTR_00014]
[RS_UCM_00034]	UCM Master shall record all UCM Master's action history	[SWS_UCM_00251] [SWS_UCM_00252] [SWS_UCM_00253] [SWS_UCM_00254] [SWS_UCM_00255] [SWS_UCM_00256] [SWS_UCM_01247] [SWS_UCM_01248] [SWS_UCM_01266] [SWS_UCM_01267] [SWS_UCM_01268] [SWS_UCM_01269]
[RS_UCM_00035]	UCM Master shall coordinate software update in a vehicle across multiple Electronic Control Units	[SWS_UCM_00178] [SWS_UCM_00210] [SWS_UCM_01013] [SWS_UCM_01018] [SWS_UCM_01119] [SWS_UCM_01121] [SWS_UCM_01122] [SWS_UCM_01123] [SWS_UCM_01124] [SWS_UCM_01125] [SWS_UCM_01126] [SWS_UCM_01127] [SWS_UCM_01128] [SWS_UCM_01129] [SWS_UCM_01130] [SWS_UCM_01131] [SWS_UCM_01132] [SWS_UCM_01133] [SWS_UCM_01134] [SWS_UCM_01204] [SWS_UCM_01205] [SWS_UCM_01207] [SWS_UCM_01209] [SWS_UCM_01212]

Requirement	Description	Satisfied by
		[SWS_UCM_01214] [SWS_UCM_01215] [SWS_UCM_01216] [SWS_UCM_01217] [SWS_UCM_01218] [SWS_UCM_01219] [SWS_UCM_01220] [SWS_UCM_01221] [SWS_UCM_01222] [SWS_UCM_01227] [SWS_UCM_01228] [SWS_UCM_01229] [SWS_UCM_01234] [SWS_UCM_01236] [SWS_UCM_01239] [SWS_UCM_01240] [SWS_UCM_01241] [SWS_UCM_01242] [SWS_UCM_01243] [SWS_UCM_01244] [SWS_UCM_01246] [SWS_UCM_01270] [SWS_UCM_01271] [SWS_UCM_01272] [SWS_UCM_01303] [SWS_UCM_01305] [SWS_UCM_CONSTR_00003] [SWS_UCM_CONSTR_00005] [SWS_UCM_CONSTR_00006] [SWS_UCM_CONSTR_00009] [SWS_UCM_CONSTR_00011] [SWS_UCM_CONSTR_00015]
[RS_UCM_00036]	UCM Master shall use platform communication services for interacting with UCM subordinates	[SWS_UCM_00009] [SWS_UCM_00173] [SWS_UCM_01005] [SWS_UCM_01015] [SWS_UCM_01016]
[RS_UCM_00037]	UCM Master shall ensure it is safe to perform any modification to the vehicle	[SWS_UCM_00179] [SWS_UCM_01109] [SWS_UCM_01110] [SWS_UCM_01117] [SWS_UCM_01222] [SWS_UCM_01228] [SWS_UCM_01229] [SWS_UCM_01234] [SWS_UCM_01240] [SWS_UCM_01244] [SWS_UCM_01246] [SWS_UCM_CONSTR_00003] [SWS_UCM_CONSTR_00004] [SWS_UCM_CONSTR_00005] [SWS_UCM_CONSTR_00006] [SWS_UCM_CONSTR_00007] [SWS_UCM_CONSTR_00008] [SWS_UCM_CONSTR_00009]

Requirement	Description	Satisfied by
[RS_UCM_00038]	UCM Master shall interact with driver	[SWS_UCM_00180] [SWS_UCM_01105] [SWS_UCM_01107] [SWS_UCM_01117] [SWS_UCM_01118] [SWS_UCM_01120] [SWS_UCM_01135] [SWS_UCM_01222] [SWS_UCM_01228] [SWS_UCM_01234]
[RS_UCM_00039]	UCM Master shall prevent processing of compromised Vehicle Packages	[SWS_UCM_00200] [SWS_UCM_01221] [SWS_UCM_01301] [SWS_UCM_01302]
[RS_UCM_00042]	UCM Master shall provide an interface to read the state of an update campaign	[SWS_UCM_01017] [SWS_UCM_01203] [SWS_UCM_01205] [SWS_UCM_01265]
[RS_UCM_00043]	UCM Master shall orchestrate a software update campaign according to the Vehicle Package's Manifest	[SWS_UCM_00179] [SWS_UCM_00180] [SWS_UCM_00210] [SWS_UCM_01003] [SWS_UCM_01014] [SWS_UCM_01015] [SWS_UCM_01016] [SWS_UCM_01201] [SWS_UCM_01207] [SWS_UCM_01209] [SWS_UCM_01212] [SWS_UCM_01228] [SWS_UCM_01301] [SWS_UCM_01302] [SWS_UCM_01303] [SWS_UCM_01305]
[RS_UCM_00044]	UCM or UCM Master initialization	[SWS_UCM_00274] [SWS_UCM_01019]

7 Functional specification

7.1 UCM

7.1.1 Software Cluster lifecycle

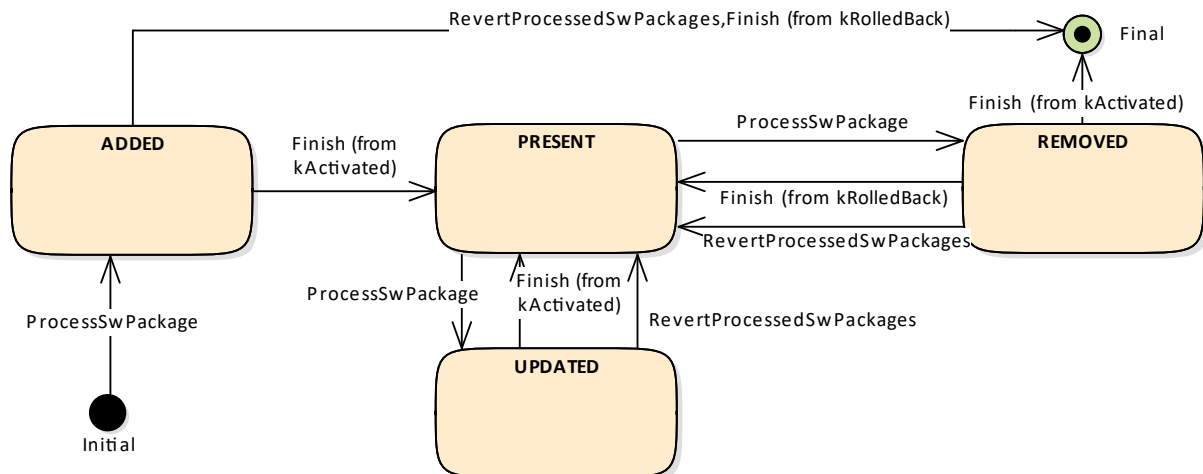


Figure 7.1: State Machine for a **Software Cluster**

The state machine in Fig. 7.1 describes the life-cycle states of a **Software Cluster**. These states are reported with `GetSwClusterChangeInfo` method.

[SWS_UCM_00191] Software Cluster life-cycle state kAdded [A **Software Cluster** state shall be `kAdded` after the **Software Cluster** is successfully processed with `ProcessSwPackage` method call on the **AUTOSAR Adaptive Platform** and if it was not previously present in the **AUTOSAR Adaptive Platform** and before activation is finished.]([RS_UCM_00011](#))

[SWS_UCM_00192] Software Cluster life-cycle state transition from kAdded to kPresent [A **Software Cluster** state shall change from `kAdded` to `kPresent` after a successful activation of a newly added **Software Cluster** with `Finish` method call.]([RS_UCM_00011](#))

[SWS_UCM_00195] Software Cluster life-cycle state kUpdated [A **Software Cluster** state shall be `kUpdated` after a successful processing of the updated **Software Cluster** with `ProcessSwPackage` method call and before activation is finished.]([RS_UCM_00011](#))

[SWS_UCM_00193] Software Cluster life-cycle state transition from kUpdated to kPresent [A **Software Cluster** state shall change from `kUpdated` to `kPresent` after a successful activation of the updated **Software Cluster** with `Finish` method call, or after reverting the **Software Cluster** update with a `RevertProcessedSwPackage` method call.]([RS_UCM_00011](#))

[SWS_UCM_00196] Software Cluster life-cycle state kRemoved [A `Software Cluster` state shall be `kRemoved` after successful completion of method `ProcessSwPackage` which involves the removal of the existed `Software Cluster` and before activation is finished.] (*RS_UCM_00011*)

[SWS_UCM_00194] Software Cluster life-cycle state transition from kRemoved to kPresent in case of RevertProcessedSwPackages call [A `Software Cluster` state shall change from `kRemoved` to `kPresent` after a successful call to `RevertProcessedSwPackages` method in case the `Software Cluster` was previously requested to be removed by `ProcessSwPackage` method call.] (*RS_UCM_00011*)

[SWS_UCM_00286]{DRAFT} Software Cluster life-cycle state transition from kRemoved to kPresent in case of Finish call [A `Software Cluster` state shall change from `kRemoved` to `kPresent` after a successful call to `Finish` method in case a `Software Cluster` being removed has to be rolled back after a failing activation.] (*RS_UCM_00011*)

[SWS_UCM_00197] End of Software Cluster life-cycle state from state kAdded in case of RevertProcessedSwPackages call [A `Software Cluster` shall reach the end of its life-cycle from `kAdded` after a successful removal of a newly added `Software Cluster` with `RevertProcessedSwPackages` method call in case the `Software Cluster` was previously requested to be added by `ProcessSwPackage` method call.] (*RS_UCM_00011*)

[SWS_UCM_00287]{DRAFT} End of Software Cluster life-cycle state from state kAdded in case of Finish call [A `Software Cluster` shall reach the end of its life-cycle from `kAdded` after a successful removal of a newly added `Software Cluster` with `Finish` method call in case the newly added `Software Cluster` has to be rolled back after a failing activation.] (*RS_UCM_00011*)

[SWS_UCM_00198] End of Software Cluster life-cycle state from state kRemoved [A `Software Cluster` shall reach the end of its life-cycle if it is successfully removed with a `Finish` method call and the `Software Cluster` is in state `kRemoved`.] (*RS_UCM_00011*)

[SWS_UCM_00199] Reporting of Software Cluster reaching end of life-cycle [Any `Software Cluster` reaching the end of its life-cycle shall not be reported by UCM any more.] (*RS_UCM_00011*)

7.1.2 Technical Overview

One of the declared goals of `AUTOSAR Adaptive Platform` is the ability to flexibly update the software and its configuration through over-the-air updates. During the life-cycle of an `AUTOSAR Adaptive Platform`, UCM is responsible to perform software modifications on the machine and to retain consistency of the whole system.

The **UCM Functional Cluster** provides a service interface that exposes its functionality to retrieve **AUTOSAR Adaptive Platform** software information and consistently execute software updates. Since `ara::com` is used, the client using the **UCM** service interface can be located on the same **AUTOSAR Adaptive Platform**, but also remote clients are possible.

The service interface has been primarily designed with the goal to make it possible to use standard diagnostic services for downloading and installing software updates for the **AUTOSAR Adaptive Platform**. However, the methods and fields in the service interface are designed in such a way that they can be used in principle by any Adaptive Application. **UCM** does not impose any specific protocol on how data is transferred to the **AUTOSAR Adaptive Platform** and how package processing is controlled. In particular **UCM** does not expose diagnostic services.

As shown in Figure 7.2, whether the use case is an over-the-air update or garage update done through diagnostics, it is not visible to the **UCM**. The **UCM Client** abstracts the use case from the **UCM** and forwards the data stream and sequence control commands to the **UCM**. Later in this document, the term **UCM Client** is used to describe an **Adaptive Application** that consumes **UCM PackageManagement** services through **UCM ara::com** API. **Diagnostic Application** and **UCM Master** are two examples of such **UCM Clients**.

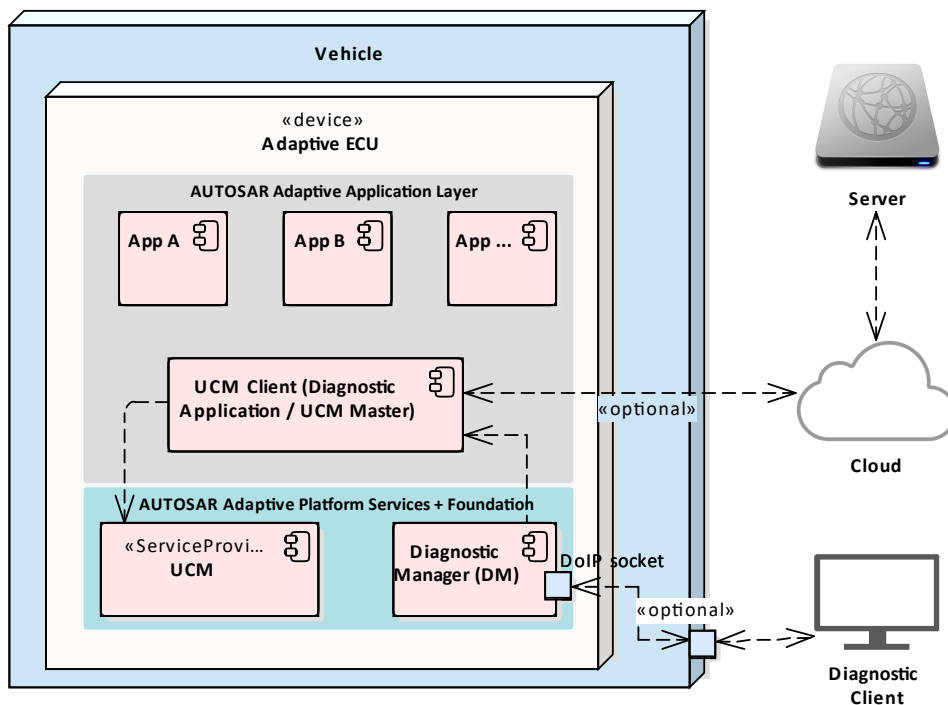


Figure 7.2: Architecture overview for diagnostic use case

7.1.2.1 Software Package Management

The **UCM** update sequence consists three different phases:

- **Software Package transfer:** A phase in which, one or several **Software Packages** are transferred from the UCM's Client Application to the internal buffer of the UCM. For further information see chapter [7.1.3](#).
- **Software Package processing:** A phase in which the UCM performs the operation (`kInstall`, `kUpdate`, `kRemove`) on the relevant **SoftwareCluster**. For further information see chapter [7.1.5](#).
- **Activation:** A phase in which the UCM checks the dependencies of the **SoftwareClusters** that have been involved in the operation, then activates them and finally check that all the **SoftwareClusters** can be executed properly (via **State Management**) prior to finishing the update. For further information see chapter [7.1.6](#)

7.1.2.1.1 Software Package

[SWS_UCM_00122] Software Package utilization [The unit for deployment that the UCM shall take as input is called **Software Package**, see [1]. Each **Software Package** shall address a single **SoftwareCluster**.] ([RS_UCM_00026](#))

A **SoftwareCluster** can act in two roles:

- **'Sub'-SoftwareCluster** : It is a **SoftwareCluster** without diagnostic target address, containing processes, executables and further elements
- **'Root'-SoftwareCluster** : It is a **SoftwareCluster** with a diagnostic target address that may reference several other **'Sub'-SoftwareClusters**, which thus form a logical group.

A **SoftwareCluster** can be of the following categories expressed by the attribute **SoftwareCluster.category** :

- **APPLICATION_LAYER**: the **SoftwareCluster** can be removed by UCM
- **PLATFORM_CORE**: the **SoftwareCluster** cannot be removed as it would break the system.
- **PLATFORM**: the **SoftwareCluster** is part of the platform software and can be removed

[SWS_UCM_00245]{DRAFT} Software Cluster category [UCM shall not remove a **SoftwareCluster** that has category set to `PLATFORM_CORE`.] ([RS_UCM_00028](#), [RS_UCM_00029](#))

A **Software Package** has to be modelled as a so-called **SoftwareCluster** which describes the content of a **Software Package** that is downloaded or uploaded to the AUTOSAR Adaptive Platform, see [9].

The term **Software Package** is used for the "physical", uploadable **Software Package** that is processed by UCM whereas the term **SoftwareCluster** is used

for the modeling element. In the model, the content of a `SoftwareCluster` is defined by references to all required model elements. The `SoftwareCluster` and the related model elements define the content of the manifest that is part of the `Software Package`. The `Software Package` format and the update scope are described in chapter "Content of a `Software Package`" as well as in [10].

[SWS_UCM_CONSTR_00012]{DRAFT} [The `SoftwareCluster` aggregation of `ArtifactChecksum` shall not include the uri of this same `SoftwareCluster` manifest.](*RS_UCM_00012*)

The uri attribute in `ArtifactChecksum` is referring to the artifact contained in the `SoftwareCluster`.

7.1.2.1.2 Content of a Software Package

Each `Software Package` addresses a single `SoftwareCluster` and contains manifests, executables and further data (depending on the role of the `SoftwareCluster`) as the example sketched in Figure 7.3.

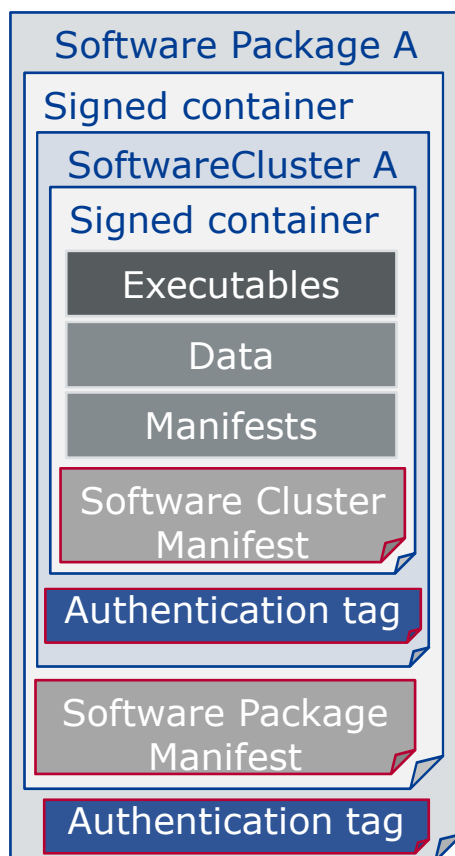


Figure 7.3: Software Package content description

A single `Software Package` is designed in a way that it could contain one or several executables of `Adaptive Applications`, kernel or firmware updates, or updated

configuration and calibration data to be deployed on the [AUTOSAR Adaptive Platform](#). An exemplary implementation of the adaptive workflow with [Software Packages](#) can be seen in chapter Methodology and Manifest in [10]. For more details on the [Software Package](#) class, you can refer to [SoftwarePackage](#)

[SWS_UCM_00112] Software Cluster and version [[SoftwareCluster](#)'s manifest shall include a name and a version following description of [StrongRevisionLabelString](#).] ([RS_UCM_00002](#))

[SWS_UCM_CONSTR_00001] [If any content (for instance an executable or persistent data) of an already installed [SoftwareCluster](#) is modified by an incoming [Software Package](#), then the version number of the incoming [SoftwareCluster](#) indicated in the [Software Package](#) shall be higher than the version number of the already installed [SoftwareCluster](#).] ([RS_UCM_00002](#), [RS_UCM_00010](#), [RS_UCM_00011](#))

If the constraint is violated, an error will be raised according to [[SWS_UCM_00103](#)].

A higher version number is achieved by an increment of the [MajorVersion](#), the [MinorVersion](#), or the [PatchVersion](#).

If there is a need to downgrade a failing [SoftwareCluster](#) (for instance, malfunction in the field that was not detected at activation), it will therefore be needed to repackage the same old [SoftwareCluster](#) that was properly working with an higher version number.

[SWS_UCM_00190] Reinstallation of older Software Cluster version than previously removed [New [Software Clusters](#) getting installed shall be compared with the history of all installed [Software Clusters](#) to prevent installation of a [Software Cluster](#) with a lower or equal version than previously installed.] ([RS_UCM_00003](#), [RS_UCM_00031](#))

[SWS_UCM_00130] Software Cluster and version error [If [SoftwareCluster](#)'s manifest does not contain any [SoftwareCluster.version](#) following description of [StrongRevisionLabelString](#), UCM shall raise the [ApplicationError InvalidPackageManifest](#).] ([RS_UCM_00002](#))

[SWS_UCM_CONSTR_00014]{DRAFT} Software Package and Software Cluster shortNames [[SoftwarePackage](#) and the referenced [SoftwareCluster](#) shall share the same [shortName](#) in order to be able to compare their versions.] ([RS_UCM_00033](#))

7.1.2.1.3 Applications Persisted Data

Updating and rolling back of persisted data is handled completely by the application using persistency without involvement of UCM. A detailed explanation can be found in the Persistency Specification [11]. An exception here is the removal of persistent data after a [SoftwareCluster](#) is removed.

[SWS_UCM_00184]{DRAFT} Persistent data clean-up after Software Cluster removal [UCM shall remove persistent data of a removed *SoftwareCluster* by aggregating the information given in the application manifest, namely *PersistencyKeyValueStorage.uri* and *PersistencyFileStorage.uri*, in order to leave the *AUTOSAR Adaptive Platform* and the file system clean.](*RS_UCM_00026*, *RS_UCM_00017*, *RS_UCM_00004*)

For more details, please refer to [SWS_PER_00397] in *Persistency Specification* [11].

[SWS_UCM_00273]{DRAFT} Persistent data clean-up after Software Cluster update that removes a process [UCM shall remove persistent data of a removed process by aggregating the information given in the execution manifest, namely *PersistencyKeyValueStorage.uri* and *PersistencyFileStorage.uri*, in order to leave the *AUTOSAR Adaptive Platform* and the file system clean.](*RS_UCM_00026*, *RS_UCM_00017*, *RS_UCM_00004*)

Persistent data can include administrative and backup data.

7.1.2.2 Runtime dependencies

Processes within a *SoftwareCluster* can have functional dependencies toward other *SoftwareClusters*.

Dependencies are described in the *SoftwareCluster* metamodel, see [9].

[SWS_UCM_00120]{DRAFT} Runtime dependencies check [UCM shall check runtime dependencies before the activation of the new software version. This action is done in the context of *Activate*.](*RS_UCM_00007*)

The rationale is, if UCM has to process several *Software Packages*, then execution dependencies may not be fulfilled at all times during the *Software Packages* process but must be fulfilled before changes can be activated.

7.1.2.3 Update scope and State Management

Software Package processed by UCM can contain *Adaptive Applications*, updates to *AUTOSAR Adaptive Platform* itself or to the underlying OS. Update type depends on the content of the *Software Package*.

[SWS_UCM_00099]{DRAFT} Update of Adaptive Application [UCM shall be able to update *Adaptive Applications*](*RS_UCM_00001*)

[SWS_UCM_00100]{DRAFT} Update of Functional Clusters [UCM shall be able to update all *Functional Clusters*, including UCM itself.](*RS_UCM_00028*)

[SWS_UCM_00101]{DRAFT} Update of Host [UCM shall be able to update the underlying OS hosting the *AUTOSAR Adaptive Platform*.](*RS_UCM_00029*)

Definition of an updatable state with respect to the system setup is the OEM responsibility. Based on the system setup and the application, the system might need to be switched into a predefined state, to free resource to speed up the update, to block normal usage of software which might cause interruptions to update process and to block using functionality which might be interrupted by the update sequence.

[SWS_UCM_00257]{DRAFT} Update session [To confirm the system is in an updatable state, UCM shall start an update session by calling *State Management UpdateRequest Service Interface RequestUpdateSession* method after its dependency check triggered by *Activate* method call.](*RS_UCM_00026*, *RS_UCM_00003*)

[SWS_UCM_00258]{DRAFT} Update session rejected [If *State Management UpdateRequest Service Interface RequestUpdateSession* method call raises error *kRejected*, UCM shall transition from *kActivating* to *kReady* states and *Activate* method call shall return *ApplicationError UpdateSessionRejected*.](*RS_UCM_00026*, *RS_UCM_00024*)

If update session could be recurrently rejected, it is up to implementer to cache the dependency check result in order to avoid unnecessary computation and compute it only once.

During the update session, the minimum applications required for the Update process should be executed. This way system is more robust, more resources are free and user is blocked from using applications, of which failure could cause safety risk to the user.

Update of some components require a Machine reset to be performed. These components should be configured to be part of *Function Group MachineFG*, as the update sequence of *Function Group MachineFG* includes a *Machine* reset. *Execution Management*, *State Management*, *Communication Management* and UCM itself are good examples which probably require a *Machine* reset to activate the update. Other such components could be applications involved in the update sequence or applications involved in safety monitoring. Further details on *Function Group MachineFG* can be found in *State Management*.

7.1.3 Transferring Software Packages

To speed up the overall data transmission time, the package transfer is decoupled from the processing and activation process. This section describes requirements for initiation of a data transfer, the data transmission and ending of the data transmission.

Each *Software Package* gets its own state as soon as it is being transferred to UCM. The state machines in Fig. 7.4 specify the lifecycle of a *Software Package* that is transferred to and processed by UCM. During this lifecycle, a *Software Package* is uniquely identified with an *id* that UCM provides to the client.

The UCM has the possibility to keep the `Software Package` in `kTransferred` states in case it failed and retry later: transferring `Software Package` can be costly, if it is authenticated, there could be no reason to delete it if the update has not been successfully finished.

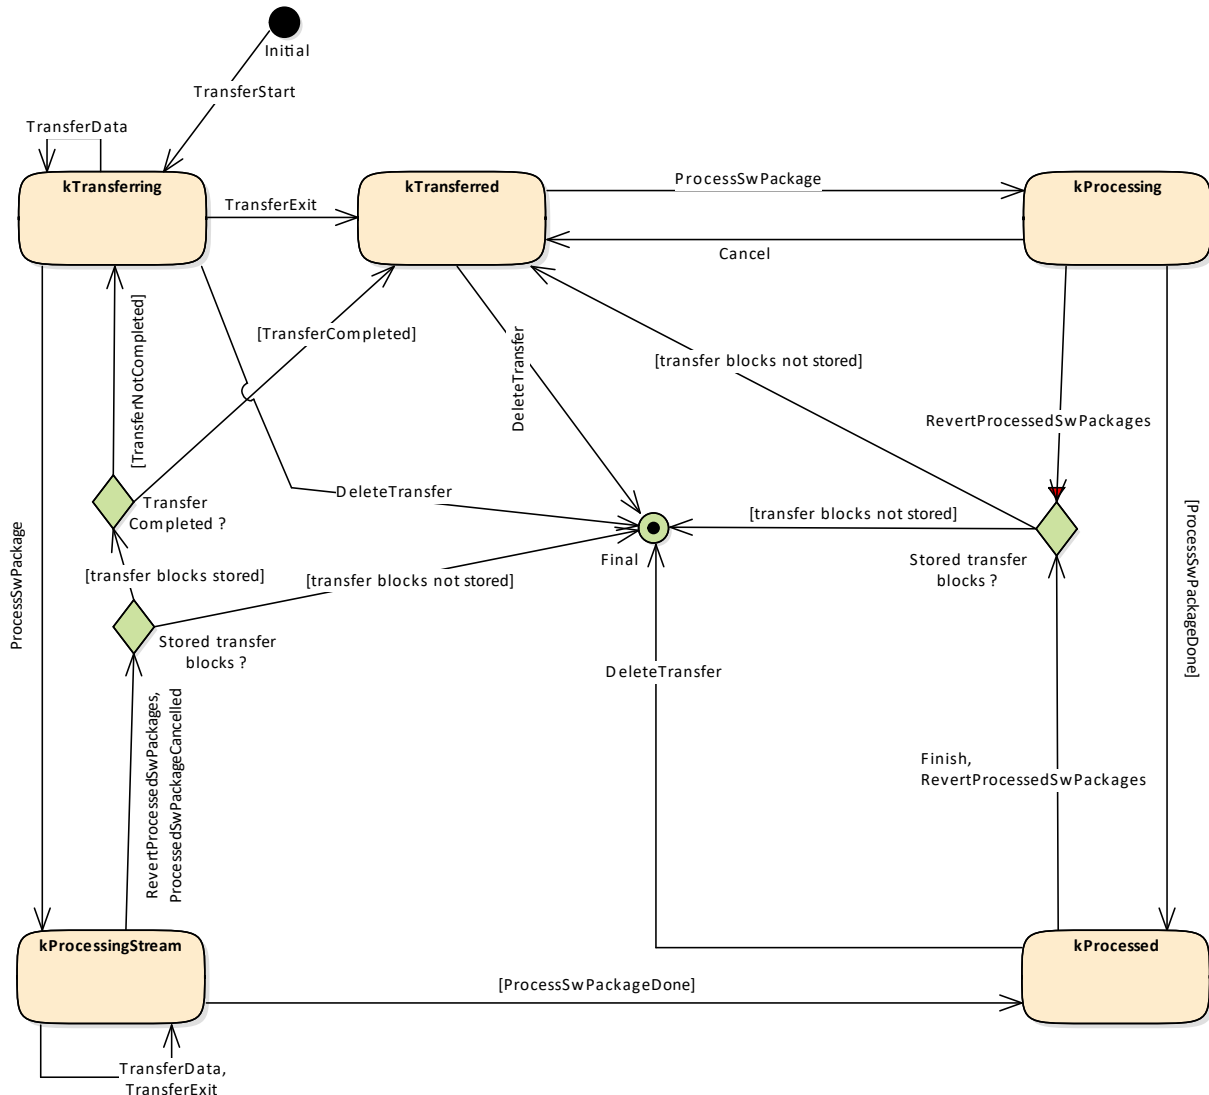


Figure 7.4: State Machine representing `Software Packages` lifecycle

[SWS_UCM_00007] Data transfer at any time [UCM shall provide support to transfer `Software Packages` at any time when UCM is running. Transferring is decoupled from the UCM Package Management states.] ([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

[SWS_UCM_00272]{DRAFT} Transfer block size [`TransferStart` shall return `BlockSize` parameter to indicate the maximum block size to be allowed to transfer in one `TransferData` method call.] ([RS_UCM_00025](#))

The block size should be aligned to flashing capability in case of Classic Platform capability for instance.

[SWS_UCM_00088] Preparation of data transfer [Data transfer shall be prepared with the method `TransferStart`. In the preparation step the number of bytes to be transferred is provided by the client and UCM assigns an `id` for the `Software Package` to be transferred.]([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

While a `Software Package` is being transferred, if UCM receives a subsequent `TransferStart` call targeting another `Software Package`, UCM should make sure that the sum of the size of both `Software Packages` (the one being transferred and the one requested to be transferred) does not exceed the size of the UCM buffer. Otherwise, the `TransferStart` should raise the `ApplicationError InsufficientMemory` and the newly requested transmission should be rejected as described above.

[SWS_UCM_00008] Executing the data transfer [After preparing of the data transfer, the transmission of the `Software Package` block-wise shall be supported by the method `TransferData`.]([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

[SWS_UCM_00145] Sequential order of data transfer [The method `TransferData` shall support the parameter `blockCounter` that shall start with 0x01 and be incremented by one for each subsequent block.]([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

[SWS_UCM_00010] End of data transfer [After transmission of a `Software Package` is completed, the transmission can be finished with method `TransferExit`.]([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

[SWS_UCM_00028]{DRAFT} Software Package Authentication [UCM shall check authentication of the `Software Package` or the transferred block before processing it.]([RS_UCM_00006](#))

`Software Package` contains authentication and integrity tags, which are used during the transfer sequence to authenticate the content of the `Software Package`.

[SWS_UCM_00075] Multiple data transfers in parallel [Handling of multiple data transfers in parallel shall be supported by UCM.]([RS_UCM_00019](#))

If UCM provide enough buffering resources for `Software Packages`, several packages could be transferred (in parallel) before they are processed one after the other. The processing (i.e. unpacking and actually applying changes to the `AUTOSAR Adaptive Platform`) of `Software Packages` described by the state `kProcessing` is further detailed in Sect. 7.1.5.

[SWS_UCM_00021] Deleting transferred Software Packages [UCM shall provide a method `DeleteTransfer` that shall delete the targeted `Software Package` and free the resources reserved to store that `Software Package`.]([RS_UCM_00018](#))

[SWS_UCM_00069] Report information on Software Packages [UCM shall provide a method `GetSwPackages` of the interface service `PackageManagement` to provide the `Software Packages`' identifiers, names, versions, states, consecutive bytes received and consecutive blocks received.]([RS_UCM_00010](#))

If `Software Package` is in `kTransferring` state, it is not possible to get versions or names as manifest could not be complete or accessible, therefore method `GetSwPackages` should return empty values except for `TransferID`, `ConsecutiveBytesReceived` and `ConsecutiveBlocksReceived` at this particular state.

[SWS_UCM_00216] Validity of TransferId [The `TransferId` of a `Software Package` shall be invalidated for further use when it reaches final lifecycle state.]([RS_UCM_00019](#))

7.1.3.1 Error handling in TransferStart

`TransferStart` allocates resources for the client transfer.

[SWS_UCM_00140] UCM insufficient memory [`TransferStart` method shall raise the `ApplicationError InsufficientMemory` if the UCM buffer has not enough resources to store the corresponding `Software Package`.]([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

7.1.3.2 Error handling in TransferData

`TransferData` executes the following checks. It is recommended to follow the specified order.

[SWS_UCM_00275]{DRAFT} TransferData error handling order [`TransferData` method shall check the following error conditions and return the respective error code.

1. [[SWS_UCM_00208](#)]
2. [[SWS_UCM_00203](#)]
3. [[SWS_UCM_00204](#)]
4. [[SWS_UCM_00243](#)]
5. [[SWS_UCM_00205](#)]
6. [[SWS_UCM_00206](#)]
7. [[SWS_UCM_00289](#)]
8. [[SWS_UCM_00207](#)]
9. [[SWS_UCM_00098](#)]
10. [[SWS_UCM_00209](#)]
11. [[SWS_UCM_00103](#)]

]([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

[SWS_UCM_00208] TransferData OperationNotPermitted [Calling `TransferData` after calling `TransferExit` for a specific `TransferId` shall raise the error `ApplicationError OperationNotPermitted`]([RS_UCM_00019](#))

[SWS_UCM_00203] TransferData InvalidTransferId [TransferData shall raise the error `ApplicationError InvalidTransferId` in case an invalid `TransferId` (An ID that was not initiated by `TransferStart` or marked invalid by `DeleteTransfer` or `Revert-ProcessedSwPackages`) is sent by the client.]([RS_UCM_00019](#))

[SWS_UCM_00204] TransferData IncorrectBlock [TransferData shall raise `ApplicationError IncorrectBlock` upon receipt of a block counter value that is successfully transmitted to UCM before or upon receipt of an unexpected block counter value.]([RS_UCM_00014](#), [RS_UCM_00019](#))

[SWS_UCM_00243] Too big block size received by UCM [In the case the received block size with `TransferData` exceeds the block size returned by `TransferStart` for the same `TransferId`, UCM shall raise the `ApplicationError IncorrectBlock-Size`.]([RS_UCM_00013](#), [RS_UCM_00014](#), [RS_UCM_00025](#))

[SWS_UCM_00205] TransferData IncorrectSize [In case the transferred Software package size exceeds the provided size in `TransferStart`, `TransferData` shall raise `ApplicationError IncorrectSize`]([RS_UCM_00014](#), [RS_UCM_00019](#))

[SWS_UCM_00206] TransferData InsufficientMemory [TransferData shall raise the error `ApplicationError InsufficientMemory` if resources to store the `Software Package` ceased to exist during the transfer operation.]([RS_UCM_00013](#), [RS_UCM_00019](#))

[SWS_UCM_00289]{DRAFT} TransferData TransferFailed [TransferData shall raise the error `ApplicationError TransferFailed` if UCM cannot persist transferred block.]([RS_UCM_00013](#))

[SWS_UCM_00207]{DRAFT} TransferData BlockInconsistent [TransferData shall raise the error `ApplicationError BlockInconsistent` in case Consistency check for transferred block fails.]([RS_UCM_00012](#))

[SWS_UCM_00098]{DRAFT} Software Package Authentication failure [UCM shall raise the `ApplicationError AuthenticationFailed`, if the `Software Package` authentication check fails.]([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

This error can happen when `TransferData`, `TransferExit` and `ProcessSwPackage` methods are called. When `AuthenticationFailed` error is raised, it is up to client to decide if a `DeleteTransfer` will be called or not. The behaviour may vary depending on the life cycle, meaning R&D phase or on the field phase.

`TransferData` checks the package version format in accordance to [\[SWS_UCM_00161\]](#) (`IncompatiblePackageVersion`).

[SWS_UCM_00209]{DRAFT} TransferData PackageInconsistent [TransferData shall raise the error `ApplicationError PackageInconsistent` in case the `Software Package` integrity check fails.](*RS_UCM_00006, RS_UCM_00012*)

`TransferData` checks if the `Software Cluster` version being updated is older than currently present in `Machine` in accordance to **[SWS_UCM_00103]** (`OldVersion`).

7.1.3.3 Error handling in TransferExit

[SWS_UCM_00276]{DRAFT} TransferExit error handling order [TransferExit method shall check the following error conditions and return the respective error code.

1. **[SWS_UCM_00148]**
2. **[SWS_UCM_00212]**
3. **[SWS_UCM_00087]**
4. **[SWS_UCM_00098]**
5. **[SWS_UCM_00092]**
6. **[SWS_UCM_00161]**
7. **[SWS_UCM_00213]**
8. **[SWS_UCM_00103]**

](*RS_UCM_00013, RS_UCM_00019, RS_UCM_00025*)

[SWS_UCM_00148] Transfer sequence order [Calling `TransferExit` without calling `TransferData` at least once or after `TransferExit` is called for a specific `TransferID`, shall raise the `ApplicationError OperationNotPermitted`.](*RS_UCM_00019*)

[SWS_UCM_00212] TransferExit InvalidTransferId [TransferExit shall raise the error `ApplicationError InvalidTransferId` in case an invalid `TransferId` is sent by the client.](*RS_UCM_00019*)

[SWS_UCM_00087] Insufficient amount of data transferred [During `TransferExit` UCM shall check if all blocks of the `Software Package` have been transferred according to the `size` parameter of `TransferStart`. If not UCM shall return `ApplicationError InsufficientData`.](*RS_UCM_00013, RS_UCM_00019, RS_UCM_00025*)

`TransferExit` checks authentication in accordance to **[SWS_UCM_00098]** (`AuthenticationFailed`).

[SWS_UCM_00092] Software Package integrity [During `TransferExit` UCM shall raise the `ApplicationError PackageInconsistent` if the `Software Package`

`integrity check` fails. This Software Package integrity check may be realized by the UCM via a Software Package Checksum check or via other mechanisms.]([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

`TransferExit` checks the package version format in accordance to [[SWS_UCM_00161](#)] (`IncompatiblePackageVersion`).

[SWS_UCM_00213] `TransferExit InvalidPackageManifest` [`TransferExit` shall raise the error `ApplicationError InvalidPackageManifest` upon receipt of an invalid manifest.]([RS_UCM_00012](#))

`TransferExit` checks if the `Software Cluster` version being updated is older than currently present in `Machine` in accordance to [[SWS_UCM_00103](#)] (`OldVersion`).

7.1.3.4 Error handling in DeleteTransfer

[SWS_UCM_00283]{DRAFT} `DeleteTransfer` error handling order [`DeleteTransfer` method shall check the following error conditions and return the respective error code.

1. [[SWS_UCM_00214](#)]
2. [[SWS_UCM_00215](#)]

]([RS_UCM_00013](#), [RS_UCM_00019](#), [RS_UCM_00025](#))

`DeleteTransfer` checks if the supplied parameter `TransferId` is valid.

[SWS_UCM_00214] `DeleteTransfer InvalidTransferId` [`DeleteTransfer` shall raise the error `ApplicationError InvalidTransferId` in case an invalid `TransferId` is sent by the client.]([RS_UCM_00019](#))

[SWS_UCM_00215] `DeleteTransfer OperationNotPermitted` [Calling `DeleteTransfer` during processing or during the processing stream shall raise the error `ApplicationError OperationNotPermitted`.]([RS_UCM_00019](#))

7.1.4 Processing of Software Packages from a stream

It is also possible to process a `Software Package` while the transfer is still ongoing. The following requirements apply for this use case.

[SWS_UCM_00165] `Processing from stream` [The UCM may support calling `ProcessSwPackage` directly from stream without waiting to receive the `Software Package` completely.]([RS_UCM_00001](#), [RS_UCM_00003](#), [RS_UCM_00004](#), [RS_UCM_00025](#))

[SWS_UCM_00166] Processing from stream state [If UCM supports processing from stream and is in state `kIdle` or `kReady`, the method `ProcessSwPackage` for a `Software Package` in state `kTransferring` shall set this `Software Package` to state `kProcessingStream`.] ([RS_UCM_00024](#), [RS_UCM_00025](#))

[SWS_UCM_00167]{DRAFT} Cancelling streamed packages [All temporary and processed data of a `Software Package` in state `kProcessingStream` shall be removed if `Cancel` is called.] ([RS_UCM_00020](#), [RS_UCM_00025](#))

[SWS_UCM_00168] Transferring while processing from stream [`Software Package` state shall remain in `kProcessingStream` when `TransferData` is called.] ([RS_UCM_00024](#), [RS_UCM_00025](#))

[SWS_UCM_00169] Finishing transfer while processing from stream [`Software Package` state shall be set to `kProcessed` when `TransferExit` is called and the `Software Package` is completely processed.] ([RS_UCM_00024](#), [RS_UCM_00025](#))

[SWS_UCM_00200]{DRAFT} Failing authentication [UCM shall delete the `Software Package` and its related data processed by `ProcessSwPackage` call if authentication is failing at `TransferExit` or `ProcessSwPackage` call.] ([RS_UCM_00039](#), [RS_UCM_00006](#))

7.1.5 Processing Software Packages

In contrast to package transmission, only one `Software Package` can be processed at the same time to ensure consistency of the system. In the following, a software or package processing can involve any combination of an installation, update or removal of applications, configuration data, calibration data or manifests. It is up to the vendor-specific metadata inside a `Software Package` to describe the tasks UCM has to perform for its processing. For a removal, this might involve metadata describing which data needs to be deleted. Nevertheless, the communication sequence between the triggering application of the software modification and UCM is the same in any case. For an update of an existing application, the `Software Package` can contain only partial data, e.g. just an updated version of the execution manifest. Any UCM Client need to confirm that UCM is in `kIdle CurrentStatus` state before starting any update (process/activate).

[SWS_UCM_00001] Starting the package processing [UCM shall provide a method `ProcessSwPackage` to process transferred `Software Package`. `id` corresponding to `Software Package` shall be provided for this method.] ([RS_UCM_00001](#), [RS_UCM_00004](#), [RS_UCM_00005](#))

[SWS_UCM_00137] Processing several update `Software Packages` [UCM shall support processing of several `Software Packages`, not in parallel, by calling method `ProcessSwPackage` several times in sequence.] ([RS_UCM_00001](#), [RS_UCM_00004](#), [RS_UCM_00005](#))

During package processing, the progress is provided.

[SWS_UCM_00018] Providing Progress Information [UCM shall provide a method `GetSwProcessProgress` to query the progress of executing the `ProcessSwPackage` method call for provided `TransferId`. Parameter `progress` shall be set to a value representing the progress between 0% and 100% (0x00 ... 0x64).] ([RS_UCM_00023](#))

[SWS_UCM_00003] Cancelling the package processing [UCM shall provide a method `Cancel` to cancel the running package processing. UCM shall then abort the current package processing task, undo any changes and free any reserved resources.] ([RS_UCM_00020](#))

[SWS_UCM_00024] Revert all processed Software Packages [UCM shall provide a method `RevertProcessedSwPackages` to revert all changes done with `ProcessSwPackage`.] ([RS_UCM_00008](#))

The main difference between a `RevertProcessedSwPackages` and a `Rollback` is that the former can only be performed before the successful activation of the targeted `Software Package`(s) while the latter can only be performed after such activation.

Depending on the capabilities of UCM and of the updated target, `RevertProcessedSwPackages` is used to revert all the changes that have been applied by `ProcessSwPackage`. `Cancel` is also used to revert the changes of the `Software Package` for which processing started by `ProcessSwPackage` method call and identified by `TransferId`. For example, if an application with large resource files is updated “in place” (i.e. in the same partition) then it might not be feasible to revert the update. In this case, to perform a rollback the triggering application could download a `Software Package` to restore a stable version of the application.

7.1.5.1 Error handling during Processing Software Packages

[SWS_UCM_00277]{DRAFT} ProcessSwPackage error handling order [`ProcessSwPackage` method shall check the following error conditions and return the respective error code.

1. [\[SWS_UCM_00219\]](#)
2. [\[SWS_UCM_00017\]](#)
3. [\[SWS_UCM_00218\]](#)
4. [\[SWS_UCM_00098\]](#)
5. [\[SWS_UCM_00161\]](#)
6. [\[SWS_UCM_00029\]](#)
7. [\[SWS_UCM_00285\]](#)
8. [\[SWS_UCM_00231\]](#)
9. [\[SWS_UCM_00217\]](#)

10. [SWS_UCM_00267]
11. [SWS_UCM_00104]
12. [SWS_UCM_00103]
13. [SWS_UCM_00150]

] (*RS_UCM_00026*)

[SWS_UCM_00219] ProcessSwPackage OperationNotPermitted [ProcessSwPackage shall raise the error `ApplicationError OperationNotPermitted` in case the processing of the specified `Software Package` is already done, or in case the processed `Software Package` action is update or removal of a non-existing software cluster or in case streaming is not possible.] (*RS_UCM_00025, RS_UCM_00026*)

[SWS_UCM_00017] Sequential Software Package Processing [Once method `ProcessSwPackage` has been called by a client, further calls to the same method shall be rejected with `ApplicationError ServiceBusy` as long as `CurrentStatus` is different than `kProcessing`.] (*RS_UCM_00001, RS_UCM_00003, RS_UCM_00026*)

[SWS_UCM_00218] ProcessSwPackage InvalidTransferId [ProcessSwPackage shall raise the error `ApplicationError InvalidTransferId` in case an invalid `TransferId` is sent by the client.] (*RS_UCM_00026*)

`ProcessSwPackage` checks authentication in accordance to [SWS_UCM_00098] (`AuthenticationFailed`)

[SWS_UCM_00161] Check Software Package version compatibility against UCM version [At `ProcessSwPackage`, `TransferData` or `TransferExit` calls, UCM shall raise `ApplicationError IncompatiblePackageVersion` if the version for the `Software Package` transferred or to be processed expressed by `minimumSupportedUcmVersion` attribute is higher than the current version of UCM] (*RS_UCM_00007*)

The `Software Package` is generated by a tooling including a packager which version could not match with the UCM version, leading to manifest interpretation issues for instance.

[SWS_UCM_00029] Consistency Check of Manifest [UCM shall validate the content of the manifest against the schema defined for the meta-data(eg: for missing parameter or for value out of range of the parameter) and shall raise the `ApplicationError InvalidPackageManifest` if it finds discrepancies there.] (*RS_UCM_00012*)

[SWS_UCM_00285]{DRAFT} Removing or updating a Software Cluster not existing in the Machine [If a `Software Package`'s action is to remove or update a `Software Cluster` that is not existing in the `Machine`, UCM shall raise `ApplicationError SoftwareClusterMissing` when `ProcessSwPackage` is called.] (*RS_UCM_00015*)

[SWS_UCM_00231]{DRAFT} ProcessSwPackage IncompatibleDelta [ProcessSwPackage shall raise the error `ApplicationError IncompatibleDelta` if delta package dependency fails at processing.] (*RS_UCM_0007*)

[SWS_UCM_00217]{DRAFT} ProcessSwPackage InsufficientMemory [ProcessSwPackage method shall raise the `ApplicationError InsufficientMemory` if the UCM buffer has not enough resources to process the corresponding `Software Package`.] (*RS_UCM_00013, RS_UCM_00025*)

[SWS_UCM_00267]{DRAFT} Error when checksum is not recognised at processing time [If checksum attribute of `ArtifactChecksum` or `CryptoProvider` are not recognised, UCM shall raise the `ApplicationError InvalidChecksumDescription`.] (*RS_UCM_00012*)

[SWS_UCM_00104] Integrity Check of processed Package [UCM shall raise the `ApplicationError ProcessedSoftwarePackageInconsistent` if integrity check of the processed `Software Packages` fails.] (*RS_UCM_00012*)

This operation is realized by the UCM to verify that it did not corrupt any files during the processing. This *integrity check* is vendor specific and may be realized by the UCM by checking the payload Checksum or by any other mechanisms

`ProcessSwPackage` checks if the `Software Cluster` version being updated is older than currently present in `Machine` in accordance to [\[SWS_UCM_00103\]](#) (*Old-Version*).

[SWS_UCM_00150] Cancellation of a Software Package processing [`ProcessSwPackage` method shall raise the `ApplicationError ProcessSwPackageCancelled` if the `Cancel` method has been called during the processing of a `Software Package`.] (*RS_UCM_00024*)

7.1.5.2 Error handling for Cancel

[SWS_UCM_00278]{DRAFT} Cancel error handling order [`Cancel` method shall check the following error conditions and return the respective error code.

1. [\[SWS_UCM_00234\]](#)
2. [\[SWS_UCM_00235\]](#)

] (*RS_UCM_00020*)

[SWS_UCM_00234] Cancel OperationNotPermitted [Cancel shall raise the error `ApplicationError OperationNotPermitted` in case the targeted `Software Package` processing has not yet started or has been already finished.] (*RS_UCM_00020*)

[SWS_UCM_00235] Cancel InvalidTransferId [Cancel shall raise the error `ApplicationError InvalidTransferId` in case an invalid `TransferId` is sent by the client.] (*RS_UCM_00020*)

7.1.5.3 Error handling for RevertProcessedSwPackages

[SWS_UCM_00279]{DRAFT} **RevertProcessedSwPackages** error handling order [RevertProcessedSwPackages method shall check the following error conditions and return the respective error code.

1. [SWS_UCM_00237]
2. [SWS_UCM_00236]

](RS_UCM_00020)

[SWS_UCM_00237] **RevertProcessedSwPackages** **OperationNotPermitted** [RevertProcessedSwPackages method call shall raise the error `ApplicationError OperationNotPermitted` in case the processed `Software Packages` are successfully activated or it is called at other states than `kReady` (`Software Package(s)` are finished being processed) or `kProcessing` states.](RS_UCM_00020)

[SWS_UCM_00236]{DRAFT} **RevertProcessedSwPackages** **NotAbleToRevertPackages** [RevertProcessedSwPackages shall raise the error `ApplicationError NotAbleToRevertPackages` in case reverting of processed `Software Packages` have failed.](RS_UCM_00020)

7.1.5.4 Error handling for GetSwProcessProgress

[SWS_UCM_00220] **GetSwProcessProgress** **InvalidTransferId** [GetSwProcessProgress shall raise the error `ApplicationError InvalidTransferId` in case an invalid `TransferId` is sent by the client.](RS_UCM_00023)

7.1.6 Activation and Rollback

UCM should notify the activation or rollback of `Software Packages` to other `Functional Clusters` of the AUTOSAR Adaptive Platform. Vendor specific solution dictates to which modules this information is available, in which form and if this is done directly when change is done or when change is executed.

7.1.6.1 Activation

The `SoftwareCluster` state `kPresent` does not express whether a `SoftwareCluster` is currently executed or not. You can refer to chapter 7.1.1 Software Cluster Lifecycle for more details about `kPresent` state and sequence diagram 10.4 for more details about activation.

[SWS_UCM_00107] Activated state [UCM state `kActivated` shall express that new version of updated `SoftwareClusters` are verified.] (*RS_UCM_00008*, *RS_UCM_00030*)

The state management [3] on the level of execution is handled by the UCM's client controlling the update process.

UCM has to be able to update several `SoftwareClusters` for an update campaign. However, these `SoftwareClusters` could have dependencies not satisfied if updates are processed and activated one by one. Therefore, UCM splits the activation action from the general package processing.

[SWS_UCM_00027] Delta Package activation [Applicable version of `SoftwareCluster` on which to apply delta shall be included into related `SoftwarePackage`'s `deltaPackageApplicableVersion` attribute.] (*RS_UCM_00007*)

[SWS_UCM_00025] Activation of `SoftwareClusters` [UCM shall offer method `Activate` to enable execution of any pending changes from the previously processed `Software Packages`.] (*RS_UCM_00021*)

After `Activate`, the new set of `SoftwareClusters` can be started. Activation covers all the processed `Software Packages` for all the clients.

[SWS_UCM_00022] Shared Activation of `Software Packages` [UCM shall activate all the processed `Software Packages` when `Activate` is called.] (*RS_UCM_00021*)

The activation method could lead to a full system reset. When `Software Package` updates underlying OS, `AUTOSAR Adaptive Platform` or any `Adaptive Application` which is configured to be part of `Function Group MachineFG`, the execution of updated software occurs through system reset by calling `State Management UpdateRequest Service Interface ResetMachine` method. Meta-data of `Software Package` defines the activation method.

In principle, it is possible to activate multiple versions of the same `SoftwareCluster` in one activation step. This could be useful for example with delta package updates but does not apply to firmware updates. The specification does not prohibit to create this kind of chained updates. The decision to use chained updates should be based on safety aspects and the applicability of the underlying update technology, if the update is for a classic or an adaptive platform, if a file system is involved or if the used platform even support it.

7.1.6.1.1 Error handling for `Activate`

[SWS_UCM_00281]{DRAFT} `Activate` error handling order [`Activate` method shall check the following error conditions and return the respective error code.

1. **[SWS_UCM_00241]**

2. [SWS_UCM_00026]
3. [SWS_UCM_00258]
4. [SWS_UCM_00242]
5. [SWS_UCM_00280]

](RS_UCM_00026)

[SWS_UCM_00241] Activate OperationNotPermitted [Activate shall raise the error `ApplicationError OperationNotPermitted` in case the UCM state is not `kReady`.](RS_UCM_00021)

[SWS_UCM_00026] Dependency Check [At activation (i.e. after `Activate` method is called), UCM shall perform a dependency check to ensure that all the `Software Packages` having dependencies toward each other have been processed successfully, otherwise return `ApplicationError MissingDependencies`.](RS_UCM_00007)

If `Activate` method cannot establish an Update Session with `State Management`, it returns `UpdateSessionRejected`, see [SWS_UCM_00258].

[SWS_UCM_00242] Activate PreActivationFailed [`Activate` shall raise the error `ApplicationError PreActivationFailed` in case of activation state transition failure from `State Management` side.](RS_SM_00001)

[SWS_UCM_00280]{DRAFT} Activate VerificationFailed [`Activate` shall raise the error `ApplicationError VerificationFailed` in case of verification failure returned by `State Management`.](RS_UCM_00021)

7.1.6.2 Rollback

[SWS_UCM_00005] Rollback to the software prior to Finish the update process [UCM shall provide a method `Rollback` to recover from an activation that went wrong.](RS_UCM_00008)

Rollback can be called in the case of A/B partitions or UCM uses some other solution to maintain backups of updated or removed `Software Packages`.

[SWS_UCM_00110] Rolling-back the software update [At `kRollingBack` state, UCM shall disable the changes done by the software update by calling `State Management UpdateRequest Service Interface PrepareRollback` method for each `Function Group` of the processed `Software Cluster` in the update session. Then UCM shall call `State Management UpdateRequest Service Interface ResetMachine` method if any `Software Cluster` requires a machine reboot to be rolled back.](RS_UCM_00008)

7.1.6.2.1 Error handling for Rollback

[SWS_UCM_00282]{DRAFT} **Rollback error handling order** [Rollback method shall check the following error conditions and return the respective error code.

1. [SWS_UCM_00239]
2. [SWS_UCM_00238]

] (RS_UCM_00008)

[SWS_UCM_00239] **Rollback OperationNotPermitted** [Rollback shall raise the error `ApplicationError OperationNotPermitted` in case UCM current state is not `kActivated` nor `kVerifying`.] (RS_UCM_00020)

[SWS_UCM_00238]{DRAFT} **Rollback NotAbleToRollback** [Rollback shall raise the error `ApplicationError NotAbleToRollback` in case failure has occurred during Rollback.] (RS_UCM_00020)

7.1.6.3 Boot options

During update process the executed software is switched from original software to updated software and in case of rollback, from updated software to original version. Which version of software is executed is dependent on the UCM state and this is managed by the UCM. In case of platform and OS update the switch between software versions occurs through system reset and depending on the system design the Execution Management [2] might be started before UCM. In this case there can't be direct interface between UCM and Execution Management [2] to define which versions of software would be executed. Instead this would be controlled through persistent controls which are referred as `Boot options` in this document.

[SWS_UCM_00094] **Management of executable software** [UCM shall manage which version of software is available for the Execution Management [2] to launch.] (RS_UCM_00021)

During the `kActivating` state, UCM modifies the `Boot options` so that in the next restart for the updated software the new versions will be executed. In the `kRolling-Back` state, UCM modifies the `Boot options` so that in the next restart of the updated software the original versions will be executed.

7.1.6.4 Finishing activation

[SWS_UCM_00020] **Finishing the packages activation** [UCM shall provide a method `Finish` to commit all the changes and clean up all temporary data of the processed Software Packages.] (RS_UCM_00015)

UCM should also remove `Software Packages`, logs or any older versions of changed software to save storage space. It is up to implementer to remove or not the `Software Packages`.

[SWS_UCM_00259] Ending the update session [UCM shall call `State Management UpdateRequest Service Interface StopUpdateSession` method when UCM is exiting the `kCleaningUp` state.] (*RS_UCM_00021*, *RS_UCM_00018*)

[SWS_UCM_00240] Finish OperationNotPermitted [Finish shall raise the error `ApplicationError OperationNotPermitted` in case there are no activated nor rolled-back `Software Packages` pending finalization (i.e UCM state is not `kActivated` nor `kRolledBack`.)] (*RS_UCM_00001*, *RS_UCM_00026*)

For UCM to be able to free all unneeded resources while processing the `Finish` request, it is up to the vendor and platform specific implementation to make sure that obsolete versions of changed `SoftwareClusters` aren't executed anymore.

7.1.7 Status Reporting

Once `Software Packages` are transferred to UCM, they are ready to be processed to finally apply changes to the `AUTOSAR Adaptive Platform`. In contrast to the transmission, the processing and activation tasks have to happen in a strict sequential order.

To give an overview of the update sequence, the global state of UCM is described in this section. The details of the processing and activation phases and the methods are specified in the [7.1.5](#) and [7.1.6](#).

The global state of UCM can be queried using the field `CurrentStatus`. The state machine for `CurrentStatus` is shown in [Fig. 7.5](#). This diagram does not include behaviour after a reset. Examples can be found of how UCM and its `CurrentStatus` field behave including reset management in [chapter 10 Sequence Diagram](#).

[SWS_UCM_00019] Status Field of Package Management [The global state of UCM shall be provided using the field `CurrentStatus`] (*RS_UCM_00024*)

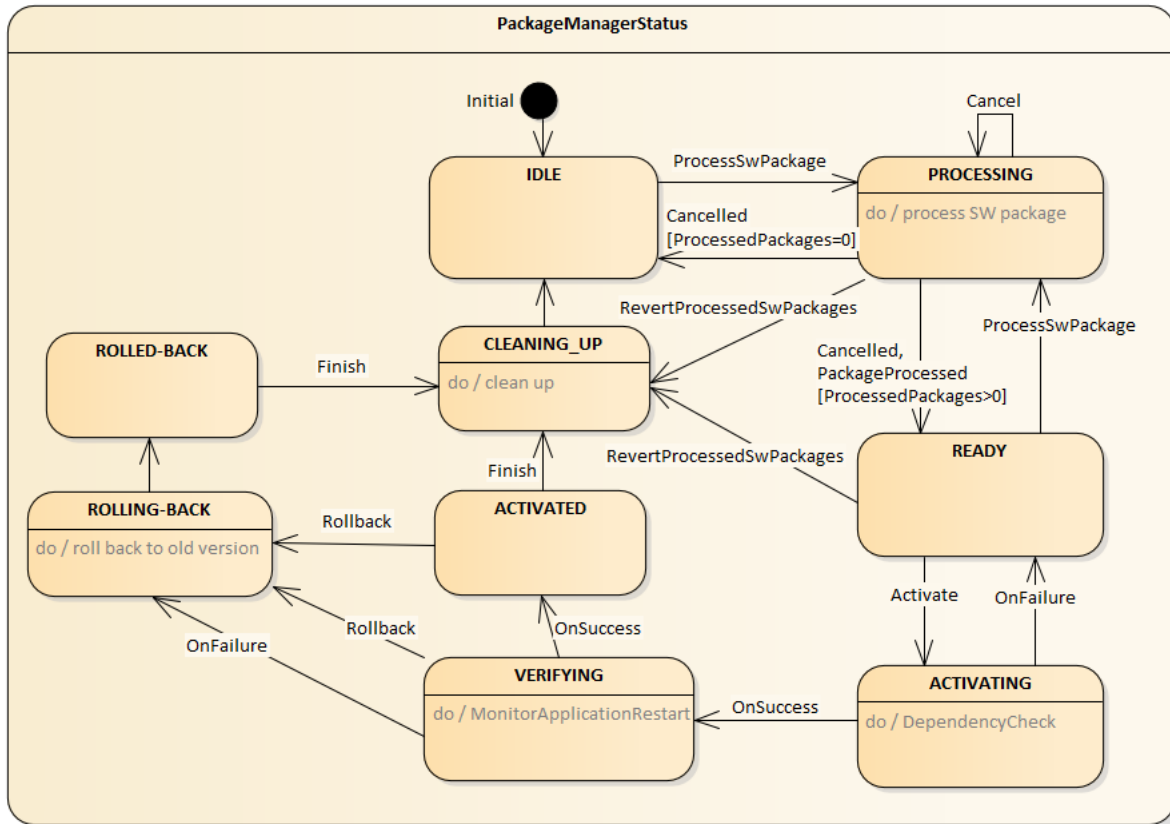


Figure 7.5: State Machine for the package processing using service interface: [Package-Management](#)

UCM supported method calls for each value of field [CurrentStatus](#) are shown in Fig. 7.5.

[SWS_UCM_00086]{OBSOLETE} Unsupported method calls [Unsupported method calls shall raise the [ApplicationError OperationNotPermitted](#).] ([RS_UCM_00024](#))

[SWS_UCM_00080] Idle state of Package Management [[kIdle](#) shall be the default state.] ([RS_UCM_00024](#))

[SWS_UCM_00149] Return to the Idle state from Processing state [[kIdle](#) state shall be set when [ProcessSwPackage](#) returns with error code [ProcessSwPackageCancelled](#) and if no other [Software Packages](#) were previously processed during this processing operation.] ([RS_UCM_00024](#))

[SWS_UCM_00151] Entering the Ready state of Package Management after a Cancel call [If [ProcessSwPackage](#) has been cancelled, it shall return error code [ProcessSwPackageCancelled](#) and set state to [kReady](#) only if at least one other [Software Package](#) was previously processed during this processing operation.] ([RS_UCM_00024](#))

[SWS_UCM_00081] Processing state of Package Management [kProcessing state shall be set only if `ProcessSwPackage` has been called. This shall only be possible, if `CurrentStatus` is reported as `kIdle` or `kReady`.] (*RS_UCM_00024*)

[SWS_UCM_00266]{DRAFT} OperationNotPermitted error and UCM state [UCM shall return `ApplicationError OperationNotPermitted` if `ProcessSwPackage` is called by a client with UCM at `CurrentStatus` state different than `kIdle`, `kProcessing` or `kReady`.] (*RS_UCM_00001, RS_UCM_00004, RS_UCM_00005*)

[SWS_UCM_00083] Entering the Ready state of Package Management after a successful processing operation [kReady state shall be set after a `Software Package` processing has been completed successfully.] (*RS_UCM_00024*)

[SWS_UCM_00265]{DRAFT} state transition due to ProcessSwPackage error [If `ProcessSwPackage` raises an `ApplicationError` other than `ProcessSwPackageCancelled`, it shall transition from `kProcessing` to `kIdle` if no other `Software Packages` were previously processed during this processing operation, or `kReady` if at least one other `Software Package` was previously processed before the failed processing operation, and shall perform clean-up actions.] (*RS_UCM_00015, RS_UCM_00026*)

Clean-up actions could be similar to the cancel call by for instance deleting files, folders or artefacts of the processed `Software Cluster`.

[SWS_UCM_00152] Entering the Ready state of Package Management after a missing dependency [kReady state shall be set when `Activate` fails due to an `ApplicationError MissingDependencies`.] (*RS_UCM_00024*)

[SWS_UCM_00084] Entering the kActivating state of Package Management [kActivating shall be set when `Activate` is called. This triggers the dependency check and returns `ApplicationError MissingDependencies` if this check fails.] (*RS_UCM_00024*)

[SWS_UCM_00153] Action in kActivating state of Package Management [When `kActivating` is set and after the `State Management UpdateRequest Service Interface RequestUpdateSession` method call by UCM, the UCM shall call the `State Management UpdateRequest Service Interface PrepareUpdate` method for the concerned `Software Cluster` including a list of all `Function Groups` belonging to that `Software Cluster`.] (*RS_UCM_00024*)

[SWS_UCM_00260]{DRAFT} PrepareUpdate, VerifyUpdate and PrepareRollback orders [UCM shall compute the order of the `State Management UpdateRequest Service Interface PrepareUpdate, VerifyUpdate and PrepareRollback` method calls from the dependency model included in the `Software Cluster` manifests.] (*RS_UCM_00007, RS_UCM_00021, RS_UCM_00030*)

[SWS_UCM_00261] PrepareUpdate, VerifyUpdate and PrepareRollback synchronous calls [Calls to `State Management UpdateRequest Service Interface PrepareUpdate, VerifyUpdate and PrepareRollback` methods shall not be concurrent.] (*RS_UCM_00026*)

[SWS_UCM_00262]{DRAFT} Update preparation rejected [If any one of the [State Management UpdateRequest Service Interface PrepareUpdate](#) method call returns error `kRejected` too many times or for too long (implementation specific thresholds), UCM shall transition from `kActivating` to `kReady` states.] ([RS_UCM_00026](#))

[SWS_UCM_00263] Update preparation failure [If any one of the [State Management UpdateRequest Service Interface PrepareUpdate](#) method returns error `kPrepareFailed`, UCM shall transition from `kActivating` to `kReady` states.] ([RS_UCM_00026](#))

[SWS_UCM_00154]{DRAFT} Entering the Verifying state of Package Management [`kVerifying` shall be set when the dependency check have been performed successfully (all dependencies are satisfied) and that the preparation of the [Software Clusters](#) by the [State Management](#) has been successfully performed.] ([RS_UCM_00024](#))

The machine could most likely be restarted in case a A/B partition is used. In case the A/B partition is not used, all affected [Function Groups](#) or the platform could be restarted. Immediately after the processed [Software Package](#) has been restarted, a system check has to be performed in order to make sure the machine is able to start up as expected. With this check it is verified that other safety relevant software like [Functional Cluster Platform Health Manager \[12\]](#) is running and user can be protected from any issues caused by the update after the update has finished.

An update could most likely require to reparse the manifests after performing the atomic activation of the [Software Clusters](#) (switching A/B partition, changing symlinks, etc.) if a machine reset is not needed.

[SWS_UCM_00085]{DRAFT} Entering the kActivated state of Package Management [`kActivated` state shall be set when the machine or all impacted [Function Groups](#) (the ones related to the processed [Software Package](#)) have been successfully restarted and verified indicated by successful return of [State Management UpdateRequest Service Interface VerifyUpdate](#) method calls.] ([RS_UCM_00024](#))

`kVerifying` state gives the client controlling the update process a chance to perform verification test by calling [State Management UpdateRequest Service Interface \[SWS_SM_91017\] VerifyUpdate](#) method, though functionality in verify state can be limited. Client can also coordinate the results over several [AUTOSAR Adaptive Platforms](#) and still perform a [Rollback](#) if verification indicates the need for it.

If the system check is successful, the client can decide either to [Rollback](#) the current active processing so that the previous processed working software gets started, or to perform [Finish](#) so that the changes of processed software become permanent. By calling [Finish](#) a clean-up is initiated and in case of A/B partition, a swap between the partitions happens and the newly inactive partition becomes a copy of the newly active partition. In case [Finish](#) succeeds (including the clean-up), the current [CurrentStatus](#) changes to `kIdle`.

For [Rollback](#) the update software needs to be deactivated and possibly reactivated from original version, e.g. self-update of UCM. For this reason [Rollback](#) is also

performed through two states, similarly as activation. Calling `Rollback` sets `UCM` into `kRollingBack` state where original software version is made executable and where original software is activated by the `State Management`. This is started by calling `State Management UpdateRequest Service Interface [SWS_SM_91017] PrepareRollback` method for each `Software Cluster`. On success, `UCM` goes to `kRollingBack` state. In this state all the changes introduced during update process have been deactivated and can be cleaned by calling `Finish`.

[SWS_UCM_00126] Entering the `kRollingBack` state after a Rollback call [The state `kRollingBack` shall be set when `Rollback` is called.] ([RS_UCM_00008](#), [RS_UCM_00030](#))

[SWS_UCM_00155]{DRAFT} Entering the `kRolling-Back` state after a failure in the `kVerifying` state [The state `kRollingBack` shall be set if any of the `State Management UpdateRequest Service Interface VerifyUpdate` method calls returns the result `kVerifyFailed`.] ([RS_UCM_00008](#), [RS_UCM_00030](#))

[SWS_UCM_00264]{DRAFT} Update verification rejected [If any one of the `State Management UpdateRequest Service Interface VerifyUpdate` returns error `kRejected` too many times or for too long (implementation specific thresholds), `UCM` shall transition to `kRollingBack` state.] ([RS_UCM_00030](#), [RS_UCM_00008](#))

[SWS_UCM_00111]{DRAFT} Entering the `kRollingBack` state [The state `kRollingBack` shall be set after all calls to `State Management UpdateRequest Service Interface PrepareRollback` have returned successfully.] ([RS_UCM_00008](#), [RS_UCM_00030](#))

[SWS_UCM_00146] Entering the Cleaning-up state after a Finish call [The state `kCleaningUp` shall be set when `Finish` is called and the `UCM` starts to perform cleanup actions.] ([RS_UCM_00008](#), [RS_UCM_00030](#))

[SWS_UCM_00162] Entering the Cleaning-up state after a `RevertProcessedSw-Packages` call [The state `kCleaningUp` shall be set when `RevertProcessedSw-Packages` is called in `kProcessing` or `kReady` states and the `UCM` starts to perform cleanup actions.] ([RS_UCM_00008](#), [RS_UCM_00030](#))

[SWS_UCM_00163] Action in Cleaning-up state [When `kCleaningUp` state is set, the `UCM` shall clean up all data of the processed packages that are not needed anymore.] ([RS_UCM_00008](#), [RS_UCM_00030](#))

[SWS_UCM_00164] Cleaning up of Software Packages [In `kCleaningUp` state, the `UCM` may remove (from the `UCM` buffer for instance) the "physical" Software Package (e.g. zip file) that was used to transport the the `SoftwareCluster` to the `UCM`.] ([RS_UCM_00008](#), [RS_UCM_00030](#))

[SWS_UCM_00127] Finishing update sequence [`kIdle` shall be set when `Finish` is called and the clean-up has been successfully performed. This finishes the update sequence and next sequence can be started.] ([RS_UCM_00008](#), [RS_UCM_00030](#))

[SWS_UCM_00147] Return to the Idle state from Cleaning-up state [kIdle state shall be set when the Clean-up operation has been completed successfully.] ([RS_UCM_00024](#))

7.1.8 Robustness against reset

Failure during over-the-air updates could lead into corrupted or inconsistent software configuration and further updates might be blocked. For this reason UCM needs to be robust against interruptions like power downs.

[SWS_UCM_00157] Detection of reset [At start up UCM shall identify if uncontrolled reset occurred.] ([RS_UCM_00027](#))

The way for UCM to detect uncontrolled reset is project specific. UCM could use hardware platform specific registers to detect Soft/Hard reset. Or it could access PHM Functional Cluster to detect uncontrolled reset. UCM could also check that the `CurrentStatus` persistent field is not `kIdle` or `kVerifying`.

[SWS_UCM_00158] Cleanup of interrupted actions [After an uncontrolled reset, UCM shall check non volatile memory integrity, recover processed artifacts in case it is corrupted and resume interrupted actions in order to return the system into a state from where UCM can continue serving its Clients.] ([RS_UCM_00027](#))

[SWS_UCM_00270]{DRAFT} UCM internal state persistency [UCM shall persist `CurrentStatus` state field to be able to resume on-going update after an intended or unintended reboot.] ([RS_UCM_00027](#))

7.1.8.1 Boot monitoring

Activation failure during OS and Platform-self updates can lead to a state in which the system is not able to reach a point where UCM and the client are able to function as expected and thus not able to execute the rollback. For these cases the system should include component which is responsible to monitor that the OS and platform will start up correctly. In case of failure, the Boot monitoring component should trigger a reset or modify the boot options to trigger a rollback.

7.1.9 History

[SWS_UCM_00115] History [`GetHistory` method shall retrieve all actions that have been performed by UCM within a specific time window input parameter.] ([RS_UCM_00032](#))

In the case the UCM Client requests a rollback after a successful activation, `CurrentStatus` field transitioning to `kActivated`, `GetHistory` method will later return `GetHistoryType`, with subelement `Resolution` of type `ResultType` equal to `kActivatedAndRolledBack`.

[SWS_UCM_00160] Processing results records [UCM shall save activation time and activation result of processed `Software Packages` in the history.] (*RS_UCM_00032*)

[SWS_UCM_00271]{DRAFT} Keeping history of failure error code [UCM shall keep in `GetHistoryType` subelement `FailureError` the last failure error code as described in [SWS_UCM_00136]. If no error occurred, the stored value shall be 0.] (*RS_UCM_00032*)

7.1.10 Version Reporting

[SWS_UCM_00004] Report software information [UCM shall provide a method `GetSwClusterInfo` of the interface service `PackageManagement` to provide the identifiers and versions of the `SoftwareClusters` that are in state `kPresent`.] (*RS_UCM_00002*)

[SWS_UCM_00030] Report changes [UCM shall provide a method `GetSwClusterChangeInfo` of the interface service `PackageManagement` to provide the identifiers and versions of the `SoftwareCluster` that are in state `kAdded`, `kUpdated` or `kRemoved`.] (*RS_UCM_00011*)

[SWS_UCM_00185] Provide `SoftwareCluster` general information [UCM shall provide a method `GetSwClusterDescription` to return the version, type approval, license and release notes of the `SoftwareCluster` that are in state `kPresent`.] (*RS_UCM_00002, RS_UCM_00011*)

7.1.11 Securing Software Updates

UCM provides service interface using `ara::com`. There is no authentication of the client in UCM's update sequence.

For authentication of the `Software Package`, you can refer to 7.1.3

[SWS_UCM_00103]{DRAFT} Update to older `Software Cluster` version than currently present [In order to avoid an attacker to install an old `Software Cluster` version having known security flaws, UCM shall prohibit its processing. In case of such attempt, `UCM TransferExit` or `TransferData` shall raise the `ApplicationError OldVersion`, keep within history this attempt and delete old `Software Package`.] (*RS_UCM_00031*)

[SWS_UCM_CONSTR_00002]{DRAFT} UCM confidential information handling [The [PackageManagement](#) interface shall only be mapped via `ara::com` to a secure endpoint using secure communication channel providing confidentiality protection.] ([RS_UCM_00002](#), [RS_UCM_00010](#), [RS_UCM_00011](#))

The `GetSwClusterInfo`, `GetSwClusterChangeInfo`, `GetHistory`, `GetSwClusterDescription` and `GetSwPackages` methods are using data that could identify vehicle user and therefore should be protected for confidentiality.

[SWS_UCM_00202]{DRAFT} Trusted Platform compliance [UCM shall ensure that after provisioning updates, all the necessary changes to maintain the Trusted Platform are carried out.] ([RS_EM_00014](#))

The authentication tag of the Trusted Platform corresponding to the updated/removed/added executable files should also be updated/removed/added. See also Chapter 7.10 of the Execution Management [2] for details on the Trusted Platform.

7.1.12 Functional cluster lifecycle

[SWS_UCM_00274]{DRAFT} UCM initialization [UCM shall offer its services only after its internal initialization has been completed, after switching to Running state.] ([RS_UCM_00044](#))

This requirement prevents calling UCM subordinate API while internal initialization is on-going. The concrete initialization tasks are implementation specific.

7.1.12.1 Shutdown behaviour

There are no requirements of shutdown behaviour from UCM functional cluster.

7.2 UCM Master

7.2.1 UCM Master Functional Cluster lifecycle

[SWS_UCM_01205]{DRAFT} **UCM Master internal state persistency** [UCM Master shall persist its state to be able to resume on-going update campaign after an intended or unintended reboot.](RS_UCM_00035, RS_UCM_00042)

[SWS_UCM_01019]{DRAFT} **UCM Master initialization** [UCM Master shall offer its services only after its internal initialization has been completed, after switching to Running state.](RS_UCM_00044)

This requirement prevents calling UCM Master API while internal initialization is on-going. The concrete initialization tasks are implementation specific.

7.2.2 Technical Overview

UCM Master objective is to provide a standard Adaptive Autosar solution to safely and securely update a complete vehicle Over The Air or by a Diagnostic Tester.

UCM Master receives packages from Backend or Diagnostic tool, parses and interprets the Vehicle Package, transfers or streams Software Packages to suitable targets (UCM subordinate or Diagnostic Application) and orchestrates the processing, activations and eventual rollbacks. All these actions are what is called a campaign which UCM Master is coordinating. The UCM of the machines in the same network of a UCM Master, candidates target of a campaign, are referred to as UCM subordinates.

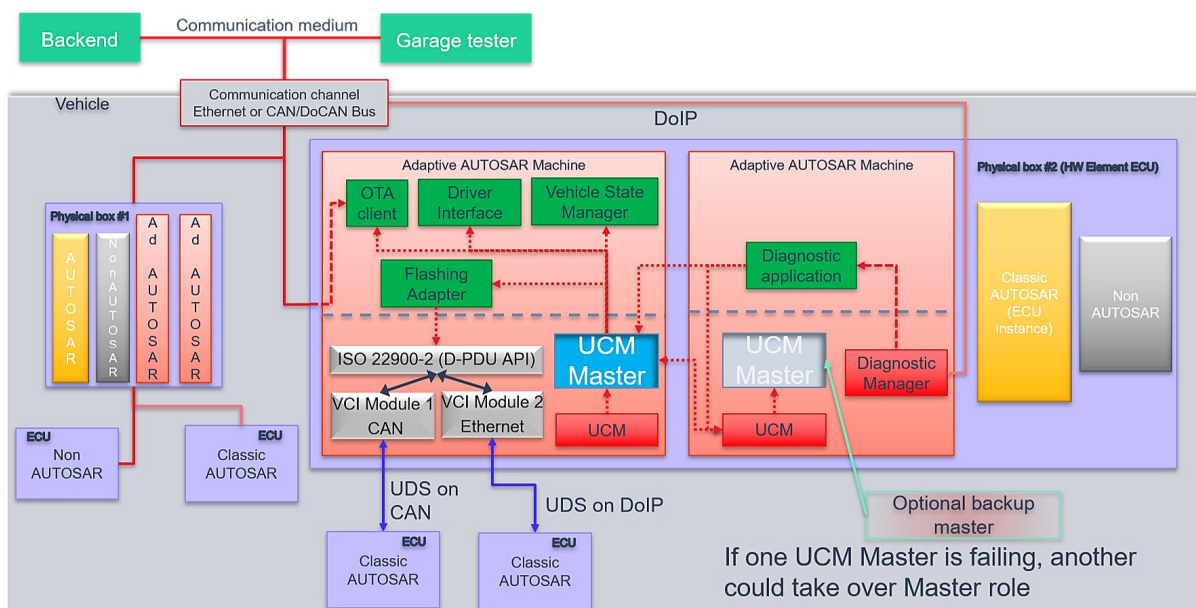


Figure 7.6: Example of UCM Master architecture overview within a vehicle

The **UCM Master** could be considered as a set of add-on features that could enrich any **UCM** instance. Therefore, as per the **UCM APIs**, the **UCM Master APIs** are part of the **Adaptive Platform Services**. **UCM** and **UCM Master** have separate service instances.

The **OTA Client** establishes a communication between **Backend** and **UCM Master** so that they can exchange information of the installed **Software Clusters** in the vehicle and the **Software Clusters** available in the **Backend**. This communication could be triggered by **OTA Client** with a scheduler and **UCM Master** to request the updates in case of newly available **Software Clusters** (pull case) or by **Backend** to push, for instance, an important security update to a fleet of vehicles (push case). The computation to find new **Software Clusters** versions and resolution of dependencies between **Software Clusters** can be either done at **UCM Master** or **Backend**.

Vehicle Driver interface **Adaptive Application** is required if it is needed during an update campaign to interact with vehicle human driver through for instance Human-Machine Interface. Download of packages from a **Backend** could have various financial costs for the driver depending of communication types, so consent from driver could be suitable.

Vehicle State Manager Adaptive Application is required if it is needed during an update campaign to control the vehicle state for safety purposes. For instance, it could be required for safety to have standing still vehicle, shut-off engine, closed doors, etc. before starting an **UCM** activation or during its processing.

7.2.3 UCM Master general behaviour

The **UCM Master** acts as a client of the service interface offered by the **UCM** subordinates, already specified in **UCM**. However, the **UCM Master** also offers three different service interfaces to **OTA Client**, Vehicle Driver interface and **Vehicle State Manager** respectively. **UCM Master** aggregates **UCM** subordinates states and can report its status field to a **Backend** through its **OTA Client**.

A **UCM Master** receives a **Vehicle Package** and transfers or streams **Software Package(s)** to the **UCM** subordinates for an **AUTOSAR Adaptive Platform Software Cluster** update. A **Vehicle Package** contains instructions for orchestrating updates between **ECUs**. The **UCM Master** provides information about **ECUs** in the vehicle, installed software and update campaign resolution.

[SWS_UCM_01003] UCM Master checks states of UCM subordinates [A **UCM Master** shall check the status of its **UCM** subordinates are all at **kIdle CurrentStatus** state before starting a campaign.] (**RS_UCM_00043**)

UCM Master should for instance make sure that there is no ongoing diagnostic updates before starting an update campaign by checking the reported state(s) of the **UCM** subordinate(s) to be idle.

7.2.4 UCM identification

For UCM Master to distribute Software Packages to other UCM subordinates, UCM Master has to identify UCM subordinates in vehicle. This identification could be at boot or later but at least before any communication with Backend are engaged. Each UCM has a unique identifier in Vehicle Package UcmModuleInstantiation called identifier to help UCM Master transferring packages to targeted UCMS. To get such identifier, UCM Master will perform first a service discovery through ara::com to get all UCMS service instances available. Then UCM Master will call GetId method for each UCM subordinates returning each corresponding UcmModuleInstantiation identifiers.

[SWS_UCM_00009]{DRAFT} UCM exposing its identifier [UCM shall provide a method GetId returning its UcmModuleInstantiation identifier.](RS_UCM_00036)

If an ECU hosting UCM subordinate is replaced physically, it will register its services to the registry at boot up and UCM Master will be able to communicate with UCM subordinate(s).

[SWS_UCM_01005] UCM Master is discovering UCMS in vehicle [UCM Master shall continuously look for UCM service instances (use of StartFindService() call).](RS_UCM_00036)

If a UCM Master is failing, another inactive UCM Master could be used or activated by OTA Client.

Default (at boot) Master/Subordinate hierarchy or priority could be optionally overwritten for each campaign based on Vehicle Package content at the condition OTA Client could properly parse Vehicle Packages.

7.2.5 UCM Master Software Packages transfer or streaming

UCM Master has generally same transfer API as UCM in order to simplify implementation and reuse code as much as possible (could be shared library between UCM and UCM Master).

It is necessary to distinguish Vehicle Package (UCM Master specific) from Software Packages transfer.

[SWS_UCM_01011] TransferVehiclePackage InsufficientMemory [TransferVehiclePackage method shall raise the ApplicationError InsufficientMemory if the UCM buffer has not enough resources to process the corresponding Vehicle Package.](RS_UCM_00013)

[SWS_UCM_01018]{DRAFT} TransferVehiclePackage BusyWithCampaign [TransferVehiclePackage method shall return the ApplicationError BusyWithCampaign, if the UCM Client wants to start a new campaign, while a campaign is already started and active.](RS_UCM_00035)

[SWS_UCM_01014] Packages transferring sequence [TransferStart method shall raise the `ApplicationError UnexpectedPackage` if the `Software Package` name parameter was not a value of the `RequestedPackage` field.] (*RS_UCM_00043*)

[SWS_UCM_01013] Too big block size received by UCM Master [In the case the received block size with `TransferData` exceeds the block size returned by `TransferStart` or `TransferVehiclePackage` for the same `TransferId`, `UCM Master` shall raise the `ApplicationError IncorrectBlockSize`.] (*RS_UCM_00035*)

[SWS_UCM_01015] Invalid Vehicle Package manifest [`TransferExit` shall raise the `ApplicationError InvalidPackageManifest` when a `Vehicle Package` manifest is not compliant with the AUTOSAR schema.] (*RS_UCM_00036*, *RS_UCM_00043*)

[SWS_UCM_01016] Invalid Package Manifest [`UCM Master` shall raise the `ApplicationError InvalidPackageManifest` in case a manifest file is not compliant with the AUTOSAR schema.] (*RS_UCM_00036*, *RS_UCM_00043*)

[SWS_UCM_01017] RequestedPackage field [`UCM Master` shall provide the field `RequestedPackage` containing the requested `Software Package` name and version as defined in update campaign. Changing this field is a notification for the `OTA Client` to start transfer of the requested `Software Package`.] (*RS_UCM_00042*)

`OTA Client` does not know what `Software Packages` should be transferred in a given campaign contained in a `Vehicle Package`. `OTA Client` can know what `Software Package` is expected to be transferred by subscribing to `UCM Master`'s `RequestedPackage` field. Version is added to support campaigns which need an update path for a `Software Package` requiring an intermediate update to a transitional version. In this case the version parameter makes it unambiguous which package version shall be transferred as both have the same name assigned.

7.2.6 Adaptive Applications interacting with UCM Master

In order to have interoperability between several vendors platforms, `Adaptive Applications` interacting with `UCM Master` via `ara::com` like `OTA Client`, `Vehicle State Manager` or `Vehicle Driver Interface` have their APIs specified. However, their detailed behaviours are out of scope for this specification document.

7.2.6.1 OTA Client

`OTA Client` is an `Adaptive Application` that sets communication channel between `Backend` and `UCM Master`. The communication between `Backend` and `OTA Client` is abstracted and details like protocol are out of scope for this specification document. `OTA Client` should make sure `Backend` is providing the right information

and packages to the vehicle by identifying the vehicle, by for instance sending VIN to Backend.

OTA Client uses the UCM Master as a service provider via ara::com. Since transferring Vehicle Packages and Software Packages from Backend to UCM Master is OTA Client's responsibility, OTA Client should be able to accommodate any proprietary communication protocol used between OTA Client and Backend and convert it into ara::com transport protocol. OTA Client should support UCM Master Software Packages transfer or streaming as specified in chapter 7.2.5, it should then provide at least the following functionality:

- Comply to the requirements of chapter 7.1.3 in the context of package transfer between OTA Client and UCM Master.
- OTA Client should subscribe to UCM Master's RequestedPackage field to know what Software Package is expected to be transferred
- OTA Client should subscribe to UCM Master's TransferState field to know what is campaign state
- OTA Client should subscribe to UCM Master's SafetyState field to eventually make sure vehicle is in a safe state before transferring Packages
- OTA Client could support multiple data transfers in parallel, as specified in [SWS_UCM_00075]

In addition, OTA Client could support the ability to pause or resume the package transfer for the current campaign to prioritize the transfer of the packages from a different campaign. The ability of OTA Client to pause or resume the package transfer might be helpful in the case there is a need to cancel an ongoing campaign at kTransferring state to allow higher priority campaign to be performed.

Only one UCM Master has to be used by OTA Clients per network domain. As UCM Master is distributing Software Packages and coordinating UCM subordinates, OTA Clients in the same network domain have to make sure there are no already on-going campaigns when starting a new campaign with TransferVehiclePackage method call by checking UCM Master's state with TransferState field, in order to avoid any interference and guarantee success of an update campaign.

[SWS_UCM_01101] Provide information of installed Software Clusters in vehicle [UCM Master shall provide a method GetSwClusterInfo to return information of all Software Cluster present in the vehicle.] (RS_UCM_00033)

UCM Master can aggregate Software Cluster information from several UCMS within a vehicle and returns the result to a Backend which can compute if there is any new Software Cluster available and decide to send to UCM Master through OTA Client a Vehicle Package. It is up to OTA Client to make sure the synchronisation of the versions of Software Packages present in Backend and Software Clusters in the vehicles using GetSwClusterInfo or SwPackageInventory is recent enough before starting a campaign with TransferVehiclePackage call.

[SWS_UCM_01103] Inform Backend of needed Software Packages for an update [On `SwPackageInventory` call, UCM Master shall compare the supplied list of available `Software Packages` in the Backend for the vehicle to its own internal information of present `Software Clusters` in the vehicle and return the list of `Software Packages` selected for update.] (*RS_UCM_00033*)

The `OTA Client` uses this returned `Software Packages` list to request the selected packages to the Backend. As required by constraint **[SWS_UCM_CONSTR_00014]**, each `Software Cluster` corresponds to one `Software Package` and share the same `shortName`.

[SWS_UCM_01119] Report information of Software Packages [UCM Master shall provide a method `GetSwPackages` to return the identifiers, names, versions, Consecutive Bytes Received, Consecutive Blocks Received and states of `Software Packages`.] (*RS_UCM_00035*)

7.2.6.2 Vehicle Driver Interface

Vehicle driver interface could be required by legal constrains or communication cost consideration. To support mandatory safety and security critical updates, driver interaction can be used for:

- Requesting transfer, processing or activation permission from vehicle driver
- Notifying vehicle driver of safety and security measures he has to apply to the vehicle in order to proceed to next step into the update campaign

[SWS_UCM_01105] Interaction of UCM Master with Vehicle Driver [UCM Master shall provide a method `DriverApproval` in order to receive the confirmation of the vehicle driver's approval.] (*RS_UCM_00038*)

The Vehicle Driver Interface `Adaptive Application` could adapt its notification content related to safety by subscribing to the UCM Master's `SafetyConditions` field.

[SWS_UCM_01117]{DRAFT} UCM Master SafetyState field [UCM Master shall provide to vehicle driver interface the `SafetyConditions` field.] (*RS_UCM_00038*, *RS_UCM_00037*)

UCM Master can notify vehicle driver with `SafetyState` field if the vehicle safety is breached during the update, by for instance popping-up a message.

[SWS_UCM_01118] UCM Master waiting for vehicle driver approval [In the case approval from driver is requested as configured in `VehiclePackage`, UCM Master shall wait for `DriverApproval` method with parameter `Approval=True` before transitioning state from `kVehiclePackageTransferring` to `kSoftwarePackage_Transferring`, `kSoftwarePackage_Transferring` to `kProcessing` or `kProcessing` to `kActivating`.] (*RS_UCM_00038*)

[SWS_UCM_CONSTR_00003] Exclusive use of Vehicle Driver Interface [Software Integrator shall ensure that only one [Adaptive Application](#) is using the [UCM Master's Vehicle Driver Interface](#).] ([RS_UCM_00035](#), [RS_UCM_00037](#))

For example, the integrator may restrict the access of Vehicle Driver Interface from [UCM Master](#) by configuring the Identity and Access Management functional cluster accordingly.

[SWS_UCM_01107]{DRAFT} UCM Master provides progress information to Vehicle Driver [UCM Master shall provide to Vehicle Driver Interface [Adaptive Application](#) methods [GetSwTransferProgress](#) and [GetSwProcessProgress](#) in order for [UCM Master](#) to inform progress of respectively update campaign's transfer and processing.] ([RS_UCM_00038](#))

[SWS_UCM_CONSTR_00004] Unsupported safety by Vehicle driver interface [In the case [SafetyConditions](#) field is not a supported safety Vehicle driver interface, it shall call the method [DriverApproval](#) with parameter [SafetyStates](#) including at least one [SafetyStates](#)=`'NotSupported'`.] ([RS_UCM_00037](#))

[SWS_UCM_01120] Provide Software Packages general information [UCM Master shall provide a method [GetSwPackageDescription](#) to return the description of each [Software Packages](#) that are part of current campaign and that are contained in [Vehicle Package](#).] ([RS_UCM_00033](#), [RS_UCM_00038](#))

[SWS_UCM_01135]{DRAFT} Get Software Clusters descriptions from a vehicle [At [GetSwClusterDescription](#) method call via [VehicleDriverApplication](#) interface, [UCM Master](#) shall return [Software Clusters](#) descriptions aggregated from the [UCM Subordinates](#) or [Flashing Adapters](#).] ([RS_UCM_00033](#), [RS_UCM_00038](#))

7.2.6.3 Vehicle State Manager

[Vehicle State Manager](#) is collecting states from the several vehicle [ECUs](#) and informs [UCM Master](#) when the safety state computed based on the safety policy referred in the [Vehicle Package](#) is changing. If the safety policy is not met, the [UCM Master](#) can for instance decide to:

- Inform vehicle driver that the safety conditions are not met to continue the update
- postpone, pause or cancel the update until policy is met

[SWS_UCM_01109]{DRAFT} UCM Master provides a safety interface [UCM Master shall provide a field [SafetyConditions](#) for which values are available in [VehiclePackage](#).] ([RS_UCM_00037](#))

[SWS_UCM_01110]{DRAFT} UCM Master SafetyState method [UCM Master shall provide a method [SafetyState](#) to get informed of vehicle state changes.] ([RS_UCM_00037](#))

[SWS_UCM_CONSTR_00005]{DRAFT} Safety state change [Vehicle State Manager Adaptive Application shall call `SafetyState` method provided by UCM Master when the safety state is changing.] ([RS_UCM_00035](#), [RS_UCM_00037](#))

[SWS_UCM_CONSTR_00009]{DRAFT} Safety condition change [Vehicle State Manager Adaptive Application shall call `SafetyState` method provided by UCM Master when the field `SafetyConditions` is changing.] ([RS_UCM_00035](#), [RS_UCM_00037](#))

[SWS_UCM_CONSTR_00015]{DRAFT} Trigger on `kVehicleChecking` state [On transition to `kVehicleChecking` state, Vehicle State Manager shall first perform checks to assess the post-activation state of the vehicle.] ([RS_UCM_00035](#))

Vehicle State Manager could be responsible for performing post-activation checks, interfacing with an application performing such checks, confirming backend is still reachable and further updates are still possible.

[SWS_UCM_01272]{DRAFT} VehicleCheck call not permitted [UCM Master shall return `ApplicationError OperationNotPermitted` if `VehicleCheck` method is called in another UCM Master state than `kVehicleChecking`.] ([RS_UCM_00035](#))

[SWS_UCM_CONSTR_00006]{DRAFT} Exclusive use of Vehicle State Manager [System Integrator shall ensure that Vehicle State Manager is the exclusive user of the `SafetyState` method.] ([RS_UCM_00035](#), [RS_UCM_00037](#))

For example, the integrator may restrict the access to Vehicle State Manager in configuring the Identity and Access Management functional cluster accordingly.

[SWS_UCM_CONSTR_00007]{DRAFT} Unsupported safety conditions by Vehicle State Manager [In the case the requested `SafetyConditions` field is not supported by Vehicle State Manager, it shall call `SafetyState` method with parameter `SafetyStates` including at least one `SafetyStates='NotSupported'`.] ([RS_UCM_00037](#))

[SWS_UCM_CONSTR_00008]{DRAFT} Switching vehicle into update mode [Vehicle State Manager shall change vehicle's state and its ECUs in the right update mode in order to avoid any timeout issues during update.] ([RS_UCM_00037](#))

This vehicle state change could be triggered based on UCM Master State Machine.

7.2.6.4 Flashing Adapter

Flashing Adapter is an application that is used in the case UCM Master is updating a AUTOSAR Classic Platform or any platform that can be flashed using diagnostic. It contains OEM specific diagnostic sequences and communicates via `ara:com` with the UCM Master and the AUTOSAR Adaptive Platform, and uses an implementation of diagnostic protocol data unit application programming interface (D-PDU API) to communicate with Classic ECUs over the Vehicle Bus.

The data transfer from Flashing Adapter to the target [ECU](#) via diagnostic communication can be subject to interruptions if communication on a higher priority protocol occurs, e.g. OBD services. In that case the Flashing Adapter can use a project specific strategy to detect the interruption, retry the transfer from the beginning, and decide whether to notify or not the client about the transfer interruption.

[SWS_UCM_CONSTR_00011]{DRAFT} Flashing Adapter provided interface
[Flashing Adapter shall provide the same `ara::com` service interface as [UCM](#)
([\[SWS_UCM_00131\]](#)).] ([RS_UCM_00035](#))

7.2.7 Non Adaptive Platform update

[SWS_UCM_01121]{DRAFT} Adaptive Platform interface provided for Flashing Adapter [The interface provided by the [AUTOSAR Adaptive Platform](#) in order to update non AUTOSAR Platform should comply with ISO 22900-2:2017 ([D-PDU API](#)) but as this standard's coverage is wide, it is allowed to implement a reduced API that is needed to update for instance a [AUTOSAR Classic Platform](#).] ([RS_UCM_00035](#))

The implementation of the [D-PDU API](#) is processing binary data from the Flashing Adapter and do all of the required session, transport and network layer handling to send and receive the data on the physical vehicle bus with respect to the underlying protocols. The reason of using ISO 22900-2:2017 is to ensure that the specific Flashing Adapter from any vehicle or tool manufacturer can operate on a common software interface and can easily exchange [MVCI](#) (Modular Vehicle Communication Interface) protocol module implementations.

In the case the targeted ECU by an update does not have the capability to switch between current and new [Software Cluster](#), the vehicle package campaign should foresee to download not only the new version but also the currently installed version of the [Software Cluster](#) to be updated in order to make possible a rollback from the new version to the old version of the [Software Cluster](#). The location to store the current [Software Package](#) could be the Flashing Adapter but ultimately it has to be available to Flashing Adapter in order to flash it in case of a rollback.

7.2.7.1 D-PDU API implementation support

[SWS_UCM_01122]{DRAFT} Supported physical layers by D-PDU API implementation [ISO_11898_2_DWCAN (Dual Wire CAN), ISO_11898_3_DWFTCAN (Dual Wire CAN Fault tolerant), SAE_J2411_SWCAN (Single Wire CAN) and IEEE_802_3(Ethernet) physical layers shall be supported if their respective physical vehicle bus is available inside the ECU, all other physical layers present in [D-PDU API](#) are optional.] ([RS_UCM_00035](#))

[SWS_UCM_01123]{DRAFT} Supported application layers by D-PDU API implementation [ISO_15765_3 (Unified diagnostic services, UDS on CAN, ISO withdrawn UDS), ISO_14229_3 (Unified diagnostic services on CAN implementation, UDSON-CAN) and ISO_14229_5 (Unified diagnostic services on Internet Protocol implementation, UDSONIP) application layers shall be supported if their respective application layer is available inside the ECU, all other application layers present in [D-PDU API](#) are optional.] ([RS_UCM_00035](#))

[SWS_UCM_01124]{DRAFT} Supported protocols by D-PDU API implementation [ISO UDS on CAN with Application layer ISO_15765_3, ISO UDS on CAN with Application layer ISO_14229_3 (UDSONCAN) and ISO UDS on DoIP with Application layer ISO_14229_5 (UDSONIP) protocols shall be supported, all other protocols are optional.] ([RS_UCM_00035](#))

These protocols are present in 'Table B.2 - Standard protocol combination list' of ISO 22900-2:2017(E).

7.2.7.2 Not required D-PDU API concepts

Dynamic Link Libraries for Windows operating system are not required. The Windows installation process out of ISO 22900-2:2017(E) chapter 8.7.2 is not applicable to the [AUTOSAR Adaptive Platform](#) which is using POSIX Operating System.

[SWS_UCM_01125]{DRAFT} Separation of D-PDU API-Software with the MSCI protocol module firmware [A [D-PDU API](#) implementation may be split at OSI-Layer 4 into a [D-PDU API](#) implementation on OSI-Layer 5 (usually in the PC itself) and the [VCI-Module](#) on OSI-Layers 3 and 4 (usually the [VCI](#) itself).] ([RS_UCM_00035](#))

[SWS_UCM_01126]{DRAFT} Root description file (RDF) [Within an [AUTOSAR Adaptive Platform](#), only one [D-PDU API](#) implementation is required for [UCM](#), therefore the [D-PDU API](#) implementation may not use the [D-PDU API](#) root description file (RDF).] ([RS_UCM_00035](#))

The only instance of the [D-PDU API](#) within a [Software Cluster](#) can be statically linked with the Flashing Adapter.

[SWS_UCM_01127]{DRAFT} Module Description File (MDF) [The [D-PDU API](#) implementation should not implement a protocol description file.] ([RS_UCM_00035](#))

The supported protocol module types are fixed in the [UCM](#) use case.

[SWS_UCM_01128]{DRAFT} Symbolic names and IDs [The Flashing Adapter may operate the [D-PDU API](#) without using symbolic names and IDs during runtime. If the use case excludes frequent changes to the [MDFs](#), simple Flashing Adapter may even hardcode (e.g. in a header file) all necessary IDs and operate the [D-PDU API](#) without symbolic names.] ([RS_UCM_00035](#))

[SWS_UCM_01129]{DRAFT} SAE J2534-1 and RP 1210a compatibility [[D-PDU API](#) implementation may not be compatible to SAE J2534-1 and RP 1210a.] ([RS_UCM_00035](#))

The Adaptive Platform does not need any migration path.

[SWS_UCM_01130]{DRAFT} ComPrimitives in RawMode [[D-PDU API](#) implementation may not implement the IOCTL filter data structure.] ([RS_UCM_00035](#))

7.2.7.3 Not required D-PDU API functions

[PDUUnlockResource\(\)](#) and [PDUUnlockResource\(\)](#) are used to lock and unlock exclusive access to a [ComLogicalLink](#) in case of parallel usage of the [D-PDU API](#) implementation by multiple applications on the same physical communication link. Flashing of

a Classic ECU always requires some exclusive access and should be handled in the [AUTOSAR Adaptive Platform](#) itself.

[SWS_UCM_01131]{DRAFT} PDUIoctl(PDU_IOCTL_RESET) [The parameter PDU_IOCTL_RESET may not be implemented in [D-PDU API](#) implementation so the call of PDUIoctl(PDU_IOCTL_RESET) shall return the error code PDU_ERR_ID_NOT_SUPPORTED.] ([RS_UCM_00035](#))

[SWS_UCM_01132]{DRAFT} PDUIoctl(PDU_IOCTL_START_MSG_FILTER), PDUIoctl(PDU_IOCTL_CLEAR_MSG_FILTER), PDUIoctl(PDU_IOCTL_STOP_MSG_FILTER) [The call of PDUIoctl() with the parameters PDU_IOCTL_START_MSG, PDU_IOCTL_CLEAR_MSG_FILTER and PDU_IOCTL_CLEAR_MSG_FILTER shall return the error code PDU_ERR_ID_NOT_SUPPORTED.] ([RS_UCM_00035](#))

The parameters PDU_IOCTL_START_MSG, PDU_IOCTL_CLEAR_MSG_FILTER and PDU_IOCTL_CLEAR_MSG_FILTER are intended for the PassThru-Mode for com-primitives and therefore an implementation is not required for the Flashing Adapter.

[SWS_UCM_01133]{DRAFT} PDUIoctl(PDU_IOCTL_SEND_BREAK) [The IOCTL command PDU_IOCTL_SEND_BREAK shall return PDU_ERR_ID_NOT_SUPPORTED.] ([RS_UCM_00035](#))

The IOCTL command PDU_IOCTL_SEND_BREAK is used to send a break signal on the ComLogicalLink. A break signal can only be sent on certain physical layers (e.g. SAE J1850 VPW physical links and UART physical links) which are not supported by [UCM](#).

[SWS_UCM_01134]{DRAFT} Not used D-PDU API function return codes [The return codes PDU_ERR_CABLE_UNKNOWN, PDU_ERR_RSC_LOCKED, PDU_ERR_RSC_NOT_LOCKED, PDU_ERR_API_SW_OUT_OF_DATE and PDU_ERR_MODULE_FW_OUT_OF_DATE may not be implemented into the [D-PDU API](#) of the [AUTOSAR Adaptive Platform](#).] ([RS_UCM_00035](#))

There is no cable attached to the ECU and therefore no cable detection return code PDU_ERR_CABLE_UNKNOWN could occur.

Locking is not required for the Flashing Adapter, therefore PDU_ERR_RSC_LOCKED and PDU_ERR_RSC_NOT_LOCKED return code could not occur.

There is no separation of [D-PDU API](#)-Software with the [MVCI](#) protocol module firmware required in the [AUTOSAR Adaptive Platform](#), so PDU_ERR_API_SW_OUT_OF_DATE and PDU_ERR_MODULE_FW_OUT_OF_DATE return codes could not occur.

7.2.7.4 Classic platform update with UCM Master and diagnostic tool

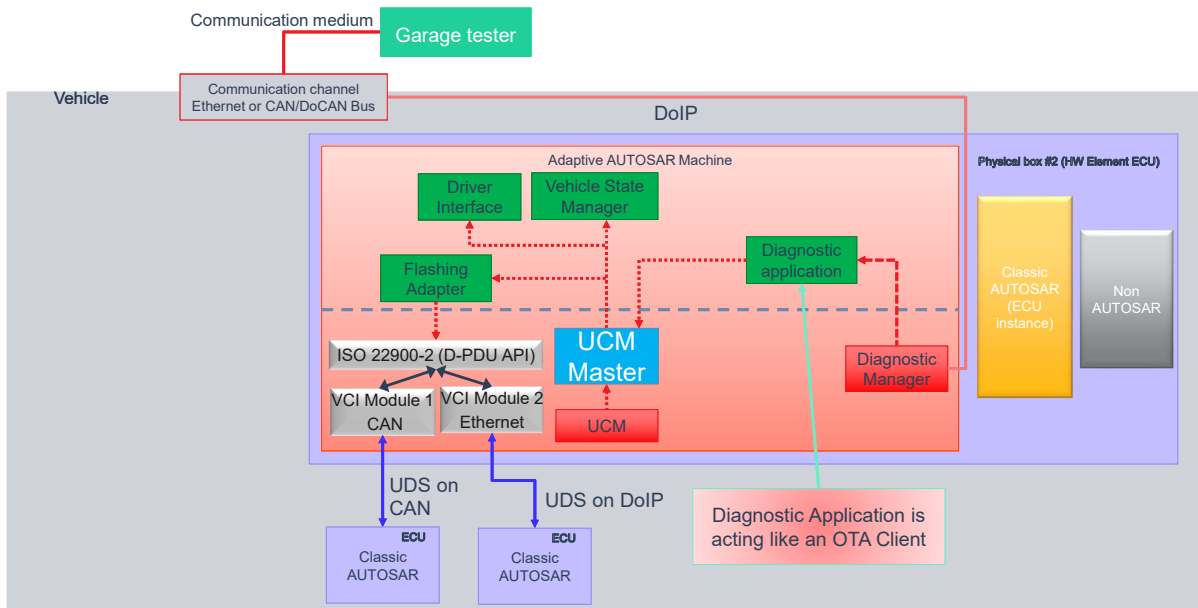


Figure 7.7: Classic platform update with UCM Master and diagnostic tool

The Diagnostic Manager connects the Diagnostic tool to the Adaptive Platform. The diagnostic application is acting like an **OTA Client** and uses the **UCM Master** services to push **Vehicle Packages** and **Software Packages**.

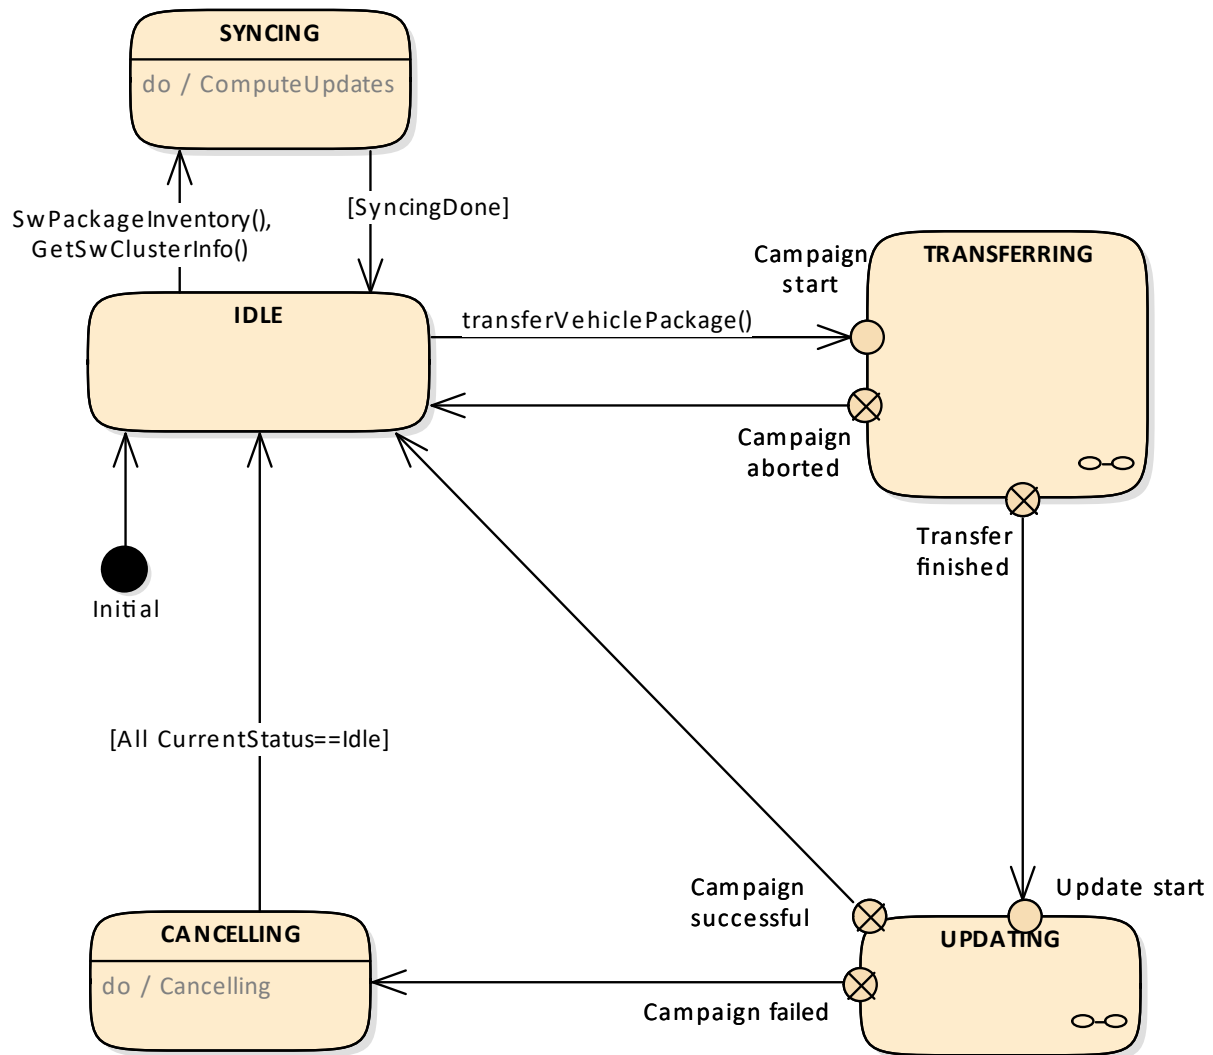


Figure 7.9: Campaign State Machine for OTA Client (TransferState field)

Diagrams 7.8 and 7.9 do not include behaviour after reset ([SWS_UCM_01205] for more details)

[SWS_UCM_01201] Sequential orchestration of campaigns [UCM Master shall orchestrate at most a single campaign at any one time.] (RS_UCM_00043)

[SWS_UCM_01265] TransferState field [UCM Master shall provide the state of a campaign over the TransferState field of the UCM Master’s VehiclePackageManagement service interface.] (RS_UCM_00042)

[SWS_UCM_01203] CampaignState field [UCM Master shall provide the state of a campaign over the CampaignState field of the UCM Master VehicleDriverApplication Service Interface.] (RS_UCM_00042) There is an overview of the campaign state machine in Fig. 7.8 detailing UCM Master campaign states and transitions.

7.2.8.1 States

[SWS_UCM_01204] Initial state [UCM Master shall have `kIdle` default state.] ([RS_UCM_00035](#))

[SWS_UCM_01207] Trigger on `kSoftwarePackage_Transferring` state [On transition to `kSoftwarePackage_Transferring` state and if all UCM subordinates part of the campaign are in `kIdle` state, UCM Master shall start or resume transferring (`TransferStart` and `TransferData` as well as `TransferExit` if no streaming required) the software packages to the UCM subordinates according to the campaign orchestration.] ([RS_UCM_00035](#), [RS_UCM_00043](#))

[SWS_UCM_01209] Trigger on `kProcessing` state [On transition to `kProcessing` state, UCM Master shall call `ProcessSwPackage` method to UCM subordinates to start or resume processing the software packages ready for processing according to the campaign orchestration.] ([RS_UCM_00035](#), [RS_UCM_00043](#))

[SWS_UCM_00210] Transferring of software packages on `kProcessing` state [If UCM Master is in `kProcessing` state, UCM Master shall transfer `Software Packages` to the UCM subordinates according to the campaign orchestration.] ([RS_UCM_00035](#), [RS_UCM_00043](#))

[SWS_UCM_01212] Trigger on `kActivating` state [On transition to `kActivating` state, UCM Master shall ask UCM subordinates to activate the software with `Activate` method call according to the campaign orchestration.] ([RS_UCM_00035](#), [RS_UCM_00043](#))

[SWS_UCM_01214]{DRAFT} Final action on `kVehicleChecking` state [If UCM Master is in `kVehicleChecking` state and receives the method `VehicleCheck` call with parameter `VehicleCheckResolution=True`, UCM Master shall secondly commit (`Finish`) the software on all UCM subordinates part of the campaign.] ([RS_UCM_00035](#))

[SWS_UCM_01215]{DRAFT} Trigger on `kCancelling` state [On transition to `kCancelling` state, UCM Master shall first rollback (`Rollback`) the software on all UCM subordinates part of the campaign.] ([RS_UCM_00035](#))

[SWS_UCM_01216]{DRAFT} Final action on `kCancelling` state [If UCM Master is in `kCancelling` state and the rollback of software on all UCM subordinates is successful (successful `Rollback` and transition from `kRollingBack` to `kRolledBack`), UCM Master shall secondly commit (`Finish`) the software on all UCM subordinates part of the campaign.] ([RS_UCM_00035](#))

[SWS_UCM_01217] Monitoring of UCM subordinates [UCM Master shall subscribe to the `CurrentStatus` field, in order to follow the current campaign from the state of the UCM Subordinates.] ([RS_UCM_00035](#))

7.2.8.2 States Transitions

[SWS_UCM_01218] Transition from kIdle state to kSyncing state [If UCM Master is in kIdle state, UCM Master shall enter the kSyncing state on a request to GetSwClusterInfo or SwPackageInventory.](RS_UCM_00035, RS_UCM_00033)

[SWS_UCM_01219] Transition from kSyncing state to kIdle state [If UCM Master is in kSyncing state, UCM Master shall enter the kIdle state on completion of GetSwClusterInfo or SwPackageInventory.](RS_UCM_00035)

[SWS_UCM_01220] Transition from kIdle state to kVehiclePackageTransferring state [If UCM Master is in kIdle state, UCM Master shall enter the kVehiclePackageTransferring state on successful completion of TransferVehiclePackage.](RS_UCM_00035)

[SWS_UCM_01221]{DRAFT} Transition from kVehiclePackageTransferring state to kIdle state [If UCM Master is in kVehiclePackageTransferring state, UCM Master shall enter the kIdle state on unsuccessful completion of TransferExit (Vehicle Package) or successful completion of DeleteTransfer (Vehicle Package) or non recoverable error of TransferData.](RS_UCM_00035, RS_UCM_00039)

[SWS_UCM_01222] Transition from kVehiclePackageTransferring state to kSoftwarePackage_Transferring state [If UCM Master is in kVehiclePackageTransferring state, UCM Master shall enter the kSoftwarePackage_Transferring state on successful completion of TransferExit (Vehicle Package).](RS_UCM_00035, RS_UCM_00037, RS_UCM_00038)

[SWS_UCM_01227] Transition from kSoftwarePackage_Transferring state to kIdle state [If UCM Master is in kSoftwarePackage_Transferring state, UCM Master shall enter the kIdle state on successful cancellation request (CancelCampaign) or if there is a non recoverable transfer failure from one of the UCM subordinates.](RS_UCM_00035)

[SWS_UCM_01228] Transition from kSoftwarePackage_Transferring state to kProcessing state [When UCM Master is in kSoftwarePackage_Transferring state, if all Software Packages are ready for processing, all Software Packages from all UCM subordinates are at state kTransferred) or at least one Software Package started being processed by ProcessSwPackage call to one UCM subordinate according to the campaign orchestration, UCM Master shall enter the kProcessing state.](RS_UCM_00035, RS_UCM_00037, RS_UCM_00038, RS_UCM_00043)

[SWS_UCM_01229]{DRAFT} SafetyConditions while processing stream [In the case there is transition from kSoftwarePackage_Transferring state to kProcessing state, the SafetyConditions for kProcessing state shall apply even though there are Software Packages transferring.](RS_UCM_00035, RS_UCM_00037)

It is integrator's responsibility to make sure in this use case that safety conditions for Processing will also cover safety approach of transferring.

[SWS_UCM_01234]{DRAFT} Transition from `kProcessing` state to `kActivating` state [If `UCM Master` is in `kProcessing` state and all software packages of the campaign have been successfully (successful `ProcessSwPackage`) processed and all UCM subordinates part to the campaign are in the `kReady` state, `UCM Master` shall enter the `kActivating` state.]([RS_UCM_00035](#), [RS_UCM_00037](#), [RS_UCM_00038](#))

[SWS_UCM_01236]{DRAFT} Transition from `kProcessing` state to `kCancelling` state [If `UCM Master` is in `kProcessing` state, `UCM Master` shall enter the `kCancelling` state on successful cancellation request (`CancelCampaign`) or in case of non recoverable processing failure of one of the UCM subordinates.]([RS_UCM_00035](#))

[SWS_UCM_01239]{DRAFT} Transition from `kActivating` state to `kCancelling` state [If `UCM Master` is in `kActivating` state, `UCM Master` shall enter the `kCancelling` state if any UCM subordinates part of the campaign unsuccessfully (unsuccessful `Activate` and transition from `kVerifying` to `kRollingBack`) completed activation.]([RS_UCM_00035](#))

[SWS_UCM_01240] Transition from `kActivating` state to `kVehicleChecking` state [If `UCM Master` is in `kActivating` state, `UCM Master` shall enter the `kVehicleChecking` state if all UCM subordinates part of the campaign successfully (successful `Activate` and transition from `kVerifying` to `kActivated`) completed activation.]([RS_UCM_00035](#), [RS_UCM_00037](#))

[SWS_UCM_01241]{DRAFT} Transition from `kVehicleChecking` state to `kCancelling` state [If `UCM Master` is in `kVehicleChecking` state and receives the method `VehicleCheck` call with parameter `VehicleCheckResolution=False`, `UCM Master` shall enter the `kCancelling` state.]([RS_UCM_00035](#))

[SWS_UCM_01242] Transition from `kVehicleChecking` state to `kIdle` state [If `UCM Master` is in `kVehicleChecking` state and all UCM subordinates part of the campaign transitioned from `kCleaningUp` to `kIdle`, `UCM Master` shall enter the `kIdle` state.]([RS_UCM_00035](#))

[SWS_UCM_01243] Transition from `kCancelling` state to `kIdle` state [If `UCM Master` is in `kCancelling` state and all UCM subordinates part of the campaign transitioned from `kCleaningUp` to `kIdle`, `UCM Master` shall enter the `kIdle` state.]([RS_UCM_00035](#))

[SWS_UCM_01246]{DRAFT} Unreachable UCM during update campaign [In case a UCM is not reachable by `UCM Master` during an update campaign (from `kTransferring` or `kUpdating`), `UCM Master` shall cancel and go back to `kIdle`.]([RS_UCM_00035](#), [RS_UCM_00037](#))

7.2.9 Campaign cancelling

`CancelCampaign` method could be used at garage to unlock a blocked update. Details on action by `UCM Master`, like cleaning up the several `UCMs`, changing `AUTOSAR Adaptive Platform` states, etc. are implementation specific.

In case an update campaign was cancelled, a new update campaign could use again the already transferred `Software Packages`. `UCM Master` could list transferred `Software Packages` by calling the `UCM` subordinates with `GetSwPackages`.

[SWS_UCM_01244]{DRAFT} Cancellation of an update campaign shall be possible [`UCM Master` shall provide method `CancelCampaign` to any of its client to cancel from `kTransferring` or `kUpdating` states (from `TransferState` field).] (*RS_UCM_00035*, *RS_UCM_00037*)

[SWS_UCM_01270]{DRAFT} New campaign disabling [`UCM Master` shall remain in `kIdle` when a `CancelCampaign` method has been called with `DisableCampaign` parameter set.] (*RS_UCM_00035*)

[SWS_UCM_01271]{DRAFT} New campaign enabling [`UCM Master` shall provide a method `AllowCampaign` to any of its client to realow new campaign after a `CancelCampaign` method was called with `DisableCampaign` parameter set.] (*RS_UCM_00035*)

[SWS_UCM_01273]{DRAFT} CancelCampaign CancelFailed error [`CancelCampaign` shall raise the error `ApplicationError CancelFailed` in case cancelling of a campaign fails.] (*RS_UCM_00020*)

[SWS_UCM_01274]{DRAFT} CancelCampaign OperationNotPermitted error [`CancelCampaign` shall raise the error `ApplicationError OperationNotPermitted` in case the `UCM Master` states are at `kIdle`, `kSyncing` or `kCancelling`.] (*RS_UCM_00020*)

7.2.10 Campaign Reporting

After campaign is finished (finish method has been sent to all `UCM` subordinates), `UCM Master` should report to `Backend` server status of the vehicle, with for instance updated information of `Software Clusters` present in vehicle.

[SWS_UCM_01247] Method to read History Report [`UCM Master` shall provide a method `GetCampaignHistory` to retrieve all actions that have been performed by `UCM Master` when exiting state `kUpdating` from a specific time window.] (*RS_UCM_00034*)

[SWS_UCM_01248] Content of History Report [`UCM Master` shall save activation time and activation result of processed `Vehicle Packages` in the history.] (*RS_UCM_00034*)

[SWS_UCM_01266]{DRAFT} Subordinate Not Available On The Network [UCM Master shall record persistently the error SubordinateNotAvailableOnTheNetwork in case one of the UCM subordinate involved in the current campaign stops offering its service interface and later report it with `GetCampaignHistory`.] (RS_UCM_00034)

[SWS_UCM_01267]{DRAFT} Vehicle State Manager Communication Error [UCM Master shall record persistently the error VehicleStateManagerCommunicationError in case the communication with Vehicle State Manager is not possible and later report it with `GetCampaignHistory`.] (RS_UCM_00034)

[SWS_UCM_01268]{DRAFT} Vehicle Driver Interface Communication Error [UCM Master shall record persistently the error VehicleDriverInterfaceCommunicationError in case the communication with Vehicle Driver Interface is no longer possible and later report it with `GetCampaignHistory`.] (RS_UCM_00034)

[SWS_UCM_01269]{DRAFT} Campaign cancellation history [If `CancelCampaign` method is called, UCM Master shall record persistently this event to later report it with `GetCampaignHistory`.] (RS_UCM_00034)

7.2.11 Content of Vehicle Package

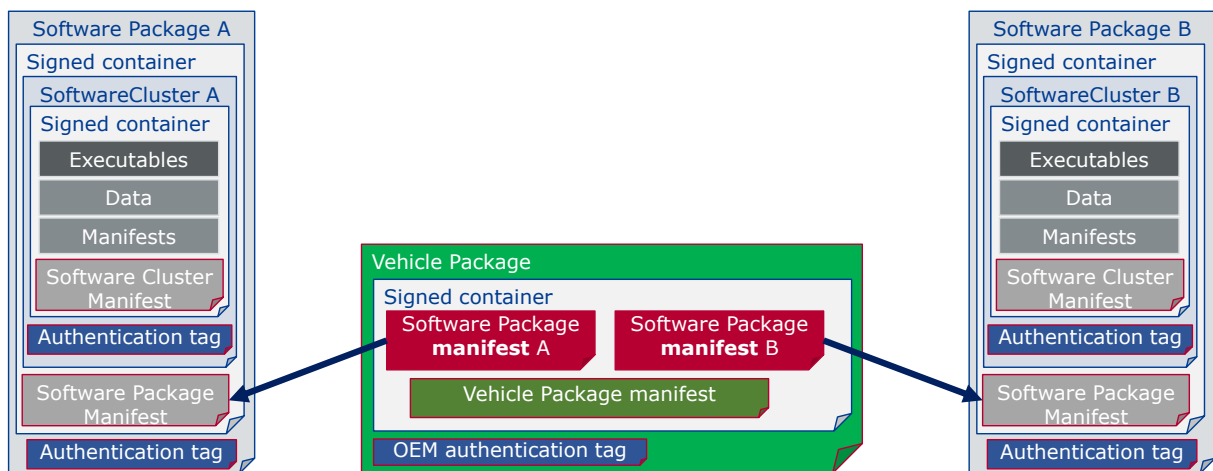


Figure 7.10: Vehicle package overview

A `Vehicle Package` is typically assembled by an `OEM Backend`. A `Vehicle Package` has to be modelled as a so-called `VehiclePackage` which describes the content of the `Vehicle Package`. It contains a collection of `Software Package Manifests` extracted from `Backend` packages stored in the `Backend` database. These `Software Packages` have to be modelled as a so-called `SoftwarePackage` which describes the content of the `Software Package`. A `Vehicle Package` contains only one `Vehicle Package Manifest`.

It is possible that within an update campaign, several `Machine` or `ECUs` need to be updated/installed/removed by groups. Some `Software Clusters` could require re-boot of `Machine` or `ECU`, some just a restart of `Adaptive Application` or nothing

(waiting passively for next reboot) to get activated. To optimize a campaign or fulfil dependencies, it could be required to activate [Software Clusters](#) one after the other or several at once. To support all possible campaigns, the [Vehicle Package](#) includes a model describing this coordination. It also contains a way to identify the several involved [UCMs](#) for packages distribution within the vehicle and potentially overwriting default [UCM Master](#) for this specific campaign.

You can find below for information purpose a description of the information that must be contained in Vehicle Package manifest:

- Repository: uri, repository or diagnostic address, for history, tracking and security purposes
- Vehicle description: vehicle description
- Vehicle Driver notifications: it might be needed to ask vehicle driver if [UCM Master](#) can start transferring [Software Packages](#), processing it and activating it but also inform him of the necessary safety requirements if applicable.
- Safety policy: safety policy index to be used as argument to subscribe a field to vehicle safety manager. With this field, [UCM Master](#) will be informed at any time of campaign if vehicle safety is met or not.
- [UCM Master](#) identifiers list: defines backup [UCM Masters](#)
- Campaign orchestration: You can refer to [9] for more details. This campaign model allows to group activation of several [UCMs](#) and group [Software Packages](#) processing and transferring.

[SWS_UCM_01301]{DRAFT} Vehicle Package authentication [[Vehicle Package](#) shall be authenticated by [UCM Master](#) before any transfer of [Software Packages](#).] ([RS_UCM_00039](#), [RS_UCM_00043](#))

[SWS_UCM_01302]{DRAFT} Vehicle Package authentication failure [In case [Vehicle Package](#) authentication fails at [TransferExit](#) call, [UCM Master](#) shall raise the [ApplicationError AuthenticationFailed](#).] ([RS_UCM_00039](#), [RS_UCM_00043](#))

[SWS_UCM_01303]{DRAFT} Dependencies between Software Packages [[UCM Master](#) shall check dependencies based on [Vehicle Package Manifests](#) and [Software Packages Manifests](#) before an transfer of [Software Packages](#).] ([RS_UCM_00035](#), [RS_UCM_00043](#))

[SWS_UCM_01305]{DRAFT} Vehicle Package format [[Vehicle Package](#) shall contain [Vehicle Package](#) manifest and [Software Packages](#) manifests of ARXML format.] ([RS_UCM_00035](#), [RS_UCM_00043](#))

[SWS_UCM_01306]{DRAFT} TransferExit Invalid package manifest [[TransferExit](#) shall raise the error [ApplicationErrorInvalidPackageManifest](#) upon receive of an invalid manifest.] ([RS_UCM_00012](#))

7.2.12 Vehicle update security and confidentiality

The methods `GetSwClusterInfo`, `SwPackageInventory` and `GetHistory` could use private or confidential information.

[SWS_UCM_CONSTR_00013]{DRAFT} Confidential information protection [The `VehiclePackageManagement` and `VehicleDriverApplication` interfaces shall only be called over secure communication channel providing confidentiality protection.] (*RS_UCM_00033*)

The `GetSwClusterInfo`, `SwPackageInventory`, `GetCampaignHistory`, `GetSwClusterChangeInfo`, `GetHistory`, `GetSwClusterDescription` and `GetSwPackages` methods are using data that could identify vehicle user and therefore should be protected for confidentiality.

8 API specification

There are no APIs defined in this release.

9 Service Interfaces

9.1 Type definitions

This chapter lists all types provided by the [UCM](#).

9.1.1 UCMIIdentifierType

[SWS_UCM_00173]{DRAFT} [

Name	UCMIIdentifierType
Kind	STRING
Derived from	-
Description	UCM Module Instantiation Identifier.

] ([RS_UCM_00036](#))

9.1.2 TransferIdType

[SWS_UCM_00031]{DRAFT} [

Name	TransferIdType
Kind	ARRAY
Array size	16
Subelements	uint8_t
Derived from	-
Description	Represents a handle identifier used to reference a particular transfer request.

] ([RS_UCM_00019](#), [RS_UCM_00025](#))

9.1.3 SwNameType

[SWS_UCM_00071]{DRAFT} [

Name	SwNameType
Kind	STRING
Derived from	-
Description	SoftwareCluster or SoftwarePackage shortName attribute inherited from referable meta Class.

] ([RS_UCM_00002](#))

9.1.4 SwNameVectorType

[SWS_UCM_00174]{DRAFT} [

Name	SwNameVectorType
Kind	VECTOR
Subelements	SwNameType
Derived from	-
Description	Represents a dynamic size array of Software Cluster names.

](RS_UCM_00002)

9.1.5 StrongRevisionLabelString

[SWS_UCM_00175]{DRAFT} [

Name	StrongRevisionLabelString
Kind	STRING
Derived from	-
Description	Primitive type representing SoftwareCluster (SoftwarePackage) version.

](RS_UCM_00002)

9.1.6 SwNameVersionType

[SWS_UCM_00176]{DRAFT} [

Name	SwNameVersionType
Kind	STRUCTURE
Subelements	Name SwNameType Version StrongRevisionLabelString
Derived from	-
Description	Represents the information of a Software Package (Software Cluster) name and version.

](RS_UCM_00002)

9.1.7 SwNameVersionVectorType

[SWS_UCM_00177]{DRAFT} [

Name	SwNameVersionVectorType
Kind	VECTOR
Subelements	SwNameVersionType
Derived from	-
Description	Represents a dynamic size array of Software Name and Version

]([RS_UCM_00002](#))

9.1.8 ByteVectorType

[SWS_UCM_00032]{DRAFT} [

Name	ByteVectorType
Kind	VECTOR
Subelements	uint8_t
Derived from	-
Description	Byte vector representing raw data.

]([RS_UCM_00025](#))

9.1.9 SwPackageStateType

[SWS_UCM_00038]{DRAFT} [

Name	SwPackageStateType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	Represents the state of a Software Package on the Platform.	
Range / Symbol	Limit	Description
kTransferring	0x00	Software package is being transferred, i.e. not completely received.
kTransferred	0x01	Software package is completely transferred and ready to be processed.
kProcessing	0x02	Software package is currently being processed.
kProcessed	0x03	Software package processing finished.
kProcessingStream	0x04	Software package is being processed from a stream.

]([RS_UCM_00002](#), [RS_UCM_00006](#), [RS_UCM_00010](#), [RS_UCM_00011](#), [RS_UCM_00012](#))

9.1.10 SwPackageInfoType

[SWS_UCM_00039]{DRAFT} [

Name	SwPackageInfoType
Kind	STRUCTURE
Subelements	Name SwNameType Version StrongRevisionLabelString TransferID TransferIdType ConsecutiveBytesReceived <code>uint64_t</code> ConsecutiveBlocksReceived <code>uint64_t</code> State SwPackageStateType
Derived from	-
Description	Represents the information of a Software Package.

]([RS_UCM_00002](#), [RS_UCM_00006](#), [RS_UCM_00010](#), [RS_UCM_00011](#), [RS_UCM_00012](#))

9.1.11 SwPackageInfoVectorType

[SWS_UCM_00040]{DRAFT} [

Name	SwPackageInfoVectorType
Kind	VECTOR
Subelements	SwPackageInfoType
Derived from	-
Description	Represents a dynamic size array of Software Packages

]([RS_UCM_00002](#), [RS_UCM_00006](#), [RS_UCM_00010](#), [RS_UCM_00011](#), [RS_UCM_00012](#))

9.1.12 SwDescType

[SWS_UCM_00186]{DRAFT} [

Name	SwDescType
Kind	STRUCTURE
Subelements	Name SwNameType Version StrongRevisionLabelString TypeApproval <code>string</code> License <code>string</code> ReleaseNotes <code>string</code> Size <code>uint64_t</code>
Derived from	-
Description	Contains general information related to SoftwareCluster that can be used by Vehicle Driver Application or Human Interface.

](RS_UCM_00002, RS_UCM_00011)

9.1.13 SwDescVectorType

[SWS_UCM_00187]{DRAFT} [

Name	SwDescVectorType
Kind	VECTOR
Subelements	SwDescType
Derived from	-
Description	Represents a dynamic size array of SoftwareCluster description

](RS_UCM_00002, RS_UCM_00011)

9.1.14 SwPackageDescType

[SWS_UCM_00268]{DRAFT} [

Name	SwPackageDescType
Kind	STRUCTURE
Subelements	SwDesc SwDescType PackageAction ActionType Duration uint32_t
Derived from	-
Description	Contains general information related to SoftwarePackage that can be used by Human Interface.

](RS_UCM_00033)

9.1.15 SwPackageDescVectorType

[SWS_UCM_00269]{DRAFT} [

Name	SwPackageDescVectorType
Kind	VECTOR
Subelements	SwPackageDescType
Derived from	-
Description	Represents a dynamic size array of SwPackageDescType.

](RS_UCM_00033)

9.1.16 SwClusterStateType

[SWS_UCM_00077]{DRAFT} [

Name	SwClusterStateType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	Represents the state of a SoftwareCluster on the adaptive platform.	
Range / Symbol	Limit	Description
kPresent	0x00	State of a SoftwareCluster that is installed on the adaptive platform and installation has finished.
kAdded	0x01	State of a SoftwareCluster that has been newly installed.
kUpdated	0x02	State of a SoftwareCluster that has been updated.
kRemoved	0x03	State of a SoftwareCluster that has been removed.

](RS_UCM_00002, RS_UCM_00006, RS_UCM_00010, RS_UCM_00011, RS_UCM_00012)

9.1.17 SwClusterInfoType

[SWS_UCM_00078]{DRAFT} [

Name	SwClusterInfoType
Kind	STRUCTURE
Subelements	Name SwNameType Version StrongRevisionLabelString State SwClusterStateType
Derived from	-
Description	Represents the information of a SoftwareCluster.

](RS_UCM_00002, RS_UCM_00006, RS_UCM_00010, RS_UCM_00011, RS_UCM_00012)

9.1.18 SwClusterInfoVectorType

[SWS_UCM_00079]{DRAFT} [

Name	SwClusterInfoVectorType
Kind	VECTOR
Subelements	SwClusterInfoType
Derived from	-
Description	Represents a dynamic size array of SoftwareClusters

](RS_UCM_00002, RS_UCM_00006, RS_UCM_00010, RS_UCM_00011, RS_UCM_00012)

9.1.19 PackageManagementStatusType

[SWS_UCM_00044]{DRAFT} [

Name	PackageManagementStatusType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	Represents the state of UCM.	
Range / Symbol	Limit	Description
kIdle	0x00	UCM is ready to start processing if software packages are present.
kReady	0x01	UCM has processed one or several packages and waits for additional packages, activation or reversion of processed packages.
kProcessing	0x02	UCM is currently in the middle of processing a Software Package, i.e. a client has called ProcessSwPackage.
kActivating	0x03	UCM is performing the dependency check and preparing the activation of the processed Software packages.
kActivated	0x04	Software changes introduced with processed Software Packages has been activated and executed.
kRollingBack	0x05	UCM is reverting changes introduced with processed packages.
kRolledBack	0x06	Software changes introduced with processed Software Packages has been deactivated and original software is executed.
kCleaningUp	0x07	Making sure that the system is in a clean state.
kVerifying	0x08	UCM (via State Management) is checking that the processed packages have been properly restarted.

](RS_UCM_00024, RS_UCM_00026)

9.1.20 ActionType

[SWS_UCM_00132]{DRAFT} [

Name	ActionType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	Represents the UCM action.	
Range / Symbol	Limit	Description
kUpdate	0x00	Update of a SoftwareCluster.
kInstall	0x01	Installation of a new SoftwareCluster.
kRemove	0x02	Removal of a SoftwareCluster.

](RS_UCM_00032)

9.1.21 ResultType

[SWS_UCM_00133]{DRAFT} [

Name	ResultType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	Represents the result of UCM action.	
Range / Symbol	Limit	Description
kActivated	0x00	Activation was successful.
kActivatedAndRolledBack	0x01	UCM was activated but rolled back by its Client.
kVerificationFailed	0x02	UCM's action failed.

](RS_UCM_00032)

9.1.22 GetHistoryType

[SWS_UCM_00134]{DRAFT} [

Name	GetHistoryType
Kind	STRUCTURE
Subelements	Time uint64_t Name SwNameType Version StrongRevisionLabelString Action ActionType Resolution ResultType FailureError uint64_t
Derived from	-
Description	Time refers to the activation time of the software cluster. It is represented in milliseconds of UCM's action resolution since 01.01.1970 (UTC).

](RS_UCM_00032)

9.1.23 GetHistoryVectorType

[SWS_UCM_00135]{DRAFT} [

Name	GetHistoryVectorType
Kind	VECTOR
Subelements	GetHistoryType
Derived from	-
Description	Represents a list of UCM actions

](RS_UCM_00032)

9.1.24 CampaignHistoryType

[SWS_UCM_00251]{DRAFT} [

Name	CampaignHistoryType
Kind	STRUCTURE
Subelements	CampaignError CampaignErrorType HistoryVector HistoryVectorType
Derived from	-
Description	Campaign history

]([RS_UCM_00034](#))

9.1.25 CampaignErrorType

[SWS_UCM_00252]{DRAFT} [

Name	CampaignErrorType
Kind	STRUCTURE
Subelements	CampaignFailure CampaignFailureType UCMStepError UCMStepErrorType
Derived from	-
Description	Campaign Error

]([RS_UCM_00034](#))

9.1.26 CampaignFailureType

[SWS_UCM_00256]{DRAFT} [

Name	CampaignFailureType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	Campaign failure	
Range / Symbol	Limit	Description
kUCMError	0x01	UCM error
kInvalidVehiclePackageManifest	0x02	Vehicle Package manifest is invalid
kSubordinateNotAvailableOnTheNetwork	0x03	UCM subordinate not reachable
kVehicleStateManagerCommunicationError	0x04	Communication error with Vehicle State Manager
kVehicleDriverInterfaceCommunicationError	0x05	Communication error with Vehicle Driver Interface





kCampaignCancelled	0x06	Campaign was cancelled
--------------------	------	------------------------

](RS_UCM_00034)

9.1.27 UCMStepErrorType

[SWS_UCM_00253]{DRAFT} [

Name	UCMStepErrorType
Kind	STRUCTURE
Subelements	id UCMIdentifierType SoftwarePackageStep SoftwarePackageStepType ReturnedError uint8_t
Derived from	-
Description	UCM Error

](RS_UCM_00034)

9.1.28 SoftwarePackageStepType

[SWS_UCM_00255]{DRAFT} [

Name	SoftwarePackageStepType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	UCM Software Package step at which error occurred	
Range / Symbol	Limit	Description
kTransfer	0x00	Software Package transfer
kProcess	0x01	Software Package processing
kPreActivate	0x02	Software Cluster pre activation
kVerify	0x03	Software Cluster verification

](RS_UCM_00034)

9.1.29 HistoryVectorType

[SWS_UCM_00254]{DRAFT} [

Name	HistoryVectorType
Kind	STRUCTURE
Subelements	id UCMIdentifierType HistoryVector GetHistoryVectorType
Derived from	-
Description	History of an UCM

]([RS_UCM_00034](#))

9.1.30 CampaignStateType

[SWS_UCM_01177]{DRAFT} [

Name	CampaignStateType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	Represents the status of Campaign.	
Range / Symbol	Limit	Description
kIdle	0x00	UCM Master is ready to start a software update campaign.
kSyncing	0x01	UCM master is providing the list of installed SWCLs (GetSwCluster Info) or computing the list of SWCLs to install (SwPackageInventory).
kVehiclePackageTransferring	0x02	A vehicle package is being transferred to UCM Master.
kSoftwarePackage_ Transferring	0x03	UCM Master is transferring software packages to the UCM subordinates.
kProcessing	0x04	The processing of software packages on UCM subordinates is ongoing. The transferring of software packages may still occur.
kActivating	0x05	The activation of SWCLs on UCM subordinates is ongoing.
kVehicleChecking	0x06	UCM Master is performing post-activation checks (OEM specific).
kCancelling	0x07	UCM Master is rolling-back the activated SWCLs on the UCM subordinates.

]([RS_UCM_00032](#))

9.1.31 TransferStateType

[SWS_UCM_01178]{DRAFT} [

Name	TransferStateType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	Represents the state of an update from OTA Client perspective.	
Range / Symbol	Limit	Description
kIdle	0x00	UCM Master is ready to start a software update campaign.





kTransferring	0x01	Vehicle or Software Packages are being transferred.
kUpdating	0x02	Software Clusters are being updated in the vehicle.
kCancelling	0x03	An error occurred, campaign is being cancelled, reverting changes.

](RS_UCM_00032)

9.1.32 SafetyConditionType

[SWS_UCM_01114]{DRAFT} [

Name	SafetyConditionType
Kind	STRING
Derived from	-
Description	The type of the Safety Conditions.

](RS_UCM_00002)

9.1.33 SafetyConditionsVectorType

[SWS_UCM_01136]{DRAFT} [

Name	SafetyConditionsVectorType
Kind	VECTOR
Subelements	SafetyConditionType
Derived from	-
Description	Represents a dynamic size array of Safety Conditions.

](RS_UCM_00002)

9.1.34 SafetyStatesType

[SWS_UCM_01138]{DRAFT} [

Name	SafetyStatesType	
Kind	TYPE_REFERENCE	
Derived from	uint8_t	
Description	Represents the vehicle safety state.	
Range / Symbol	Limit	Description
Safe	0x00	Safe Safety State.





NotSafe	0x01	Not safe Safety State.
NotSupported	0x02	Unsupported Safety State.

](RS_UCM_00002)

9.1.35 SafetyStatesVectorType

[SWS_UCM_01137]{DRAFT} [

Name	SafetyStatesVectorType
Kind	VECTOR
Subelements	SafetyStatesType
Derived from	-
Description	Represents a dynamic size array of Safety States.

](RS_UCM_00002)

9.2 Provided Service Interfaces

9.2.1 Package Management

This chapter lists all provided service interfaces of the [UCM](#).

Port

[SWS_UCM_00073]{DRAFT} [

Name	PackageManagement		
Kind	ProvidedPort	Interface	PackageManagement
Description			
Variation			

](RS_UCM_00001)

Service Interface

[SWS_UCM_00131]{DRAFT} [

Name	PackageManagement
NameSpace	ara::ucm

Field	CurrentStatus
Description	The current status of UCM.
Type	PackageManagementStatusType
HasGetter	true
HasNotifier	true
HasSetter	false

Method	Activate	
Description	This method activates the processed components.	
FireAndForget	false	
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	MissingDependencies	Activate cannot be performed because of missing dependencies.
Application Errors	UpdateSessionRejected	Start of an update session was rejected by State Management
Application Errors	PreActivationFailed	Error during preActivation step.
Application Errors	VerificationFailed	State Management returned verification failure

Method	Cancel	
Description	This method aborts an ongoing processing of a Software Package.	
FireAndForget	false	
Parameter	id	
	Description	The Transfer ID.
	Type	TransferIdType
	Variation	
	Direction	IN
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	InvalidTransferId	The Transfer ID is invalid.

Method	DeleteTransfer	
Description	Delete a transferred Software Package.	
FireAndForget	false	
Parameter	id	
	Description	Transfer ID of the currently running request.
	Type	TransferIdType
	Variation	
	Direction	IN
Application Errors	InvalidTransferId	The Transfer ID is invalid.
Application Errors	OperationNotPermitted	The operation is not supported in the current context.

Method	Finish	
Description	This method finishes the processing for the current set of processed Software Packages. It does a cleanup of all data of the processing including the sources of the Software Packages.	
FireAndForget	false	
Application Errors	OperationNotPermitted	The operation is not supported in the current context.

Method	GetHistory	
Description	Getter method to retrieve all actions that have been performed by UCM.	
FireAndForget	false	
Parameter	timestampGE	
	Description	Earliest timestamp (inclusive)
	Type	uint64_t
	Variation	
	Direction	IN
Parameter	timestampLT	
	Description	Latest timestamp (exclusive)
	Type	uint64_t
	Variation	
	Direction	IN
Parameter	history	
	Description	The history of all actions that have been performed by UCM.
	Type	GetHistoryVectorType
	Variation	
	Direction	OUT

Method	GetId	
Description	Get the UCM Instance Identifier.	
FireAndForget	false	
Parameter	id	
	Description	UCM Module Instantiation Identifier.
	Type	UCMIdentifierType
	Variation	
	Direction	OUT

Method	GetSwClusterChangeInfo	
Description	This method returns a list pending changes to the set of SoftwareClusters on the adaptive platform. The returned list includes all SoftwareClusters that are to be added, updated or removed. The list of changes is extended in the course of processing Software Packages.	
FireAndForget	false	
Parameter	SwInfo	
	Description	List of SoftwareClusters that are in state kAdded,kUpdated or kRemoved.





	Type	SwClusterInfoVectorType
	Variation	
	Direction	OUT

Method	GetSwClusterDescription	
Description	This method returns the general information of the Software Clusters present in the platform	
FireAndForget	false	
Parameter	SwCluster	
	Description	List of SoftwareClusters present in the platform.
	Type	SwDescVectorType
	Variation	
	Direction	OUT

Method	GetSwClusterInfo	
Description	This method returns a list of SoftwareClusters that are in state kPresent.	
FireAndForget	false	
Parameter	SwInfo	
	Description	List of installed SoftwareClusters that are in state kPresent.
	Type	SwClusterInfoVectorType
	Variation	
	Direction	OUT

Method	GetSwPackages	
Description	This method returns the Software Packages that available in UCM.	
FireAndForget	false	
Parameter	Packages	
	Description	List of Software Packages.
	Type	SwPackageInfoVectorType
	Variation	
	Direction	OUT

Method	GetSwProcessProgress	
Description	Get the progress (0 - 100%) of the currently processed Software Package.	
FireAndForget	false	
Parameter	id	
	Description	The Transfer ID of the Software Package.
	Type	TransferIdType
	Variation	
	Direction	IN
Parameter	progress	





	Description	The progress of the current package processing (0% - 100%). 0x00 ... 0x64, 0xFF for "No information available"
	Type	uint8_t
	Variation	
	Direction	OUT
Application Errors	InvalidTransferId	The Transfer ID is invalid.

Method	ProcessSwPackage	
Description	Process a previously transferred Software Package.	
FireAndForget	false	
Parameter	id	
	Description	The Transfer ID of the Software Package which should be processed.
	Type	TransferIdType
	Variation	
	Direction	IN
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	ServiceBusy	Another processing is already ongoing and therefore the current processing request has to be rejected.
Application Errors	InvalidTransferId	The Transfer ID is invalid.
Application Errors	AuthenticationFailed	Package authentication failed.
Application Errors	IncompatiblePackageVersion	The version of the Software or Vehicle Package to be processed is not compatible with the current version of UCM or UCM Master.
Application Errors	InvalidPackageManifest	Package manifest could not be read.
Application Errors	SoftwareClusterMissing	The Software Cluster is not present in the Machine.
Application Errors	IncompatibleDelta	Delta package dependency check failed.
Application Errors	InsufficientMemory	Insufficient memory to perform operation.
Application Errors	ProcessedSoftwarePackageInconsistent	The processed Software Package integrity check has failed.
Application Errors	OldVersion	Software Package version is too old.
Application Errors	ProcessSwPackageCancelled	The processing operation has been interrupted by a Cancel() call.

Method	RevertProcessedSwPackages	
Description	Revert the changes done by processing (ProcessSwPackage) of one or several software packages.	





FireAndForget	false	
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	NotAbleToRevertPackages	RevertProcessedSwPackages failed.

Method	Rollback	
Description	Rollback the system to the state before the packages were processed.	
FireAndForget	false	
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	NotAbleToRollback	Rollback failed.

Method	TransferData	
Description	Block-wise transfer of a Software Package to UCM.	
FireAndForget	false	
Parameter	id	
	Description	Transfer ID.
	Type	TransferIdType
	Variation	
	Direction	IN
Parameter	data	
	Description	Data block of the Software Package.
	Type	ByteVectorType
	Variation	
	Direction	IN
Parameter	blockCounter	
	Description	Block counter value of the current block.
	Type	uint64_t
	Variation	
	Direction	IN
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	InvalidTransferId	The Transfer ID is invalid.
Application Errors	IncorrectBlock	The same block number is received twice.
Application Errors	IncorrectBlockSize	The size of the block exceeds the provided block size from TransferStart or TransferVehiclePackage.
Application Errors	IncorrectSize	The size of the Software or Vehicle Package exceeds the provided size in TransferStart.
Application Errors	InsufficientMemory	Insufficient memory to perform operation.





Application Errors	TransferFailed	UCM cannot persist transferred block.
Application Errors	BlockInconsistent	Consistency check for transferred block failed.
Application Errors	AuthenticationFailed	Package authentication failed.
Application Errors	InvalidPackageManifest	Package manifest could not be read.
Application Errors	IncompatiblePackageVersion	The version of the Software or Vehicle Package to be processed is not compatible with the current version of UCM or UCM Master.
Application Errors	PackageInconsistent	Package integrity check failed.
Application Errors	OldVersion	Software Package version is too old.

Method	TransferExit	
Description	Finish the transfer of a Software Package to UCM.	
FireAndForget	false	
Parameter	id	
	Description	Transfer ID of the currently running request.
	Type	TransferIdType
	Variation	
Direction	IN	
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	InvalidTransferId	The Transfer ID is invalid.
Application Errors	InsufficientData	TransferExit has been called but total transferred data size does not match expected data size provided with TransferStart call.
Application Errors	AuthenticationFailed	Package authentication failed.
Application Errors	PackageInconsistent	Package integrity check failed.
Application Errors	IncompatiblePackageVersion	The version of the Software or Vehicle Package to be processed is not compatible with the current version of UCM or UCM Master.
Application Errors	InvalidPackageManifest	Package manifest could not be read.
Application Errors	MissingDependencies	Activate cannot be performed because of missing dependencies.
Application Errors	OldVersion	Software Package version is too old.

Method	TransferStart	
Description	Start the transfer of a Software Package after having received a Vehicle Package. The size of the Software Package to be transferred to UCM must be provided. UCM will generate a Transfer ID for subsequent calls to TransferData, TransferExit, ProcessSwPackage, DeleteTransfer.	
FireAndForget	false	
Parameter	size	
	Description	Size (in bytes) of the Software Package to be transferred.



△

	Type	uint64_t
	Variation	
	Direction	IN
Parameter	id	
	Description	Return TransferId.
	Type	TransferIdType
	Variation	
	Direction	OUT
Parameter	BlockSize	
	Description	Size of the blocks to be received with TransferData method.
	Type	uint32_t
	Variation	
	Direction	OUT
Application Errors	InsufficientMemory	Insufficient memory to perform operation.

]([RS_UCM_00001](#), [RS_UCM_00002](#), [RS_UCM_00008](#), [RS_UCM_00010](#), [RS_UCM_00011](#), [RS_UCM_00015](#), [RS_UCM_00018](#), [RS_UCM_00021](#), [RS_UCM_00023](#), [RS_UCM_00024](#), [RS_UCM_00025](#), [RS_UCM_00032](#))

9.2.2 Vehicle Package Management

This chapter lists all provided service interfaces of the [UCM Master](#) to OTA Client Adaptive Application.

Port

[[SWS_UCM_00178](#)]{DRAFT} [

Name	VehiclePackageManagement		
Kind	ProvidedPort	Interface	VehiclePackageManagement
Description			
Variation			

]([RS_UCM_00035](#))

Service Interface

[[SWS_UCM_00181](#)]{DRAFT} [

Name	VehiclePackageManagement
NameSpace	ara::ucm

Field	TransferState
Description	The current status of Campaign from an OTA Client perspective.
Type	TransferStateType
HasGetter	true
HasNotifier	true
HasSetter	false

Field	RequestedPackage
Description	Software Package to be transferred to UCM Master.
Type	SwNameVersionType
HasGetter	true
HasNotifier	true
HasSetter	false

Field	SafetyConditions
Description	Safety conditions from the Vehicle Package computed by the Vehicle State Manager Adaptive Application.
Type	SafetyConditionsVectorType
HasGetter	true
HasNotifier	true
HasSetter	false

Field	SafetyState
Description	Vehicle state computed by the Vehicle State Manager Adaptive Application.
Type	SafetyStatesVectorType
HasGetter	true
HasNotifier	true
HasSetter	false

Method	CancelCampaign
Description	This method aborts an ongoing campaign processing of a Vehicle Package.
FireAndForget	false
Parameter	DisableCampaign
	Description To forbid new campaign
	Type bool
	Variation
	Direction IN
Application Errors	OperationNotPermitted The operation is not supported in the current context.
Application Errors	CancelFailed Cancel failed.

Method	AllowCampaign
Description	To allow a new campaign to start





FireAndForget	false
----------------------	-------

Method	DeleteTransfer	
Description	Delete a transferred Software or Vehicle Package.	
FireAndForget	false	
Parameter	id	
	Description	Transfer ID of the currently running request.
	Type	TransferIdType
	Variation	
	Direction	IN
Application Errors	InvalidTransferId	The Transfer ID is invalid.
Application Errors	OperationNotPermitted	The operation is not supported in the current context.

Method	GetCampaignHistory	
Description	Getter method to retrieve all actions that have been performed by UCM Master.	
FireAndForget	false	
Parameter	timestampGE	
	Description	Earliest timestamp (inclusive)
	Type	uint64_t
	Variation	
	Direction	IN
Parameter	timestampLT	
	Description	Latest timestamp (exclusive)
	Type	uint64_t
	Variation	
	Direction	IN
Parameter	CampaignHistory	
	Description	The history of all actions that have been performed by UCM Master.
	Type	CampaignHistoryType
	Variation	
	Direction	OUT

Method	GetSwClusterInfo	
Description	This method returns a list of SoftwareClusters that are in state kPresent.	
FireAndForget	false	
Parameter	SwInfo	
	Description	List of installed SoftwareClusters that are in state kPresent.
	Type	SwClusterInfoVectorType





	Variation	
	Direction	OUT

Method	GetSwPackages	
Description	This method returns the Software Packages that are part of current campaign handled by UCM Master.	
FireAndForget	false	
Parameter	Packages	
	Description	List of Software Packages.
	Type	SwPackageInfoVectorType
	Variation	
	Direction	OUT

Method	SwPackageInventory	
Description		
FireAndForget	false	
Parameter	AvailableSoftwarePackages	
	Description	List of available Software Packages in Backend corresponding to VIN.
	Type	SwNameVersionVectorType
	Variation	
	Direction	IN
Parameter	RequiredSoftwarePackages	
	Description	List of Software Packages to be sent to UCM Master.
	Type	SwNameVersionVectorType
	Variation	
	Direction	OUT

Method	TransferData	
Description	Block-wise transfer of a Software or Vehicle Package to UCM Master.	
FireAndForget	false	
Parameter	id	
	Description	Transfer ID.
	Type	TransferIdType
	Variation	
	Direction	IN
Parameter	data	
	Description	Data block of the Software or Vehicle Package.
	Type	ByteVectorType
	Variation	
	Direction	IN





Parameter	blockCounter	
	Description	Block counter value of the current block.
	Type	uint64_t
	Variation	
	Direction	IN
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	InvalidTransferId	The Transfer ID is invalid.
Application Errors	IncorrectBlock	The same block number is received twice.
Application Errors	IncorrectBlockSize	The size of the block exceeds the provided block size from TransferStart or TransferVehiclePackage.
Application Errors	IncorrectSize	The size of the Software or Vehicle Package exceeds the provided size in TransferStart.
Application Errors	InsufficientMemory	Insufficient memory to perform operation.
Application Errors	TransferFailed	UCM cannot persist transferred block.
Application Errors	BlockInconsistent	Consistency check for transferred block failed.
Application Errors	AuthenticationFailed	Package authentication failed.
Application Errors	InvalidPackageManifest	Package manifest could not be read.
Application Errors	IncompatiblePackageVersion	The version of the Software or Vehicle Package to be processed is not compatible with the current version of UCM or UCM Master.
Application Errors	PackageInconsistent	Package integrity check failed.
Application Errors	OldVersion	Software Package version is too old.

Method	TransferExit	
Description	Finish the transfer of a Software or Vehicle Package to UCM Master.	
FireAndForget	false	
Parameter	id	
	Description	Transfer ID of the currently running request.
	Type	TransferIdType
	Variation	
	Direction	IN
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	InvalidTransferId	The Transfer ID is invalid.
Application Errors	InsufficientData	TransferExit has been called but total transferred data size does not match expected data size provided with TransferStart call.
Application Errors	AuthenticationFailed	Package authentication failed.





Application Errors	PackageInconsistent	Package integrity check failed.
Application Errors	IncompatiblePackageVersion	The version of the Software or Vehicle Package to be processed is not compatible with the current version of UCM or UCM Master.
Application Errors	InvalidPackageManifest	Package manifest could not be read.
Application Errors	MissingDependencies	Activate cannot be performed because of missing dependencies.
Application Errors	OldVersion	Software Package version is too old.

Method	TransferStart	
Description	Start the transfer of a Software Package. The name of the Software Package to be transferred to UCM Master must be provided. UCM Master will generate a Transfer ID for subsequent calls to TransferData, TransferExit, DeleteTransfer. Size of Software Package to be used to transfer to UCM subordinate is available in the Vehicle Package and its contained Software Package Manifests.	
FireAndForget	false	
Parameter	SoftwarePackageName	
	Description	Software Package Short Name of the Software Package to be transferred.
	Type	SwNameType
	Variation	
	Direction	IN
Parameter	id	
	Description	Return TransferId.
	Type	TransferIdType
	Variation	
	Direction	OUT
Parameter	BlockSize	
	Description	Size of the blocks to be received with TransferData method.
	Type	uint32_t
	Variation	
	Direction	OUT
Application Errors	UnexpectedPackage	The Software Package name does not correspond to the RequestedPackage field value.
Application Errors	InsufficientMemory	Insufficient memory to perform operation.

Method	TransferVehiclePackage	
Description	Start the transfer of a Vehicle Package. The size of the Vehicle Package to be transferred to UCM Master must be provided. UCM Master will generate a Transfer ID for subsequent calls to TransferData, TransferExit, ProcessSwPackage, DeleteTransfer. This call starts a new campaign.	
FireAndForget	false	
Parameter	size	
	Description	Size (in bytes) of the Vehicle Package to be transferred.
	Type	uint64_t





	Variation	
	Direction	IN
Parameter	id	
	Description	Return TransferId.
	Type	TransferIdType
	Variation	
	Direction	OUT
Parameter	BlockSize	
	Description	Size of the blocks to be received with TransferData method.
	Type	uint32_t
	Variation	
	Direction	OUT
Application Errors	NewCampaignDisabled	New campaigns are disabled, calling AllowCampaign will enable new campaigns.
Application Errors	InsufficientMemory	Insufficient memory to perform operation.

|(RS_UCM_00001, RS_UCM_00002, RS_UCM_00008, RS_UCM_00010, RS_UCM_00011, RS_UCM_00015, RS_UCM_00018, RS_UCM_00021, RS_UCM_00023, RS_UCM_00024, RS_UCM_00025, RS_UCM_00032)

9.2.3 Vehicle Driver Application Interface

This chapter lists all provided service interfaces of the [UCM Master](#) to the Vehicle Driver Adaptive Application.

Port

[SWS_UCM_00180]{DRAFT} [

Name	VehicleDriverApplication		
Kind	ProvidedPort	Interface	VehicleDriverApplication
Description			
Variation			

|(RS_UCM_00038, RS_UCM_00043)

Service Interface

[SWS_UCM_00182]{DRAFT} [

Name	VehicleDriverApplication
NameSpace	ara::ucm

Field	ApprovalRequired
Description	Flag to inform Adaptive Application if approval from Vehicle Driver is required at current state based on Vehicle Package Manifest.
Type	bool
HasGetter	true
HasNotifier	true
HasSetter	false

Field	CampaignState
Description	The current status of Campaign.
Type	CampaignStateType
HasGetter	true
HasNotifier	true
HasSetter	false

Field	SafetyConditions
Description	Safety conditions from the Vehicle Package computed by the Vehicle State Manager Adaptive Application.
Type	SafetyConditionsVectorType
HasGetter	true
HasNotifier	true
HasSetter	false

Field	SafetyState
Description	Vehicle state computed by the Vehicle State Manager Adaptive Application.
Type	SafetyStatesVectorType
HasGetter	true
HasNotifier	true
HasSetter	false

Method	CancelCampaign	
Description	This method aborts an ongoing campaign processing of a Vehicle Package.	
FireAndForget	false	
Parameter	DisableCampaign	
	Description	To forbid new campaign
	Type	bool
	Variation	
	Direction	IN
Application Errors	OperationNotPermitted	The operation is not supported in the current context.
Application Errors	CancelFailed	Cancel failed.

Method	AllowCampaign
Description	To allow a new campaign to start
FireAndForget	false

Method	DriverApproval	
Description	Called by Adaptive Application to inform UCM Master of the driver's notification resolution (approve or reject)	
FireAndForget	false	
Parameter	Approval	
	Description	Driver's notification resolution
	Type	bool
	Variation	
Parameter	SafetyStates	
	Description	Safety states acknowledged by the Vehicle Driver Application
	Type	SafetyStatesVectorType
	Variation	
Direction	IN	

Method	GetCampaignHistory	
Description	Getter method to retrieve all actions that have been performed by UCM Master.	
FireAndForget	false	
Parameter	timestampGE	
	Description	Earliest timestamp (inclusive)
	Type	uint64_t
	Variation	
Parameter	timestampLT	
	Description	Latest timestamp (exclusive)
	Type	uint64_t
	Variation	
Direction	IN	
Parameter	history	
	Description	The history of all actions that have been performed by UCM Master.
	Type	CampaignHistoryType
	Variation	
Direction	OUT	

Method	GetSwClusterDescription
Description	This method returns the general information of the Software Clusters present in the Adaptive Platform





FireAndForget	false	
Parameter	SoftwareClusterDescriptions	
	Description	List of SoftwareClusters general information
	Type	SwDescVectorType
	Variation	
	Direction	OUT

Method	GetSwPackageDescription	
Description	This method returns the general information of the Software Packages that are part of current campaign handled by UCM Master.	
FireAndForget	false	
Parameter	Packages	
	Description	List of Software Packages.
	Type	SwPackageDescVectorType
	Variation	
	Direction	OUT

Method	GetSwProcessProgress	
Description	Get the progress (0 - 100%) of the currently package processing.	
FireAndForget	false	
Parameter	progress	
	Description	The progress of the current package processing (0% - 100%). 0x00 ... 0x64, 0xFF for "No information available"
	Type	uint8_t
	Variation	
	Direction	OUT

Method	GetSwTransferProgress	
Description	Get the progress (0 - 100%) of the currently transferred package.	
FireAndForget	false	
Parameter	progress	
	Description	The progress of the current package transferring (0% - 100%). 0x00 ... 0x64, 0xFF for "No information available"
	Type	uint8_t
	Variation	
	Direction	OUT

|(RS_UCM_00001, RS_UCM_00002, RS_UCM_00008, RS_UCM_00010, RS_UCM_00011, RS_UCM_00015, RS_UCM_00018, RS_UCM_00021, RS_UCM_00023, RS_UCM_00024, RS_UCM_00025, RS_UCM_00032)

9.2.4 Vehicle State Manager

This chapter lists all provided service interfaces of the [UCM Master](#) to the Vehicle State Manager Adaptive Application.

Port

[SWS_UCM_00179]{DRAFT} [

Name	VehicleStateManager		
Kind	ProvidedPort	Interface	VehicleStateManager
Description			
Variation			

] ([RS_UCM_00037](#), [RS_UCM_00043](#))

Service Interface

[SWS_UCM_00183]{DRAFT} [

Name	VehicleStateManager
NameSpace	ara::ucm

Field	SafetyConditions
Description	Safety conditions from the Vehicle Package to be computed by the Vehicle State Manager Adaptive Application.
Type	SafetyConditionsVectorType
HasGetter	true
HasNotifier	true
HasSetter	false

Method	SafetyState
Description	Method called by Vehicle State Manager Adaptive Application when safety state is changed
FireAndForget	false
Parameter	SafetyStates
	Description Safety conditions computed by the Vehicle State Manager Adaptive Application.
	Type SafetyStatesVectorType
	Variation
	Direction IN

Method	VehicleCheck
Description	Method for Vehicle State Manager to inform UCM Master of vehicle check resolution
FireAndForget	false
Parameter	VehicleCheckResolution
	Description Vehicle check resolution. True if check succeeded.
	Type bool





	Variation	
	Direction	IN

|(RS_UCM_00001, RS_UCM_00002, RS_UCM_00008, RS_UCM_00010, RS_UCM_00011, RS_UCM_00015, RS_UCM_00018, RS_UCM_00021, RS_UCM_00023, RS_UCM_00024, RS_UCM_00025, RS_UCM_00032)

9.3 Required Interface

9.3.1 State Management Update Request

UCM requires the `UpdateRequest` Service Interface [SWS_SM_91017] provided by [State Management](#)

Port

[SWS_UCM_00288]{DRAFT} [

Name	UpdateRequest		
Kind	RequiredPort	Interface	UpdateRequest
Description	The UpdateRequest interface is intended to be used by UCM to interact with StateManagement to perform updates, installation and removal of SoftwareClusters.		
Variation			

]()

9.4 Application Errors

9.4.1 Application Error Domain

9.4.1.1 UCMErrrorDomain

This section lists all application errors of the [UCM](#).

[SWS_UCM_00136]{DRAFT} [

Name	Code	Description
AuthenticationFailed	8	Package authentication failed.
BlockInconsistent	25	Consistency check for transferred block failed.





BusyWithCampaign	34	Campaign has already started.
CancelFailed	16	Cancel failed.
IncompatibleDelta	29	Delta package dependency check failed.
IncompatiblePackageVersion	24	The version of the Software or Vehicle Package to be processed is not compatible with the current version of UCM or UCM Master.
IncorrectBlock	2	The same block number is received twice.
IncorrectBlockSize	30	The size of the block exceeds the provided block size from TransferStart or TransferVehiclePackage.
IncorrectSize	3	The size of the Software or Vehicle Package exceeds the provided size in TransferStart.
InsufficientData	6	TransferExit has been called but total transferred data size does not match expected data size provided with TransferStart call.
InsufficientMemory	1	Insufficient memory to perform operation.
InvalidChecksumDescription	35	Checksum attribute not recognised.
InvalidPackageManifest	13	Package manifest could not be read.
InvalidTransferId	4	The Transfer ID is invalid.
MissingDependencies	21	Activate cannot be performed because of missing dependencies.
NewCampaignDisabled	31	New campaigns are disabled, calling AllowCampaign will enable new campaigns.
NotAbleToRevertPackages	15	RevertProcessedSwPackages failed.
NotAbleToRollback	18	Rollback failed.
OldVersion	9	Software Package version is too old.
OperationNotPermitted	5	The operation is not supported in the current context.
PackageInconsistent	7	Package integrity check failed.
PreActivationFailed	19	Error during preActivation step.
ProcessSwPackageCancelled	22	The processing operation has been interrupted by a Cancel() call.
ProcessedSoftwarePackageInconsistent	23	The processed Software Package integrity check has failed.
ServiceBusy	12	Another processing is already ongoing and therefore the current processing request has to be rejected.
SoftwareClusterMissing	37	The Software Cluster is not present in the Machine.
TransferFailed	38	UCM cannot persist transferred block.
UnexpectedPackage	32	The Software Package name does not correspond to the RequestedPackage field value.
UpdateSessionRejected	33	Start of an update session was rejected by State Management
VerificationFailed	36	State Management returned verification failure

|(RS_UCM_00006, RS_UCM_00007, RS_UCM_00012, RS_UCM_00013, RS_UCM_00014)

10 Sequence diagrams

The following sequence charts are simplified examples and have no normative meaning. The relevant definitions are in chapter 7 only.

10.1 Update process

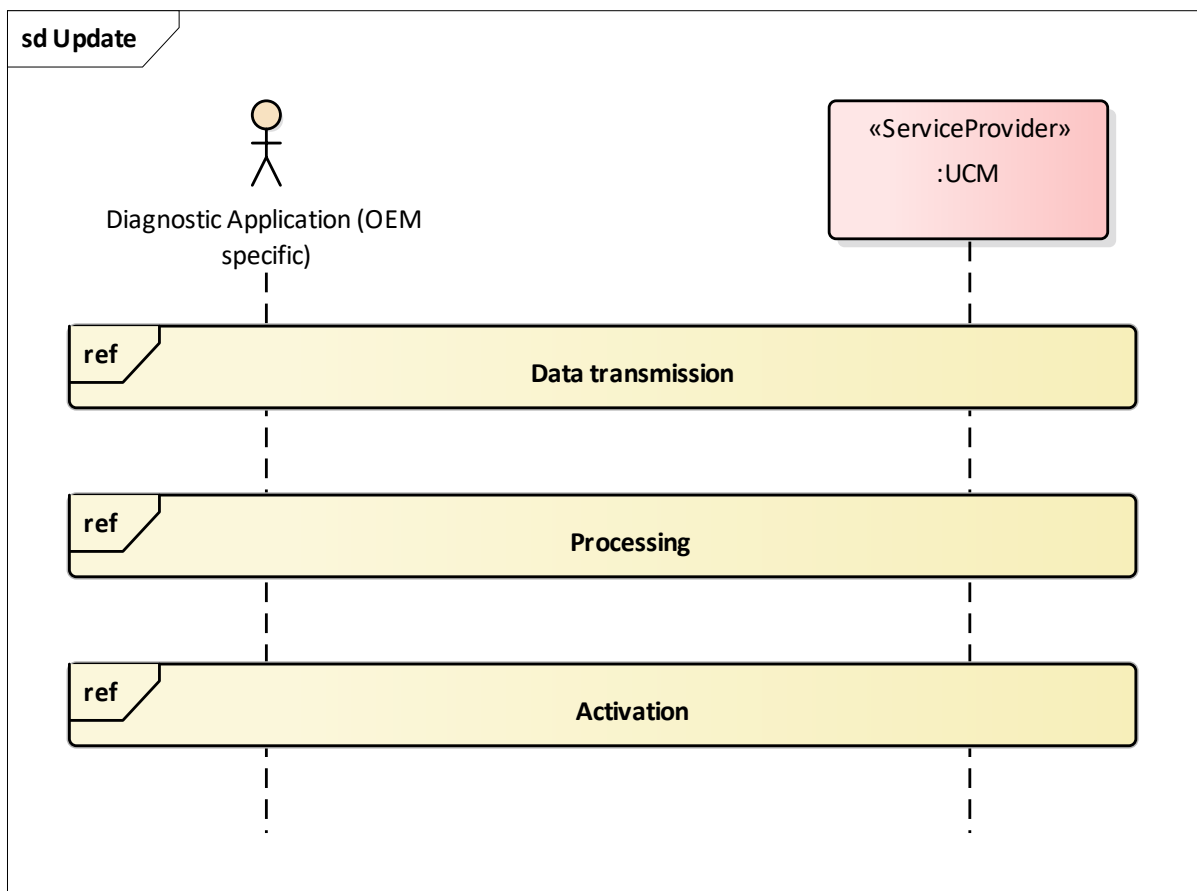


Figure 10.1: Sequence diagram showing the update process

10.2 Data transmission

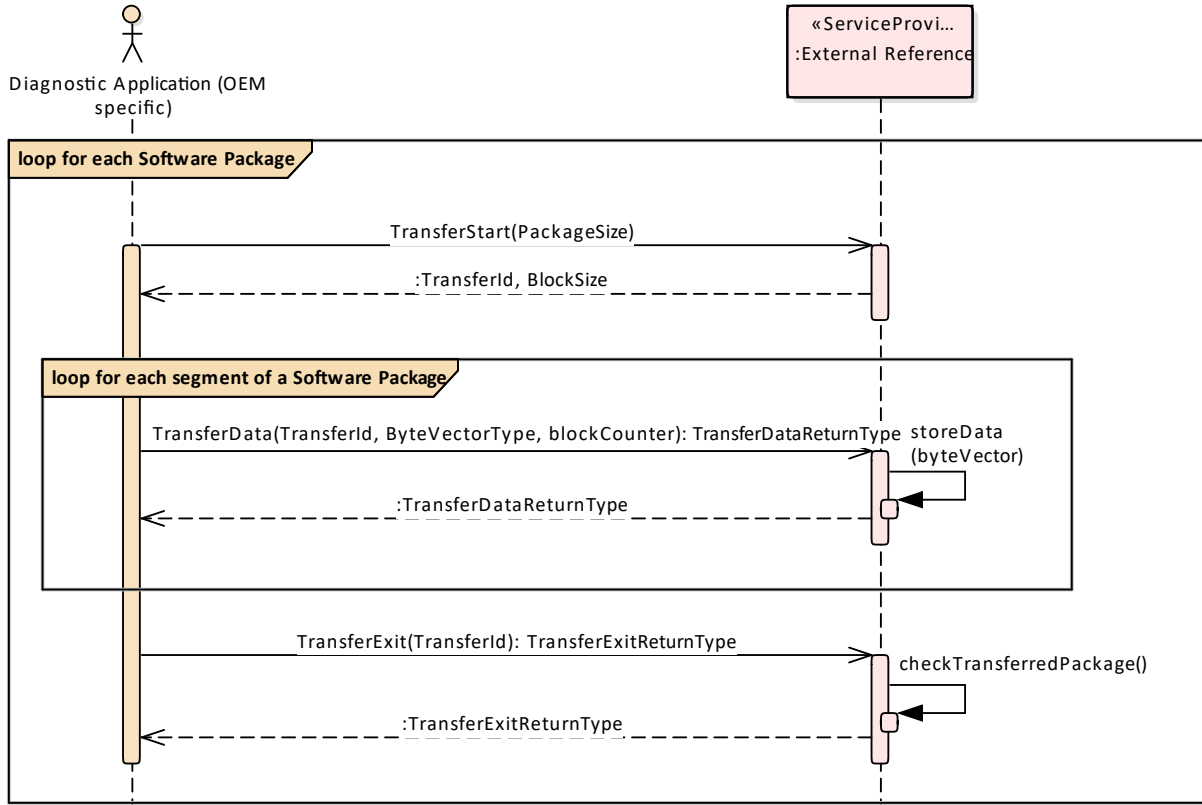


Figure 10.2: Sequence diagram showing the data transmission

10.3 Package processing

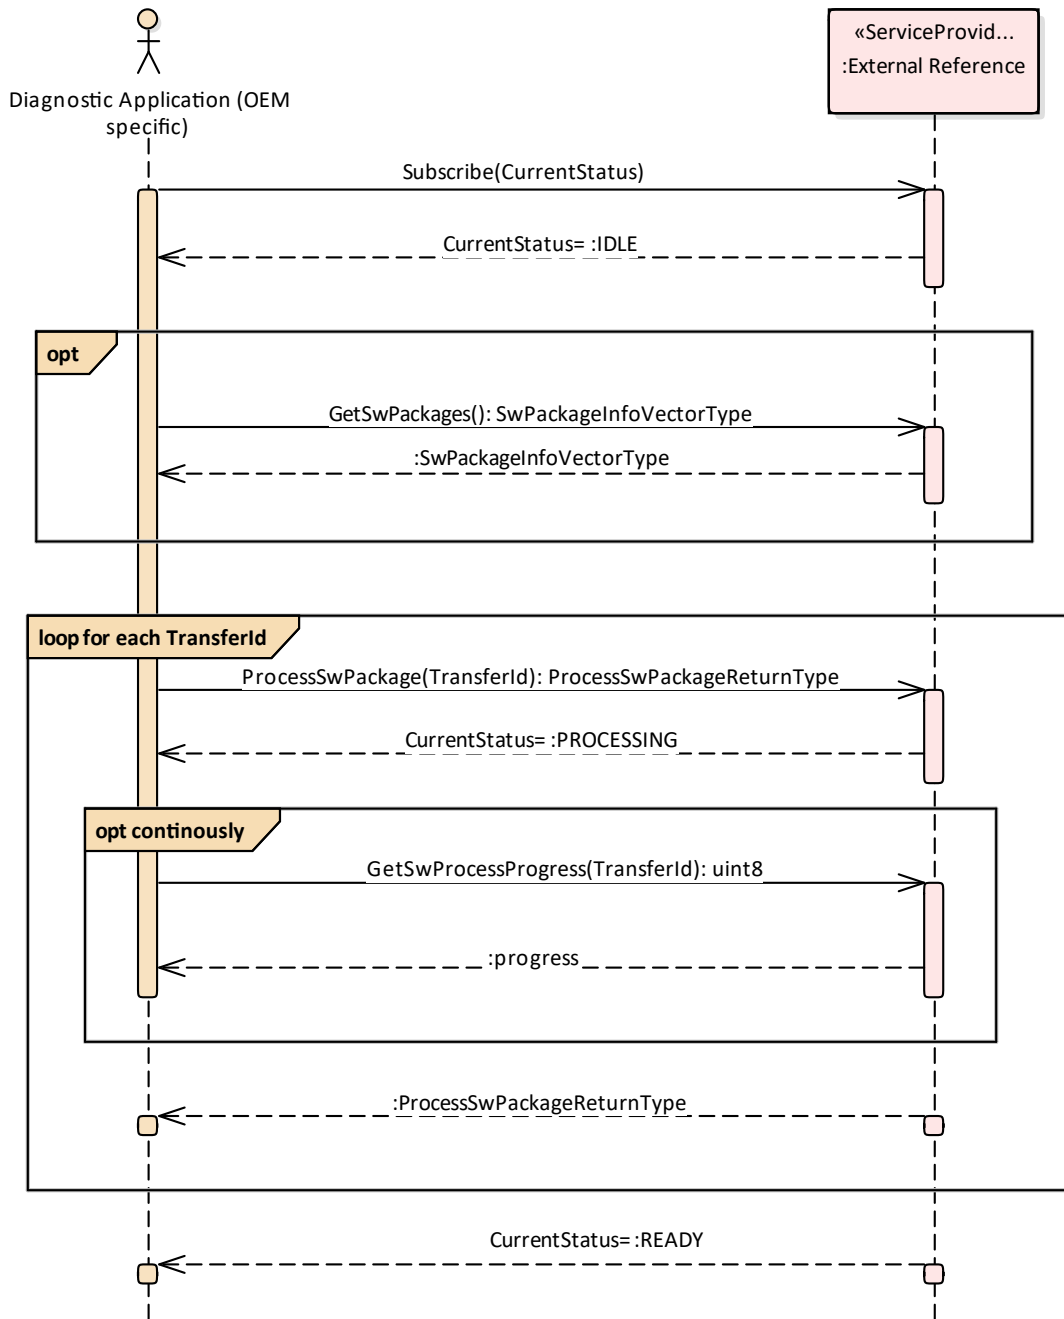


Figure 10.3: Sequence diagram showing the package processing

10.4 Activation

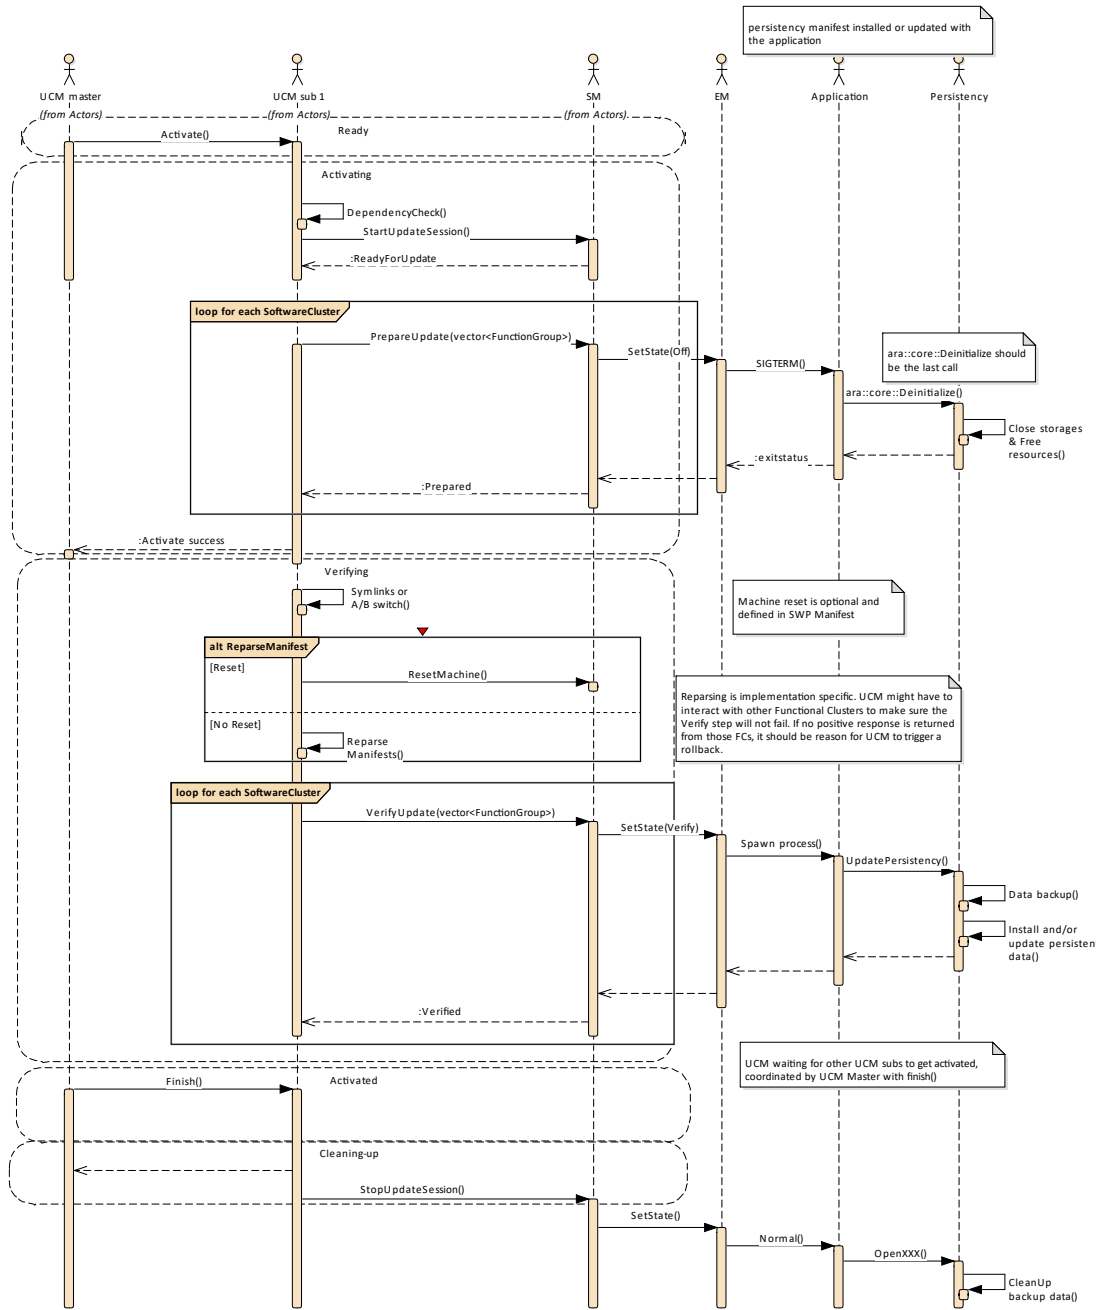


Figure 10.4: Sequence diagram showing the activation process

10.5 Failing activation

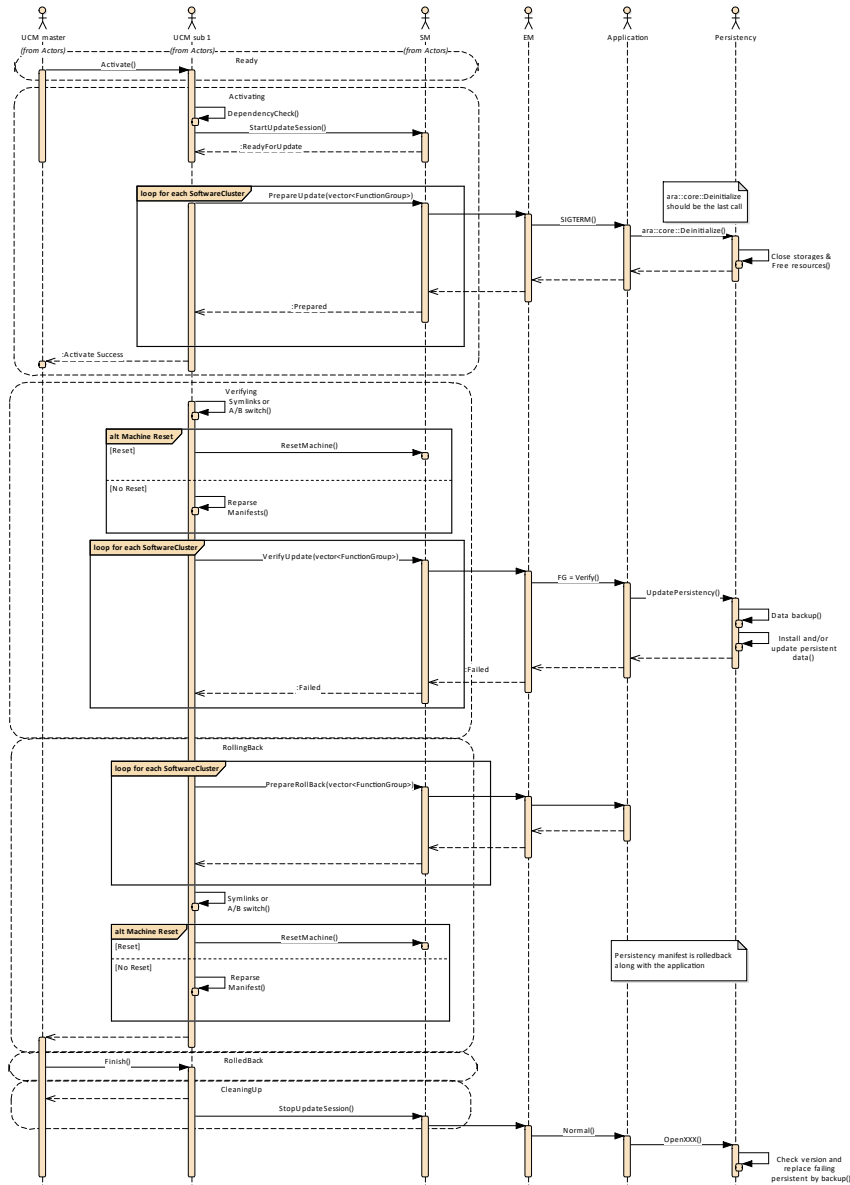


Figure 10.5: Sequence diagram showing an activation failing

10.6 UCM Master simplified vehicle update

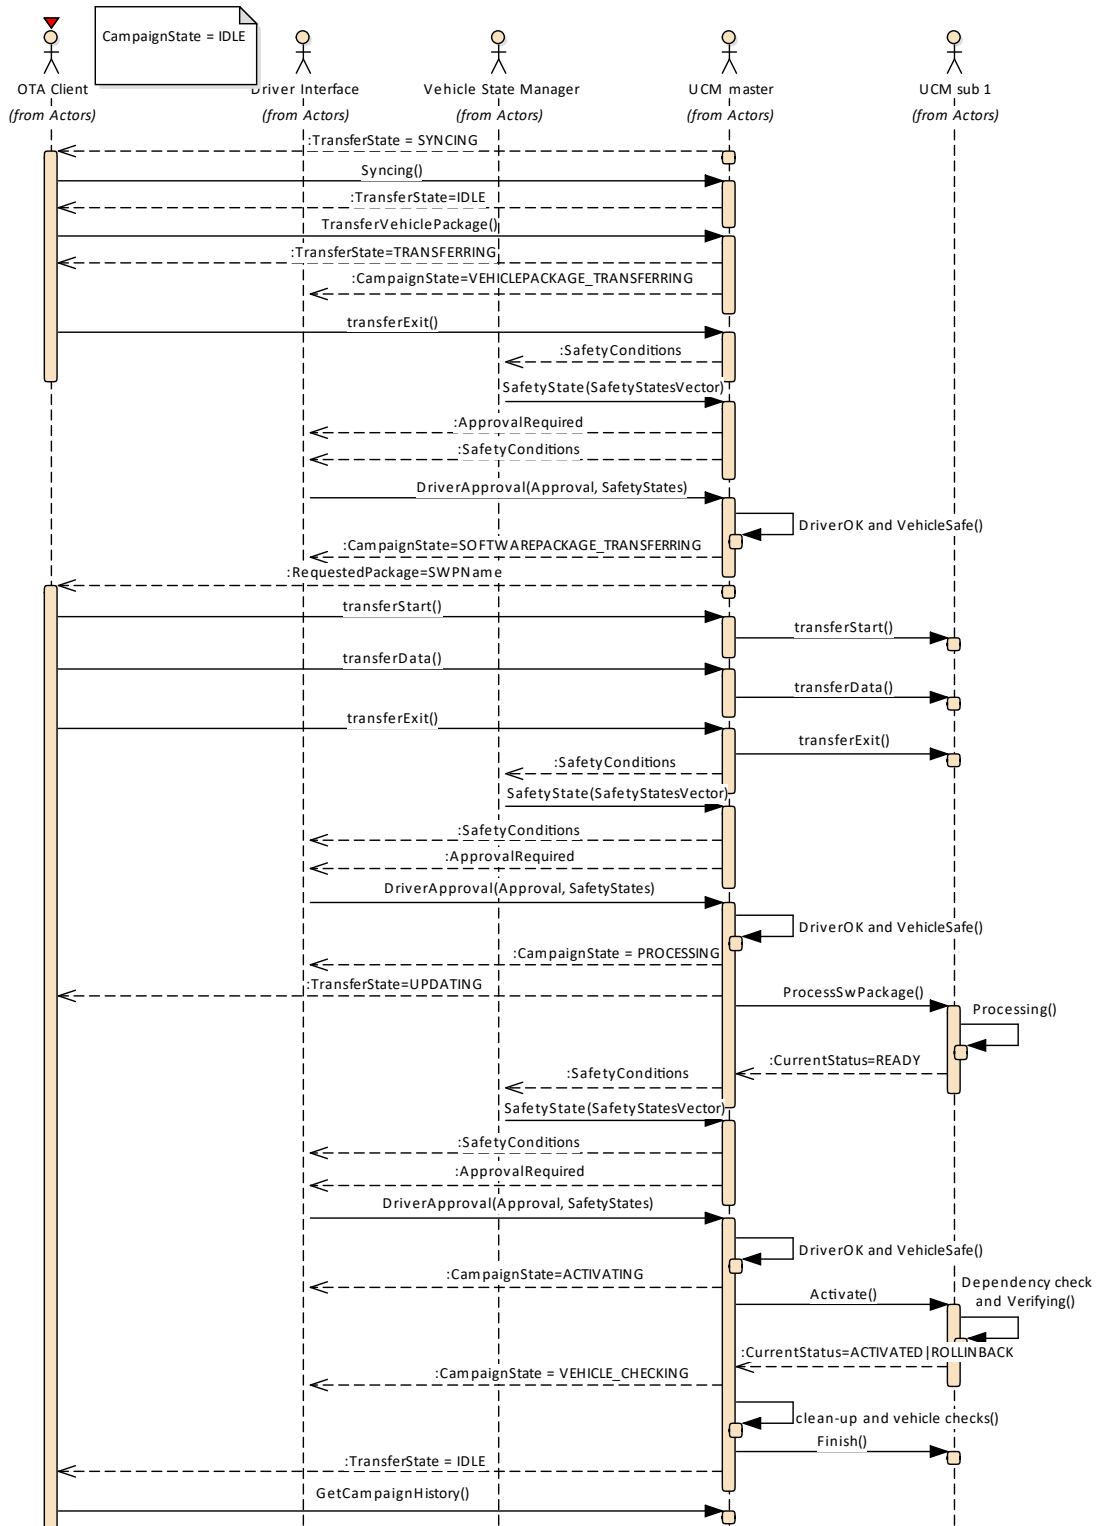


Figure 10.6: Sequence diagram showing vehicle update

A Mentioned Manifest Elements

For the sake of completeness, this chapter contains a set of class tables representing meta-classes mentioned in the context of this document but which are not contained directly in the scope of describing specific meta-model semantics.

Chapter is generated.

Class	ArtifactChecksum			
Package	M2::AUTOSARTemplates::AdaptivePlatform::SoftwareDistribution			
Note	This meta-class provides the ability to associate a checksum with a given artifact identified by its URI. Tags: atp.Status=draft			
Base	ARObject, Identifiable , MultilanguageReferrable , Referrable			
Attribute	Type	Mult.	Kind	Note
checksumValue	String	0..1	attr	This attributes carries the serialized checksum of the corresponding artifact. Tags: atp.Status=draft
uri	UriString	0..1	attr	This attribute represents the URI of the artifact on which the checksum shall be computed. Stereotypes: atpIdentityContributor Tags: atp.Status=draft

Table A.1: ArtifactChecksum

Class	Identifiable (abstract)
Package	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::Identifiable
Note	Instances of this class can be referred to by their identifier (within the namespace borders). In addition to this, Identifiables are objects which contribute significantly to the overall structure of an AUTOSAR description. In particular, Identifiables might contain Identifiables.
Base	ARObject, MultilanguageReferrable , Referrable
Subclasses	ARPackage, AbstractDolpLogicAddressProps , AbstractEvent , AbstractImplementationDataTypeElement , AbstractSecurityEventFilter , AbstractSecurityIdsmInstanceFilter , AbstractServiceInstance , AbstractSignalBasedToSignalTriggeringMapping , AdaptiveModuleInstantiation , AdaptiveSwcInternalBehavior , ApApplicationEndpoint , ApplicationEndpoint , ApplicationError , ArtifactChecksum , AtpBlueprint , AtpBlueprintable , AtpClassifier , AtpFeature , AutosarOperationArgumentInstance , AutosarVariableInstance , BuildActionEntity , BuildActionEnvironment , Chapter , CheckpointTransition , ClassContentConditional , ClientIdDefinition , ClientServerOperation , Code , CollectableElement , ComManagementMapping , CommConnectorPort , CommunicationConnector , CommunicationController , Compiler , ConsistencyNeeds , ConsumedEventGroup , CouplingPort , CouplingPortStructuralElement , CryptoCertificate , CryptoKeySlot , CryptoProvider , CryptoServiceMapping , DataPrototypeGroup , DataTransformation , DdsDomainRange , DependencyOnArtifact , DeterministicClientResourceNeeds , DiagEventDebounceAlgorithm , DiagnosticConnectedIndicator , DiagnosticDataElement , DiagnosticDebounceAlgorithmProps , DiagnosticFunctionInhibitSource , DiagnosticRoutineSubfunction , DltApplication , DltArgument , DltMessage , DolpInterface , DolpLogicAddress , DolpRoutingActivation , E2EProfileConfiguration , End2EndEventProtectionProps , End2EndMethodProtectionProps , EndToEndProtection , EthernetWakeupSleepOnDatalineConfig , EventHandler , EventMapping , ExclusiveArea , ExecutableEntity , ExecutionTime , FMAttributeDef , FMFeatureMapAssertion , FMFeatureMapCondition , FMFeatureMapElement , FMFeatureRelation , FMFeatureRestriction , FMFeatureSelection , FieldMapping , FireAndForgetMapping , FlexrayArTpNode , FlexrayTpPduPool , FrameTriggering , GeneralParameter , GlobalSupervision , GlobalTimeGateway , GlobalTimeMaster , GlobalTimeSlave , HealthChannel , HeapUsage , HwAttributeDef , HwAttributeLiteralDef , HwPin , HwPinGroup , IPSecRule , IPv6ExtHeaderFilterList , ISignalToIPduMapping , ISignalTriggering , IdentCaption , InternalTriggeringPoint , Keyword , LifeCycleState , Linker , MacMulticastGroup , McDataInstance , MemorySection , MethodMapping , ModeDeclaration , ModeDeclarationMapping , ModeSwitchPoint , NetworkEndpoint , NmCluster , NmNode , PackageableElement , ParameterAccess , PduActivationRoutingGroup , PduToFrameMapping , PduTriggering , PerInstanceMemory , PersistencyDeploymentElement ,





Class	Identifiable (abstract)			
	<p style="text-align: center;">△</p> <p><i>PersistencyInterfaceElement, PhmSupervision, PhysicalChannel, PortGroup, PortInterfaceMapping, PossibleErrorReaction, ProcessToMachineMapping, Processor, ProcessorCore, PskIdentityToKeySlot Mapping, RecoveryNotification, ResourceConsumption, ResourceGroup, RootSwClusterDesign ComponentPrototype, RootSwComponentPrototype, RootSwCompositionPrototype, RptComponent, Rpt Container, RptExecutableEntity, RptExecutableEntityEvent, RptExecutionContext, RptProfile, RptService Point, RunnableEntityGroup, SdgAttribute, SdgClass, SecOcJobMapping, SecOcJobRequirement, SecureCommunicationAuthenticationProps, SecureCommunicationDeployment, SecureCommunication FreshnessProps, SecurityEventContextProps, ServiceEventDeployment, ServiceFieldDeployment, ServiceInterfaceElementSecureComConfig, ServiceMethodDeployment, ServiceNeeds, SignalService TranslationEventProps, SignalServiceTranslationProps, SocketAddress, SoftwarePackageStep, Someip EventGroup, SomeipProvidedEventGroup, SomeipTpChannel, SpecElementReference, StackUsage, StaticSocketConnection, StructuredReq, SupervisionCheckpoint, SupervisionMode, SupervisionMode Condition, SwGenericAxisParamType, SwServiceArg, SwcServiceDependency, SystemMapping, SystemMemoryUsage, TimeBaseResource, TimingCondition, TimingConstraint, TimingDescription, TimingExtensionResource, TimingModelInstance, TlsCryptoCipherSuite, TlsCryptoCipherSuiteProps, Tls JobMapping, Topic1, TpAddress, TraceableTable, TraceableText, TracedFailure, TransformationProps, TransformationTechnology, Trigger, UcmDescription, UcmStep, VariableAccess, VariationPointProxy, VehicleRolloutStep, ViewMap, VlanConfig, WaitPoint</i></p>			
Attribute	Type	Mult.	Kind	Note
adminData	AdminData	0..1	aggr	<p>This represents the administrative data for the identifiable object.</p> <p>Stereotypes: atpSplittable Tags: atp.Splitkey=adminData xml.sequenceOffset=-40</p>
annotation	Annotation	*	aggr	<p>Possibility to provide additional notes while defining a model element (e.g. the ECU Configuration Parameter Values). These are not intended as documentation but are mere design notes.</p> <p>Tags:xml.sequenceOffset=-25</p>
category	CategoryString	0..1	attr	<p>The category is a keyword that specializes the semantics of the Identifiable. It affects the expected existence of attributes and the applicability of constraints.</p> <p>Tags:xml.sequenceOffset=-50</p>
desc	MultiLanguageOverview Paragraph	0..1	aggr	<p>This represents a general but brief (one paragraph) description what the object in question is about. It is only one paragraph! Desc is intended to be collected into overview tables. This property helps a human reader to identify the object in question.</p> <p>More elaborate documentation, (in particular how the object is built or used) should go to "introduction".</p> <p>Tags:xml.sequenceOffset=-60</p>
introduction	DocumentationBlock	0..1	aggr	<p>This represents more information about how the object in question is built or is used. Therefore it is a DocumentationBlock.</p> <p>Tags:xml.sequenceOffset=-30</p>
uuid	String	0..1	attr	<p>The purpose of this attribute is to provide a globally unique identifier for an instance of a meta-class. The values of this attribute should be globally unique strings prefixed by the type of identifier. For example, to include a DCE UUID as defined by The Open Group, the UUID would be preceded by "DCE:". The values of this attribute may be used to support merging of different AUTOSAR models. The form of the UUID (Universally Unique Identifier) is taken from a standard defined by the Open Group (was Open Software Foundation). This standard is</p> <p style="text-align: right;">▽</p>





Class	<i>Identifiable</i> (abstract)			
				<p>widely used, including by Microsoft for COM (GUIDs) and by many companies for DCE, which is based on CORBA. The method for generating these 128-bit IDs is published in the standard and the effectiveness and uniqueness of the IDs is not in practice disputed. If the id namespace is omitted, DCE is assumed. An example is "DCE:2fac1234-31f8-11b4-a222-08002b34c003". The uuid attribute has no semantic meaning for an AUTOSAR model and there is no requirement for AUTOSAR tools to manage the timestamp.</p> <p>Tags:xml.attribute=true</p>

Table A.2: Identifiable

Class	<i>Referrable</i> (abstract)			
Package	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::Identifiable			
Note	Instances of this class can be referred to by their identifier (while adhering to namespace borders).			
Base	<i>ARObject</i>			
Subclasses	<i>AtpDefinition</i> , <i>BswDistinguishedPartition</i> , <i>BswModuleCallPoint</i> , <i>BswModuleClientServerEntry</i> , <i>BswVariableAccess</i> , <i>CouplingPortTrafficClassAssignment</i> , <i>CppImplementationDataTypeContextTarget</i> , <i>DiagnosticEnvModeElement</i> , <i>EthernetPriorityRegeneration</i> , <i>ExclusiveAreaNestingOrder</i> , <i>HwDescriptionEntity</i> , <i>ImplementationProps</i> , <i>ModeTransition</i> , <i>MultilanguageReferrable</i> , <i>NmNetworkHandle</i> , <i>PncMappingIdent</i> , <i>SingleLanguageReferrable</i> , <i>SoConIPdulIdentifier</i> , <i>SocketConnectionBundle</i> , <i>SomeipRequiredEventGroup</i> , <i>TimeSyncServerConfiguration</i> , <i>TpConnectionIdent</i>			
Attribute	Type	Mult.	Kind	Note
shortName	Identifier	1	attr	<p>This specifies an identifying shortName for the object. It needs to be unique within its context and is intended for humans but even more for technical reference.</p> <p>Stereotypes: atpIdentityContributor</p> <p>Tags: xml.enforceMinMultiplicity=true xml.sequenceOffset=-100</p>
shortName Fragment	ShortNameFragment	*	aggr	<p>This specifies how the Referrable.shortName is composed of several shortNameFragments.</p> <p>Tags:xml.sequenceOffset=-90</p>

Table A.3: Referrable

Class	<i>SoftwareCluster</i>			
Package	M2::AUTOSARTemplates::AdaptivePlatform::SoftwareDistribution			
Note	<p>This meta-class represents the ability to define an uploadable software-package, i.e. the SoftwareCluster shall contain all software and configuration for a given purpose.</p> <p>Tags: atp.Status=draft atp.recommendedPackage=SoftwareClusters</p>			
Base	<i>ARElement</i> , <i>ARObject</i> , <i>CollectableElement</i> , <i>Identifiable</i> , <i>MultilanguageReferrable</i> , <i>PackageableElement</i> , <i>Referrable</i>			
Attribute	Type	Mult.	Kind	Note





Class	SoftwareCluster			
artifact Checksum	ArtifactChecksum	*	aggr	This aggregation carries the checksums for artifacts contained in the enclosing SoftwareCluster. Stereotypes: atpSplitable Tags: atp.Splitkey=artifactChecksum.shortName, artifact Checksum.uri atp.Status=draft
claimed FunctionGroup	ModeDeclarationGroup Prototype	*	ref	Each SoftwareCluster can reserve the usage of a given functionGroup such that no other SoftwareCluster is allowed to use it Tags: atp.Status=draft
conflictsTo	SoftwareCluster DependencyFormula	0..1	aggr	This aggregation handles conflicts. If it yields true then the SoftwareCluster shall not be installed. Stereotypes: atpSplitable Tags: atp.Splitkey=conflictsTo atp.Status=draft
contained ARElement	ARElement	*	ref	This reference represents the collection of model elements that cannot derive from UploadablePackage Element and that contribute to the completeness of the definition of the SoftwareCluster. Stereotypes: atpSplitable Tags: atp.Splitkey=containedARElement atp.Status=draft
containedFibex Element	FibexElement	*	ref	This allows for referencing FibexElements that need to be considered in the context of a SoftwareCluster. Tags: atp.Status=draft
contained Package Element	UploadablePackage Element	*	ref	This reference identifies model elements that are required to complete the manifest content. Stereotypes: atpSplitable Tags: atp.Splitkey=containedPackageElement atp.Status=draft
contained Process	Process	*	ref	This reference represent the processes contained in the enclosing SoftwareCluster. Tags: atp.Status=draft
dependsOn	SoftwareCluster DependencyFormula	0..1	aggr	This aggregation can be taken to identify a dependency for the enclosing SoftwareCluster. Stereotypes: atpSplitable Tags: atp.Splitkey=dependsOn atp.Status=draft
design	SoftwareClusterDesign	*	ref	This reference represents the identification of all Software ClusterDesigns applicable for the enclosing Software Cluster. Stereotypes: atpUriDef Tags: atp.Status=draft
diagnostic Extract	DiagnosticContribution Set	0..1	ref	This reference represents the definition of the diagnostic extract applicable to the referencing SoftwareCluster Tags: atp.Status=draft
diagnosticProps	SoftwareCluster DiagnosticProps	0..1	aggr	This aggregation represenst the diagnostic-related configuration of a SoftwareCluster. Tags: atp.Status=draft





Class	SoftwareCluster			
license	Documentation	*	ref	This attribute allows for the inclusion of the full text of a license of the enclosing SoftwareCluster. In many cases open source licenses require the inclusion of the full license text to any software that is released under the respective license. Tags: atp.Status=draft
module Instantiation	AdaptiveModule Instantiation	*	ref	This reference identifies AdaptiveModuleInstantiations that need to be included with the SoftwareCluster in order to establish infrastructure required for the installation of the SoftwareCluster. Stereotypes: atpSplitable Tags: atp.Splitkey=moduleInstantiation atp.Status=draft
releaseNotes	Documentation	0..1	ref	This attribute allows for the explanations of changes since the previous version. The list of changes might require the creation of multiple paragraphs of test. Tags: atp.Status=draft
typeApproval	String	0..1	attr	This attribute carries the homologation information that may be specific for a given country. Tags: atp.Status=draft
vendorId	PositiveInteger	1	attr	Vendor ID of this Implementation according to the AUTOSAR vendor list. Tags: atp.Status=draft
vendor Signature	CryptoService Certificate	1	ref	This reference identifies the certificate that represents the vendor's signature. Tags: atp.Status=draft
version	StrongRevisionLabel String	1	attr	This attribute can be used to describe a version information for the enclosing SoftwareCluster. Tags: atp.Status=draft

Table A.4: SoftwareCluster

Class	SoftwarePackage			
Package	M2::AUTOSARTemplates::AdaptivePlatform::SoftwareDistribution			
Note	This meta-class represents the ability to formalize the content of a software package. Tags: atp.Status=draft atp.recommendedPackage=SoftwarePackages			
Base	<i>ARElement, ARObject, CollectableElement, Identifiable, MultilanguageReferrable, Packageable Element, Referrable</i>			
Attribute	Type	Mult.	Kind	Note
actionType	SoftwarePackageAction TypeEnum	1	attr	This attribute defines the action to be taken in the step of processing the enclosing SoftwarePackage. Tags: atp.Status=draft
activationAction	SoftwarePackage ActivationActionEnum	0..1	attr	This attribute governs the action to be taken after the installation of the SoftwareCluster completed. Tags: atp.Status=draft
compressed Software PackageSize	PositiveInteger	1	attr	This size represents the size of the compressed Software Package. Tags: atp.Status=draft





Class	SoftwarePackage			
deltaPackage Applicable Version	StrongRevisionLabelString	0..1	attr	This attribute identifies the version of the included SoftwareCluster for which the enclosing SoftwarePackage can be used as a delta update Tags: atp.Status=draft
estimated DurationOf Operation	TimeValue	0..1	attr	This attribute provides an estimation about how long the operation of the SoftwarePackage is going to take. Tags: atp.Status=draft
minimum SupportedUcm Version	RevisionLabelString	1	attr	This attribute identifies the minimum supported version of the UCM for this SoftwarePackage. Tags: atp.Status=draft
packagerId	PositiveInteger	1	attr	This attribute identifies Id of the organization that provides the packager generating the SoftwarePackage. Tags: atp.Status=draft
packager Signature	CryptoService Certificate	1	ref	This reference identifies the certificate that represents the packager's signature. Tags: atp.Status=draft
purposeOf Update	Documentation	0..1	ref	The referenced Documentation is supposed to provide a description of the purpose of the update. Tags: atp.Status=draft
softwareCluster	SoftwareCluster	1	ref	This reference identifies the SoftwareCluster that belongs to the SoftwarePackage. The nature of this relation is actually more like an aggregation than a reference. But the relation is still modelled as a reference because two ARElements cannot aggregate each other. Tags: atp.Status=draft
uncompressed SoftwareCluster Size	PositiveInteger	1	attr	This attribute gives an indication about the storage that has to be available on the target. Tags: atp.Status=draft

Table A.5: SoftwarePackage

Primitive	StrongRevisionLabelString
Package	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::PrimitiveTypes
Note	<p>This primitive represents a revision label which identifies an object under version control. It represents a pattern which requires three integer numbers separated by a dot, representing from left to right Major Version, MinorVersion, PatchVersion and additional labels for pre-release version and build metadata.</p> <p>Legal patterns are for example: 1.0.0-alpha+001 1.0.0+20130313144700 1.0.0-beta+exp.sha.5114f85</p> <p>Tags: atp.Status=draft xml.xsd.customType=STRONG-REVISION-LABEL-STRING xml.xsd.pattern=(0 [1-9]d*)\.(0 [1-9]d*)\.(0 [1-9]d*)(-((0 [1-9]d*) d*[a-zA-Z-][0-9a-zA-Z-]*)(\.(0 [1-9]d*) d*[a-zA-Z-][0-9a-zA-Z-]*))*)?(\+([0-9a-zA-Z-]+ \.[0-9a-zA-Z-]+))*?</p> <p>xml.xsd.type=string</p>

Table A.6: StrongRevisionLabelString

Class	UcmModuleInstantiation
Package	M2::AUTOSARTemplates::AdaptivePlatform::PlatformModuleDeployment::Ucm
Note	<p>This meta-class represents the ability to define a definition of a UCM instantiation.</p> <p>Tags:atp.Status=draft</p>





Class	UcmModuleInstantiation			
Base	<i>ARObject, AdaptiveModuleInstantiation, Identifiable, MultilanguageReferrable, NonOsModule Instantiation, Referrable</i>			
Attribute	Type	Mult.	Kind	Note
identifier	String	1	attr	This represents the identification of a UCM. Tags: atp.Status=draft
maxNumberOfParallelTransfers	PositiveInteger	0..1	attr	This attribute supports the configuration of the maximum number of parallel transfers that the Ucm on the enclosing Machine is allowed to create. Tags: atp.Status=draft
ucmSoftwareVersion	StrongRevisionLabelString	0..1	attr	This attribute defines the software version of the UCM on this platform. Note that the definition of the ucmSoftwareVersion is required if the ability of the SoftwarePackage to require a minimum version of the UCM is utilized. Tags: atp.Status=draft

Table A.7: UcmModuleInstantiation

Class	VehiclePackage			
Package	M2::AUTOSARTemplates::AdaptivePlatform::SoftwareDistribution			
Note	This meta-class represents the ability to define a vehicle package for executing an update campaign. Tags: atp.Status=draft atp.recommendedPackage=VehiclePackages			
Base	<i>ARElement, ARObject, CollectableElement, Identifiable, MultilanguageReferrable, Packageable Element, Referrable</i>			
Attribute	Type	Mult.	Kind	Note
driverNotification	VehicleDriverNotification	*	aggr	This aggregation provides the ability to configure the necessary driver notifications. Tags: atp.Status=draft
estimatedDurationOfCampaign	TimeValue	0..1	attr	This attribute provides an estimation about how long the campaign based on the VehiclePackage is going to take. Tags: atp.Status=draft
maximumSupportedUcmMasterVersion	RevisionLabelString	0..1	attr	This attribute identifies the maximum supported version of the UCM Master for this VehiclePackage. Tags: atp.Status=draft
minimumSupportedUcmMasterVersion	RevisionLabelString	0..1	attr	This attribute identifies the minimum supported version of the UCM Master for this VehiclePackage. Tags: atp.Status=draft
packagerSignature	CryptoServiceCertificate	1	ref	This reference identifies the certificate that represents the packager's signature. Tags: atp.Status=draft
repository	UriString	0..1	attr	This attribute identifies the repository where the Vehicle Package is stored. Tags: atp.Status=draft
rolloutQualification(ordered)	VehicleRolloutStep	*	aggr	This represents the rollout qualification. Tags: atp.Status=draft





Class	VehiclePackage			
ucm	UcmDescription	*	aggr	This aggregation represents the UcmDescriptions to be considered in the context of the VehiclePackage. Tags: atp.Status=draft
ucmMaster Fallback (ordered)	UcmDescription	*	ref	This reference lists the fallback order of Ucms that can take over the master role if the master goes down. Tags: atp.Status=draft
vehicle Description	Documentation	0..1	ref	This reference identifies the vehicle description. Tags: atp.Status=draft

Table A.8: VehiclePackage

B Interfaces to other Functional Clusters (informative)

B.1 Overview

AUTOSAR decided not to standardize interfaces which are exclusively used between Functional Clusters (on platform-level only), to allow efficient implementations, which might depend e.g. on the used Operating System.

This chapter provides informative guidelines how the interaction between Functional Clusters looks like, by clustering the relevant requirements of this document. In addition, the standardized public interfaces which are accessible by user space applications (see chapter 8) can also be used for interaction between Functional Clusters.

The goal is to provide a clear understanding of Functional Cluster boundaries and interaction, without specifying syntactical details. This ensures compatibility between documents specifying different Functional Clusters and supports parallel implementation of different Functional Clusters. Details of the interfaces are up to the platform provider.

B.2 Interfaces Tables

B.2.1 UCM update notification

UCM shall provide the notification to other Functional Clusters that changes have been done to the software. This enables other functional clusters to check if updated manifests have changes relevant for the concerned Functional Cluster. This can be done through the field `CurrentStatus` provided by the UCM service.

C Packages distribution within vehicle detailed sequence examples

C.1 Collect information of present Software Clusters in vehicle

From a regular basis, UCM `master` and UCM can collect information of present `Software Clusters` from the other AUTOSAR `Adaptive Platforms` of the vehicle in order to be used later when communicating with `Backend` and then determine if there are new actions (update, remove, install) required.

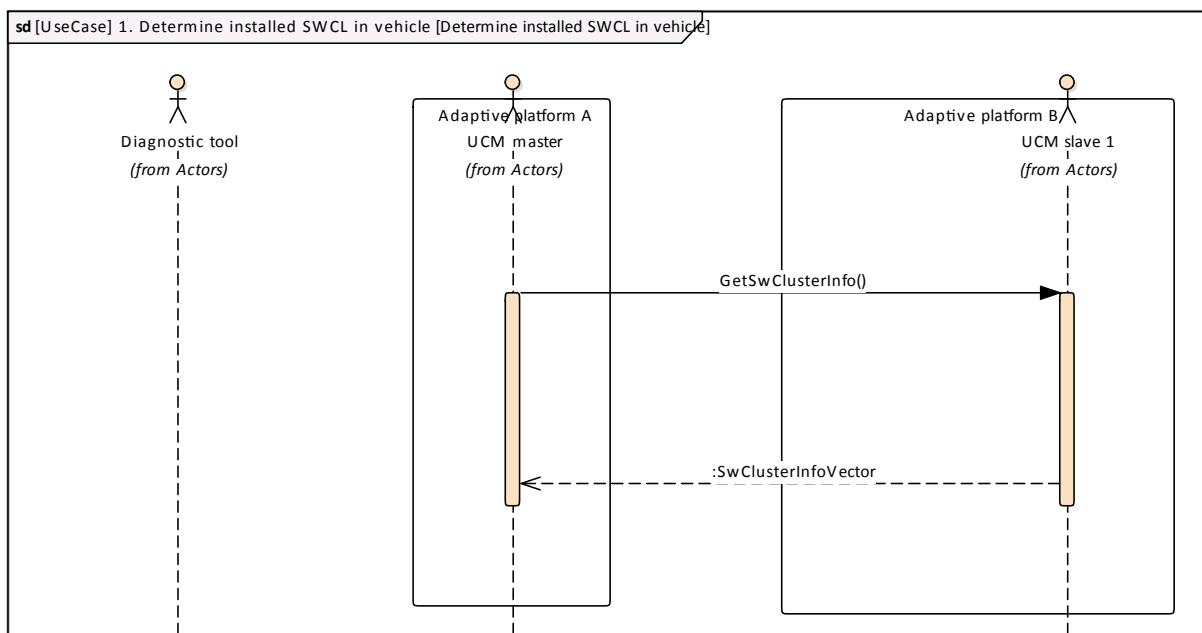


Figure C.1: Collect information of Software Clusters present in vehicle from several AUTOSAR Adaptive Platforms

C.2 Action computation

In order to find out if there is a new update available from `Backend` or the need to install or remove a `Software Cluster`, vehicle and `Backend` have to share their current status and either `Backend` or vehicle have to compute what UCM `Master` actions are needed.

`Backend` will have the possibility to push a package into the vehicle when communication is established, for instance for security purpose.

Communication trial between `Backend` and UCM `master` can be done on driver's request or from a scheduler.

C.2.1 Pull package from Backend into vehicle

Case where vehicle is computing the difference between **Software Clusters** versions that are present in vehicle and the ones available in **Backend**.

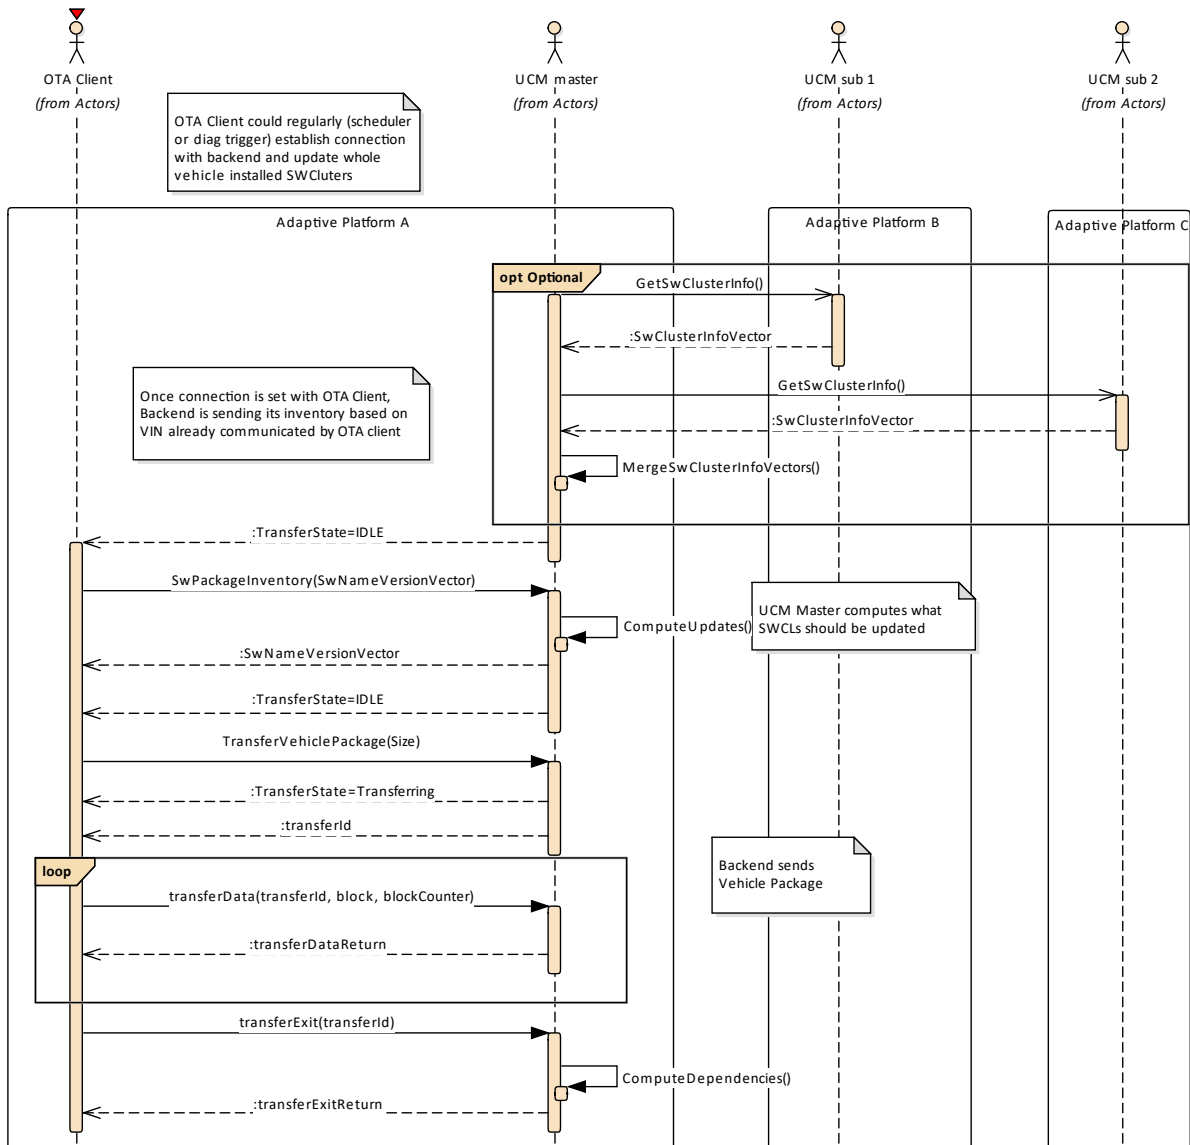


Figure C.2: Pull package from backend

C.2.2 Push package from backend into vehicle

Case where **Backend** is computing the difference between **Software Clusters** versions that are present in vehicle and the ones available in **Backend**.

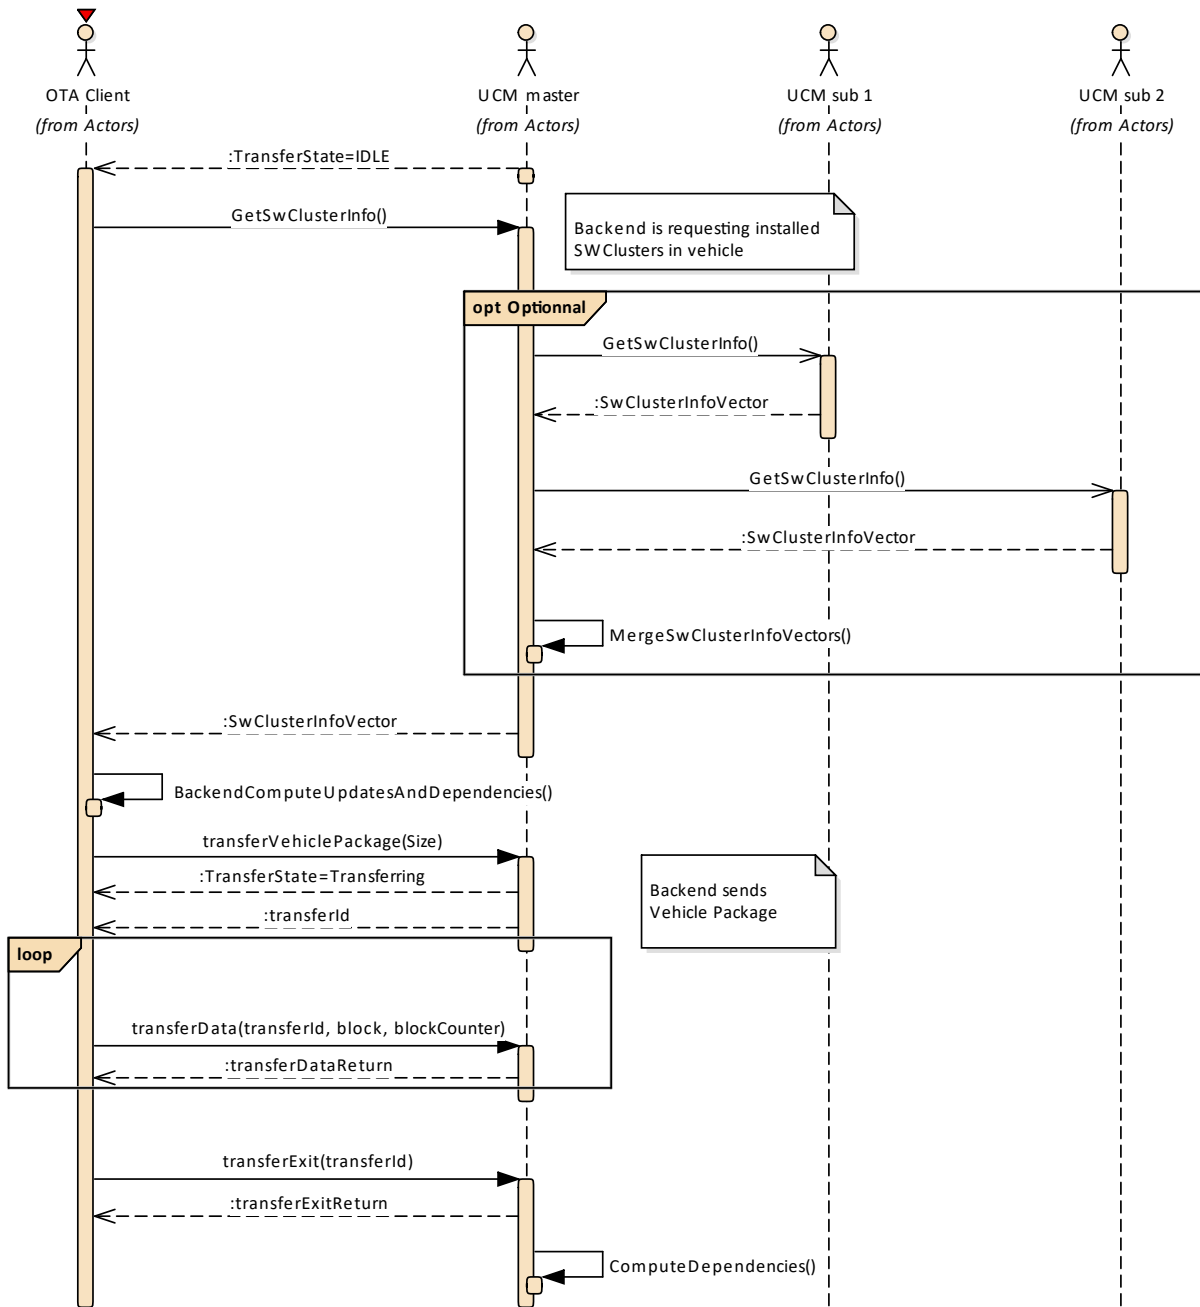


Figure C.3: Push package from backend

C.3 Packages transfer from backend into targeted UCM

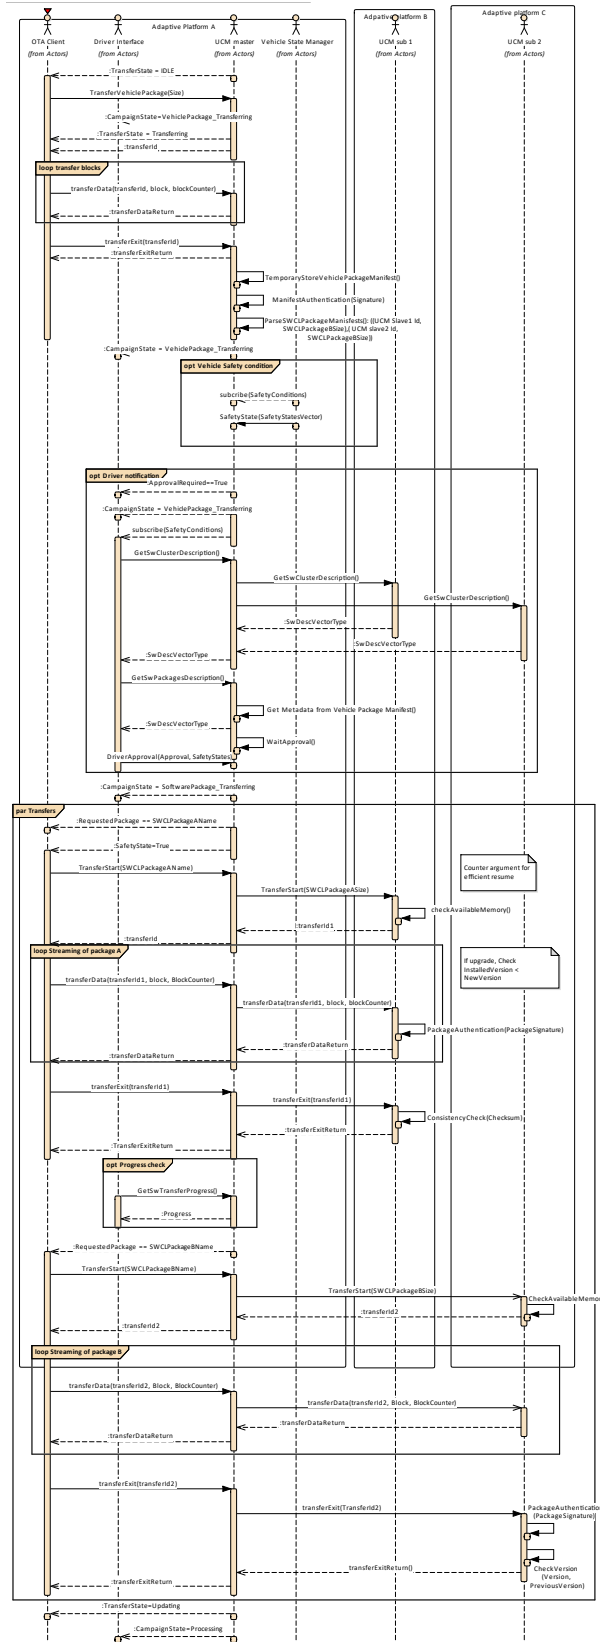


Figure C.4: Stream packages blocks from backend into targeted UCM

C.4 Package processing

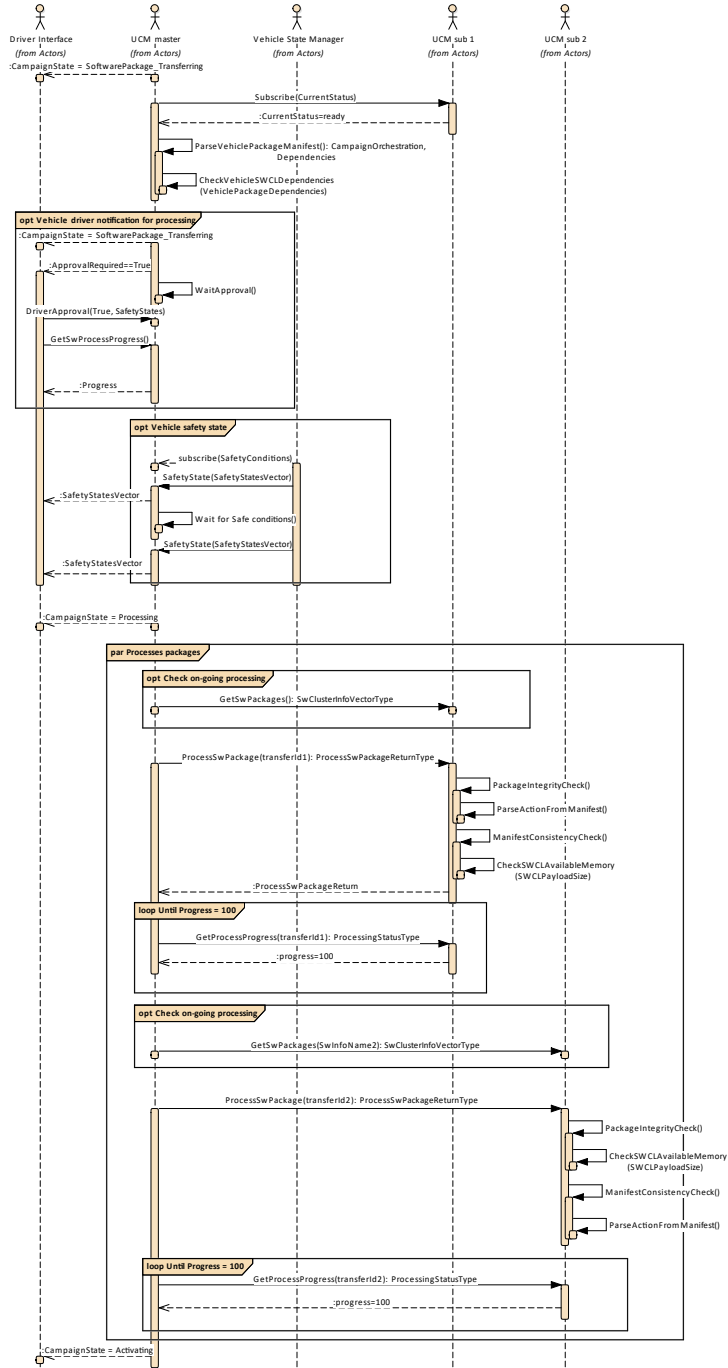


Figure C.5: Packages processing by UCMs

C.5 Package activation

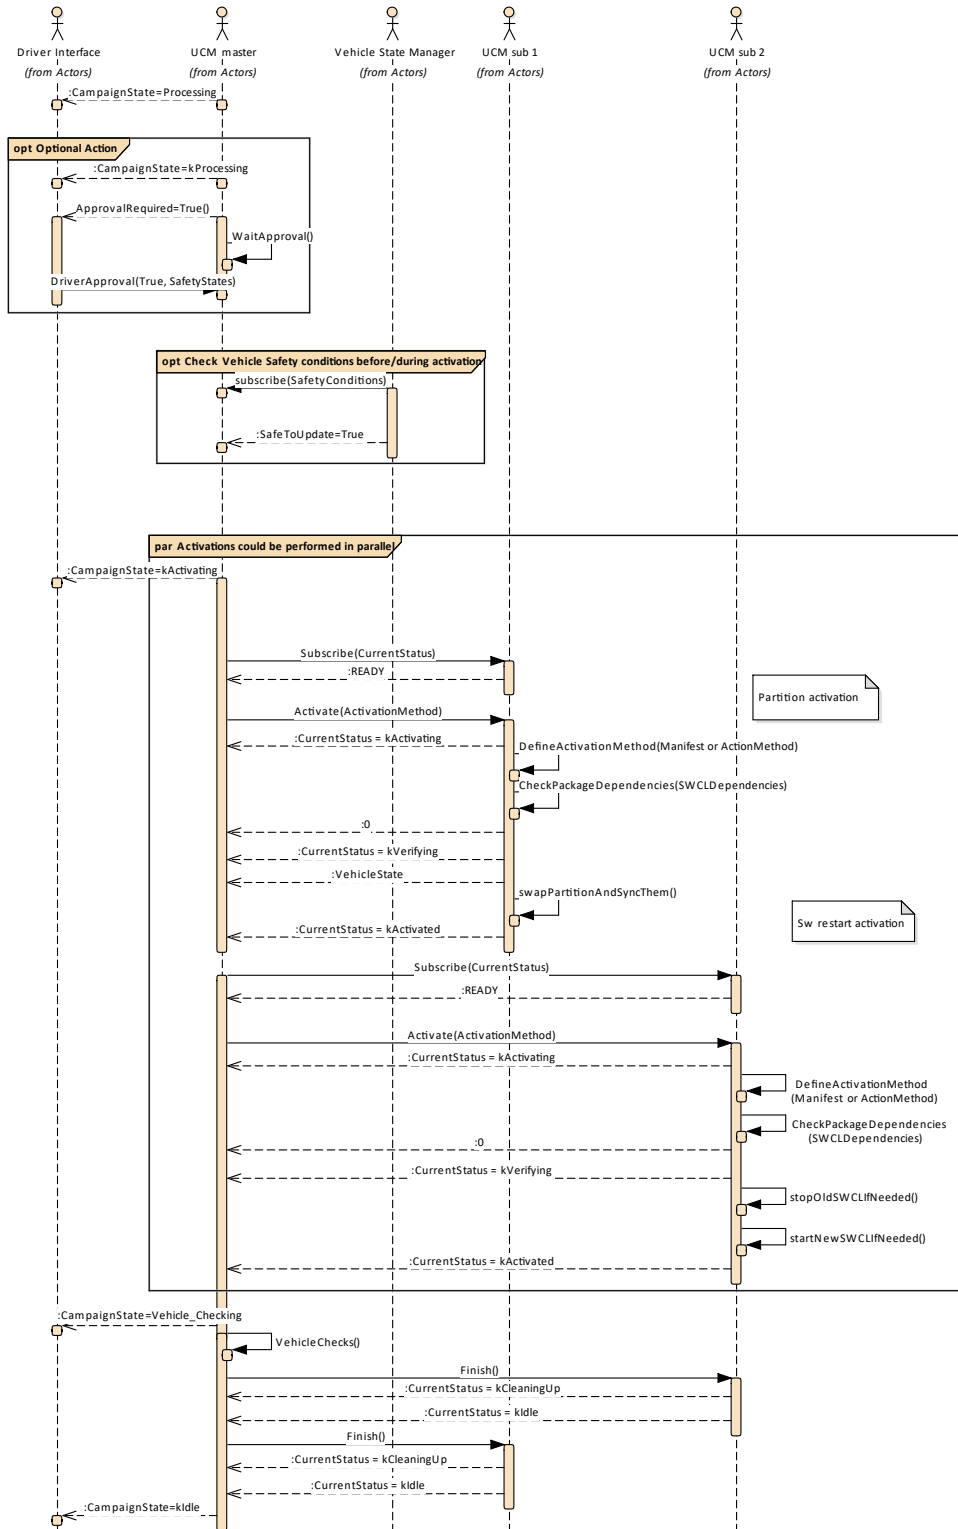


Figure C.6: Packages activation by UCMs

C.6 Package rollback

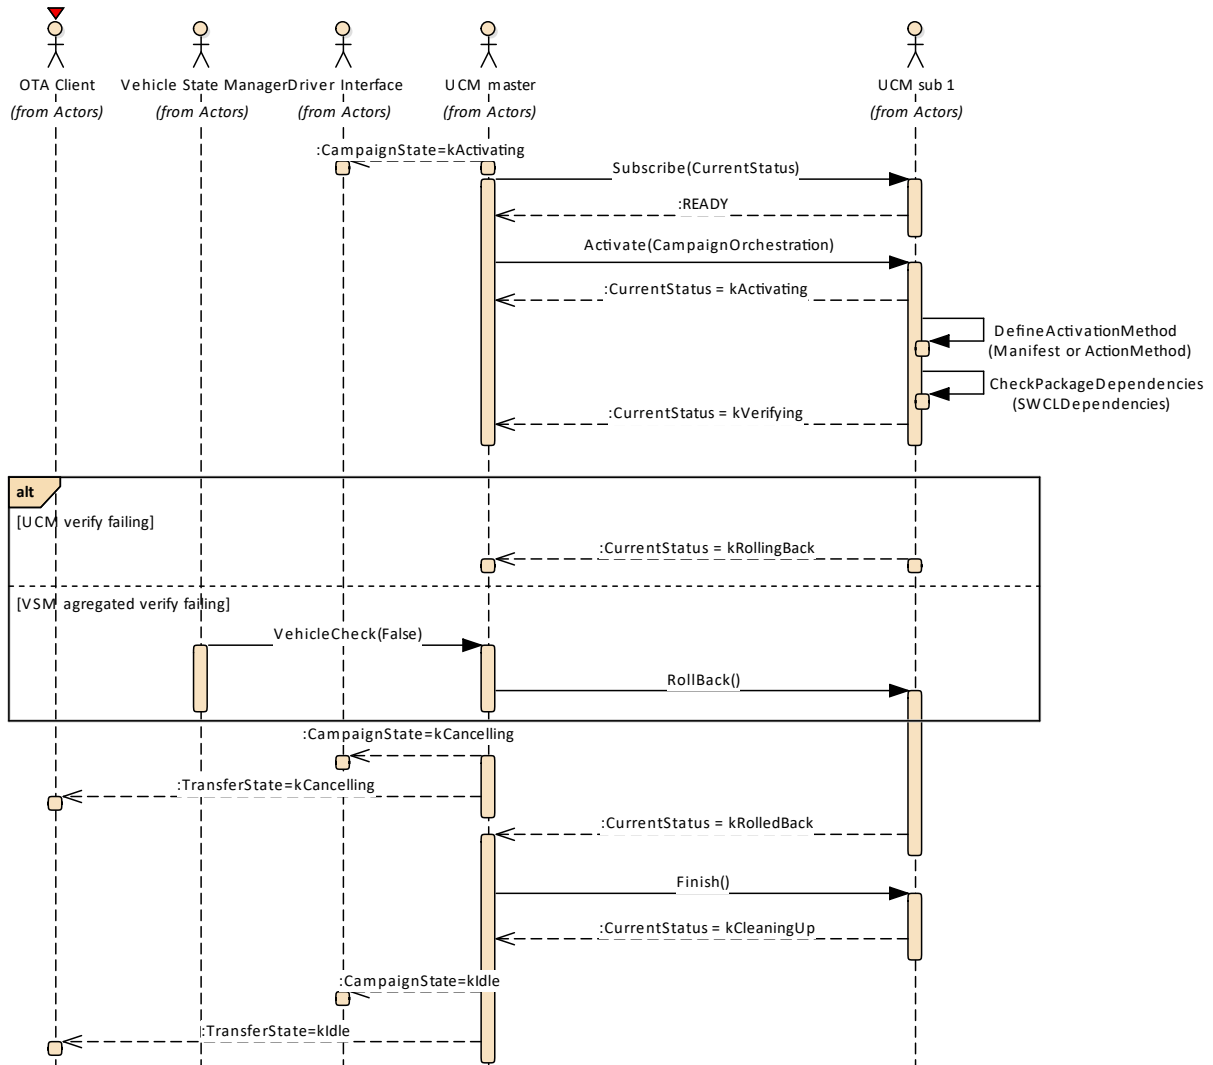


Figure C.7: Packages rollback by UCMs

C.7 Campaign reporting

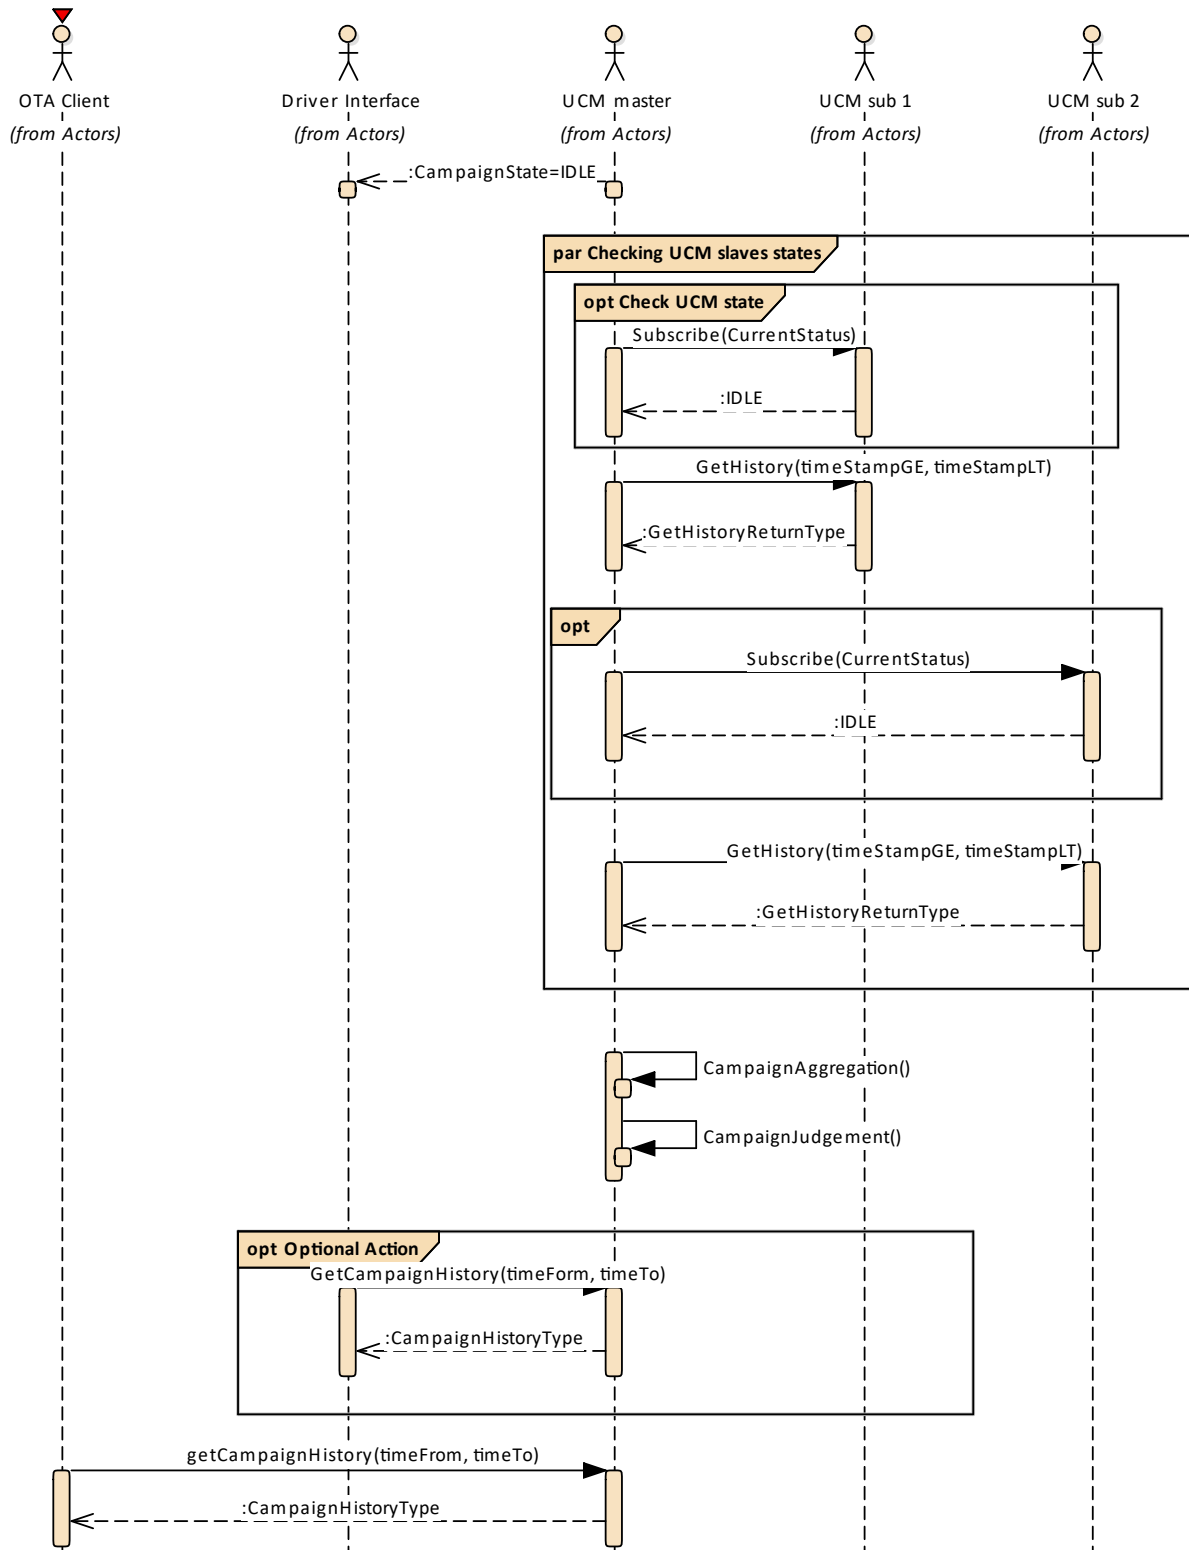


Figure C.8: Campaign reporting to backend

D Security Analysis of Installation and Update

This chapter presents a summary for the security analysis of the UCM. Some of the threats could not be addressed by specifying AUTOSAR requirements. The main reason for not specifying the countermeasures is to allow vendors to flexibly decide on the solution that fits their setup. Here we aim to raise awareness and provide advice on the selected topics:

D.1 Securing Software Package

UCM is responsible for applying changes of the platform and applications contained in the Software Packages it receives. Therefore, integrity and authenticity of Software Packages are critical to protect system integrity. It shall be ensured that the Software Packages are neither illegitimately altered nor issued by unauthorized parties. This can be achieved by applying cryptographic techniques such as digital signatures. The period that Software Package resides in UCM before being activated shall not be neglected. It provides a window of opportunity for an attacker to tamper with the Software Package after the authentication is done at TransferExit.

Information disclosure is another security threat category that might be applicable to Software Packages. Packages that contain sensitive information, such as intellectual properties or cryptographic keys, require confidentiality protection in addition to integrity and authenticity when being persisted or transmitted over a communication channel.

Another aspect of protecting Software Update Packages is their freshness. An attacker may try to manipulate the system by downgrading the software via replaying an authentic but older Software Update Package. In this regard, the platform shall ensure that only newer packages (i.e. packages that contain newer version of installed SWCL) can be installed.

D.2 Securing Calls to UCM

UCM provides a very critical functionality in the platform that allows modifying applications and platform components. In that sense, it is critical to prevent unauthorized access to UCM, meaning only legitimate callers should be allowed to reach the UCM service interface. This is primarily enforced in the communication layer supported by the Identity and Access Management. Additionally, the calls to the UCM interface shall be protected against altering, e.g. changing API arguments. When the service and client reside on the same machine, the security relies on the integrity of the operating system and the platform. In case, the service and the client are running on different machines, a secure communication, assuring authenticity and integrity of communication, is additionally required.

Moreover, some API methods of the UCM interface returns sensitive information about the platform. This subset (GetSwClusterInfo, GetSwClusterChangeInfo, GetHistory, GetSwPackages) shall be protected against information disclosure and should only be reachable over a channel that provides confidentiality.

A similar reasoning is applicable for securing the communication between UCM Master and its clients. Regarding protection against information disclosure, GetSwClusterInfo, SwPackageInventory and GetHistory for UCM Master shall only be called over confidential channels.

D.3 Suppressing Call to UCM

Multiple scenarios can be envisioned where an attacker targets suppressing the calls to UCM. The attack could block the calls to or the response from UCM. In both cases the caller of the service may assume that UCM is not responding and retries its request. This would lead to undesired overhead on the system. For such scenarios, it is recommended that both UCM and the UCM Client consider reporting security events when same calls repeatedly received at UCM or calls repeatedly fail at the caller side. This information could potentially be picked up by Intrusion Detection Systems or Anomaly Detection Systems.

D.4 Resource Starvation

According to the current specification, the available resources for transferring a Software Package is only checked when TransferStart is called but not reserved. This means, while the transfer is ongoing, the system storage can be exhausted by other processes using the same storage media. This scenario is also applicable to UCM Master when receiving data from its client. A similar case is possible for processing of Software Package, as the resources are only checked at the beginning but not reserved. In this regard, a solution could be to reserve the necessary resources for the Software Package transfer or processing from the beginning to prevent attacks aiming at such scenarios.

At the same time, reserving the resources might provide opportunity to the attacker in other scenarios. The specification allows transferring multiple Software Packages in parallel. Consequently, a misbehaving or compromised client can open unlimited number of transfer sessions causing UCM to run out of resources. To cope with this scenario, a threshold for the number of parallel transfer sessions can be defined.

D.5 Zombie Sessions

The AUTOSAR specification does not enforce any expiry time for the established transfer sessions. As a result, the resources that are hold by an ongoing session will not

be released no matter how long time it takes. At the same time, in certain cases it may take a long time for larger software packages to be transferred to UCM or UCM Master, especially when they are received from external sources with weak connectivity on-the-fly. However, a timeout may be considered for such a transfer to prevent attackers from mounting denial of service attacks by long term allocation of resources.

E History of Constraints and Specification Items

Please note that the lists in this chapter also include constraints and specification items that have been removed from the specification in a later version. These constraints and specification items do not appear as hyperlinks in the document.

E.1 Constraint and Specification Item History of this document according to AUTOSAR Release R19-11.

E.1.1 Added Traceables in R19-11

Number	Heading
[SWS_UCM_00009]	UCM exposing its identifier
[SWS_UCM_00105]	UCM confidential information handling
[SWS_UCM_00161]	Check Software Package version compatibility against UCM version
[SWS_UCM_00162]	Entering the Cleaning-up state after a RevertProcessedSwPackages call
[SWS_UCM_00163]	Action in Cleaning-up state
[SWS_UCM_00164]	Cleaning up of Software Packages
[SWS_UCM_00165]	Processing from stream
[SWS_UCM_00166]	Processing from stream state
[SWS_UCM_00167]	Cancelling streamed packages
[SWS_UCM_00168]	Transferring while processing from stream
[SWS_UCM_00169]	Finishing transfer while processing from stream
[SWS_UCM_00170]	Log message retrieving
[SWS_UCM_00171]	Log level changing
[SWS_UCM_00172]	Log messages removing
[SWS_UCM_00173]	UCMIdentifierType table
[SWS_UCM_00174]	SwNameVectorType table
[SWS_UCM_00175]	StrongRevisionLabelString table
[SWS_UCM_00176]	SwNameVersionType table
[SWS_UCM_00177]	SwNameVersionVectorType table
[SWS_UCM_00178]	ProvidedPort VehiclePackageManagement
[SWS_UCM_00179]	RequiredPort VehicleStateManager
[SWS_UCM_00180]	RequiredPort VehicleDriverApplication
[SWS_UCM_00181]	ProvidedInterface VehiclePackageManagement
[SWS_UCM_00182]	RequiredInterface VehicleDriverApplication
[SWS_UCM_00183]	RequiredInterface VehicleStateManager
[SWS_UCM_00210]	Transferring of software packages on kProcessApproving or kProcessing state





Number	Heading
[SWS_UCM_01001]	UCM Master processes Vehicle Package
[SWS_UCM_01002]	UCM Master shall provide UCM services
[SWS_UCM_01003]	UCM Master checks states of UCM subordinates
[SWS_UCM_01004]	Only one UCM Master shall be active per network domain
[SWS_UCM_01005]	UCM Master is discovering UCMS in vehicle
[SWS_UCM_01006]	Vehicle Package transfer to UCM Master
[SWS_UCM_01007]	Start transfer of a Vehicle Package or Software Package to UCM Master
[SWS_UCM_01008]	Transfer data of a Vehicle Package to UCM Master
[SWS_UCM_01009]	Exit the transfer of a Vehicle Package to UCM Master
[SWS_UCM_01010]	Delete a Vehicle Package transferred to UCM Master
[SWS_UCM_01101]	Provide information of installed Software Clusters in vehicle
[SWS_UCM_01102]	Get information of available Software Clusters in Backend
[SWS_UCM_01103]	Inform Backend of needed Software Clusters for an update
[SWS_UCM_01105]	Interaction of UCM Master with Vehicle Driver
[SWS_UCM_01106]	Exclusive use of Vehicle Driver Interface
[SWS_UCM_01107]	UCM Master provides progress information to Vehicle Driver
[SWS_UCM_01108]	Unsupported safety policy by Vehicle driver interface
[SWS_UCM_01109]	Vehicle State Manager shall provide to UCM Master a safety state
[SWS_UCM_01110]	UCM Master shall be able to set the safety policy to be computed by Vehicle State Manager
[SWS_UCM_01111]	Exclusive use of Vehicle State Manager
[SWS_UCM_01112]	Unsupported safety policy by Vehicle State Manager
[SWS_UCM_01113]	Switching vehicle into update mode
[SWS_UCM_01114]	SafetyPolicyType table
[SWS_UCM_01115]	VehicleStateManagerErrorDomain
[SWS_UCM_01116]	VehicleDriverApplicationErrorDomain
[SWS_UCM_01177]	CampaignStateType table
[SWS_UCM_01201]	Sequential orchestration of campaigns
[SWS_UCM_01203]	CampaignState field
[SWS_UCM_01204]	Initial state
[SWS_UCM_01205]	UCM Master internal state persistency
[SWS_UCM_01206]	Trigger on kTransferApproving state
[SWS_UCM_01207]	Trigger on kTransferring state
[SWS_UCM_01208]	Trigger on kProcessApproving state
[SWS_UCM_01209]	Trigger on kProcessing state
[SWS_UCM_01211]	Trigger on kActivateApproving state
[SWS_UCM_01212]	Trigger on kActivating state
[SWS_UCM_01213]	Trigger on kVehicleChecking state





Number	Heading
[SWS_UCM_01214]	Final action on kVehicleChecking state
[SWS_UCM_01215]	Trigger on kRollingBack state
[SWS_UCM_01216]	Final action on kRollingBack state
[SWS_UCM_01217]	Monitoring of UCM subordinates
[SWS_UCM_01218]	Transition from kIdle state to kSyncing state
[SWS_UCM_01219]	Transition from kSyncing state to kIdle state
[SWS_UCM_01220]	Transition from kIdle state to kVehiclePackageTransferring state
[SWS_UCM_01221]	Transition from kVehiclePackageTransferring state to kIdle state
[SWS_UCM_01222]	Transition from kVehiclePackageTransferring state to kTransferring state
[SWS_UCM_01223]	Transition from kVehiclePackageTransferring state to kTransferApproving state
[SWS_UCM_01224]	Transition from kTransferApproving state to kTransferring state
[SWS_UCM_01225]	Transition from kTransferApproving state to kIdle state
[SWS_UCM_01226]	Transition from kTransferring state to kTransferApproving state
[SWS_UCM_01227]	Transition from kTransferring state to kIdle state
[SWS_UCM_01228]	Transition from kTransferring state to kProcessing state
[SWS_UCM_01229]	SafetyPolicy while processing stream
[SWS_UCM_01230]	Transition from kTransferring state to kProcessApproving state
[SWS_UCM_01231]	Transition from kProcessApproving state to kProcessing state
[SWS_UCM_01232]	Transition from kProcessApproving state to kIdle state
[SWS_UCM_01233]	Transition from kProcessing state to kProcessApproving state
[SWS_UCM_01234]	Transition from kProcessing state to kActivating state
[SWS_UCM_01235]	Transition from kProcessing state to kActivateApproving state
[SWS_UCM_01236]	Transition from kProcessing state to kIdle state
[SWS_UCM_01237]	Transition from kActivateApproving state to kActivating state
[SWS_UCM_01238]	Transition from kActivateApproving state to kIdle state
[SWS_UCM_01239]	Transition from kActivating state to kRollingBack state
[SWS_UCM_01240]	Transition from kActivating state to kVehicleChecking state
[SWS_UCM_01241]	Transition from kVehicleChecking state to kRollingBack state
[SWS_UCM_01242]	Transition from kVehicleChecking state to kIdle state
[SWS_UCM_01243]	Transition from kRollingBack state to kIdle state
[SWS_UCM_01244]	Cancellation of an update campaign shall be possible
[SWS_UCM_01245]	Cancellation during activation shall be possible
[SWS_UCM_01246]	Unreachable UCM during update campaign
[SWS_UCM_01247]	Method to read History Report
[SWS_UCM_01248]	Content of History Report
[SWS_UCM_01301]	Vehicle Package authentication
[SWS_UCM_01302]	Vehicle Package authentication failure



△

Number	Heading
[SWS_UCM_01303]	Dependencies between Software Packages
[SWS_UCM_01304]	Confidential information protection
[SWS_UCM_CON-STR_00001]	

Table E.1: Added Traceables in R19-11

E.1.2 Changed Traceables in R19-11

Number	Heading
[SWS_UCM_00003]	Cancelling the package processing
[SWS_UCM_00017]	Sequential Software Package Processing
[SWS_UCM_00018]	Providing Progress Information
[SWS_UCM_00027]	Delta Package activation
[SWS_UCM_00071]	SwNameType table
[SWS_UCM_00081]	Processing state of Package Management
[SWS_UCM_00082]	Exit from Processing state of Package Management
[SWS_UCM_00102]	Update state
[SWS_UCM_00103]	Update to older Software Cluster version than currently present
[SWS_UCM_00104]	Consistency Check of processed Package
[SWS_UCM_00111]	Entering the Rolled-back state
[SWS_UCM_00112]	Software Cluster and version
[SWS_UCM_00126]	Entering the RollingBack state after a Rollback call
[SWS_UCM_00130]	Software Cluster and version error
[SWS_UCM_00146]	Entering the Cleaning-up state after a Finish call
[SWS_UCM_00149]	Return to the Idle state from Processing state
[SWS_UCM_00151]	Entering the Ready state of Package Management after a Cancel call
[SWS_UCM_00155]	Entering the RollingBack state after a failure in the Verifying state

Table E.2: Changed Traceables in R19-11

E.1.3 Deleted Traceables in R19-11

Number	Heading
[SWS_UCM_00012]	Log message retrieving
[SWS_UCM_00114]	ActivateOptionType table
[SWS_UCM_00144]	Log error

Table E.3: Deleted Traceables in R19-11

E.1.4 Added Constraints in R19-11

none

E.1.5 Changed Constraints in R19-11

none

E.1.6 Deleted Constraints in R19-11

none

E.2 Constraint and Specification Item History of this document according to AUTOSAR Release R20-11.

E.2.1 Added Traceables in R20-11

Number	Heading
[SWS_UCM_00184]	Persistent data clean-up after Software Cluster removal
[SWS_UCM_00185]	Provide Software Cluster general information
[SWS_UCM_00186]	
[SWS_UCM_00187]	
[SWS_UCM_00190]	Reinstallation of older Software Cluster version than previously removed
[SWS_UCM_00191]	Software Cluster life-cycle state kAdded
[SWS_UCM_00192]	Software Cluster life-cycle state transition from kAdded to kPresent
[SWS_UCM_00193]	Software Cluster life-cycle state transition from kUpdated to kPresent
[SWS_UCM_00194]	Software Cluster life-cycle state transition from kRemoved to kPresent
[SWS_UCM_00195]	Software Cluster life-cycle state kUpdated
[SWS_UCM_00196]	Software Cluster life-cycle state kRemoved
[SWS_UCM_00197]	End of Software Cluster life-cycle state from state kAdded
[SWS_UCM_00198]	End of Software Cluster life-cycle state from state kRemoved
[SWS_UCM_00199]	Reporting of Software Cluster reaching end of life-cycle
[SWS_UCM_00200]	Failing authentication
[SWS_UCM_00201]	Delta Package dependency error
[SWS_UCM_00202]	Trusted Platform compliance
[SWS_UCM_00203]	TransferData InvalidTransferId
[SWS_UCM_00204]	TransferData IncorrectBlock





Number	Heading
[SWS_UCM_00205]	TransferData IncorrectSize
[SWS_UCM_00206]	TransferData InsufficientMemory
[SWS_UCM_00207]	TransferData BlockInconsistent
[SWS_UCM_00208]	TransferData OperationNotPermitted
[SWS_UCM_00209]	TransferData PackageInconsistent
[SWS_UCM_00211]	TransferData TransferInterrupted
[SWS_UCM_00212]	TransferExit InvalidTransferId
[SWS_UCM_00213]	TransferExit InvalidPackageManifest
[SWS_UCM_00214]	DeleteTransfer InvalidTransferId
[SWS_UCM_00215]	DeleteTransfer OperationNotPermitted
[SWS_UCM_00216]	Validity of TransferId
[SWS_UCM_00217]	ProcessSwPackage InsufficientMemory
[SWS_UCM_00218]	ProcessSwPackage InvalidTransferId
[SWS_UCM_00219]	ProcessSwPackage OperationNotPermitted
[SWS_UCM_00220]	GetSwProcessProgress InvalidTransferId
[SWS_UCM_00230]	ProcessSwPackage AuthenticationFailed
[SWS_UCM_00231]	ProcessSwPackage IncompatibleDelta
[SWS_UCM_00232]	ProcessSwPackage
[SWS_UCM_00233]	Cancel Operation CancelFailed
[SWS_UCM_00234]	Cancel OperationNotPermitted
[SWS_UCM_00235]	Cancel InvalidTransferId
[SWS_UCM_00236]	RevertProcessedSwPackages NotAbleToRevertPackages
[SWS_UCM_00237]	RevertProcessedSwPackages OperationNotPermitted
[SWS_UCM_00238]	Rollback NotAbleToRollback
[SWS_UCM_00239]	Rollback OperationNotPermitted
[SWS_UCM_00240]	Finish OperationNotPermitted
[SWS_UCM_00241]	Activate OperationNotPermitted
[SWS_UCM_00242]	Activate PreActivationFailed
[SWS_UCM_00243]	Too big block size received by UCM
[SWS_UCM_00245]	Software Cluster category
[SWS_UCM_00250]	TransferData AuthenticationFailed
[SWS_UCM_00251]	
[SWS_UCM_00252]	
[SWS_UCM_00253]	
[SWS_UCM_00254]	
[SWS_UCM_00255]	
[SWS_UCM_00256]	
[SWS_UCM_00257]	Update session
[SWS_UCM_00258]	Update session rejected





Number	Heading
[SWS_UCM_00259]	Ending the update session
[SWS_UCM_00260]	PrepareUpdate, VerifyUpdate and PrepareRollback orders
[SWS_UCM_00261]	PrepareUpdate, VerifyUpdate and PrepareRollback synchronous calls
[SWS_UCM_00262]	Update preparation rejected
[SWS_UCM_00263]	Update preparation failure
[SWS_UCM_00264]	Update verification rejected
[SWS_UCM_01011]	TransferVehiclePackage InsufficientMemory
[SWS_UCM_01012]	TransferVehiclePackage InsufficientComputationPower
[SWS_UCM_01013]	Too big block size received by UCM Master
[SWS_UCM_01014]	Packages transferring sequence
[SWS_UCM_01015]	Invalid Vehicle Package manifest
[SWS_UCM_01016]	Invalid Package Manifest
[SWS_UCM_01017]	RequestedPackage field
[SWS_UCM_01117]	UCM Master SafetyState field
[SWS_UCM_01118]	UCM Master waiting for vehicle driver approval
[SWS_UCM_01119]	Report information of Software Packages
[SWS_UCM_01120]	Provide Software Packages general information
[SWS_UCM_01121]	Adaptive Platform interface provided for Flashing Adapter
[SWS_UCM_01122]	Supported physical layers by D-PDU API implementation
[SWS_UCM_01123]	Supported application layers by D-PDU API implementation
[SWS_UCM_01124]	Supported protocols by D-PDU API implementation
[SWS_UCM_01125]	Separation of D-PDU API -Software with the MVCI protocol module firmware
[SWS_UCM_01126]	Root description file (RDF)
[SWS_UCM_01127]	Module Description File (MDF)
[SWS_UCM_01128]	Symbolic names and IDs
[SWS_UCM_01129]	SAE J2534-1 and RP 1210a compatibility
[SWS_UCM_01130]	ComPrimitives in RawMode
[SWS_UCM_01131]	PDUIoCtl(PDU_IOCTL_RESET)
[SWS_UCM_01132]	PDUIoCtl(PDU_IOCTL_START_MSG_FILTER), PDUIoCtl(PDU_IOCTL_CLEAR_MSG_FILTER), PDUIoCtl(PDU_IOCTL_STOP_MSG_FILTER)
[SWS_UCM_01133]	PDUIoCtl(PDU_IOCTL_SEND_BREAK)
[SWS_UCM_01134]	Not used D-PDU API function return codes
[SWS_UCM_01178]	
[SWS_UCM_01265]	TransferState field
[SWS_UCM_01266]	Subordinate Not Available On The Network
[SWS_UCM_01267]	Vehicle State Manager Communication Error
[SWS_UCM_01268]	Vehicle Driver Interface Communication Error
[SWS_UCM_01269]	Campaign cancellation history





Number	Heading
[SWS_UCM_01270]	New campaign disabling
[SWS_UCM_01271]	New campaign enabling
[SWS_UCM_01305]	Vehicle Package format
[SWS_UCM_01306]	TransferExit Invalid package manifest
[SWS_UCM_CON-STR_00002]	UCM confidential information handling
[SWS_UCM_CON-STR_00003]	Exclusive use of Vehicle Driver Interface
[SWS_UCM_CON-STR_00004]	Unsupported safety policy by Vehicle driver interface
[SWS_UCM_CON-STR_00005]	Safety state change
[SWS_UCM_CON-STR_00006]	Exclusive use of Vehicle State Manager
[SWS_UCM_CON-STR_00007]	Unsupported safety policy by Vehicle State Manager
[SWS_UCM_CON-STR_00008]	Switching vehicle into update mode
[SWS_UCM_CON-STR_00009]	Safety policy change
[SWS_UCM_CON-STR_00010]	UCM Client update sequence
[SWS_UCM_CON-STR_00011]	Flashing Adapter provided interface

Table E.4: Added Traceables in R20-11

E.2.2 Changed Traceables in R20-11

Number	Heading
[SWS_UCM_00018]	Providing Progress Information
[SWS_UCM_00020]	Finishing the packages activation
[SWS_UCM_00025]	Activation of SoftwareClusters
[SWS_UCM_00026]	Dependency Check
[SWS_UCM_00027]	Delta Package activation
[SWS_UCM_00028]	Software Package Authentication
[SWS_UCM_00029]	Consistency Check of Manifest
[SWS_UCM_00031]	
[SWS_UCM_00032]	
[SWS_UCM_00038]	





Number	Heading
[SWS_UCM_00039]	
[SWS_UCM_00040]	
[SWS_UCM_00044]	
[SWS_UCM_00069]	Report information on Software Packages
[SWS_UCM_00071]	
[SWS_UCM_00073]	
[SWS_UCM_00077]	
[SWS_UCM_00078]	
[SWS_UCM_00079]	
[SWS_UCM_00084]	Entering the kActivating state of Package Management
[SWS_UCM_00085]	Entering the kActivated state of Package Management
[SWS_UCM_00088]	Preparation of data transfer
[SWS_UCM_00092]	Software Package integrity
[SWS_UCM_00098]	Software Package Authentication failure
[SWS_UCM_00107]	Activated state
[SWS_UCM_00110]	Rolling-back the software update
[SWS_UCM_00111]	Entering the kRolled-Back state
[SWS_UCM_00112]	Software Cluster and version
[SWS_UCM_00115]	History
[SWS_UCM_00126]	Entering the kRolling-Back state after a Rollback call
[SWS_UCM_00130]	Software Cluster and version error
[SWS_UCM_00131]	
[SWS_UCM_00132]	
[SWS_UCM_00133]	
[SWS_UCM_00134]	
[SWS_UCM_00135]	
[SWS_UCM_00136]	
[SWS_UCM_00137]	Processing several update Software Packages
[SWS_UCM_00145]	Sequential order of data transfer
[SWS_UCM_00147]	Return to the Idle state from Cleaning-up state
[SWS_UCM_00148]	Transfer sequence order
[SWS_UCM_00149]	Return to the Idle state from Processing state
[SWS_UCM_00151]	Entering the Ready state of Package Management after a Cancel call
[SWS_UCM_00153]	Action in kActivating state of Package Management
[SWS_UCM_00154]	Entering the Verifying state of Package Management
[SWS_UCM_00155]	Entering the kRolling-Back state after a failure in the kVerifying state
[SWS_UCM_00158]	Cleanup of interrupted actions
[SWS_UCM_00162]	Entering the Cleaning-up state after a RevertProcessedSwPackages call
[SWS_UCM_00165]	Processing from stream





Number	Heading
[SWS_UCM_00166]	Processing from stream state
[SWS_UCM_00167]	Cancelling streamed packages
[SWS_UCM_00168]	Transferring while processing from stream
[SWS_UCM_00169]	Finishing transfer while processing from stream
[SWS_UCM_00173]	
[SWS_UCM_00174]	
[SWS_UCM_00175]	
[SWS_UCM_00176]	
[SWS_UCM_00177]	
[SWS_UCM_00178]	
[SWS_UCM_00179]	
[SWS_UCM_00180]	
[SWS_UCM_00181]	
[SWS_UCM_00182]	
[SWS_UCM_00183]	
[SWS_UCM_00210]	Transferring of software packages on <code>kProcessing</code> state
[SWS_UCM_01003]	<code>UCM Master</code> checks states of <code>UCM</code> subordinates
[SWS_UCM_01006]	Start transfer of a <code>Vehicle Package</code> to <code>UCM Master</code>
[SWS_UCM_01007]	Start transfer of a <code>Software Package</code> to <code>UCM Master</code>
[SWS_UCM_01008]	Transfer data of a <code>Vehicle Package</code> or <code>Software Package</code> to <code>UCM Master</code>
[SWS_UCM_01009]	Exit the transfer of a <code>Vehicle Package</code> or <code>Software Package</code> to <code>UCM Master</code>
[SWS_UCM_01010]	Delete a <code>Vehicle Package</code> transferred to <code>UCM Master</code>
[SWS_UCM_01101]	Provide information of installed <code>Software Clusters</code> in vehicle
[SWS_UCM_01102]	Get information of available <code>Software Clusters</code> in <code>Backend</code>
[SWS_UCM_01103]	Inform <code>Backend</code> of needed <code>Software Clusters</code> for an update
[SWS_UCM_01105]	Interaction of <code>UCM Master</code> with <code>Vehicle Driver</code>
[SWS_UCM_01107]	<code>UCM Master</code> provides progress information to <code>Vehicle Driver</code>
[SWS_UCM_01109]	<code>UCM Master</code> provides a safety policy interface
[SWS_UCM_01110]	<code>UCM Master</code> <code>SafetyState</code> method
[SWS_UCM_01114]	
[SWS_UCM_01177]	
[SWS_UCM_01203]	<code>CampaignState</code> field
[SWS_UCM_01207]	Trigger on <code>kSoftwarePackage_Transferring</code> state
[SWS_UCM_01221]	Transition from <code>kVehiclePackageTransferring</code> state to <code>kIdle</code> state
[SWS_UCM_01222]	Transition from <code>kVehiclePackageTransferring</code> state to <code>kSoftwarePackage_Transferring</code> state
[SWS_UCM_01227]	Transition from <code>kSoftwarePackage_Transferring</code> state to <code>kIdle</code> state





Number	Heading
[SWS_UCM_01228]	Transition from kSoftwarePackage_Transferring state to kProcessing state
[SWS_UCM_01229]	SafetyPolicy while processing stream
[SWS_UCM_01234]	Transition from kProcessing state to kActivating state
[SWS_UCM_01236]	Transition from kProcessing state to kIdle state
[SWS_UCM_01239]	Transition from kActivating state to kCancelling state
[SWS_UCM_01240]	Transition from kActivating state to kVehicleChecking state
[SWS_UCM_01244]	Cancellation of an update campaign shall be possible
[SWS_UCM_01245]	Cancellation during activation shall be possible
[SWS_UCM_01246]	Unreachable UCM during update campaign
[SWS_UCM_01247]	Method to read History Report
[SWS_UCM_01302]	Vehicle Package authentication failure
[SWS_UCM_01304]	Confidential information protection
[SWS_UCM_CON-STR_00001]	

Table E.5: Changed Traceables in R20-11

E.2.3 Deleted Traceables in R20-11

Number	Heading
[SWS_UCM_00011]	Updating persisted data
[SWS_UCM_00041]	LogLevelType table
[SWS_UCM_00042]	LogEntryType table
[SWS_UCM_00043]	LogVectorType table
[SWS_UCM_00082]	Exit from Processing state of Package Management
[SWS_UCM_00091]	Successful data transfer
[SWS_UCM_00096]	Entering the Rolled-back state
[SWS_UCM_00102]	Update state
[SWS_UCM_00105]	UCM confidential information handling
[SWS_UCM_00108]	Execution of the update software
[SWS_UCM_00113]	Rollback of persisted data
[SWS_UCM_00124]	Verify State
[SWS_UCM_00128]	
[SWS_UCM_00141]	UCM insufficient memory for parallel data transfer
[SWS_UCM_00142]	Prevent software from blocking the Rollback operation
[SWS_UCM_00143]	Log level setting
[SWS_UCM_00156]	Procurement of Checksum



△

Number	Heading
[SWS_UCM_00170]	Log message retrieving
[SWS_UCM_00171]	Log level changing
[SWS_UCM_00172]	Log messages removing
[SWS_UCM_01002]	UCM Master shall provide UCM services
[SWS_UCM_01106]	Exclusive use of Vehicle Driver Interface
[SWS_UCM_01108]	Unsupported safety policy by Vehicle driver interface
[SWS_UCM_01111]	Exclusive use of Vehicle State Manager
[SWS_UCM_01112]	Unsupported safety policy by Vehicle State Manager
[SWS_UCM_01113]	Switching vehicle into update mode
[SWS_UCM_01115]	VehicleStateManagerErrorDomain
[SWS_UCM_01116]	VehicleDriverApplicationErrorDomain
[SWS_UCM_01206]	Trigger on kTransferApproving state
[SWS_UCM_01208]	Trigger on kProcessApproving state
[SWS_UCM_01211]	Trigger on kActivateApproving state
[SWS_UCM_01223]	Transition from kVehiclePackageTransferring state to kTransferApproving state
[SWS_UCM_01224]	Transition from kTransferApproving state to kTransferring state
[SWS_UCM_01225]	Transition from kTransferApproving state to kIdle state
[SWS_UCM_01226]	Transition from kTransferring state to kTransferApproving state
[SWS_UCM_01230]	Transition from kTransferring state to kProcessApproving state
[SWS_UCM_01231]	Transition from kProcessApproving state to kProcessing state
[SWS_UCM_01232]	Transition from kProcessApproving state to kIdle state
[SWS_UCM_01233]	Transition from kProcessing state to kProcessApproving state
[SWS_UCM_01235]	Transition from kProcessing state to kActivateApproving state
[SWS_UCM_01237]	Transition from kActivateApproving state to kActivating state
[SWS_UCM_01238]	Transition from kActivateApproving state to kIdle state

Table E.6: Deleted Traceables in R20-11

E.2.4 Added Constraints in R20-11

none

E.2.5 Changed Constraints in R20-11

none

E.2.6 Deleted Constraints in R20-11

none

E.3 Constraint and Specification Item History of this document according to AUTOSAR Release R21-11.

E.3.1 Added Traceables in R21-11

Number	Heading
[SWS_UCM_00265]	state transition due to <code>ProcessSwPackage</code> error
[SWS_UCM_00266]	OperationNotPermitted error and UCM state
[SWS_UCM_00267]	Error when checksum is not recognised at processing time
[SWS_UCM_00268]	
[SWS_UCM_00269]	
[SWS_UCM_00270]	UCM internal state persistency
[SWS_UCM_00271]	Keeping history of failure error code
[SWS_UCM_00272]	Transfer block size
[SWS_UCM_00273]	Persistent data clean-up after Software Cluster update that removes a process
[SWS_UCM_00274]	UCM initialization
[SWS_UCM_00275]	<code>TransferData</code> error handling order
[SWS_UCM_00276]	<code>TransferExit</code> error handling order
[SWS_UCM_00277]	<code>ProcessSwPackage</code> error handling order
[SWS_UCM_00278]	<code>Cancel</code> error handling order
[SWS_UCM_00279]	<code>RevertProcessedSwPackages</code> error handling order
[SWS_UCM_00280]	<code>Activate</code> VerificationFailed
[SWS_UCM_00281]	<code>Activate</code> error handling order
[SWS_UCM_00282]	<code>Rollback</code> error handling order
[SWS_UCM_00283]	<code>DeleteTransfer</code> error handling order
[SWS_UCM_00285]	Removing or updating a <code>Software Cluster</code> not existing in the <code>Machine</code>
[SWS_UCM_00286]	<code>Software Cluster</code> life-cycle state transition from <code>kRemoved</code> to <code>kPresent</code> in case of <code>Finish</code> call
[SWS_UCM_00287]	End of <code>Software Cluster</code> life-cycle state from state <code>kAdded</code> in case of <code>Finish</code> call
[SWS_UCM_00288]	
[SWS_UCM_00289]	<code>TransferData</code> TransferFailed
[SWS_UCM_01018]	<code>TransferVehiclePackage</code> BusyWithCampaign
[SWS_UCM_01019]	UCM Master initialization
[SWS_UCM_01135]	Get Software Clusters descriptions from a vehicle
[SWS_UCM_01136]	
[SWS_UCM_01137]	
[SWS_UCM_01138]	
[SWS_UCM_01272]	<code>VehicleCheck</code> call not permitted
[SWS_UCM_01273]	<code>CancelCampaign</code> <code>CancelFailed</code> error





Number	Heading
[SWS_UCM_01274]	CancelCampaign OperationNotPermitted error
[SWS_UCM_-CONSTR_00012]	
[SWS_UCM_-CONSTR_00013]	Confidential information protection
[SWS_UCM_-CONSTR_00014]	Software Package and Software Cluster shortNames
[SWS_UCM_-CONSTR_00015]	Trigger on kVehicleChecking state

Table E.7: Added Traceables in R21-11

E.3.2 Changed Traceables in R21-11

Number	Heading
[SWS_UCM_00004]	Report software information
[SWS_UCM_00009]	UCM exposing its identifier
[SWS_UCM_00017]	Sequential Software Package Processing
[SWS_UCM_00020]	Finishing the packages activation
[SWS_UCM_00030]	Report changes
[SWS_UCM_00039]	
[SWS_UCM_00044]	
[SWS_UCM_00078]	
[SWS_UCM_00080]	Idle state of Package Management
[SWS_UCM_00081]	Processing state of Package Management
[SWS_UCM_00083]	Entering the Ready state of Package Management after a successful processing operation
[SWS_UCM_00084]	Entering the kActivating state of Package Management
[SWS_UCM_00085]	Entering the kActivated state of Package Management
[SWS_UCM_00092]	Software Package integrity
[SWS_UCM_00103]	Update to older Software Cluster version than currently present
[SWS_UCM_00104]	Integrity Check of processed Package
[SWS_UCM_00107]	Activated state
[SWS_UCM_00110]	Rolling-back the software update
[SWS_UCM_00111]	Entering the kRollingBack state
[SWS_UCM_00115]	History
[SWS_UCM_00126]	Entering the kRollingBack state after a Rollback call
[SWS_UCM_00127]	Finishing update sequence
[SWS_UCM_00130]	Software Cluster and version error





Number	Heading
[SWS_UCM_00131]	
[SWS_UCM_00133]	
[SWS_UCM_00134]	
[SWS_UCM_00136]	
[SWS_UCM_00146]	Entering the Cleaning-up state after a Finish call
[SWS_UCM_00147]	Return to the Idle state from Cleaning-up state
[SWS_UCM_00149]	Return to the Idle state from Processing state
[SWS_UCM_00151]	Entering the Ready state of Package Management after a Cancel call
[SWS_UCM_00152]	Entering the Ready state of Package Management after a missing dependency
[SWS_UCM_00153]	Action in kActivating state of Package Management
[SWS_UCM_00154]	Entering the Verifying state of Package Management
[SWS_UCM_00155]	Entering the kRolling-Back state after a failure in the kVerifying state
[SWS_UCM_00162]	Entering the Cleaning-up state after a <code>RevertProcessedSwPackages</code> call
[SWS_UCM_00163]	Action in Cleaning-up state
[SWS_UCM_00164]	Cleaning up of Software Packages
[SWS_UCM_00166]	Processing from stream state
[SWS_UCM_00167]	Cancelling streamed packages
[SWS_UCM_00168]	Transferring while processing from stream
[SWS_UCM_00169]	Finishing transfer while processing from stream
[SWS_UCM_00176]	
[SWS_UCM_00181]	
[SWS_UCM_00182]	
[SWS_UCM_00183]	
[SWS_UCM_00185]	Provide <code>SoftwareCluster</code> general information
[SWS_UCM_00186]	
[SWS_UCM_00190]	Reinstallation of older <code>Software Cluster</code> version than previously removed
[SWS_UCM_00191]	<code>Software Cluster</code> life-cycle state <code>kAdded</code>
[SWS_UCM_00192]	<code>Software Cluster</code> life-cycle state transition from <code>kAdded</code> to <code>kPresent</code>
[SWS_UCM_00193]	<code>Software Cluster</code> life-cycle state transition from <code>kUpdated</code> to <code>kPresent</code>
[SWS_UCM_00194]	<code>Software Cluster</code> life-cycle state transition from <code>kRemoved</code> to <code>kPresent</code> in case of <code>RevertProcessedSwPackages</code> call
[SWS_UCM_00195]	<code>Software Cluster</code> life-cycle state <code>kUpdated</code>
[SWS_UCM_00196]	<code>Software Cluster</code> life-cycle state <code>kRemoved</code>
[SWS_UCM_00197]	End of <code>Software Cluster</code> life-cycle state from state <code>kAdded</code> in case of <code>RevertProcessedSwPackages</code> call
[SWS_UCM_00198]	End of <code>Software Cluster</code> life-cycle state from state <code>kRemoved</code>
[SWS_UCM_00200]	Failing authentication





Number	Heading
[SWS_UCM_00209]	TransferData PackageInconsistent
[SWS_UCM_00210]	Transferring of software packages on kProcessing state
[SWS_UCM_00213]	TransferExit InvalidPackageManifest
[SWS_UCM_00214]	DeleteTransfer InvalidTransferId
[SWS_UCM_00215]	DeleteTransfer OperationNotPermitted
[SWS_UCM_00220]	GetSwProcessProgress InvalidTransferId
[SWS_UCM_00237]	RevertProcessedSwPackages OperationNotPermitted
[SWS_UCM_00239]	Rollback OperationNotPermitted
[SWS_UCM_00240]	Finish OperationNotPermitted
[SWS_UCM_00241]	Activate OperationNotPermitted
[SWS_UCM_00242]	Activate PreActivationFailed
[SWS_UCM_00243]	Too big block size received by UCM
[SWS_UCM_00251]	
[SWS_UCM_00252]	
[SWS_UCM_00253]	
[SWS_UCM_00254]	
[SWS_UCM_00255]	
[SWS_UCM_00257]	Update session
[SWS_UCM_00258]	Update session rejected
[SWS_UCM_00259]	Ending the update session
[SWS_UCM_00260]	PrepareUpdate, VerifyUpdate and PrepareRollback orders
[SWS_UCM_00261]	PrepareUpdate, VerifyUpdate and PrepareRollback synchronous calls
[SWS_UCM_00262]	Update preparation rejected
[SWS_UCM_00263]	Update preparation failure
[SWS_UCM_00264]	Update verification rejected
[SWS_UCM_01003]	UCM Master checks states of UCM subordinates
[SWS_UCM_01011]	TransferVehiclePackage InsufficientMemory
[SWS_UCM_01015]	Invalid Vehicle Package manifest
[SWS_UCM_01016]	Invalid Package Manifest
[SWS_UCM_01103]	Inform Backend of needed Software Packages for an update
[SWS_UCM_01109]	UCM Master provides a safety interface
[SWS_UCM_01114]	
[SWS_UCM_01117]	UCM Master SafetyState field
[SWS_UCM_01118]	UCM Master waiting for vehicle driver approval
[SWS_UCM_01132]	PDUIoCtl(PDU_IOCTL_START_MSG_FILTER), PDUIoCtl(PDU_IOCTL_CLEAR_MSG_FILTER), PDUIoCtl(PDU_IOCTL_STOP_MSG_FILTER)
[SWS_UCM_01203]	CampaignState field
[SWS_UCM_01204]	Initial state





Number	Heading
[SWS_UCM_01207]	Trigger on <i>kSoftwarePackage_Transferring</i> state
[SWS_UCM_01209]	Trigger on <i>kProcessing</i> state
[SWS_UCM_01212]	Trigger on <i>kActivating</i> state
[SWS_UCM_01214]	Final action on <i>kVehicleChecking</i> state
[SWS_UCM_01215]	Trigger on <i>kCancelling</i> state
[SWS_UCM_01216]	Final action on <i>kCancelling</i> state
[SWS_UCM_01217]	Monitoring of UCM subordinates
[SWS_UCM_01218]	Transition from <i>kIdle</i> state to <i>kSyncing</i> state
[SWS_UCM_01219]	Transition from <i>kSyncing</i> state to <i>kIdle</i> state
[SWS_UCM_01220]	Transition from <i>kIdle</i> state to <i>kVehiclePackageTransferring</i> state
[SWS_UCM_01221]	Transition from <i>kVehiclePackageTransferring</i> state to <i>kIdle</i> state
[SWS_UCM_01222]	Transition from <i>kVehiclePackageTransferring</i> state to <i>kSoftwarePackage_Transferring</i> state
[SWS_UCM_01227]	Transition from <i>kSoftwarePackage_Transferring</i> state to <i>kIdle</i> state
[SWS_UCM_01228]	Transition from <i>kSoftwarePackage_Transferring</i> state to <i>kProcessing</i> state
[SWS_UCM_01229]	SafetyConditions while processing stream
[SWS_UCM_01234]	Transition from <i>kProcessing</i> state to <i>kActivating</i> state
[SWS_UCM_01236]	Transition from <i>kProcessing</i> state to <i>kCancelling</i> state
[SWS_UCM_01239]	Transition from <i>kActivating</i> state to <i>kCancelling</i> state
[SWS_UCM_01240]	Transition from <i>kActivating</i> state to <i>kVehicleChecking</i> state
[SWS_UCM_01241]	Transition from <i>kVehicleChecking</i> state to <i>kCancelling</i> state
[SWS_UCM_01242]	Transition from <i>kVehicleChecking</i> state to <i>kIdle</i> state
[SWS_UCM_01243]	Transition from <i>kCancelling</i> state to <i>kIdle</i> state
[SWS_UCM_01244]	Cancellation of an update campaign shall be possible
[SWS_UCM_01246]	Unreachable UCM during update campaign
[SWS_UCM_01247]	Method to read History Report
[SWS_UCM_01265]	TransferState field
[SWS_UCM_01270]	New campaign disabling
[SWS_UCM_-CONSTR_00002]	UCM confidential information handling
[SWS_UCM_-CONSTR_00004]	Unsupported safety by Vehicle driver interface
[SWS_UCM_-CONSTR_00005]	Safety state change
[SWS_UCM_-CONSTR_00006]	Exclusive use of Vehicle State Manager
[SWS_UCM_-CONSTR_00007]	Unsupported safety conditions by Vehicle State Manager
[SWS_UCM_-CONSTR_00008]	Switching vehicle into update mode





Number	Heading
[SWS_UCM_-CONSTR_00009]	Safety condition change

Table E.8: Changed Traceables in R21-11

E.3.3 Deleted Traceables in R21-11

Number	Heading
[SWS_UCM_00093]	Transfer sequence
[SWS_UCM_00201]	Delta Package dependency error
[SWS_UCM_00211]	TransferData TransferInterrupted
[SWS_UCM_00230]	ProcessSwPackage AuthenticationFailed
[SWS_UCM_00232]	ProcessSwPackage
[SWS_UCM_00233]	Cancel Operation CancelFailed
[SWS_UCM_00250]	TransferData AuthenticationFailed
[SWS_UCM_01001]	UCM Master processes Vehicle Package
[SWS_UCM_01004]	Only one UCM Master shall be active per network domain
[SWS_UCM_01006]	Start transfer of a Vehicle Package to UCM Master
[SWS_UCM_01007]	Start transfer of a Software Package to UCM Master
[SWS_UCM_01008]	Transfer data of a Vehicle Package or Software Package to UCM Master
[SWS_UCM_01009]	Exit the transfer of a Vehicle Package or Software Package to UCM Master
[SWS_UCM_01010]	Delete a Vehicle Package transferred to UCM Master
[SWS_UCM_01012]	TransferVehiclePackage InsufficientComputationPower
[SWS_UCM_01102]	Get information of available Software Clusters in Backend
[SWS_UCM_01213]	Trigger on kVehicleChecking state
[SWS_UCM_01245]	Cancellation during activation shall be possible
[SWS_UCM_01304]	Confidential information protection
[SWS_UCM_-CONSTR_00010]	UCM Client update sequence

Table E.9: Deleted Traceables in R21-11

E.3.4 Added Constraints in R21-11

none

E.3.5 Changed Constraints in R21-11

none

E.3.6 Deleted Constraints in R21-11

none