

<b>Document Title</b>	Adaptive Platform Release Overview
<b>Document Owner</b>	AUTOSAR
<b>Document Responsibility</b>	AUTOSAR
<b>Document Identification No</b>	782

<b>Document Status</b>	published
<b>Part of AUTOSAR Standard</b>	Adaptive Platform
<b>Part of Standard Release</b>	R22-11

<b>Document Change History</b>			
<b>Date</b>	<b>Release</b>	<b>Changed by</b>	<b>Description</b>
2022-11-24	R22-11	AUTOSAR Release Management	Release Life Cycle Status: R22-11 is in Evolution, R22-11 supersedes R21-11

## **Disclaimer**

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

# Contents

1	Introduction	6
1.1	Scope of this document	6
1.2	Terminology and Licenses	6
1.2.1	Terminology statement	6
1.2.2	Usage of W3C XML schema	6
1.3	AUTOSAR Standards	7
1.3.1	Introduction	7
1.3.2	Definition	7
1.3.3	Overview on AUTOSAR's Standards	8
1.3.3.1	Adaptive Platform	8
1.3.3.2	Classic Platform	8
1.3.3.3	Foundation	8
1.3.4	Naming scheme for files and specification items	8
1.3.5	Dependencies between Standards	9
1.3.6	Dependencies to other Standards	9
1.4	Release Numbering and Life Cycle	10
1.4.1	Release life cycle of a major release	10
1.4.2	Life cycle states of specification items and requirements	10
1.4.3	Platform release number	11
1.4.4	Internal release number	11
1.4.5	Overview of AUTOSAR releases and corresponding AUTOSAR schema versions	11
1.5	Introduction to the Adaptive Platform	12
1.5.1	Release strategy	12
1.5.2	Parallel validation of specification via implementation	13
1.5.3	Specification depth	14
1.6	Content of chapters	14
2	Summary of changes	15
2.1	Release R22-11	15
2.1.1	Concepts	15
2.1.1.1	Introduced Concepts	15
2.1.1.2	Impact of Concepts	16
2.1.1.3	Validated Concepts	18
2.1.2	Specifications	18
2.1.2.1	New Specifications	18
2.1.2.2	Migrated Specifications	19
2.1.2.3	Obsolete Specifications	19
2.1.2.4	Removed Specifications	19
2.1.2.5	Reworked Specifications	19
2.1.2.6	Moved Specification parts	19
2.1.2.7	Renamed Specifications	19
2.1.2.8	Life Cycle State of Metamodel	20
2.1.3	Release Documentation	20

2.2	History information in AUTOSAR	20
3	Specification overview	21
4	Remarks to known technical deficiencies	24
4.1	Specification of Platform Health Management (UID 851, SWS)	24
4.2	Specification of Time Synchronization (UID 880, SWS)	26
4.3	Specification of Update and Configuration Management (UID 888, SWS)	27
4.4	Specification of State Management (UID 908, SWS)	27
4.5	Specification of Language Binding for modeled AP data types (UID 994, SWS)	28
5	Release history	29
5.1	Release R22-11	29

## References

- [1] Standardization Template  
AUTOSAR\_TPS\_StandardizationTemplate
- [2] Requirements on Manifest Specification  
AUTOSAR\_RS\_ManifestSpecification

# 1 Introduction

## 1.1 Scope of this document

This document provides an overview of the AUTOSAR standard Adaptive Platform release R22-11.

## 1.2 Terminology and Licenses

### 1.2.1 Terminology statement

AUTOSAR has identified a use of previously common terminology that can be considered oppressive or racist, such as master/slave and black/white list, or in other contexts such as gender or age as harmful connotations. AUTOSAR has started a discussion with all the working groups to replace these terms. AUTOSAR is committed to provide all specification documents without these terminology in the coming and future releases. Nevertheless, it may take several releases before the terms are completely replaced, as AUTOSAR has to continue its operations and thousands of pages of existing specifications have to be reviewed and updated in parallel.

### 1.2.2 Usage of W3C XML schema

The AUTOSAR XML Schema requires the XML namespace definition file `xml.xsd`.

There are several occurrences of the "xml.xsd" file within this release. For all occurrences the W3C license applies which can be found on <https://www.w3.org/Consortium/Legal/2015/copyright-software-and-document>.

#### License

By obtaining and/or copying this work, you (the licensee) agree that you have read, understood, and will comply with the following terms and conditions.

Permission to copy, modify, and distribute this work, with or without modification, for any purpose and without fee or royalty is hereby granted, provided that you include the following on ALL copies of the work or portions thereof, including modifications:

The full text of this NOTICE in a location viewable to users of the redistributed or derivative work. Any pre-existing intellectual property disclaimers, notices, or terms and conditions. If none exist, the W3C Software and Document Short Notice should be included. Notice of any changes or modifications, through a copyright statement on the new code or document such as "This software or document includes material copied from or derived from [title and URI of the W3C document]. Copyright © [YEAR] W3C® (MIT, ERCIM, Keio, Beihang)."

#### Disclaimers

THIS WORK IS PROVIDED “AS IS,” AND COPYRIGHT HOLDERS MAKE NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE OR DOCUMENT WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS.

COPYRIGHT HOLDERS WILL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF ANY USE OF THE SOFTWARE OR DOCUMENT.

The name and trademarks of copyright holders may NOT be used in advertising or publicity pertaining to the work without specific, written prior permission. Title to copyright in this work will at all times remain with copyright holders.

## **1.3 AUTOSAR Standards**

### **1.3.1 Introduction**

AUTOSAR addresses a wide range of use cases in automotive software development with its standards. These use cases have different requirements and lead to different technical solutions.

Packaging its deliverables into different "standards"

- eases the access to AUTOSAR solutions for users and
- allows AUTOSAR to scale with market needs.

### **1.3.2 Definition**

An AUTOSAR standard is a consistent set of AUTOSAR deliverables, which are released at the same time. AUTOSAR deliverables can, but are not limited to be of the following kinds:

- textual explanations
- textual specifications
- test specifications
- source code
- other formal or semi-formal textual formats (e.g., ARXML, UML models, XML Schemata)

At the time of release, AUTOSAR ensures that dependencies are fulfilled.

### 1.3.3 Overview on AUTOSAR's Standards

AUTOSAR delivers the following standards:

Standard	Abbreviation
Adaptive Platform	AP
Classic Platform	CP
Foundation	FO

#### 1.3.3.1 Adaptive Platform

The Adaptive Platform is AUTOSAR's solution for high-performance computing ECUs to build safety-related systems for use cases such as highly automated and autonomous driving.

#### 1.3.3.2 Classic Platform

The Classic Platform is AUTOSAR's solution for embedded systems with hard real-time and safety constraints.

#### 1.3.3.3 Foundation

The purpose of the Foundation standard is to enforce interoperability between the AUTOSAR platforms.

Foundation contains the generic artifacts that are common for AP and CP to ensure compatibility between

- Classic- and Adaptive Platform
- Non-AUTOSAR platforms to AUTOSAR platforms

### 1.3.4 Naming scheme for files and specification items

AUTOSAR is in the course of extending the naming scheme for files and specification items. The objective is to consistently include the AUTOSAR Standard to which the file or specification item belongs in the name. This addition also provides namespaces for the three AUTOSAR Standards and avoids conflicting names for specifications on the same topic in different AUTOSAR Standards. According to the new naming scheme, the abbreviation of the AUTOSAR Standard (AP, CP or FO) is added as first part of specification item IDs and as second part of file names. For details, please refer to [1].



From R22-11 onwards, specification items in newly introduced specifications follow the new naming scheme. In R22-11, file names are not yet changed.

From R23-11 onwards, the names of all files that are part of the release will follow the new naming scheme.

The IDs of existing specification items are not changed to avoid issues and migrations for AUTOSAR Partners that use these IDs internally.

### 1.3.5 Dependencies between Standards

Each release of Classic and Adaptive Platform relies on a dedicated version of Foundation. The specific dependency is documented in chapter [1.4.5](#).

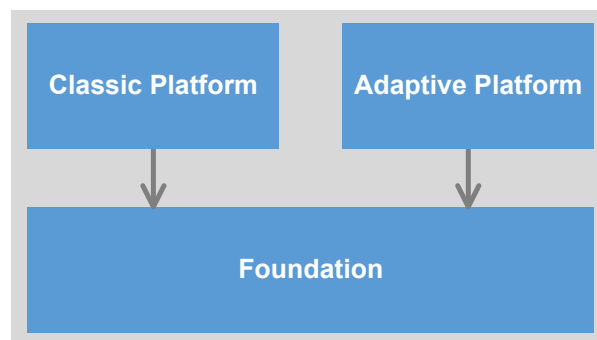


Figure 1.1: Dependencies of AUTOSAR Standards

### 1.3.6 Dependencies to other Standards

This release of the Adaptive Platform depends on the standard Foundation in release R22-11, which

- defines protocols implemented by Adaptive Platform
- contains the project objectives and the common requirements from which the features of the Adaptive Platform are derived
- contains common specification parts which apply to both, the Adaptive Platform and the Classic Platform

These dependencies are refined in the trace information of the requirements in the respective specifications.

## 1.4 Release Numbering and Life Cycle

### 1.4.1 Release life cycle of a major release

Each major release goes through four consecutive steps within its life cycle (examples based on the internal release numbering scheme):

1. Development: Between start of life cycle and the initial release (e.g., R4.0.1)
2. Evolution: Following the initial release with zero, one or several minor releases and/or revisions (e.g., R4.0.2, R4.1.1)
3. Maintenance: No new content is added to a major release but only maintenance of the existing content with zero, one or several revisions (e.g., R3.2.2) is provided
4. Issue Notice: No more revisions but zero, one or several issue notices, i.e., updates of the list of known issues until end of life cycle.

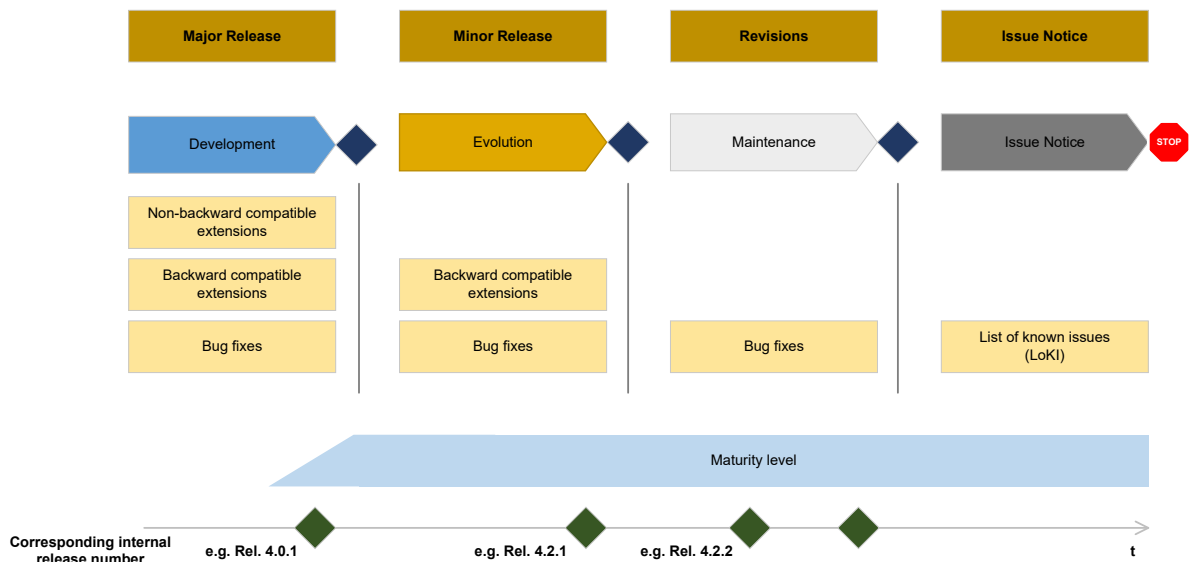


Figure 1.2: Life cycle model of AUTOSAR standards

### 1.4.2 Life cycle states of specification items and requirements

The life cycle state of a specification item is found after the specification item ID surrounded by curly brackets. The states are:

- {Valid}: This indicates that the related entity is a valid part of the document. This is the default and also applies if no dedicated life cycle status is annotated for the related entity.

- {Draft}: This indicates that the related entity is newly introduced but still experimental. This information is published but is subject to change without backward compatibility guarantee.
- {Obsolete}: This indicates that the related entity is subject to be removed in one of the following releases without further notice.

The life cycle state of a requirement is found in the attribute "type". The states are the same as the specification item states.

### 1.4.3 Platform release number

AUTOSAR applies a four-digit numbering scheme Ryy-mm to identify releases. The identifiers "yy" and "mm" depict the year and month of the release date, e.g., R20-11 for the November 2020 release.

### 1.4.4 Internal release number

AUTOSAR additionally maintains an internal release number for different purposes (e.g., usage in BSW modules in Classic Platform).

The internal release number is used for all platforms and follows up on the Classic Platform release number. In Adaptive Platform this is newly introduced. In Foundation this leads to a discontinuation of the former numbering pattern (e.g., R1.5.0).

A mapping list between Platform Releases and corresponding internal release numbers can be found in chapter [1.4.5](#). The internal release number uses a three-digit numbering scheme R<major>.<minor>.<revision> to identify releases. Its primary purpose is to identify a release as

- a major release: Valid and draft specification parts may be changed backward incompatibly.
- a minor release: Valid specification parts may only be changed backward compatibly. Draft specification parts may be changed backward incompatibly.
- a revision: Does not contain extensions but only backward compatible bugfixes.

### 1.4.5 Overview of AUTOSAR releases and corresponding AUTOSAR schema versions

Until the Releases CP R4.4.0 and AP R19-03, AUTOSAR released the platforms separately where a Foundation release went along with each platform release. Since compatibility between the platforms is essential to be able to have AP and CP ECUs within one vehicle project, an XML schema needs to be available that works with the different releases. The following table gives an overview about the different schema versions and the corresponding platform releases they can be used for.

The AUTOSAR schema does not have an impact on the Foundation. The Foundation releases are mentioned for the sake of completeness.

Schema Version	Classic Platform release	Adaptive Platform release	Foundation release
AUTOSAR_00042	R4.3.0	R17-03	R1.1.0
AUTOSAR_00043	R4.3.0	R17-10	R1.2.0
AUTOSAR_00044	R4.3.1	R17-10	R1.3.0
AUTOSAR_00045	R4.3.1	R18-03	R1.4.0
AUTOSAR_00046	R4.4.0	R18-10	R1.5.0
AUTOSAR_00047	R4.4.0	R19-03	R1.5.1

Starting with release R19-11, all platforms are released as one AUTOSAR release and therefore come along with one schema version.

Schema Version	Platform release	Internal release number
AUTOSAR_00048	R19-11	R4.5.0
AUTOSAR_00049	R20-11	R4.6.0
AUTOSAR_00050	R21-11	R4.7.0
<b>AUTOSAR_00051</b>	<b>R22-11</b>	<b>R4.8.0</b>

According to the release life cycle of AUTOSAR the release R22-11 is a minor release.

## 1.5 Introduction to the Adaptive Platform

The AUTOSAR Adaptive Platform is the standardized platform for microprocessor-based ECUs supporting use cases like highly automated driving as well as high speed on-board and off-board communication.

The Adaptive Platform differs in a number of aspects from the standardization approach of the Classic Platform:

- Parallel validation of specification via software implementation
- Specification of functional clusters instead of modules

### 1.5.1 Release strategy

The Adaptive Platform has changed its life cycle state to "Evolution" according to AUTOSAR's life cycle model for its standards (as depicted in chapter 1.4.1). Since R19-11, AUTOSAR releases the Adaptive Platform together with the Classic Platform and Foundation in a yearly cycle. The life cycle state "Evolution" implies that users of the Adaptive Platform have a guarantee on backward compatibility for certain parts of the specifications. The differentiation is handled by the life cycle state of the requirements and specification items according to chapter 1.4.2.

### 1.5.2 Parallel validation of specification via implementation

The Adaptive Platform is partially validated through an AUTOSAR-internal implementation: the Adaptive Platform Demonstrator. The Demonstrator release is available to all the partners and can provide further details to understand the underlying concepts of the Adaptive Platform. The Adaptive Platform Demonstrator is an exemplary implementation of the Adaptive Platform specifications. All further usage based on the Demonstrator (e.g. in production) will become the responsibility of the respective partner. For legal constraints see the dedicated paragraphs in the Development Agreement.

For the current releases, the Demonstrator software implementation has undergone only informal reviews with no strict quality assurance. AUTOSAR is increasing the quality assurance significantly to ensure the quality criteria given by the project.

The Demonstrator comes with traceability up to the specifications to document the validation aspect.

Additionally AUTOSAR develops System Test specifications and implementation to support the test of the demonstrator implementation against the AUTOSAR requirements. These tests are also part of the release.

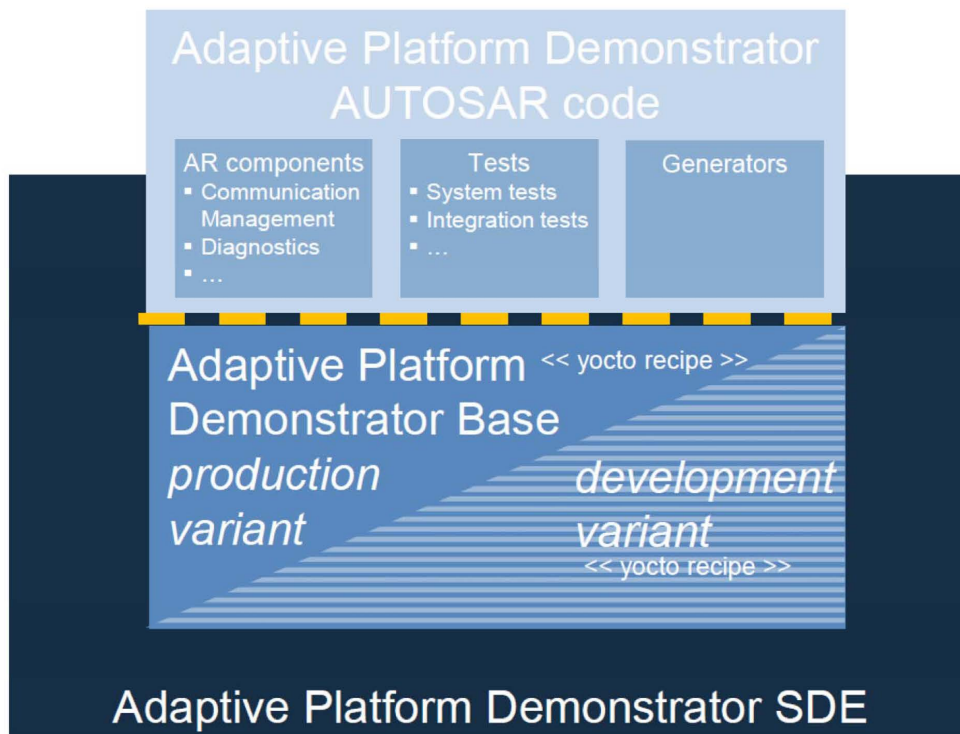


Figure 1.3: Overview of the AUTOSAR Adaptive Platform Demonstrator

### 1.5.3 Specification depth

Based on the development history of the Classic Platform, AUTOSAR has decided to specify functional clusters instead of a specific software architecture to provide the implementers with options to find efficient solutions for the standardized features.

## 1.6 Content of chapters

This document is structured as follows:

- Chapter 1 provides an introduction to AUTOSAR's release strategy, the Adaptive Platform and its standardization approach.
- Chapter 2 provides a summary of changes since the previous release of the Adaptive Platform.
- Chapter 3 contains the overview of specifications comprising the release R22-11. This chapter is structured according to the clusters of AUTOSAR release R22-11.
- Chapter 4 contains remarks about known technical deficiencies.
- Chapter 5 contains the detailed release history of all released specifications.

## 2 Summary of changes

This chapter contains a summary of changes which have been implemented since the previous release R22-11.

### 2.1 Release R22-11

Several concepts affecting the Adaptive Platform have been introduced with release R22-11 thereby adding functionality to the platform.

Additionally one concept targets the Classic and Adaptive Platform, strengthening the interaction between the two platforms.

#### 2.1.1 Concepts

##### 2.1.1.1 Introduced Concepts

The following concepts in [2.1.1.1.1](#) - [2.1.1.1.5](#) have been introduced.

##### 2.1.1.1.1 MACsec

Media Access Controller Security (MACsec) and MACsec Key Agreement (MKA) protocols:

The concept defines and includes in AUTOSAR the Modules needed for using and configuring the security protocol in Layer 2 MACsec and its related Key Agreement Protocol MKA.

Focuses on the authentication method, secret keys agreement protocol (MKA), as well as the methods, rules, and configuration related to the protected communication (extra Header (SecTAG), extra Check Value (ICV), cryptography sets (Cypher Suites), bypass rules (VLAN-ID, EthTyp)).

##### 2.1.1.1.2 CAN XL

The CAN XL concept adds the improved capabilities of the next generation of CAN to AUTOSAR, e.g., a data rate up to 20MBit/s, increased frame size of up to 2048 Bytes, the introduction of a virtual separation with a Virtual CAN ID (VCID) similar to a VLAN and the possibility to transmit Ethernet frames over a physical CAN network.

### 2.1.1.1.3 Firewall

The concept introduces a firewall to inspect and filter Ethernet traffic based on pre-defined firewall rules. The firewall supports stateless packet inspection, stateful packet inspection and deep packet inspection as well as rate-based filtering of network packets. Furthermore, the firewall supports also the Intrusion Detection System by raising Security Events to the IdsM.

### 2.1.1.1.4 Service Oriented Vehicle Diagnostics

SOVD (Service-oriented Vehicle Diagnostics) allows the usage of the "ASAM SOVD" standard in the context of AUTOSAR Adaptive. This covers the use cases for HCP diagnostics as well as the UDS adapter to access ECUs using AUTOSAR Classic.

### 2.1.1.1.5 SOME/IP Harmonization

The concept SOME/IP Harmonization will clean-up the SOME/IP specification for all AUTOSAR Platforms (FO, CP, AP), by removing duplicate content and aligning contradicting specifications related documents. The current concept part is harmonizing the documents PRS\_SOMEIPServiceDiscoveryProtocol and SWS\_CommunicationManagement.

### 2.1.1.2 Impact of Concepts

The introduced concepts had impact on several specifications. The following table provides a detailed overview.

Please note that some of the specifications are marked by special text formatting:

- Specifications in **bold** font are completely new specifications originating from the particular concept.
- Specifications in *italic* font are affected indirectly as they provide artifacts for the actually impacted specifications.

Concept Name	Specification Long Name	Standard	Concept Lifecycle
MACsec	<b>Requirements on MACsec</b>	Foundation	draft
	Specification of Manifest	Adaptive Platform	
	Explanation of ara::com API		
	Specification of Communication Management		
	System Template	Classic Platform	







Concept Name	Specification Long Name	Standard	Concept Lifecycle
	<b>Specification of MACsec Key Agreement</b>		
	Specification of Ethernet Transceiver Driver		
	Specification of Ethernet Switch Driver		
	Specification of Ethernet Interface		
	Layered Software Architecture		
	List of Basic Software Modules		
CAN XL	Main Requirements	Foundation	valid
	Glossary		
	Specification of Manifest	Adaptive Platform	
	System Template	Classic Platform	
	Requirements on CAN		
	Specification of CAN Driver		
	Specification of CAN Interface		
	<b>Specification for CANXL driver functionality to provide additional required interfaces</b>		
	<b>Specification for CANXL transceiver driver functionality to provide additional required interfaces</b>		
	Specification of Ethernet Interface		
	Specification of ECU Configuration		
	System Template		
	Requirements on Bus Mirroring		
	Specification of Bus Mirroring		
	Requirements on Ethernet Support in AUTOSAR		
	Specification of CAN Transceiver Driver		
	Specification of TCP/IP Stack		
	Specification of Cellular Vehicle-2-X Driver		
	Specification of Ethernet Driver		
	Specification of Wireless Ethernet Driver		
List of Basic Software Modules			
Layered Software Architecture			
Firewall	Main Requirements	Foundation	draft





Concept Name	Specification Long Name	Standard	Concept Lifecycle
	<b>Requirements on Firewall</b>	Adaptive Platform	
	Glossary		
	Explanation of Adaptive Platform Design		
	Explanation of Adaptive Platform Software Architecture		
	<b>Specification of Firewall in Adaptive Platform</b>		
	Specification of Manifest		
Service Oriented Vehicle Diagnostics	Requirements on Diagnostics	Foundation	draft
	<b>Explanation of Service Oriented Vehicle Diagnostics</b>	Adaptive Platform	
	Specification of Manifest		
	Requirements on Manifest Specification		
	Specification of Diagnostics		
	Diagnostic Extract Template	Classic Platform	
SOME/IP Harmonization	SOME/IP Service Discovery Protocol Specification	Foundation	draft
	Specification of Communication Management	Adaptive Platform	

**Table 2.1: Impact of Concepts**

### 2.1.1.3 Validated Concepts

The following concepts have been validated:

- CAN XL

## 2.1.2 Specifications

### 2.1.2.1 New Specifications

The following new specifications have been introduced via concepts:

- Specification of Firewall in Adaptive Platform (UID 1063, SWS)
- Explanation of Service Oriented Vehicle Diagnostics (UID 1064, EXP)

In addition to the above listed new specifications, the following documents have been added with R22-11:

- none

### 2.1.2.2 Migrated Specifications

With this release, the following specifications have been moved from AUTOSAR Adaptive Platform to the AUTOSAR Foundation standard:

- Explanation of Safety Overview (UID 895, EXP)

### 2.1.2.3 Obsolete Specifications

The following specification has been set to status "obsolete" in this release:

- Guidelines for the use of the C++14 language in critical and safety-related systems (UID 839, RS)

### 2.1.2.4 Removed Specifications

The following specification has been set to status "removed" in this release:

- Specification of RESTful Communication (UID 876, SWS)

### 2.1.2.5 Reworked Specifications

The following specifications have been changed fundamentally in R22-11

- none

### 2.1.2.6 Moved Specification parts

The following specification parts have been moved to other documents in R22-11.

- Requirements on Security Management for Adaptive Platform (UID 881, RS) to Explanation of Security Overview (UID 1077, EXP)
- Explanation of Adaptive Platform Software Architectural Decisions (UID 983, EXP) to Explanation of Adaptive and Classic Platform Software Architectural Decisions (UID 1078, EXP)

### 2.1.2.7 Renamed Specifications

The following specification has been renamed in this release:

- none

### 2.1.2.8 Life Cycle State of Metamodel

The life cycle of several Adaptive Platform elements in the Metamodel were kept in "draft" until release R21-11. Due to increasing market demands to keep AUTOSAR's XML schema stable, these parts of the model have been set to "valid" in this release. This has an impact on the TPS\_Manifest specification [2].

Please be aware that according to [1], only the life cycle states "valid" and "candidate" are used within the Metamodel.

### 2.1.3 Release Documentation

There are no major changes in the Release Documentation.

## 2.2 History information in AUTOSAR

The following diagram shows the location of documentation of changes.

The Change Documentation is also available for Adaptive Platform since release R20-11.

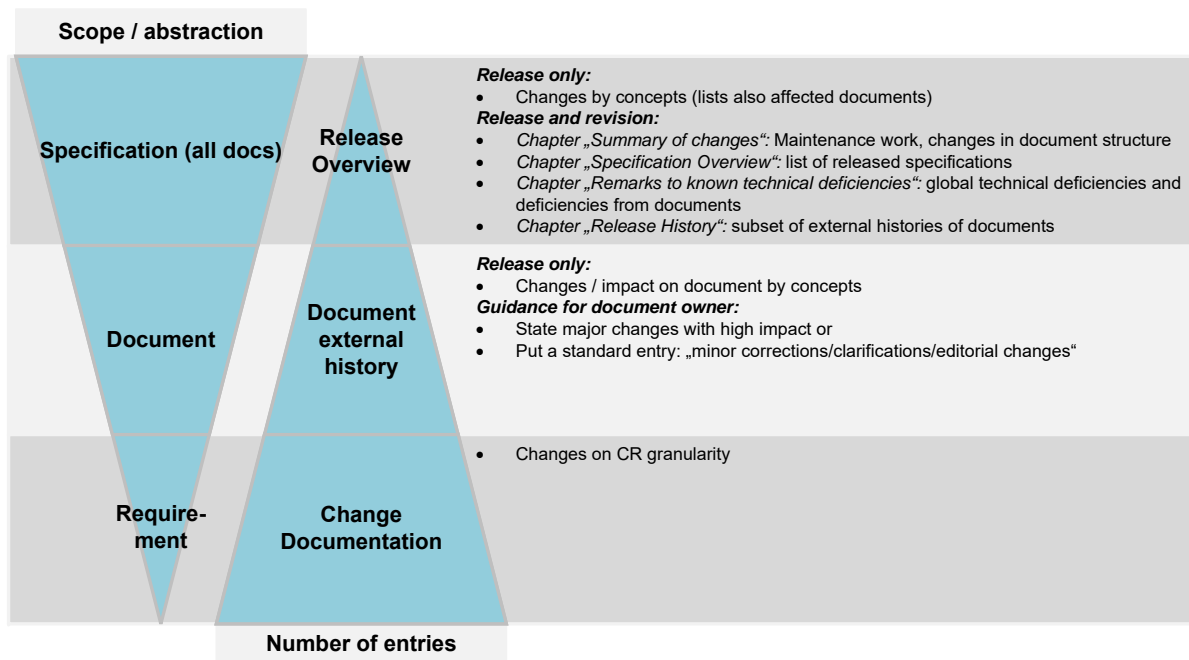


Figure 2.1: History information in AUTOSAR

### 3 Specification overview

The published specifications are divided into the clusters

- Release Documentation
- Adaptive Foundation
- Adaptive Services
- General
- Methodology and Manifests

The assignment of the specifications to these clusters is shown below.

Long Name	File Name	Life cycle changes
<b>Release Documentation</b>		
Adaptive Platform Release Overview	AUTOSAR_TR_AdaptivePlatformReleaseOverview	
AUTOSAR Adaptive Platform Specification Hashes	AUTOSAR_TR_AdaptivePlatformSpecificationHashes	
<b>Adaptive Foundation</b>		
Explanation of ara::com API	AUTOSAR_EXP_ARAComAPI	
Explanation of IPsec Implementation Guidelines	AUTOSAR_EXP_IPsecImplementationGuidelines	
Explanation of Service Oriented Vehicle Diagnostics	AUTOSAR_EXP_SOVD	Initial release
Integration of DDS Security	AUTOSAR_TR_DDSSecurityIntegration	
Requirements on Communication Management	AUTOSAR_RS_CommunicationManagement	
Requirements on Cryptography	AUTOSAR_RS_Cryptography	
Requirements on Execution Management	AUTOSAR_RS_ExecutionManagement	
Requirements on Identity and Access Management	AUTOSAR_RS_IdentityAndAccessManagement	
Requirements on Operating System Interface	AUTOSAR_RS_OperatingSystemInterface	
Requirements on Persistency	AUTOSAR_RS_Persistency	
Requirements on Platform Health Management	AUTOSAR_RS_PlatformHealthManagement	
Specification of Adaptive Platform Core	AUTOSAR_SWS_AdaptivePlatformCore	
Specification of Communication Management	AUTOSAR_SWS_CommunicationManagement	
Specification of Cryptography	AUTOSAR_SWS_Cryptography	
Specification of Diagnostics	AUTOSAR_SWS_Diagnostics	
Specification of Execution Management	AUTOSAR_SWS_ExecutionManagement	
Specification of Firewall in Adaptive Platform	AUTOSAR_SWS_AdaptivePlatformFirewall	Initial release





Long Name	File Name	Life cycle changes
Specification of Identity and Access Management	AUTOSAR_SWS_IdentityAndAccessManagement	
Specification of Intrusion Detection System Manager for Adaptive Platform	AUTOSAR_SWS_AdaptiveIntrusion-DetectionSystemManager	
Specification of Language Binding for modeled AP data types	AUTOSAR_SWS_LanguageBinding-ForModeledAPdatatypes	
Specification of Log and Trace	AUTOSAR_SWS_LogAndTrace	
Specification of Operating System Interface	AUTOSAR_SWS_OperatingSystemInterface	
Specification of Persistency	AUTOSAR_SWS_Persistency	
Specification of Platform Health Management	AUTOSAR_SWS_PlatformHealthManagement	
Specification of Time Synchronization	AUTOSAR_SWS_TimeSynchronization	
<b>Adaptive Services</b>		
Explanation of Sensor Interfaces	AUTOSAR_EXP_SensorInterfaces	
Requirements of State Management	AUTOSAR_RS_StateManagement	
Requirements on Automated Driving Interfaces	AUTOSAR_RS_AutomatedDrivingInterfaces	
Requirements on Update and Configuration Management	AUTOSAR_RS_UpdateAndConfigurationManagement	
Specification of Network Management	AUTOSAR_SWS_NetworkManagement	
Specification of Sensor Interfaces	AUTOSAR_SWS_SensorInterfaces	
Specification of State Management	AUTOSAR_SWS_StateManagement	
Specification of Update and Configuration Management	AUTOSAR_SWS_UpdateAndConfigurationManagement	
<b>General</b>		
Design guidelines for using parallel processing technologies on Adaptive Platform	AUTOSAR_EXP_ParallelProcessingGuidelines	
Explanation of Adaptive Platform Design	AUTOSAR_EXP_PlatformDesign	
Explanation of Adaptive Platform Software Architecture	AUTOSAR_EXP_SWArchitecture	
List of Adaptive Platform Functional Clusters	AUTOSAR_TR_FunctionalClusterShortnames	
General Requirements specific to Adaptive Platform	AUTOSAR_RS_General	
Guidelines for the use of the C++14 language in critical and safety-related systems	AUTOSAR_RS_CPP14Guidelines	obsolete
Guidelines for using Adaptive Platform interfaces	AUTOSAR_EXP_AdaptivePlatformInterfacesGuidelines	
System Tests of Adaptive Platform	AUTOSAR_TR_AdaptivePlatformSystemTests	
<b>Methodology and Manifests</b>		
Collection of blueprints for AUTOSAR Adaptive Platform M1 models	AUTOSAR_MOD_AdaptivePlatformGeneralBlueprints	
Methodology for Adaptive Platform	AUTOSAR_TR_AdaptiveMethodology	
Requirements on Manifest Specification	AUTOSAR_RS_ManifestSpecification	





Long Name	File Name	Life cycle changes
Specification of Manifest	AUTOSAR_TPS_ManifestSpecification	
Specification of Platform Types for Adaptive Platform	AUTOSAR_SWS_AdaptivePlatformTypes	
Specification of Timing Extension for Adaptive Platform	AUTOSAR_TPS_AdaptivePlatformTimingExtensions	

**Table 3.1: Specification Overview**

## 4 Remarks to known technical deficiencies

The technical deficiencies per specification are - if applicable - mentioned inside the respective specification in a chapter "Known Limitations" located after the table of contents.

The following technical deficiencies are to be mentioned, where clicking on the section reference will bring you to the respective document:

Document UID	Long Name	Document Type	Section Reference
851	Specification of Platform Health Management	SWS	<a href="#">4.1</a>
880	Specification of Time Synchronization	SWS	<a href="#">4.2</a>
888	Specification of Update and Configuration Management	SWS	<a href="#">4.3</a>
908	Specification of State Management	SWS	<a href="#">4.4</a>
994	Specification of Language Binding for modeled AP data types	SWS	<a href="#">4.5</a>

### 4.1 Specification of Platform Health Management (UID 851, SWS)

- Daisy chaining (i.e. forwarding Supervision Status, Checkpoint or Health Channel information to an entity external to PHM or another PHM instance) is currently not supported in this document release
- Interface with the Diagnostic Manager is not specified in this release
- The configuration attribute for the alive notification cycle time (with respect to PHM sending AliveNotification to watchdog interface) is not specified for this release.
- A change in the value of Supervision (Alive/Deadline/Logical) configuration parameters between two Function Group states wherein the process being supervised continues to execute on switching between these states is not considered. The Supervision continues as per configuration in the Supervision Mode corresponding to old Function Group state.
- Similar to above limitation, dynamic change between Supervision exclusion (disable) and Supervision inclusion (enable) on Function Group state change wherein the process under consideration continues to execute on change in Function Group state is not supported. Supervision exclusion or inclusion can be applied starting with the Function Group state in which execution of the process begins and the same is applied until termination of the process
- Currently specified mechanism of Notifying State Management on Global Supervision Status reaching state kStopped is insufficient in case of multiple failures. It could happen that the Global Supervision Status remains in state kStopped without further notification to State Management about successive failures. Thereby the recovery might be hindered



- "PowerMode" dependent Supervision configuration is not supported in this release
- Supervision is not supported for non-reporting processes. Rationale: Supervision depends on process states. Non-reporting process is not expected to report its Execution State to Execution Management. Hence, Platform Health Management cannot be informed about the necessary process states by Execution Management
- Handling of multiple hardware watchdog instances is up to implementation and not standardized in the specification.
- State machine of Elementary Supervision Status is not specified for inter process supervisions (inter process Deadline Supervision and Logical Supervision) in this release.
- The feature Health Channels (HealthChannelExternalStatus) will remain as "obsolete" in this release.

Note: It is not intended to remove this feature from AUTOSAR Adaptive Platform overall (due to clear industry use cases). Rather, it is an architectural question (to which Functional Cluster this feature belongs to) that is expected to be resolved for the next release:

- SWS\_PHM\_00010
- SWS\_PHM\_01328
- SWS\_PHM\_01329
- SWS\_PHM\_01330
- SWS\_PHM\_00102
- SWS\_PHM\_01113
- SWS\_PHM\_01114
- SWS\_PHM\_01115
- SWS\_PHM\_01118
- SWS\_PHM\_01119
- SWS\_PHM\_01129
- SWS\_PHM\_01122
- SWS\_PHM\_01139
- SWS\_PHM\_00457
- SWS\_PHM\_01222
- SWS\_PHM\_01224
- SWS\_PHM\_01128

- SWS\_PHM\_01221
- SWS\_PHM\_01223
- SWS\_PHM\_01225
- SWS\_PHM\_01231
- SWS\_PHM\_01233
- SWS\_PHM\_01234
- SWS\_PHM\_01235
- SWS\_PHM\_01236
- SWS\_PHM\_01232
- SWS\_PHM\_01237
- SWS\_PHM\_01238
- SWS\_PHM\_01239

## 4.2 Specification of Time Synchronization (UID 880, SWS)

### Known limitations

The Time Synchronization module is bound to Adaptive Platform Systems.

- Configuration  
Please refer to the corresponding model elements.
- Time Gateway  
Time Gateway functionality is currently not in scope of the Time Synchronization module for the Adaptive Platform.
- Out of Scope  
Errors, which occurred during Global Time establishment and which are not caused by the module itself (i.e. loss of PTP global time is not an issue of the TS but of the TSP modules) are out of the scope of this module.
- Security  
Secured Time Synchronization using the AUTOSAR Sub-TLV: Time Authenticated (see PRS-TimeSync [1]) is currently not supported for the Adaptive Platform.  
Note: Secured Time Synchronization messages received in AP ECUs works without verifying the security measures (i.e., AUTOSAR Sub-TLV:Time Authenticated is ignored).

### **4.3 Specification of Update and Configuration Management (UID 888, SWS)**

UCM is not responsible to initiate the update process. UCM realizes a service interface to achieve this operation. The user of this service interface is responsible to verify that the vehicle is in a updatable state before executing a software update procedure on demand. It is also in the responsibility of the user to communicate with other AUTOSAR Adaptive Platforms or AUTOSAR Classic Platforms within the vehicle. The UCM receives a locally available software package for processing. The software package is usually downloaded from the OEM backend. The download of the software packages has to be done by another application, i.e. UCM does not manage the connection to the OEM backend. Prior to triggering their processing, the software packages have to be transferred to UCM by using the provided ara::com interface. The UCM update process is designed to cover updates on use case with single AUTOSAR Adaptive Platform. UCM can update Adaptive Applications, the AUTOSAR Adaptive Platform itself, including all functional clusters and the underlying OS.

The UCM is not responsible for enforcing authentication and access control to the provided interfaces. The document currently does not provide any mechanism for the confidentiality protection as well as measures against denial of service attacks. The assumption is that the platform preserves the integrity of parameters exchanged between UCM and its user.

The possibility to restart a specific application instead of a Machine reboot depends of the kind of update and application, is therefore implementation specific and is defined in the Software Package manifest.

UCM does only support updates of ARA::COM and UDS (ISO-14229) compliant ECUs. UCM is not controlling any action done by diagnostic tool directly updating a Classic platform. For instance UCM cannot protect against downgrading of a Software Cluster in a Classic platform by a diagnostic tool.

### **4.4 Specification of State Management (UID 908, SWS)**

The State Machine API is a subject for rework in a future release.

## **4.5 Specification of Language Binding for modeled AP data types (UID 994, SWS)**

Although future versions of this specification may add further Language Bindings, the primary focus of the AP (and therefore this specification) is a binding to the C++ language.

## 5 Release history

### 5.1 Release R22-11

Name	Specification history entry
Adaptive Platform Release Overview	<ul style="list-style-type: none"> <li>Release Life Cycle Status: R22-11 is in Evolution, R22-11 supersedes R21-11</li> </ul>
Design guidelines for using parallel processing technologies on Adaptive Platform	<ul style="list-style-type: none"> <li>No content changes</li> </ul>
Explanation of Adaptive Platform Design	<ul style="list-style-type: none"> <li>A new chapter Firewall</li> <li>Introduction of State Machine in the State Management chapter</li> <li>Minor updates in Platform Health Management, E2E-Protection, Persistency, Update and</li> <li>Configuration Management and Diagnostics chapters</li> </ul>
Explanation of Adaptive Platform Software Architecture	<ul style="list-style-type: none"> <li>Added an initial version of the Use Case View that shows the main use cases for the Functional Clusters of the AUTOSAR Adaptive Platform.</li> <li>Reworked the Runtime View to show a proposed internal realization of the use cases in the Use Case View by means of interaction diagrams.</li> <li>Added functional cluster Firewall</li> </ul>
Explanation of ara::com API	<ul style="list-style-type: none"> <li>Fully reworked version of this document.</li> <li>Added new Tutorials chapter.</li> </ul>
Explanation of IPsec Implementation Guidelines	<ul style="list-style-type: none"> <li>No content changes</li> </ul>
Explanation of Sensor Interfaces	<ul style="list-style-type: none"> <li>No content changes</li> </ul>
Explanation of Service Oriented Vehicle Diagnostics	<ul style="list-style-type: none"> <li>Initial release</li> </ul>
General Requirements specific to Adaptive Platform	<ul style="list-style-type: none"> <li>Naming conventions for L&amp;T Context ID added</li> <li>Clarifications</li> <li>Uptracing to RS Main fixed</li> </ul>
Guidelines for the use of the C++14 language in critical and safety-related systems	<ul style="list-style-type: none"> <li>Added the obsolete statement</li> </ul>
Guidelines for using Adaptive Platform interfaces	<ul style="list-style-type: none"> <li>A new chapter - Update and Configuraiton Management</li> </ul>
Integration of DDS Security	<ul style="list-style-type: none"> <li>No content changes</li> </ul>
List of Adaptive Platform Functional Clusters	<ul style="list-style-type: none"> <li>New Functional Cluster: Firewall</li> <li>Predefined Log&amp;Trace Context IDs added</li> </ul>
Methodology for Adaptive Platform	<ul style="list-style-type: none"> <li>Consolidate the usage of Glossary</li> </ul>
Requirements of State Management	<ul style="list-style-type: none"> <li>Added requirements regarding functional safety</li> </ul>
Requirements on Automated Driving Interfaces	<ul style="list-style-type: none"> <li>Editorials clean up</li> </ul>
Requirements on Communication Management	<ul style="list-style-type: none"> <li>Added security requirements</li> <li>Static service connection</li> <li>Editorial change</li> </ul>
Requirements on Cryptography	<ul style="list-style-type: none"> <li>No content changes</li> <li>Editorial changes and rephrasing</li> </ul>
Requirements on Execution Management	<ul style="list-style-type: none"> <li>Added: RS_EM_00151</li> <li>Changed uptraces to RS_SAF requirements</li> </ul>





Name	Specification history entry
Requirements on Identity and Access Management	<ul style="list-style-type: none"> <li>Updated (req. text): RS_IAM_00017</li> </ul>
Requirements on Manifest Specification	<ul style="list-style-type: none"> <li>Added requirement for Å SOVD</li> </ul>
Requirements on Operating System Interface	<ul style="list-style-type: none"> <li>Changed RS_OSI_00103 to point to RS_Main_00060</li> </ul>
Requirements on Persistency	<ul style="list-style-type: none"> <li>Improved tracing RS Safety and RS Main</li> </ul>
Requirements on Platform Health Management	<ul style="list-style-type: none"> <li>Added RS_PHM_00114, RS_PHM_00115, RS_PHM_00116 and RS_PHM_00117</li> <li>Modified RS_PHM_00111 (Replaced Local Supervision with Elementary Supervision)</li> <li>Cleanup of requirement trace</li> </ul>
Requirements on Update and Configuration Management	<ul style="list-style-type: none"> <li>Updated tracing to RS_SAF document</li> </ul>
Specification of Adaptive Platform Core	<ul style="list-style-type: none"> <li>Extend ara::core::Abort to allow multiple arguments</li> <li>Add support for registering multiple AbortHandlers</li> <li>Merge header files of ara::core::Future and ara::core::Promise into a single one</li> <li>Add full specification of ara::core::String and ara::core::BasicString</li> <li>Forbid user extensions of standardized AUTOSAR namespaces</li> </ul>
Specification of Communication Management	<ul style="list-style-type: none"> <li>Added Static Service Connections</li> <li>Added new API for ServiceStates</li> <li>Clarified shutdown behavior for the Communication Management</li> <li>Added specification of data types SampleType and FieldType</li> <li>Added support for MACSec Secure Communication channels</li> <li>Harmonization with PRS SOME/IP ServiceDiscovery Protocol document</li> <li>Clarified Error codes for Fields, and E2E Error Handling</li> <li>Replaced usage of SamplePtr for RawDataStreams</li> <li>Editorial changes and bugfixes</li> </ul>
Specification of Cryptography	<ul style="list-style-type: none"> <li>Added: <ul style="list-style-type: none"> <li>SWS_CRYPT_40984</li> <li>SWS_CRYPT_40985</li> </ul> </li> <li>Updated: <ul style="list-style-type: none"> <li>SWS_CRYPT_00502</li> <li>SWS_CRYPT_00503</li> <li>SWS_CRYPT_40983</li> <li>SWS_CRYPT_01820</li> <li>SWS_CRYPT_01821</li> <li>SWS_CRYPT_00919</li> <li>SWS_CRYPT_03303</li> <li>SWS_CRYPT_03305</li> <li>SWS_CRYPT_04204</li> </ul> </li> </ul>





Name	Specification history entry
	<ul style="list-style-type: none"> <li>- SWS_CRYPT_01821</li> <li>- SWS_CRYPT_00919</li> <li>• Updated API:               <ul style="list-style-type: none"> <li>- SWS_CRYPT_40981</li> <li>- SWS_CRYPT_20746</li> <li>- SWS_CRYPT_21115</li> <li>- SWS_CRYPT_21312</li> <li>- SWS_CRYPT_22711</li> <li>- SWS_CRYPT_23012</li> <li>- SWS_CRYPT_23013</li> <li>- SWS_CRYPT_23014</li> </ul> </li> <li>• Editorial changes</li> </ul>
Specification of Diagnostics	<ul style="list-style-type: none"> <li>• Document quality improvement and fixing bugs</li> <li>• Incorporated Quality Scope Review Findings</li> <li>• Introduced DTC suppressed feature</li> <li>• Standardize mapping of vendor specific error codes to UDS Error codes</li> <li>• Introduced 0x38 RequestFileTransfer</li> <li>• Introduced SOVD Concept</li> </ul>
Specification of Execution Management	<ul style="list-style-type: none"> <li>• Clarification on error handling during Function Group State transition</li> <li>• Changes to ara::exec::ExecErrc</li> <li>• Clarification on interaction between Platform Health Management and Execution Management</li> </ul>
Specification of Firewall in Adaptive Platform	<ul style="list-style-type: none"> <li>• Initial release</li> </ul>
Specification of Identity and Access Management	<ul style="list-style-type: none"> <li>• No content changes</li> </ul>
Specification of Intrusion Detection System Manager for Adaptive Platform	<ul style="list-style-type: none"> <li>• No content changes</li> </ul>
Specification of Language Binding for modeled AP data types	<ul style="list-style-type: none"> <li>• Specifications added regarding the descriptions of Allocator Usages</li> <li>• Specifications added regarding the supported Encodings for Strings</li> </ul>
Specification of Log and Trace	<ul style="list-style-type: none"> <li>• Specification of modeled messages finished</li> <li>• InstanceSpecifier introduced</li> <li>• Introduced optional fragmentation (segmentation) header</li> <li>• Privacy flags and message tags added</li> </ul>
Specification of Manifest	<ul style="list-style-type: none"> <li>• Support for MACsec</li> <li>• Support for firewall</li> <li>• Modeled State Management</li> <li>• Support for Service-oriented Vehicle</li> <li>• Diagnostic</li> <li>• minor corrections / clarifications / editorial changes</li> </ul>
Specification of Network Management	<ul style="list-style-type: none"> <li>• Added clarifications regarding Operational Modes</li> <li>• Several quality improvements</li> </ul>





Name	Specification history entry
Specification of Operating System Interface	<ul style="list-style-type: none"> <li>• No content changes</li> </ul>
Specification of Persistency	<ul style="list-style-type: none"> <li>• Fixed security and improved distribution of redundancy</li> <li>• Improved update scenarios, introducing data type migration</li> <li>• Improved handling of large data in Key-Value Storages</li> <li>• Extended and improved error handling, splitting kOutOfStorageSpace</li> </ul>
Specification of Platform Health Management	<ul style="list-style-type: none"> <li>• Replaced Local Supervision with Elementary Supervision</li> <li>• Rework of state machine for Global Supervision Status</li> <li>• Removed API GetGlobalSupervisionStatus() from class RecoveryAction</li> <li>• Introduction of PhmErrorDomain functions and PhmException</li> <li>• Specification of Start and Stop of Supervisions</li> </ul>
Specification of Platform Types for Adaptive Platform	<ul style="list-style-type: none"> <li>• editorial changes</li> </ul>
Specification of Sensor Interfaces	<ul style="list-style-type: none"> <li>• Editorials clean up</li> </ul>
Specification of State Management	<ul style="list-style-type: none"> <li>• Introduction of StateMachine design</li> <li>• Harmonized error codes for UpdateRequest interface</li> <li>• Fixed wrong description in UpdateRequest interface</li> <li>• Removed LastResetCause Interface</li> </ul>
Specification of Time Synchronization	<ul style="list-style-type: none"> <li>• Support for restorage of Global Time from persistent memory added</li> <li>• Several minor clarifications and corrections</li> </ul>
Specification of Timing Extension for Adaptive Platform	<ul style="list-style-type: none"> <li>• Added SL-LET feature</li> </ul>
Specification of Update and Configuration Management	<ul style="list-style-type: none"> <li>• Failing rollback clarifications</li> <li>• Campaign history type consolidated</li> <li>• Introduced production errors</li> </ul>
System Tests of Adaptive Platform	<ul style="list-style-type: none"> <li>• Changed test configurations</li> <li>• item Editorial changes</li> </ul>