

Document Title	Interoperability of AUTOSAR Tools
Document Owner	AUTOSAR
Document Responsibility	AUTOSAR
Document Identification No	204
Document Classification	Auxiliary

Document Status	Final
Part of AUTOSAR Release	4.2.2

	Document Change History		
Release	Changed by Description		
4.2.2	AUTOSAR Release Management	Minor corrections / clarifications / editorial changes; For details please refer to the ChangeDocumentation	
4.2.1	AUTOSAR Release Management	Minor corrections / clarifications / editorial changes; For details please refer to the BWCStatement	
4.1.2	AUTOSAR Release Management	Editorial changes	
4.1.1	AUTOSAR Administration	Add formal specification itemsSupport for the processor manifestSupport for roles and rights	
4.0.3	AUTOSAR Administration	 Editorial changes including tagged specification items Improved recommendation of usecases for AUTOSAR files Refined definition of XML serialization 	
3.1.4	AUTOSAR Administration	 Refined scope to AUTOSAR tools Added R4 aspects (Variant handling, splittable, relative reference) More details on XML serialization More details on error reporting More details on merging Removed requirements on AUTOSAR-Products (Meta-model and Schema) 	



3.1.1	AUTOSAR Administration	Legal disclaimer revised
3.0.1	AUTOSAR Administration	 Added description on how to merge models Removed dependencies to no longer existing documents Added requirements on extension mechanism Added requirements on handling / exchanging errors Document meta information extended Small layout adaptations made
2.1.15	AUTOSAR Administration	 NonSplitableElements are the minimum granularity of most AUTOSAR descriptions. In case a smaller granularity is required, the meta-model may explicitly define SplitableElements Legal disclaimer revised Release Notes added "Advice for users" revised "Revision Information" added
2.0	AUTOSAR Administration	Initial release



Disclaimer

This specification and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the specification.

The material contained in this specification is protected by copyright and other types of Intellectual Property Rights. The commercial exploitation of the material contained in this specification requires a license to such Intellectual Property Rights.

This specification may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the specification may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The AUTOSAR specifications have been developed for automotive applications only. They have neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

Advice for users

AUTOSAR specifications may contain exemplary items (exemplary reference models, "use cases", and/or references to exemplary technical solutions, devices, processes or software).

Any such exemplary items are contained in the specifications for illustration purposes only, and they themselves are not part of the AUTOSAR Standard. Neither their presence in such specifications, nor any later documentation of AUTOSAR conformance of products actually implementing such exemplary items, imply that intellectual property rights covering such exemplary items are licensed under the same rules as applicable to the AUTOSAR Standard.



Table of Contents

1	Introduction			10
	1.1 1.2 1.3 1.4	Origins and goal Document Conv	AUTOSAR Tools (non-normative)	11 14 15 16
2	Bas	ic Concepts		17
	2.1	2.1.1 Techn 2.1.2 Techn 2.1.3 Techn Abstraction leve 2.2.1 Physic 2.2.2 Data f 2.2.3 Conte 2.2.4 Sema 2.2.5 Prese	ation . ological Space: "meta-model"	17 19 20 21 21 22 22 23 24 24
3	Req	uirements on AUT		25
	3.1	3.1.1 Physic 3.1.1.1	OSAR XML data exchange cal level	25 26 26 27 27
		3.1.3.1 3.1.3.2 3.1.3.3 3.1.3.4 3.1.3.5 3.1.4 Sema 3.1.4.1 3.1.4.2	Authoring tool SHALL support well defined serialization nt level Authoring tool SHALL NOT change model contents without the intention of the user Authoring tool SHALL support exchange of partial information Authoring tool SHALL support AUTOSAR extension mechanism Authoring tool SHOULD maintain references Authoring tool SHOULD follow specified access rights ntic level Authoring tool SHALL support validity checks AUTOSAR tool SHALL support variants ntation level	28 29 33 34 34 35 35 36 36 36
	3.2		current modeling	36



	3.2.1	Detection	on of differences between models	38
	3.2.1.	.1	Authoring tool SHOULD provide a mechanism for	
			showing differences between AUTOSAR models	38
	3.2.1.	.2	Definition of differences	38
	3.2.1.		Definition of differences - aggregation	39
	3.2.1.	.4	Definition of differences - references	40
	3.2.1.		Algorithm for comparison of model elements	40
	3.2.1.		Authoring tool SHALL support unique identification	. •
	0.2.11		of model elements	41
	3.2.1.	7	Examples of differences between models (non nor-	• •
	0.2.1.		mative)	41
	3.2.2	Mergino	g models	45
	3.2.2.	•	Authoring tool SHALL be able to handle partial	70
			AUTOSAR models	45
	3.2.2.	.2	Authoring tool SHALL support the merging of AUTOSAR models	45
	3.2.2	3	AUTOSAR tool SHALL resolve references	46
	3.2.2.	_	Handling Conflicts	47
	3.2.2.		AUTOSAR tools SHALL accept double defined	.,
	0.2.2.	.0	ARElements as long as their nonSplitables are the	
			same	47
	3.2.2.	6	Handling merge conflicts: optimistic approach	47
	3.2.2.		Authoring tool SHOULD provide a mechanism for re-	47
	0.2.2.	. 1	solving merging conflicts	48
	3.2.2.	0	Handling merge conflicts: access control approach	48
	3.2.2.			40
	3.2.2.	.9	Authoring tool SHOULD prohibit the user from modi-	49
	2.00	10	fying model elements that are marked read-only	49
2.2	3.2.2.		Example on merging models	
3.3	3.3.1		OSAR models and related artifacts	51
	3.3.1		AR tool SHALL be able to interpret and create ASAM	го
0.4	NI		ner Catalog file for meta-data exchange	52
3.4	•		on of AUTOSAR XML description files	56
3.5	•		DSAR tools	57
	3.5.1	•	ements for predictable tool interoperability	58
	3.5.1.	.1	Documentation of AUTOSAR tool SHOULD describe	
			supported features	58
	3.5.2	-	ements on the integration of specialized tools	59
3.6	• • •		ent versions of the meta-model	59
	3.6.1		hanges in the meta-model	60
	3.6.2		hanges in the meta-model	62
	3.6.3		AR tool SHALL properly handle Meta-Model versions	63
	3.6.4		ng tool SHOULD support upgrading AUTOSAR models	63
3.7			oning of AUTOSAR models	64
	3.7.1		arity of AUTOSAR models	64
	3.7.2	Annota	tion of AUTOSAR model elements by version informa-	
		tion .		64



	3.8	Standard	lized error handling	64
		3.8.1	AUTOSAR tools SHALL perform a standardized error handling	64
		3.8.2	Error codes on semantic level	65
		3.8.3	Guidelines for standardized error reporting	66
		3.8.3		
			the locations of errors	66
		3.8.3		
		0.00	mation about errors	66
		3.8.3		67
	3.9	Doguiron	sages	68
	5.9	3.9.1	Meta-data for data exchange SHALL be based on existing	00
		0.0.1	standards and SHALL be defined by AUTOSAR	68
		3.9.2	Description of access rights SHOULD allow for being	00
			mapped to data structures that are different from the	
			AUTOSAR meta-model	69
		3.9.3	Meta-data for data exchange SHALL NOT change the con-	
			tent of AUTOSAR models	69
		3.9.4	Meta-data for data exchange SHOULD contain information	
			about errors in the model	70
		3.9.5	Meta-data for data exchange SHOULD contain information	
			about deleted, changed and moved elements	70
4	Con	pliance		72
	4.1	Summary	y of requirements on AUTOSAR tools	72
	4.2	-	compliance	73
		4.2.1	Compliance classes based on coverage of the meta-model .	73
		4.2.2	Testing the compliance of an AUTOSAR authoring tool	73
Α	Glos	sary		75
В	Histo	ory of Spec	ification Items	78
	B.1	History o	f Specification Items according to AUTOSAR R4.0.3	78
		B.1.1	Added Specification Items in R4.0.3	78
	B.2		f Specification Items according to AUTOSAR R4.1.1	79
	D 0	B.2.1	Added Specification Items in R4.1.1	79
	B.3		f Specification Items according to AUTOSAR R4.2.2	79
		B.3.1	Added Traceables in 4.2.2	79 79
		B.3.2 B.3.3	Changed Traceables in 4.2.2	79 79
		B.3.4	Added Constraints in 4.2.2	80
		B.3.5	Changed Constraints in 4.2.2	80
		B.3.6	Deleted Constraints in 4.2.2	80
С	Man			81
J	INICII	Mentioned Class Tables 81		



Known Limitations

- Requirements were not updated
- Chapter 4 (Compliance) is incomplete. It specifies aspects but not specific compliance criteria.



Bibliography

- [1] Requirements on Interoperability of AUTOSAR Tools AUTOSAR_RS_InteroperabilityOfAutosarTools
- [2] Methodology AUTOSAR_TR_Methodology
- [3] Generic Structure Template
 AUTOSAR_TPS_GenericStructureTemplate
- [4] Model Persistence Rules for XML AUTOSAR_TR_XMLPersistenceRules
- [5] Software Component Template
 AUTOSAR_TPS_SoftwareComponentTemplate
- [6] Specification of ECU Resource Template AUTOSAR_TPS_ECUResourceTemplate
- [7] System Template
 AUTOSAR_TPS_SystemTemplate
- [8] Basic Software Module Description Template AUTOSAR_TPS_BSWModuleDescriptionTemplate
- [9] Specification of ECU Configuration AUTOSAR TPS ECUConfiguration
- [10] Unified Modeling Language: Superstructure, Version 2.0, OMG Available Specification, ptc/05-07-04 http://www.omg.org/cgi-bin/apps/doc?formal/05-07-04.pdf
- [11] Unified Modeling Language OCL, Version 2.0, OMG Available Specification, ptc/05-06-06 http://www.omg.org/cgi-bin/apps/doc?ptc/05-06-06.pdf
- [12] Standardization Template
 AUTOSAR TPS StandardizationTemplate
- [13] Technological Spaces: an Initial Appraisal http://www.sciences.univ-nantes.fr/lina/atl/www/papers/PositionPaperKurtev.pdf
- [14] Extensible Markup Language (XML), v1.0 http://www.w3.org/TR/REC-xml/
- [15] XML Schema 1.0 http://www.w3.org/TR/xmlschema-1
- [16] Virtual Functional Bus AUTOSAR_EXP_VFB
- [17] Meta Model



AUTOSAR_MMOD_MetaModel

- [18] Container Catalog XML Model Specification http://www.asam.net
- [19] OASIS Web Site: TR 9401:1995 Entity Management http://www.oasis-open.org/specs/a401.htm
- [20] Software Process Engineering Meta-Model Specification http://www.omg.org/spec/SPEM/2.0/



1 Introduction

This document describes various aspects of interoperability of AUTOTSAR tools in order to

- support proper implementation of AUTOSAR data exchange
- contribute to (but not fulfill) requirements on AUTOSAR Tools
- specify more details about XML handling
- discuss essential aspects for tool interoperability
- provide more information about how to utilize particular Meta-Model concepts

The dependency relationships of this document are depicted in Figure 1.1.

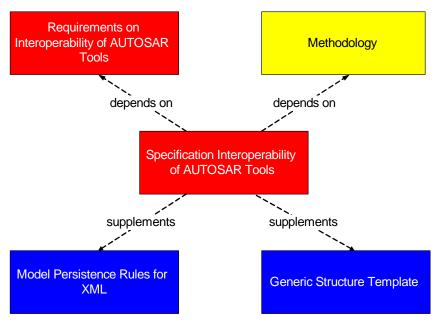


Figure 1.1: DocumentDependencies

According to Figure 1.1, this document depends on the "Requirements on Interoperability of Authoring Tools" [1] and the "Methodology" [2].

This document defines requirements on AUTOSAR tools. Thereby it supplements the document "Generic Structure Template" [3] and the document "Model Persistence Rules for XML" [4] under following aspects:

- "Model Persistence Rules for XML" describes the M2 aspects while "Interoperability of AUTOSAR tools" handles M1 (AUTOSAR XML description) aspects.
- "Generic Structure Template" describes meta-model facilities while "Interoperability of AUTOSAR tools" handles implementation specific aspects.



1.1 Classification of AUTOSAR Tools (non-normative)

The AUTOSAR methodology model [2] describes the major steps of a development of a system with AUTOSAR: From the system level to the generation of an ECU executable. It describes the dependencies of work products and tasks.

An AUTOSAR tool can support one or more tasks of the AUTOSAR methodology. In other words, the term *AUTOSAR Tool* refers to all tools that support the tasks of creation, modification and interpretation of AUTOSAR models which describe a system and its configuration as defined in e.g. the

- Generic Structure Template [3]
- Software-Component Template [5],
- ECU Resource Template [6],
- System Template [7],
- Basic Software Module Description Template [8],
- Specification of ECU Configuration [9],

Thus all AUTOSAR tools deal in some way with AUTOSAR XML descriptions (i.e. the XML representation of AUTOSAR models, see [4]). Depending on the nature of the interaction with XML, three kind of AUTOSAR tools can be distinguished, as depicted in Figure 1.2:

- AUTOSAR Importer Tools used to create AUTOSAR models (as XML descriptions) by importing non-AUTOSAR artifacts. Note that an importer tool may also be integrated in an AUTOSAR Authoring Tool.
- AUTOSAR Authoring Tools used to create and modify AUTOSAR models (as XML descriptions)
- AUTOSAR Converter Tools used to produce new AUTOSAR XML descriptions by converting information from existing ones
- AUTOSAR Processor Tools used to produce non-AUTOSAR artifacts by processing AUTOSAR XML descriptions



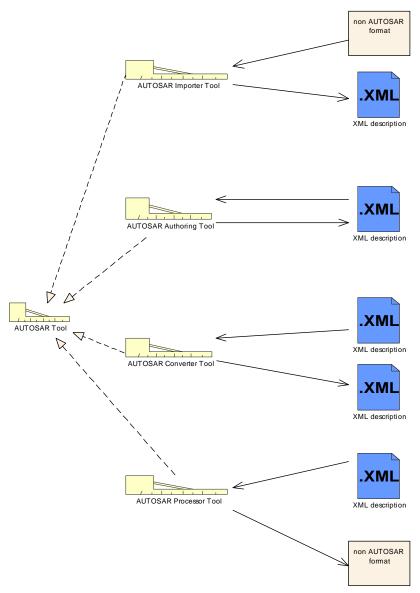


Figure 1.2: Categories of AUTOSAR Tools

A tool can also act as a combination of these three types, e.g. the RTE generator can produce code and XML descriptions (e.g. of its own implementation aspects) in one step, acting as a combination of a converter and a processor tool.

Since from these three types only the authoring can modify an already existing AUTOSAR model, in general most requirements for interoperability apply for authoring tools.

Figure 1.3 sketches some descriptions that can be maintained by AUTOSAR authoring tools within the AUTOSAR methodology (for a detailed description of the notation see [2]). The figure shows only some examples out of all the task which can be performed on these artifacts.



The formal description of AUTOSAR software-components does not include a complete formal description of the behavior of the software-component. The latter is intentionally left to dedicate Behavior Modeling Tools (BMT).

It is therefore necessary to bridge the gap between a software-component model and the corresponding behavior model created by a particular BMT. This task is carried out by the "Coupling Tool" mentioned in Figure 1.3.

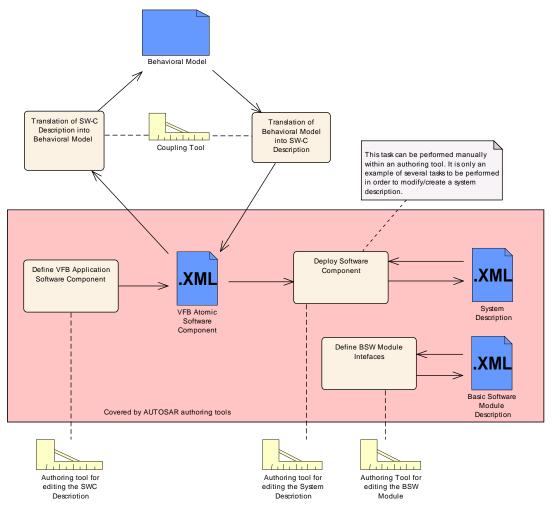


Figure 1.3: Examples for tasks of authoring tools including coupling between a Behavioral Model and AUTOSAR Models

Figure 1.4 shows some examples of "downstream" XML artifacts and tasks, i.e. those used to derive an ECU configuration out of a system description (this figure only gives a rough overview, for the full picture refer to [2]).

In order to create the downstream artifacts, converter tools come into play, also a combination of converter and authoring tools.



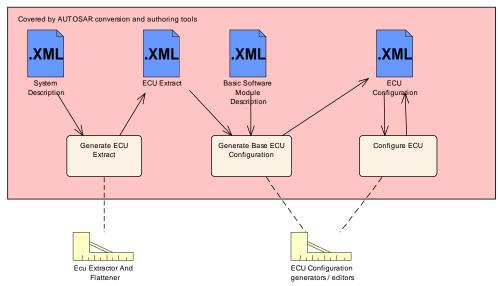


Figure 1.4: Examples for tasks of converter and authoring tools handling "downstream" artifacts

1.2 Origins and goals (non-normative)

Whenever data is exchanged between different parties they need to agree on a common understanding about the wording and the semantics. Otherwise there will be misunderstandings. This observation applies to communication between different tools as well.

AUTOSAR formally defines the structure and semantics of data by means of UML (Unified Modeling Language [10]) class diagrams, semantic constraints in the template specifications as well as by OCL (Object Constraint Language [11]).

In addition to a common data exchange language (specified by the AUTOSAR XML schema) further issues need to be considered in order to support a successful communication.

This document points out potential problems when exchanging models between different tools and companies and defines strategies on how these problems could be solved.

All requirements described in this document are summarized in chapter 4. These requirements relate to all AUTOSAR tools used to create or interpret AUTOSAR xml descriptions. Some requirements are specific to AUTOSAR authoring tools.

This document is structured as follows:

- Chapter 1 "Introduction" (this chapter) gives an overview of the documents that deal with AUTOSAR authoring tools.
- Chapter 1.4 "Requirements Tracing" lists the requirements on this document and associates the chapters where these requirements are addressed.



- Chapter 2 "Basic concepts" describes some basic concepts which are used in the following chapters.
 - Subchapter 2.1 "Data representation" explains the relationship between AUTOSAR template, AUTOSAR XML schema, AUTOSAR models, AUTOSAR XML descriptions, etc.
 - Subchapter 2.2 "Abstraction levels of information exchange" shall help to understand the tasks which need to be done when exchanging AUTOSAR models via XML. These tasks are illustrated by different levels. Note: These level are introduced as a concept. This does does not imply that each AUTOSAR tool must exactly implement this as its architecture.
- Chapter 3 "Requirements on AUTOSAR tools" explains aspects for tool interoperability and defines requirements on AUTOSAR tools. E.g.:
 - Integration of tools which do not support the full set of information defined in the meta-model: Those tools only need to import and export the information that can be internally represented.
 - Merging the results of the input information with the output exported by the authoring tool results in an updated overall model. All authoring tools are required to support this merge for the set of information that is internally supported.
 - Migration between different versions of the AUTOSAR meta-model: Each tool should support manual or automatic upgrades of AUTOSAR XML descriptions which were created with respect to the last major version of the AUTOSAR meta-model.
 - Support for concurrent modeling of AUTOSAR systems: e.g. each authoring tool should support working on incomplete AUTOSAR models. It should be possible to merge several AUTOSAR models together.
- Chapter 4 "Compliance" discusses the compliance of AUTOSAR tools and summarizes the requirements defined in this document: A tool may be called AUTOSAR compliant if it implements all mandatory requirements on AUTOSAR tools defined in this document.

Compliant tools should be able to be used within the AUTOSAR methodology. However, a seamless exchange of AUTOSAR XML descriptions between different tools is only possible if they support the same set of information.

1.3 Document Conventions

The representation of requirements in AUTOSAR documents follows the table specified in [TPS_STDT_00078], see Standardization Template, chapter Support for Traceability ([12]).



The verbal forms for the expression of obligation specified in [TPS_STDT_00053] shall be used to indicate requirements, see Standardization Template, chapter "Support for Traceability" ([12]).

1.4 Requirements Tracing

The following table references the use cases and requirements specified in [1] and links to the fulfillments of these.

Requirement	Description	Satisfied by
[RS_IOAT_00001]	Support data exchange	[TR_IOAT_00071] [TR_IOAT_00072]
[RS_IOAT_00002]	Standardize the handling of errors in	[TR_IOAT_00065]
	AUTOSAR models	
[RS_IOAT_00003]	Provide naming conventions	[TR_IOAT_00062] [TR_IOAT_00069]
[UC_IOAT_00001]	Integrate extracts from an AUTOSAR	[TR_IOAT_00035] [TR_IOAT_00063]
	model of an OEM passed for further	[TR_IOAT_00064]
	refinement and implementation to a	
	supplier	
[UC_IOAT_00002]	Dealing with changes of the AUTOSAR	[TR_IOAT_00005] [TR_IOAT_00066]
	meta model over time	[TR_IOAT_00075]
[UC_IOAT_00004]	Allowing for concurrent work on the	[TR_IOAT_00062] [TR_IOAT_00067]
	same mode	[TR_IOAT_00074]
[UC_IOAT_00005]	Usage within the different steps of	[TR_IOAT_00035] [TR_IOAT_00065]
	top-down functional development	
[UC_IOAT_00006]	Support for direct exchange of	[TR_IOAT_00065]
	AUTOSAR models in a tool-chain	
[UC_IOAT_00008]	An AUTOSAR model and related	[TR_IOAT_00036] [TR_IOAT_00062]
	artifacts are shipped from one party to	[TR_IOAT_00065] [TR_IOAT_00073]
	another.	[TR_IOAT_00075]
[UC_IOAT_00010]	Handling of identical double definitions	[TR_IOAT_00063] [TR_IOAT_00064]

Table 1.1: RequirementsTracing



2 Basic Concepts

[TR_IOAT_00071] Basic Concepts of Data Exchange ☐ This chapter is intended to provide the reader with a more detailed insight into the exchange of information among different AUTOSAR tools. AUTOSAR has chosen XML as a language for exchange of data between different AUTOSAR tools. Therefore AUTOSAR tools SHALL be able to interpret and create AUTOSAR XML descriptions. The following section describes the different data representations which will be used in AUTOSAR and clarifies the relationship between the AUTOSAR meta-model, XML and the internal data structure of AUTOSAR tools. Additionally, common tasks that an AUTOSAR authoring tool needs to perform are defined. ☐ (RS IOAT 00001)

2.1 Data representation

In a development process, many different tools with different representation of AUTOSAR models are used (Excel Sheets, Modeling Tools, UML, XML, etc.). Each tool and its underlying representation of data have their advantages and disadvantages. These tools and representations can be grouped into technological spaces.

A technological space is a working context with a set of associated concepts, body of knowledge, tools, required skills, and possibilities [13]. Examples for technological spaces which are used within AUTOSAR are: meta-model, XML and AUTOSAR authoring tools (see Figure 2.1).

Technological spaces (e.g. meta-model and XML) are no islands. There are bridges between several technological spaces. The deliverable "AUTOSAR Interaction with Behavioral Models" explains how the AUTOSAR meta-model and the AUTOSAR concepts can be mapped to behavioral models and back again. The document "AUTOSAR model persistence rules for XML" [4] for example defines how to map an AUTOSAR meta-model to a W3C XML Schema.

Using XML and UML within AUTOSAR combines the strength of both technological spaces:

- AUTOSAR defined templates for data that is exchanged in AUTOSAR. Since XML is widely accepted as a standard for representation and exchange of structured data it was chosen to be the basis for the exchange of AUTOSAR models.
- Due to the complexity of the data and its interrelationships a manual creation of a consistent AUTOSAR XML schema turned out to be time-consuming and error prone. In addition the expressive power of XML schema is not sufficient for expressing content related constraints between data entities.
- Therefore a meta-model based approach was chosen to graphically describe the templates by means of UML2.0 class diagrams. Constraints that cannot be formulated graphically are described textually in the template specifications respectively as OCL (Object constraint language). The UML model which defines all



data entities and interrelationships that can be used for describing AUTOSAR systems and related artifacts is called AUTOSAR meta-model. An instance of the meta-model, i.e. a concrete description of software components, etc., is called an AUTOSAR model.

Figure 2.1 depicts the aforementioned technological spaces. The meta-levels (M0 to M4) show the correspondence of concepts in the different technological spaces. All concepts within one meta-level are strongly related.

Unlike the classical four-layer architecture used by OMG, five meta levels are shown. Starting at the lowest, most concrete meta level those are:

• M0: AUTOSAR objects

This is the realization of an AUTOSAR system at work: For example a real ECUs executing a software image containing for instance the windshield wiper control software.

• M1: AUTOSAR models

Models on this meta level are built by the AUTOSAR developers. They may define a software component called "windshield wiper" with a certain set of ports that is connected to another software component and so on. On this level all artifacts required to describe an AUTOSAR system are detailed, including re-usable types as well as specific instances of such types.

The AUTOSAR software is loaded in to individual ECUs for individual vehicles. This loading means that the M1 Model is instantiated.

Note that such an AUTOSAR model can be represented using various formats ranging from XML to C, even to PDF.

• M2: AUTOSAR meta-model

On this meta level the vocabulary for AUTOSAR templates is defined. This vocabulary later can be used by developers of AUTOSAR based ECU systems.

For example it is **defined on M2** that in AUTOSAR we have an entity called "software component" which among others aggregate an entity called "port". This definition ensures that the developer of an AUTOSAR software component can describe his particular component and its ports. This description is called an AUTOSAR model and **resides on M1**.

• M3: UML profile for AUTOSAR templates

The AUTOSAR templates on M2 are built according to the meta-model defined on M3. As discussed before this is UML together with a particular UML profile to better support template modeling work.

Formally a template on M2 is still an instance of UML, but at the same time the template profile is applied, i.e. that additionally rules set out by the stereotypes in the profile need to be observed. The relevant details of the profile are specified in [3].



• M4: Meta Object Facility

Just for completeness, OMG's MOF sits on the final metalevel M4. No further meta-levels are required since MOF is designed to be reflective.

Note that an AUTOSAR model can be represented using various tchnological spaces ranging from XML, to C even to PDF. The conversion between these formats is called "transformation", while the fact that an AUTOSAR model follows to the AUTOSAR metamodel is called "instantiation". An AUTOSAR model (M1) is therefore called an instance of **the** AUTOSAR meta-model (M2).

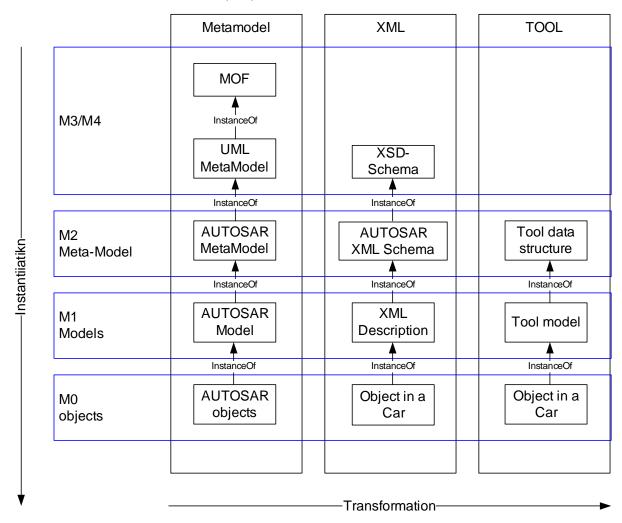


Figure 2.1: Technological spaces

2.1.1 Technological Space: "meta-model"

The Technological Space "meta-model" relates to the Model Driven Architecture (MDA) approach which was recently proposed by the OMG. According to MDA, the software development process is populated with a number of different models, each represent-



ing a particular view on the system being built. Models are written in the language of their meta-model¹.

The left part in Figure 2.1 shows the meta-model Technological Space as it is used in AUTOSAR.

- The lowest part called M0 corresponds to the real world. In the meta-model technological space AUTOSAR has no representation of M0 objects. It is mentioned for completeness only.
- All AUTOSAR models are at the level M1. For some standardized models, AUTOSAR uses an UML Object model.
- The M2 AUTOSAR meta-model is described by means of UML2.0 class diagrams and formally identified constraints in the AUTOSAR template specifications².
- A detailed description of the language that can be used for creating the AUTOSAR meta-model is given on the level M3 by the UML2.0 meta-model and the AUTOSAR Template Profile (see [3] for more information on the AUTOSAR Template Profile).
- The UML2 meta-model is defined by MOF which constitutes the level M4.

2.1.2 Technological Space: "XML"

Extensible Markup Language (XML) is a markup language standardized by W3C. It is widely accepted as a standard for representation and exchange of structured and semi structured data. The XML description is the central concept in the XML technological space. Descriptions are written in a syntax constrained by well-formedness and validity constraints. Well-formedness constraints are defined by the XML grammar rules, whereas the validity constraints are defined in a separate document called XML schema, which is written in a given schema language (W3C XML DTD [14], W3C XML Schema [15], etc.).

In other words: The XML grammar describes that a XML description contains opening and closing tags, etc. The XML schema defines e.g. which tags may be used in which combinations.

The middle part of Figure 2.1 illustrates the relations between an XML description, the XML grammar and a XML schema.

The technological space XML can be considered as a low level technological space: The AUTOSAR meta-model can be mapped to a XML schema [4]. But the original AUTOSAR meta-model cannot precisely be reconstructed out of the XML schema.

¹AUTOSAR uses the database of the UML tool called "Enterprise Architect Database" to represent this technological space.

²these constraints may be specified as OCL constraints in future.



2.1.3 Technological Space: "Tool"

Each tool has its internal data structure which implements the concepts that can be used within the tool. This internal data structure is located at the meta-model level (M2) and defines the language which can be used to interpret or create descriptions or models (M1). The code that can be generated out of the model is again a different representation of the model (e.g. C). The runtime-instances of the code that are executed on an ECU in a car are represented on meta-level M0.

In most cases the internal data structure of an AUTOSAR tool is different from the structure defined by the AUTOSAR meta-model, e.g. for performance or historical reasons. In order to allow interoperability it is required to map the models represented by the internal data structure onto an AUTOSAR XML description. This mapping and the tool internal data structure is NOT subject of AUTOSAR standardization and therefore NOT in the scope of this document.

2.2 Abstraction levels of information exchange

Table 2.1 depicts several abstraction levels which will be used in this document for structuring the requirements on authoring tool interoperability and the AUTOSAR data exchange format. Each abstraction level is based on the underlying levels. For each abstraction level the mechanism that must be supported is described - beginning with the physical level (sets of files) until the semantic layer (semantic constraints formally specified in the AUTOSAR meta-model).

The abstraction levels "presentation level" and "application level" are not relevant for basic authoring tool interoperability but might have impact on the exchangeability of AUTOSAR authoring tools which perform a similar functionality (e.g.: if AUTOSAR authoring tools use a common graphical notation and provide similar mechanism for modifying AUTOSAR models, the effort for introducing another authoring tool is reduced).

In other words: each AUTOSAR authoring tool SHALL support the exchange of AUTOSAR models based on sets of XML-descriptions that can be distributed over several files. Each file in the set of files SHALL validate successfully against the AUTOSAR XML schema that is generated out of the AUTOSAR meta-model. The exchanged model SHOULD NOT violate semantic constraints. When exchanging AUTOSAR models an authoring tool needs to create an AUTOSAR XML description out of the internal data structure. Another authoring tool needs to interpret the AUTOSAR XML description and create its internal data-representation.

In addition to the common mechanism for exchanging AUTOSAR models, authoring tools can implement additional mechanisms. For example, an authoring tool could provide a plugin-interface which allows direct access to its internal data-structure. In this case a plugin and the authoring tool would be interoperable on the content level. However, even if an authoring tool supports additional mechanisms for exchanging AUTOSAR models at least the mechanisms defined in Table 2.1 SHALL be supported. Thereby AUTOSAR XML descriptions are the only standardized format.



Abstraction Level	Minimum supported mechanism for authoring tool interoperability	Document that describes further information
Application Level	e.g.: Advanced automatic features	Not specified by AUTOSAR
Presentation Level	Graphical notation	Partly specified by AUTOSAR:
		Graphical Notation [16]
Semantic Level	Semantic constraints precisely de-	AUTOSAR meta-model [17],
	scribed in the meta-model (e.g.: cri-	AUTOSAR Template UML Profile
	teria for compatibility of interfaces)	[3]
Content Level	Internal data-structure	This is subject to tool implementa-
		tion and therefore not covered by
		AUTOSAR documents.
Data Format Level	AUTOSAR XML schema	Model Persistence Rules for XML
		[4]
Physical Level	Sets of files	This document

Table 2.1: Data Exchange Abstraction Levels

2.2.1 Physical level

The physical level defines the physical characteristics of the communication path. A physical representation could be one or more files or a data-stream.

2.2.2 Data format level

The data format level defines the format of the exchanged data. In AUTOSAR the data exchange format between different authoring tools is XML. The exchanged data SHALL be well-formed as defined in the W3C XML 1.1 Specification [14]. Additionally the exchanged XML descriptions SHALL be valid with respect to the AUTOSAR XML schema. We refer to this kind of data as "XML descriptions". This level can be implemented by off-the-shelf XML-parsers.

2.2.3 Content level

The content level defines the amount of information that can be exchanged. On the one hand it defines, which information is allowed to be given (boundedness). On the other hand, this level defines which information must at least be available (coverage). Authoring tools which base on this level can assume that at least a minimum and not more than a maximum of information is available. This level can be partly implemented by off-the-shelf validating XML-parsers which validate against a strict W3C XML schema (which can be generated out of the meta-model if the subset is formally defined). Some checks such as resolving of references must be implemented by the AUTOSAR authoring tool.



Example: An authoring tool might be specialized in the description of interfaces. This authoring tool might not understand any additional XML data. The content level needs to make sure that no data is transferred to the authoring tool which it does not understand.

Additionally the import and export of the AUTOSAR XML descriptions into the AUTOSAR authoring tool internal data structure is realized in this level. If the AUTOSAR XML description was split up over several files, the represented AUTOSAR model needs to be constructed. During this construction merge conflicts can occur and need to be resolved.

Example: references are resolved and potential conflicts such as multiple definitions of the same element are detected.

2.2.4 Semantic level

The definition of a standardized XML based exchange format is the first step towards successful interoperability of different authoring tools. The AUTOSAR XML data exchange format is defined by the AUTOSAR XML schema and therefore can only cover the "data format level" (validity according to the AUTOSAR XML schema).

In order to allow for seamless authoring tool interoperability all authoring tools must have the same interpretation of the semantics of the AUTOSAR models. For example all tools must have a common interpretation of the compatibility of instances of PortInterfaces.

The validation of semantic constraints is not only mandatory for the exchange of AUTOSAR models - it is mandatory in any case (i.e. even if the information would not be exchanged among different tools) because it must be possible to check the consistency of AUTOSAR models during their creation and maintenance and before the model is exported to an AUTOSAR XML description.

The template specifications released by AUTOSAR [3][5][6][7][9][8] already contain discussions of particular semantic constraints, which basically implement the structure depicted in Figure 2.2.

[constr_1031] NvBlockSwComponentType references ConstantSpecificationMappingSet | NvBlockSwComponentType: in this case the ConstantSpecificationMappingSet is associated with the aggregated NvBlockDescriptor.

Figure 2.2: Example of a semantic constraint



2.2.5 Presentation level

In this level a more abstract access to the AUTOSAR model is supported. This can e.g. be realized by an API for a programming language, by a set of text tables and/or a graphical editor. This level does not support any automatic support for editing the AUTOSAR models. The API and representation of the model is highly depending on the AUTOSAR tool. Therefore AUTOSAR only specifies the graphical notation [16].

Example: editor with no automation support

2.2.6 Application level

The application supports automatic features such as algorithms for tool supported mapping of software components onto ECUs. This document does not specify the behavior of tools on this level, since the behavior is highly depending on the implementation of the tool. Additionally the "automatic" features have no impact on tool interoperability.

Example: semi-automatic algorithms for mapping signals onto buses.



3 Requirements on AUTOSAR Tools

3.1 Support for AUTOSAR XML data exchange

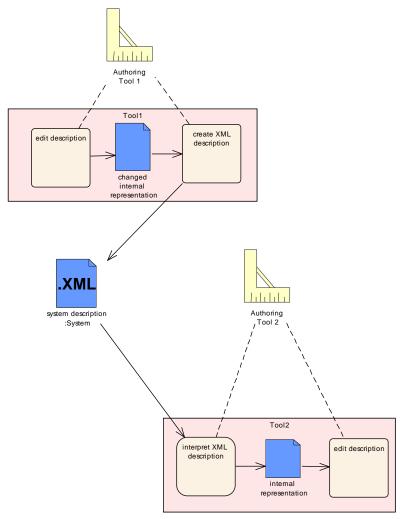


Figure 3.1: Support for AUTOSAR data exchange format

[TR_IOAT_00072] Support for AUTOSAR XML Data Exchange ☐ When exchanging data between different departments or companies all involved parties need to agree on a common wording for the exchanged information. Otherwise all parties have a different understanding of the information. The same holds for exchanging AUTOSAR models between AUTOSAR authoring tools: Whenever AUTOSAR models are exchanged they need to be represented as AUTOSAR XML descriptions.

☐ (RS_IOAT_00001)

If the tools in a tool-chain are all able to deal with the full set of information as described in the AUTOSAR meta-model, they can perfectly exchange their AUTOSAR models. Of course this requires that all tools have implemented the functionalities which are defined in

• The physical level (e.g. they support files),



- the data format level (e.g. the files are valid with respect to the AUTOSAR XML schema),
- the content level (e.g. the data can be loaded in the tool internal data model), and
- the semantic level (e.g. ALL semantic constraints can be evaluated according to the template specifications).

Optionally these tools can use the same graphical notation as defined in the presentation level.

3.1.1 Physical level

3.1.1.1 AUTOSAR tool SHALL support sets of files

[TR_IOAT_00010] AUTOSAR tool SHALL support sets of files [

Description:	AUTOSAR tools SHALL support for reading and writing single files and of sets of files that are stored in a file system. The tool SHALL provide a mechanism to select a specific file and sets of files in the file system.
Rationale:	An AUTOSAR XML description can be shipped in several files. Some files could contain data types others could contain interfaces, etc.
Use Case:	This allows the transport of models via CD, DVD, Email, etc. Splitting up an AUTOSAR model (represented as AUTOSAR XML descriptions) over several files supports concurrent modeling and a more fine-grained versioning. This allows development of parts of the model by different users or roles. Additionally it allows reuse of unchanged parts of the model.
Dependencies: [TR_IOAT_00036], [TR_IOAT_00042], [TR_IOAT_00063]	
Supporting Material:	ASAM Container Catalog as specified in [18]

10

The following details apply:

- An AUTOSAR tool SHALL be able to read the files in any order. Changing the order of reading SHALL not result in any change of the semantics of the model.
- An AUTOSAR authoring tool SHALL save changed model elements in the same file as they were read from.
- If the same element was read from two artifacts, it needs to be serialized back to these two ([TR IOAT 00063]).
- An AUTOSAR authoring tool SHALL allow the user to specify in which file a newly created model element shall be saved.
- An AUTOSAR tool shall be able to read the files to be processed from an ASAM catalog file ([TR IOAT 00036]).



3.1.2 Data format level

3.1.2.1 AUTOSAR tool SHALL support AUTOSAR XML descriptions

[TR_IOAT_00012] AUTOSAR tool SHALL support AUTOSAR XML descriptions [

Description:	AUTOSAR tools SHALL support the interpretation and creation of AUTOSAR XML descriptions. These descriptions SHALL be "well-formed" and "valid" as defined by the XML recommendation, W3C XML 1.1 Specification [14], whether used with or without the document's corresponding AUTOSAR XML schema(s). In other words: Even if the tool does not use standard XML mechanisms for validating the XML descriptions it SHALL ensure that the XML descriptions can be successfully validated against the AUTOSAR XML schema.
Rationale:	Each AUTOSAR XML description file has confor to the AUTOSAR xml schema.
Use Case:	_
Dependencies:	A specialization of this requirement is defined in [TR_IOAT_00033].
Supporting Material:	W3C XML 1.1 Specification [14]

10

The following details apply:

- An AUTOSAR tool SHALL reject XML descriptions with violate XML's well formedness constraints as specified in [14]. Such files need to be fixed outside of AUTOSAR tools using a text editor. Proper error messages SHALL be provided, e.g. the messages from an XML parser).
- An AUTOSAR tool may accept XML description which do not validate properly against the XML schema. Nevertheless, for the processed subset all semantic constraints and also the schema constraints SHALL be evaluated. This applies in particular to specialized AUTOSAR tools which to not process the entire AUTOSAR model.
- An AUTOSAR tool may process an AUTOSAR description using a well-formed parser. Nevertheless, the result must exactly be the same as if the AUTOSAR description were parsed with validation.
- If an AUTOSAR tool wants to validate an AUTOSAR XML description against an AUTOSAR schema, it SHALL provide the necessary schema files in its own resources. An AUTOSAR tool shall use the SYSTEM-Identifier in the xsi:schemaLocation to identify an appropriate schema file.

The SYSTEM-Identifier for the schema in the AUTOSAR XML description indicates the AUTOSAR schema version which was the basis for the **creation** of the description. It is very likely that a subsequent revision of the AUTOSAR schema can also be utilized to validate the description.

Therefore an AUTOSAR tool may map the SYSTEM-Identifier for the schema to any resource which was declared backwards compatible by AUTOSAR. An AUTOSAR tool MUST NOT use the SYSTEM-Identifier directly as a filename.



AUTOSAR does not specify, **how** this mapping SHALL be performed, as there are various approaches to do this. As one example this may be done using SGML-OPEN-Catalog files [19]. In Example 3.1 two SYSTEM-Identifers are mapped to the same schema file using an SGML-OPEN-Catalog-File.

Example 3.1

```
OVERRIDE YES

SYSTEM "AUTOSAR_4-0-0.XSD" "resources/AUTOSAR_4-0-1.xsd"

SYSTEM "AUTOSAR_4-0-1.XSD" "resources/AUTOSAR_4-0-1.xsd"

SYSTEM "http://www.w3.org/2001/03/xml.xsd" "resources/xml.xsd"
```

Example 3.2 illustrates the beginning of an AUTOSAR XML description with the requested attributes for AUTOSAR 4.0.x (see [TR IOAT 00062] for more details):

Example 3.2

Listing 3.1: Requested attributes for the AUTOSAR element

3.1.2.2 Authoring tool SHALL be able to import and export supported model elements as AUTOSAR XML descriptions

[TR_IOAT_00033] Authoring tool SHALL be able to import and export supported model elements as AUTOSAR XML descriptions

Description:	For all model elements that are defined by AUTOSAR and are supported by an authoring tool, the tool SHALL provide the user with the possibility to import them from XML descriptions and export them as XML descriptions that validate successfully against the AUTOSAR XML schema. Even if the tool has non AUTOSAR exchange possibility of models it SHALL nonetheless support the creation of the corresponding AUTOSAR XML description.
Rationale:	It is possible that between two tools or independent components of the same tool exists some data exchange mechanism. Such mechanism might make it possible for the tool to bypass AUTOSAR XML descriptions even if the model can be represented by AUTOSAR XML descriptions.
Use Case:	Avoid proprietary exchange formats that bypass the standardized AUTOSAR XML descriptions and therefore endanger the interoperability of tools from different vendors.
Dependencies:	[TR_IOAT_00012]



Supporting Material:	_
materiar.	

10

3.1.2.3 Authoring tool SHALL support well defined serialization

[TR IOAT 00062] Authoring tool SHALL support well defined serialization [

Description:	An AUTOSAR authoring tool shall provide a serialization for XML as shown in the table below, in particular in Table 3.1
Rationale:	In order to support a direct comparison of AUTOSAR XML descriptions with a text comparison tool it is essential that the XML is generated in a reliable and standardized manner.
Dependencies:	[TR_IOAT_00012]
Supporting Material:	_

|(RS_IOAT_00003, UC_IOAT_00004, UC_IOAT_00008)

In order to support a direct comparison of AUTOSAR XML descriptions with a text comparison tool it is essential that the XML is generated in a reliable and standardized manner.

This requirement also supports a well defined validation against an xml schema.

Therefore an AUTOSAR tool shall support serialization as follows:

• In AUTOSAR XML the root element shall contain the attribute xsi:schemaLocation. This attribute is list of URI/URL pairs which associates a SYSTEM-Identifier (the url) to a name space identifier (the URI) according to listing 3.2.

Listing 3.2: Requested attributes for the AUTOSAR element

• The SYSTEM-Identifier for the schema in the AUTOSAR XML description indicates the AUTOSAR schema version which is the basis for the creation of the description. It is very likely that a subsequent revision of the AUTOSAR schema can also be utilized to validate the description. Therefore an AUTOSAR tool may map the SYSTEM identifier for the schema to any resource which was declared backwards compatible by AUTOSAR.



The SYSTEM-Identifier in the AUTOSAR XML description shall match the following pattern:

AUTOSAR_{major}-{minor}-{revision}.xsd

In particular no path shall be part of the SYSTEM-Identifier.

- AUTOSAR XML descriptions SHALL use the file extension ".arxml" (short for AUTOSAR XML).
- Unless the meta model flags multiple elements as {ordered} the elements with upper multiplicity > 1 shall be serialized in a predictable order. In particular, the order shall be defined by the expression mentioned in the atp.splitkey. If no splitkey is defined the order shall be defined by the contents of shortName, shortLabel.
- XML comments may be silently ignored and need not to be serialized again. XML comments are not treated as part of the AUTOSAR model.
- XML processing instructions may be silently ignored and need not to be serialized again. It is allowed that an AUTOSAR tool places processing instructions to the AUTOSAR XML description for specific purposes.
- primitives such as Numerical etc. SHALL be serialized as read from the AUTOSAR XML description respectively as entered by the user in an AUTOSAR Authoring tool.
- empty elements (if there are those) should be serialized as start/end tag, not as 'emptytag'.

In particular

<VALUE></value> instead of <VALUE/> for primitives

The XML description SHALL be formatted as shown in Table 3.1:

Applied to	Strategy	description
default approach	NewLine: Element is a block of its own	NewLine means in particular: • indentation shall be 2 characters per level • the start to a of the element shall be an a new line.
		 the start tag of the element shall be on a new line the XML attributes shall be sorted alphabetically. If more than one XML attribute, each one shall be on its own line
		the start shall be indented according to the nesting level of XML tag
		the end tag shall be on a new line and indented like the start tag
		 no newline shall be placed after the end tag, this is inserted by the next tag if necessary
		the content will be indented one step more than the start tag
Identifiable S	BlankLine: Element is a visible block	the approach is as NeweLine but with a blank line before the block



shortName and shortLabel	KeepLine: element remains on the current line	Keepline is in particular:
Primitives (either modeled as UML-attribute or as aggregation of a primitive	OneLine Element is displayed in one line	The element starts on a new line, is indented and presented in one line. The end tag is in the same line as the start tag and the content of the element.
Properties of ≪atpMixedString≫	InLine: Element is floating within text	Surrounding whitespace of the element is not changed. No new line is inserted before or after the tags. Whitespace within the element is also not changed. In the following example the element <e> is formatted according to the InLine approach. <l-1 l="EN">This is <e>bold </e> style </l-1></e>
VerbatimString elements with xml:space set to preserve	keepWhitespace	White space in the element is kept as is.
elements with with no xml:space or set to default	normalizeWhitespace	Normalize whitespace includes: leading and trailing whitespace will be removed consecutive white spaces will be replaced by a single blank no wrapping will be performed carriage returns will be replaced by blank child(inline)-elements are treated as one non whitespace character

Table 3.1: Approaches for formating XML serialization

The following example 3.3 illustrates these approaches:

Listing 3.3: Serialization Example

```
<UNIT><SHORT-NAME>Perc
                                                 <!-- KeepLine -->
 <DESC>
                                                 <!-- NewLine -->
   <L-2 L="EN">a percentage...</L-2>
                                                 <!-- OneLine -->
 <DISPLAY-NAME>%</DISPLAY-NAME>
                                                 <!-- OneLine -->
</UNIT>
                                                 <!-- BlankLine -->
<UNIT><SHORT-NAME>PercPerSec
                                                 <!-- KeepLine -->
 <DESC>
                                                 <!-- NewLine -->
                                                 <!-- NewLine
   <L-2 L="EN">time-derivative of percent</L-2>
                                                     NormalizeWhitespace
                                                 -->
```

</DESC>



<DISPLAY-NAME>%/S</DISPLAY-NAME>
</UNIT>

<!-- OneLine -->

[TR_IOAT_00075] No empty wrappers

Description:	Some attributes and references in AUTOSAR models are mapped to a hierarchy of two or more XML elements. The AUTOSAR XML description SHOULD not contain incomplete hierarchies. The semantics of those incomplete hierarchies is equivalent to "the value is not set".
Rationale:	Empty collection wrappers provide no additional semantics and only blow up file size without additional information.
Use Case:	-
Dependencies:	_
Supporting Material:	 This rules applies for attributes and references for which the following XML schema production rules apply: [TR_APRXML_00008] XML Schema production rule: composite property representation (1111) [TR_APRXML_00009] XML Schema production rule: composite property representation (1101) [TR_APRXML_00023] XML Schema production rule: composite property representation (1100) [TR_APRXML_00022] XML Schema production rule: composite property representation (1011) [TR_APRXML_00010] XML Schema production rule: composite property representation (1001)
	 [TR_APRXML_00011] XML Schema production rule: composite property representation (0111) [TR_APRXML_00012] XML Schema production rule: composite
	 property representation (0101) [TR_APRXML_00014] XML Schema production rule: composite property representation (0011) [TR_APRXML_00017] XML Schema production rule: reference property representation with role wrapper element

(UC_IOAT_00002, UC_IOAT_00008)

Example of a valid AUTOSAR XML description according to [TR_IOAT_00075]:

Listing 3.4: Valid example for hierarchy

Example of an **invalid** AUTOSAR XML description according to [TR_IOAT_00075]:



Listing 3.5: Invalid example for hierarchy

3.1.3 Content level

3.1.3.1 Authoring tool SHALL NOT change model contents without the intention of the user

[TR_IOAT_00007] Authoring tool SHALL NOT change model contents without the intention of the user \lceil

Description:	An AUTOSAR authoring tool SHALL NOT perform any changes on the AUTOSAR model while interpreting and creating AUTOSAR XML descriptions. If the user doesn't explicitly trigger or confirm any changes then the semantics of the AUTOSAR model represented by the original XML description SHALL be equivalent to the semantics of the model represented by the created XML description. This includes in particular • that an authoring tool SHALL preserve references even if the target was not available in the input XML description • that the format of primitives such as Numerical, Integer is not changed • that the package structure of the model is not changed • that the base attribute in references is not changed • that unids are not allowed to be removed or changed • that checksums and timestamps are not allowed to be changed
Rationale:	-
Use Case:	The meta-model contains some elements that are marked by ordered. The order in the XML representation may not change without the intention of the user when interpreting and creating the XML description. Other use-cases may apply as well.
Dependencies:	[TR_IOAT_00024]
Supporting Material:	_

 $\rfloor ()$

Note that AUTOSAR tools are not required to keep checksums, timestamps, and uuids consistent with the current data. Therefore after importing an XML description, work-



ing with it, and re-exporting it, the checksums, timestamps, and uuids might become inconsistent.

3.1.3.2 Authoring tool SHALL support exchange of partial information

[TR_IOAT_00035] Authoring tool SHALL support exchange of partial information

Description:	An AUTOSAR authoring tool SHALL support the exchange of AUTOSAR models that are not complete.
Rationale:	It SHALL be possible to exchange intermediate work products.
Use Case:	[UC_IOAT_00001], [UC_IOAT_00005]
Dependencies:	[TR_IOAT_00024]
Supporting Material:	-

(UC_IOAT_00001, UC_IOAT_00005)

3.1.3.3 Authoring tool SHALL support AUTOSAR extension mechanism

[TR_IOAT_00048] Authoring tool SHALL support AUTOSAR extension mechanism \lceil

Description:	An AUTOSAR authoring tool MAY support the AUTOSAR extension mechanism if applicable. Tools that do not need the additional information for its intended purpose SHALL ignore that information. If several extensions are defined then the tool SHOULD support the relevant extensions and SHALL ignore the irrelevant extensions.
Rationale:	For some use-cases it is required to exchange information that is not (yet) captured in the standard data exchange format. This additional information is often specific to a tool (e.g. allow for round-trip engineering) or a tool-chain within a development process.
Use Case:	Using AUTOSAR descriptions in specific processes.
Dependencies:	-
Supporting Material:	-

10

3.1.3.4 Authoring tool SHOULD maintain references

[TR_IOAT_00067] AUTOSAR Authoring tool SHOULD maintain references

Description:	An AUTOSAR authoring tool SHOULD provide means to maintain references	ĺ
	including referenceBase and attribute base	



Rationale:	The implementation of references is part of the AUTOSAR model and shall be handled properly.
Use Case:	[UC_IOAT_00004]
Dependencies:	[TR_IOAT_00007], [TR_IOAT_00003], [TR_IOAT_00064]
Supporting Material:	_

(UC_IOAT_00004)

3.1.3.5 Authoring tool SHOULD follow specified access rights

[TR_IOAT_00074] AUTOSAR Authoring tool SHOULD follow specified access rights \lceil

Description:	An AUTOSAR authoring tool SHOULD provide an option to follow access rights. If this option is selected, it SHALL follow the access rights specified according to [TPS_GST_00226]
Rationale:	The agreed roles and their permissions need to be supported by a tool.
Use Case:	[UC_IOAT_00004]
Dependencies:	[TR_IOAT_00007], [TR_IOAT_00003], [TR_IOAT_00043]
Supporting Material:	_

\((UC_IOAT_00004)

3.1.4 Semantic level

3.1.4.1 Authoring tool SHALL support validity checks

[TR_IOAT_00003] Authoring tool SHALL support validity checks

Description:	An AUTOSAR authoring tool SHALL support validating the consistency of the AUTOSAR model to the AUTOSAR meta-model, including the semantic constraints. The validation SHALL be performed when interpreting and creating AUTOSAR models. A tool SHOULD allow the user to trigger validity checks manually. The tool SHALL allow for interpreting and creating AUTOSAR XML-descriptions that are not valid with respect to the semantic constraints. If the tool is not able to interpret the file due to the violation of some semantic constraints it SHALL notify the user and indicate the location of the violating elements. The SHALL perform semantic checks according to the intended task. The Tool shall not produce erroneous results from semantically incorrect input without notice to the user.
Rationale:	-
Use Case:	Support to create models of appropriate quality. User wants to correct semantical problems.



Dependencies:	Requirement on the Resolution of references in [TR_IOAT_00064]. The violation of semantic constraints shall be reported according to [TR_IOAT_00065]. Validity checks shall be performed after loading all partial models (see [TR_IOAT_00042].
Supporting Material:	_

10

3.1.4.2 AUTOSAR tool SHALL support variants

[TR_IOAT_00060] AUTOSAR tool SHALL support variants [

Description:	Starting with AUTOSAR 4.0, AUTOSAR models may contain variation points and tables of evaluated variants. An AUTOSAR tool needs to understand the semantics of variation points and handle variability correctly.
Rationale:	An AUTOSAR model which contains variants is subject to relaxed constraints on multiplicity and uniqueness of <pre>shortNames</pre> . Hence, the model is no longer backward compatible, and a tool which does not understand variant handling cannot interpret such a model correctly; it is not sufficient to just ignore the variation point information.
Use Case:	Party 1 sends a model which contains variants to party 2, which generates code from this model, but does not resolve all variants. Party 1 gets back a result with some variants bound, and other variants left "open" for binding at compile time or later.
Dependencies:	-
Supporting Material:	Variant handling is described in Chapter 7 in the Generic Structure Template [3].

10

3.1.5 Presentation level

There are no general requirements on AUTOSAR Tools presentation level. Please refer to chapter 3.8 "Standardized error handling" which also relates to the presentation level.

3.2 Support for concurrent modeling

During the development of AUTOSAR systems, models will be passed between different parties (e.g. from OEM to supplier and back). The fact that it is not possible or wanted for all involved parties to work on the same repository, those parties will work on different instances of the same model, e.g. enrich the models, add new elements, implement the model etc. At some point in time, these models will be merged into one



complete model for the entire system: The consistency of the merged model must be ensured and conflicts need to be resolved.

Since AUTOSAR models can be stored as AUTOSAR XML descriptions in several files (which could be modified independently), an AUTOSAR authoring tool must support merging the models stored in these files into a consistent internal data representation. This includes providing a mechanism for manually or rule-based resolving of merge conflicts.

Figure 3.2 shows the concept of handling AUTOSAR models which can be split up over several files. The AUTOSAR authoring tool needs to interpret the contents stored in each single file (partial model) and needs to merge them into the tool internal data structure. After having finished modifying the model an XML description is created which can again be split up over several files (the granularity of information that can be split up over several files is defined in [TR_IOAT_00038]). Note that the merging shall not be performed on the XML text level. It shall be performed on the level of the partial models represented by XML.

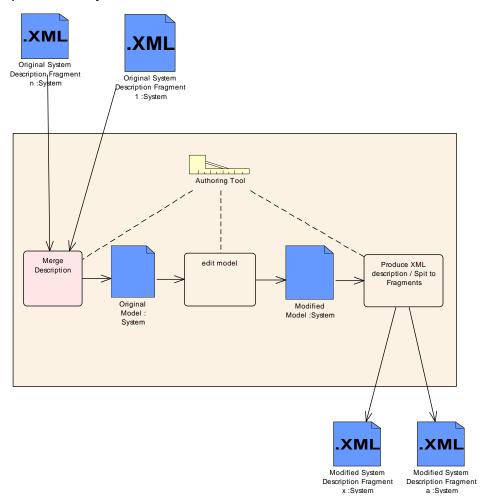


Figure 3.2: Concept of handling AUTOSAR models which can be split up over several files



3.2.1 Detection of differences between models

3.2.1.1 Authoring tool SHOULD provide a mechanism for showing differences between AUTOSAR models

[TR_IOAT_00043] Authoring tool SHOULD provide a mechanism for showing differences between AUTOSAR models \lceil

Description:	An AUTOSAR authoring tool SHOULD provide a mechanism for showing differences between AUTOSAR models. These differences could be represented in textual or in graphical ways.		
Rationale:	Identification of differences between two versions of an AUTOSAR model.		
Use Case:	 OEM wants to find out which parts of the model have been modified by the supplier. The user wants to check if a merge of two models was executed as expected. 		
Dependencies:	_		
Supporting Material:	_		

10

3.2.1.2 Definition of differences

The reconciliation of two independently modified models involves several activities.

- 1. Identification of model elements which are only available in one model.
- 2. Identification of model elements that are available in both models and are identical in both models. Two model elements are considered identical if
 - (a) their attributes values are equal,
 - (b) their short-name references to other elements are equal and
 - (c) they are composed of identical elements (recursiveness).
 - (d) for aggregations with upper multiplicity greater than one, and specified as {ordered}, the elements appear in the same sequence
 - (e) for aggregations with upper multiplicity greater than one and **not** specified as {ordered} both sets contain the same elements
- 3. Identification of model elements that are available in both models and are different in the models.

The activities 2 and 3 require a precise definition of the concept of a "changed" model element. In the following section we refer to meta classes that are specializations of



meta-class Identifiable as identifiables. An identifiable is considered as "changed" if any of the following is changed:

- Any of its attributes of simple datatype changed its value.
- The identifiable or any parts (recursive) that are not identifiables themselves are modified. So the granularity of possible detection of changes is the identifiable. The rationale for this is that the Identifiable is considered as having an identity of its own for which the difference is indicated separately.

The following section explains this definition in more details:

3.2.1.3 Definition of differences - aggregation

Figure 3.3 illustrates the granularity of modification detection: "A" is a specialization of Identifiable. "B" is aggregated by "A" ("B" is a part of "A") and "B1" is aggregated by "B" ("B1" is part of "B"). "A" is considered changed (indicated by dark color) if the underlying structure or any of the structure's elements change. However it depends on the particular use case if nested changes shall be indicated at higher levels to the user.




Figure 3.3: Modification detection - aggregated meta classes that are not identifiable

Difference on aggregations marked as $\ll atp.splitable \gg$ require a more elaborate consideration depending if partial or merged models are compared:

- 1. When comparing a merged model the rule of aggregations apply as mentioned above.
- 2. When comparing a partial model, only the partial model which contains the change also indicates the difference. In figure 3.4 the change of "C" is only indicated in the "Lower Partial Model". Reason is, that the "Upper Partial Model" is not aware that there is another part.






Figure 3.4: Modification detection - meta classes aggregated as <code>%atp.splitable</code>

3.2.1.4 Definition of differences - references

If an Identifiable "A" has references to other Identifiables (see Figure 3.5), "A" is considered changed, if a new reference is added/deleted or the string that internally represents the reference is changed. "A" is not considered changed, if the referenced element changes. Please note that the AUTOSAR references are based on the shortName as explained in the "Generic Structure Template" [3] and therefore changing the shortName of an instance of "C" implies updating all references to the instance. In this special case "A" is considered changed if the shortName of "C" is updated (the string representing the reference needed to be updated too).



Figure 3.5: Modification detection - aggregated meta classes that are identifiable

3.2.1.5 Algorithm for comparison of model elements

The concrete algorithm of comparison is left open to the implementation, but it is required that it detects all of the changes described above. Possible implementation could be a comparison on a per-attribute basis or the calculation and comparison of a signature value (e.g. calculated by the MD5 algorithm) for any Identifiable. Since somebody might change the content of an XML description with an XML editor without updating the signature values, an authoring tool should not rely on the correctness of the checksums that are transmitted with an XML description. However, if a user can ensure that the checksum values fit to the content then they can be used in order to increase the performance of the comparison.



3.2.1.6 Authoring tool SHALL support unique identification of model elements

[TR_IOAT_00024] Authoring tool SHALL support unique identification of model elements $\c\c\c$

Description:	 Upon user request, an AUTOSAR authoring tool MAY create XML descriptions which contains uuids for each Identifiable. An AUTOSAR authoring tool SHALL continue interpreting an AUTOSAR XML description even if uuids are missing. An AUTOSAR authoring tool SHALL not change the uuid while processing an AUTOSAR model unless it is explicitly intended by the user. 		
Rationale:	Ability to trace model elements independently of content modifications.		
Use Case:	Export of data from a database with unique uuids, change data in external tools and then re-import into the database. During the re-import the uuids aid the unambiguous assignment of model elements to data in the database.		
Dependencies:	[TR_IOAT_00042], [TR_IOAT_00035], [TR_IOAT_00007]		
Supporting Material:	_		

 $\rfloor ()$

3.2.1.7 Examples of differences between models (non normative)

The following figures show an original and a changed model. The model elements that are marked in green indicate which element is considered to be changed: Figure 3.6 shows the original model. The SenderReceiverInterface "interface" and the ApplicationPrimitiveDataType "velocityType" are defined within the ARPackage "OEM". The SenderReceiverInterface "interface" has a VariableDataPrototype "velocity" which is of type "velocityType". The invalid Value of the ApplicationPrimitiveDataType "velocityType" is set to 10000.

¹Note that ValueSpecification is simplified in this diagram



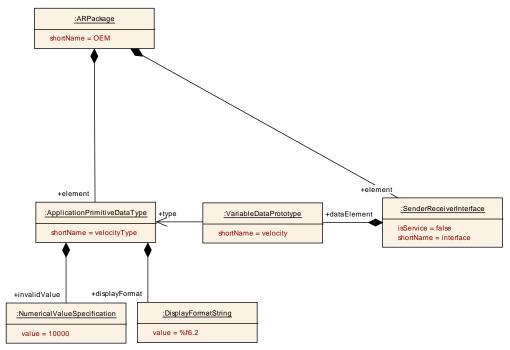


Figure 3.6: Original Model

The model which is described in Figure 3.7 contains two additional model elements: VariableDataPrototype "buttonPressed" and the ApplicationPrimitiveDataType "Boolean". These elements are marked as changed because they were added. The ARPackage "OEM" and the SenderReceiverInterface "interface" are marked as changed because aggregations to the new model elements have been added.

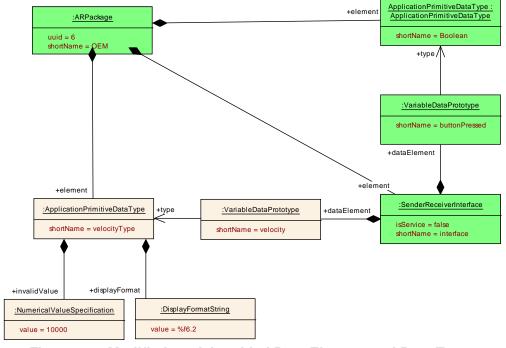


Figure 3.7: Modified model - added Data Element and Data Types



In Figure 3.8 the invalid value of ApplicationPrimitiveDataType "velocityType" was extended. The change in the object ValueSpecification is propagated to the Identifiable ApplicationPrimitiveDataType.

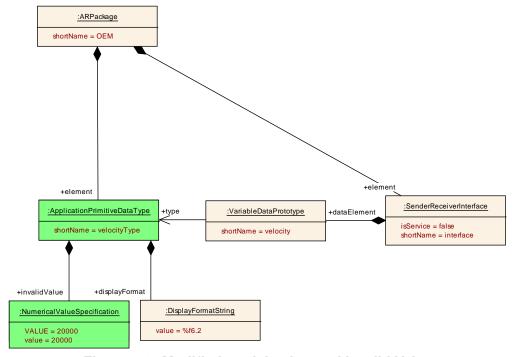


Figure 3.8: Modified model - changed Invalid Value

The shortName of the ApplicationPrimitiveDataType in Figure 3.9 was changed from "velocityType" to "speedType". Changing the shortName of an object implies a change of the references to this object. Therefore the VariableDataPrototype "velocityType" is also changed. All these changes are propagated to the containing ARPackage "OEM".



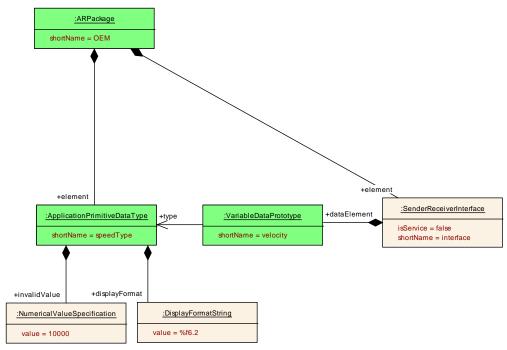


Figure 3.9: Modified model - renamed Element ("speedType")

If a model element is moved to a different ARPackage then only the source and the target ARPackage are changed (Their list of elements changes). This is described in Figure 3.10. Please note that all absolute references that point to moved elements need to be changed as well. This is required because AUTOSAR uses absolute short name paths for referencing elements. If references would have been relative references then the references would not necessarily change depending on the layout of the referenceBases.

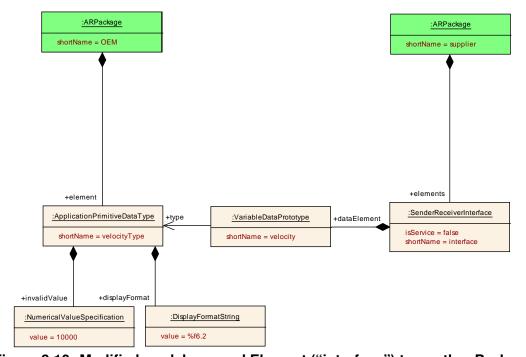


Figure 3.10: Modified model - moved Element ("interface") to another Package



3.2.2 Merging models

The following sections describe requirements on interpreting AUTOSAR models that have been split up into several partial-models, each stored in an individual file. In order to create an overall model the content described in the partial-models need to be merged. The following algorithm describes a 2-way merge. Due to missing experience with handling complex AUTOSAR models in development processes, strategies for resolving merge conflicts are left open to implementation of tools.

In order to reduce manual interaction for resolving merge conflicts, tools may take additional information into consideration. This information can e.g. be derived out of an earlier version of the overall model (origin model, 3-way merge) or out of information stored in meta-data for data exchange (see section 3.9).

3.2.2.1 Authoring tool SHALL be able to handle partial AUTOSAR models

[TR_IOAT_00061] Authoring tool SHALL be able to handle partial AUTOSAR models $\c\c$

Description:	AUTOSAR authoring tools SHALL support handling of partial models. This includes in particular support of dangling references as well as appropriate constraint validation. When storing an AUTOSAR partial model as an AUTOSAR XML description this needs to be valid with respect to the AUTOSAR XML schema: i.e. each of such files contains a full path beginning from the root element AUTOSAR.		
Rationale:	Allow for splitting up AUTOSAR models over several sub models which can be stored, versioned, and modified independently.		
Use Case:	According to various process approaches, an AUTOSAR model may be split up into several files and have to be merged to a complete and consistent model.		
Dependencies:	-		
Supporting Material:	See "Generic Structure Template" [3] for detailed description on how to mark an aggregation as <code>aggregation</code> as		

10

3.2.2.2 Authoring tool SHALL support the merging of AUTOSAR models

[TR_IOAT_00042] Authoring tool SHALL support the merging of AUTOSAR models $\bar{\mid}$



Description:	An AUTOSAR authoring tools SHALL support the merging of AUTOSAR models that have been split up and stored in multiple partial models. The minimum granularity of an AUTOSAR model is explicitly modeled in the AUTOSAR meta-model: If an aggregation is marked as <code>atpSplitable</code> , then the aggregated elements MAY be described in different files. If the aggregation is not marked as <code>atpSplitable</code> , then the aggregated content SHALL be stored in the same file as the aggregating element. Merging of a model also includes the resolution of references. The tool SHALL be able to read the submodels in any order. There is no preference.			
Rationale:	Allow for splitting up AUTOSAR models over several sub models which can be stored, versioned, and developed independently.			
Use Case:	When storing an AUTOSAR model as an AUTOSAR XML description in several files, each file needs to be valid with respect to the AUTOSAR XML schema: i.e. each file contains a full path beginning from the root element AUTOSAR. Let's assume that an AUTOSAR model defines an AtomicSwComponentType "A" and a SenderReceiverInterface "S" within the same ARPackage named "pkg". The XML description of "A" can be located in another file than the XML description of "S". Each file would contain the description of the ARPackage "pkg". While interpreting the contents of the two files the AUTOSAR authoring tool must make sure that only one instance of "pkg" is created in the internal representation of the AUTOSAR model.			
Dependencies:	This requirement is refined by [TR_IOAT_00044], [TR_IOAT_00043], [TR_IOAT_00040], [TR_IOAT_00063], [TR_IOAT_00064] and [TR_IOAT_00024].			
Supporting Material:	See "Generic Structure Template" [3] for detailed description on how to mark an aggregation as ≪atpSplitable≫.			

10

3.2.2.3 AUTOSAR tool SHALL resolve references

[TR_IOAT_00064] AUTOSAR authoring/integration tools SHALL resolve references \lceil

Description:	When an AUTOSAR tools loads partial models, it shall be able to handle references. This includes: • late binding of references: When a partial model is loaded which contains Identifiables which are referenced by previously loaded artifacts, the references shall be bound	
	 handling dangling references: if a reference cannot be bound, it shall be flagged as error, but the partial model shall still be loaded. Open references shall be visible in the authoring systems (e.g. the name of a referenced object shall be shown even if the reference cannot be resolved). 	
Rationale:	Allow for integration of components that have been developed or modified by different parties but referring common definitions which are not yet available.	
Use Case:	[UC_IOAT_00010], [UC_IOAT_00001]	
Dependencies:	[TR_IOAT_00067]	



Supporting Material:	_
material.	

(UC IOAT 00010, UC IOAT 00001)

3.2.2.4 Handling Conflicts

In case of conflicts, these need to be resolved with human interaction, since semantic knowledge is needed in most cases for the decisions. Basically, for handling conflicts, there is a need for regulation for mastership and how this is to be applied.

Merging tools might infer suggestions from additional information. If the sub-models are derived from a common origin, the 3-way merge algorithms can be applied. Additionally meta-data for data exchange could be used. E.g.: A timestamp could be used to indicate the time of modification of an element (the initial creation of an instance is considered as a modification, too), where modification means any change as described in the section above. Timestamp is an optional field, since its existence is not critical for the process.

3.2.2.5 AUTOSAR tools SHALL accept double defined ARElements as long as their nonSplitables are the same

[TR_IOAT_00063] AUTOSAR tools SHALL accept double defined ARElements as long as their nonSplitables are the same \lceil

Description:	An AUTOSAR tool shall keep track of the artifacts where "duplicate ARElements" came from. An AUTOSAR tool shall indicate double defined ARElements with different nonSplitables as error. All related artifacts shall be indicated to the user. There is no preference rule. This duplicate handling is limited to ARElements which are not split into partial models and therefore loaded from one artifact.		
Rationale:	Allow for integration of components have been modified by different parties but referring common definitions.		
Use Case:	[UC_IOAT_00010], [UC_IOAT_00001]		
Dependencies:	-		
Supporting Material:	_		

(UC IOAT 00010, UC IOAT 00001)

3.2.2.6 Handling merge conflicts: optimistic approach

In the case of an optimistic approach for resolving conflicts, work is allowed on copies of a model and only when the models are synchronized/integrated potential conflicts



are be resolved. Whenever a merge conflict is detected (i.e. two AUTOSAR models contain model elements which have the same shortName but a different description) the conflict needs to be resolved. This could be implemented by the tool by interactively asking the user to choose the right model element.

Additional meta-data on the model elements can help finding out the correct model element. E.g. if a timestamp is assigned to a model element it can be decided which information is newer than the other. Another approach for resolving or even avoiding merge conflicts is described in section 3.2.2.8.

3.2.2.7 Authoring tool SHOULD provide a mechanism for resolving merging conflicts

[TR_IOAT_00044] Authoring tool SHOULD provide a mechanism for resolving merging conflicts [

Description:	AUTOSAR authoring tools SHOULD provide a mechanism for resolving merging conflicts. This mechanism could be e.g. implemented by an interactive user interface which allows for choosing from conflicting elements or by using further meta-data such as the timestamp (e.g. the latest version of an element shall be used), etc.			
Rationale:	Allow for integration of models which have been modified by different parties.			
Use Case:	When integrating models which have been modified and extended by different parties merge conflicts are likely to occur.			
Dependencies:	-			
Supporting Material:	_			

10

3.2.2.8 Handling merge conflicts: access control approach

The probability of merge conflicts can be reduced by a well defined work-flow. E.g. in a top down development process [UC_IOAT_00005] an OEM could decompose a system down to a given granularity. The refinement of the decomposition could be done by different suppliers. If each supplier modifies a disjunctive part of the model no merge conflicts will occur when merging the results into the OEMs model of the full system. In order to support this strategy the supplier needs to know which parts of a model are allowed to be changed and which parts are not allowed to be changed. These access rights SHOULD be exchanged together with meta-data for supporting data exchange. See requirement on the meta-data for data exchange [TR_IOAT_00036], [TR_IOAT_00038]. If access rights are defined an AUTOSAR authoring tool SHOULD prohibit the user from modifying model elements that are marked as read-only.



3.2.2.9 Authoring tool SHOULD prohibit the user from modifying model elements that are marked read-only

[TR_IOAT_00040] Authoring tool SHOULD prohibit the user from modifying model elements that are marked read-only \lceil

Description:	An AUTOSAR authoring tool SHOULD only allow the user to modify, create or delete model elements which he is allowed to change. The information if a model element is allowed to be modified should be represented to the user.		
Rationale:	Prohibit a user from modifying model elements he is not allowed to change.		
Use Case:	OEM wants to send information to tier-1 supplier. OEM wants to lock certain model elements so that the tier-1 is not allowed to change them.		
Dependencies:	meta-data for data exchange could define the access-rights on model elements, see [TR_IOAT_00038]. The access-policies can support the merging of models, see [TR_IOAT_00042].		
Supporting Material:	_		

10

3.2.2.10 Example on merging models

Figure 3.12, Figure 3.13 and Figure 3.14 describe two example models and the result after merging them. The underlying meta-model for those examples is described in Figure 3.11. Splitable aggregations are marked by the stereotype $\ll atpSplitable \gg$.

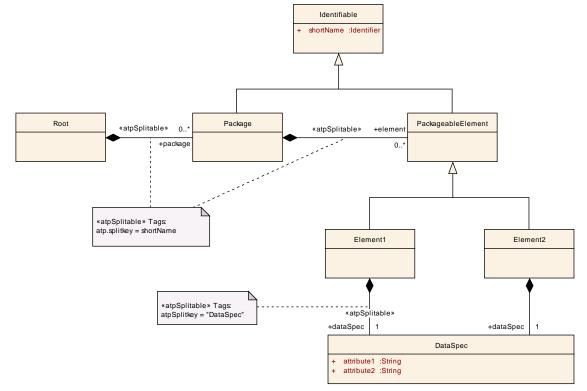


Figure 3.11: Meta-model of the models described in this section



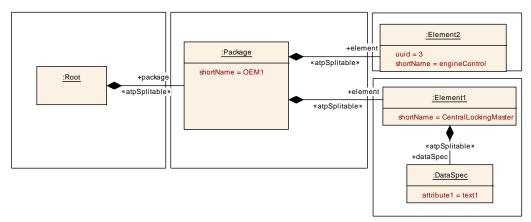


Figure 3.12: First example model

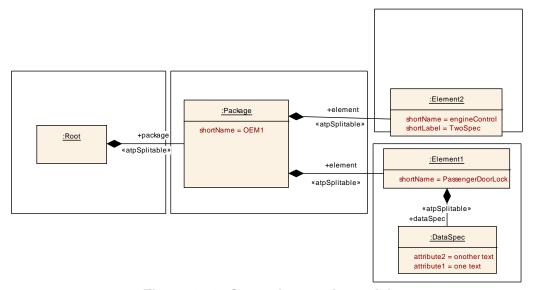


Figure 3.13: Second example model



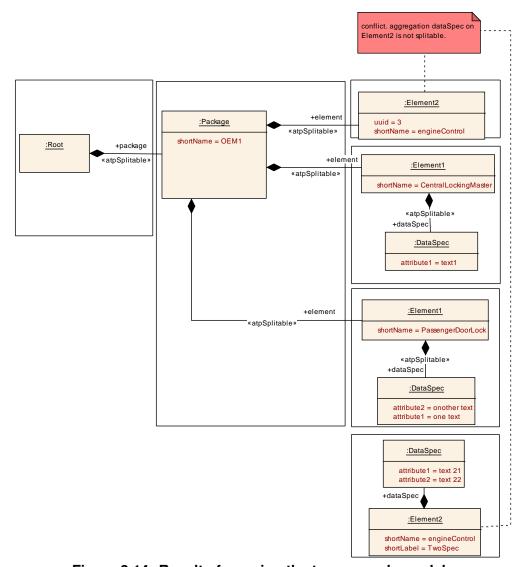


Figure 3.14: Result of merging the two example models

3.3 Shipment of AUTOSAR models and related artifacts

As described in the sections above, the minimum required data exchange mechanism of AUTOSAR authoring tools is the interpretation and creation of AUTOSAR XML descriptions which can be split up over several files.

The separation over several files imposes the risk that a file gets lost during the data exchange or a file was accidentally transmitted incompletely. Listing all files that belong to a shipment as meta-data for data exchange would allow the receiver to check if all files have been received.

The meta-data for data exchange should contain information that supports the exchange of AUTOSAR models and related artifacts:



- List of physical artifacts (e.g. files) that belong to the shipment in order to detect missing or superfluous artifacts. The physical artifacts are represented according to EngineeringObject.
- Checksum for each file in order to allow for detection of modification.
- Access rights on model elements which allow for transmitting information which model elements are allowed to be changed by the receiver.
- Explicit annotation of deleted, moved and added model elements in order to support merging.

3.3.1 AUTOSAR tool SHALL be able to interpret and create ASAM Container Catalog file for meta-data exchange

[TR_IOAT_00036] AUTOSAR tool SHALL be able to interpret and create ASAM Container Catalog file for meta-data exchange [

	An AUTOSAR tool SHALL be able to interpret and create ASAM Container Catalog file that contains meta-data about the relevant artfacts:		
Description:	SHALL be able to load the partial models from the artifacts denoted in the catalog		
	SHALL be able to resolve EngineeringObject via the meta-data in the catalog to find the physical file names of the artifacts		
	SHOULD be able to interpret / maintain the UPD-Attribute in <ablock></ablock>		
	SHOULD be able to only load a subset of the partial models depending on particular use cases		
Rationale:	Support the exchange of additional information about exchanged XML-descriptions and their usage. e.g. access policies, checksum, list of files that contain the XML description. The Catalog also allows to find the relevant artifacts independent from the position in the file system.		
Use Case:	[UC_IOAT_00008]		
Dependencies:	More requirements on the meta-data for data exchange are described in [TR_IOAT_00037], [TR_IOAT_00038], [TR_IOAT_00039]. Per shipment all meta-data for data exchange must be stored in a single file. Meta-data for data exchange is not splitable. Otherwise meta-data for meta-data would be required.		
Supporting Material:	ASAM container catalog [18]		

(UC IOAT 00008)

Table 3.2 illustrates a (practicable) example for a set of categorys for EngineeringObjects / <ABLOCK> for AUTOSAR artifacts containing partial models.



Example 3.3 illustrates a directory structure of AUTOSAR XML descriptions. The correlating ASAM CC is shown in example 3.4. Note that for the first entry (SysDescr "FillerCap") the representation of additional meta-data is illustrated.

Example 3.3

```
C:\TEMP\FILLERCAP
+-- FillerCap_cc.xml <!-- the catalog file -->
+-- RBCentralElements_Standard.arxml
+-- FillerCap SWCompo.arxml
+-- FillerCap_SysDescr.arxml
+-- FillerCapCompo
   +-- FillerCapCompo_SWCD.arxml
   \-- FillerCapCompo_Doc.arxml
+-- FCPCtrl
  +-- FCPCtrl_SWCD.arxml
   \-- FCPCtrl_Doc.arxml
+-- FCPIdctr
   +-- FCPIdctr_SWCD.arxml
   \-- FCPIdctr_Doc.arxml
+-- INTEG
  +-- INTEG SWCD.arxml
   \-- INTEG_Doc.arxml
+-- IOIfc
   +-- IOIfc SWCD.arxml
    \-- IOIfc_Doc.arxml
\-- SWTNrm
    +-- SWTNrm_SWCD.arxml
    \-- SWTNrm_Doc.arxml
```

Example 3.4



```
<AREF CATEGORY="Doc">FillerCap</AREF>
    <AREF CATEGORY="SWCD">FillerCap</AREF>
    <AREF CATEGORY="Doc">SWTNrm</AREF>
    <AREF CATEGORY="SWCD">SWTNrm</AREF>
   <AREF CATEGORY="Doc">IOIfc</AREF>
    <AREF CATEGORY="SWCD">IOIfc</AREF>
   <AREF CATEGORY="Doc">INTEG</AREF>
   <AREF CATEGORY="SWCD">INTEG</AREF>
   <AREF CATEGORY="Doc">FCPIdctr</AREF>
    <AREF CATEGORY="SWCD">FCPIdctr</AREF>
    <AREF CATEGORY="Doc">FCPCtrl</AREF>
    <AREF CATEGORY="SWCD">FCPCtrl</AREF>
  </AREFS>
</ABLOCK>
<ABLOCK UPD="NEW">
 <SHORT-NAME>FillerCap</SHORT-NAME>
  <CATEGORY>SysDescr</CATEGORY>
  <ADMIN-DATA>
    <DOC-REVISIONS>
      <DOC-REVISION>
        <REVISION-LABEL>3.1.0/REVISION-LABEL>
        <ISSUED-BY>TheSender</ISSUED-BY>
      </DOC-REVISION>
   </DOC-REVISIONS>
    <SDGS>
      <SDG GID="AUTOSAR">
        <SD GID="MD5">B7296055E71F42807DF5FDB93EE0F50D</SD>
      </SDG>
    </SDGS>
  </ADMIN-DATA>
  <FILES>
   <FILE>FillerCap_SysDescr.arxml</FILE>
  </FILES>
</ABLOCK>
<ABLOCK>
 <SHORT-NAME>FillerCap/SHORT-NAME>
  <CATEGORY>SWCompo</CATEGORY>
  <FILES>
    <FILE>FillerCap_SWCompo.arxml</FILE>
  </FILES>
</ABLOCK>
<ABLOCK>
 <SHORT-NAME>RBCentralElements
  <CATEGORY>Standard/CATEGORY>
   <FILE>RBCentralElements_Standard.arxml
  </FILES>
</ABLOCK>
<ABLOCK>
  <SHORT-NAME>FillerCapCompo</SHORT-NAME>
  <CATEGORY>SWCD</CATEGORY>
  <FILES>
    <FILE>FillerCapCompo/FillerCap_SWCD.arxml</FILE>
  </FILES>
</ABLOCK>
<ABLOCK>
```



```
<SHORT-NAME>FillerCapCompo</SHORT-NAME>
 <CATEGORY>Doc</CATEGORY>
  <FILES>
   <FILE>FillerCapCompo/FillerCap_Doc.arxml</FILE>
  </FILES>
</ABLOCK>
<ABLOCK>
 <SHORT-NAME>SWTNrm</SHORT-NAME>
 <CATEGORY>SWCD</CATEGORY>
   <FILE>SWNrm/SWTNrm SWCD.arxml</FILE>
 </FILES>
</ABLOCK>
<ABLOCK>
 <SHORT-NAME>SWTNrm</SHORT-NAME>
 <CATEGORY>Doc</CATEGORY>
 <FILES>
    <FILE>SWNrm/SWTNrm Doc.arxml</FILE>
  </FILES>
</ABLOCK>
<ABLOCK>
  <SHORT-NAME>IOIfc</SHORT-NAME>
  <CATEGORY>SWCD</CATEGORY>
 <FILES>
   <FILE>IOIfc/IOIfc_SWCD.arxml</FILE>
  </FILES>
</ABLOCK>
<ABLOCK>
  <SHORT-NAME>IOIfc
  <CATEGORY>Doc</CATEGORY>
 <FILES>
   <FILE>IOIfc/IOIfc_Doc.arxml</FILE>
 </FILES>
</ABLOCK>
<ABLOCK>
 <SHORT-NAME>INTEG</SHORT-NAME>
  <CATEGORY>SWCD</CATEGORY>
  <FILES>
    <FILE>INTEG/INTEG_SWCD.arxml</FILE>
 </FILES>
</ABLOCK>
<ABLOCK>
 <SHORT-NAME>INTEG</SHORT-NAME>
  <CATEGORY>Doc</CATEGORY>
 <FILES>
   <FILE>INTEG/INTEG_Doc.arxml</FILE>
 </FILES>
</ABLOCK>
<ABLOCK>
  <SHORT-NAME>FCPIdctr
 <CATEGORY>SWCD</CATEGORY>
   <FILE>FCPIdctr/FCPIdctr SWCD.arxml</FILE>
  </FILES>
</ABLOCK>
<ABLOCK>
```



```
<SHORT-NAME>FCPIdctr
     <CATEGORY>Doc</CATEGORY>
       <FILE>FCPIdctr/FCPIdctr_Doc.arxml</FILE>
     </FILES>
    </ABLOCK>
    <ABLOCK>
     <SHORT-NAME>FCPCtrl</SHORT-NAME>
     <CATEGORY>SWCD</CATEGORY>
       <FILE>FCPCtrl/FCPCtrl SWCD.arxml</FILE>
     </FILES>
   </ABLOCK>
    <ABLOCK>
     <SHORT-NAME>FCPCtrl</short-NAME>
     <CATEGORY>Doc</CATEGORY>
       <FILE>FCPCtrl/FCPCtrl Doc.arxml</FILE>
     </FILES>
   </ABLOCK>
 </ABLOCKS>
</CATALOG>
```

3.4 Naming convention of AUTOSAR XML description files

According to [TR_IOAT_00062] AUTOSAR XML descriptions SHALL use the file extension ".arxml" (short for AUTOSAR XML).

[TR_IOAT_00069] Name pattern for AUTOSAR XML description files [AUTOSAR XML descriptions should use the following pattern for the file names:

```
{module}_[{SubUseCaseAbbr}_] {UseCaseAbbr}.arxml
```

- {module} describes the subject of the AUTOSAR XML description, for example one of
 - name of a module according to [TPS_GST_00017]
 - the name of a component
 - the name of the ECU
 - even a fixed name like "SYS"
- {SubUseCaseAbbr} (optional) defines the intended sub-usage of the contained information.
- {UseCaseAbbr} defines the intended usage of the contained information. AUTOSAR has not formally defined the use cases for AUTOSAR XML description filenames. However, some examples are given by Table 3.2



The maximum length of the filename is restricted to 255 characters. The following restrictions apply:

```
name ::= [a-zA-Z][a-zA-Z0-9_] *
SubUseCaseAbbr ::= [a-zA-Z][a-zA-Z0-9] *
UseCaseAbbr ::= [a-zA-Z][a-zA-Z0-9] *
```

(RS IOAT 00003)

SubUseCaseAbbr	UseCaseAbbr	Description
	BAMF	Build Action Manifest
	BSWMD	BSW Module Description
	Blueprint	Blueprints
	Doc	Documentation
	Example	Example objects
	EcuExtr	Ecu extract
STMD, VSMD	EcucParamDef	ECU Configuration Parameter Definition
	EcucValues	ECU Configuration Values
Prot	EcucValues	Protected ECU Configuration Values
Can, Lin, Flexray	Frames	Frames
	HWT	Hardware topology
	ISigs	Signals of the Interaction Layer
	Keyword	Keyword defintions
	PDUs	Protocol Data Unit
	SWCD	Component Type
	SWCompo	Ecu Software Composition
	Standard	Standardized objects
	SysDescr	System description
	SysExtr	System extract
	SysSigs	System Signals

Table 3.2: Use cases for AUTOSAR XML descriptions

[TR_IOAT_00070] Kind-based SubUseCase \lceil Note that if one wants to use separate artifacts for the elements related to software component or module, it is recommended to use the kind as <code>SubUseCaseAbbr</code>. For example the <code>CompuMethods</code> for a component named <code>foo</code>, would be in an artifact named <code>foo_CompuMethods_SWCT.arxml</code>. \rfloor ()

3.5 Specialized AUTOSAR tools

Within a tool-chain tools that consumes AUTOSAR models which have been created in earlier phases should be able to interpret and understand all information which has been defined before and is relevant for the processing step in question. This implies that an AUTOSAR tool chain may be built of tools which process only a subset of the AUTOSAR models. Therefore tools can be called AUTOSAR compliant, even if they are specialized to particular tasks and therefore only handle a special subset of the AUTOSAR meta-model.



3.5.1 Requirements for predictable tool interoperability

It should be predictable that two tools are able to exchange their models. In an early phase in the development process it should be possible to find out if two tools are able to exchange models which will be created in later phases. This could be a criterion for choosing tools that are used in an AUTOSAR development process.

The formal validation of this expression would require all AUTOSAR tools to formally describe the supported subset of the AUTOSAR meta-model. It needs to be checked if the structure and semantics of all meta-classes that are supported by the tool A is also supported by the tool B.

This approach would check if two tools can exchange information if all supported features are used. Usually not all features are always used and therefore the results of this formal compatibility check would become questionable.

A more pragmatic approach would be to compare features which describe the supported functionalities in a more abstract way. A starting point for these functionalities are the tasks defined in the "AUTOSAR methodology" document [2]. AUTOSAR should precisely define the required inputs and provided outputs of those tasks.

A more elaborate compatibility test can then be performed which can be based on a number of test-models that are created in early phases of the development of an AUTOSAR system.

In practice the information if two tools can exchange models is not the only criterion for choosing a special tool (consider criteria such as usability, know how with existing tools, etc). It is not very likely that e.g. a supplier switches to another tool because it is not completely compatible with the tool of an OEM. Instead he would approach the tool-vendor and ask for implementation of the missing features.

In order to get a set of AUTOSAR authoring tools which have comparable functionalities and are able to exchange their models, a set of compliance classes can help. (See Chapter 4.2 for more information on those compliance classes.)

3.5.1.1 Documentation of AUTOSAR tool SHOULD describe supported features

[TR_IOAT_00016] Documentation of AUTOSAR tool SHOULD describe supported features [

Description:	The documentation of an AUTOSAR tool SHOULD describe the supported features. The description of the features SHOULD be based on the tasks defined in the "AUTOSAR methodology" document [2]			
Rationale:	When choosing specialized Authoring tools that do not support the full set information described in the AUTOSAR meta-model for use in an AUTOSAR tool chain, it SHALL be predictable if AUTOSAR models can be exchanged between different tools.			
Use Case:	-			
Dependencies:	_			



_	
Supporting	
	_
Material:	
materiar.	

10

3.5.2 Requirements on the integration of specialized tools

The sections 3.1, 3.2 and 3.3 described some general concepts and requirements on tool interoperability. The following list describes some observations on handling of AUTOSAR models with special focus on tools that do not cover all information that is represented by the AUTOSAR meta-model:

- AUTOSAR models are exchanged via AUTOSAR XML descriptions which can be split up over several partial models. While interpreting an AUTOSAR XML description an AUTOSAR tool must merge the contents of the different partial models into the internal data-structure of the tool (see section 3.1.3).
- While merging AUTOSAR models conflicts can occur. Often user-interaction is required for the resolving of merge conflicts. A tool can usually only provide interaction mechanisms for model elements that are internally represented.
- While merging AUTOSAR models which were created by different parties (e.g.: integration of several independently developed models to an overall model) violations of semantic constraints can show up. Each AUTOSAR model could be valid in itself. However, violations can show up if all sub models are merged and checked together. These violations can only be solved by tools that are able to modify the violating information.
- A tool can very well perform its intended function even if some errors exist in the model. Only the information that is required for performing the intended function needs to be valid.
- [TR_IOAT_00073] Utilize BuildActionManifest [An AUTOSAR tool may be supported by BuildActionManifest (see [TPS_GST_00294]) to specify its particular application. This can be supported by providing even blueprints of BuildActionManifest.](UC_IOAT_00008)

3.6 Support for different versions of the meta-model

The implementation of the "Data Format Level", "Content level", "Semantic level" and all higher levels highly depend on the AUTOSAR meta-model. Changes in the meta-model can be classified in two different classes. The criteria for these classes are based on the effort that is usually required for adaptation of tools.



Minor changes Extensions in the meta-model that don't influence relations and constraints between existing classes in the meta-model are considered as minor changes. Existing models are still valid when used in a tool that conforms to a new version of the meta-model.

Major changes Changing the structure, semantics and/or the relations in the metamodel are considered as major changes. Existing models are no longer valid in newer versions of the tool. They need to be updated.

The following sections describe these two types of changes and their impact on the aforementioned levels in more details.

An AUTOSAR tool MAY be able to process AUTOSAR XML descriptions created according to different major versions of AUTOSAR. Therefore, it is feasible that content contributed by XML descriptions created according to different major versions can be freely combined inside the tool as long as the tool supports this approach. Nevertheless the default scenario for an AUTOSAR project is expected to use only one revision of XML schema.

Within a minor version, several revisions are created over time as a means to maintain the version. An AUTOSAR tool MAY but is not required to support all revisions of a specific version, e.g. it may support 4.0.1, 4.0.2, and 4.0.4. That is, 4.0.3 is left out in this example. In other words, tool vendors shall **not** be forced to upgrade all tools to support upcoming revisions because the changes implemented into a specific revision might be irrelevant for the particular tool.

Note that a tool that is e.g. unable to process an XML file created according to revision 4.0.3 MAY still load this file if it uses the XML Schema created for revision 4.0.4 as the basis for validation.

An AUTOSAR tool may be able to write AUTOSAR XML files according to a subset of the published revisions of a version. The tool is neither required to support **all** revisions for writing nor is it required to automatically write the file according to the latest revision.

An AUTOSAR tool MUST not change the AUTOSAR version of an XML description without permission by the user.

3.6.1 Minor changes in the meta-model

These changes don't influence the existing structure, interrelationships and constraints within the meta-model: Existing instances of an old meta-model remain valid with respect to a new meta-model. The following changes result in minor changes:

- adding new meta-classes,
- adding new (optional) aggregations,
- adding new (optional) references,
- adding new (optional) attributes,



- adding semantic constraints which do not effect existing meta-classes and relations and
- setting a class from abstract to concrete.

These minor changes in the meta-model SHOULD result in minor changes in the XML representation (existing XML descriptions remain valid with respect to a new AUTOSAR XML schema). AUTOSAR tools that are implemented according to a new version of the AUTOSAR meta-model (only minor changes have been performed) can interpret existing AUTOSAR XML descriptions. The following sections describe the effect on the different abstraction levels:

- "Physical level": changes on the meta-model don't have any affect on the physical level
- "Data format level": The new AUTOSAR XML schema contains additional XML elements which represent the new content defined by the meta-model.
 - Since AUTOSAR tools and the respective AUTOSAR XML schema shall allow for exchanging partially described AUTOSAR models², existing AUTOSAR XML descriptions remain valid with respect to the new AUTOSAR XML schema.
 - In other words: It is only possible to exchange partially defined AUTOSAR XML descriptions if most of the content is considered to be optional in the AUTOSAR XML schema. Adding a new optional element doesn't violate the validity of existing AUTOSAR XML descriptions.
- "Content level": It is expected that new versions of the tool implementations are more powerful with respect to the coverage of meta-classes defined by the AUTOSAR meta-model. Therefore they will be able to interpret existing XML descriptions and create the internal data-representation.
- "Semantic level": The additional constraints are limited to the extensions. An existing AUTOSAR model is still valid with respect to the new constraints since these constraints have by definition of minor changes no impact on existing metaclasses.

Please note: An old AUTOSAR tool can still fully interpret an AUTOSAR XML description if the new features have not been used in the description.

Additionally, AUTOSAR tools are not required to support the full set of information defined in the meta-model (see section 3.5 for more details).

They can ignore information they do not understand. Therefore an old tool could still interpret the supported features and ignore the additional features.

Of course this old tool is usually not able to modify features that have been introduced in the extended meta-model.

An overview over the compatibility of AUTOSAR tools and AUTOSAR XML descriptions in case of **minor changes** is listed in Table 3.3.

²See requirement on AUTOSAR authoring tools [TR_IOAT_00035]



	Old AUTOSAR tool	New AUTOSAR tool
Old AUTOSAR XML de- scription	compatible	compatible
New AUTOSAR XML description (minor change)	Fully compatible only if new features are not used in the new XML description ³ . Otherwise an tool can still interpret the new XML description. However it is not able to modify information that was not available in the old AUTOSAR format.	compatible

Table 3.3: Compatibility matrix for minor changes

3.6.2 Major changes in the meta-model

Major changes are modifications on the meta-model which go beyond minor changes. These include:

- Adding constraints for existing meta-classes and relations
- · Removing of meta-classes and relations
- Changes on the semantics
- Renaming of meta-classes or relations
- Changing the upper multiplicity of attributes, references or composite associations from 1 to a value bigger than one or vice versa (Those changes usually require changing the internal data structure of tools. Lists of elements need to be supported)
- Adding new specializations to meta-classes which did not already have specializations before

Existing AUTOSAR models can no longer be used without modifications in a tool that supports the new version of the meta-model. An AUTOSAR tool SHALL reject the import or provide means to automatically or manually update the model to the new version. Information on update should be given to the user.

Please note, that major changes in the meta-model only have an effect on a tool if the changed structures are supported by the tool. E.g. If a tool is specialized on the creation of software components and it doesn't support aspects described in the ECU Resource Template [6] then any major change in the meta-model concerning the ECU descriptions doesn't have any impact on that tool: From the point of view of this specialized tool, old AUTOSAR models remain compatible.

³Please note that the XML namespace might change in later versions of the AUTOSAR XML Schema. If the tool uses XML Schema validation it should be able to apply the old XML Schema to the new XML description even if the XML namespace has changed.



An overview over the compatibility of AUTOSAR tools and AUTOSAR XML descriptions in case of **major changes** is listed in Table 3.4.

	Old AUTOSAR tool	New AUTOSAR tool
Old AUTOSAR XML descrip-	compatible	Compatible only if changes in
tion		the meta-model do not affect
		the content described in the old
		XML description. Otherwise an
		upgrade mechanism should be
		provided by the AUTOSAR tool.
New AUTOSAR XML descrip-	Compatible only if changes in	compatible
tion (major change)	the meta-model do not affect the	
	content described in the new	
	XML description. Otherwise the	
	tool SHOULD reject the XML de-	
	scription.	

Table 3.4: Compatibility matrix for major changes

3.6.3 AUTOSAR tool SHALL properly handle Meta-Model versions

[TR_IOAT_00066] AUTOSAR tool SHALL properly handle Meta-Model versions

Description:	It should be predictable if tools (potentially with different underlying meta model versions) can exchange AUTOSAR models. • An AUTOSAR tool MAY but is not forced to support multiple versions of the AUTOSAR meta-model • An AUTOSAR authoring tools MUST not change an AUTOSAR xml description to another version of the AUTOSAR meta-model without user interaction.
Rationale:	The AUTOSAR meta model and the derived AUTOSAR data exchange format will change over time.
Use Case:	[UC_IOAT_00002]
Dependencies:	XML schema versions see [TR_IOAT_00012] and [TR_IOAT_00062]
Supporting Material:	_

(UC_IOAT_00002)

3.6.4 Authoring tool SHOULD support upgrading AUTOSAR models

[TR_IOAT_00005] Authoring tool SHOULD support upgrading AUTOSAR models



Description:	AUTOSAR authoring tools SHOULD support upgrading AUTOSAR models from at least the last major version of the meta-model. It is not required that an authoring tool supports the upgrade of arbitrary AUTOSAR models. Only the content that is internally supported by the tool SHOULD be upgradeable. If the tool doesn't support automatic or manual upgrade of models then it SHALL reject the import of old XML description. It is not required that a tool creates AUTOSAR XML descriptions that are valid with respect to older AUTOSAR XML schema.
Rationale:	Reuse of existing AUTOSAR models.
Use Case:	[UC_IOAT_00002]
Dependencies:	-
Supporting Material:	_

(UC_IOAT_00002)

3.7 Support for versioning of AUTOSAR models

3.7.1 Granularity of AUTOSAR models

The minimum granularity of an AUTOSAR model SHALL be defined in the meta-model. If aggregations in the meta-model are marked as \ll atpSplitable \gg , then the aggregated elements may be stored in different models. Please note that each individual XML file SHALL be valid with respect to the AUTOSAR XML schema.

3.7.2 Annotation of AUTOSAR model elements by version information

The AUTOSAR meta-model supports meta-data for storing version information and authorship for each element that is derived from the meta-class Identifiable.

3.8 Standardized error handling

3.8.1 AUTOSAR tools SHALL perform a standardized error handling

$[TR_IOAT_00065] \ AUTOSAR \ tools \ SHALL \ perform \ a \ standardized \ error \ handling$

Description:	In order to be able to exchange information about errors in models it is required to have a common vocabulary for model errors. This allows for discussing about those errors while using different tools.
Rationale:	As a rationale for this proposal, please consider a scenario where different project partners carry out an AUTOSAR software project by means of different tools for e.g. structural design.
Use Case:	[UC_IOAT_00005], [UC_IOAT_00006], [UC_IOAT_00008]



Dependencies:	_
Supporting Material:	for more details see information below.

(RS_IOAT_00002, UC_IOAT_00005, UC_IOAT_00006, UC_IOAT_00008)

Let, for example, developers at different organizations using different AUTOSAR tools work with an AUTOSAR model that contains semantic inconsistencies. Now let the error messages according to the inconsistencies be reported by the particular tools. How can the partners be sure that they talk about the same issue if each of the tools reports a different error without a hint to a standardized error case?

When working with an AUTOSAR authoring tool the validity of an AUTOSAR model can be checked at a wide variety of user interactions. E.g. the model could be checked whenever:

- AUTOSAR XML descriptions are interpreted or created,
- the user inserts new data,
- the user inserts some specific data or
- the user explicitly triggers a validation of the model.

According to [TR_IOAT_00003], an AUTOSAR tool SHALL support validity checks. Further details are not specified by AUTOSAR and are left over to the implementation of the tool.

All error messages SHALL be significant and meaningful enough that ECU developers (not only meta-model specialists) can solve the problem.

3.8.2 Error codes on semantic level

Authoring tools shall check the validity of AUTOSAR models against semantic constraints (see requirement [TR_IOAT_00003]). If semantic constraints are violated, an error-code needs to be created.

The semantic constraints are defined in the AUTOSAR template specifications according to the following pattern (see chapter 2.2.4):

[constr_<ConstraintId>] <ConstraintHeadline> [<Constraint description> |()

For each detected semantic constraint violation the following information shall be reported:

• **ConstraintId**: The Id mentioned in the template specification which SHALL be displayed in case the constraint is violated. Note that this ConstraintId shall be reported in the error message. The tool may introduce its own tool specific error ids which shall not be confused with any AUTOSAR ConstraintId.



- **ConstraintHeadline**: the formal definition of the constraint using the object constraint language.
- ConstraintDescription: The human readable description of the constraint.
- **Severity**: The severity fatal, critical, uncritical defines the behavior of the tool in case the constraint is violated⁴.
- path Name and path of the element in the AUTOSAR XML description.

Note that an AUTOSAR Tool might evaluate additional constraints which are not (yet) expressed in the AUTOSAR template specifications. In this case it shall **not** define a ConstraintId outside of AUTOSAR. Otherwise such tool specific ConstraintId would potentially be in conflict with future AUTOSAR specifications.

3.8.3 Guidelines for standardized error reporting

3.8.3.1 Interactive authoring tool SHOULD guide the user to the locations of errors

[TR_IOAT_00049] Interactive authoring tool SHOULD guide the user to the locations of errors $\ \lceil$

Description:	An interactive authoring tool SHOULD guide the user to the locations of errors. If possible the error messages SHOULD contain a hint that describes how the error can be fixed.
Rationale:	Support user while fixing errors in an AUTOSAR model
Use Case:	-
Dependencies:	-
Supporting Material:	_

10

3.8.3.2 Authoring tool SHOULD support exchanging information about errors

[TR_IOAT_00050] Authoring tool SHOULD support exchanging information about errors \lceil

Description:	An AUTOSAR authoring tool SHOULD support exchanging information about
	errors.
Rationale:	Some tools (e.g.: highly specialized batch tools) might indicate an error but might only provide limited means for fixing the error. A standardized representation of information of the errors including the location in the model that can be read into another tool can help identifying and fixing the problems.

⁴As the severity is considered from the perspective of the tool, it is **not** specified with the constraints in the AUTOSAR templates



Use Case:	-
Dependencies:	[TR_IOAT_00055] meta-data for data exchange SHOULD contain information about errors in the model.
Supporting Material:	_

10

3.8.3.3 AUTOSAR tool MAY use well structured error messages

[TR_IOAT_00068] Authoring tool SHOULD support exchanging information about errors [

Description:	AUTOSAR tool MAY use well structured error messages.
Rationale:	Provide as much information as suitable for particular error message. Support the recognition of relevant information in error message.
Use Case:	_
Dependencies:	this is an extension of [TR_IOAT_00049]
Supporting Material:	_

10

An AUTOSAR tool may structure is messages along its own purpose using specific fields. This may be represented even using XML and may be standardized in upcoming AUTOSAR versions.

The following list is a collection of proposed information items in particular applicable to log files used for exchanging information about errors.

ErrorCode A symbolic name for the message text

StandardErrorCode The reference to the AUTOSAR error code

ConstraintCode Reference to the semantic constraint mentioned in the AUTOSAR template specification.

Signature Signature of the message for duplicate checks

Timestamp A time stamp for the message

ShortName A unique identification which allows to refer to particular error messages. This can also be used to establish references between error messages, e.g. for Screening and also to trace back to root cause

Desc The human readable message text.

Component Such information item may help the user to locate the problem in the model



BaseUrl An url for a base directory which can be used as basis for file references in a log file. This is typically the root directory of a project structure.

ColumNumber The column of the error position

LineNumber The line number of the error position

LongName The title of the error message

ObjectCategory The category of for example the involved ApplicationPrimitiveDataType (e.g.VALUE)

PrimaryErrorReference Reference to the root cause if applicable

ScopeEntryReference Reference to a scoping message if applicable

Object The shortName based reference to the AUTOSAR element which caused the error

ToolName The name of the tool which reported the error

ToolVersion The version of the tools which reported the error

IncidentUrl The Url which refers to the artifact in which the error occurs

Value The actual found value which caused the problem

3.9 Requirements on meta-data for data exchange

The availability of meta-data for data exchange supports the interoperability of AUTOSAR tools. This meta-data is e.g. required for checking the completeness of a shipment or for giving additional information on what the receiver of an AUTOSAR model is allowed to do with the model. This chapter describes requirements on the meta-data for data exchange.

3.9.1 Meta-data for data exchange SHALL be based on existing standards and SHALL be defined by AUTOSAR

[TR_IOAT_00037] Meta-data for data exchange SHALL be based on existing standards and SHALL be defined by AUTOSAR $\c|$

Description:	The meta-data for supporting data exchange SHALL be based on existing standards.
Rationale:	Use of existing standardized (existing) solutions for interpretation and creation of meta-data.
Use Case:	Reduce costs for implementation of tools/libraries that are capable of interpreting and creating of meta-data for data exchange.
Dependencies:	-



Supporting Material:	Examples of existing standards for describing meta-data e.g. for data exchange
	are: ASAM Container Catalog - ASAM CC

]()

3.9.2 Description of access rights SHOULD allow for being mapped to data structures that are different from the AUTOSAR meta-model

[TR_IOAT_00038] Description of access rights SHOULD allow for being mapped to data structures that are different from the AUTOSAR meta-model \lceil

Description:	The description of access rights SHOULD allow for being mapped to data structures that are different from the AUTOSAR meta-model.			
Rationale:	The internal data structure of AUTOSAR tools will very likely be different to the structure of the AUTOSAR meta-model. Tools can only represent information about the access rights to the user if the access rights defined on instances of the AUTOSAR meta-model can be mapped to instances of the tool internal data structure.			
Use Case:	A tool might want to represent a system on a high level of abstraction. E.g. the tool only shows some connections between a CanCluster and an EcuInstance. The existence of PhysicalChannels and CommConnectorPort might be hidden to the user. If the access rights are defined in a very complex manner, then it might not be possible to decide which impact these right have to model elements in the tool with a different internal data structure.			
Dependencies:	-			
Supporting Material:	_			

]()

3.9.3 Meta-data for data exchange SHALL NOT change the content of AUTOSAR models

[TR_IOAT_00039] Meta-data for data exchange SHALL NOT change the content of AUTOSAR models \lceil

Description:	The meta-data for data exchange SHALL be independent from the content of an AUTOSAR model. The content of an AUTOSAR model SHALL remain identical if it is exchanged together with or without the meta-data.
Rationale:	Allow for integration of tools that do not support meta-data for data exchange. Avoiding the creation of new versions of the AUTOSAR model for each data exchange.
Use Case:	[UC_IOAT_00008]
Dependencies:	_



Supporting Material:	_
materiar.	

10

3.9.4 Meta-data for data exchange SHOULD contain information about errors in the model

[TR_IOAT_00055] Meta-data for data exchange SHOULD contain information about errors in the model \lceil

Description:	Meta-data for data exchange SHOULD contain information about errors in the model in a standardized format. This format SHOULD contain the standardized error code, the informal error message and the location of the detected error in the model.
Rationale:	Exchange information about errors contained in a model.
Use Case:	Within an AUTOSAR development process several kinds of tools might be used. E.g.: Interactive tools, batch tools, tools that do not support all elements and constraints in the meta-model. If error-log messages that are created by a specialized batch-tool are created in a standardized format, then this information can interpreted by other tools for fixing the errors.
Dependencies:	Error codes
Supporting Material:	_

10

3.9.5 Meta-data for data exchange SHOULD contain information about deleted, changed and moved elements

[TR_IOAT_00056] Meta-data for data exchange SHOULD contain information about deleted, changed and moved elements \lceil

Description:	Meta-data for data exchange SHOULD contain information that supports merging models. It SHOULD contain information about added, changed and moved elements.
Rationale:	Support automated merge without user-interaction.
Use Case:	Two models have been created out of a common model and contain redundant information. E.g.: both models contain an element with uuid=3. In one model that element has been removed explicitly. While merging the two models a tool needs to know if an element was removed explicitly or if one model was incomplete.
Dependencies:	-
Supporting Material:	_





]()



4 Compliance

An AUTOSAR tool may be called "AUTOSAR compliant" if it implements the mandatory requirements on AUTOSAR authoring tools defined in this document. For better readability the requirements of this document are summarized in the following section.

4.1 Summary of requirements on AUTOSAR tools

The following table lists all requirements on AUTOSAR tools which are required for tool interoperability. Note that the mandatory requirements are indicated by the word SHALL (instead of SHOULD).

Each requirement is assigned to a number of abstraction levels (marked by "x"). This allows for e.g. easily identifying all requirements that are relevant on the content level and all higher level. For example, a plugin for an AUTOSAR authoring tool could directly access the internal data structure of the authoring tool: Plugin and authoring tool would exchange information on content level. For this communication requirements on lower levels are not relevant.

Requirement on AUTOSAR tools		Abstraction Level				
Mandatory Requirements	See Chapter	Physical	Data Format	Content	Semantic	Presentation
[TR_IOAT_00010] AUTOSAR tool SHALL support sets of files	3.1.1.1	Х				
[TR_IOAT_00012] AUTOSAR tool SHALL support AUTOSAR XML descriptions	3.1.2.1		Х			
[TR_IOAT_00033] Authoring tool SHALL be able to import and export supported model elements as AUTOSAR XML descriptions	3.1.2.2			Х		
[TR_IOAT_00062] Authoring tool SHALL support well defined serialization	3.1.2.3		Х			
[TR_IOAT_00007] Authoring tool SHALL NOT change model contents without the intention of the user	3.1.3.1			Х		
[TR_IOAT_00035] Authoring tool SHALL support exchange of partial information	3.1.3.2			Х		
[TR_IOAT_00003] Authoring tool SHALL support validity checks	3.1.4.1				Х	
[TR_IOAT_00060] AUTOSAR tool SHALL support variants	3.1.4.2				Х	
[TR_IOAT_00024] Authoring tool SHALL support unique identification of model elements	3.2.1.6			Х		
[TR_IOAT_00061] Authoring tool SHALL be able to handle partial AUTOSAR models	3.2.2.1			Х	Х	
[TR_IOAT_00042] AUTOSAR tool SHALL support the merging of AUTOSAR models	3.2.2.2			Х		
[TR_IOAT_00064] AUTOSAR tool SHALL resolve references	3.2.2.3			Х		
[TR_IOAT_00063] AUTOSAR tools SHALL accept double defined ARElements as long as their nonSplitables are the same	3.2.2.5			Х		
[TR_IOAT_00036] AUTOSAR tool SHALL be able to interpret and create ASAM Container Catalog file for meta-data exchange	3.3.1	Х		Х		



[TR_IOAT_00066] AUTOSAR tool SHALL properly handle Meta-	3.6.3	Х	Х	Х	Х
Model versions					
[TR_IOAT_00065] AUTOSAR tools SHALL perform a standardized	3.8.1	Х	Х	Х	Х
error handling					
Optional Requirements					
[TR_IOAT_00048] Authoring tool SHOULD support AUTOSAR ex-	3.1.3.3		Х		
tension mechanism					
[TR_IOAT_00067] Authoring tool SHOULD maintain references	3.1.3.4		Х		
[TR_IOAT_00043] Authoring tool SHOULD provide a mechanism for	3.2.1.1		Х		Х
showing differences between AUTOSAR models					
[TR_IOAT_00044] Authoring tool SHOULD provide a mechanism for	3.2.2.7		Х		Х
resolving merging conflicts					
[TR_IOAT_00040] Authoring tool SHOULD prohibit the user from	3.2.2.9				Х
modifying model elements that are marked read-only					
[TR_IOAT_00016] Documentation of AUTOSAR tool SHOULD de-	3.5.1.1				
scribe supported features					
[TR IOAT 00005] Authoring tool SHOULD support upgrading	3.6.4	Х	Х	х	Х
AUTOSAR models					
[TR_IOAT_00049] Interactive authoring tool SHOULD guide the	3.8.3.1				Х
user to the locations of errors					
[TR IOAT 00050] Authoring tool SHOULD support exchanging in-	3.8.3.2		Х		
formation about errors					
[TR IOAT 00069] Naming convention for the AUTOSAR XML de-	3.4	Х			
scriptions					
Scriptions					

Table 4.1: Requirements on AUTOSAR tools

4.2 Notes on compliance

4.2.1 Compliance classes based on coverage of the meta-model

In order to allow for seamless tool interoperability, AUTOSAR tools should support a common set of features - the tools should implement a common coverage of the AUTOSAR meta-model.

Otherwise one tool would generate AUTOSAR models that cannot be interpreted by another tool. The definition of these common sets of features highly depends on the intended work-flow. The compliance classes should be based on the ability to perform tasks in the AUTOSAR Methodology [2].

4.2.2 Testing the compliance of an AUTOSAR authoring tool

The compliance of a given tool could be tested by defining a set of AUTOSAR XML descriptions which need to be processed by the AUTOSAR authoring tools. These compliance tests should be performed in early phases of an AUTOSAR system devel-





opment by the stakeholders who need to exchange AUTOSAR models. This document does not define any models for testing the interoperability of AUTOSAR authoring tools.



A Glossary

- **Artifact** This is a Work Product Definition that provides a description and definition for tangible work product types. Artifacts may be composed of other artifacts ([20]).
 - At a high level, an artifact is represented as a single conceptual file.
- **AUTOSAR Tool** This is a software tool which supports one or more tasks defined as AUTOSAR tasks in the methodology. Depending on the supported tasks, an AUTOSAR tool can act as an authoring tool, a converter tool, a processor tool or as a combination of those (see separate definitions).
- **AUTOSAR Authoring Tool** An AUTOSAR Tool used to create and modify AUTOSAR XML Descriptions. Example: System Description Editor.
- **AUTOSAR Converter Tool** An AUTOSAR Tool used to create AUTOSAR XML files by converting information from other AUTOSAR XML files. Example: ECU Flattener
- **AUTOSAR Definition** This is the definition of parameters which can have values. One could say that the parameter values are Instances of the definitions. But in the meta model hierarchy of AUTOSAR, definitions are also instances of the meta model and therefore considered as a description. Examples for AUTOSAR definitions are: EcucParameterDef, PostBuildVariantCriterion, SwSystemconst.
- **AUTOSAR XML Description** In AUTOSAR this means "filled Template". In fact an AUTOSAR XML description is the XML representation of an AUTOSAR model.
 - The AUTOSAR XML description can consist of several files. Each individual file represents an AUTOSAR partial model and shall validate successfully against the AUTOSAR XML schema.
- **AUTOSAR Meta-Model** This is an UML2.0 model that defines the language for describing AUTOSAR systems. The AUTOSAR meta-model is an UML representation of the AUTOSAR templates. UML2.0 class diagrams are used to describe the attributes and their interrelationships. Stereotypes, UML tags and OCL expressions (object constraint language) are used for defining specific semantics and constraints.
- **AUTOSAR Model** This is a representation of an AUTOSAR product. The AUTOSAR model represents aspects suitable to the intended use according to the AUTOSAR methodology.
 - Strictly speaking, this is an instance of the AUTOSAR meta-model. The information contained in the AUTOSAR model can be anything that is representable according to the AUTOSAR meta-model.
- AUTOSAR Partial Model In AUTOSAR, the possible partitioning of models is marked in the meta-model by <code>atpSplitable</code>. One partial model is represented in an AUTOSAR XML description by one file. The partial model does not need to fulfill all semantic constraints applicable to an AUTOSAR model.



- **AUTOSAR Processor Tool** An AUTOSAR Tool used to create non-AUTOSAR files by processing information from AUTOSAR XML files. Example: RTE Generator
- **AUTOSAR Template** The term "Template" is used in AUTOSAR to describe the format different kinds of descriptions. The term template comes from the idea, that AUTOSAR defines a kind of form which shall be filled out in order to describe a model. The filled form is then called the description.
 - In fact the AUTOSAR templates are now defined as a meta model.
- **AUTOSAR XML Schema** This is a W3C XML schema that defines the language for exchanging AUTOSAR models. This Schema is derived from the AUTOSAR meta model. The AUTOSAR XML Schema defines the AUTOSAR data exchange format.
- **Blueprint** This is a model from which other models can be derived by copy and refinement. Note that in contrast to meta model resp. types, this process is *not* an instantiation.
- **Instance** Generally this is a particular exemplar of a model or of a type.
- **Life Cycle** Life Cycle is the course of development/evolutionary stages of a model element during its life time.
- **Meta-Model** This defines the building blocks of a model. In that sense, a Meta-Model represents the language for building models.
- **Meta-Data** This includes pertinent information about data, including information about the authorship, versioning, access-rights, timestamps etc.
- **Model** A Model is an simplified representation of reality. The model represents the aspects suitable for an intended purpose.
- **Partial Model** This is a part of a model which is intended to be persisted in one particular artifact.
- **Pattern in GST**: This is an approach to simplify the definition of the meta model by applying a model transformation. This transformation creates an enhanced model out of an annotated model.
- **Property** A property is a structural feature of an object. As an example a "connector" has the properties "receive port" and "send port"
 - **Properties are made variant by the** ≪atpVariation≫.
- **Prototype** This is the implementation of a role of a type within the definition of another type. In other words a type may contain Prototypes that in turn are typed by "Types". Each one of these prototypes becomes an instance when this type is instantiated.
- **Type** A type provides features that can appear in various roles of this type.
- **Value** This is a particular value assigned to a "Definition".



Variability Variability of a system is its quality to describe a set of variants. These variants are characterized by variant specific property settings and / or selections. As an example, such a system property selection manifests itself in a particular "receive port" for a connection.

This is implemented using the *«atpVariation»*.

Variant A system variant is a concrete realization of a system, so that all its properties have been set respectively selected. The software system has no variability anymore with respect to the binding time.

This is implemented using EvaluatedVariantSet.

Variation Binding A variant is the result of a variation binding process that resolves the variability of the system by assigning particular values/selections to all the system's properties.

This is implemented by VariationPoint.

Variation Binding Time The variation binding time determines the step in the methodology at which the variability given by a set of variable properties is resolved.

This is implemented by vh. Latest Bindingtime at the related properties.

- **Variation Definition Time** The variation definition time determines the step in the methodology at which the variation points are defined.
- **Variation Point** A variation point indicates that a property is subject to variation. Furthermore, it is associated with a condition and a binding time which define the system context for the selection / setting of a concrete variant.

This is implemented by VariationPoint.



B History of Specification Items

B.1 History of Specification Items according to AUTOSAR R4.0.3

B.1.1 Added Specification Items in R4.0.3

USe cases [UC_IOAT_00001] Intergrate extracts from an AUTOSAR model of an OEM passed for further finement and implementation to a supplier [UC_IOAT_00002] Dealing with changes of the AUTOSAR meta model over time [UC_IOAT_00005] Usage within the different steps of top-down functional development	re-						
finement and implementation to a supplier [UC_IOAT_00002] Dealing with changes of the AUTOSAR meta model over time	re-						
[UC_IOAT_00005] Usage within the different steps of top-down functional development							
	Usage within the different steps of top-down functional development						
[UC_IOAT_00006] Support for direct exchange of AUTOSAR models in a tool-chain							
[UC_IOAT_00008] An AUTOSAR model and related artifacts are shipped from one party to other.	other.						
[UC_IOAT_00009] Filter and merge AUTOSAR models							
[UC_IOAT_00010] Handling of identical double definitions							
Requirements							
[TR_IOAT_00005] Authoring tool SHOULD support upgrading AUTOSAR models							
[TR_IOAT_00007] Authoring tool SHALL NOT change model contents without the intention of user	the						
[TR_IOAT_00010] AUTOSAR tool SHALL support sets of files							
[TR_IOAT_00012] AUTOSAR tool SHALL support AUTOSAR XML descriptions							
[TR_IOAT_00016] Documentation of AUTOSAR tool SHOULD describe supported features							
[TR_IOAT_00024] Authoring tool SHALL support unique identification of model elements							
[TR_IOAT_00033] Authoring tool SHALL be able to import and export supported model elements	nts						
as AUTOSAR XML descriptions							
[TR_IOAT_00035] Authoring tool SHALL support exchange of partial information							
[TR_IOAT_00036] AUTOSAR tool SHALL be able to interpret and create ASAM Container Cata	log						
file for meta-data exchange							
[TR_IOAT_00037] Meta-data for data exchange SHALL be based on existing standards a	and						
SHALL be defined by AUTOSAR							
[TR_IOAT_00038] Description of access rights SHOULD allow for being mapped to data structule that are different from the AUTOSAR meta-model	res						
[TR_IOAT_00039] Meta-data for data exchange SHALL NOT change the content of AUTOS	AR						
models	,						
[TR_IOAT_00040] Authoring tool SHOULD prohibit the user from modifying model elements	hat						
are marked read-only							
[TR_IOAT_00043] Authoring tool SHOULD provide a mechanism for showing differences between	en						
AUTOSAR models							
[TR_IOAT_00044] Authoring tool SHOULD provide a mechanism for resolving merging conflict	S						
[TR_IOAT_00048] Authoring tool SHALL support AUTOSAR extension mechanism							
[TR_IOAT_00049] Interactive authoring tool SHOULD guide the user to the locations of errors							
[TR_IOAT_00050] Authoring tool SHOULD support exchanging information about errors							
[TR_IOAT_00055] Meta-data for data exchange SHOULD contain information about errors in model	the						
[TR_IOAT_00056] Meta-data for data exchange SHOULD contain information about delet	ed,						
changed and moved elements							
[TR_IOAT_00060] AUTOSAR tool SHALL support variants							
[TR_IOAT_00061] Authoring tool SHALL be able to handle partial AUTOSAR models							
[TR_IOAT_00062] Authoring tool SHALL support well defined serialization							



[TR_IOAT_00063]	AUTOSAR tools SHALL accept double defined ARElements as long as their
	nonSplitables are the same
[TR_IOAT_00064]	AUTOSAR authoring/integration tools SHALL resolve references
[TR_IOAT_00066]	AUTOSAR tool SHALL properly handle Meta-Model versions
[TR_IOAT_00067]	AUTOSAR Authoring tool SHOULD maintain references
[TR_IOAT_00068]	Authoring tool SHOULD support exchanging information about errors
[TR_IOAT_00069]	Name pattern for AUTOSAR XML description files
[TR_IOAT_00070]	Kind-based SubUseCase

Table B.1: Added Specification Items in R4.0.3

B.2 History of Specification Items according to AUTOSAR R4.1.1

B.2.1 Added Specification Items in R4.1.1

Number	Heading
[TR_IOAT_00071]	Basic Concepts of Data Exchange
[TR_IOAT_00072]	Support for AUTOSAR XML Data Exchange
[TR_IOAT_00073]	Utilize BuildActionManifest
[TR_IOAT_00074]	AUTOSAR Authoring tool SHOULD follow specified access rights

Table B.2: Added Specification Items in R4.1.1

B.3 History of Specification Items according to AUTOSAR R4.2.2

B.3.1 Added Traceables in 4.2.2

Id	Heading
[TR_IOAT_00075]	No empty wrappers

Table B.3: Added Traceables in 4.2.2

B.3.2 Changed Traceables in 4.2.2

ld	Heading
[TR_IOAT_00007]	Authoring tool SHALL NOT change model contents without the intention of
	the user

Table B.4: Changed Traceables in 4.2.2

B.3.3 Deleted Traceables in 4.2.2

ld	Heading
[UC_IOAT_00001]	Integrate extracts from an AUTOSAR model of an OEM passed for further
	refinement and implementation to a supplier
[UC_IOAT_00002]	Dealing with changes of the AUTOSAR meta model over time
[UC_IOAT_00004]	Allowing for concurrent work on the same mode
[UC_IOAT_00005]	Usage within the different steps of top-down functional development



[UC_IOAT_00006]	Support for direct exchange of AUTOSAR models in a tool-chain
[UC_IOAT_00008]	An AUTOSAR model and related artifacts are shipped from one party to an-
	other.
[UC_IOAT_00009]	Filter and merge AUTOSAR models
[UC_IOAT_00010]	Handling of identical double definitions

Table B.5: Deleted Traceables in 4.2.2

B.3.4 Added Constraints in 4.2.2

none

B.3.5 Changed Constraints in 4.2.2

none

B.3.6 Deleted Constraints in 4.2.2

none



C Mentioned Class Tables

For the sake of completeness, this chapter contains a set of class tables representing meta-classes mentioned in the context of this document but which are not contained directly in the scope of describing specific meta-model semantics.

Class	ARElement (abstract)					
Package	M2::AUTOSARTe	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::ARPackage				
Note	An element that can be defined stand-alone, i.e. without being part of another element (except for packages of course).					
Base	ARObject,CollectableElement,Identifiable,MultilanguageReferrable,Packageable Element,Referrable					
Attribute	Datatype Mul. Kind Note					
_	_	_	_	_		

Table C.1: ARElement

Class	ARPackage					
Package	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::ARPackage					
Note	AUTOSAR package, allowing to create top level packages to structure the contained ARElements. ARPackages are open sets. This means that in a file based description system multiple files can be used to partially describe the contents of a package. This is an extended version of MSR's SW-SYSTEM.					
Base				ntable,Collectable eReferrable,Referrable		
Attribute	Datatype	Mul.	Kind	Note		
arPackage	ARPackage	*	aggr	This represents a sub package within an ARPackage, thus allowing for an unlimited package hierarchy. Stereotypes: atpSplitable; atpVariation Tags: atp.Splitkey=shortName, variation Point.shortLabel vh.latestBindingTime=blueprintDerivationTime xml.sequenceOffset=30		
element	PackageableEle ment	*	aggr	Stereotypes: atpSplitable; atpVariation Tags: atp.Splitkey=shortName, variation Point.shortLabel vh.latestBindingTime=systemDesignTime xml.sequenceOffset=20		



Attribute	Datatype	Mul.	Kind	Note
referenceB ase	ReferenceBase	*	aggr	This denotes the reference bases for the package. This is the basis for all relative references within the package. The base needs to be selected according to the base attribute within the references.
				Stereotypes: atpSplitable Tags: atp.Splitkey=shortLabel xml.sequenceOffset=10

Table C.2: ARPackage

Class	ApplicationPrimitiveDataType			
Package	M2::AUTOSARTemplates::SWComponentTemplate::Datatype::Datatypes			
Note	A primitive data ty	pe defin	es a set	of allowed values.
	Tags: atp.recommendedPackage=ApplicationDataTypes			
Base	ARElement, ARObject, Application Data Type, Atp Blueprint, Atp Blueprintable, Atp			
	Classifier, Atp Type, Autosar Data Type, Collectable Element, Identifiable, Multilanguage			
	Referrable, Packageable Element, Referrable			
Attribute	Datatype	Mul.	Kind	Note
_	_	_	_	-

Table C.3: ApplicationPrimitiveDataType

Class	AtomicSwCompo	onentTy	pe (abs	tract)		
Package	M2::AUTOSARTe	M2::AUTOSARTemplates::SWComponentTemplate::Components				
Note	An atomic softwar decomposed and			atomic in the sense that it cannot be further ss multiple ECUs.		
Base	-	lement,	Identifial	nt,AtpBlueprintable,AtpClassifier,Atp ble,MultilanguageReferrable,Packageable ntType		
Attribute	Datatype	Mul.	Kind	Note		
internalBe havior	SwcInternalBeh avior	01	aggr	The SwcInternalBehaviors owned by an AtomicSwComponentType can be located in a different physical file. Therefore the aggregation is "atpSplitable". Stereotypes: atpSplitable; atpVariation Tags: atp.Splitkey=internalBehavior, variation Point.shortLabel vh.latestBindingTime=preCompileTime		
symbolPro ps	SymbolProps	01	aggr	This represents the SymbolProps for the AtomicSwComponentType. Stereotypes: atpSplitable Tags: atp.Splitkey=shortName		

Table C.4: AtomicSwComponentType



Class	≪atpVariation	ı≫ Can	Cluster		
Package	M2::AUTOSARTemplates::SystemTemplate::Fibex::Fibex4Can::CanTopology				
Note	CAN bus specific cluster attributes.				
	Tags: atp.recomm	nendedF	ackage	=CommunicationClusters	
Base	ARObject, AbstractCanCluster, Collectable Element, Communication Cluster, Fibex Element, Identifiable, Multilanguage Referrable, Package able Element, Referrable				
Attribute	Datatype	Mul.	Kind	Note	
_	_	_	_	-	

Table C.5: CanCluster

Class	CommConnector	Port (a	bstract)			
Package	M2::AUTOSARTe	mplates	::Systen	nTemplate::Fibex::FibexCore::CoreTopology		
Note	The Ecu communication relationship defines which signals, Pdus and frames are actually received and transmitted by this ECU.					
	For each signal, Pdu or Frame that is transmitted or received and used by the Ecu an association between an ISignalPort, IPduPort or FramePort with the corresponding Triggering shall be created. An ISignalPort shall be created only if the corresponding signal is handled by COM (RTE or Signal Gateway). If a Pdu Gateway ECU only routes the Pdu without being interested in the content only a FramePort and an IPduPort needs to be created.					
Base	ARObject, Identifiable, Multilanguage Referrable, Referrable					
Attribute	Datatype	Datatype Mul. Kind Note				
communic ationDirecti on	Communication DirectionType	1	attr	Communication Direction of the Connector Port (input or output Port).		

Table C.6: CommConnectorPort

Class	CompuMethod				
Package	M2::AUTOSARTe	mplates	::SWCo	mponentTemplate::Datatype::ComputationMethod	
Note	This meta-class represents the ability to express the relationship between a physical value and the mathematical representation.				
	specifies the form	ula how	the inte	of the technical implementation in data types. It only rnal value corresponds to its physical pendant.	
	Tags: atp.recomm	endedF	ackage:	=CompuMethods	
Base	ARElement, ARObject, AtpBlueprint, AtpBlueprintable, Collectable Element, Identifiable, Multilanguage Referrable, Package able Element, Referrable				
Attribute	Datatype	Mul.	Kind	Note	
compulnter nalToPhys	Compu	01	aggr	This specifies the computation from internal values to physical values.	
				Tags: xml.sequenceOffset=80	



Attribute	Datatype	Mul.	Kind	Note
compuPhy sToInternal	Compu	01	aggr	This represents the computation from physical values to the internal values.
				Tags: xml.sequenceOffset=90
displayFor mat	DisplayFormatS tring	01	attr	This property specifies, how the physical value shall be displayed e.g. in documents or measurement and calibration tools. Tags: xml.sequenceOffset=20
				-
unit	Unit	01	ref	This is the physical unit of the Physical values for which the CompuMethod applies.
				Tags: xml.sequenceOffset=30

Table C.7: CompuMethod

Class	Eculnstance						
Package	M2::AUTOSARTe	M2::AUTOSARTemplates::SystemTemplate::Fibex::FibexCore::CoreTopology					
Note	is defined by a ref	ECUInstances are used to define the ECUs used in the topology. The type of the ECU is defined by a reference to an ECU specified with the ECU resource description.					
_	Tags: atp.recomm						
Base	ARObject,Collecta Referrable,Packag			exElement,Identifiable,Multilanguage Referrable			
Attribute	Datatype	Mul.	Kind	Note			
associated ComIPduG roup	ISignalIPduGro up	*	ref	With this reference it is possible to identify which ISignallPduGroups are applicable for which CommunicationConnector/ ECU. Only top level ISignallPduGroups shall be referenced by an Eculnstance. If an ISignallPduGroup contains other ISignallPduGroups than these contained ISignallPduGroups shall not be referenced by the Eculnstance. Contained ISignallPduGroups are associated to an Eculnstance via the top level ISignallPduGroup.			
associated PdurlPduG roup	PdurlPduGroup	*	ref	With this reference it is possible to identify which PduR IPdu Groups are applicable for which CommunicationConnector/ ECU.			
clientIdRan ge	ClientIdRange	01	aggr	Restriction of the Client Identifier for this Ecu to an allowed range of numerical values. The Client Identifier of the transaction handle is generated by the client RTE for inter-Ecu Client/Server communication.			
comConfig urationGw TimeBase	TimeValue	01	attr	The period between successive calls to Com_MainFunctionRouteSignals of the AUTOSAR COM module in seconds.			
comConfig urationRxT imeBase	TimeValue	01	attr	The period between successive calls to Com_MainFunctionRx of the AUTOSAR COM module in seconds.			



Attribute	Datatype	Mul.	Kind	Note
comConfig urationTxTi meBase	TimeValue	01	attr	The period between successive calls to Com_MainFunctionTx of the AUTOSAR COM module in seconds.
comEnable MDTForCy clicTransm ission	Boolean	01	attr	Enables for the Com module of this EcuInstance the minimum delay time monitoring for cyclic and repeated transmissions (TransmissionModeTiming has cyclicTiming assigned or eventControlledTiming with numberOfRepetitions > 0).
commCont roller	Communication Controller	1*	aggr	CommunicationControllers of the ECU.
connector	Communication Connector	*	aggr	All channels controlled by a single controller.
diagnostic Address	Integer	01	attr	An ECU specific ID for responses of diagnostic routines.
diagnostic Props	DiagnosticEcuP rops	01	aggr	This represents the diagnostic-related properties of an entire ECU.
partition	EcuPartition	*	aggr	Optional definition of Partitions within an Ecu.
pnResetTi me	TimeValue	01	attr	Specifies the runtime of the reset timer in seconds. This reset time is valid for the reset of PN requests in the EIRA and in the ERA.
pncPrepar eSleepTim er	TimeValue	01	attr	Time in seconds the PNC state machine shall wait in PNC_PREPARE_SLEEP.
sleepMode Supported	Boolean	1	attr	Specifies whether the ECU instance may be put to a "low power mode"
				true: sleep mode is supported
				false: sleep mode is not supported
				Note: This flag may only be set to "true" if the feature is supported by both hardware and basic software.
wakeUpOv erBusSupp orted	Boolean	1	attr	Driver support for wakeup over Bus.

Table C.8: Eculnstance



Class	EngineeringObje	ct (abs	tract)	
Package	M2::AUTOSARTe Object	mplates	::Generi	cStructure::GeneralTemplateClasses::Engineering
Note		roperties an ASA object is	s of engi AM catal uniquely	y identified by
Base	ARObject			
Attribute	Datatype	Mul.	Kind	Note
category	NameToken	1	attr	This denotes the role of the engineering object in the development cycle. Categories are such as
				SWSRC for source code
				SWOBJ for object code
				SWHDR for a C-header file
				Further roles need to be defined via Methodology.
domain	NameToken	01	attr	Tags: xml.sequenceOffset=20 This denotes the domain in which the engineering object is stored. This allows to indicate various segments in the repository keeping the engineering objects. The domain may segregate companies, as well as automotive domains. Details need to be defined by the Methodology. Attribute is optional to support a default domain. Tags: xml.sequenceOffset=40
revisionLa bel	RevisionLabelSt ring	*	attr	This is a revision label denoting a particular version of the engineering object. Tags: xml.sequenceOffset=30
shortLabel	NameToken	1	attr	This is the short name of the engineering object. Note that it is modeled as NameToken and not as Identifier since in ASAM-CC it is also a NameToken.
				Tags: xml.sequenceOffset=10

Table C.9: EngineeringObject



Class	Identifiable (abst	ract)		
Package	M2::AUTOSARTe	mplates	::Generi	cStructure::GeneralTemplateClasses::Identifiable
Note	borders). In additi	on to thi re of an	is, Identi	erred to by their identifier (within the namespace fiables are objects which contribute significantly to AR description. In particular, Identifiables might
Base	ARObject, Multilan	guageF	Referrabl	e,Referrable
Attribute	Datatype	Mul.	Kind	Note
desc	MultiLanguage OverviewParagr aph	01	aggr	This represents a general but brief (one paragraph) description what the object in question is about. It is only one paragraph! Desc is intended to be collected into overview tables. This property helps a human reader to identify the object in question. More elaborate documentation, (in particular how the object is built or used) should go to "introduction". Tags: xml.sequenceOffset=-60
category	CategoryString	01	attr	The category is a keyword that specializes the semantics of the Identifiable. It affects the expected existence of attributes and the applicability of constraints. Tags: xml.sequenceOffset=-50
adminData	AdminData	01	aggr	This represents the administrative data for the identifiable object. Tags: xml.sequenceOffset=-40
annotation	Annotation	*	aggr	Possibility to provide additional notes while defining a model element (e.g. the ECU Configuration Parameter Values). These are not intended as documentation but are mere design notes. Tags: xml.sequenceOffset=-25
introductio n	Documentation Block	01	aggr	This represents more information about how the object in question is built or is used. Therefore it is a DocumentationBlock. Tags: xml.sequenceOffset=-30



Attribute	Datatype	Mul.	Kind	Note
uuid	String	01	attr	The purpose of this attribute is to provide a globally unique identifier for an instance of a meta-class. The values of this attribute should be globally unique strings prefixed by the type of identifier. For example, to include a DCE UUID as defined by The Open Group, the UUID would be preceded by "DCE:". The values of this attribute may be used to support merging of different AUTOSAR models. The form of the UUID (Universally Unique Identifier) is taken from a standard defined by the Open Group (was Open Software Foundation). This standard is widely used, including by Microsoft for COM (GUIDs) and by many companies for DCE, which is based on CORBA. The method for generating these 128-bit IDs is published in the standard and the effectiveness and uniqueness of the IDs is not in practice disputed. If the id namespace is omitted, DCE is assumed. An example is "DCE:2fac1234-31f8-11b4-a222-08002b34c003". The uuid attribute has no semantic meaning for an AUTOSAR model and there is no requirement for AUTOSAR tools to manage the timestamp.

Table C.10: Identifiable

Primitive	Integer
Package	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::Primitive Types
Note	An instance of Integer is an element in the set of integer numbers (, -2, -1, 0, 1, 2,).
	The value can be expressed in decimal, octal, hexadecimal and binary representation. Negative numbers can only be expressed in decimal notation
	Range is from -2147483648 and 2147483647.
	Tags: xml.xsd.customType=INTEGER; xml.xsd.pattern=[+\-]?[1-9][0-9]* 0x[0-9a-f]+ 0[0-7]* 0b[0-1]+; xml.xsd.type=string

Table C.11: Integer

Primitive	Numerical
Package	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::Primitive
	Types



Note	This primitive specifies a numerical value. It can be denoted in different formats such as Decimal, Octal, Hexadecimal, Float. See the xsd pattern for details.
	The value can be expressed in octal, hexadecimal, binary representation. Negative numbers can only be expressed in decimal or float notation.
	Tags: xml.xsd.customType=NUMERICAL-VALUE; xml.xsd.pattern= $(0x[0-9a-f]+) (0[0-7]+) (0b[0-1]+) (([+\-]?[1-9][0-9]+(\.[0-9]+)? [+\-]?[0-9](\.[0-9]+)?)(E([+\-]?)[0-9]+)?) \.0 INF -INF NaN; xml.xsd.type=string$

Table C.12: Numerical

Class	PhysicalChannel	PhysicalChannel (abstract)						
Package	M2::AUTOSARTe	M2::AUTOSARTemplates::SystemTemplate::Fibex::FibexCore::CoreTopology						
Note	A physical channel is the transmission medium that is used to send and receive information between communicating ECUs. Each CommunicationCluster has at least one physical channel. Bus systems like CAN and LIN only have exactly one PhysicalChannel. A FlexRay cluster may have more than one PhysicalChannels that may be used in parallel for redundant communication. An ECU is part of a cluster if it contains at least one controller that is connected to at least one channel of the cluster.							
Base	ARObject, Identifia	ıble,Mult	tilangua	geReferrable,Referrable				
Attribute	Datatype	Mul.	Kind	Note				
commCon nector	Communication Connector	1*	ref	Reference to the ECUInstance via a CommunicationConnector to which the channel is connected. atpVariation: Variable assignment of Physical Channels to different CommunicationConnectors is expressed with this variation. Stereotypes: atpVariation Tags: vh.latestBindingTime=postBuild				
frameTrigg ering	FrameTriggerin g	*	aggr	One frame triggering is defined for exactly one channel. Channels may have assigned an arbitrary number of frame triggerings. atpVariation: If signals/PDUs/frames are variable, the corresponding triggerings must be variable, too. Stereotypes: atpSplitable; atpVariation Tags: atp.Splitkey=shortName, variation Point.shortLabel vh.latestBindingTime=postBuild				



Attribute	Datatype	Mul.	Kind	Note
iSignalTrig gering	ISignalTriggerin g	*	aggr	One ISignalTriggering is defined for exactly one channel. Channels may have assigned an arbitrary number of ISignaltriggerings. atpVariation: If signals/PDUs/frames are variable, the corresponding triggerings must be variable, too. Stereotypes: atpSplitable; atpVariation Tags: atp.Splitkey=shortName, variation Point.shortLabel vh.latestBindingTime=postBuild
pduTrigger ing	PduTriggering	*	aggr	One PduTriggering is defined for exactly one channel. Channels may have assigned an arbitrary number of I-Pdu triggerings. atpVariation: If signals/PDUs/frames are variable, the corresponding triggerings must be variable, too. Stereotypes: atpSplitable; atpVariation Tags: atp.Splitkey=shortName, variation Point.shortLabel vh.latestBindingTime=postBuild

Table C.13: PhysicalChannel

Class	PortInterface (ab	stract)		
Package	M2::AUTOSARTe	mplates	::SWCo	mponentTemplate::PortInterface
Note	Abstract base classoftware component		interfac	e that is either provided or required by a port of a
Base	· ·	lement,		nt,AtpBlueprintable,AtpClassifier,Atp ble,MultilanguageReferrable,Packageable
Attribute	Datatype	Mul.	Kind	Note
isService	Boolean	1	attr	This flag is set if the PortInterface is to be used for communication between an
				ApplicationSwComponentType or
				ServiceProxySwComponentType or
				SensorActuatorSwComponentType or
				ComplexDeviceDriverSwComponentType
				ServiceSwComponentType
				EcuAbstractionSwComponentType
				and a ServiceSwComponentType (namely an AUTOSAR Service) located on the same ECU. Otherwise the flag is not set.



Attribute	Datatype	Mul.	Kind	Note
serviceKin d	ServiceProvider Enum	01	attr	This attribute provides further details about the nature of the applied service.

Table C.14: PortInterface

Primitive	Ref				
Package	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::Primitive Types				
Note	This primitive den xsd.pattern.	otes a n	ame bas	sed reference. For detailed syntax see the	
	• first slash (relative	or absol	ute reference) [optional]	
	Identifier [re	equired]			
	• a sequence	of slas	hes and	Identifiers [optional]	
	This primitive is used by the meta-model tools to create the references.				
				xml.xsd.pattern=/?[a-zA-Z][a-zA-Z0-9 127})*; xml.xsd.type=string	
Attribute	Datatype	Mul.	Kind	Note	
base	Identifier	01	ref	This attribute reflects the base to be used for this reference.	
				Tags: xml.attribute=true	
index	PositiveInteger	01	attr	This attribute supports the use case to point on specific elements in an array. This is in particular required if arrays are used to implement particular data objects.	
				Tags: xml.attribute=true	

Table C.15: Ref

[constr_2552] Index attribute is only valid for arrays [The index attribute in references is valid only if the reference target is an ApplicationArrayElement or if the reference target is an ImplementationDataTypeElement owned by an ImplementationDataType/ImplementationDataTypeElement of category ARRAY and has an attribute maxNumberOfElements/arraySize.] ()

Class	Referrable (abst	Referrable (abstract)				
Package	M2::AUTOSARTe	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::Identifiable				
Note	Instances of this class can be referred to by their identifier (while adhering to namespace borders).					
Base	ARObject					
Attribute	Datatype	Mul.	Kind	Note		



Attribute	Datatype	Mul.	Kind	Note
shortName	Identifier	1	ref	This specifies an identifying shortName for the object. It needs to be unique within its context and is intended for humans but even more for technical reference. Tags: xml.enforceMinMultiplicity=true;
				xml.sequenceOffset=-100
shortName Fragment	ShortNameFrag ment	*	aggr	This specifies how the Referrable.shortName is composed of several shortNameFragments.
				Tags: xml.sequenceOffset=-90

Table C.16: Referrable

Class	Sdg						
Package	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::SpecialData						
Note	Sdg (SpecialDataGroup) is a generic model which can be used to keep arbitrary information which is not explicitly modeled in the meta-model. Sdg can have various contents as defined by sdgContentsType. Special Data should only be used moderately since all elements should be defined in the meta-model. Thereby SDG should be considered as a temporary solution when no explicit model is available. If an sdgCaption is available, it is possible to establish a reference to the sdg structure.						
Base	ARObject						
Attribute	Datatype	Mul.	Kind	Note			
gid	NameToken	1	attr	This attributes specifies an identifier. Gid comes from the SGML/XML-Term "Generic Identifier" which is the element name in XML. The role of this attribute is the same as the name of an XML - element. Tags: xml.attribute=true			
sdgCaptio n	SdgCaption	01	aggr	This aggregation allows to assign the properties of Identifiable to the sdg. By this, a shortName etc. can be assigned to the Sdg. Tags: xml.sequenceOffset=20			
sdgCaptio nRef	SdgCaption	01	ref	This association allows to reuse an already existing caption. Tags: xml.name=SDG-CAPTION-REF; xml.sequenceOffset=25			
sdgConten tsType	SdgContents	01	aggr	This is the content of the Sdg. Tags: xml.roleElement=false; xml.roleWrapper Element=false; xml.sequenceOffset=30; xml.type Element=false; xml.typeWrapperElement=false			

Table C.17: Sdg



Class	SenderReceiverInterface					
Package	M2::AUTOSARTe	mplates	::SWCo	mponentTemplate::PortInterface		
Note	A sender/receiver interface declares a number of data elements to be sent and received.					
	Tags: atp.recomm	nendedF	Package:	=PortInterfaces		
Base	ARElement, ARObject, AtpBlueprint, AtpBlueprintable, AtpClassifier, Atp Type, Collectable Element, DataInterface, Identifiable, Multilanguage Referrable, Packageable Element, PortInterface, Referrable					
Attribute	Datatype	Mul.	Kind	Note		
dataEleme nt	VariableDataPr ototype	1*	aggr	The data elements of this SenderReceiverInterface.		
invalidation Policy	InvalidationPolic y	*	aggr	InvalidationPolicy for a particular dataElement		

Table C.18: SenderReceiverInterface

Class	ValueSpecification (abstract)				
Package	M2::AUTOSARTe	mplates	::Comm	onStructure::Constants	
Note	Base class for expobject.	Base class for expressions leading to a value which can be used to initialize a data object.			
Base	ARObject				
Attribute	Datatype	Mul.	Kind	Note	
shortLabel	Identifier	01	ref	This can be used to identify particular value specifications for human readers, for example elements of a record type.	

Table C.19: ValueSpecification

Class	VariableDataProt	VariableDataPrototype			
Package	M2::AUTOSARTe	mplates	::SWCo	mponentTemplate::Datatype::DataPrototypes	
Note	that most likely a vector some cases optimallocation can be a line particular, the vector some cases.	A VariableDataPrototype is used to contain values in an ECU application. This means that most likely a VariableDataPrototype allocates "static" memory on the ECU. In some cases optimization strategies might lead to a situation where the memory allocation can be avoided. In particular, the value of a VariableDataPrototype is likely to change as the ECU on which it is used executes.			
Base		ARObject, AtpFeature, AtpPrototype, AutosarDataPrototype, Data Prototype, Identifiable, Multilanguage Referrable, Referrable			
Attribute	Datatype	Datatype Mul. Kind Note			
initValue	ValueSpecificati on	01	aggr	Specifies initial value(s) of the VariableDataPrototype	

Table C.20: VariableDataPrototype



Class	VariationPoint					
Package	M2::AUTOSARTe	mplates	::Generi	cStructure::VariantHandling		
Note	This meta-class represents the ability to express a "structural variation point". The container of the variation point is part of the selected variant if swSyscond evaluates to true and each postBuildVariantCriterion is fulfilled.					
Base	ARObject					
Attribute	Datatype	Mul.	Kind	Note		
desc	MultiLanguage OverviewParagr aph	01	aggr	This allows to describe shortly the purpose of the variation point.		
				Tags: xml.sequenceOffset=20		
blueprintC ondition	Documentation Block	01	aggr	This represents a description that documents how the variation point shall be resolved when deriving objects from the blueprint.		
				Note that variationPoints are not allowed within a blueprintCondition.		
				Tags: xml.sequenceOffset=28		
formalBlue printCondit ion	BlueprintFormul a	01	aggr	This denotes a formal blueprintCondition. This shall be not in contradiction with blueprintCondition. It is recommanded only to use one of the two.		
				Tags: xml.sequenceOffset=29		
postBuildV ariantCond ition	PostBuildVarian tCondition	*	aggr	This is the set of post build variant conditions which all shall be fulfilled in order to (postbuild) bind the variation point.		
				Tags: xml.sequenceOffset=40		
sdg	Sdg	01	aggr	An optional special data group is attached to every variation point. These data can be used by external software systems to attach application specific data. For example, a variant management system might add an identifier, an URL or a specific classifier.		
				Tags: xml.sequenceOffset=50		
shortLabel	Identifier	01	ref	This provides a name to the particular variation point to support the RTE generator. It is necessary for supporting splitable aggregations and if binding time is later than codeGenerationTime, as well as some RTE conditions. It needs to be unique with in the enclosing Identifiables with the same ShortName.		
				Tags: xml.sequenceOffset=10		
swSyscon d	ConditionByFor mula	01	aggr	This condition acts as Binding Function for the VariationPoint. Note that the mulitplicity is 01 in order to support pure postBuild variants.		
				Tags: xml.sequenceOffset=30		

Table C.21: VariationPoint



Primitive	VerbatimString					
Package	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::Primitive Types					
Note	This primitive represents a string in which white-space needs to be preserved. Tags: xml.xsd.customType=VERBATIM-STRING; xml.xsd.type=string; xml.xsd.white Space=preserve					
Attribute	Datatype	Mul.	Kind	Note		
xmlSpace	XmlSpaceEnum	01	attr	This attribute is used to signal an intention that in that element, white space should be preserved by applications. It is defined according to xml:space as declared by W3C. Tags: atp.Status=shallBecomeMandatory xml.attribute=true; xml.attributeRef=true; xml.name=space; xml.nsPrefix=xml		

Table C.22: VerbatimString